




(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2017/01/12
(41) Mise à la disp. pub./Open to Public Insp.: 2017/07/20
(62) Demande originale/Original Application: 3 011 078
(30) Priorités/Priorities: 2016/01/12 (DE10 2016 200 254.6);
2016/07/01 (DE10 2016 212 012.3);
2016/07/01 (DE10 2016 212 013.1);
2016/09/27 (DE10 2016 218 507.1);
2016/09/27 (DE10 2016 218 509.8);
2016/09/29 (DE10 2016 218 884.4)

(51) Cl.Int./Int.Cl. *B67D 1/08* (2006.01),
A23L 2/00 (2006.01), *A23L 5/00* (2016.01),
A47J 31/00 (2006.01), *A47J 31/44* (2006.01),
B65D 81/00 (2006.01), *B65D 85/816* (2006.01)
(71) Demandeur/Applicant:
FREEZIO AG, CH
(72) Inventeurs/Inventors:
KRUGER, MARC, DE;
EMPL, GUNTER, DE;
FISCHER, DANIEL, CH
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : DISPOSITIF DE RECEPTION POUR UNE CARTOUCHE DE BOISSON OU D'ALIMENT
(54) Title: CARTRIDGE HOUSING FOR A BEVERAGE OR FOOD CARTRIDGE

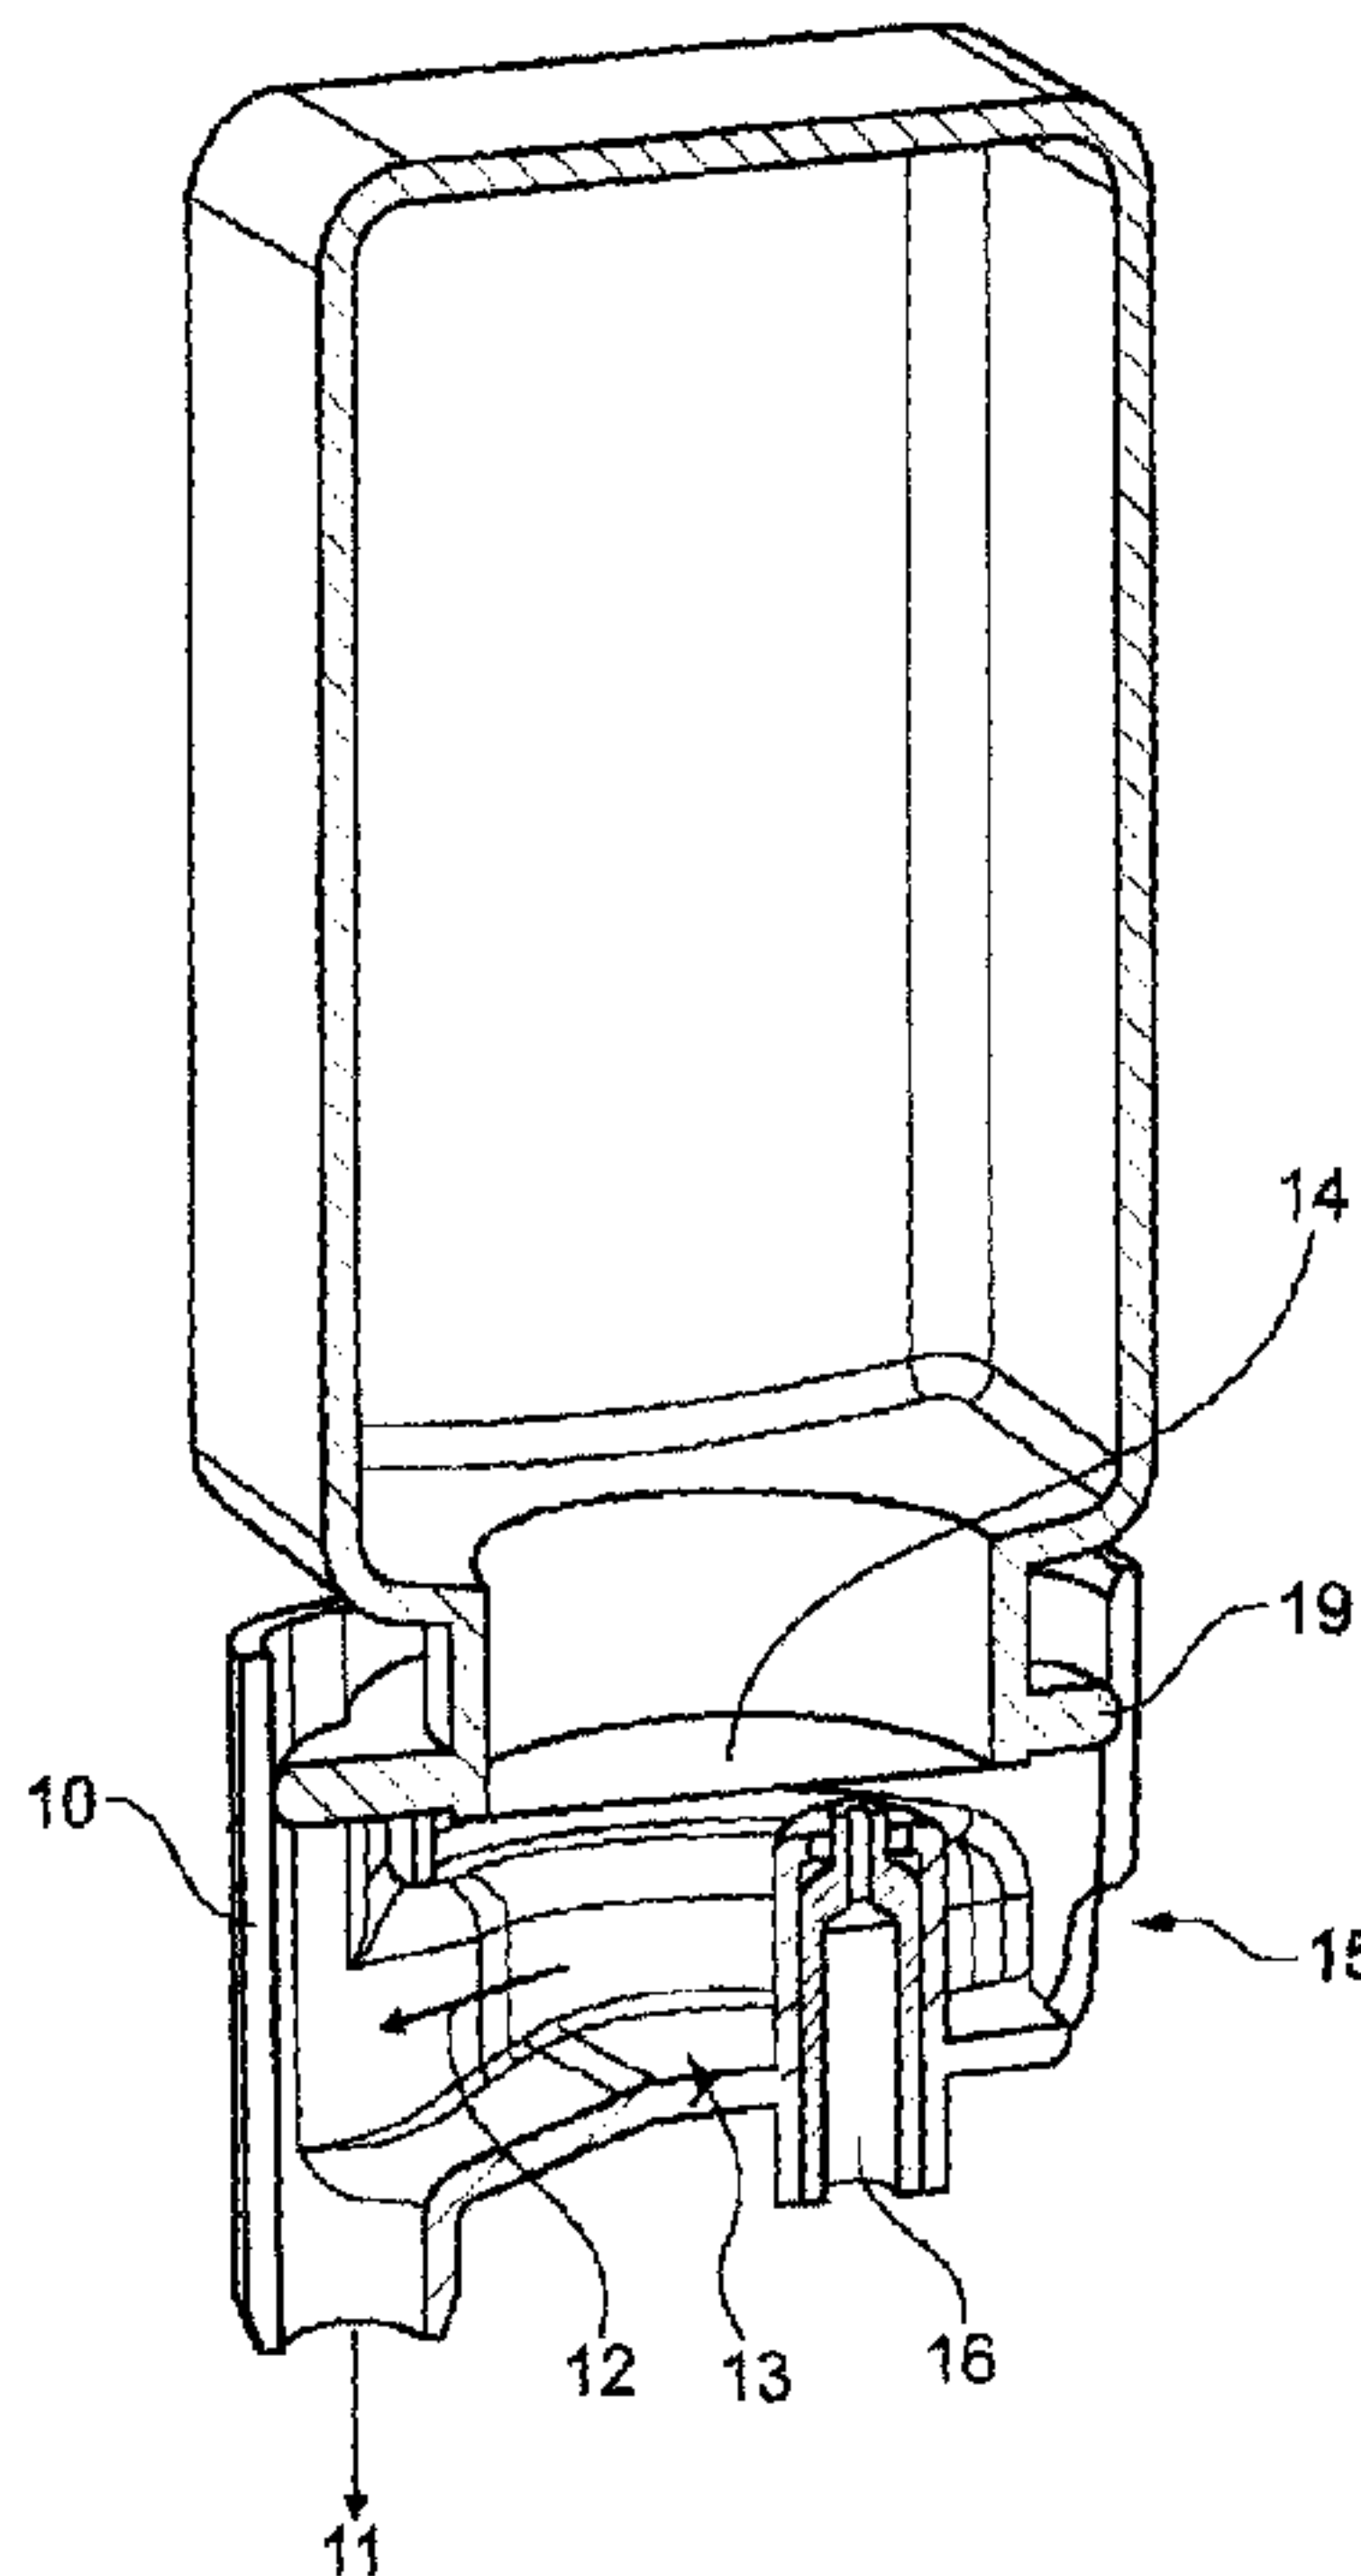

(57) **Abrégé/Abstract:**

A cartridge receptacle having a diluent, in particular water, inflow, a mixing chamber in which the diluent and a beverage substrate and/or foodstuff substrate are mixed, and an outflow. The cartridge receptacle has a fastening and/or securing ring. The fastening and/or securing ring is provided with a predetermined breaking point and/or predetermined deformation point at the mixing chamber.

Abstract

A cartridge receptacle having a diluent, in particular water, inflow, a mixing chamber in which the diluent and a beverage substrate and/or foodstuff substrate are mixed, and an outflow. The cartridge receptacle has a fastening and/or securing ring. The
5 fastening and/or securing ring is provided with a predetermined breaking point and/or predetermined deformation point at the mixing chamber.

DESCRIPTION**Title**

Cartridge housing for a beverage or food cartridge

Related Application

- 5 This application is a divisional of Canadian Patent Application No. 3,011,078 and claims priority from therein.

Prior art

The invention relates to a cartridge receptacle having a diluent, in particular water, inflow, a mixing chamber in which the diluent and a beverage substrate and/or
10 foodstuff substrate are mixed, and an outflow.

Cartridge receptacles of this kind are known from the prior art, for example from EP 2 017 221 A1 and WO 2006/005401 A2, and are used to produce for example cold beverages by means of cartridges. In addition to good hygiene, good mixing between the beverage substrate and/or foodstuff substrate and the solvent, in particular water,
15 which are mixed in the cartridge receptacle is important.

Summary of the invention

Therefore, it was the object of the present invention to provide a cartridge receptacle which satisfies these demands.

The object is achieved by a cartridge receptacle having a diluent, in particular water, inflow, a mixing chamber in which the diluent and a beverage substrate and/or
20 foodstuff substrate are mixed, and an outflow, wherein, with regard to the direction of flow of the diluent, the flow cross section is first expanded and then reduced again.

The statements made with regard to this subject of the present invention apply equally to the other subjects of the present invention and vice versa.

The present invention relates to a cartridge receptacle which reversibly or irreversibly receives a cartridge, in particular partially. The cartridge has a cavity in which a
5 beverage substance and/or foodstuff substance is located and which is hermetically sealed prior to beverage and/or foodstuff production. In order to produce the beverage and/or the foodstuff, the cartridge is then opened, in particular pierced, and the substrate runs/flows into a mixing chamber of the cartridge receptacle, which also has a solvent, in particular water, inflow, which is mixed with the substrate in order to
10 produce the finished beverage or foodstuff, which runs out of the mixing chamber through an outflow likewise provided on the cartridge receptacle. The volumetric flow of the solvent is in this case generally much greater than the volumetric flow of the substrate.

According to the invention, the flow cross section, i.e. the cross section which is
15 available for the liquid to flow, in particular for the solvent flow and/or the mixture of solvent and substrate, is now provided such that, with regard to the direction of flow of the solvent, the flow rate is first of all slowed down and then accelerated again. The acceleration which is achieved by a flow cross section constriction takes place as far as possible after the solvent and the substrate have been blended.

20 The particular transition between the region with an expanded flow cross section and the regions with a constricted flow cross section is defined by the profile of the wall of the mixing chamber. To this end, the wall can have a curved or stepped, or angular, profile in the transition regions.

According to a further preferred subject, or subject according to the invention, of the
25 present invention, the mixing chamber has a protuberance.

The statements made with regard to this subject of the present invention apply equally to the other subjects of the present invention and vice versa.

5 This protuberance projects preferably out of the circumference, in particular the lateral circumference, which extends between the two end sides of the cartridge receptacle. Preferably, the protuberance is part of the mixing chamber. Preferably, the circumference of the mixing chamber has a substantially circular shape and the protuberance projects out of this circular shape. According to a particularly preferred embodiment of the present invention, the outflow of the finished beverage or foodstuff is provided in the protuberance.

10 According to a further preferred subject, or subject according to the invention, of the present invention, the cartridge receptacle has a fastening and/or securing ring. This fastening and/or securing ring preferably receives the cartridge, which is fastened to the cartridge receptacle. Preferably, the fastening and/or securing ring is provided with a predetermined breaking point and/or predetermined deformation point at the
15 mixing chamber. Before the production of a beverage or foodstuff, this point is destroyed and/or deformed, in particular irreversibly deformed. This can take place for example by the cartridge and the cartridge receptacle being moved relative to one another. As a result of the deformation and/or destruction, the cartridge receptacle can be used only once and/or the interconnection between the cartridge receptacle
20 and the cartridge can no longer be released.

Preferably, at least one mixing element is provided in the mixing chamber, said mixing element ensuring that the solvent or the mixture of solvent and substrate is swirled. Preferably, the mixing element is provided as a protuberance in the bottom. Preferably, the mixing element is designed such that carbonic acid which is dissolved
25 in the solvent does not outgas or outgases only a little. Preferably, the mixing element is designed such that it exhibits only a slight pressure drop.

Preferably, the cartridge receptacle has a piercing means which perforates the membrane. This piercing means is designed for example as a spike which projects out of the bottom of the mixing chamber. Preferably, the piercing means has, on its outer circumference, at least one, preferably a plurality of indentations and/or protuberances, which serve as outflow for the substrate. The quantity and size of the indentations and/or protuberances depend preferably on the viscosity of the substrate. Preferably, the piercing means has a channel which ends in or in the region of the tip. Through this channel, it is possible for a gas, in particular air or CO₂, to be blown into the cartridge in order to accelerate and/or to meter the dispensing of the substrate.

Preferably, the cartridge receptacle has a spike guide, wherein the piercing means is mounted in a displaceable manner within the spike guide, wherein the piercing means is displaceable between a retracted position, in which the piercing means is away from the membrane, and an extended position, in which the piercing means pierces the membrane of the cartridge and projects into the cartridge. Preferably at least one lateral channel for conveying the beverage substrate and/or foodstuff substrate in the direction of the mixing chamber when the membrane is pierced by the piercing means has been introduced into the outer wall of the piercing means. Furthermore, a compressed-air line is particularly preferably integrated into the piercing means, wherein a compressed-air connection for connecting to a compressed-air source is formed on a side of the piercing means that is remote from the cartridge, said compressed-air connection being accessible in particular from outside the cartridge receptacle, and wherein a on a side of the piercing means that faces the cartridge.

Preferably, the inflow and the outflow are provided at opposite ends of the cartridge receptacle. Particularly preferably, the piercing means is provided in a manner aligned with the inflow and the outflow.

According to a further preferred subject, or subject according to the invention, of the present invention, the outlet is provided in a movable, in particular pivotable, manner on the mixing chamber, or has a means with which the outlet can be oriented, in particular can be directed in the direction of the side wall of the vessel which receives
5 the finished beverage or foodstuff. This embodiment is advantageous in particular in the case of beverages or foodstuffs that tend to foam. The outlet can be moved manually or by a motor. In the event that the cartridge has an identification, the pivoting can take place automatically after the dispenser has recognized the cartridge.

10 A further subject of the present invention is a system having the preferred cartridge receptacle, or cartridge receptacle according to the invention, on/in which a cartridge is provided, said cartridge having a wall region, one end of which is adjoined by a connecting region which is closed, in particular by a membrane (14), and at the opposite end of which optionally a bottom region is provided, wherein the wall region
15 and optionally the bottom region define a cavity which accommodates a beverage substrate and/or foodstuff substrate.

The statements made with regard to this subject of the present invention apply equally to the other subjects of the present invention and vice versa.

The cartridge is produced preferably from plastic, in particular by a molding and/or
20 blow-molding process. The cartridge has a side wall which has for example a round, rectangular, square, conical or oval cross section. A bottom is generally provided, in particular in one piece, at one end of the side wall. The side wall and optionally the bottom region define a cavity in which a beverage substrate and/or foodstuff substrate, in particular in liquid form, is provided. Provided at the other end of the wall
25 region is a connecting region by way of which the cartridge is connected to the cartridge receptacle. This cartridge receptacle can be part of a dispenser or a component separate from the dispenser.

Preferably, the connecting region is provided such that it has a flange. The flange protrudes from the connecting region and projects from a wall region of the connecting region preferably at an angle, particularly preferably at right angles. In order to produce the beverage or foodstuff, the flange is oriented preferably
5 horizontally. Preferably, the flange is made of solid material, i.e. not manufactured in a hollow manner.

Further preferably, the flange is provided with a positioning and/or covering means. The positioning means ensures that the cartridge can be arranged on the dispenser and/or on the cartridge receptacle only in a particular position, in particular at a
10 particular angle of rotation, in particular with regard to the longitudinal center axis of the cartridge. The covering means covers a region, in particular a region through which the finished beverage or foodstuff flows out. Preferably, the positioning means and the covering means are identical.

Preferably, the positioning means and/or covering means is an indentation and/or
15 protuberance which protrudes from the flange, in particular the circumference thereof. Preferably, the positioning means and/or covering means is provided in one piece with the flange. For example, the positioning means and/or covering means is configured as a lug which is integrally formed at one point on the circumference of the flange. The thickness of the positioning means and/or covering means corresponds in
20 this case at least substantially to the thickness of the flange.

According to one preferred embodiment, a neck is provided between the wall region and the connecting region. This neck can have for example a round cross section. The neck represents the wall region of the connecting region. The flange adjoins the neck preferably at right angles.

25 Preferably, the membrane which closes, in particular hermetically seals, the cartridge before it is used, is provided on the flange, in particular the end face thereof, in particular in a sealed manner. To this end, the flange, in particular the end face

thereof, can have a bead, in particular a bead in the form of a circular ring, which cooperates with the sealing tool during sealing. Preferably, the outer circumference of the membrane is less than the outer circumference of the flange.

5 Preferably, a fastening means is provided in the wall region and/or in the region of the neck. By way of this fastening means, the cartridge can be connected to a dispenser. The fastening means can be for example a groove in which a fastening means on the dispenser engages.

10 The cartridge receptacle can be connected fixedly to the cartridge or be a replacement part which is removed from the cartridge after the latter has been used, and is connected to a new cartridge. Preferably, the cartridge receptacle is made of plastic, in particular by injection-molding. Preferably, the cartridge receptacle is connected to a dispenser.

Preferably, the covering means, which is provided on the flange of the cartridge, covers the outflow of the cartridge receptacle.

15 Preferably, the flange on the cartridge, in particular the circumference thereof, cooperates in a sealing manner with the cartridge receptacle. To this end, the circumference of the flange can engage for example in a groove in the cartridge receptacle. This flange/groove connection can also serve as a force-fit, in order to prevent the cartridge from shifting relative to the cartridge receptacle during beverage
20 or foodstuff production and the connection between the cartridge and cartridge receptacle losing its tightness.

According to one preferred embodiment, the cartridge and the cartridge receptacle are provided to be longitudinally displaceable with respect to one another, in particular before the membrane is pierced. As a result of this longitudinal
25 displacement, the piercing means can then be brought into engagement with the membrane and pierce the latter.

Preferably, the cartridge and the cartridge receptacle are connected together in a rotationally fixed manner.

Preferably, the piercing means has a channel. Through this channel, a gas can be pushed into the cartridge, which pushes the beverage substrate and/or foodstuff substrate out of the cartridge, in particular into the mixing space of the cartridge receptacle.

In some embodiments of the invention, there is provided a cartridge receptacle having a diluent, in particular water, inflow, a mixing chamber in which the diluent and a beverage substrate and/or foodstuff substrate are mixed, and an outflow, wherein the cartridge receptacle has a fastening and/or securing ring, wherein the fastening and/or securing ring is provided with a predetermined breaking point and/or predetermined deformation point at the mixing chamber.

In some embodiments of the invention, there is provided A system having a cartridge receptacle as disclosed herein on/in which a cartridge is provided, said cartridge having a wall region, one end of which is adjoined by a connecting region which is closed, in particular by a membrane, and at the opposite end of which optionally a bottom region is provided, wherein the wall region and optionally the bottom region define a cavity which accommodates a beverage substrate and/or foodstuff substrate.

Description of the figures

In the following text, the invention is explained by way of figures 1 to 12. These explanations are merely by way of example and do not limit the general concept according to the invention. The explanations apply to the cartridge according to the invention and to the system according to the invention equally.

Figures 1 - 4 show a first embodiment of the system according to the invention.

Figures 5 - 8 show a further embodiment of the system according to the invention.

Figure 9 shows an embodiment with a fastening means.

Figures 10 and 11 show two examples of mixing elements.

5 Figure 12 shows the holder for the cartridge receptacle on the dispenser.

Figure 13 shows a cartridge of a system according to a further embodiment of the present invention.

Figure 14 shows a cartridge receptacle of the system according to the further embodiment of the present invention.

10 Figure 15 shows a spike of the cartridge receptacle according to the further embodiment of the present invention.

Figures 1 - 4 show a first embodiment of the system according to the invention, which consists of a cartridge 1 and a cartridge receptacle 10. The cartridge is manufactured preferably from a plastic material, for example by injection-molding or by a blow-
15 molding technique. The cartridge has an, in the present case square, wall region 6, an in this case upper end of which is adjoined by a bottom region 7. The wall region 6 and the bottom region 7 delimit a cavity in which the beverage substrate and/or foodstuff substrate, in particular a concentrate, is located, with which a beverage or foodstuff can be produced. At the opposite end of the wall region from the bottom
20 region, in this case the lower end, a connecting region 4 is provided, which in the present case has a neck 3 and a flange 5. The cavity of the cartridge is hermetically sealed by a closure 14, in this case a membrane, after it has been filled. The membrane 14, in particular a plastic foil is connected to the flange preferably cohesively, in particular by sealing. By way of the connecting region, the cartridge is
25 connected to a cartridge receptacle. A positioning and/or covering means 8, which in

the present case is provided as a protuberance, in particular as a lug-like protuberance, is provided on the flange 5. The lug is in this case integrally formed on the flange. Furthermore, as can be gathered in particular from figures 1b) and c), the system has a cartridge receptacle 10. This cartridge receptacle has a solvent, in particular water, inflow 15 (cf. figure 2) and a mixing chamber 13 in which the solvent and the beverage substrate and/or foodstuff substrate are mixed. The direction of flow of the mixture is indicated by the arrow 12 in figure 1c). The finished beverage/foodstuff leaves the mixing chamber through the outflow 11 and is collected in a container, for example a glass. Furthermore, as can be gathered in particular from figure 2, the cartridge receptacle has a piercing means 16, in this case a spike 16, which, as can be seen in particular in figure 3, pierces the membrane, which is sealed to the flange region of the cartridge, such that the beverage substrate or foodstuff substrate can flow into the flow chamber 13 in particular along the outer face of the spike, which is provided preferably with outflow channels 17 on its outer side for this purpose.

Figure 2 shows the system before the piercing means 16 comes into engagement with the membrane 14. In order to achieve this, the cartridge and/or the cartridge receptacle are shifted longitudinally with respect to one another such that the spike 16 penetrates the membrane 14, this being clearly visible in particular from figure 3c). In said figure, the channels 17 through which the substrate flows into the mixing chamber can also be identified particularly well. The flow of the substrate into the mixing chamber can be accelerated and controlled in a targeted manner by gas which is pushed into the cartridge 1 through a duct 18 in the piercing spike 16. For example, the pressure in the cartridge can be adapted to the volumetric flow of the solvent.

As can be gathered in particular from figure 1d) and figure 4, the flange 5 of the cartridge 1 cooperates in a sealing manner with the cartridge receptacle and as a result ensures that liquid leaves the mixing chamber only through the outflow 5.

Furthermore, it is apparent in particular from these figures that the protuberance 8 in the present case is not only a positioning means but also covers the outflow 11 in the cartridge receptacle in particular in a sealing manner. The flange 8 and the protuberance 8 provided thereon can cooperate in a sealing manner, by way of their end face and/or by way of their circumference, with corresponding faces of the cartridge receptacle.

Figures 5 - 8 show a further embodiment of the system according to the invention. As regards the cartridge, reference can be made essentially to the statements made with regard to figures 1 to 4, wherein the cartridge also has, in addition to the flange 5, a fastening means 20 in its connecting region, said fastening means 20 connecting the cartridge 1 to the cartridge receptacle 10. Furthermore, the wall region 6 has in the present case an indentation 24 which allows a longitudinal displacement between the cartridge and the cartridge receptacle and optionally a dispenser and which also represents a guide for the cartridge.

As regards the cartridge receptacle 10, too, reference can be made to the statements made with regard to figures 1 - 4. However, as can be gathered in particular from figure 7, the cartridge receptacle in the present case has a fastening or securing ring 21 which is connected to the mixing chamber 13 by means of deformation and/or predetermined breaking points 22. This ring 21 cooperates in a force-fitting manner with the fastening means 20, for example in this case a collar 20 which is provided on the cartridge. Furthermore, it is clearly apparent from figure 7 that the cartridge receptacle 10, in addition to the spike 18, also has further piercing means 16. Through the spike 18, a gas is pushed into the cartridge, said gas pushing the substrate out of the cartridge. The opening means 16 cut into the membrane, in this case with angled cuts, which then form flaps which are pushed downward under the pressure of the substrate and thus allow the substrate to flow out more easily. A person skilled in the art will recognize that a piercing means 16 may also suffice, or that it is also possible to use the piercing of the membrane and the running out of the

substrate as explained with reference to figures 1 - 4 in the present case. Of course, the current opening means 16, 18 can also be transferred to the embodiment according to figures 1 to 4.

Figure 5 shows the system prior to piercing. Figure 6 shows the system after the membrane has been pierced. By way of a relative movement, illustrated by means of arrow 2, between the mixing chamber 13 and the cartridge 1, the predetermined deformation points and/or predetermined breaking points 22 are deformed or destroyed, respectively, such that the cartridge can move together with the ring 21 in the direction of the mixing chamber 13. As a result of this movement, in which the flange 5 is also introduced into the groove 27 and cooperates with the latter in a sealing manner, the membrane 14 is perforated and the substrate can flow out of the cartridge into the mixing chamber, in which it is mixed with a solvent, which is metered into the mixing chamber through the inflow 15, and leaves the mixing chamber through the outflow 11.

Figure 9 shows a fastening means, in this case a groove 25, in the wall region of the cartridge. It is possible for a fastening means 26, with which the cartridge is fastened to a dispenser, to engage in this groove.

Figures 10 and 11 each show the mixing chamber in plan view. In the present case, the mixing chamber 13 is provided with a mixing element 28, which, in the present case, consists in each case of several components. In the embodiment according to figure 10, the components are in the form of circular ring segments, wherein the diameters of the circular rings can differ. In the embodiment according to figure 11, the components are angles. Preferably, the mixing elements 28 are designed such that they blend the substrate and the solvent together readily, but also such that only as small a pressure loss as possible arises.

In figure 12, the system consisting of the cartridge 1 and the cartridge receptacle 10 is shown on the right-hand side. The view is from the direction of the outflow in this

case. The left-hand illustration in figure 12 shows a holder 29 with which the system 1, 10 is held on a dispenser. The holder 29 has a cutout into which the bottom of the mixing chamber projects at least partially. The holder serves as a support for the system. Located beneath the holder 29 is a container, into which the finished
5 beverage or foodstuff runs. Furthermore, the holder has a guide 30, which cooperates with the cartridge receptacle 10 in a form-fitting manner and secures the latter against slipping to the side and/or twisting relative to the holder 29. In the present case, the guide is provided in a manner spaced apart from the cutout. A person skilled in the art will understand that the function of securing against slipping
10 and/or twisting can also be assumed by a form fit between the cutout and the bottom of the cartridge receptacle. The cutout is adjoined by a connection for the solvent, which is preferably not part of the holder, however.

Figure 13 illustrates four depictions of a cartridge 1 according to a further exemplary embodiment of the present invention. The cartridge 1 and the associated system of
15 cartridge 2 and cartridge receptacle 10 (illustrated in figure 14) are similar in terms of their function to the system, explained with reference to figures 1 to 4, according to the first embodiment of the present invention.

However, the cartridge 1 shown in figure 13 has, by contrast, two flanges 5. Both
20 flanges 5 serve to fasten the cartridge receptacle 10 to the cartridge 1. In addition, the membrane 14 is sealed to the outer flange 5.

The cross section (perpendicular to the longitudinal axis of the cartridge 1) of the two
flanges 5 has a substantially round circumference, wherein a rectilinear circumferential region 31 is provided on one side. In the rectilinear or flattened circumferential region 31, the circumference extends as a virtually straight line (visible
25 on the underside of the flange 5 in the right-hand depiction in figure 13), while the circumference of the flange 5 away from the rectilinear circumferential region 31 extends as a curved line. The rectilinear circumferential region 31 serves as a

positioning means, by way of which the orientation of the cartridge 1 is fixed with respect to the cartridge receptacle 10.

In figure 11, the matching cartridge receptacle 10 can be seen. It is apparent that, in the further embodiment, the circumference of the cartridge receptacle 10 has a shape corresponding to the contour of the two flanges 5 illustrated in figure 10, such that the cartridge 2 and cartridge receptacle 10 can be connected together only in a particular orientation with respect to one another. The rectilinear circumferential region 31 thus serves as a twist prevention means. Advantageously, this also defines the region of the cartridge 1 in which the gas is pushed into the cavity.

10 Arranged within the mixing chamber 13 is a spike guide 32 in which the spike 16 (also referred to as piercing means) is guided in a movable manner. Thus, in the further embodiment, the perforation of the membrane 14 is not brought about by a relative movement between the cartridge 1 and cartridge receptacle 10, but rather the spike 16 is guided in a movable manner in the cartridge receptacle 10 that is fixed
15 relative to the cartridge 1. In this way, the spike 16 can be transferred from a retracted position (corresponds especially to the initial state of the system), in which the spike 16 is away from the membrane 14, into an extended position, in which the spike 16 protrudes into the cavity of the cartridge 1 and in the process perforates the membrane 14. In this extended position, the cartridge 1 is thus opened and the
20 beverage substrate and/or foodstuff substrate can pass through outflow channels 17 in the outer face of the spike 16, past the membrane 14, and into the mixing chamber 13.

On a side of the cartridge receptacle 10 that faces the cartridge 1, a latching strip 33 is furthermore provided, which, in order to fasten the cartridge 1 to the cartridge
25 receptacle 10, engages around one of the two flanges 5 in a form-fitting and/or force-fitting manner. In this way, a relative movement between the cartridge 1 and cartridge receptacle 10 is prevented.

Figure 14 illustrates a schematic view of a spike 16 which is guided in the spike guide 32 shown in figure 13. The spike 16 has an internal compressed-air line 34, which serves as a gas inlet 18, and the outer outflow channels 17, through which the substrate can flow past the membrane 14 pierced by means of the spike 16 and into the mixing chamber 13. A compressed-air connection of the compressed-air line 34 for connecting to a compressed-air source is formed on a side of the spike 16 that is remote from the cartridge 1, said compressed-air connection being accessible from outside the cartridge receptacle 10, wherein a compressed-air outlet of the compressed-air line 34 for blowing the compressed air into the cartridge 1 is formed on a side of the spike 16 that faces the cartridge 1.

An arrangement in which the spike 16 shown in figure 14 is arranged in the spike guide 32 of the cartridge receptacle 10 shown in figure 13 and the cartridge receptacle 10 shown in figure 13 is then connected to the cartridge 1 shown in figure 12 represents a system according to the further exemplary embodiment of the present invention.

In the following text, possible embodiments of the cartridge receptacle according to the invention and of the system according to the invention are described.

Embodiment 1 relates to a cartridge receptacle 10 having a diluent, in particular water, inflow 15, a mixing chamber 13 in which the diluent and a beverage substrate and/or foodstuff substrate are mixed, and an outflow 11, wherein, with regard to the direction of flow of the diluent, the flow cross section is first expanded and then reduced again.

Embodiment 2 a) relates to a cartridge receptacle 10 having a diluent, in particular water, inflow 15, a mixing chamber 13 in which the diluent and a beverage substrate and/or foodstuff substrate are mixed, and an outflow 11, wherein the mixing chamber 13 has a protuberance.

Embodiment 2 b) relates to a cartridge receptacle 10 according to embodiment 1, wherein the mixing chamber 13 has a protuberance.

Embodiment 3 relates to a cartridge receptacle 10 according to embodiment 2 a) or 2 b), wherein the outflow 11 is provided in the protuberance.

5 Embodiment 4 a) relates to a cartridge receptacle 10 having a diluent, in particular water, inflow 15, a mixing chamber 13 in which the diluent and a beverage substrate and/or foodstuff substrate are mixed, and an outflow 11, wherein it has a fastening and/or securing ring 21.

10 Embodiment 4 b) relates to a cartridge receptacle 10 according to embodiments 1 to 3, wherein it has a fastening and/or securing ring 21.

Embodiment 5 relates to a cartridge receptacle 10 according to embodiment 4 a) or 4 b), wherein the fastening and/or securing ring 21 is provided with a predetermined breaking point and/or predetermined deformation point 22 at the mixing chamber.

15 Embodiment 6 relates to a cartridge receptacle 10 according to one of the preceding embodiments, wherein at least one mixing element is provided in the mixing chamber 13.

Embodiment 7 relates to a cartridge receptacle 10 according to one of the preceding embodiments, wherein it has a piercing means 16 which perforates the membrane 14.

20 Embodiment 8 relates to a cartridge receptacle 10 according to embodiment 7, wherein, wherein the cartridge receptacle 10 has a spike guide 32 and the piercing means 16 is mounted in a displaceable manner within the spike guide 32, wherein the piercing means 16 is displaceable between a retracted position, in which the piercing means 16 is away from the membrane 14, and an extended position, in

which the piercing means 16 pierces the membrane 14 of the cartridge 1 and projects into the cartridge 1.

Embodiment 9 relates to a cartridge receptacle 10 according to embodiment 8, wherein at least one lateral channel 71 for conveying the beverage substrate and/or foodstuff substrate in the direction of the mixing chamber 8 when the membrane 14 is pierced by the piercing means 16 has been introduced into the outer wall of the piercing means 16.

Embodiment 10 relates to a cartridge receptacle 10 according to embodiment 9, wherein a compressed-air line 34 is integrated into the piercing means 16, and wherein a compressed-air connection of the compressed-air line 34 for connecting to a compressed-air source is formed on a side of the piercing means 16 that is remote from the cartridge 1, said compressed-air connection being accessible in particular from outside the cartridge receptacle 10, and wherein a compressed-air outlet of the compressed-air line 34 for blowing the compressed air into the cartridge 1 is formed on a side of the piercing means 16 that faces the cartridge 1.

Embodiment 11 relates to a cartridge receptacle 10 according to one of the preceding embodiments, wherein the inflow 15 and the outflow 11 are provided at opposite ends of the cartridge receptacle 10.

Embodiment 12 relates to a cartridge receptacle 10 according to either of embodiments 7 – 8, wherein the piercing means 16 is provided in a manner aligned with the inflow 15 and the outflow 11.

Embodiment 13 relates to a system having a cartridge receptacle 10 according to one of the preceding embodiments on/in which a cartridge 1 is provided, said cartridge 1 having a wall region 6, one end of which is adjoined by a connecting region 4 which is closed, in particular by a membrane 14, and at the opposite end of which optionally a

bottom region 7 is provided, wherein the wall region and optionally the bottom region define a cavity which accommodates a beverage substrate and/or foodstuff substrate.

Embodiment 14 relates to a system according to embodiment 13, wherein the connecting region 4 has a flange 5 which is provided with a positioning means and/or covering means 8.

Embodiment 15 relates to a system according to embodiment 14, wherein the positioning means and/or covering means 8 is an indentation and/or protuberance which protrudes from the flange, in particular the circumference thereof.

Embodiment 16 relates to a system according to one of embodiments 13 – 15, wherein a neck 3 is provided between the wall region 6 and the connecting region 4.

Embodiment 17 relates to a system according to one of embodiments 13 – 16, wherein the membrane 14 is provided on the flange.

Embodiment 18 relates to a system according to one of embodiments 13 – 17, wherein the cartridge receptacle 10 is provided in the connecting region 4 of the cartridge 1.

Embodiment 19 relates to a system according to one of embodiments 14 – 18, wherein the flange cooperates in a sealing manner with the cartridge receptacle 10.

Embodiment 20 relates to a system according to one of embodiments 13 – 19, wherein the cartridge 1 and the cartridge receptacle 10 are connected together in a rotationally fixed manner.

Embodiment 21 relates to a system according to one of embodiments 10 – 18, wherein the covering means 8 covers the outflow 11 of the cartridge receptacle 10.

List of reference signs

- | | | |
|----|--|---|
| 1 | Cartridge | |
| 2 | Direction of movement | |
| 3 | Neck | |
| 5 | 4 | Connecting region |
| 5 | Flange | |
| 6 | Wall region | |
| 7 | Bottom region | |
| 8 | Positioning and/or covering means, indentation and/or protuberance | |
| 10 | 9 | Inflow of the substance, piercing means |
| 10 | Cartridge receptacle | |
| 11 | Outflow of substance plus solvent/water | |
| 12 | Direction of flow of substance plus solvent/water | |
| 13 | Mixing chamber | |
| 15 | 14 | Closure, membrane |
| 15 | Solvent inflow, water inflow | |
| 16 | Piercing means, spike | |
| 17 | Outflow channels | |

- 18 Gas inlet
- 19 Seal, collar seal
- 20 Fastening means, collar
- 21 Fastening ring, securing ring
- 5 22 *Deformation and/or predetermined breaking point*
- 23 Indentation and/or protuberance of the cartridge receptacle
- 24 Indentation, guide
- 25 Form-fitting means for a fastening means 26
- 26 Fastening means
- 10 27 Sealing means, groove
- 28 Mixing elements
- 29 Holder
- 30 *Guide for the cartridge receptacle*
- 31 Rectilinear circumferential region
- 15 32 Spike guide
- 33 Latching strip
- 34 Compressed-air line

CLAIMS:

1. A cartridge receptacle having a diluent, in particular water, inflow, a mixing chamber in which the diluent and a beverage substrate and/or foodstuff substrate are mixed, and an outflow, wherein the cartridge receptacle has a fastening and/or securing ring, wherein the fastening and/or securing ring is provided with a predetermined breaking point and/or predetermined deformation point at the mixing chamber.
2. The cartridge receptacle as claimed in claim 1, wherein with regard to the direction of flow of the diluent, the flow cross section is first expanded and then reduced again
3. The cartridge receptacle as claimed in claim 1 or 2, wherein the mixing chamber has a protuberance.
4. The cartridge receptacle as claimed in claim 3, wherein the outflow is provided in the protuberance.
5. The cartridge receptacle as claimed in any one of claims 1-4, wherein at least one mixing element is provided in the mixing chamber.
6. The cartridge receptacle as claimed in any one of claims 1-5, wherein the cartridge receptacle has a piercing means which perforates the membrane.
7. The cartridge receptacle as claimed in claim 6, wherein the cartridge receptacle has a spike guide and the piercing means is mounted in a displaceable manner within the spike guide, wherein the piercing means is displaceable between a retracted position, in which the piercing means is away from the membrane, and an extended position, in which the piercing means pierces the membrane of the cartridge and projects into the cartridge.

8. The cartridge receptacle as claimed in claim 7, wherein at least one lateral channel for conveying the beverage substrate and/or foodstuff substrate in the direction of the mixing chamber when the membrane is pierced by the piercing means has been introduced into the outer wall of the piercing means.
- 5 9. The cartridge receptacle as claimed in claim 8, wherein a compressed-air line is integrated into the piercing means, and wherein a compressed-air connection of the compressed-air line for connecting to a compressed-air source is formed on a side of the piercing means that is remote from the cartridge, said compressed-air connection being accessible in particular from outside the cartridge
10 receptacle, and wherein a compressed-air outlet of the compressed-air line for blowing the compressed air into the cartridge is formed on a side of the piercing means that faces the cartridge.
10. The cartridge receptacle as claimed in any one of claims 1-9, wherein the inflow and the outflow are provided at opposite ends of the cartridge receptacle.
- 15 11. The cartridge receptacle as claimed in any one of claims 6-10, wherein the piercing means is provided in a manner aligned with the inflow and the outflow.
12. A system having a cartridge receptacle as claimed in any one of claims 1-11
20 on/in which a cartridge is provided, said cartridge having a wall region, one end of which is adjoined by a connecting region which is closed, in particular by a membrane, and at the opposite end of which optionally a bottom region is provided, wherein the wall region and optionally the bottom region define a cavity which accommodates a beverage substrate and/or foodstuff substrate.
13. The system as claimed in claim 12, wherein the connecting region has a flange which is provided with a positioning means and/or covering means.

14. The system as claimed in claim 13, wherein the positioning means and/or covering means is an indentation and/or protuberance which protrudes from the flange, in particular the circumference thereof.
15. The system as claimed in any one of claims 12-14, wherein a neck is provided
5 between the wall region and the connecting region.

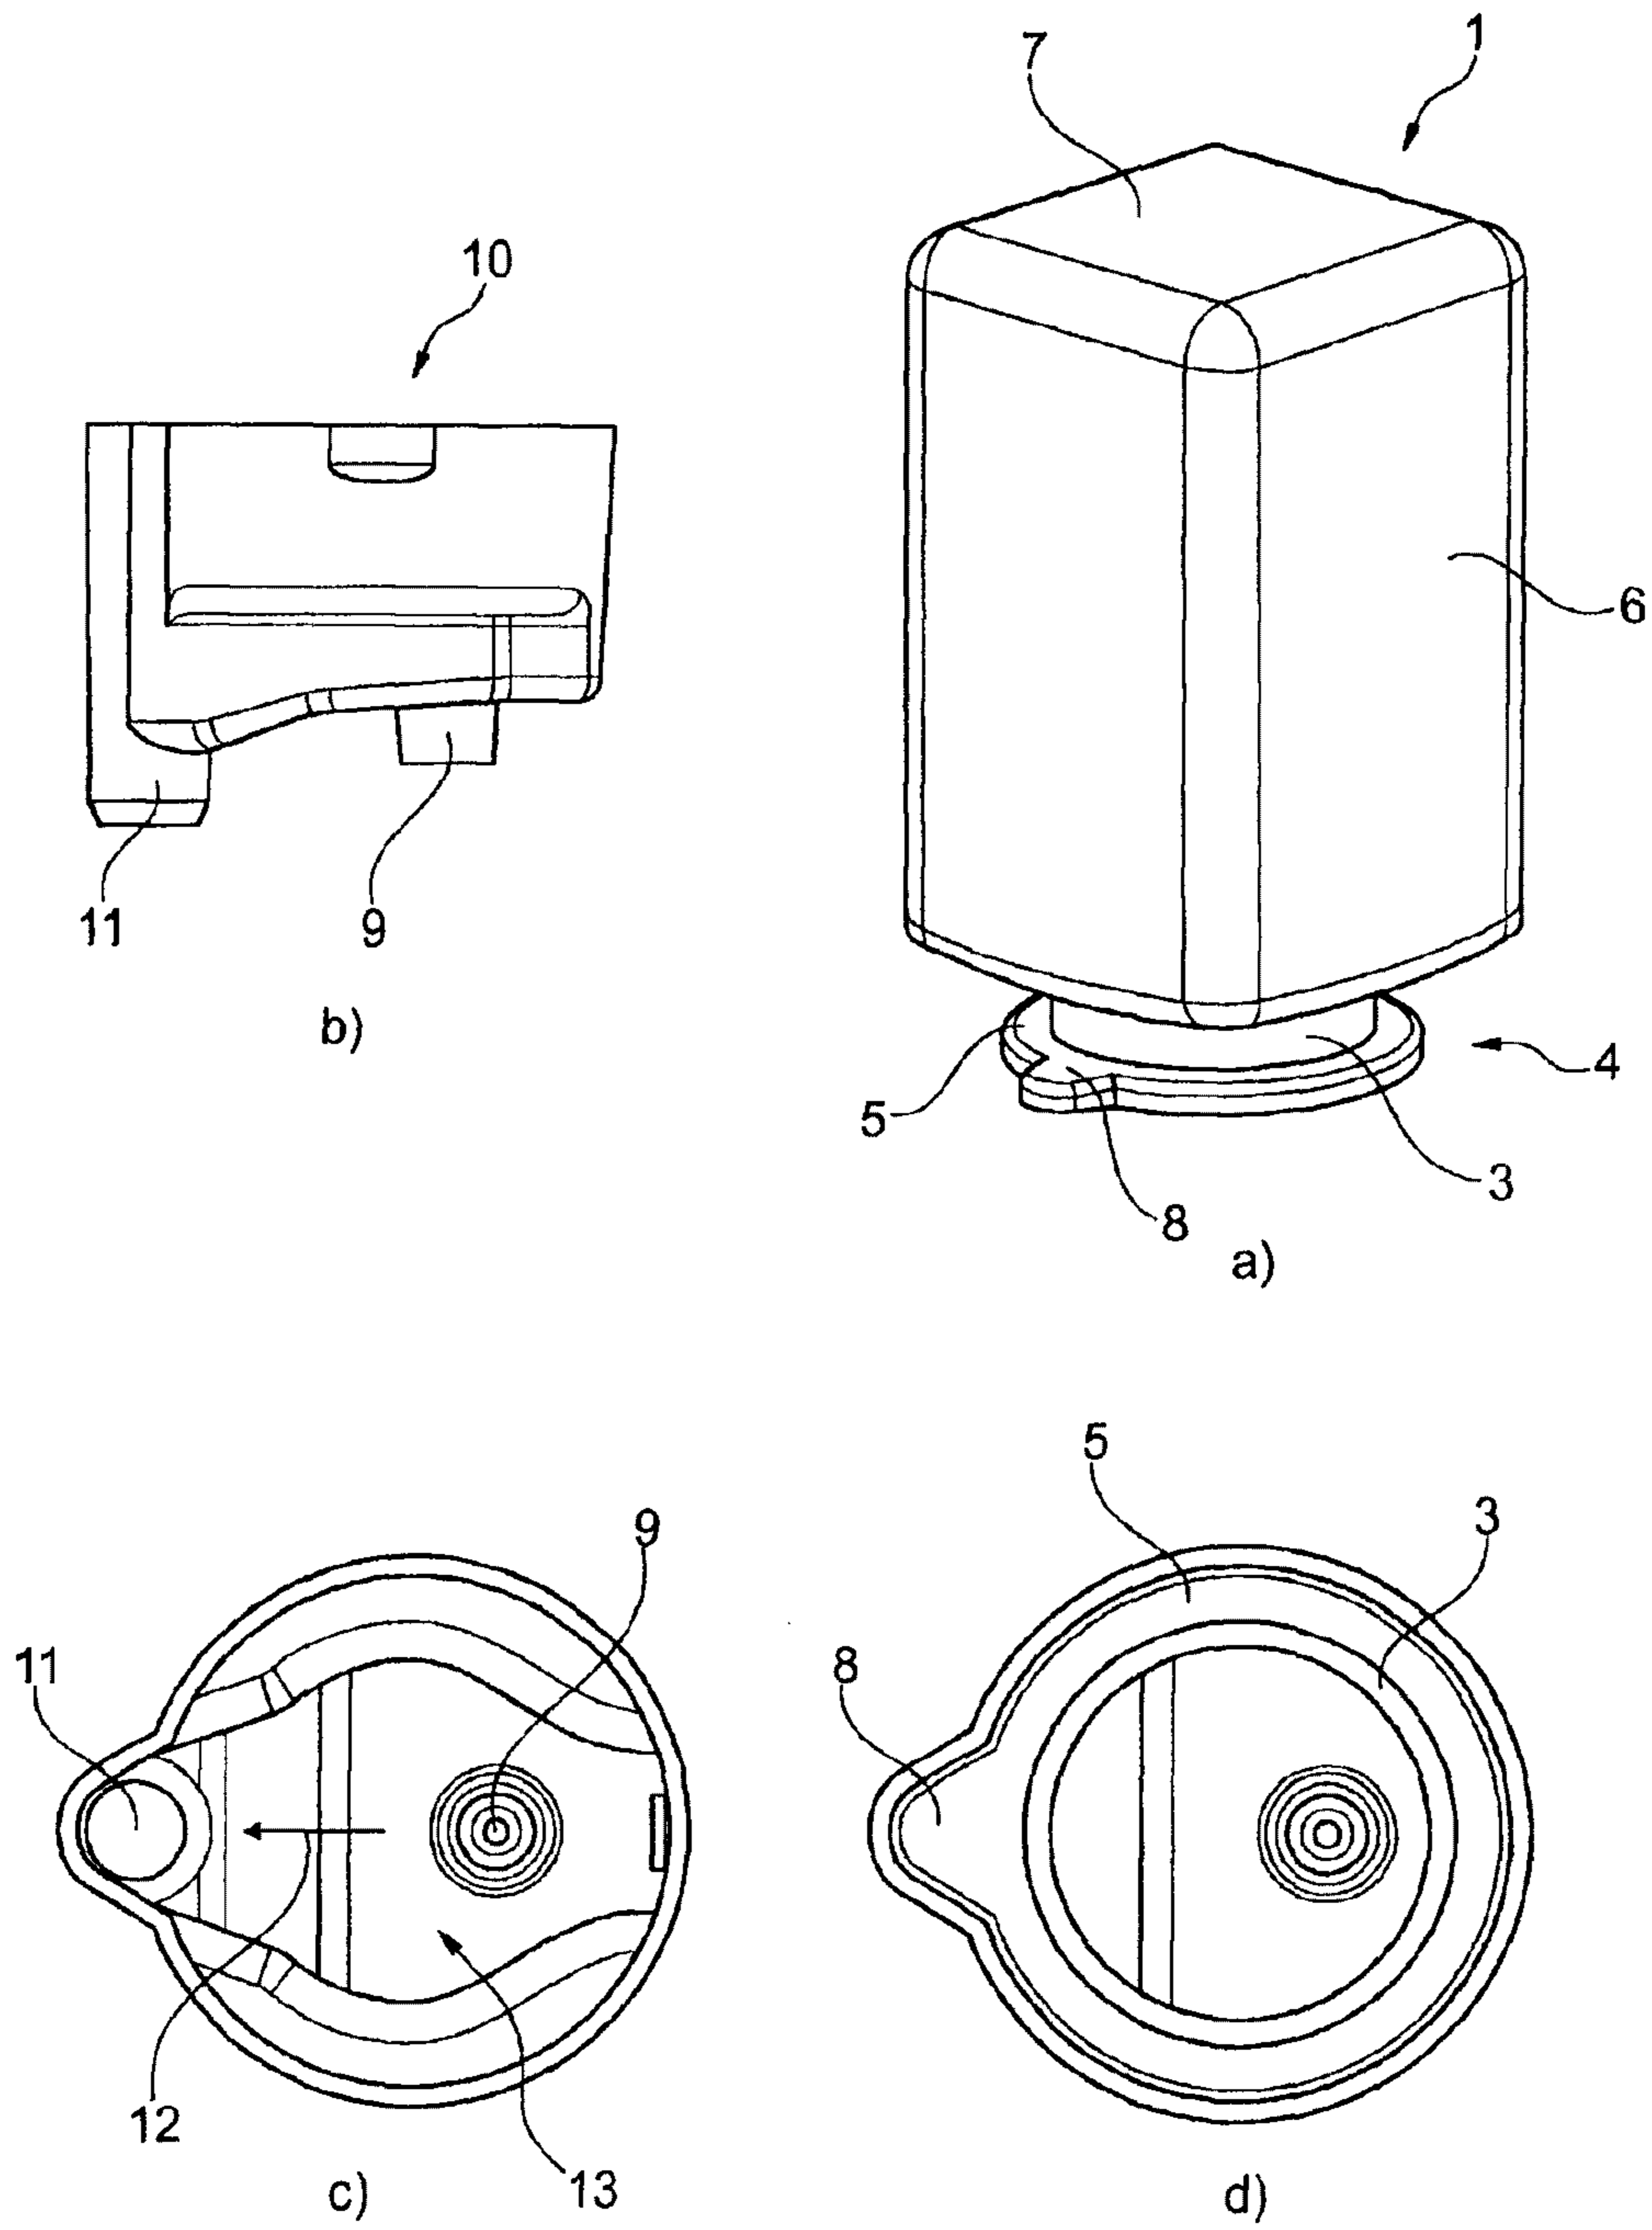


Fig. 1

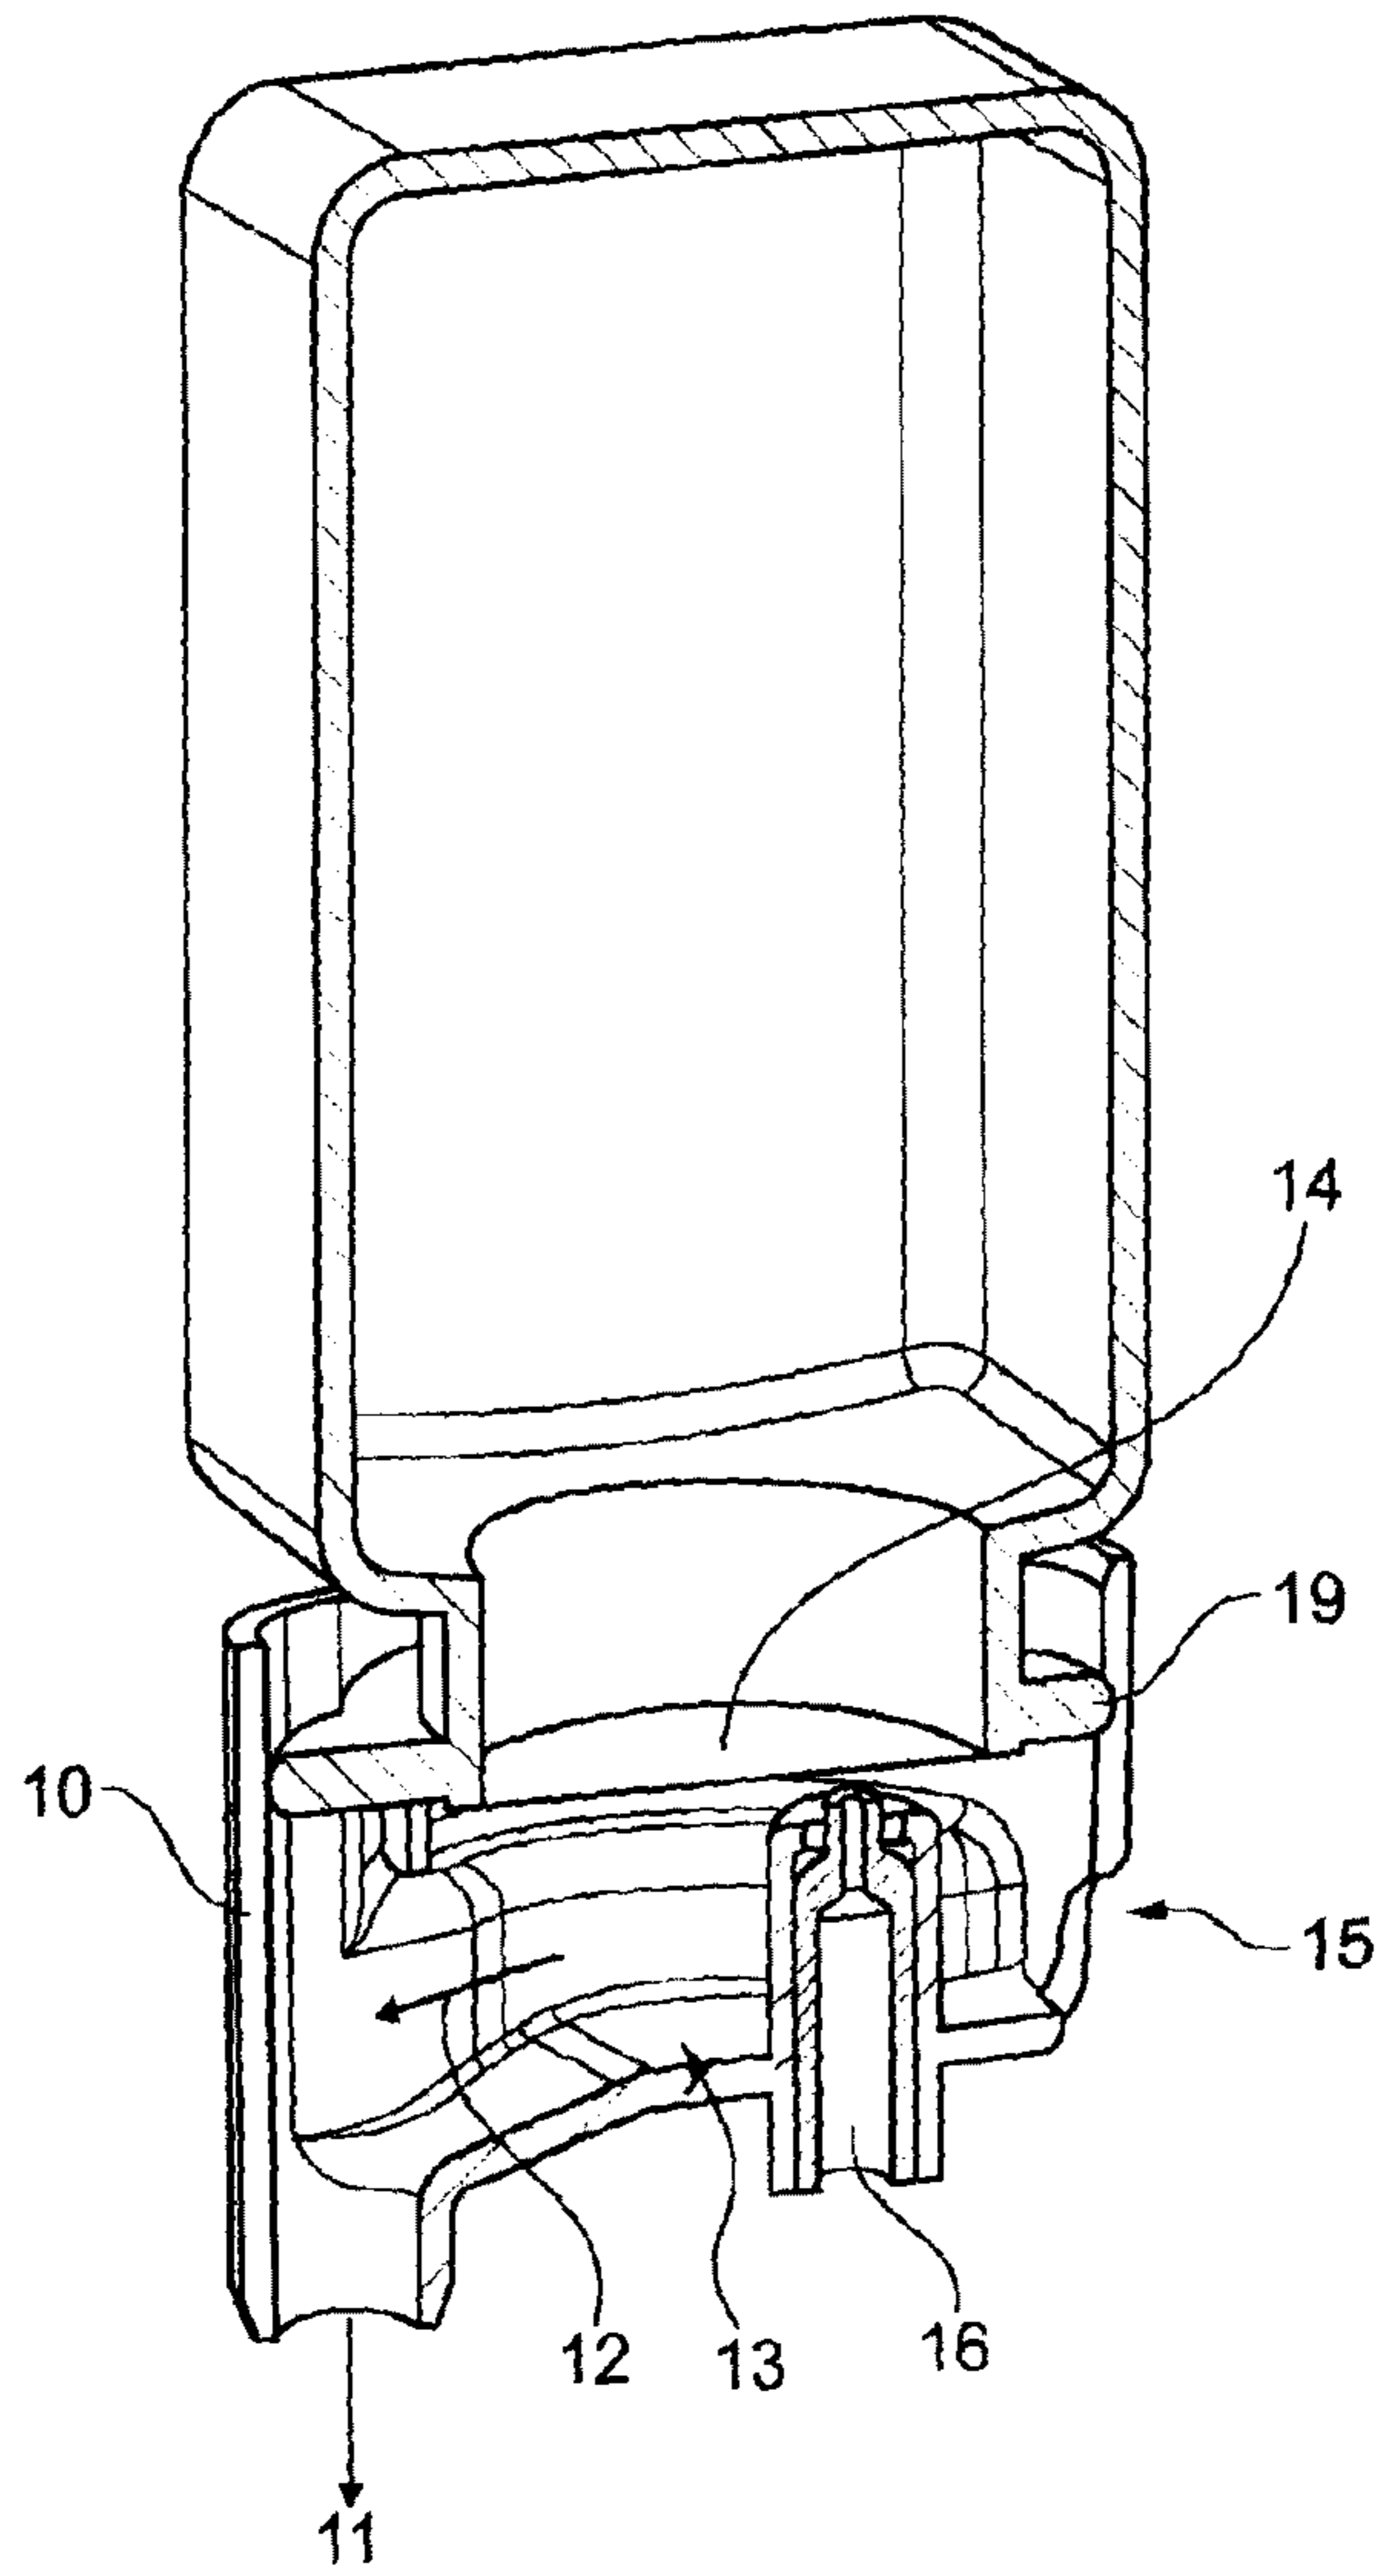


Fig. 2

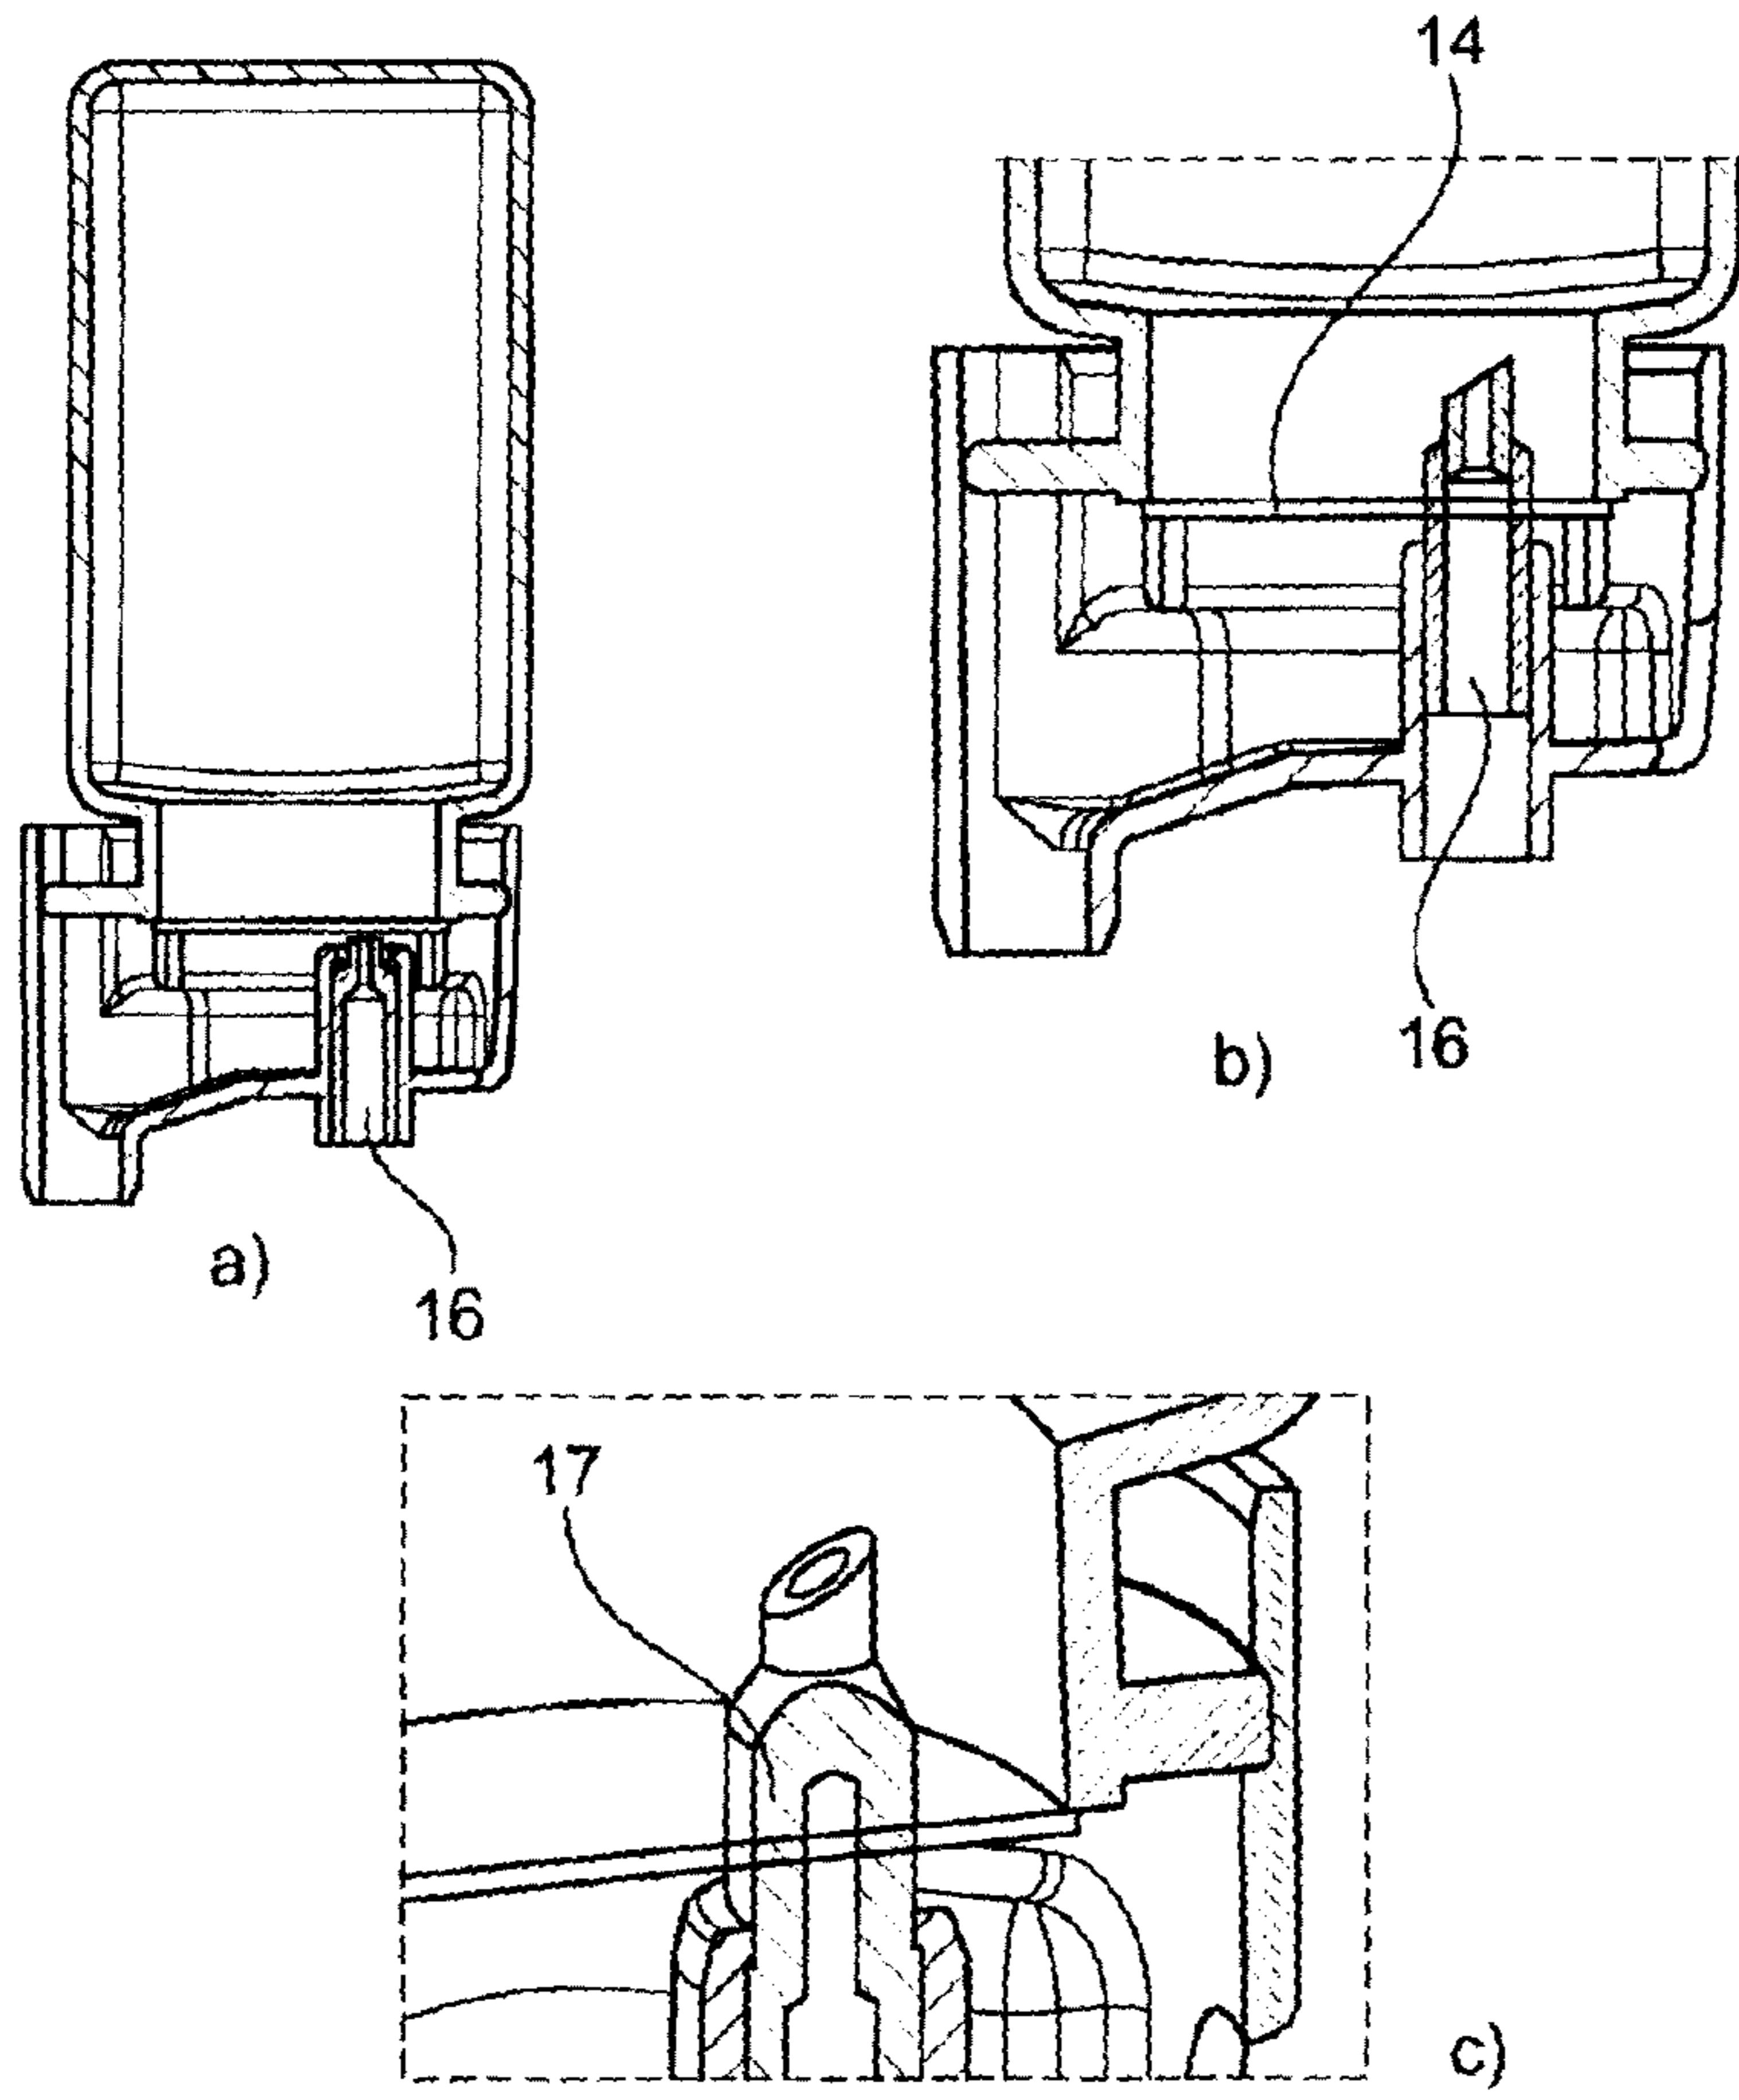


Fig. 3

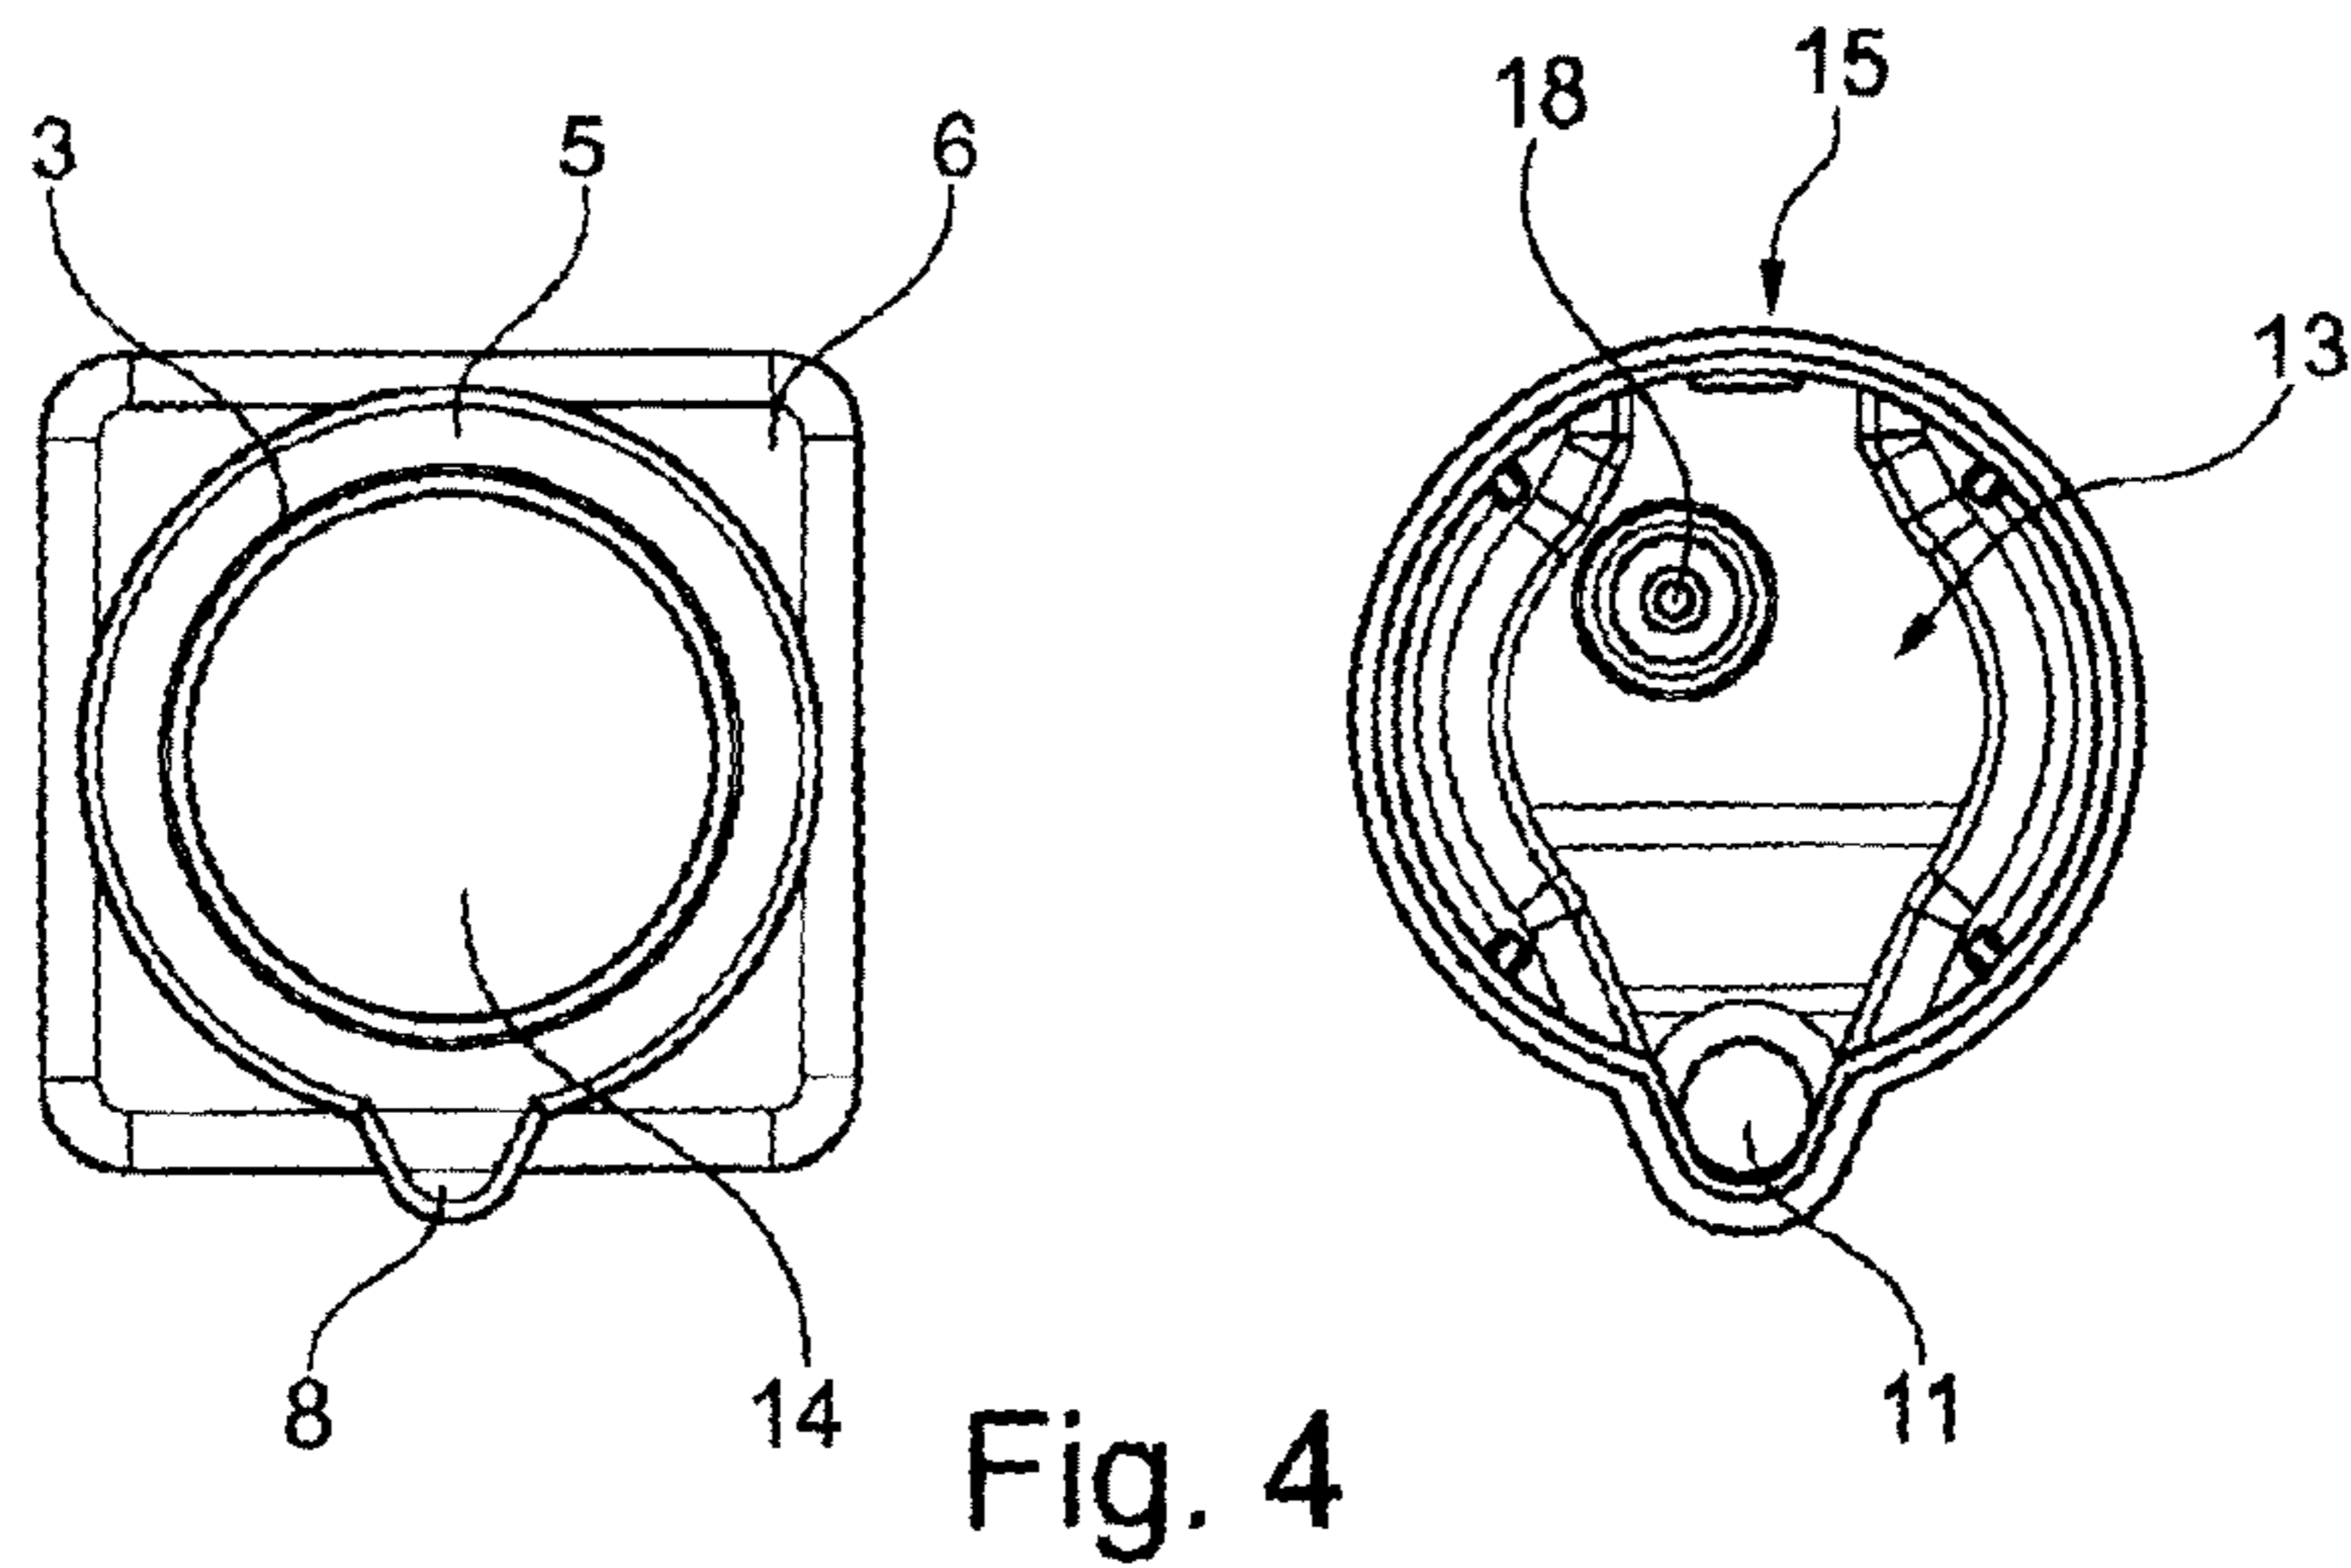


Fig. 4

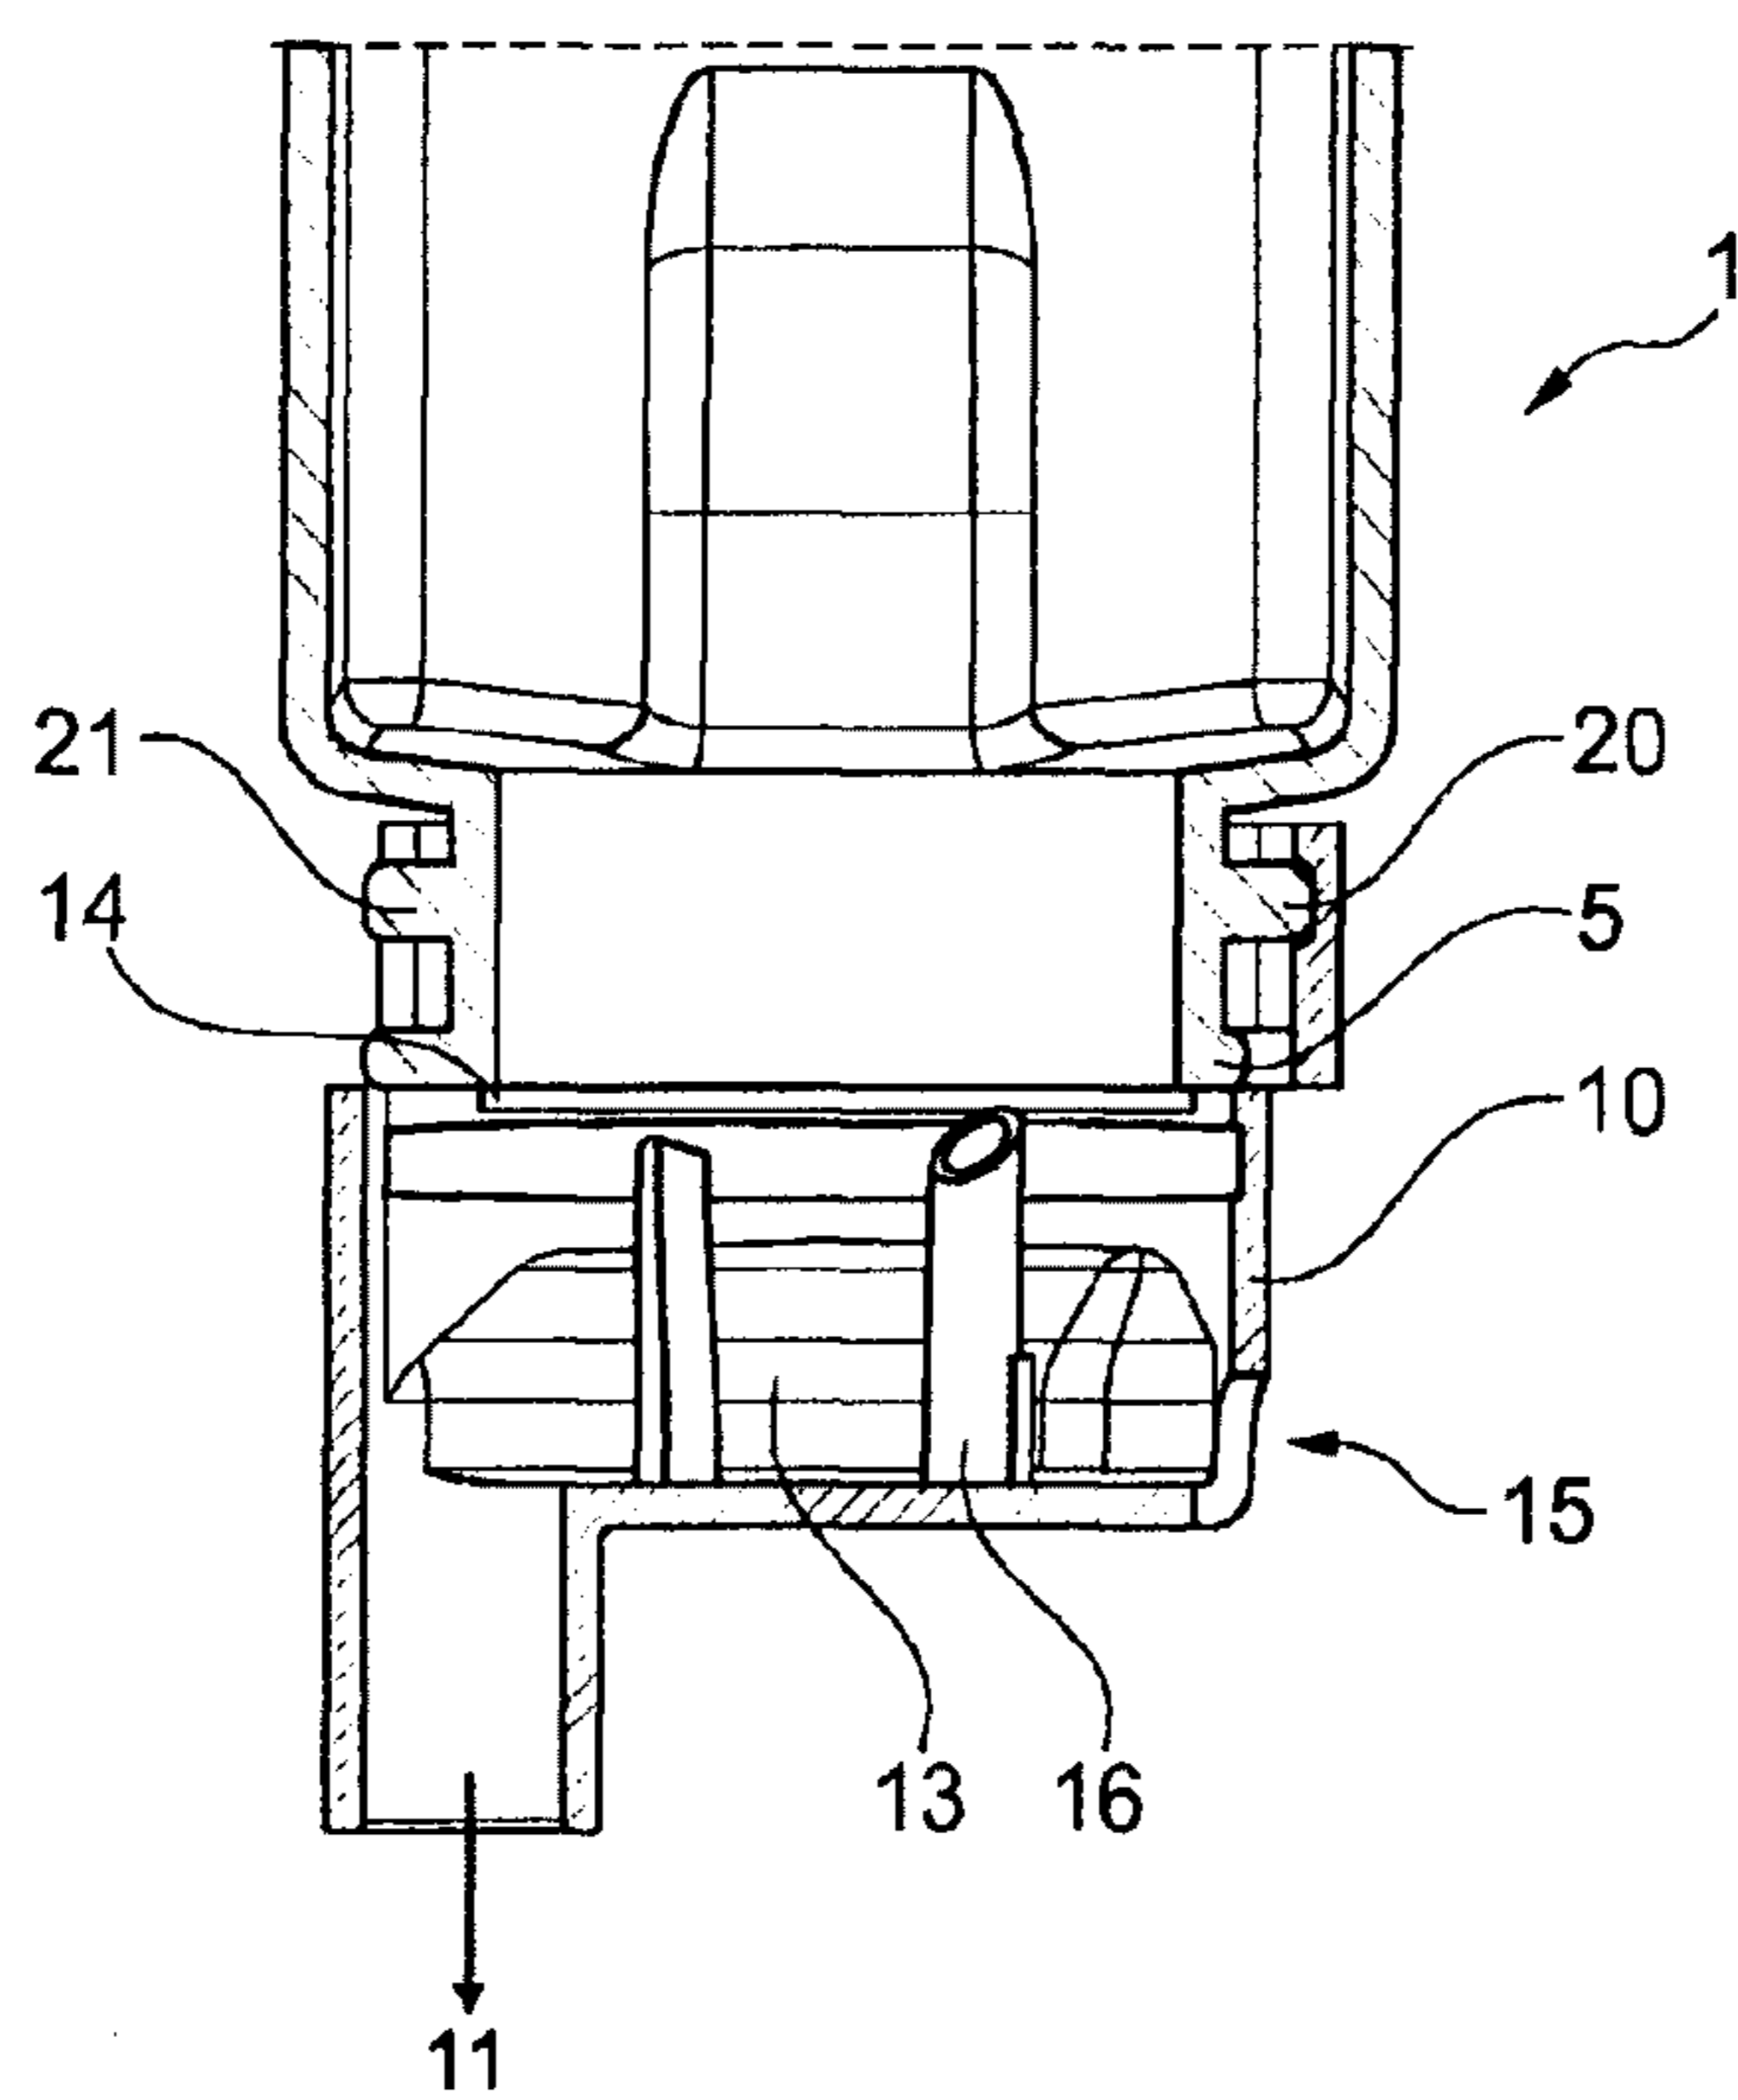


Fig. 5

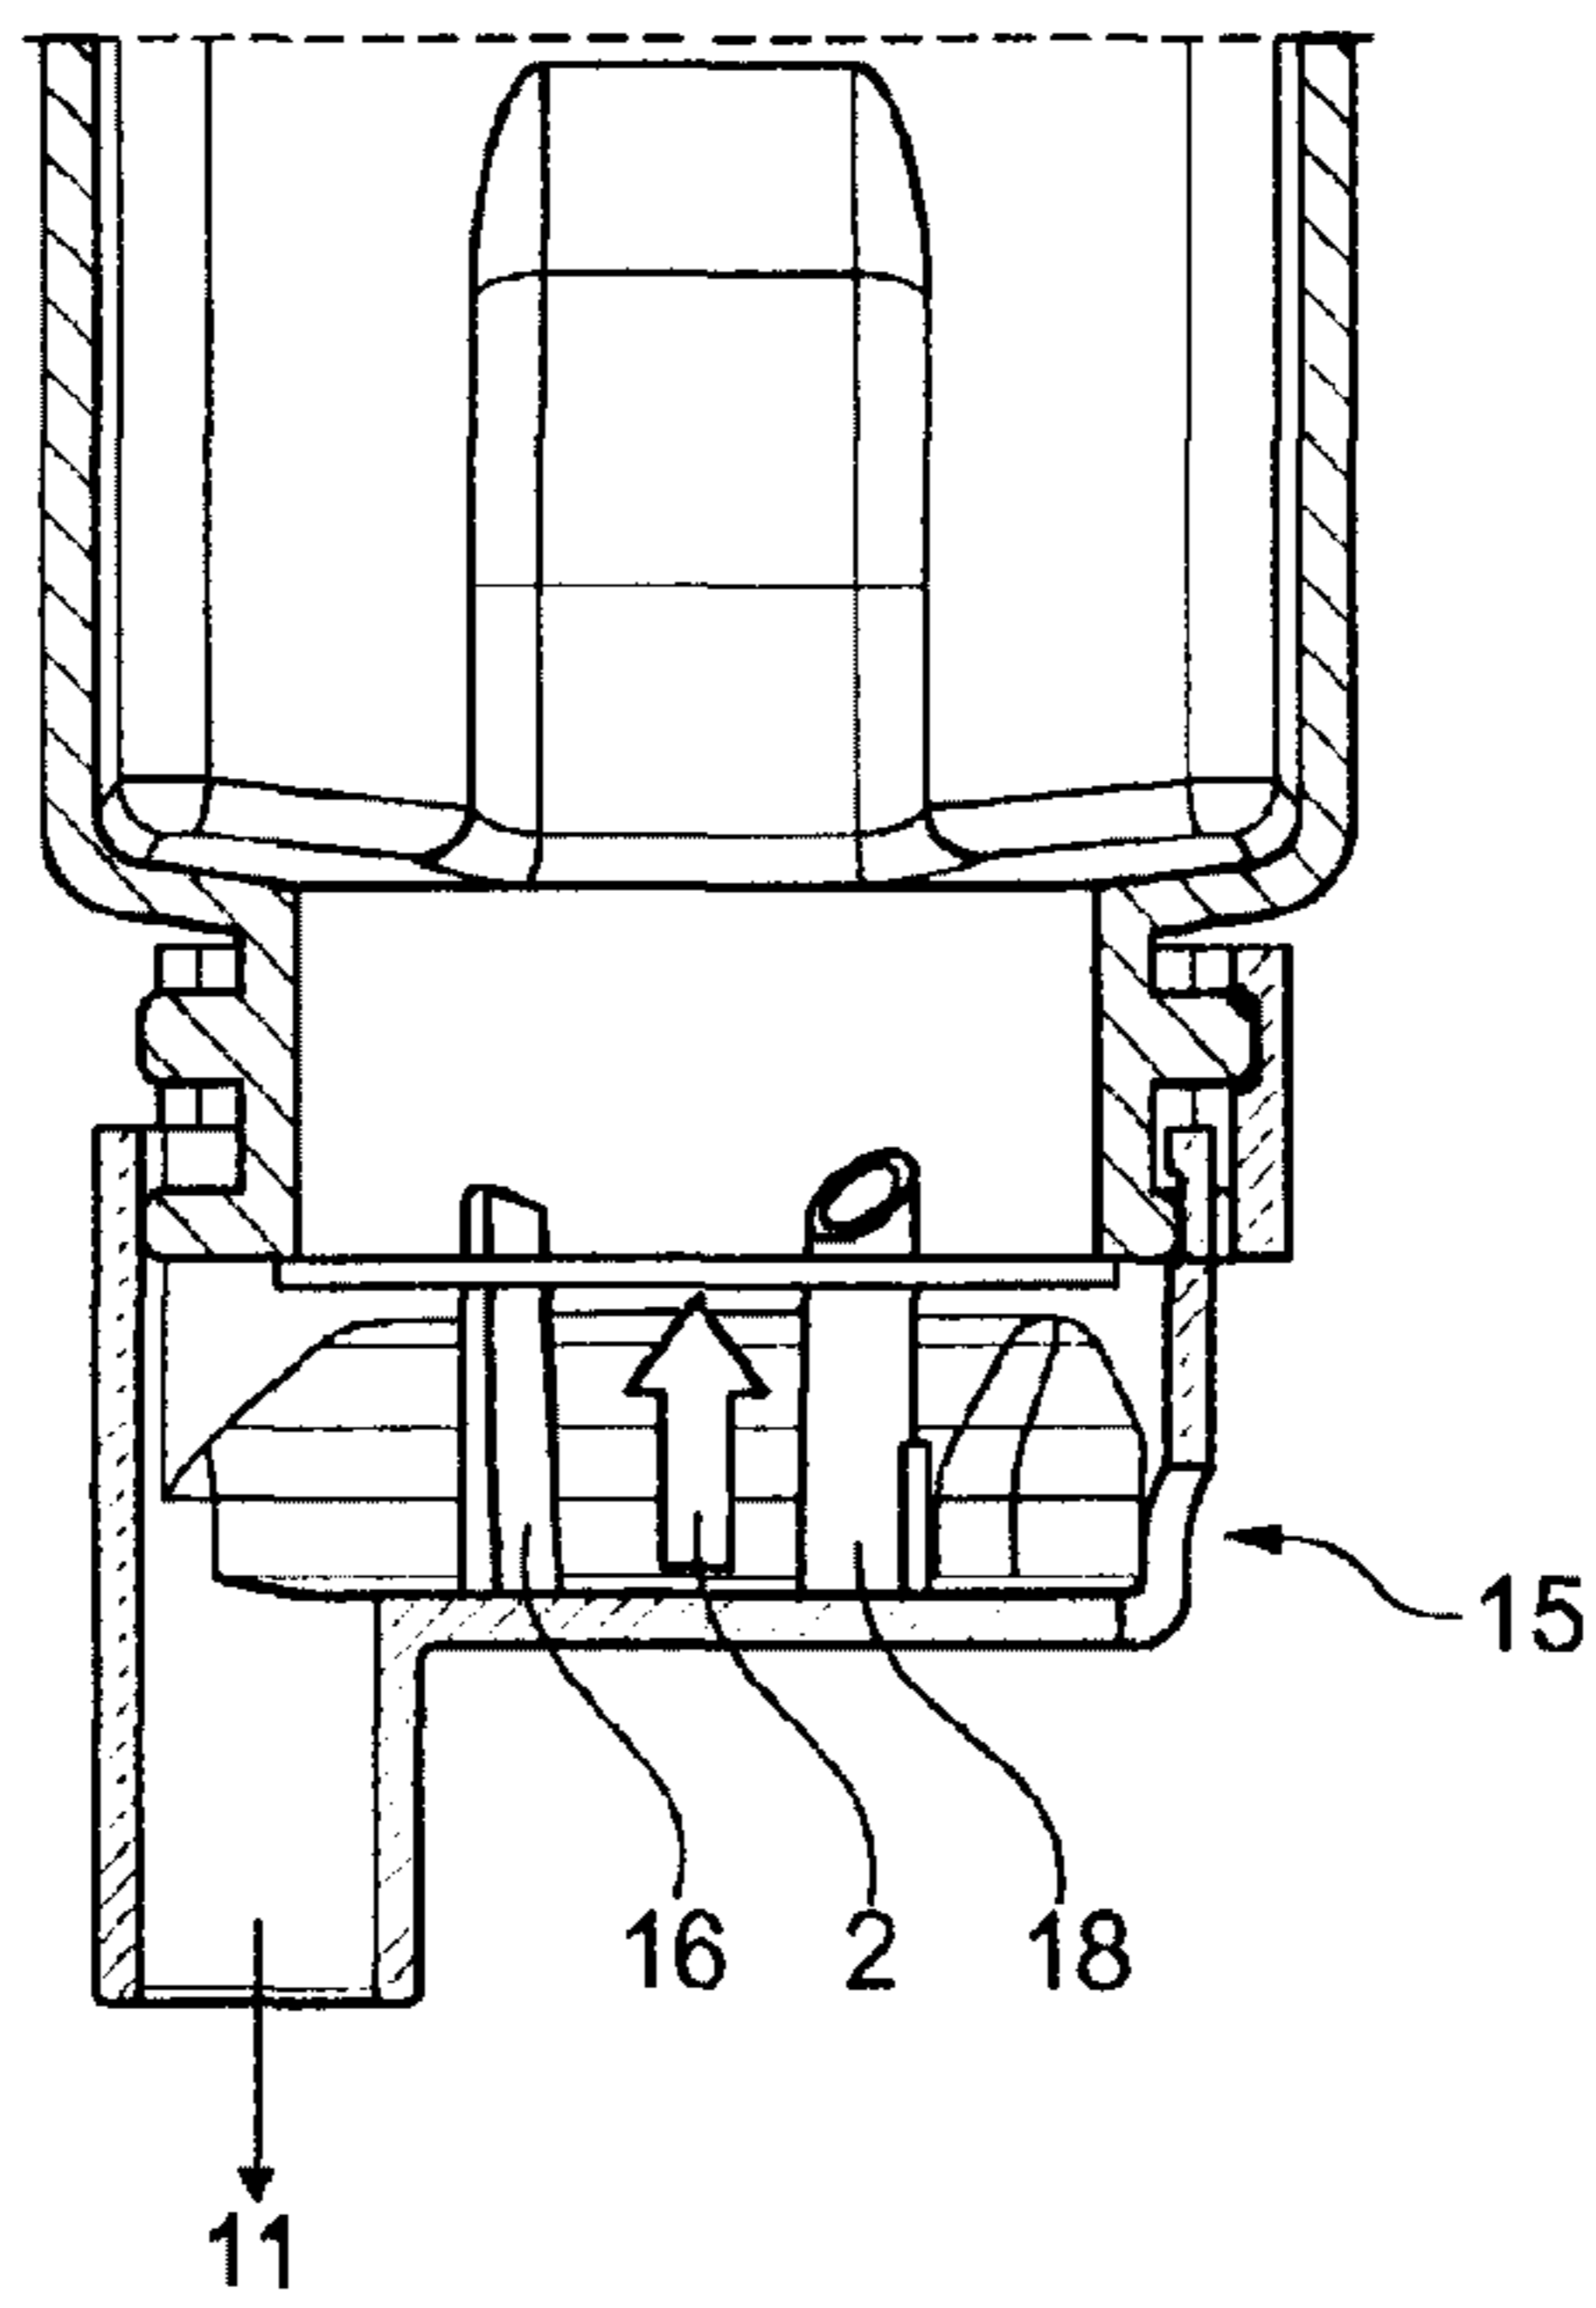


Fig. 6

6/11

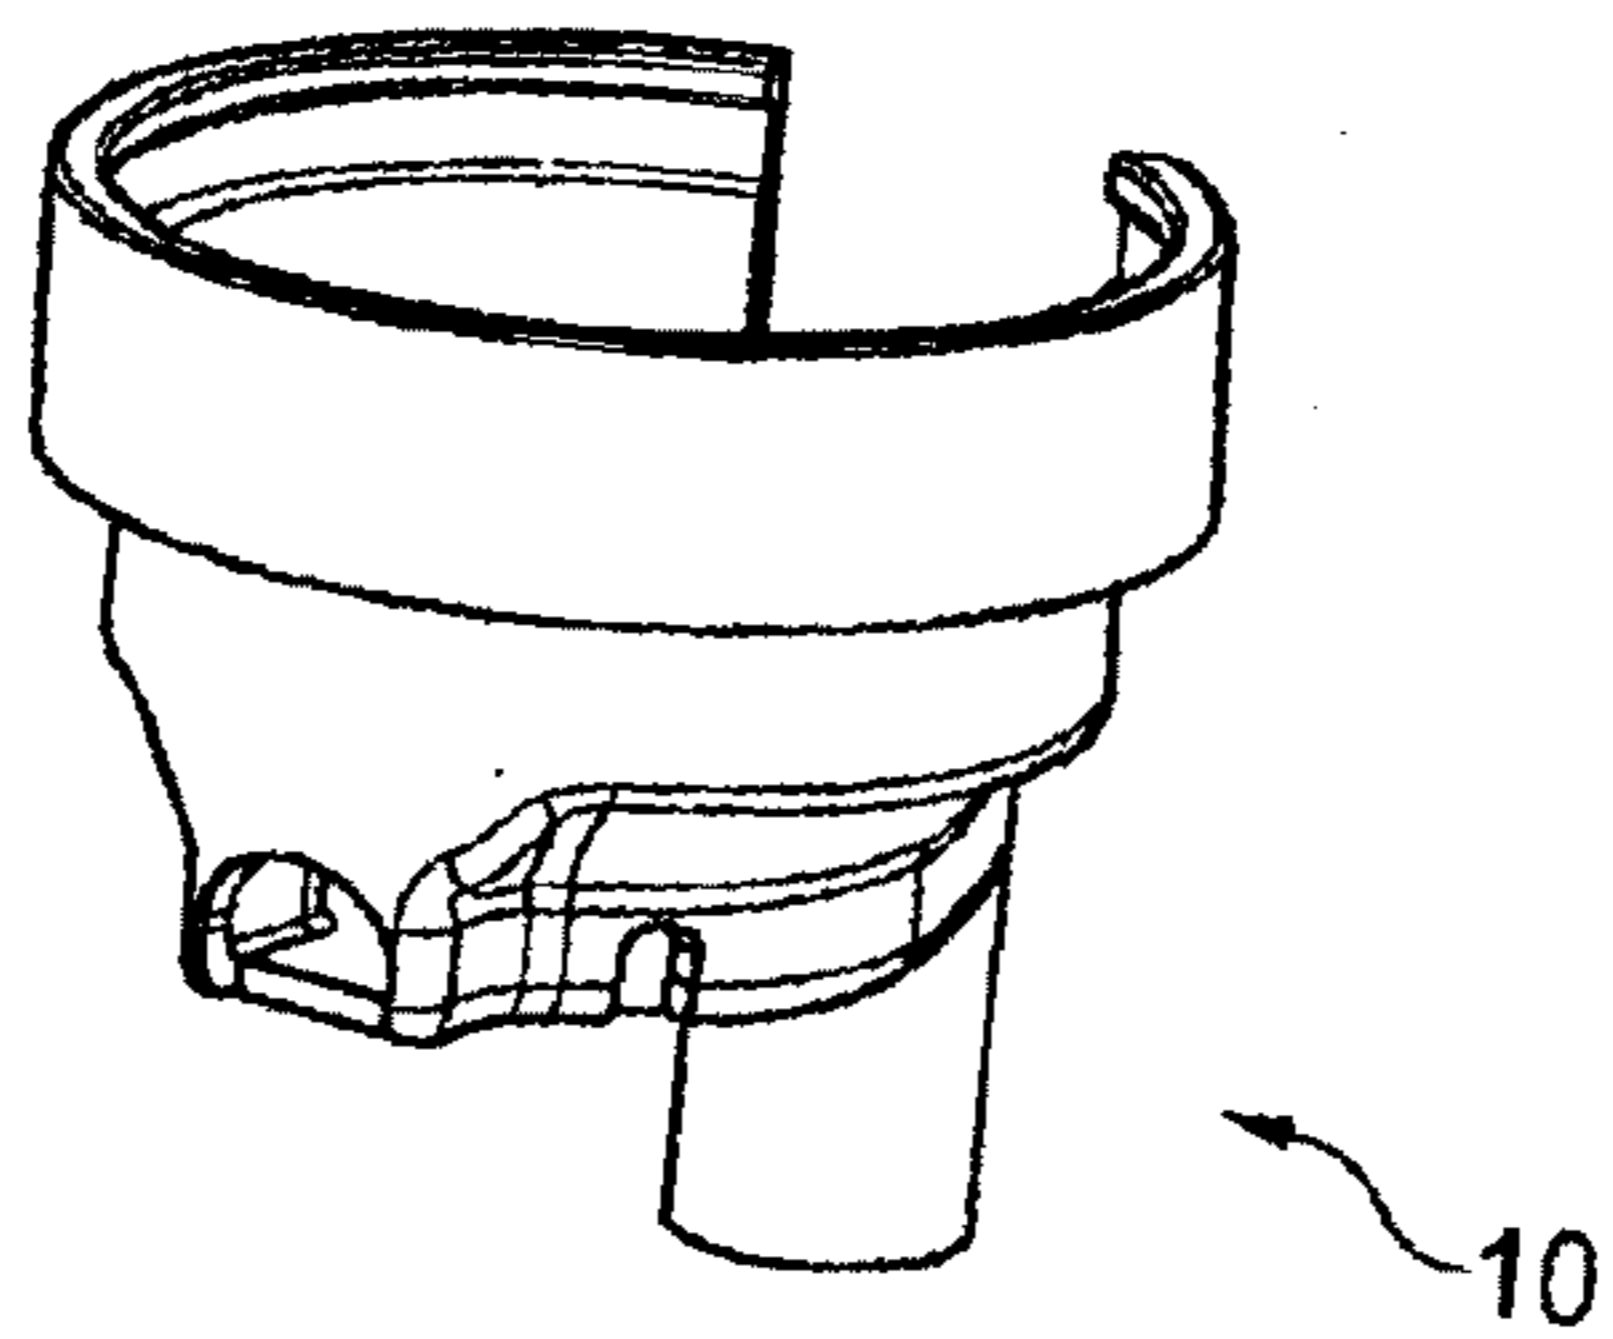
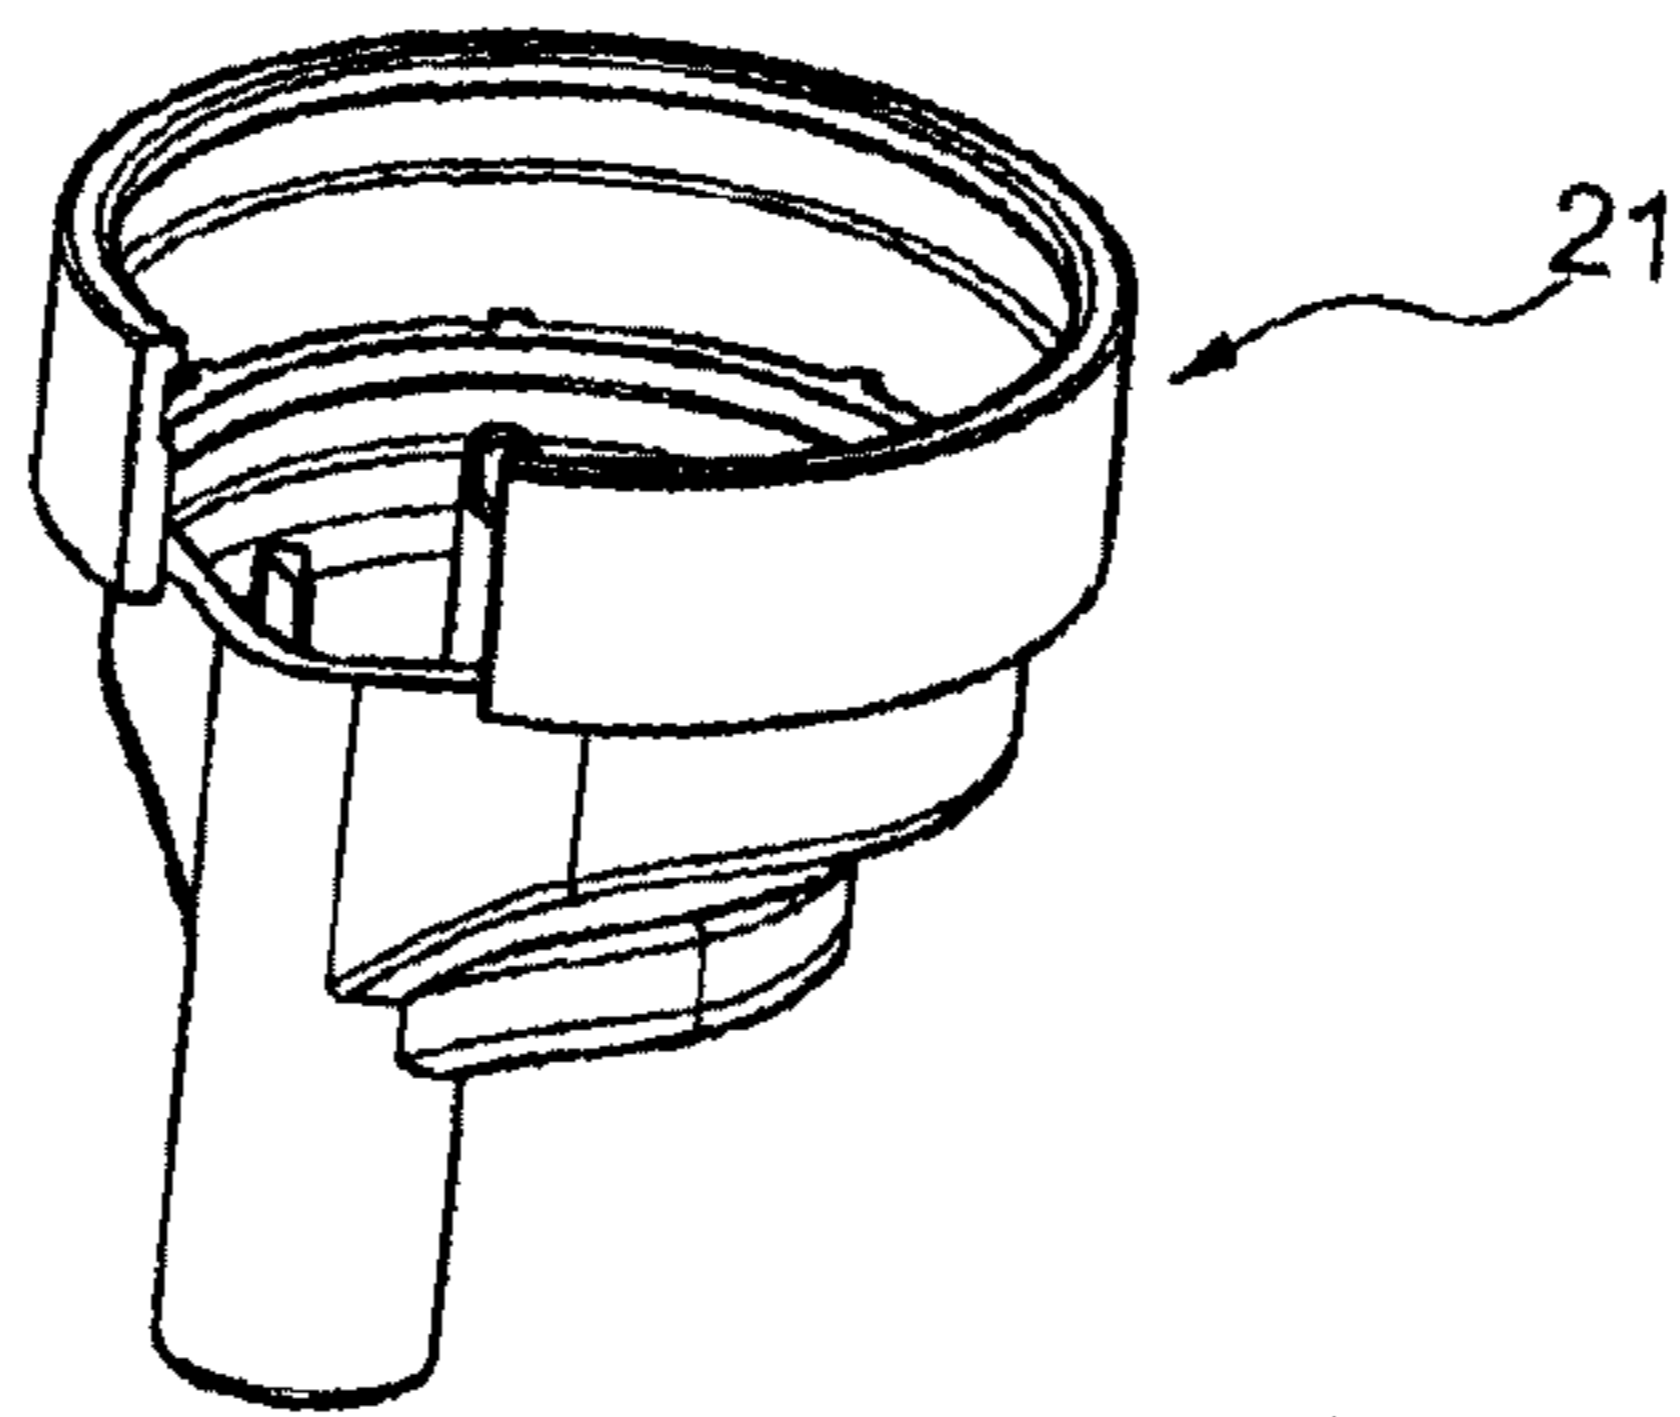
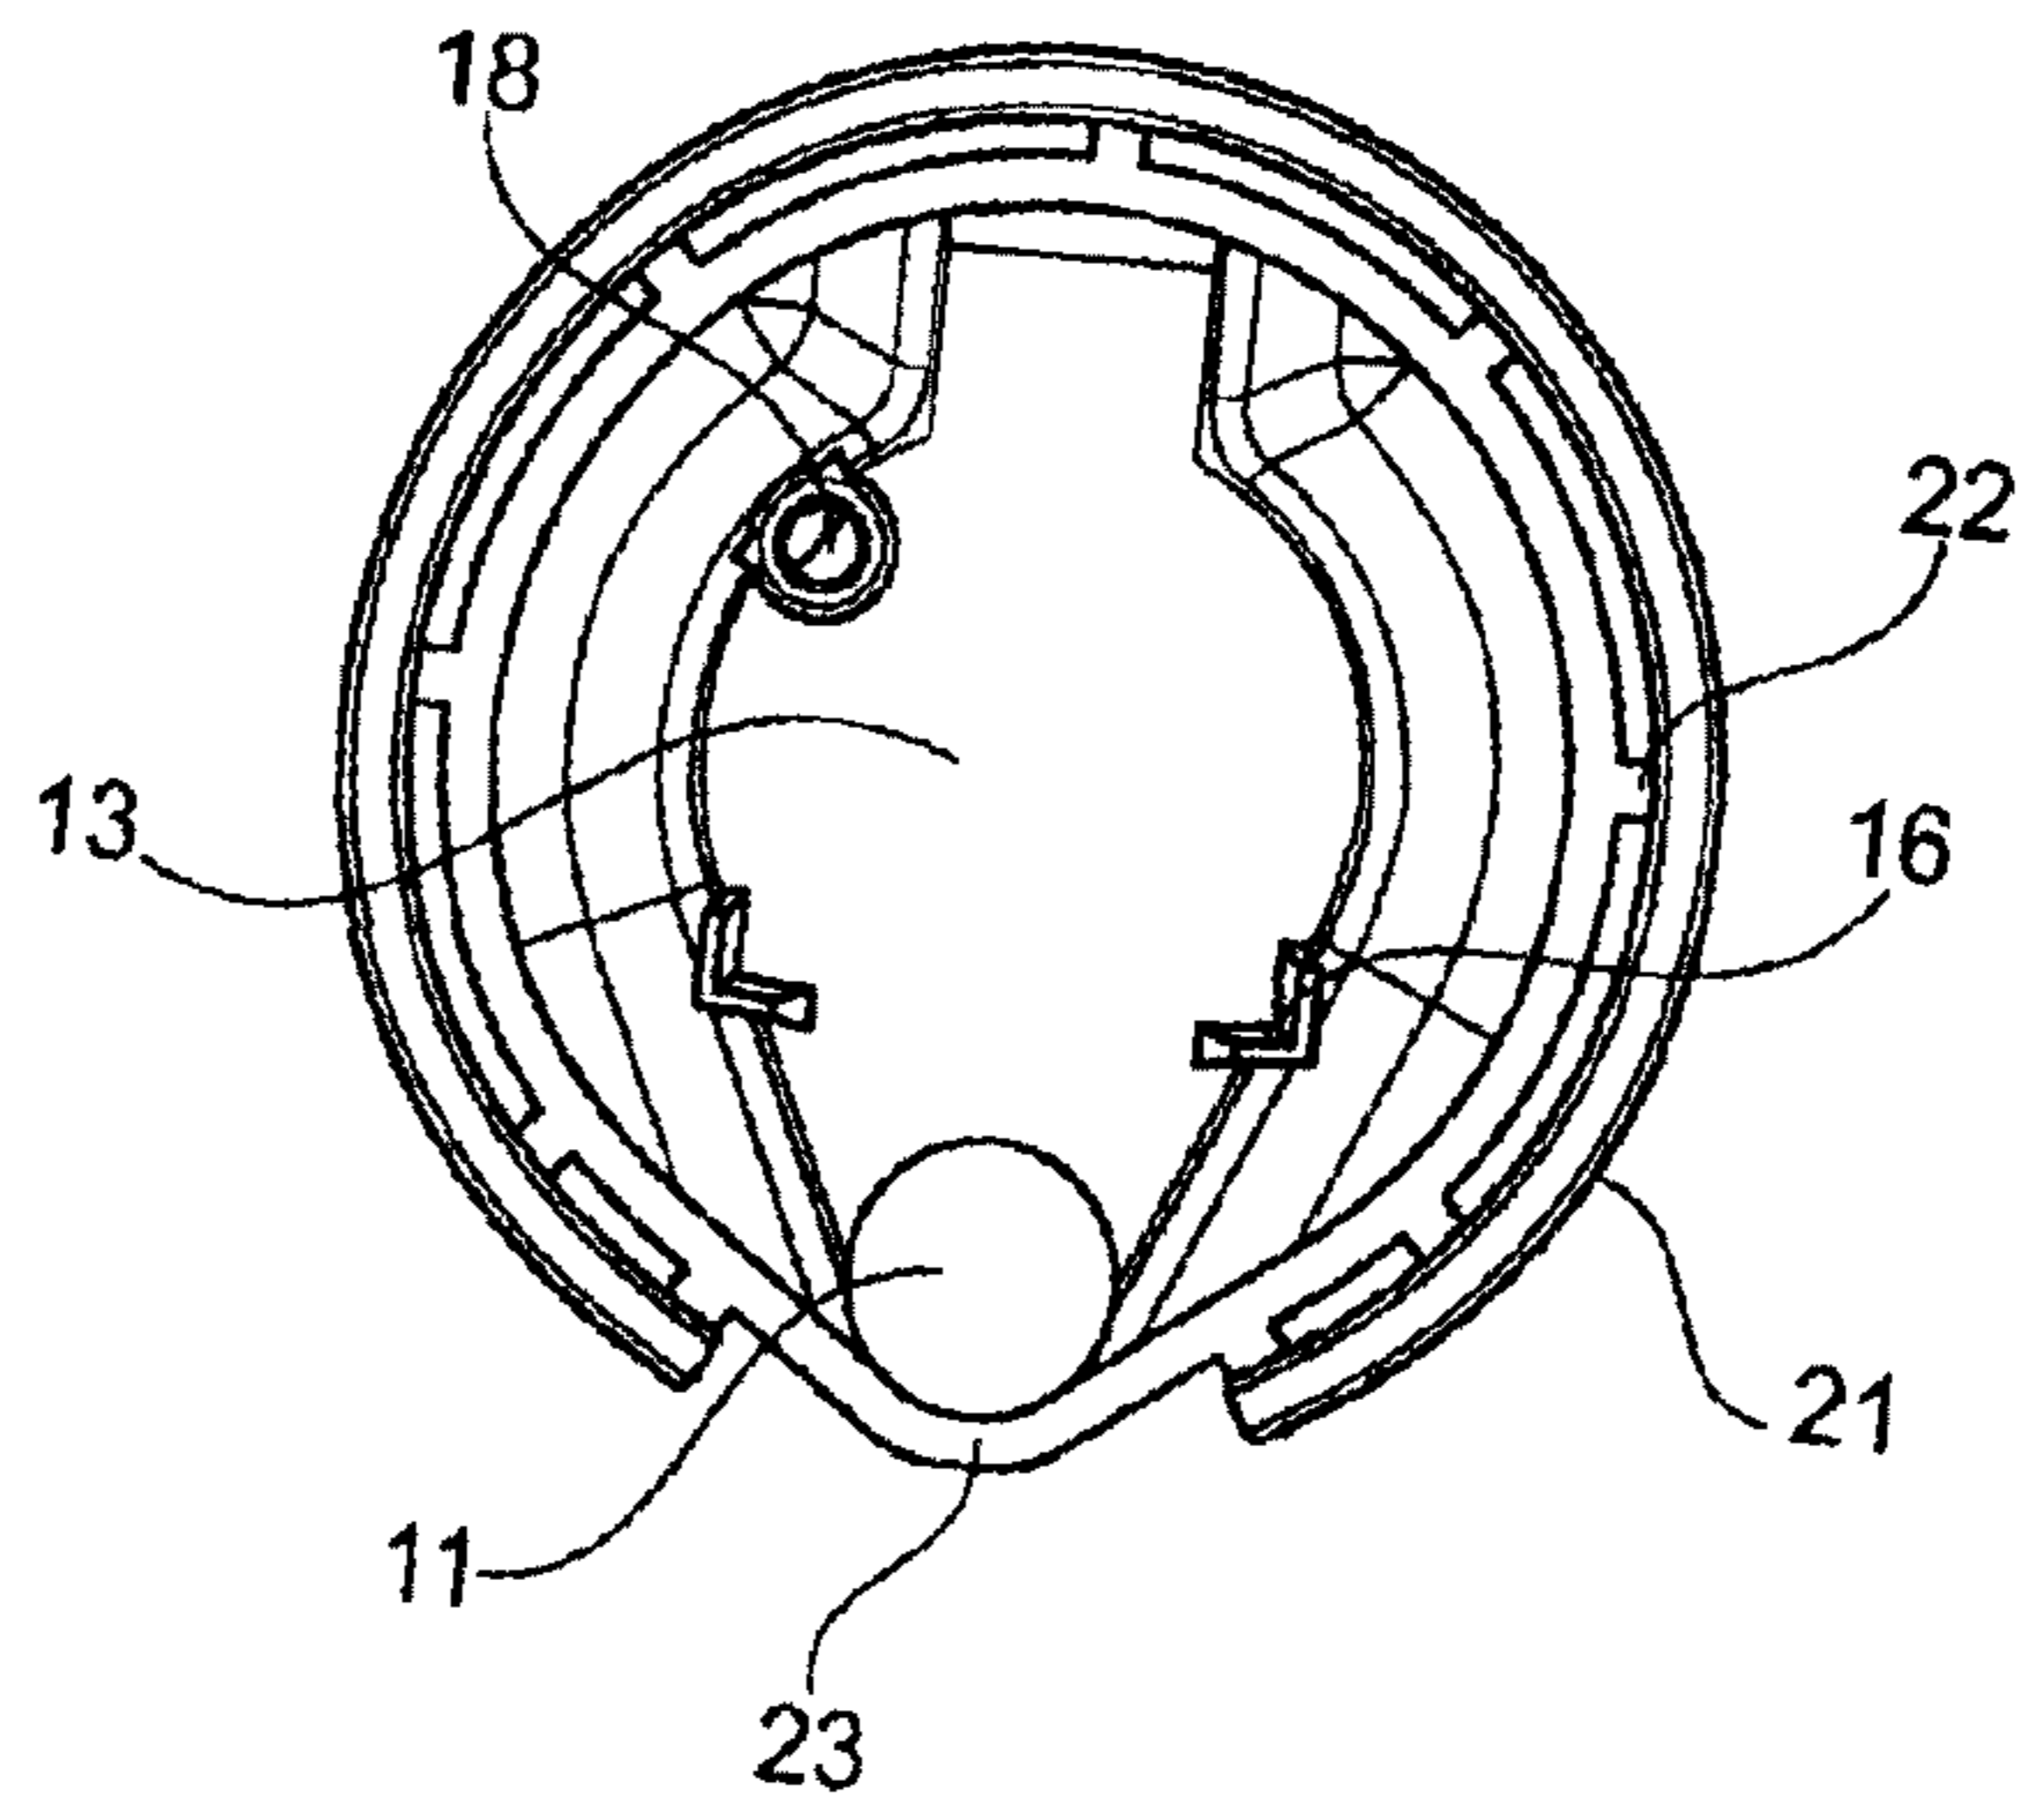


Fig. 7

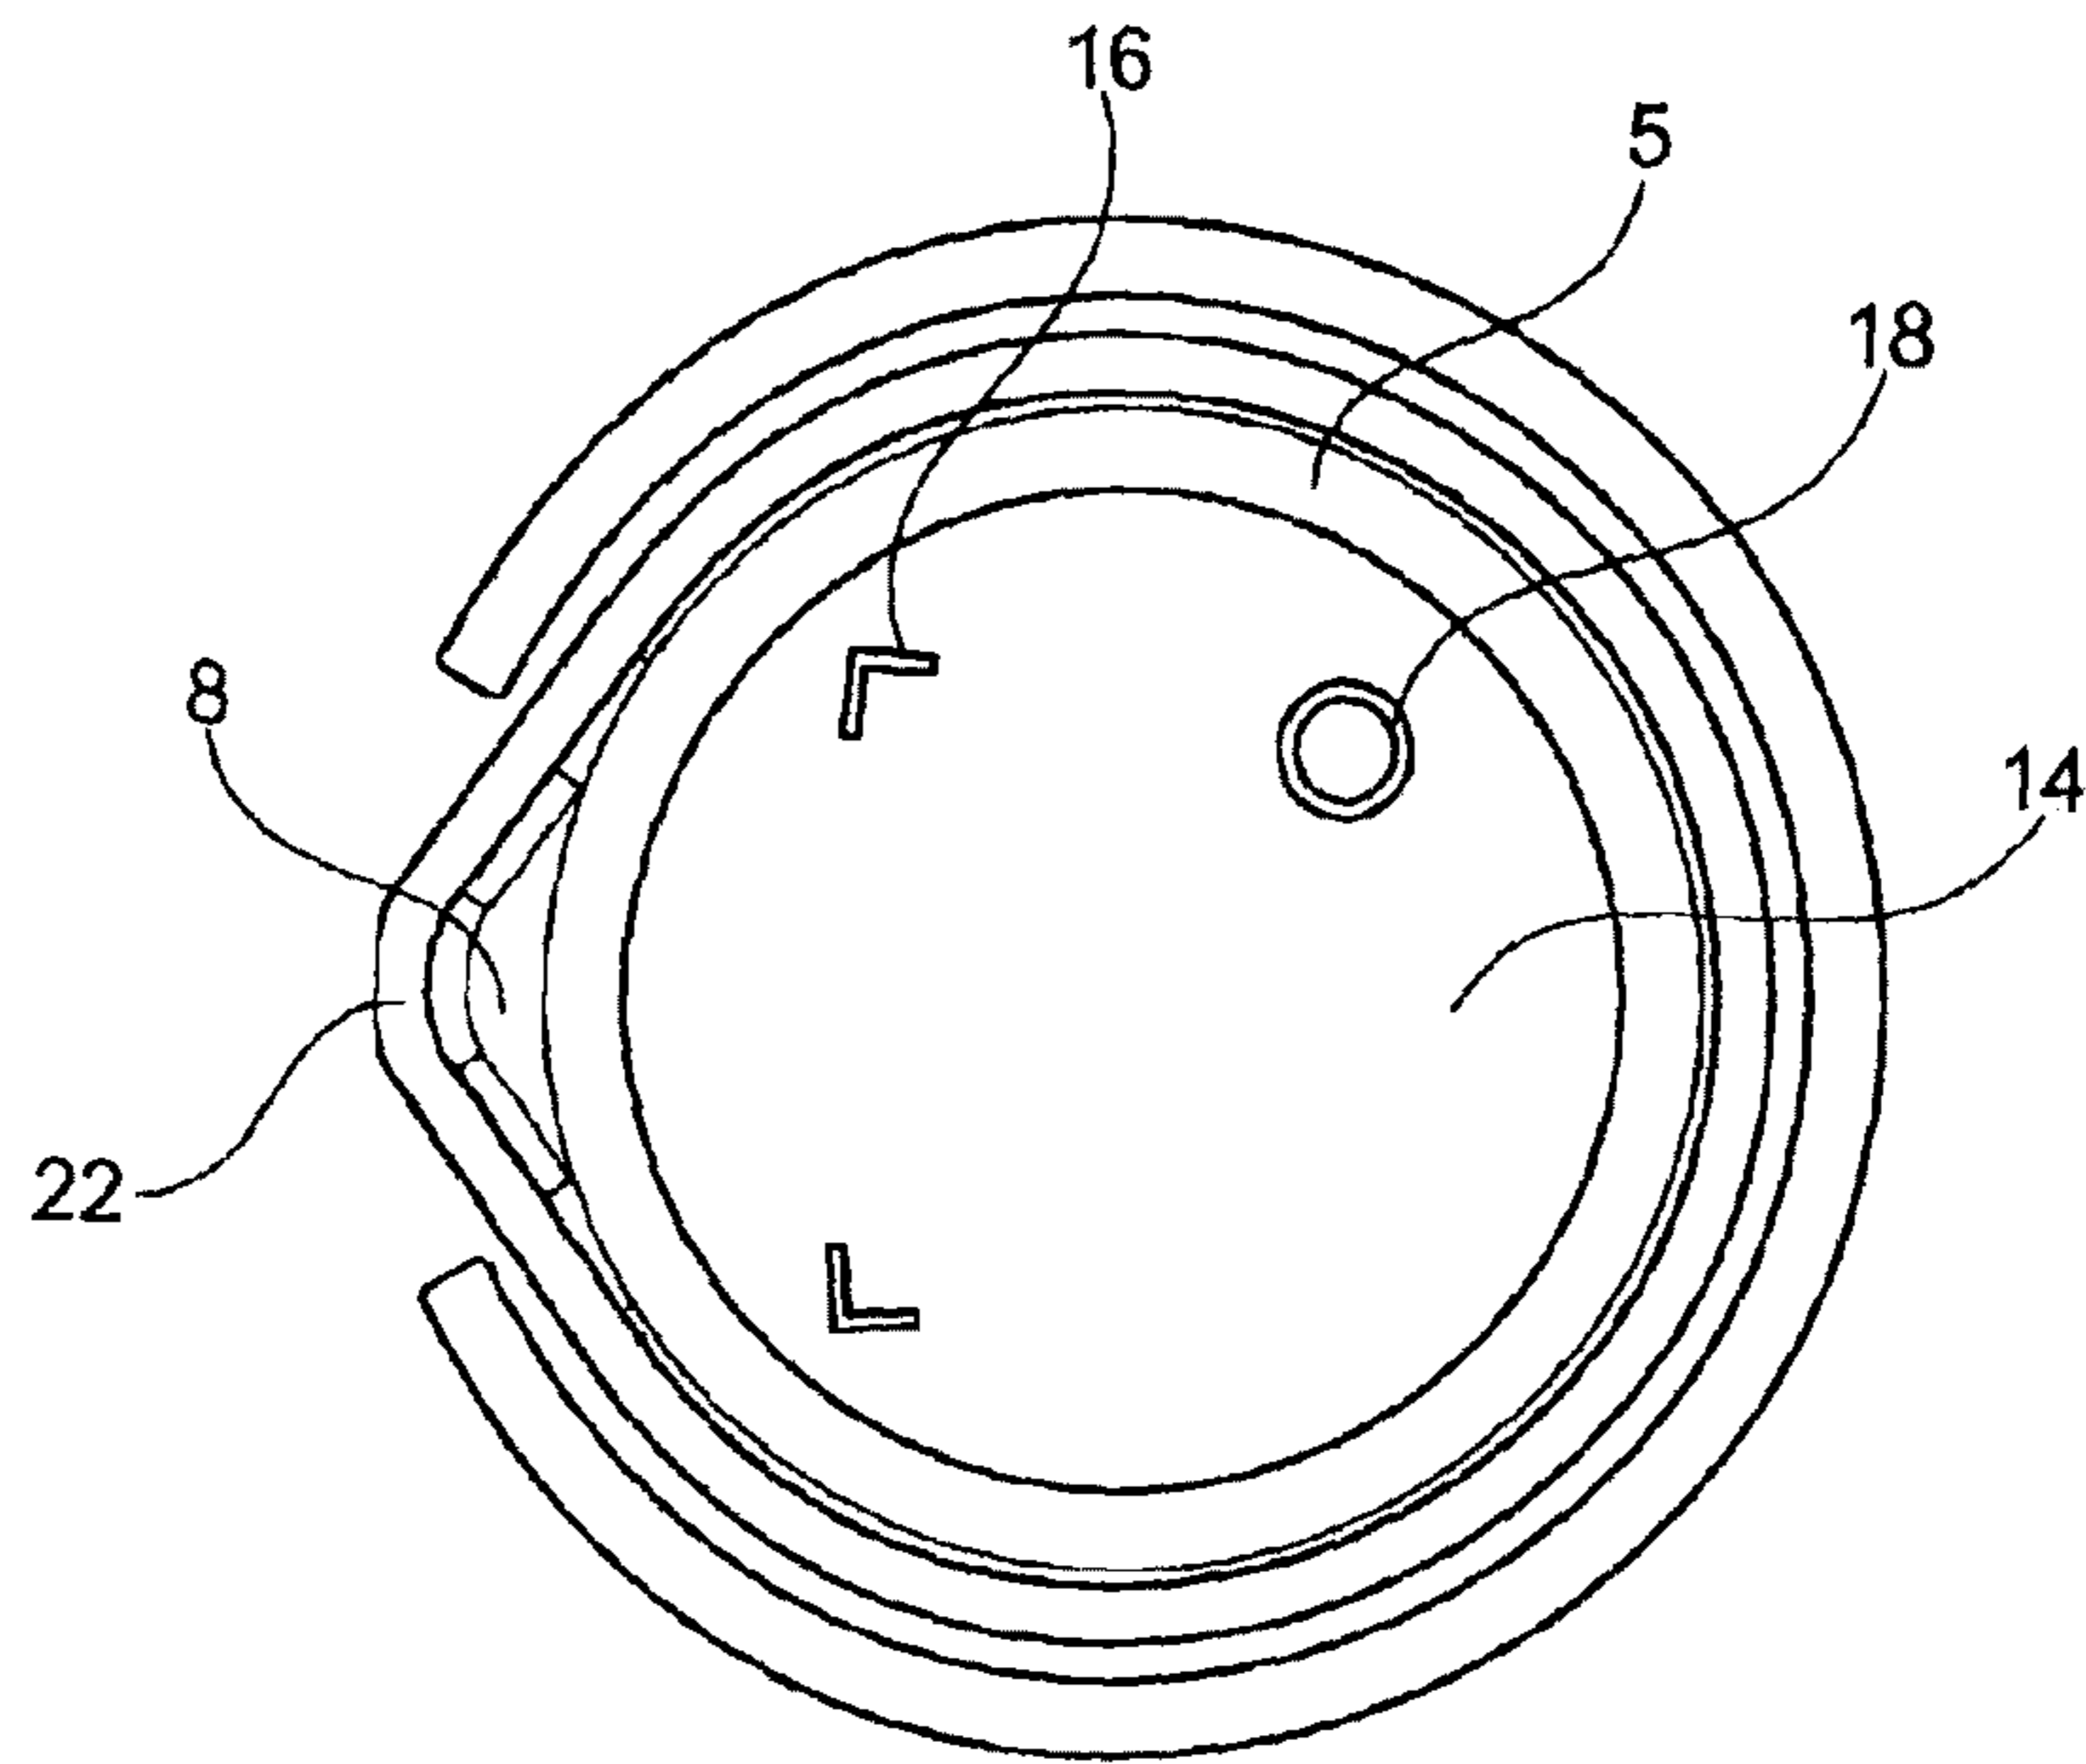
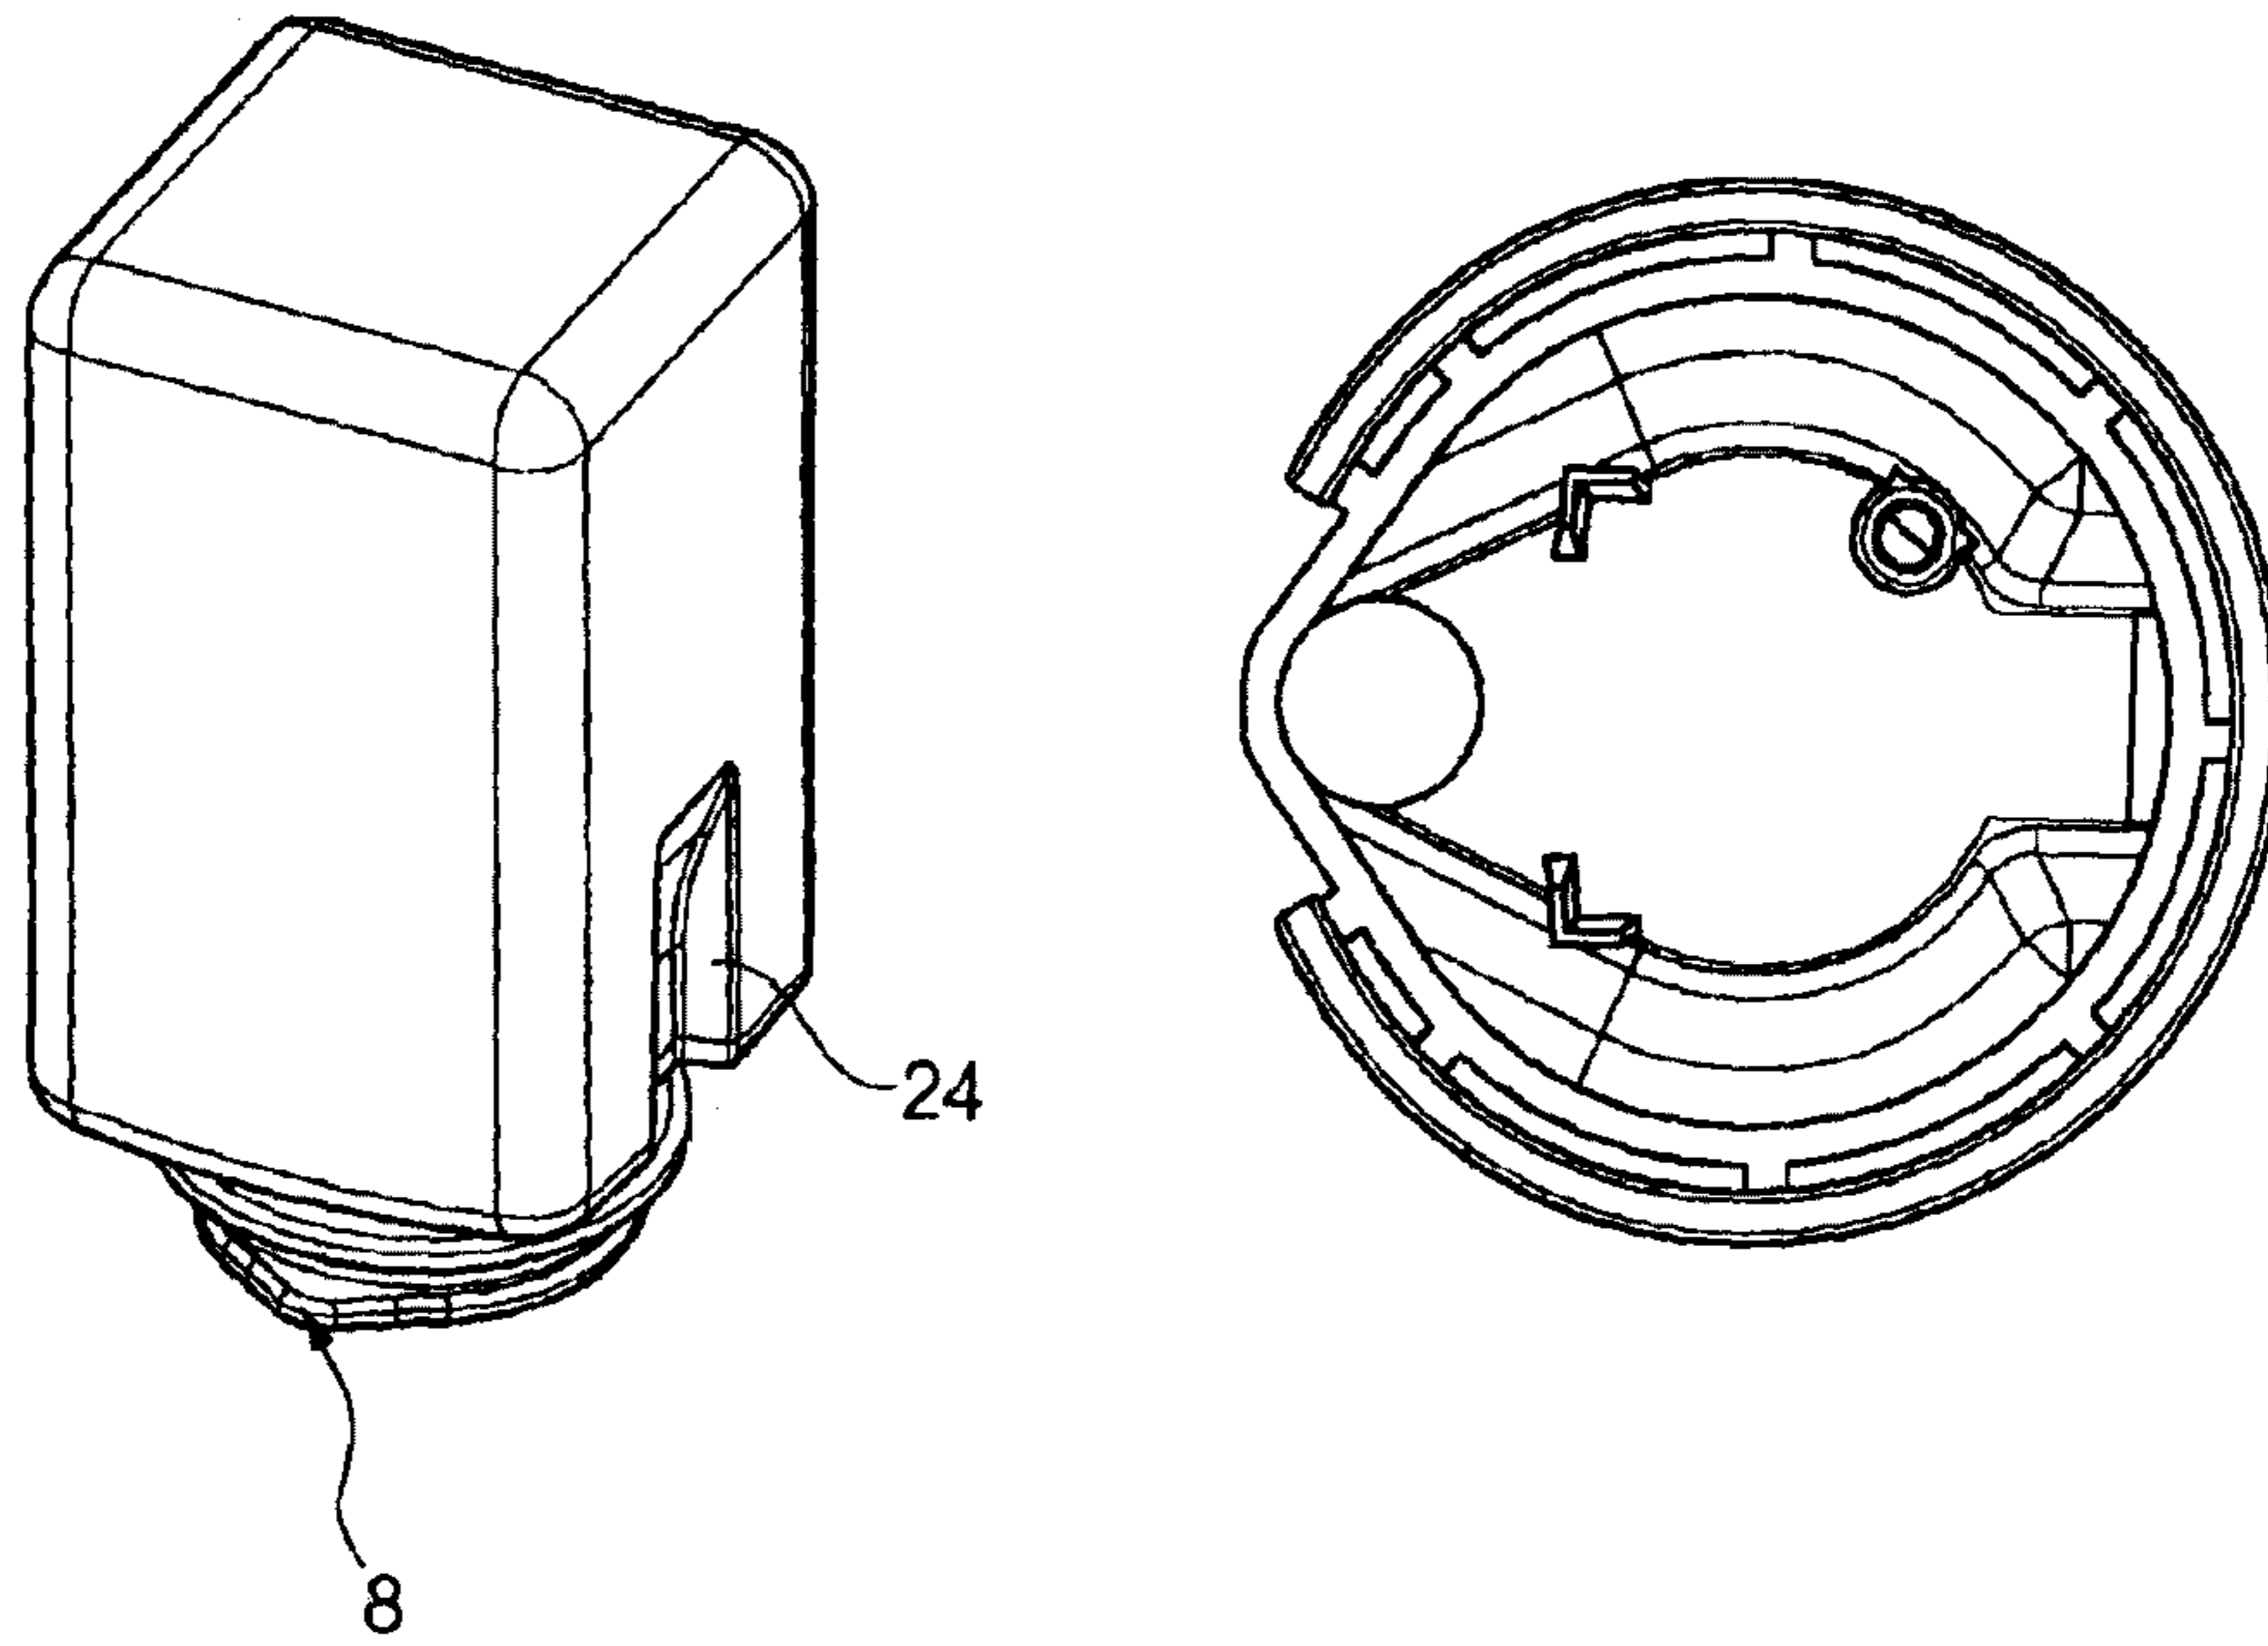


Fig. 8

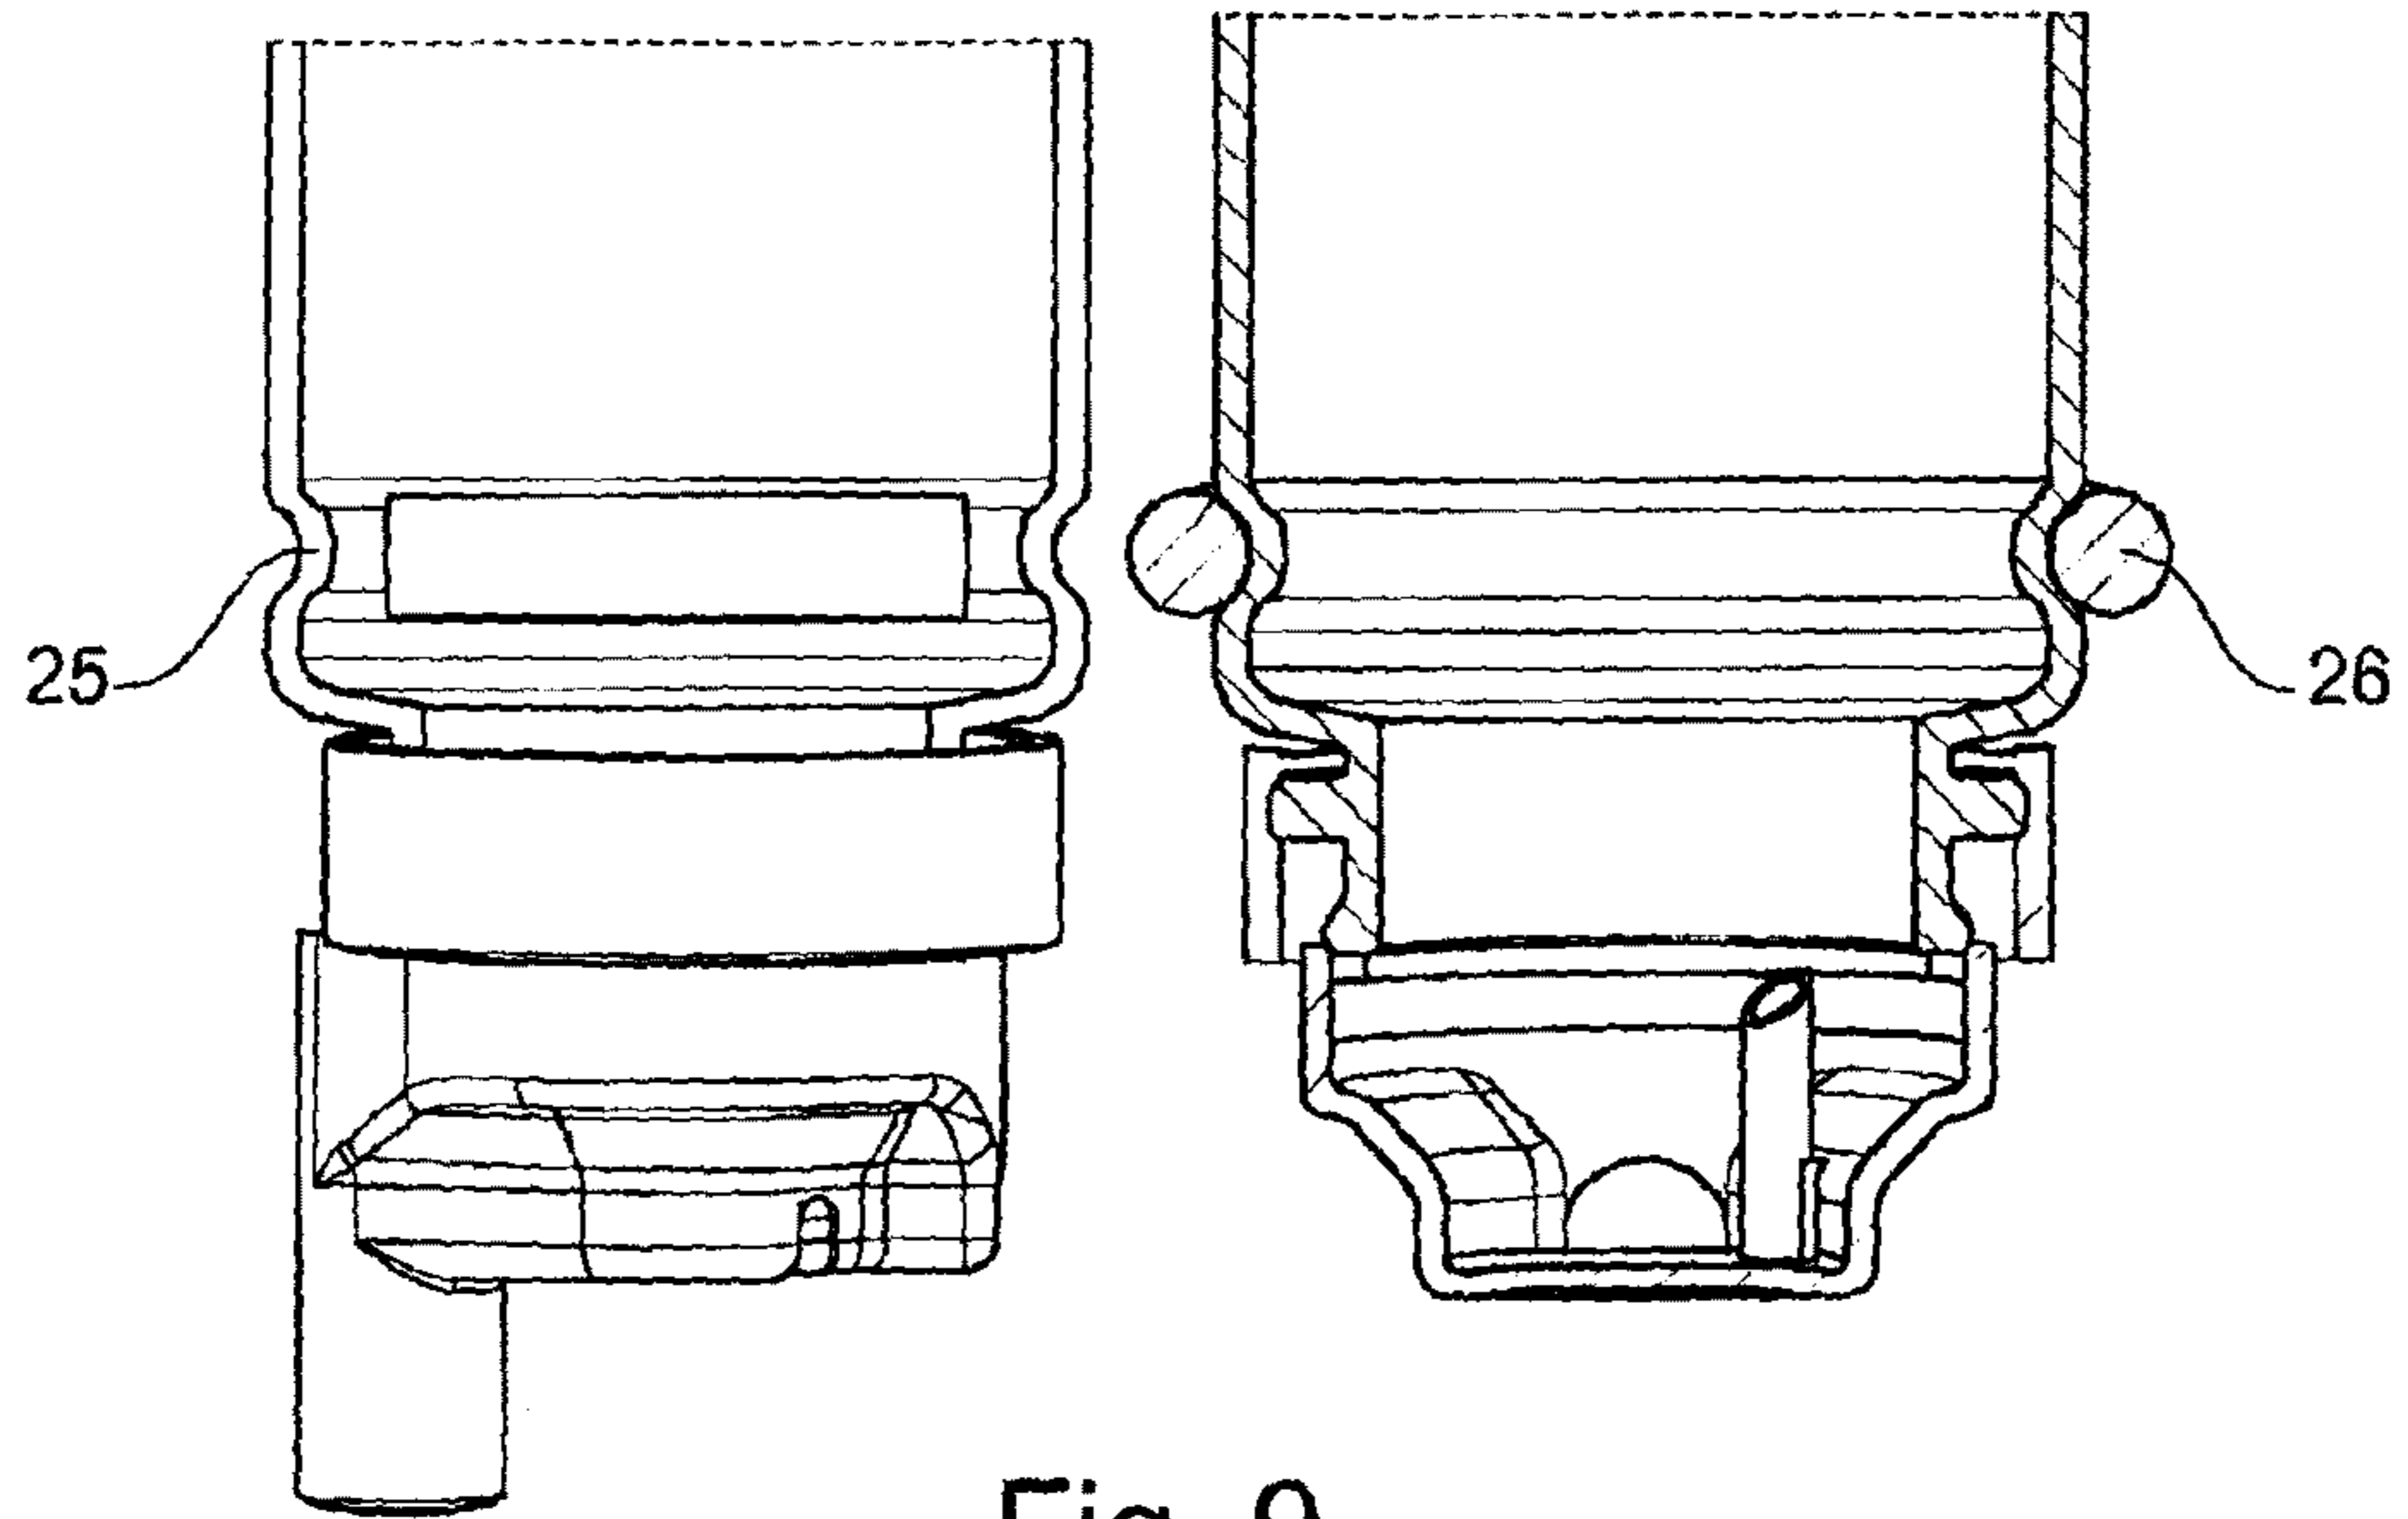


Fig. 9

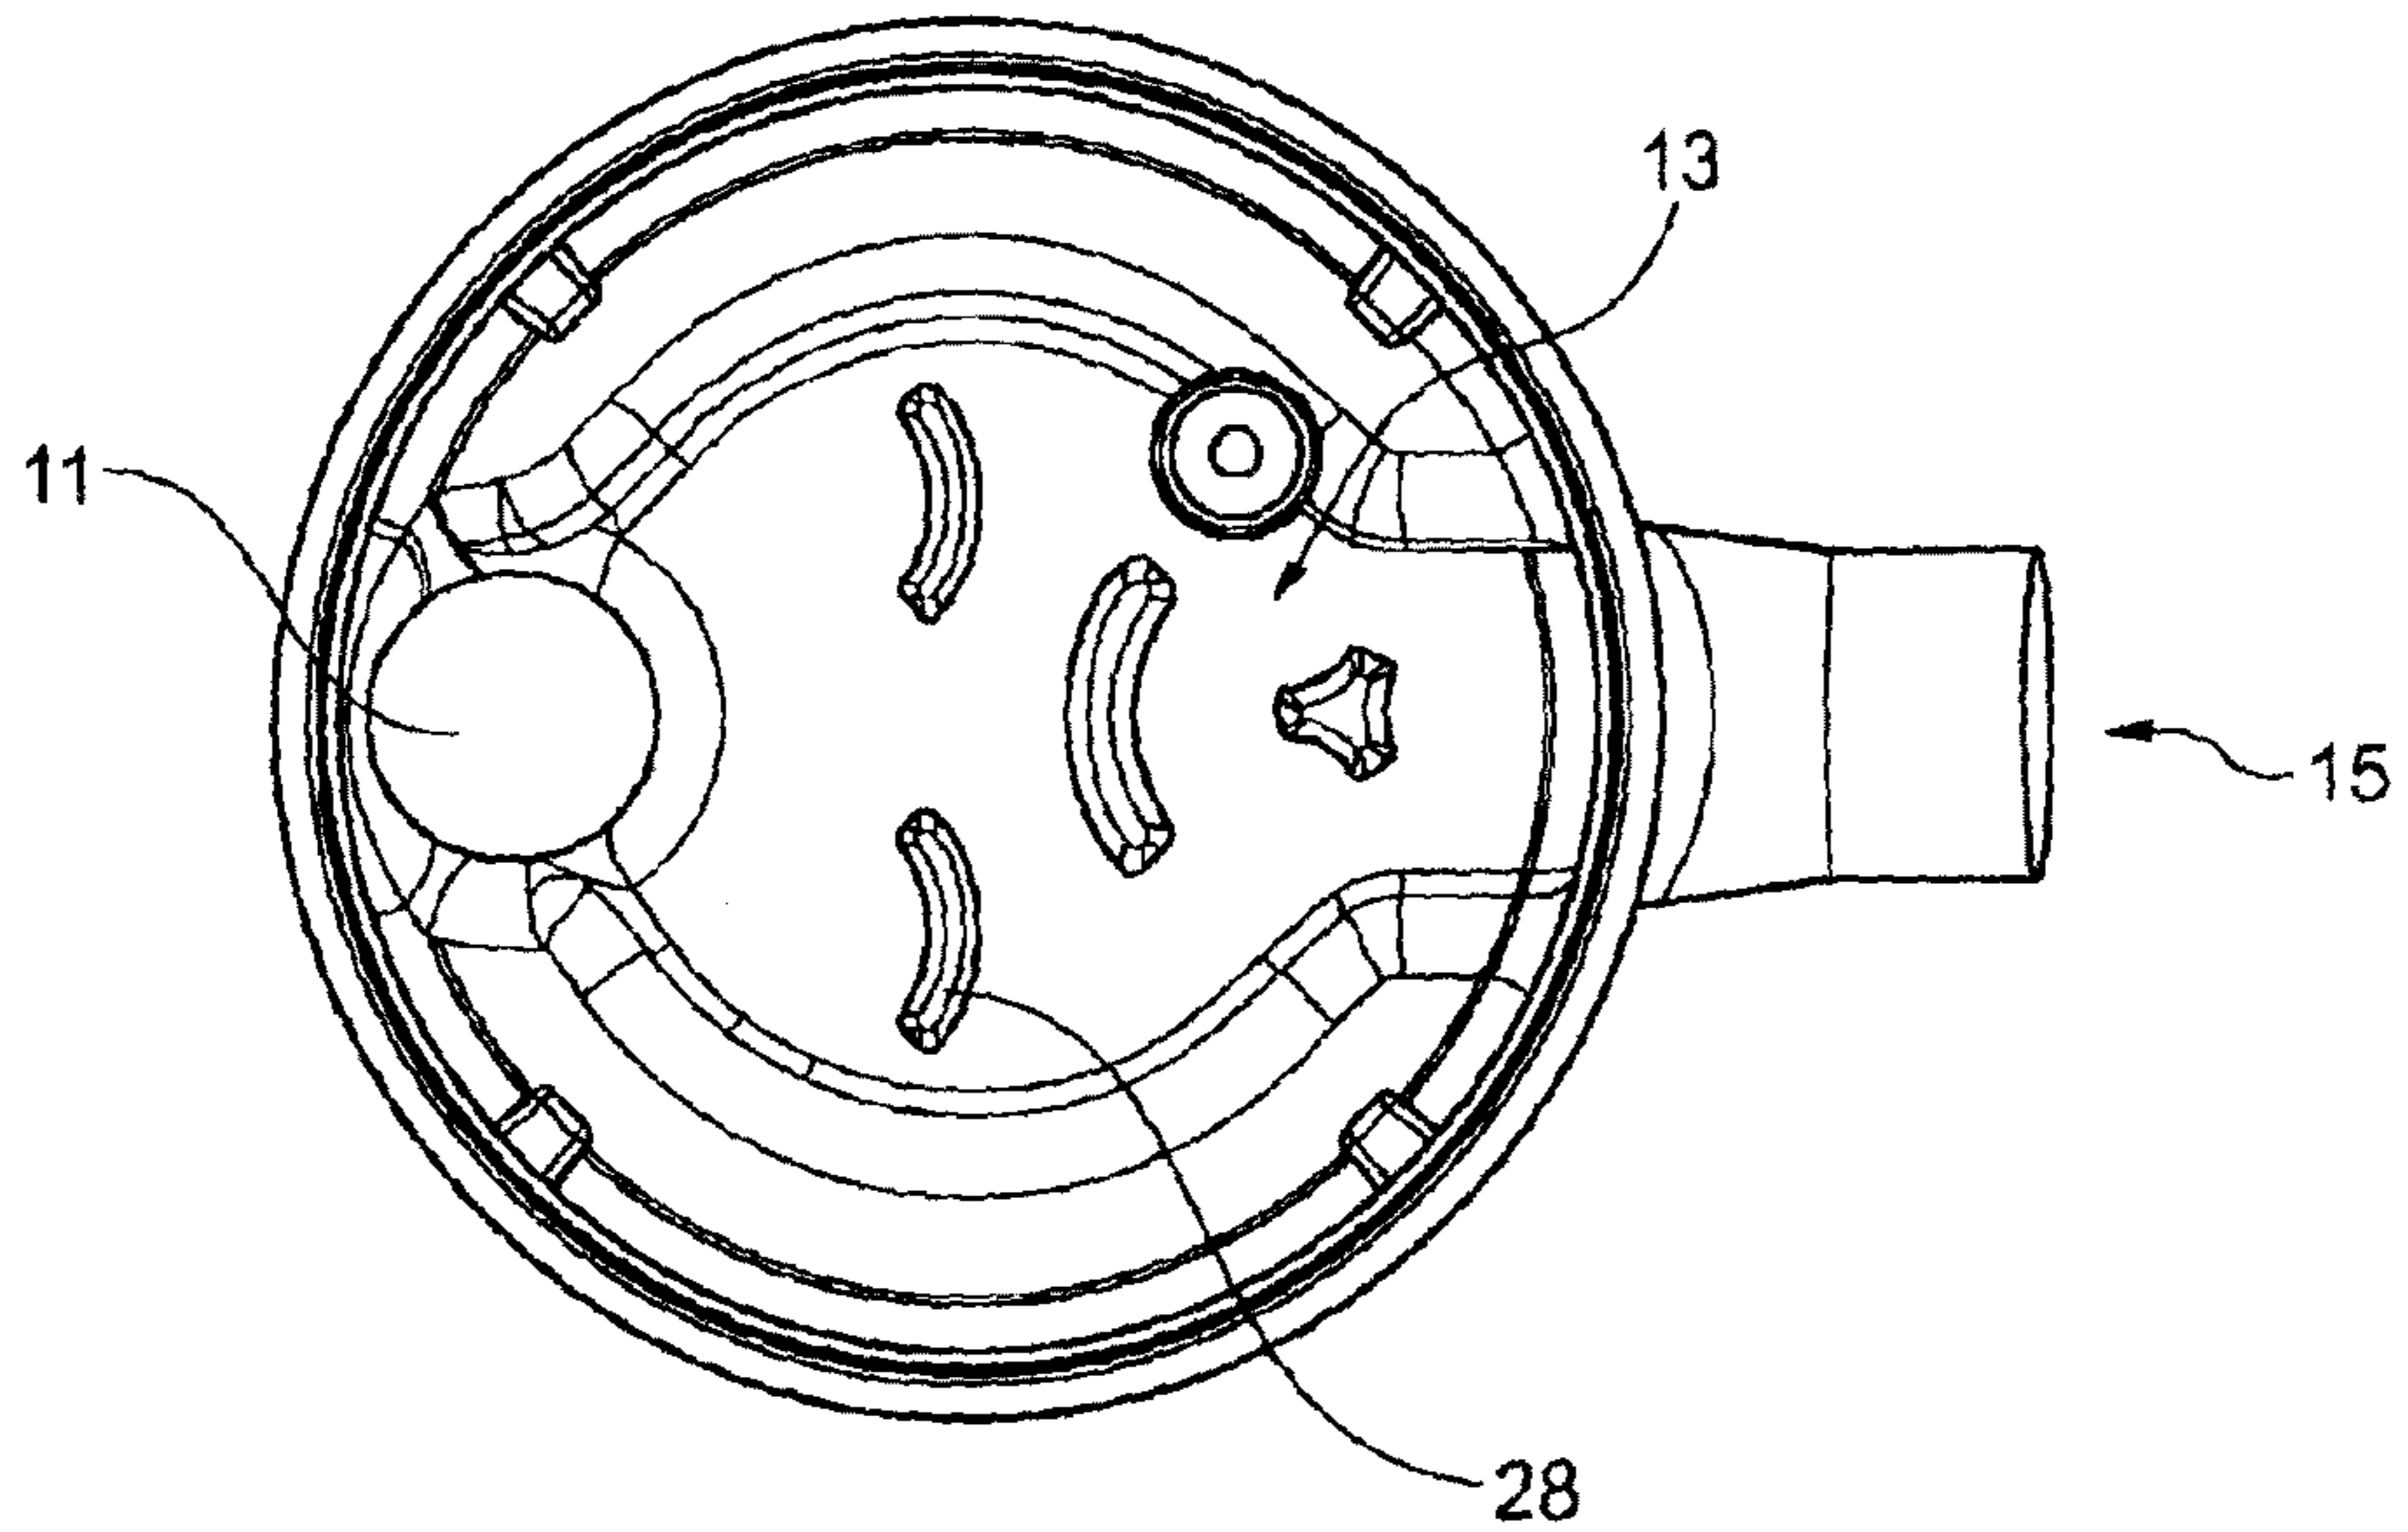


Fig. 10

9/11

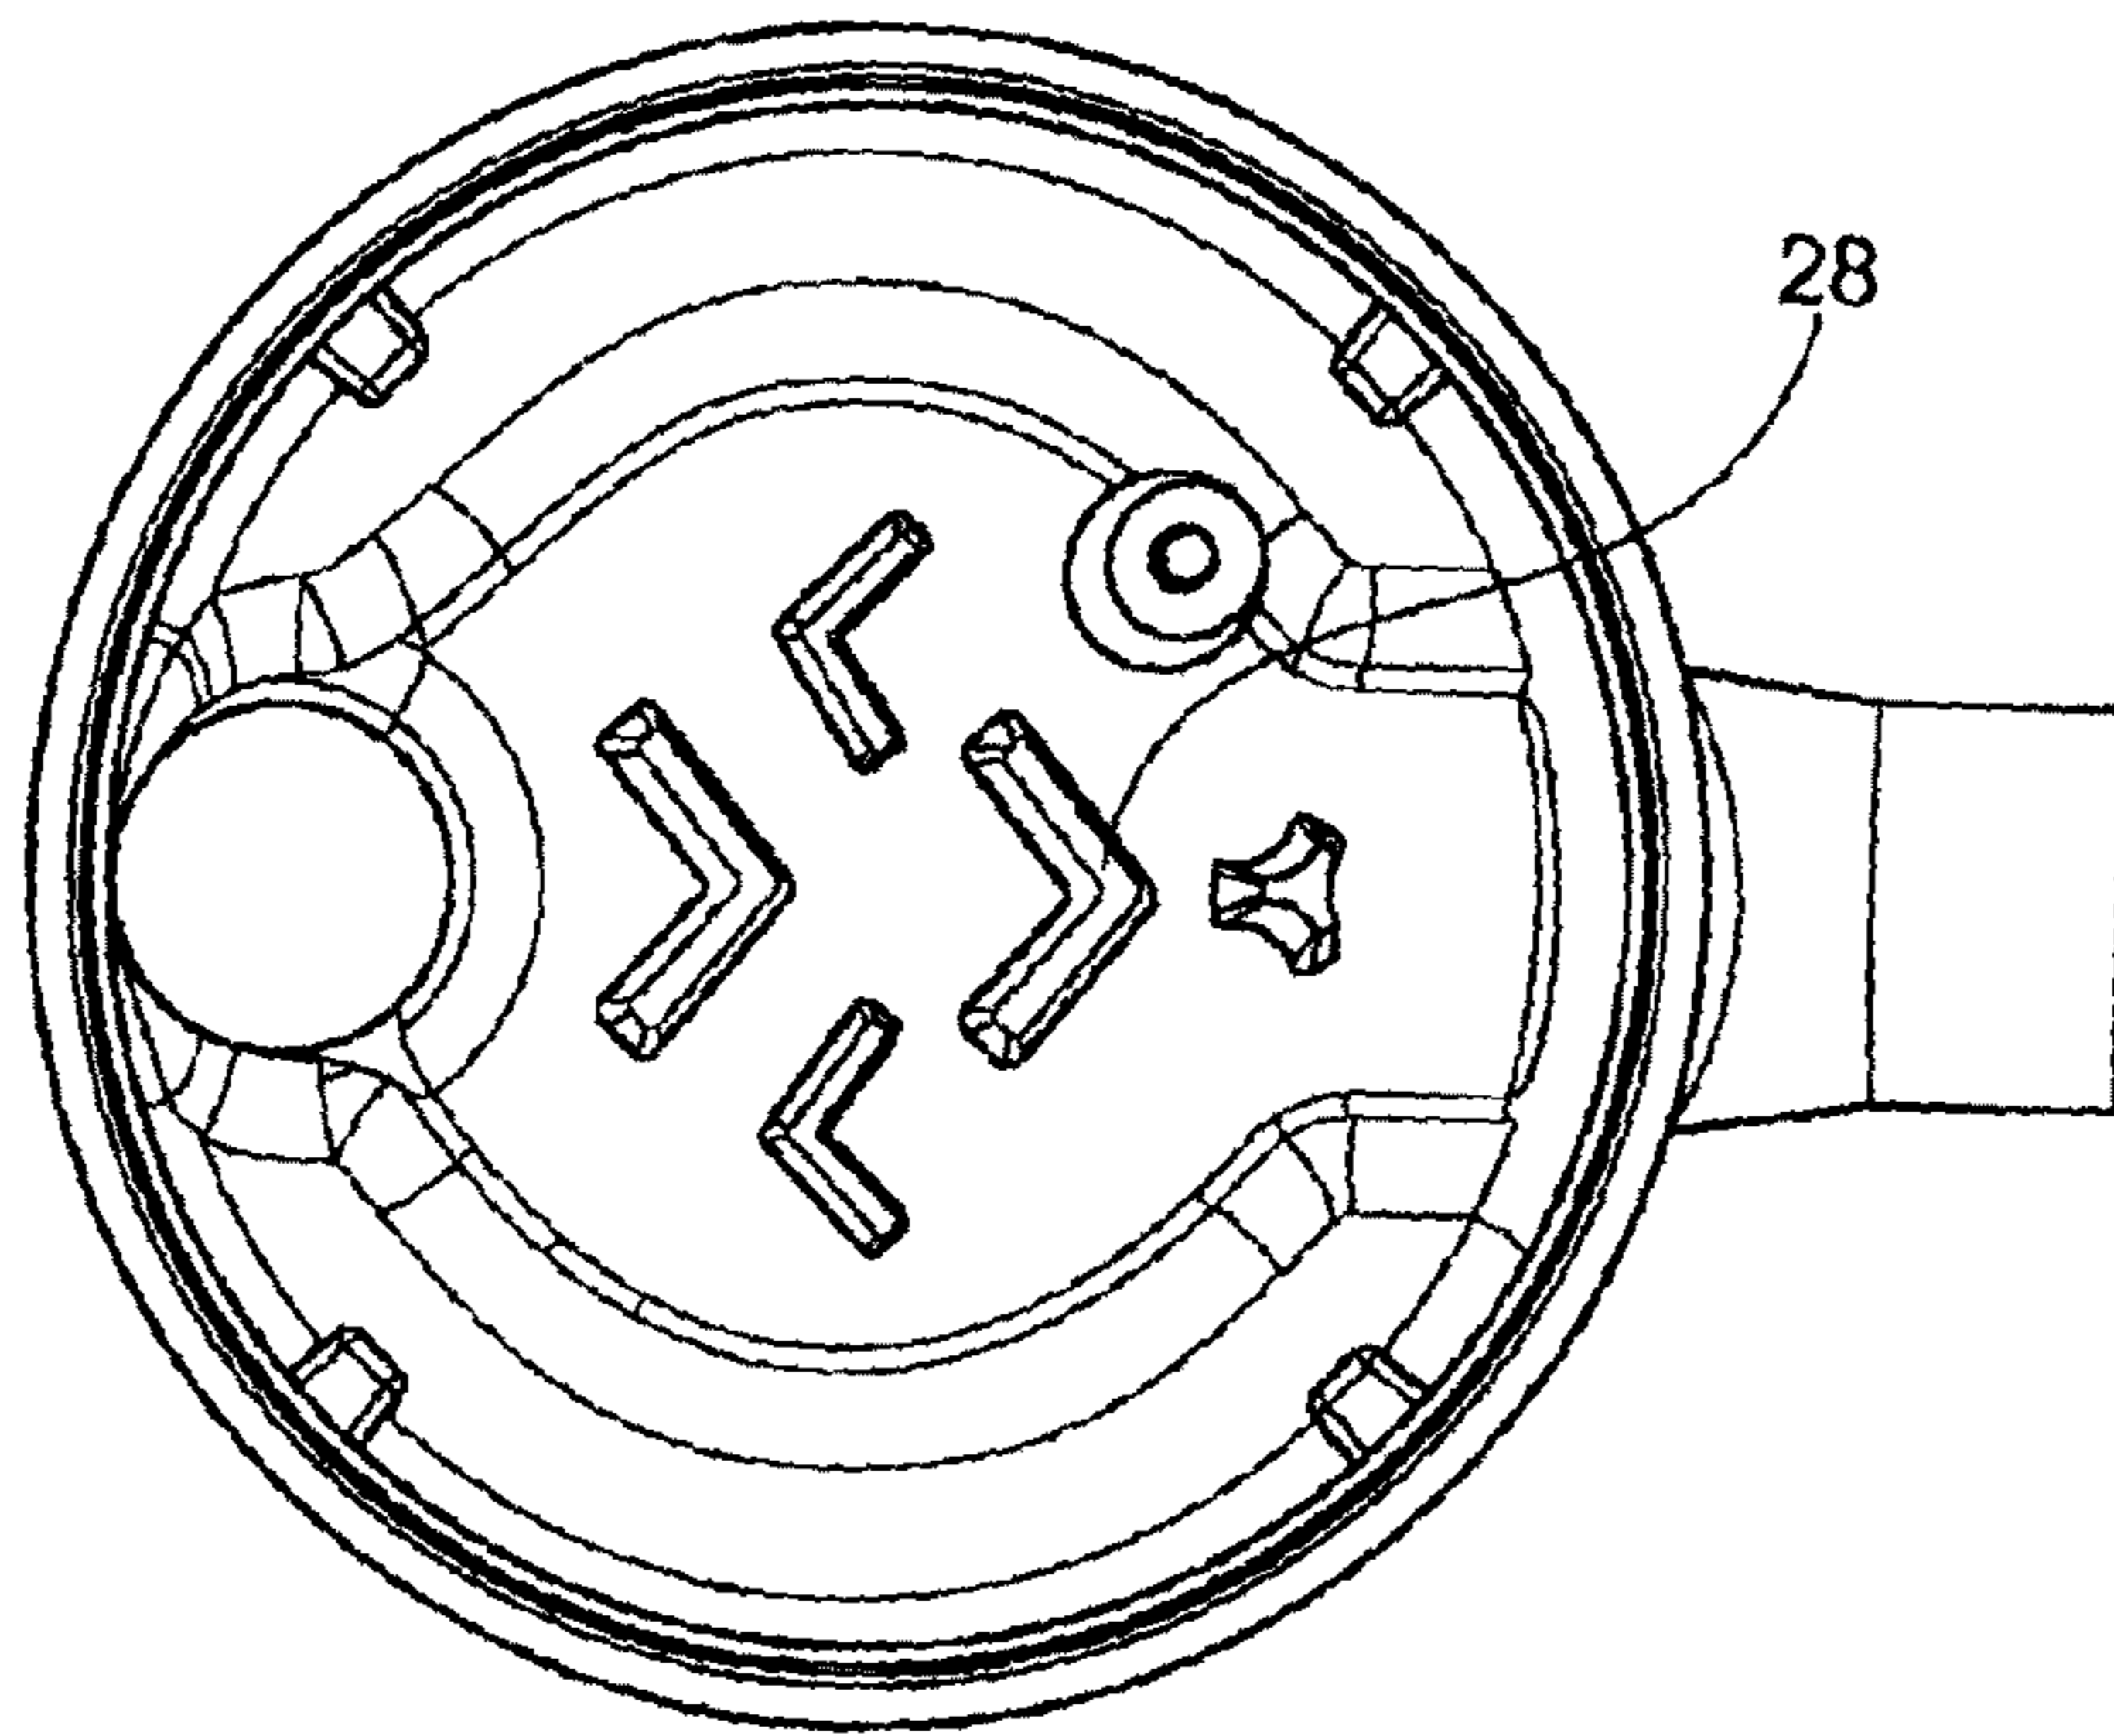


Fig. 11

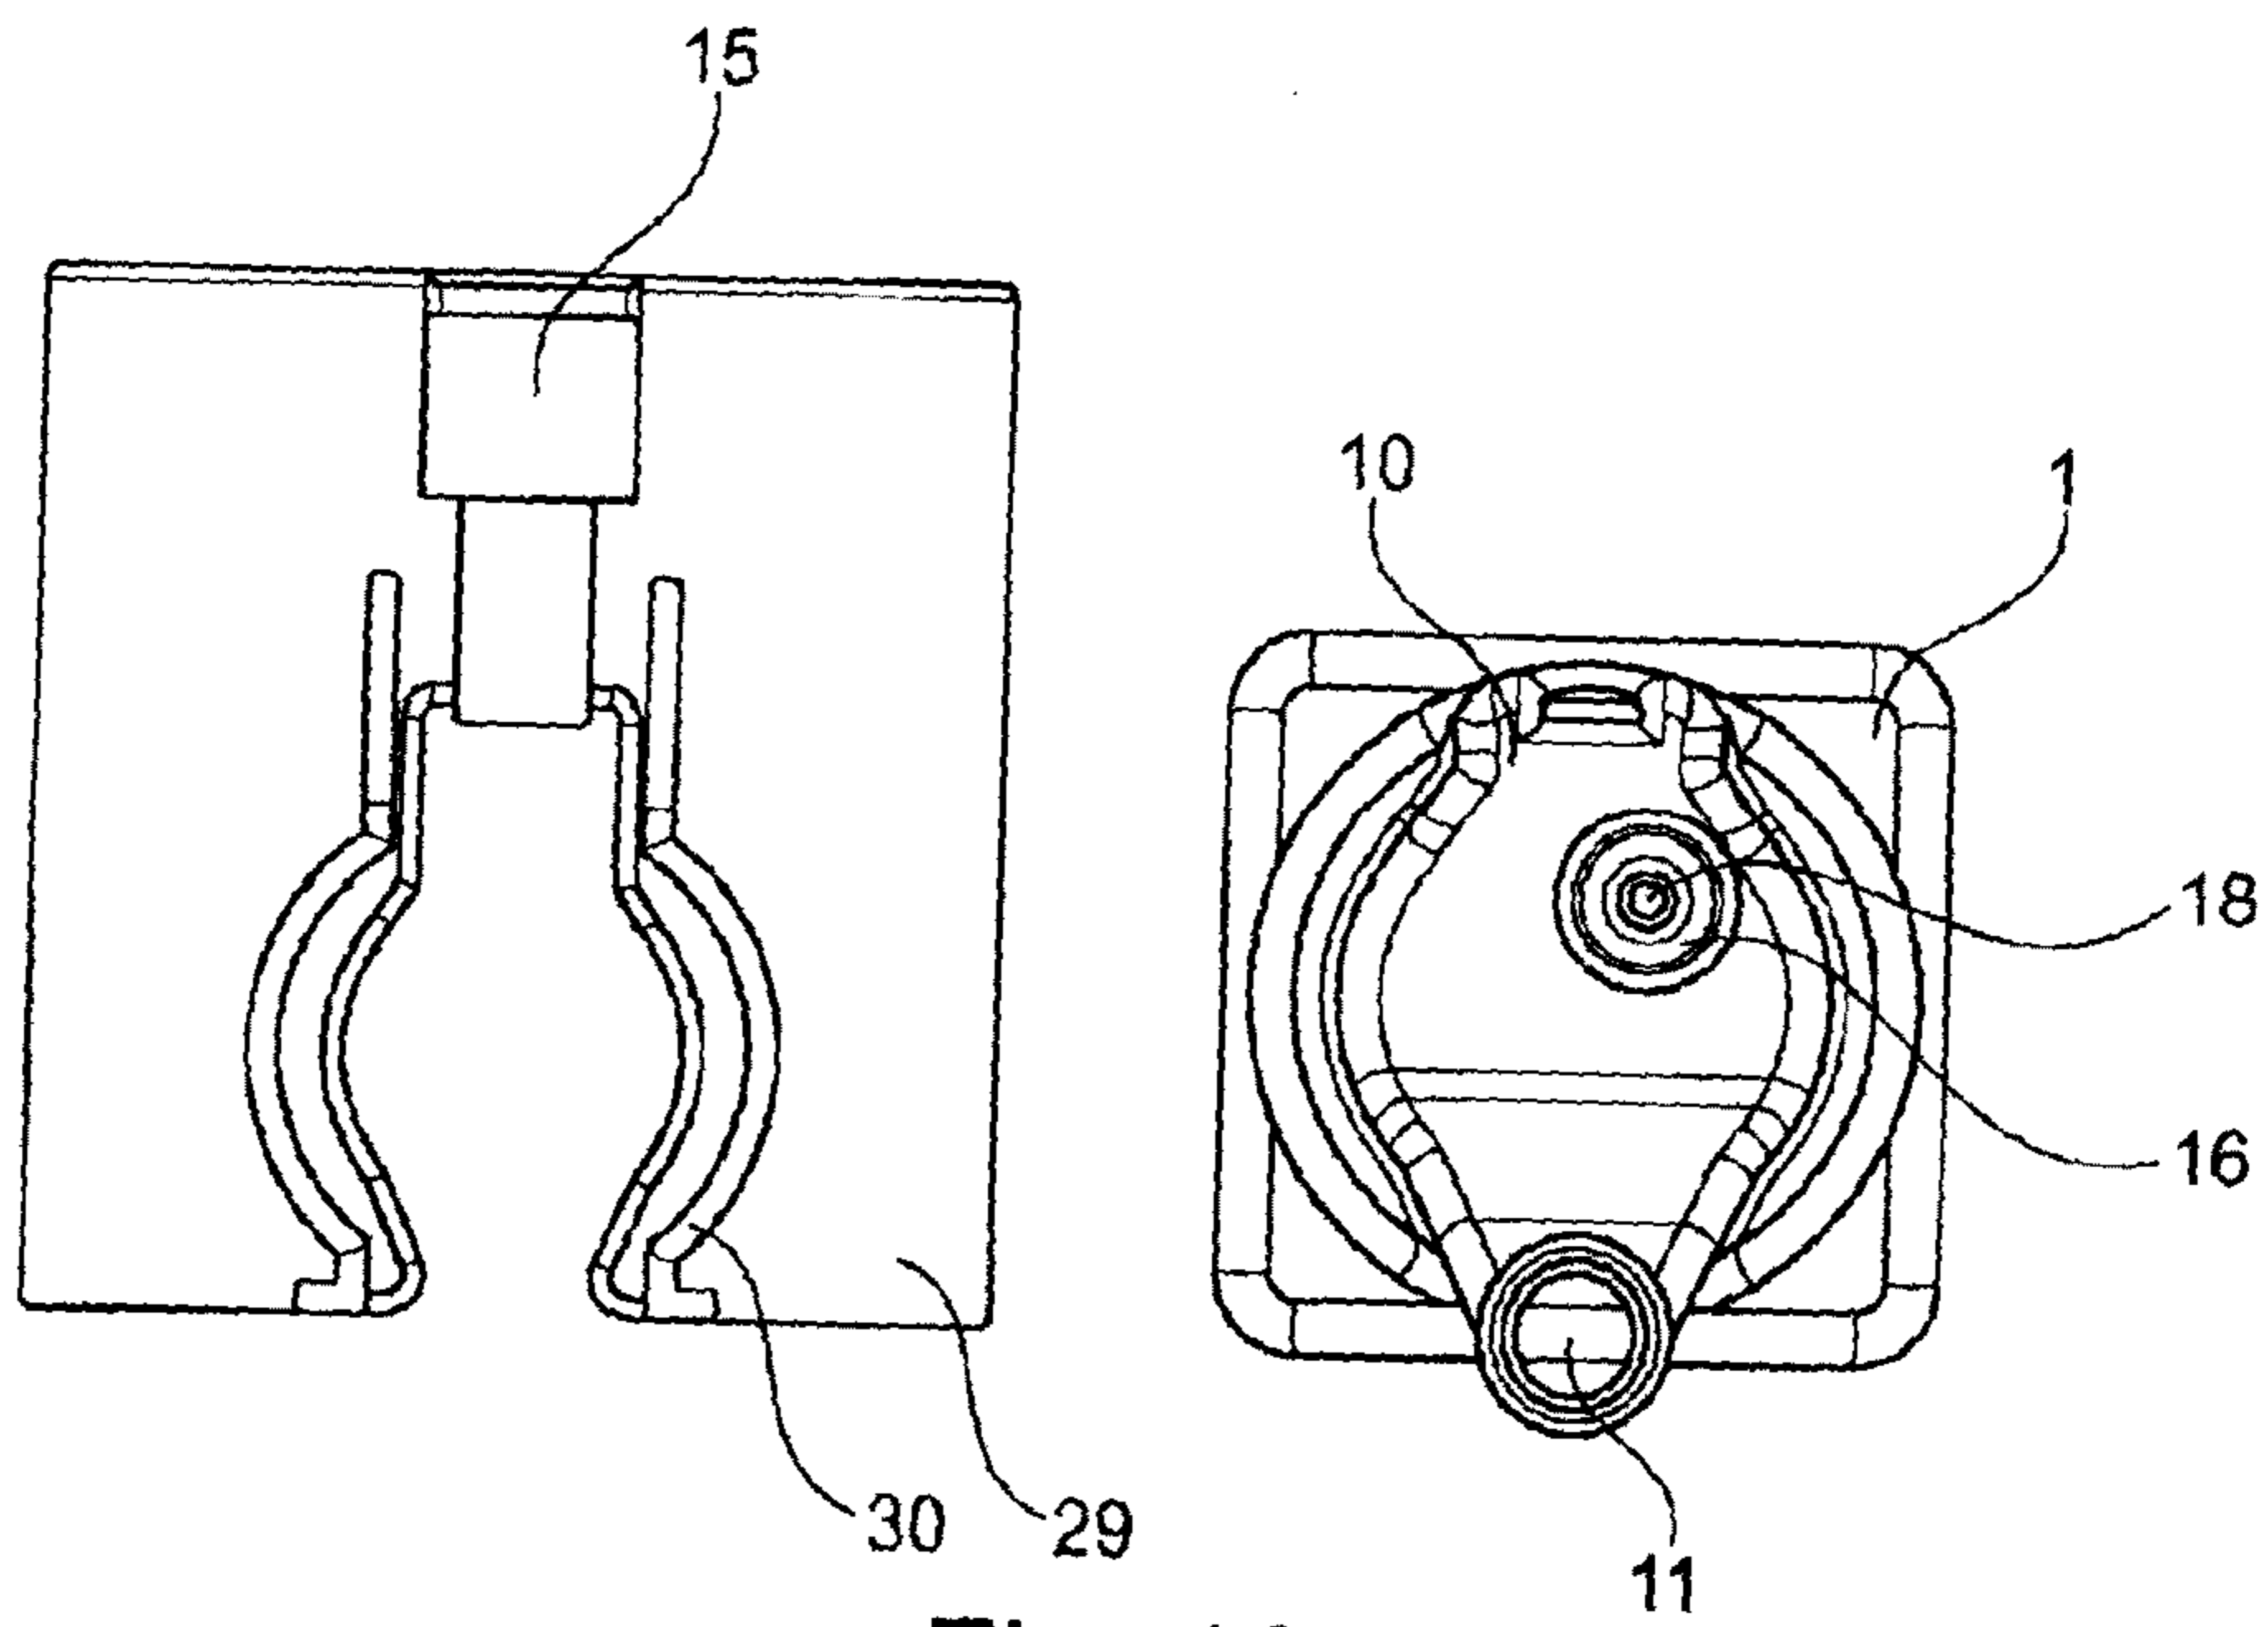


Fig. 12

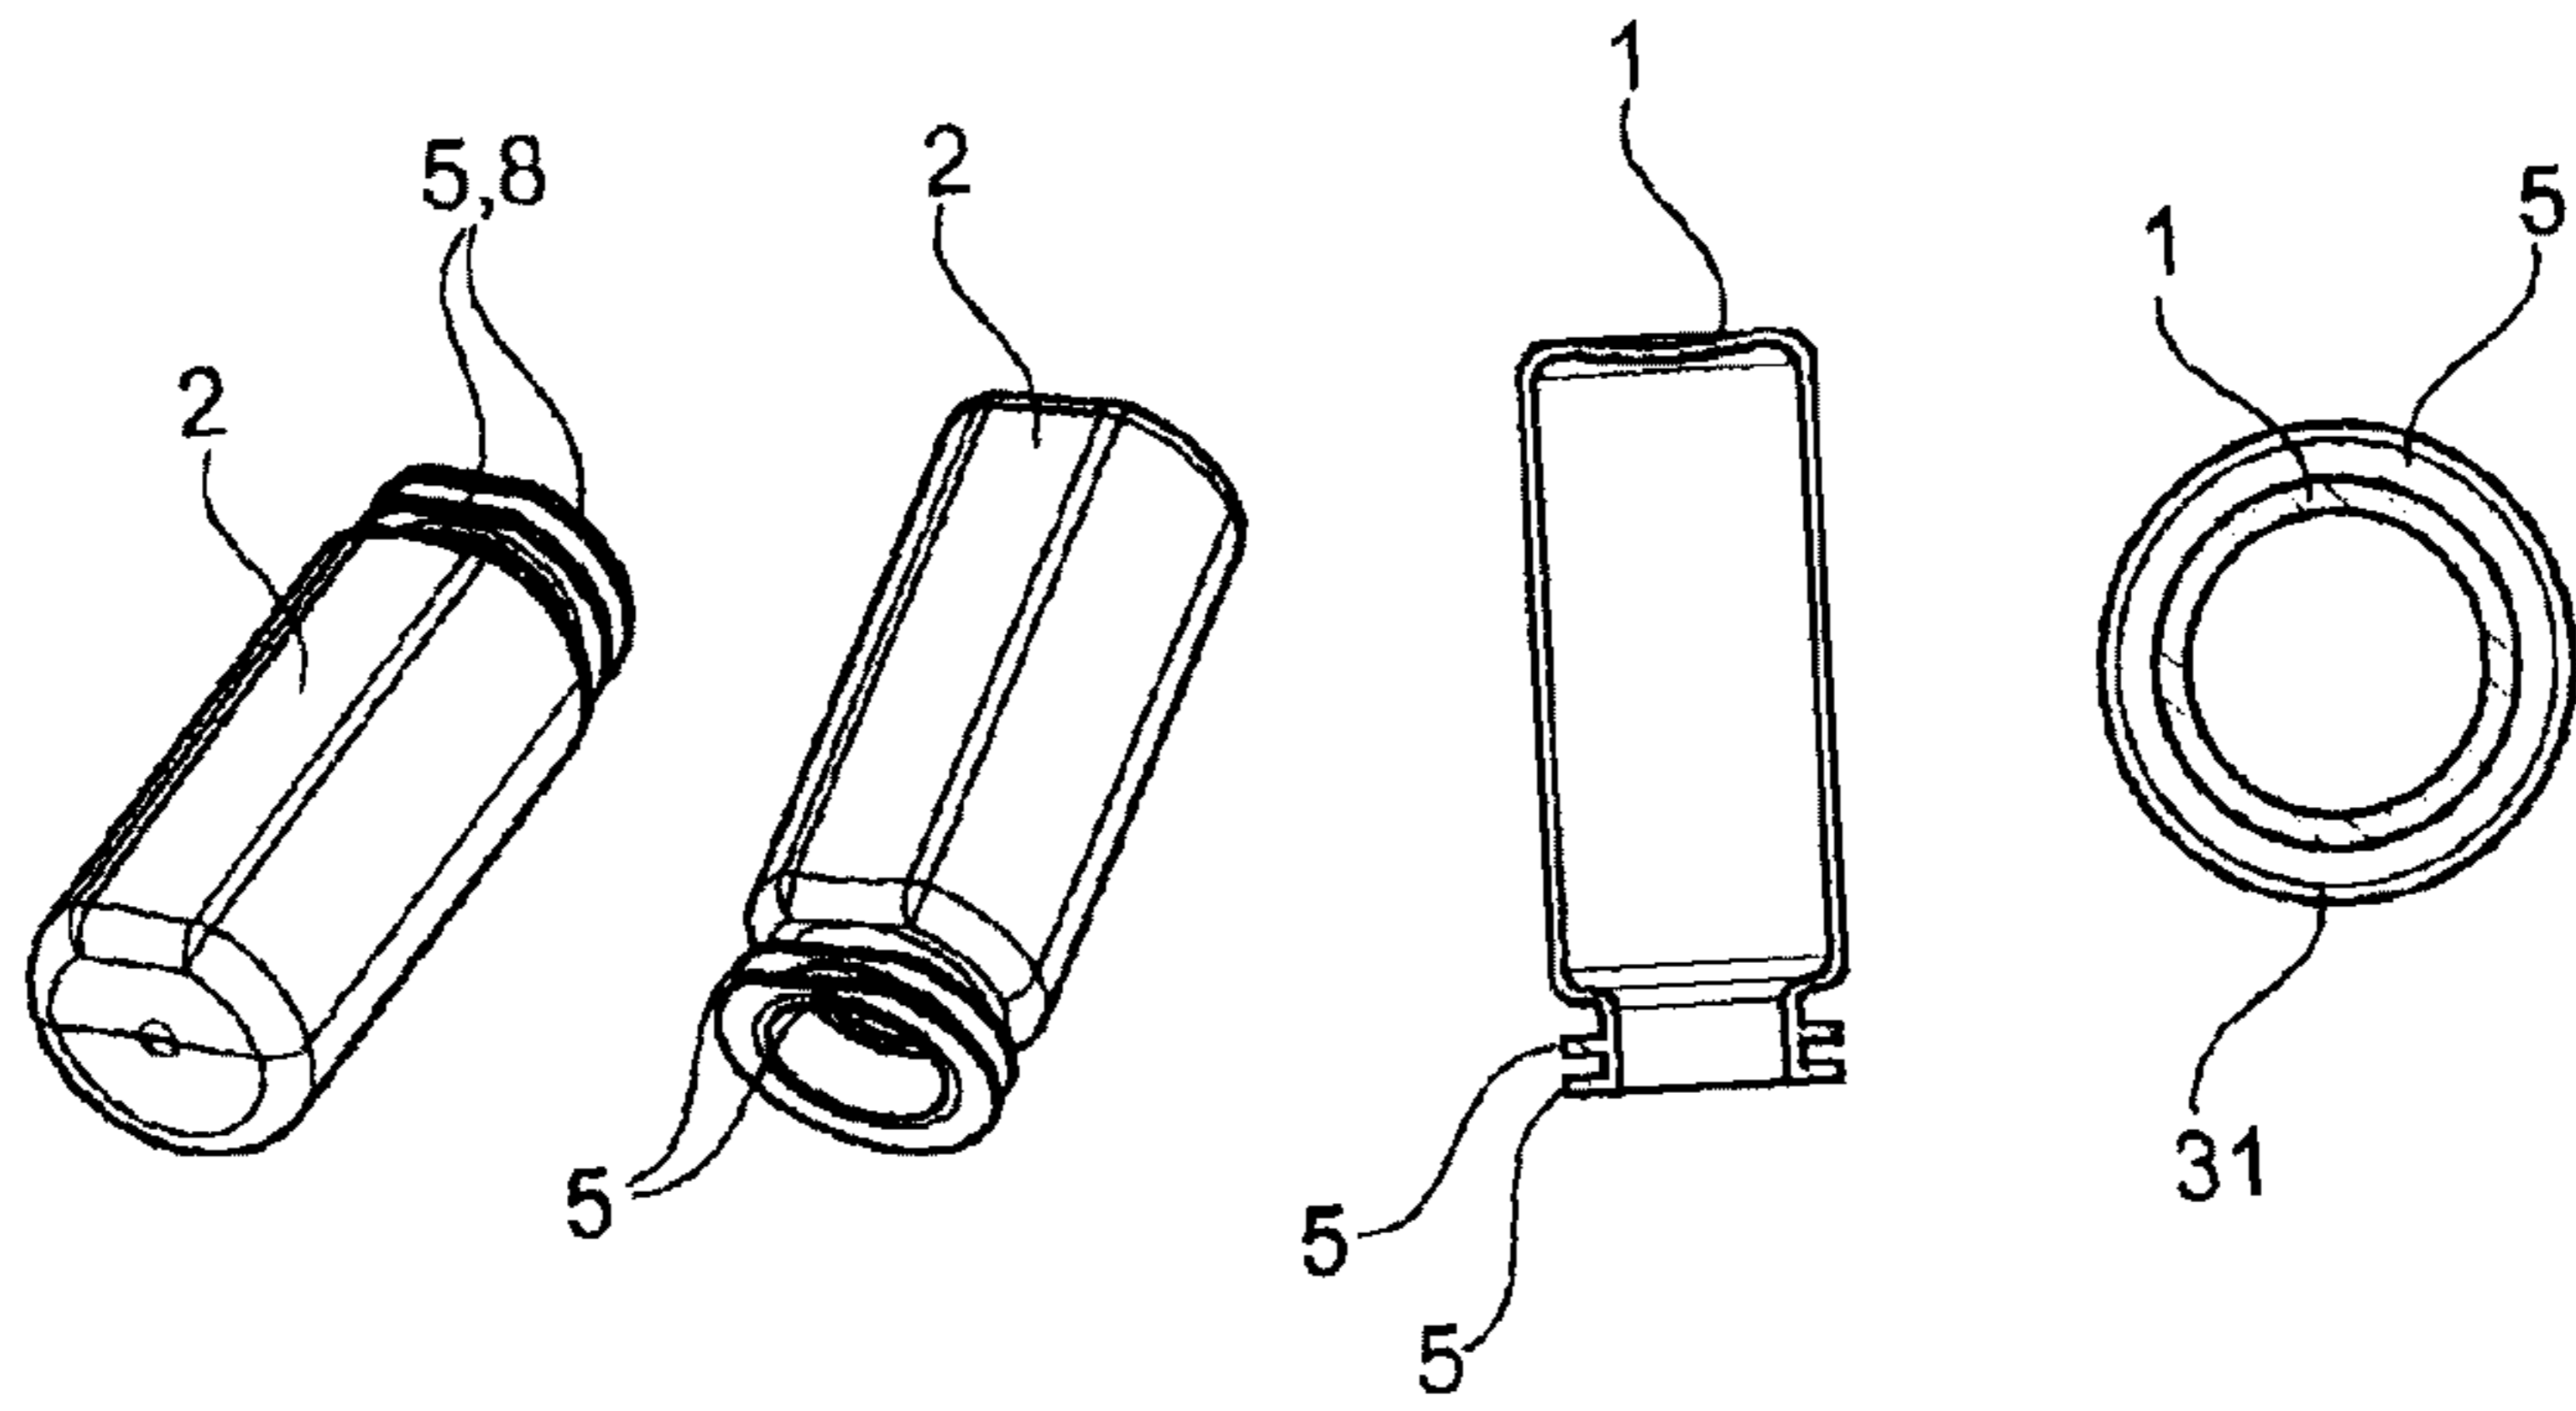


Fig. 13

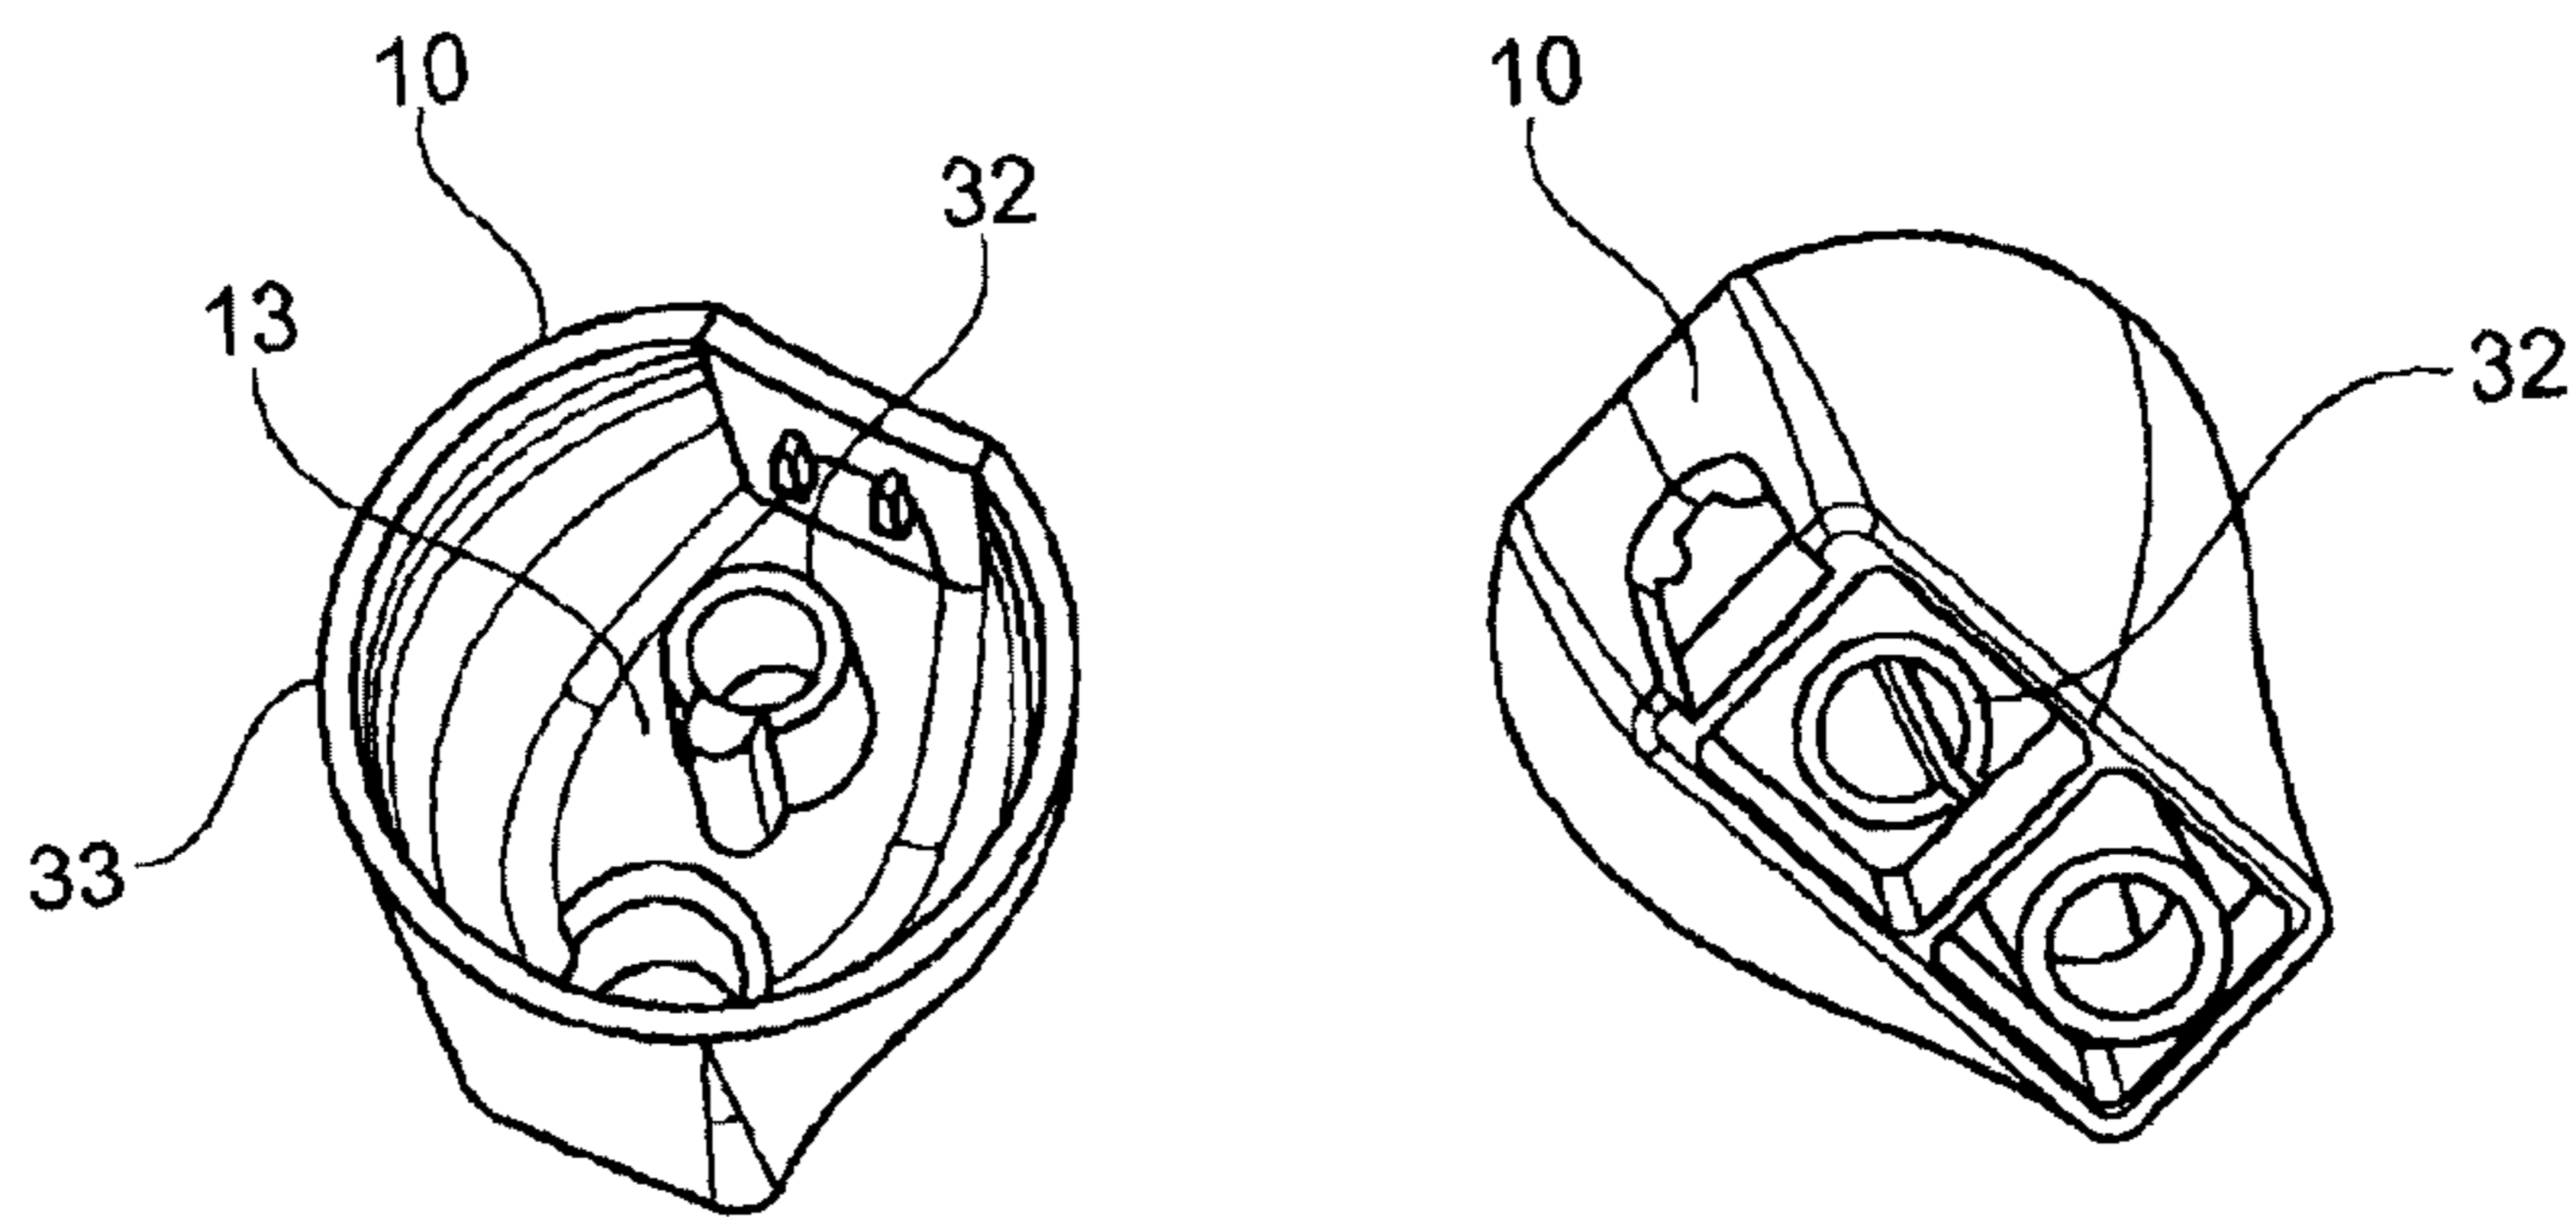


Fig. 14


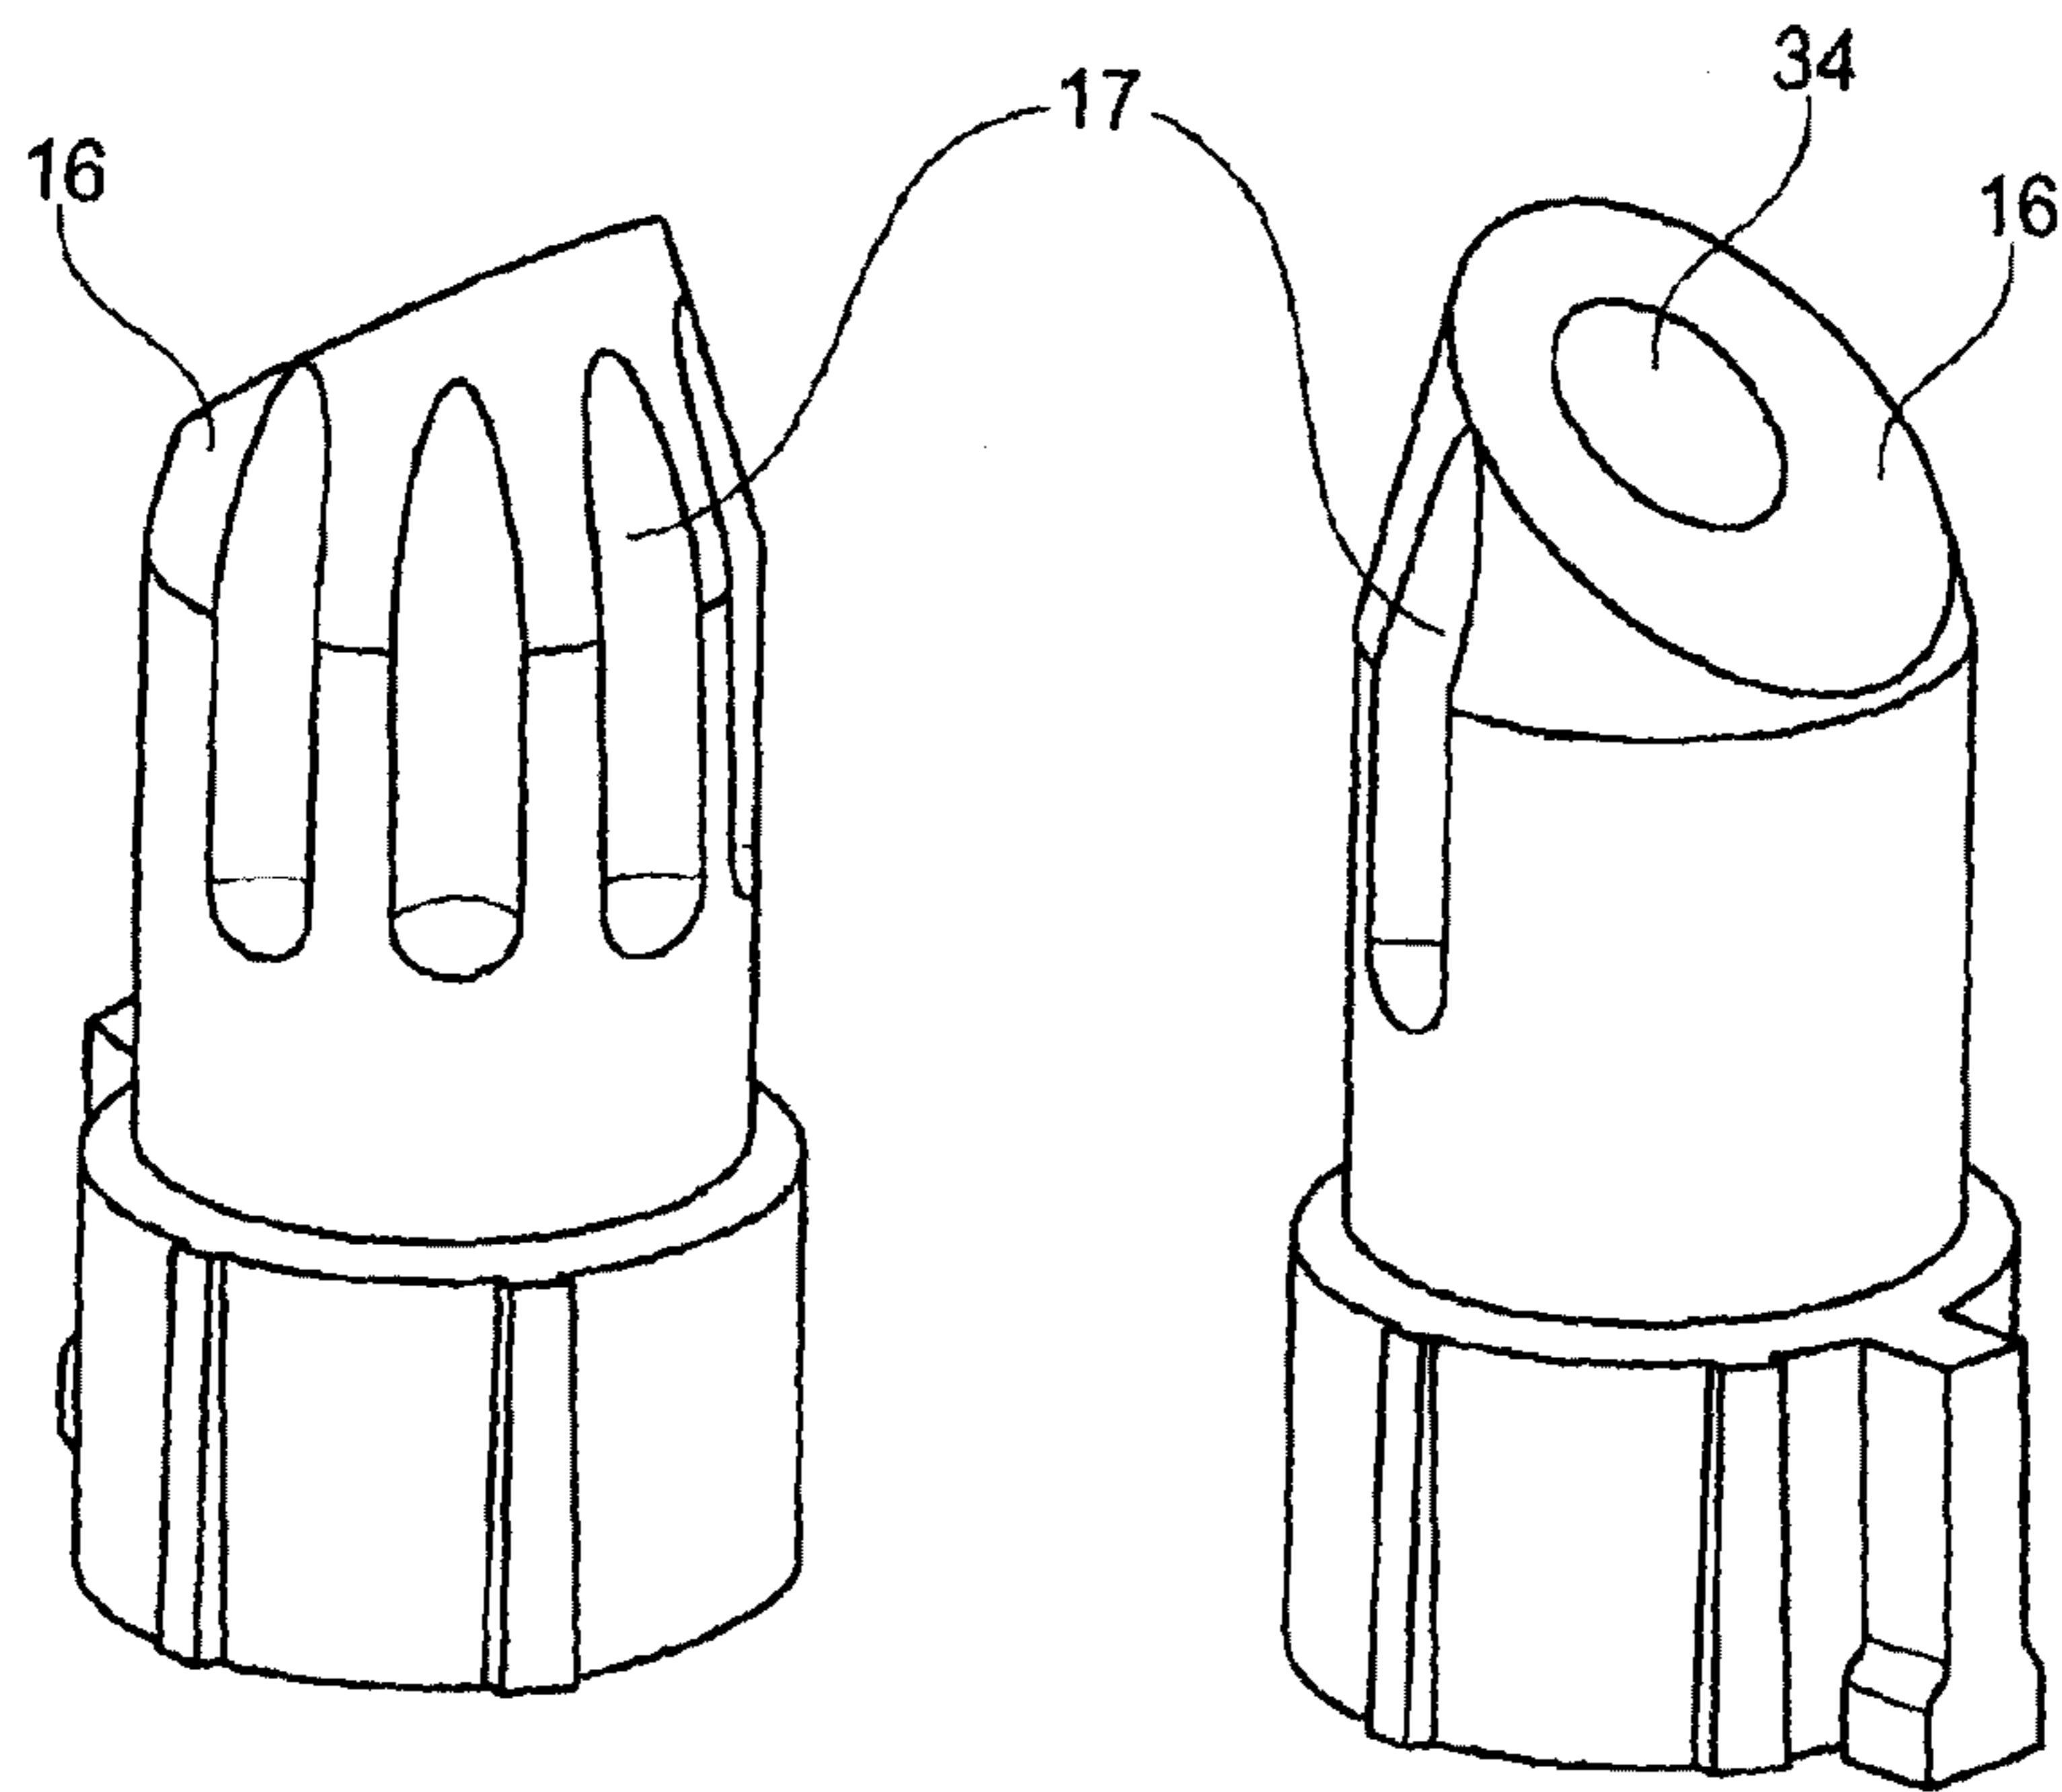


Fig. 15

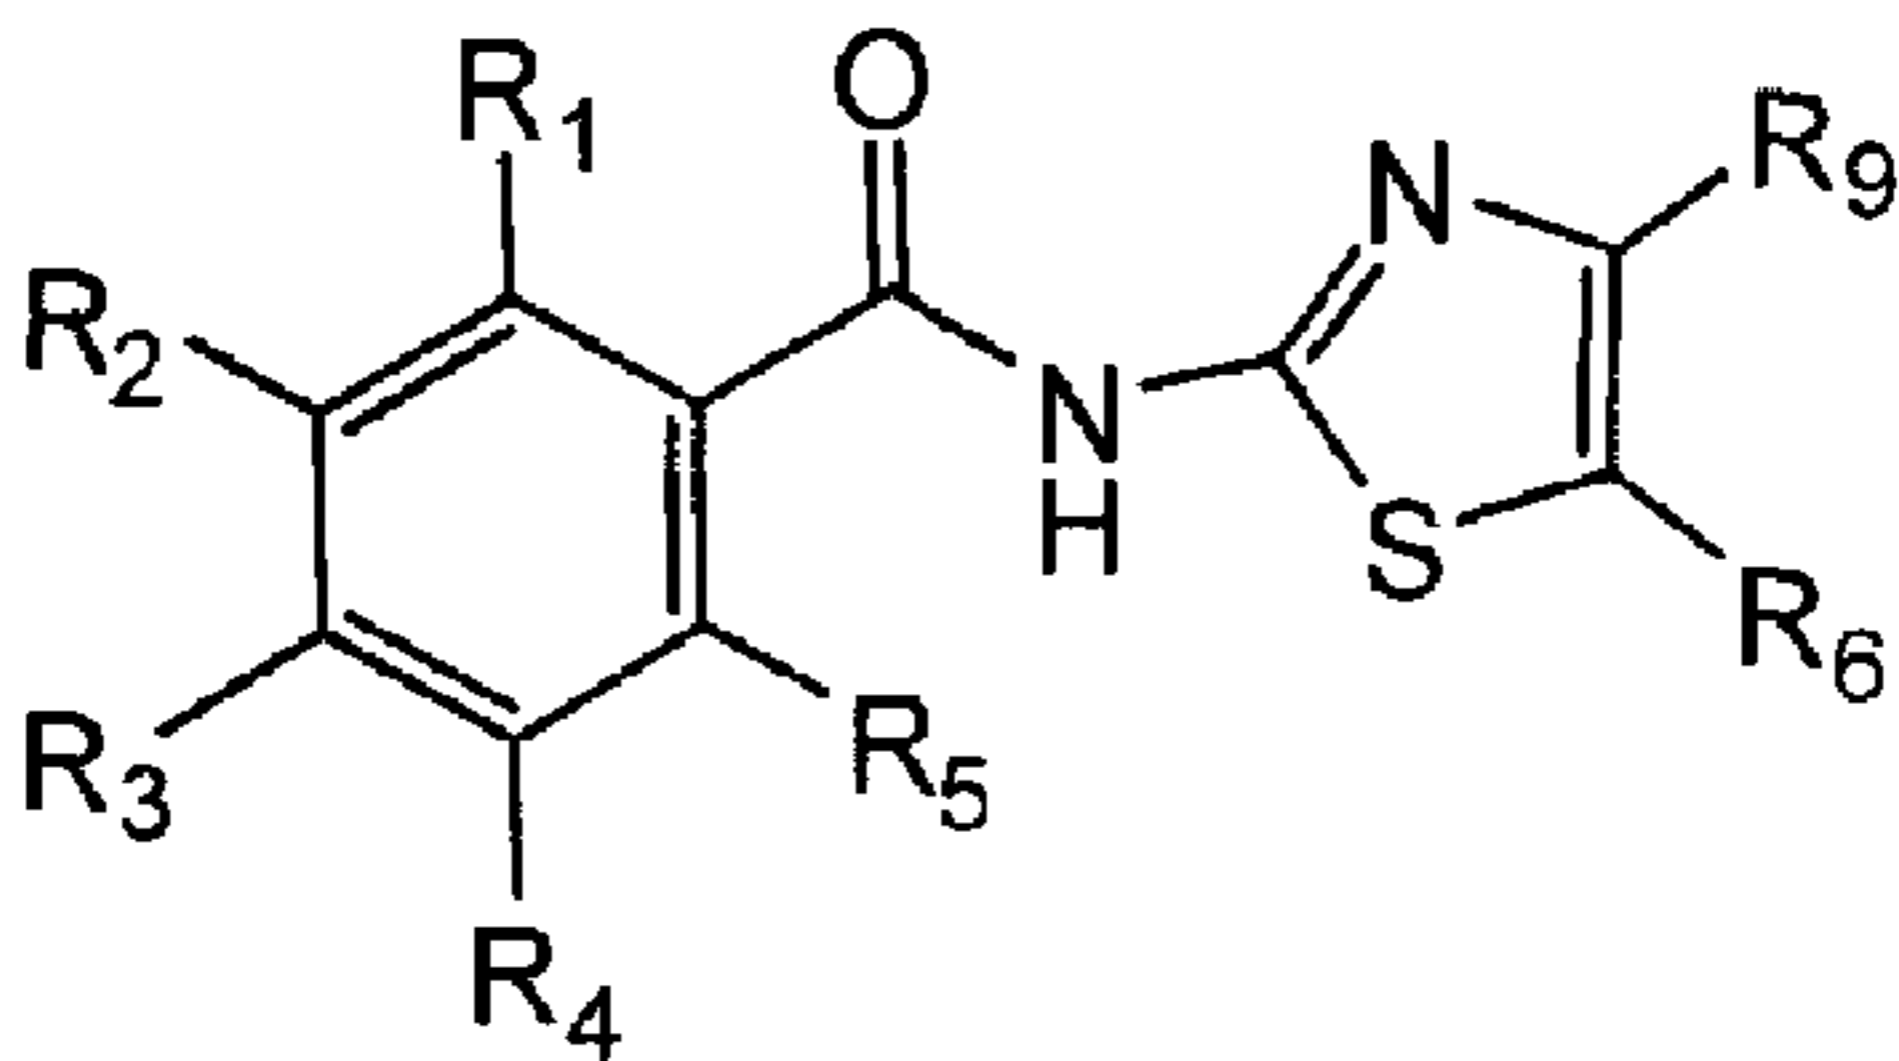

Formula I