



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2691798 C 2013/11/05

(11)(21) **2 691 798**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2008/06/10
(87) Date publication PCT/PCT Publication Date: 2009/01/08
(45) Date de délivrance/Issue Date: 2013/11/05
(85) Entrée phase nationale/National Entry: 2009/12/17
(86) N° demande PCT/PCT Application No.: EP 2008/004629
(87) N° publication PCT/PCT Publication No.: 2009/003573
(30) Priorités/Priorities: 2007/06/29 (EP07012781.6);
2007/07/05 (US60/929,614); 2007/12/05 (EP07023548.6)

(51) Cl.Int./Int.Cl. *C01G 51/00* (2006.01),
H01M 4/02 (2006.01), *H01M 4/52* (2010.01)


(72) Inventeurs/Inventors:
CHEN, ZHAOHUI, CA;
ELLENWOOD, ROBERT, CA

(73) Propriétaire/Owner:
UMICORE, BE

(74) Agent: MACRAE & CO.

(54) Titre : OXYDE DE LITHIUM-COBALT HAUTE DENSITE POUR BATTERIES RECHARGEABLES

(54) Title: HIGH DENSITY LITHIUM COBALT OXIDE FOR RECHARGEABLE BATTERIES

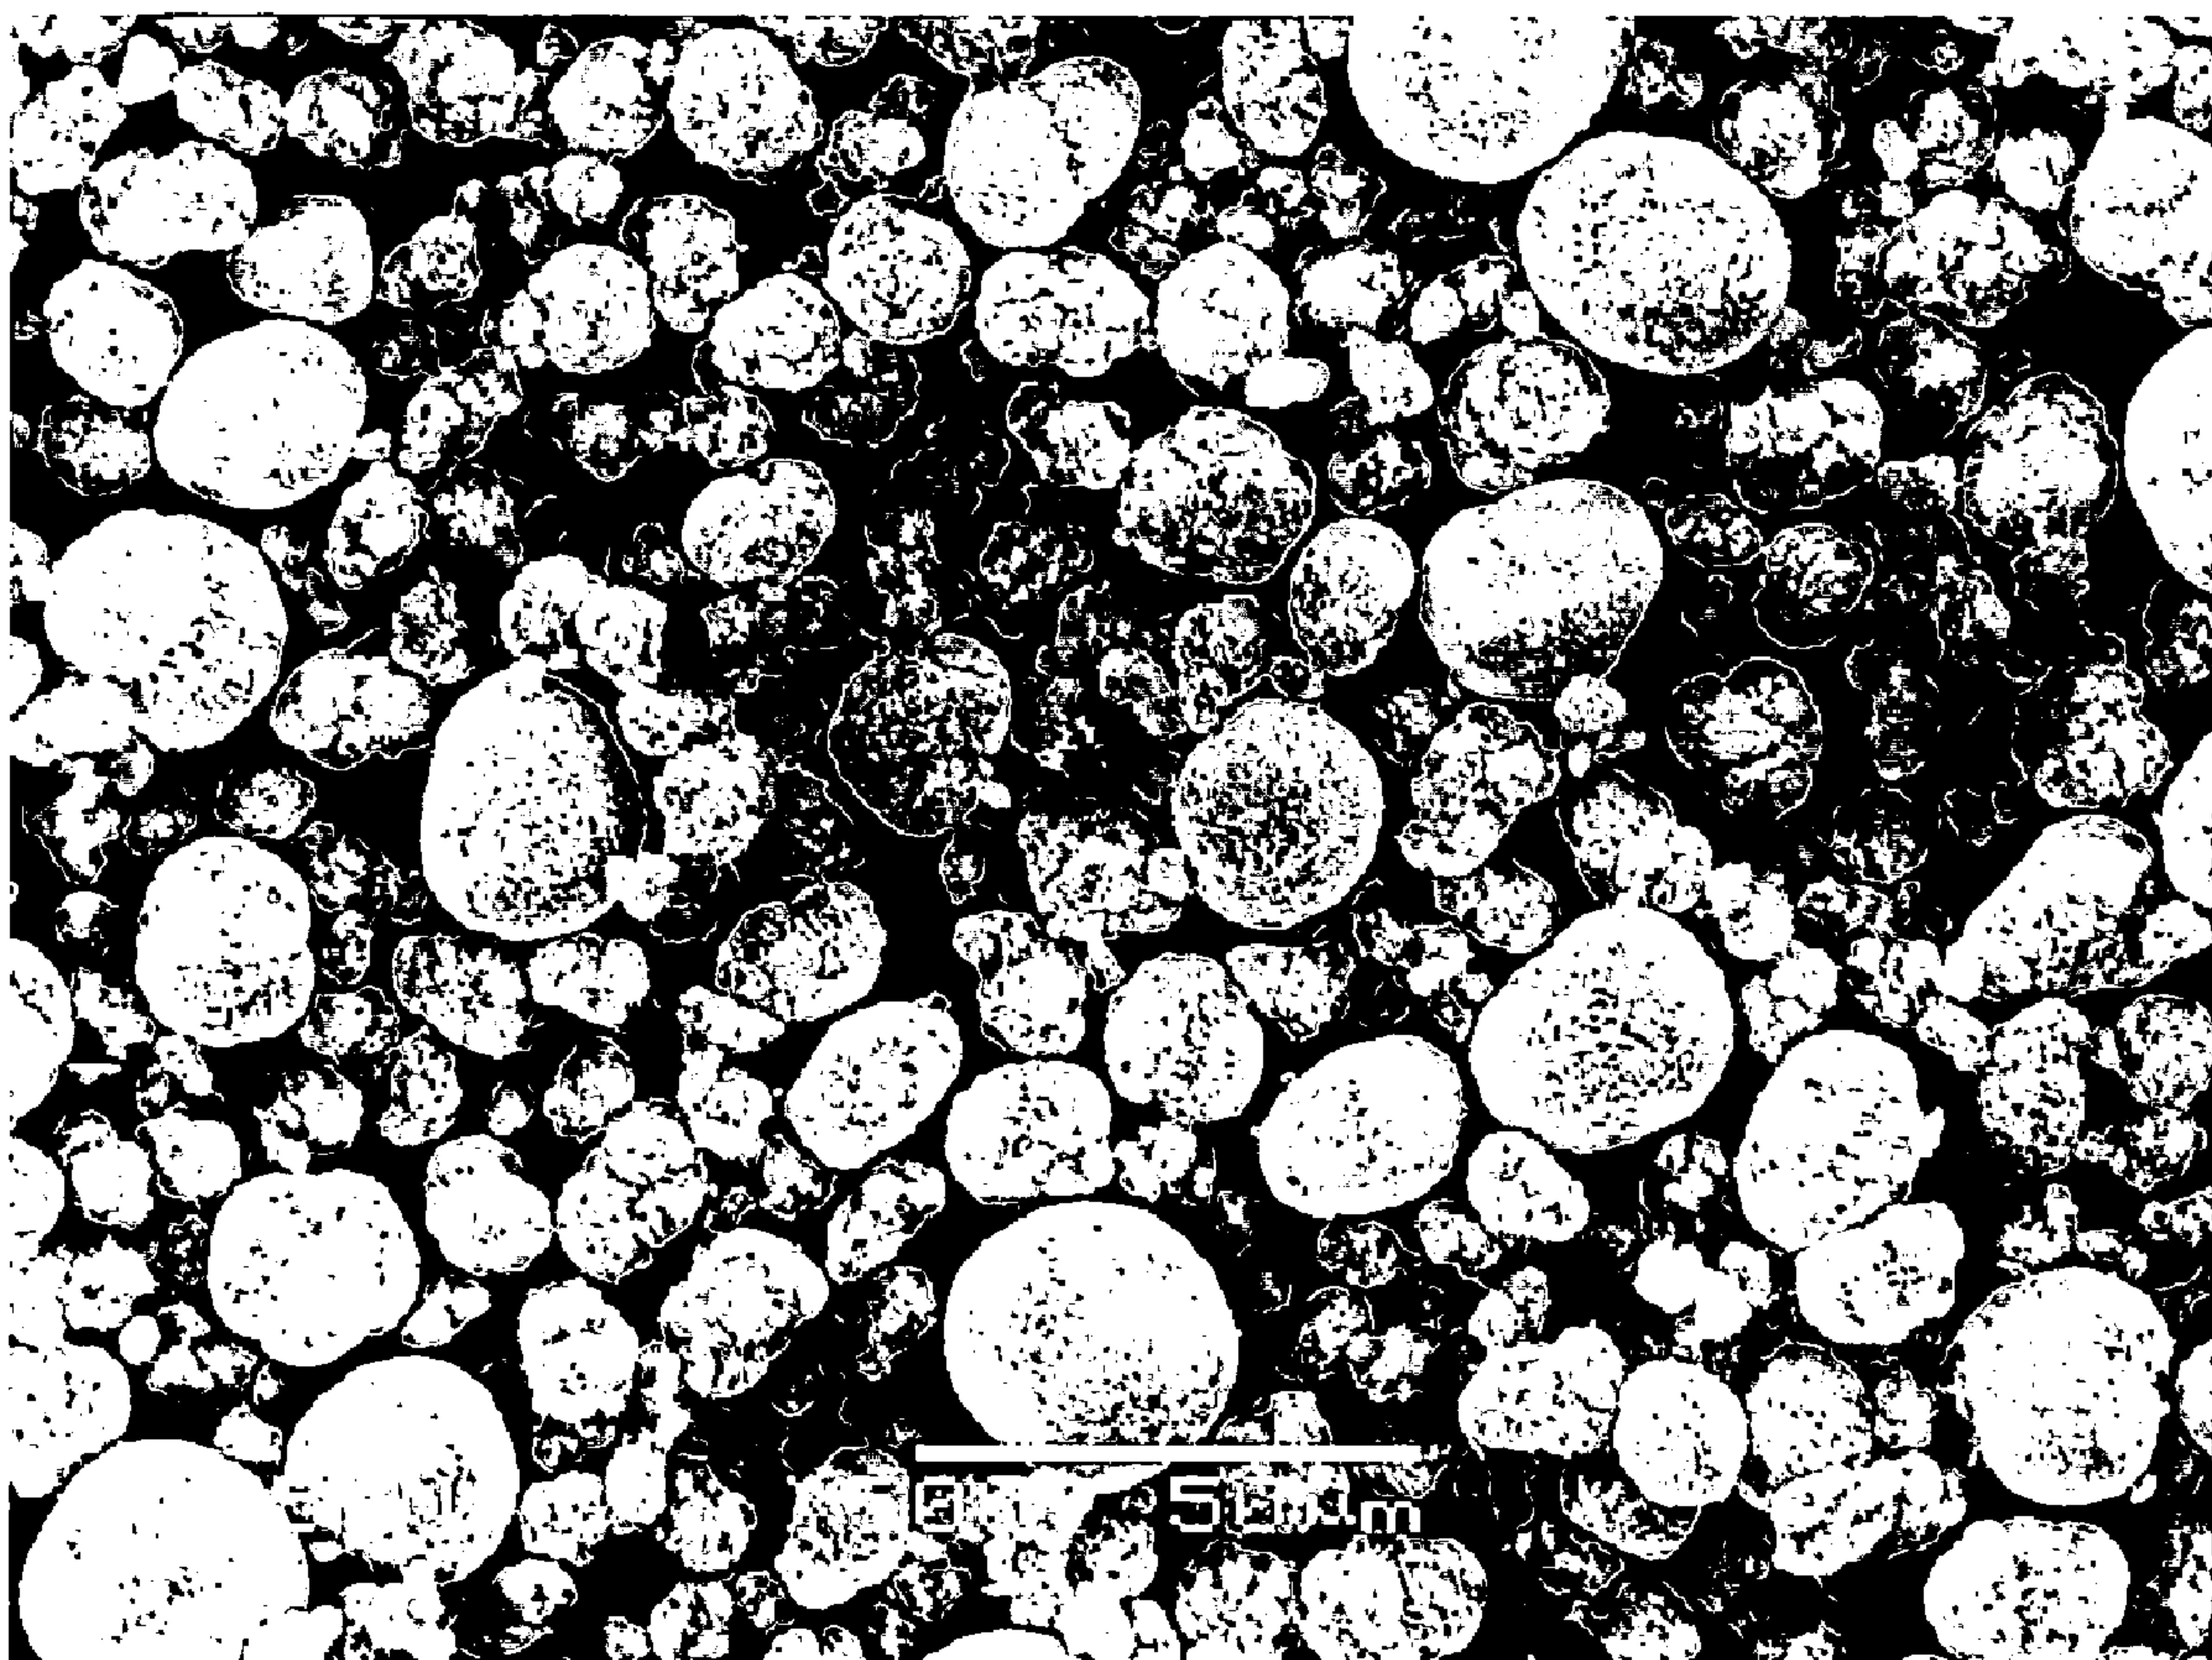

(57) Abrégé/Abstract:

The disclosure relates to positive electrode material used for Li-ion batteries, a precursor and process used for preparing such materials, and Li-ion battery using such material in its positive electrode. The disclosure describes a higher density LiCoO_2 positive

(57) Abrégé(suite)/Abstract(continued):

electrode material for lithium secondary batteries, with a specific surface area (BET) below 0.2 m²/g, and a volumetric median particle size (d50) of more than 15µm. This product has, improved specific capacity and rate-capability. Other embodiments of the disclosure are an aggregated Co (OH)₂, which is used as a precursor, the electrode mix and the battery manufactured using abovementioned LiCoO₂.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
8 January 2009 (08.01.2009)

PCT

(10) International Publication Number
WO 2009/003573 A1

(51) International Patent Classification:

C01G 51/00 (2006.01) **H01M 4/02** (2006.01)
H01M 4/52 (2006.01) **H01M 10/40** (2006.01)

(21) International Application Number:

PCT/EP2008/004629

(22) International Filing Date: 10 June 2008 (10.06.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

07012781.6	29 June 2007 (29.06.2007)	EP
60/929,614	5 July 2007 (05.07.2007)	US
07023548.6	5 December 2007 (05.12.2007)	EP

(71) Applicant (for all designated States except US): **UMI-CORE** [BE/BE]; Rue du Marais 31, B-1000 Brussels (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHEN, Zhaohui** [CN/CA]; 9606, 79 Street, Fort Saskatchewan, Alberta T8L 3J9 (CA). **ELLENWOOD, Robert** [CA/CA]; 419 2305 35A Avenue, Edmonton, Alberta T6T 1Z2 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments



WO 2009/003573 A1

(54) Title: HIGH DENSITY LITHIUM COBALT OXIDE FOR RECHARGEABLE BATTERIES

(57) Abstract: The disclosure relates to positive electrode material used for Li-ion batteries, a precursor and process used for preparing such materials, and Li-ion battery using such material in its positive electrode. The disclosure describes a higher density LiCoO₂ positive electrode material for lithium secondary batteries, with a specific surface area (BET) below 0.2 m²/g, and a volumetric median particle size (d50) of more than 15µm. This product has, improved specific capacity and rate-capability. Other embodiments of the disclosure are an aggregated Co (OH)₂, which is used as a precursor, the electrode mix and the battery manufactured using abovementioned LiCoO₂.

High density lithium cobalt oxide for rechargeable batteries

The invention relates to positive electrode material used for Li-ion batteries, a precursor and process used for preparing such materials, and Li-ion battery using such material in its positive 5 electrode.

Compared to Ni-Cd and Ni-MH rechargeable batteries, Li-ion batteries boast an enhanced energy density, mainly due to their higher 3.6 V working voltage. Since their commercialization in 1991 by SONY, Li-ion batteries have seen their volumetric energy density increase continuously. In 1995, the capacity of a typical 18650 cylindrical cell was about 1.3 Ah. In 2006, 10 the capacity of the same type of cell is about 2.6 Ah. Such a high energy density has enabled a wide range of applications. Li-ion batteries have become the dominant secondary battery for portable application, representing a market share of about 70% in 2006.

Such significant increase of energy density of Li-ion batteries has been initially realized by 15 optimizing cell design, accommodating more active electrode materials in a fixed volume cell. Later efforts concentrated on improving the energy density of the electrodes. Using a high density active electrode material is one way to achieve this goal. As LiCoO₂ still continues to be used as positive electrode material for the majority of commercial Li-ion batteries, a highly dense variety of this material is in demand.

The tap density of electrode materials is usually a good indicator of electrode density. However, 20 in some cases, a high tap density does not guarantee a high electrode density. For example, as demonstrated by Ying et al. (Journal of power Sources, 2004) or in CN1206758C, the tap density of a LiCoO₂ powder with large secondary spherical particle size, but small primary size, can be as high as 2.8 g/cm³. However, because of its small primary particle size, and possibly because of voids in the secondary particles, the obtained electrode density is not 25 correspondingly high. For this reason, density of electrode materials should preferably be measured under a pressure similar to the industrial conditions prevailing during actual electrode manufacture, instead of by tapping. In this invention, density therefore refers to press density, and not to tap density.

The theoretical density of LiCoO₂ is about 5.1 g/cm³. For actual LiCoO₂ powders, factors that 30 impact the density are a.o. the shape of particles, the size of primary particles and the particle size distribution. In today's industry, the medium primary particle size of LiCoO₂ used for different application is in the range of 1 to 20 µm. Generally, the larger the median primary particle size (d₅₀), the higher is the press density. In addition, as proposed in CN1848491A, electrode density can be increased further by mixing larger LiCoO₂ particles with 15 to 40 wt% 35 of finer particles.

Besides density reasons, a large median primary particle size is also desirable for safety purposes, especially for large cells such as the 18650 model cylindrical cells that are used in

laptop computer. During charge, lithium atoms in LiCoO_2 are partially removed. LiCoO_2 becomes $\text{Li}_{1-x}\text{CoO}_2$ with $x > 0$. At high temperatures caused by certain abuse condition, $\text{Li}_{1-x}\text{CoO}_2$ tends to decompose and then to release O_2 . The released O_2 easily reacts with organic solvent in the battery electrolyte, resulting in fire or explosion of the battery. Using LiCoO_2 with 5 a large median primary particle size and low specific surface area (BET) reduces these risks, as pointed out by Jiang J. et al. (Electrochimica Acta, 2004).

Therefore, for both safety and energy density reasons, LiCoO_2 with large median primary particle size, such as 15 μm or above, is preferred, in particular for large Li-ion cells. Materials with a large mass median primary particle size (d50) have also a relatively low BET. A d50 10 larger than 15 μm typically leads to a BET below 0.2 m^2/g .

In a usual manufacture process of LiCoO_2 , powderous Co_3O_4 and Li_2CO_3 are mixed and then fired at a temperature ranging from 800 °C to 1100 °C. The d50 of the Co_3O_4 needs to be relatively small, usually below 5 μm , to ensure a sufficient reactivity. The growth of the LiCoO_2 particles is controlled by the firing temperature and time, and by the amount of excess Li 15 (added as Li_2CO_3). To make LiCoO_2 with a d50 larger than 15 μm , at least 6 at.% of excess Li per Co atom is needed, as this excess favours crystal growth. However, part of the excess Li also enters the LiCoO_2 structure. Therefore, the final product will be Li over-stoichiometric. This is why all current LiCoO_2 material with large primary particle size (or a low BET, which is 20 equivalent) is significantly over-stoichiometric. Due to this excess Li in their structure, such materials have a lower capacity because some active Co^{3+} has been replaced by inactive Li^+ . In this respect, it should be noted that in this application, LiCoO_2 is used to designate a wide variety of lithium cobalt oxides having stoichiometries that may slightly deviate from the theoretical.

One example of this process can be found in EP 1 281 673 A1. Here a composition 25 $\text{Li Co}_{(1-x)} \text{Mg}_x \text{O}_2$ is disclosed, wherein x is 0.001 to 0.15, and having an average particle diameter of 1.0 to 20 μm and a BET of 0.1 to 1.6 m^2/g . However, the examples clearly show that the inventor did not succeed in manufacturing a lithium cobalt (magnesium) oxide powder having both of: a d50 of more than 15 μm , and a specific surface area (BET) of less than 0.2 m^2/g . The maximum d50 achieved in this document is 8.3 μm in a comparative example. 30 It is finally also desirable for electrode materials to provide good rate capability. Rate capability is defined as the ratio of specific discharge capacity at a higher discharge rate (typically 2 C), to the specific discharge capacity at a lower rate (typically 0.1 C). Unfortunately, current LiCoO_2 with large primary particle size shows relatively poor rate capability, as shown in JP3394364 and by Chen Yan-bin et al. (Guangdong Youse Jinshu Xuebao, 2005). Such poor 35 rate capability is considered to be related to the longer Li diffusion path for material with larger primary particle size when Li is removed or reinserted during charge or discharge.

In summary, LiCoO_2 with a large primary particle size is preferred for Li-ion battery for improved safety and energy density. However, current large particle size powders show sub-optimal capacity and rate capability because of the significant Li-excess in their structure.

A first principal objective of this invention is therefore to provide a relatively coarse-grained

5 electrochemically active LiCoO_2 powder, without significant Li-excess.

The first active product embodiment of the invention concerns a lithium cobalt oxide powder for use as an active positive electrode material in lithium-ion batteries, having a d_{50} of more than 15 μm , a BET of less than 0.2 m^2/g , and a Li to Co atomic ratio between 0.980 and 1.010, preferably of less than 1.000, more preferably of less than 0.999. The mentioned particle size 10 is evidently a primary particle size, and the particles are neither agglomerated or coagulated, nor aggregated.

This Li to Co ratio range is chosen so that such composition gives a discharge capacity of more than 144 mAh/g at 2C, and rate capability (Q2C/Q0.1C) of more than 91%. For product with an Li to Co ratio lower than 0.980, electrochemically inactive and thus undesired Co_3O_4

15 has been identified with X-ray diffraction.

It should be mentioned that in US 2002/119371 A1 an electrochemically active material is used, having the formula of a ternary ($\text{Li--Me}_1\text{-O}$) or quaternary ($\text{Li--Me}_1\text{-Me}_2\text{-O}$) lithium transition metal oxides, wherein Me_1 and Me_2 are selected from the group consisting of Ti, V, Cr, Fe, Mn, Ni, Co. It can further comprise up to about 15 atom percent of Mg, Al, N or F to stabilize 20 the structure, and have a BET of 0.1 - 2 m^2/g and a particle size of from about 1 to about 50 μm . However, the ratio Li/Co is said to be in the wide range of 0.98 to about 1.05, without giving a more specific example.

Also, in EP 1 052 716 A2 a Li-transition metal composite oxide $\text{Li}_A \text{M}_{(1-x)} \text{Me}_x \text{O}_2$ is disclosed, with M being Co, Ni, Mn, V, Ge and the like, and preferably LiCoO_2 , where A is 0.05-1.5,

25 preferably 0.1-1.1, and x can be zero. This composite oxide preferably has an average particle size of 10 - 25 μm , and also preferably has a BET of 0.1 - 0.3 m^2/g . In the examples (Table 1) however, the combination of average particle size above 15 μm and BET under 0.2 m^2/g is not disclosed together with a Li/Co atomic ratio between 0.980 and 1.010.

30 The second active product embodiment of the invention concerns a lithium cobalt oxide powder for use as an active positive electrode material in lithium-ion batteries, having a d_{50} of more than 15 μm , a BET of less than 0.2 m^2/g , and with an OH^- content between 0.010 and 0.015 wt% more preferably between 0.0125 and 0.015.

This OH^- range was found to correspond to the nearly stoichiometric products delivering the

35 optimal electrochemical performances. By OH^- content is meant the OH^- as determined by acid-base titration of an aqueous dispersion of the lithium cobalt oxide powder. Titration is

performed using a 0.1 M HCl solution. As some carbonates could be present, the relevant amount of acid is calculated as the amount of acid to reach pH 7, minus the amount of acid to reach pH 4 from pH 7.

It should be mentioned here that in US 2006/263690 A1 a positive electrode material

5 $\text{Li}_p \text{Co}_x \text{M}_y \text{O}_z \text{F}_a$ is claimed, where $0.9 \leq p \leq 1.1$, y and a may be zero (and $x=1$), $1.9 \leq z \leq 2.1$. D50 is from 5 to 15 μm (although also up to 20 μm is mentioned singularly), and BET from 0.3 to 0.7 m^2/g . This lithium composite oxide has a remaining alkali amount of at most 0.02, and preferably at most 0.01 wt%. All of the examples show a combination of a BET value over 0.2 m^2/g , and a D50 under 15 μm .

10 In WO99/49528 (equivalent to EP 1 069 633 A1) on the other hand, a LiCoO_2 is disclosed which comprises a mixture of primary particles of small crystals having a Feret's diameter in a projection drawing by SEM observation in a range from 0.4 to 10 μm and an average diameter of 5 μm or less, and secondary particles formed by 'gathering' of the primary particles and having a diameter of 4 to 30 μm , wherein the mole ratio of Co to Li is 0.97 to 1.03, and at least

15 a part of small crystals constituting the secondary particles are joined by the junction through sintering, and the secondary particles are in the shape of a circle or an ellipse. This material is preferably obtained by mixing a lithium salt and a cobalt source where cobalt oxyhydroxide (CoOOH) is used as a raw material and comprises secondary particles falling in the range of 4 to 30 μm and formed by gathering of a number of primary particles of 0.2 to 0.8 μm and

20 subsequently, by carrying out a heat treating on this mixture.

The characteristics of both the first and second embodiments of the invention mentioned before can advantageously be combined.

25 The above mentioned dependency of capacity and rate capability on the Li to Co ratio is also applicable to doped products, in particular for Mg-doped LiCoO_2 . A third active product embodiment is therefore a lithium cobalt oxide powder for use as an active positive electrode material in lithium-ion batteries according to embodiments 1 and 2, further comprising Mg as doping elements with a Mg to Co atomic ratio between 0.001 to 0.05. However, in this case, it is the atomic ratio of Li to the sum of Co and Mg (instead of to Co alone) that should be

30 between 0.980 and 1.010, and be preferably less than 1.000, and more preferably less than 0.999.

35 As described above, mixing relatively coarse lithium cobalt oxide powder with finer powder can further increase the electrode density. Therefore, the fourth active product embodiment of this invention is defined a powder mixture for use as an active positive electrode material in lithium-ion batteries, comprising at least 50% by weight of a first powder according to any one of embodiments one to three, and comprising a second powdered active component consisting of lithium transition-metal oxide. The said second powder should preferably be finer than said first

powder, and, in particular result in a powder mixture showing a bimodal particle size distribution.

Such a bimodal powder mixture should preferably comprise an electrochemically active second powder, consisting of lithium cobalt oxide, the mixture having a BET of less than 0.5 5 m^2/g .

A second principal objective of this invention is to provide an economical precursor that can be used to manufacture the invented products effectively and economically.

Usually, LiCoO_2 is made by solid state reaction of Co_3O_4 as a Co source with Li_2CO_3 as a Li source.

10 As explained above, the customary use of Co_3O_4 as a precursor for LiCoO_2 has been found to imply the addition of excess Li when large particle sizes are sought, this excess resulting in undesired side effects, such as reduced capacity and rate capability. Moreover, and from the point of view of process robustness, it appears that the mass median primary particle size (d50) of the LiCoO_2 product is very sensitive to variations of the firing temperature and of the

15 Li-excess. Indeed, a 10 °C variation in firing temperature causes a d50 change of 2 to 3 μm , and a 1% variation in Li causes a d50 change of 2 to 4 μm . Therefore, using Co_3O_4 , a very strict control of the Li to Co blending ratio and of the firing temperature is required in order to obtain a consistent result. Such a control is difficult to ensure, in particular when production is envisaged at an industrial scale.

20 This problem does not occur when using a specially prepared aggregated $\text{Co}(\text{OH})_2$ as a precursor. Moreover, Co_3O_4 is relatively expensive compared to other alternatives such as $\text{Co}(\text{OH})_2$. To reduce costs, $\text{Co}(\text{OH})_2$ has therefore already been proposed to replace Co_3O_4 as a cheaper Co source, as for example in JP2002321921. However, two firing steps are needed according to the described process. Due to the high costs of such a double firing process, the 25 total savings remain limited.

According to the inventors' results, the shape of the aggregated $\text{Co}(\text{OH})_2$ precursor particles can be preserved after firing with a Li precursor. The secondary particle size of the end product is only slightly smaller than that of aggregated $\text{Co}(\text{OH})_2$ precursor. The primary particle size of LiCoO_2 still depends on the firing conditions, such as Li to Co ratio, firing temperature 30 and firing time.

With the invented aggregated precursor, using a suitable blending ratio of Li to Co, and a single firing step, the primary particles in the end product grow larger, while there is little change in secondary particle size. Under certain conditions, such as with a blending ratio of Li to Co between 1.04 and 1.06, and a firing temperature in the range of 960 to 1020 °C, the 35 primary particles forming the secondary structure can indeed grow together. In this way, and by using aggregated $\text{Co}(\text{OH})_2$, the products mentioned in the aforementioned embodiments can be prepared cost effectively.

A precursor product according to this invention is thus defined as either one or more of an non-sintered agglomerated powderous cobalt oxide, hydroxide and oxy-hydroxide, having a secondary particle size with a d_{50} of more than 15 μm . Preferably the primary particles have a primary particle size with a d_{50} of less than 5 μm . The secondary particles preferably have a

5 spherical shape. The cobalt oxide can either be Co_3O_4 , Co_2O_3 , or a partially oxidized and dried $\text{Co}(\text{OH})_2$. It is important that the secondary particles of the precursor do not contain any sintered primary particles, since the desired result can only be obtained using a single firing step.

10 A third principal objective of this invention concerns a process for manufacturing the invented active products, starting from the invented precursor products.

To this end, a process is defined whereby the Co precursor is mixed with Li source, according to a Li to Co ratio in the range between 1.04 and 1.06, and firing the mixture with a single firing at temperature between 960 °C and 1020 °C. This single-firing process comprises the steps of:

15 - providing for a precursor compound as described above,

- mixing said precursor compound with a Li source according to a Li to Co ratio R between 1.04 and 1.06, and

- firing said mixture with a single firing at a temperature T between 960 °C and 1020 °C, whereby the quotient Q of the firing temperature T and the Li to Co ratio R corresponds to

20 $920 \leq Q \leq 965$. When $1.04 \leq R \leq 1.05$, then preferably $920 \leq Q \leq 960$, and more preferably $925 \leq Q \leq 945$. When $1.05 < R \leq 1.06$, then preferably $925 \leq Q \leq 965$, and more preferably $945 \leq Q \leq 960$.

25 Another objective of the invention is to provide Li-ion batteries with increased energy density and rate capability. With the product mentioned in the first embodiment, the capacity and rate capability of a cell with certain volume can be increased. Therefore the energy density and rate capability can be improved.

Finally, this invention also concerns Li-ion batteries that use the product mentioned in the abovementioned active product embodiments, as positive electrode materials.

30

The following figures illustrate the invention.

Figure 1: Discharge capacity and rate capability vs. the Li to Co ratio for LiCoO_2 with a BET of 0.15 to 0.18 m^2/g and a d_{50} of 15.7 to 18.2 μm .

Figure 2: Discharge capacity and rate capability vs. OH⁻ content for LiCoO₂ with a BET of 0.15 to 0.18 m²/g and a d50 of 15.7 to 18.2 µm.

Figure 3: XRD diffraction pattern of Example 1 (a) and Comparative Example 2 (b).

Figure 4: SEM image of the aggregated precursor used in Examples 1, 2, and 3.

5 Figure 5: SEM image of final product according to Example 1.

Figure 6: SEM image of final product according to Comparative Example 3.

Products with similar medium particle size (in the range of 15.7 µm to 18.2 µm) and similar BET (in the range of 0.15 m²/g to 0.18 m²/g) but with various Li to Co ratios (in the range of 0.95 to 10 1.02) were prepared. Particle size and specific surface area of all products studied were kept nearly constant. The Li diffusion path lengths for the different products are therefore comparable. The variation in discharge capacity (Q) at low rate (0.1 C) and at high rate (2 C) amongst the products therefore can be attributed to variation of the Li to Co ratio. According to 15 electrochemical results, as shown in Figure 1, products with a Li to Co ratio in the range of 0.980 to 1.010 offer optimal characteristics: a high capacity with only a limited decrease at high rate, corresponding to a rate capability (ratio of Q@0.1 C to Q@2 C) of more than 91%. With lower Li to Co ratios, products have less capacity, probably due to the appearance of inactive 15 Co₃O₄ impurities. For example, a significant X-ray diffraction peak of Co₃O₄ was found in the diffraction pattern of a product with a ratio of 0.970. On the other hand, products with too high 20 Li to Co ratios lose some of their charge-discharge capacity, probably because of the substitution of active Co³⁺ by inactive Li⁺.

Figure 2 shows a similar correlation as a function of the OH⁻ content for the same samples used in Figure 1. The optimal OH⁻ range is 0.010 to 0.015 wt%. As OH⁻ content increases, the rate capability initially increases. However, as it increases beyond 0.015 wt%, the rate 25 capability sharply degrades.

Examples

The present invention is described in more detail by examples and comparative examples below. However, the examples are only illustrative, and, therefore, not intended to limit the scope of the present invention.

30 To prepare Co(OH)₂ or Mg-doped Co(OH)₂, a suitable Co²⁺ salt, preferably CoSO₄•6H₂O, is dissolved in water. The so obtained solution typically contains about 55 g/L of Co. Co(OH)₂ is then precipitated by adding an aqueous base, preferably a solution of 25% NaOH, and a 260 g/L NH₃ to the Co solution into a stirred and heated, preferably to 62 °C, overflow reactor tank. The reactor tank is typically filled with a seed slurry of Co(OH)₂ containing NaOH, Na₂SO₄, 35 ammonia, and water. As the reaction proceeds, the resulting overflow slurry is collected, and a pink solid is separated from the supernatant by filtration. After washing with water, the solid is

dried in a convection oven to a constant mass. The resulting powder is a highly pure, spheroidal, flowable, oxidation resistant Co(OH)_2 that is easily screened and processed.

Mg-doped Co(OH)_2 is produced under similar conditions as the above pure Co(OH)_2 . The only difference is that instead of using a feed solution of pure CoSO_4 , the feed solution is

5 supplemented with a suitable Mg^{2+} salt, preferably MgSO_4 .

During the precipitation reaction, pH (temperature uncompensated) is maintained between 10.4 and 11.3, preferably between 10.8 and 11.0. In general, a higher pH will result in the precipitation of smaller secondary particles, while a lower pH will result in the precipitation of larger secondary particles. The resulting spherical Co(OH)_2 has d_{50} particle size volume

10 distribution values between 5 and 50 μm and spans (defined as $(d_{90} - d_{10}) / d_{50}$) ranging from 0.5 to 2.0. More precisely, the steady state production of Co(OH)_2 will result in D_{50} particle sizes ranging from 14 to 21 μm with spans ranging from 0.9 to 1.2. Alternatively, a less spherical agglomerated Co(OH)_2 material can be produced by increasing the pH. This material retains water more easily and has steady state d_{50} particle sizes ranging from 4-14 μm with

15 spans typically greater than 1.0.

Particle size distribution of LiCoO_2 is measured using a Malvern MastersizerTM 2000. The median volumetric particle size is assumed to be equivalent to the median mass particle size represented by d_{50} . The specific surface area of LiCoO_2 is measured with the Brunauer-

Emmett-Teller (BET) method using a Micromeritics TristarTM. To measure the press density of

20 LiCoO_2 , a mixture is made with 95 wt% active material, 2.5 wt% carbon black, and 2.5 wt% polyvinylidene fluoride (PVDF) in N-methylpyrrolidone (NMP). After drying, 1.2 g powder is put in a SPEXTM 3613 13 mm die set and pressed under 3.7 metric ton per cm^2 . Press density is calculated by dividing the mass by the volume of the pressed pellet. The OH^- content of fired LiCoO_2 is measured by pH titration in water with a 0.1 M HCl solution.

25 Electrochemical performance is tested in coin type cells, with a Li foil as counter electrode in a lithium tetrafluoroborate (LiBF_4) type electrolyte at 24 °C. Cells are charged to 4.3 V and discharged to 3.0 V. A specific capacity of 160 mAh/g is assumed for the determination of the discharge rates. For example, for discharge at 2 C, a specific current of 320 mA/g is used.

Example 1

30 A mixture is made with aggregated Co(OH)_2 with a d_{50} of 19.3 μm and Li_2CO_3 with a Li to Co (atomic) blending ratio of 1.05. The mixed powder is fired in air at 980 °C for 12 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

Example 2

Same as example 1, except that the firing temperature is 970 °C.

Example 3

A mixture is made with aggregated Co(OH)_2 with a d_{50} of 19.3 μm and Li_2CO_3 with a Li to Co blending ratio of 1.04. The mixed powder is fired in air at 990 $^{\circ}\text{C}$ for 10 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

5 Example 4

A mixture is made with aggregated $(\text{Co}_{0.99}\text{Mg}_{0.01})(\text{OH})_2$ with a d_{50} of 18.7 μm , which is dried at 175 $^{\circ}\text{C}$ for 5 hours, and Li_2CO_3 with a Li to $(\text{Co}_{0.99}\text{Mg}_{0.01})$ blending ratio of 1.05. The mixed powder is fired in air at 980 $^{\circ}\text{C}$ for 12 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

10 Example 5

Product from Example 3 is mixed with commercially available Cellcore[®] D5 (Umicore, Belgium) in a 80 to 20 weight ratio. Cellcore[®] D5 has a d_{50} of 6.5 μm , which is smaller than the product from Example 3 (17.4 μm). The press density of the mixed powder is 3.83 g/cm^3 , which is higher than that of Example 3 (3.79 g/cm^3).

15

Comparative Example 1

A mixture is made with Co_3O_4 with a d_{50} of 3 μm and Li_2CO_3 with a Li to Co blending ratio of 1.065. The mixed powder is fired in air at 960 $^{\circ}\text{C}$ for 12 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

20 Comparative example 2

A mixture is made with aggregated Co(OH)_2 with a d_{50} of 19.3 μm and Li_2CO_3 with a Li to Co blending ratio of 1.035. The mixed powder is fired in air at 1020 $^{\circ}\text{C}$ for 10 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

Comparative Example 3

25 A mixture is made with aggregated Co(OH)_2 with a d_{50} of 19.3 μm and Li_2CO_3 with a Li to Co blending ratio of only 1.005. The mixed powder is fired in air at 920 $^{\circ}\text{C}$ for 12 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

Comparative Example 4

30 A mixture is made with aggregated Co(OH)_2 with a d_{50} of only 9 μm and Li_2CO_3 with a Li to Co blending ratio of 1.06. The mixed powder is fired in air at 960 $^{\circ}\text{C}$ for 12 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

Comparative Example 5

35 A mixture is made with Mg-doped Co_3O_4 (Co to Mg ratio of 99:1) with a d_{50} of 3 μm and Li_2CO_3 with a Li to Co blending ratio of 1.057. The mixed powder was fired in air at 960 $^{\circ}\text{C}$ for 15 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

Comparative Example 6

A mixture is made with aggregated Co(OH)_2 with a d_{50} of 19.3 μm and Li_2CO_3 with a Li to Co blending ratio of 1.06. The mixed powder is fired in air at 960 $^{\circ}\text{C}$ for 12 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

5 Comparative Example 7

A mixture is made with aggregated Co(OH)_2 with a d_{50} of 19.1 μm and Li_2CO_3 with a Li to Co blending ratio of 1.07. The mixed powder is fired in air at 950 $^{\circ}\text{C}$ for 10 hours. After cooling, the obtained material is milled and screened with a 270 mesh screen.

10 Physical properties and selected electrochemical results for examples and comparative examples are listed in Table 1. Even though different Li to Co ratios and temperatures are used for the Examples 1 to 3, the d_{50} of the particles are about the same, in the range of 17.0 to 17.4 μm . This large particle size is reflected by the low BET, which is 0.17 m^2/g or below. With such a large particle size, all three examples give high press density, around 3.77 g/cm^3 .

15 Regarding chemical composition, they have a Li to Co ratio of almost one. Their OH^- contents are in the range of 0.012 to 0.014 wt%. They have excellent discharge capacity at 2 C rate, as well as excellent rate capability.

In Comparative Example 1, Co_3O_4 is used as a precursor. The obtained LiCoO_2 has a smaller d_{50} than in Example 2, where Co(OH)_2 was used, even though a higher Li to Co ratio was chosen in the blend. This results in a high Li-excess in the final product. This excess penalizes the rate capability, which is poor compared to Example 2, even though the particle size is slightly smaller. Probably due to its wider particle size distribution, the product has a slightly higher press density.

20 The powder according to Comparative Example 2 is made at a relatively high temperature, but at a low blending ratio. The obtained powder therefore has a significant Li deficit. Its OH^- content is only 0.008 wt%. In this case, there is Co_3O_4 present as an impurity in the product. This is clearly shown in Figure 3, where the product according to Example 1 is shown for reference.

25 The powder of Comparative Example 3 is prepared starting from the same Co(OH)_2 precursor as in Examples 1 to 3, but with a lower Li to Co ratio and a lower firing temperature. The product still has d_{50} of 17 μm , which is just slightly smaller than the 19.3 of the Co(OH)_2 . However, this product has a low press density of only 3.52 g/cm^3 , because of its small primary particles and ensuing high BET of 0.45 m^2/g . This example demonstrates that a large primary particle size is needed to obtain a high density LiCoO_2 .

30 35 The powder of Comparative Example 4 is prepared starting from Co(OH)_2 precursor with badly formed secondary particles. Even it is blended and fired in the same conditions as Example 2, it has a d_{50} of only 9.8 μm and a low press density of 3.63 g/cm^3 . To make high density

material with such a precursor having a small secondary particle size, a high Li to Co blending ratio is needed. This is not recommended because the so obtained LiCoO_2 will end up with a too high Li excess. Therefore, to make LiCoO_2 with a large primary particle size, Co(OH)_2 with large secondary particle size is needed.

5 **Table 1**

	Precursor		Blend		Product						
	Type	d50 (μm)	Li to Co (at./at.)	Firing ($^{\circ}\text{C}$)	Li to Co (at./at.)	OH^- (wt%)	d50 (μm)	BET (m^2/g)	Density (g/cm^3)	Q2C (mAh/g)	Rate (%)
Ex. 1	Co(OH)_2	19.3	1.05	980	0.998	0.013	17.4	0.15	3.76	147.4	91.8
Ex. 2	Co(OH)_2	19.3	1.05	970	0.999	0.014	17.0	0.17	3.75	147.8	92.2
Ex. 3	Co(OH)_2	19.3	1.04	990	0.984	0.012	17.4	0.14	3.79	146.2	91.2
Comp Ex. 1	Co_3O_4	3	1.065	960	1.016	0.018	13.9	0.19	3.79	141.0	88.9
Comp Ex. 2	Co(OH)_2	19.3	1.035	1020	0.963	0.008	17.8	0.16	3.76	141.7	89.9
Comp Ex. 3	Co(OH)_2	19.3	1.005	920			17	0.45	3.52		
Comp Ex. 4	Co(OH)_2	9	1.06	960			9.8		3.63		
Comp Ex. 6	Co(OH)_2	19.3	1.06	960	1.019	0.021	18.2	0.16	3.78	142.8	89.9
Comp Ex. 7	Co(OH)_2	19.1	1.07	950	1.025	0.041	23.2	0.13	3.78	140.6	89.2

Table 2 lists results related to Mg-doped products. The product according to Example 4 has about the same density as the product according to Comparative Example 5. With a Li to Co-plus-Mg ratio close to 1.0, Example 4 boasts a higher capacity and a better rate capability than

10 Comparative Example 5.

Table 2

	Precursor		Blend		Product						
	Type	d50 (μm)	Li to Co (at./at.)	Firing ($^{\circ}\text{C}$)	Li to (Co+Mg) (at./at.)	d50 (μm)	BET (m^2/g)	Density (g/cm^3)	Q2C (mAh/g)	Rate (%)	
Ex. 4	Co(OH)_2 Co/Mg=99	18.7	1.05	980	0.996	20.1	0.18	3.79	137.2	87.5	
Comp Ex. 5	Co_3O_4 Co/Mg=99	3	1.057	980	1.017	17.3	0.16	3.78	134.8	86.8	

Example 5 is the result of mixing powder from Example 4 with 20% of LiCoO₂ with a smaller d₅₀. Press density increases from 3.79 g/cm³ to 3.83 g/cm³.

5 In Table 3 the process characteristics are investigated. In fact, to obtain the stoichiometric high density LiCoO₂ according to the invention, the correct combination of blending ratio R (= Li/Co) and firing temperature T should be respected, as listed in the following table.

Table 3: R vs T diagram

T \ R	1.04	1.045	1.05	1.055	1.06
960	✓		Over	Over	Over
970	✓	✓	✓	Over	Over
980	✓	✓	✓	✓	Over
990	✓	✓	✓	✓	✓
1000	Under	✓	✓	✓	✓
1010	Under	Under		✓	✓
1020	Under	Under	Under		✓

10 In the table, "Over" means that an excess of Li is used for a firing temperature that is too low. On the contrary, "Under" stands for firing at a temperature which is too high for the given Li/Co ratio. For "✓" the correct conditions are used.

CLAIMS:

1. A lithium cobalt oxide powder for use as an active positive electrode material in a lithium-ion battery, wherein said powder has: a) a d₅₀ of more than 15 µm, b) a specific surface area (BET) of less than 0.2 m²/g, and c) a Li to Co atomic ratio which is greater than 0.980 : 1.000 and less than 1.000 : 1.000.
2. The lithium cobalt oxide powder of claim 1, wherein the Li to Co atomic ratio is greater than 0.980 : 1.000 and less than 0.999 : 1.000.
3. The lithium cobalt oxide powder according to claim 1 or 2, wherein the powder has an OH⁻ content between 0.010 and 0.015 wt%.
4. The lithium cobalt oxide powder of claim 3 wherein the OH⁻ content is between 0.0125 and 0.015 wt%.
5. The lithium cobalt oxide powder according to any one of claims 1-4, further comprising Mg as a doping element wherein the atomic ratio of the Mg to the Co is between 0.001 : 1.000 and 0.050 : 1.000, and the atomic ratio of the Li to the sum of the Co and the Mg is greater than 0.980 : 1.000 and less than 1.000 : 1.000.
6. A powder mixture for use as an active positive electrode material in a lithium-ion battery, comprising at least 50% by weight of a first powder according to any one of claims 1 to 5, and a second powdered active component consisting of a lithium transition-metal oxide.
7. The powder mixture according to claim 6, wherein the median particle size of the second powdered active component is smaller than the median particle size of the first powder, and whereby the particle size distribution of the powder mixture is multimodal.
8. The powder mixture according to claim 7, wherein the second powdered active component consists of lithium cobalt oxide, and wherein the mixture has a BET of less than 0.5 m²/g.

9. A precursor compound for use in the preparation of the powder according to any one of claims 1 to 5, which comprises primary particles and secondary agglomerated particles of one or more compounds selected from the group consisting of a powdered non-sintered agglomerated cobalt oxide, a powdered non-sintered agglomerated cobalt hydroxide, and a powdered non-sintered agglomerated cobalt oxy-hydroxide, wherein said secondary agglomerated particles have a size with a d50 of more than $15 \mu\text{m}$.
10. The precursor compound according to claim 9, wherein the secondary agglomerated particles are essentially spherical.
11. An electrode mix comprising a powder according to any one of claims 1 to 8 as an active material.
12. A lithium-ion battery comprising an electrode mix according to claim 11.
13. A single firing process for manufacturing the lithium cobalt oxide powder of any one of claims 1 to 5, comprising the steps of:
 - providing the precursor compound according to claim 9 or 10,
 - mixing the precursor compound with a Li source to provide a Li to Co ratio R between 1.04 : 1.00 and 1.06 : 1.00, and
 - firing said mixture with a single firing at a temperature T between 960°C and 1020°C, wherein the quotient Q of the firing temperature T and the Li to Co ratio R corresponds to $920 \leq Q \leq 965$.
14. The single firing process according to claim 13, wherein $1.04 \leq R \leq 1.05$ and $920 \leq Q \leq 960$.
15. The single firing process of claim 14 wherein $925 \leq Q \leq 945$.
16. The single firing process according to claim 13, wherein $1.05 \leq R \leq 1.06$ and $925 \leq Q \leq 965$.
17. The single firing process of claim 16, wherein $945 \leq Q \leq 960$.

1/3


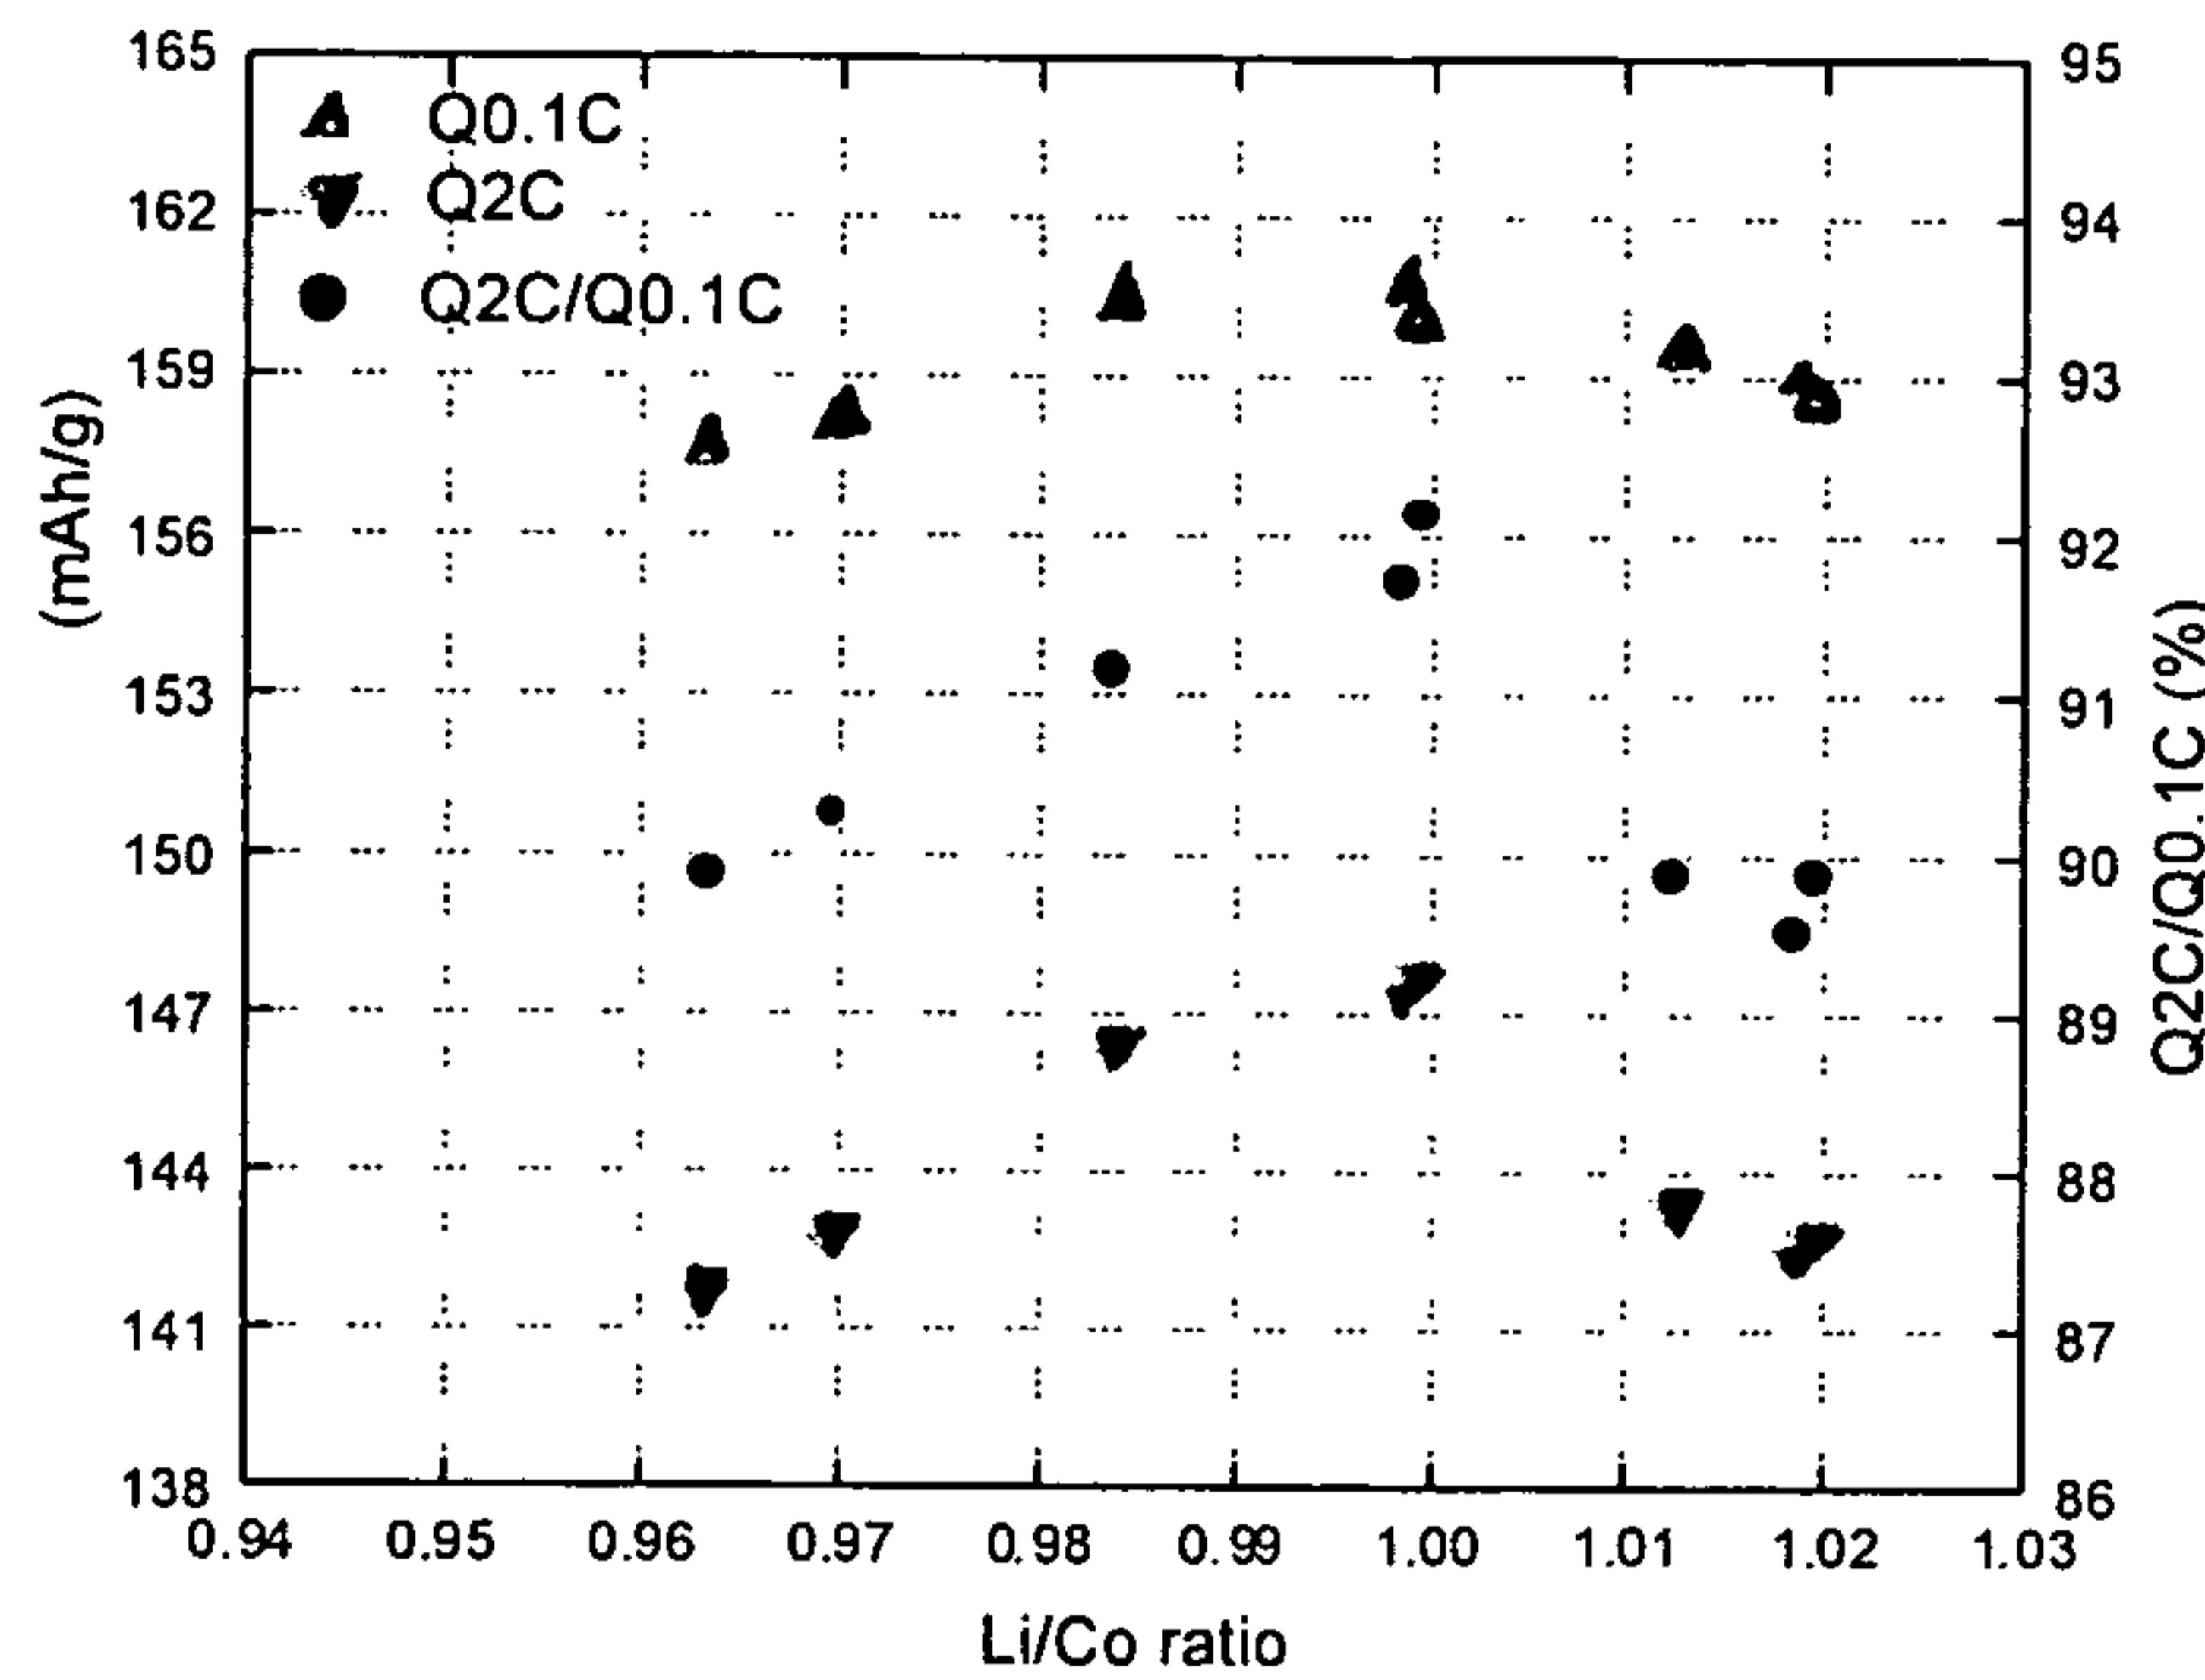


Figure 1

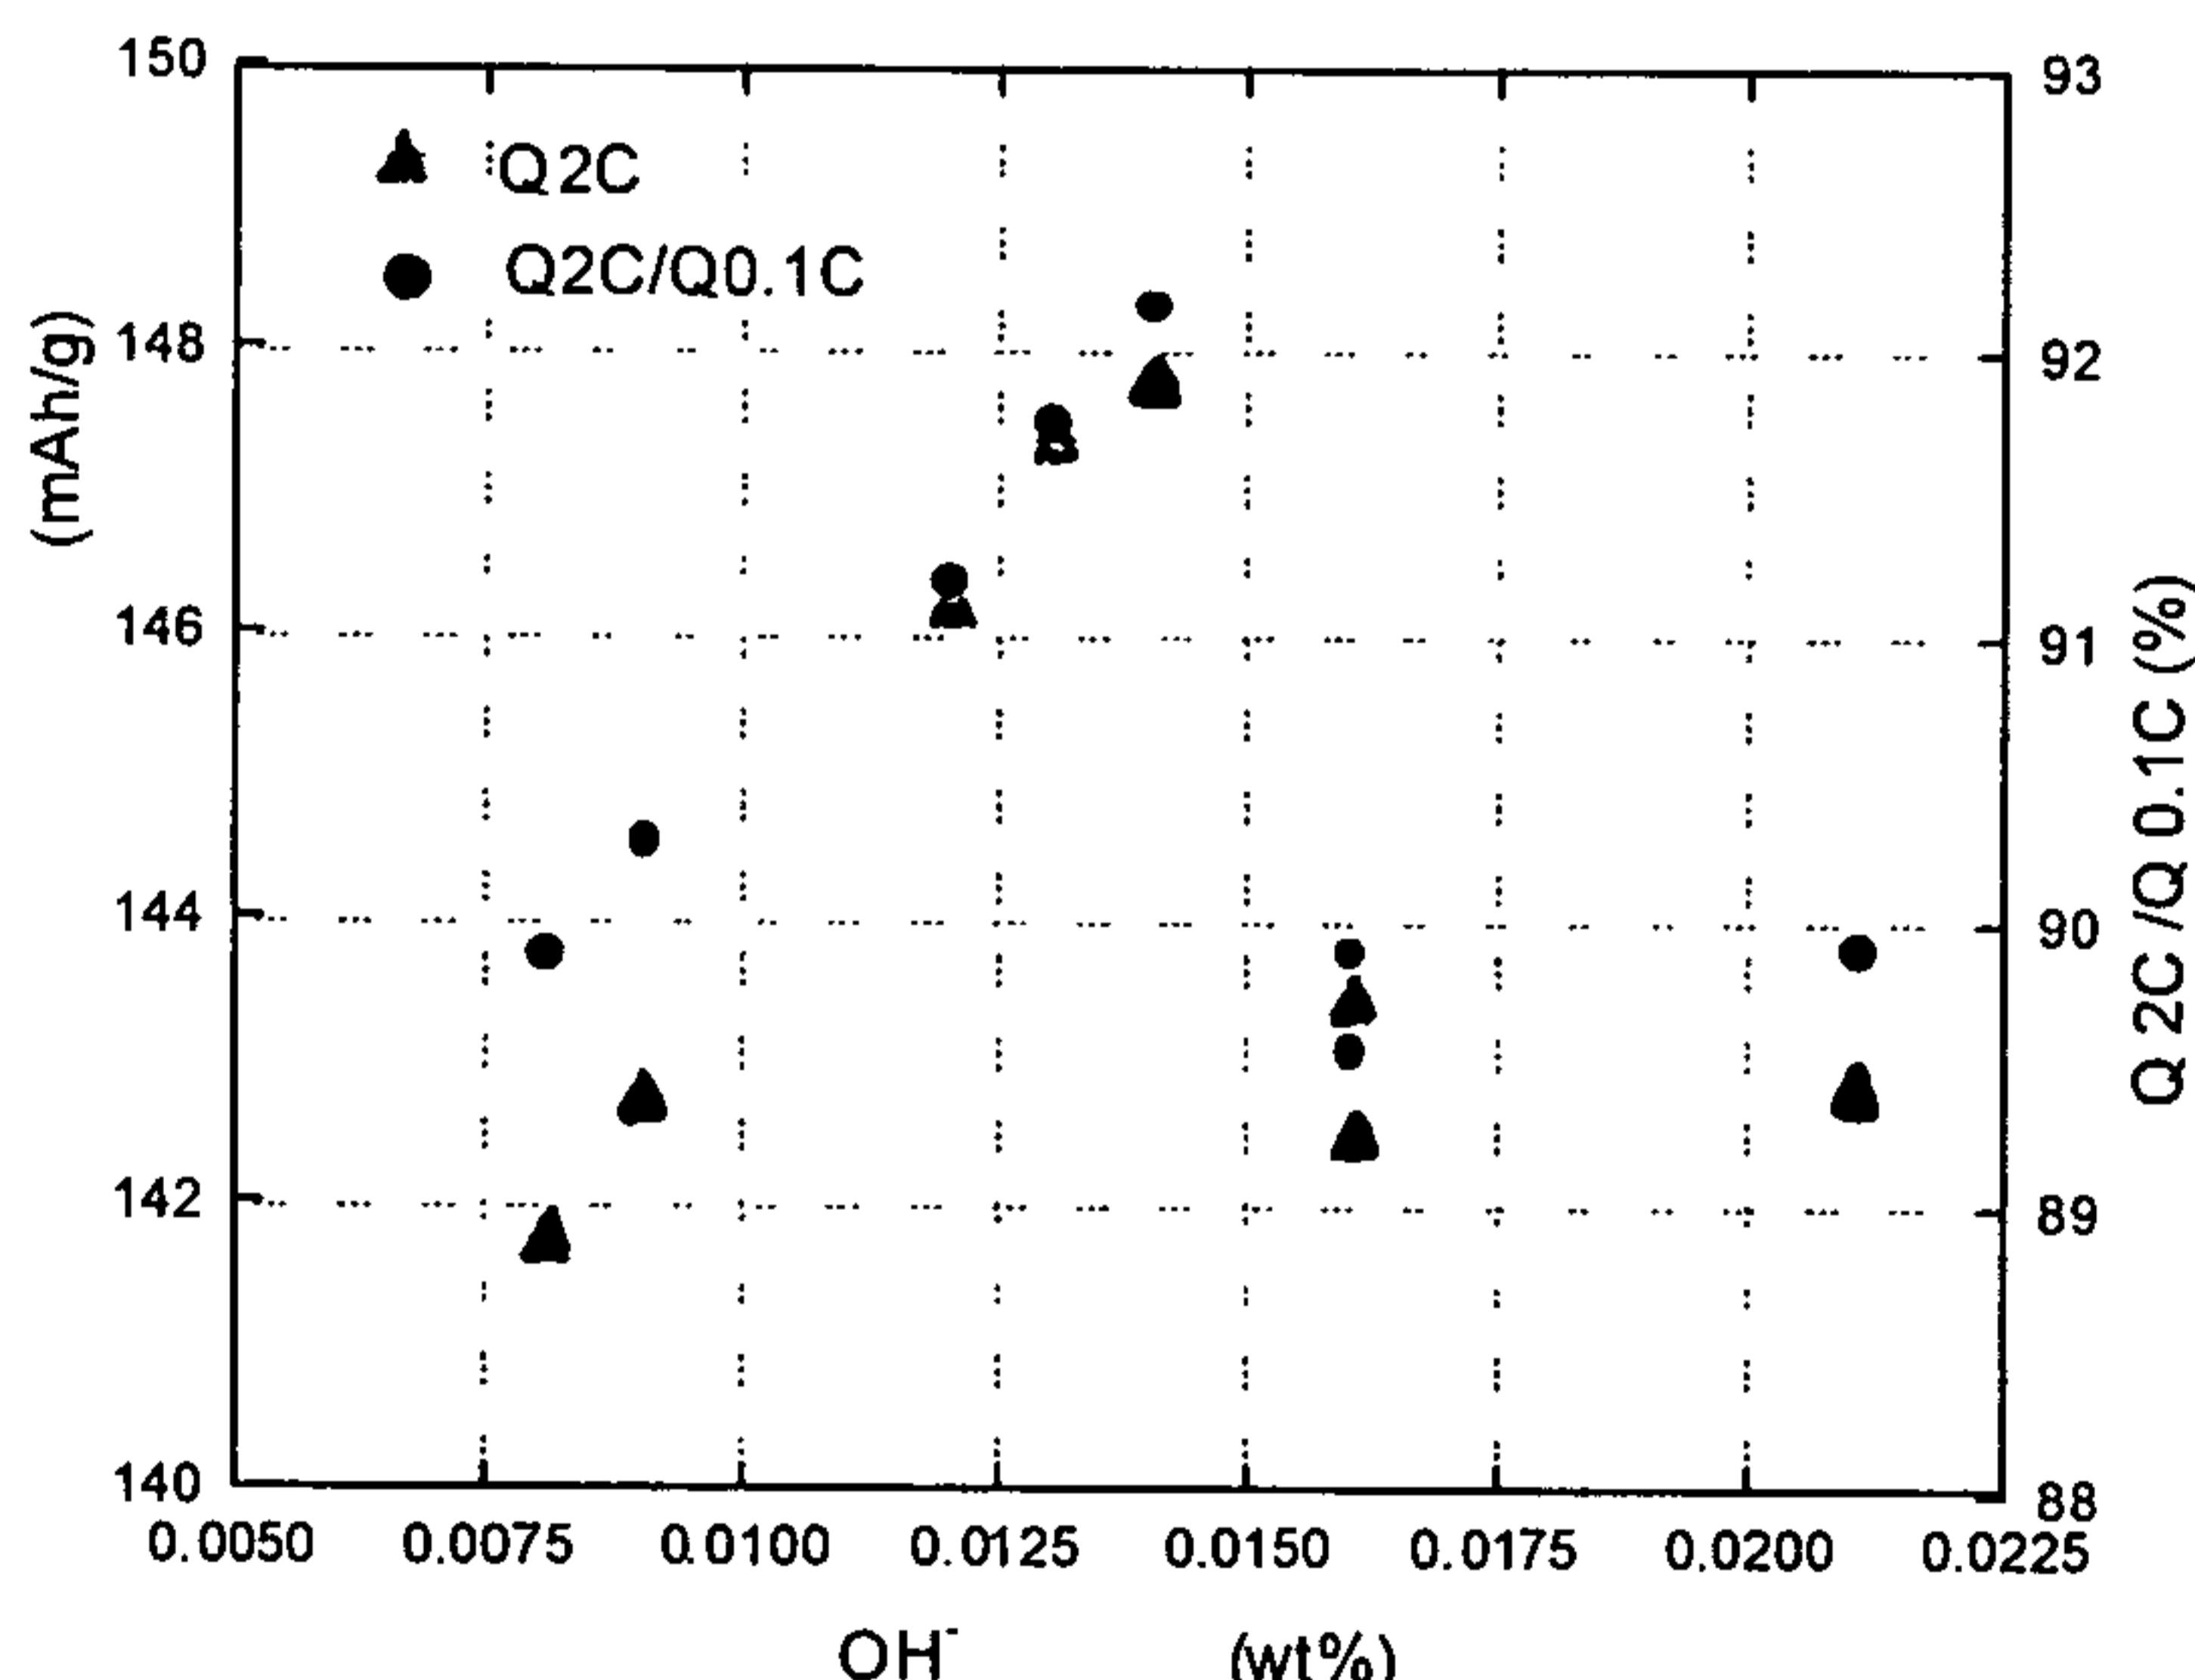

5

Figure 2

2/3


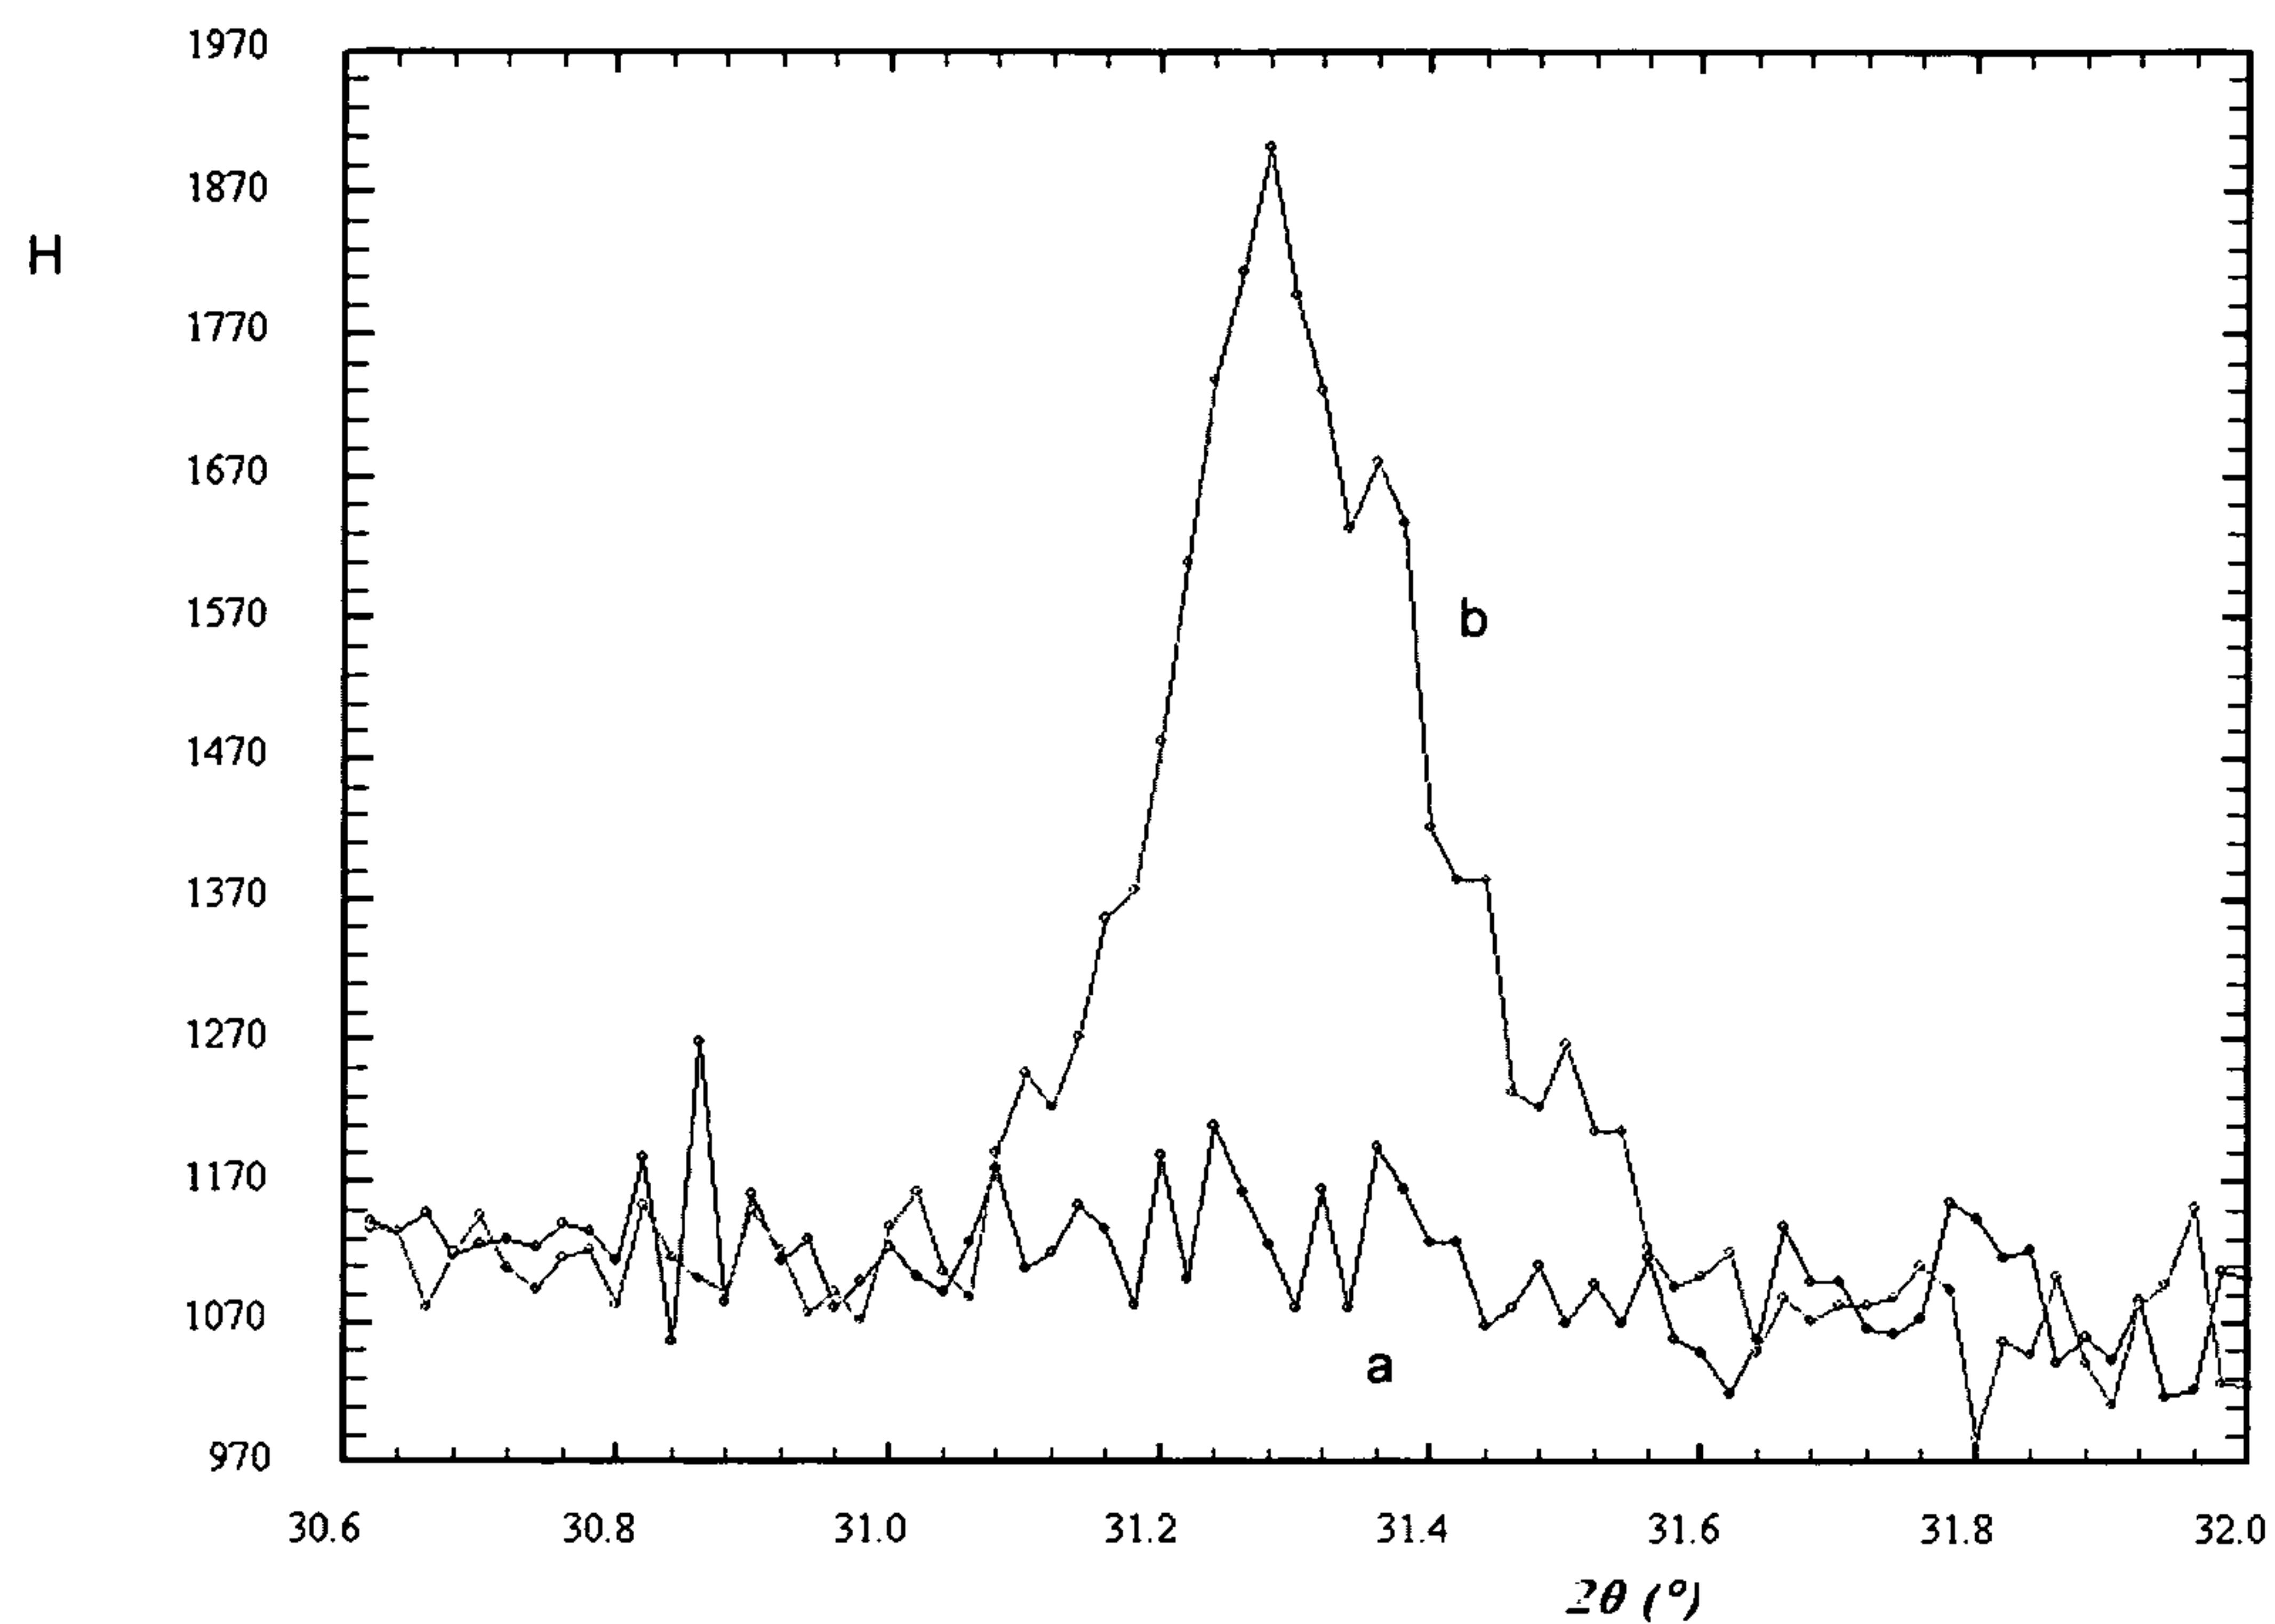


Figure 3

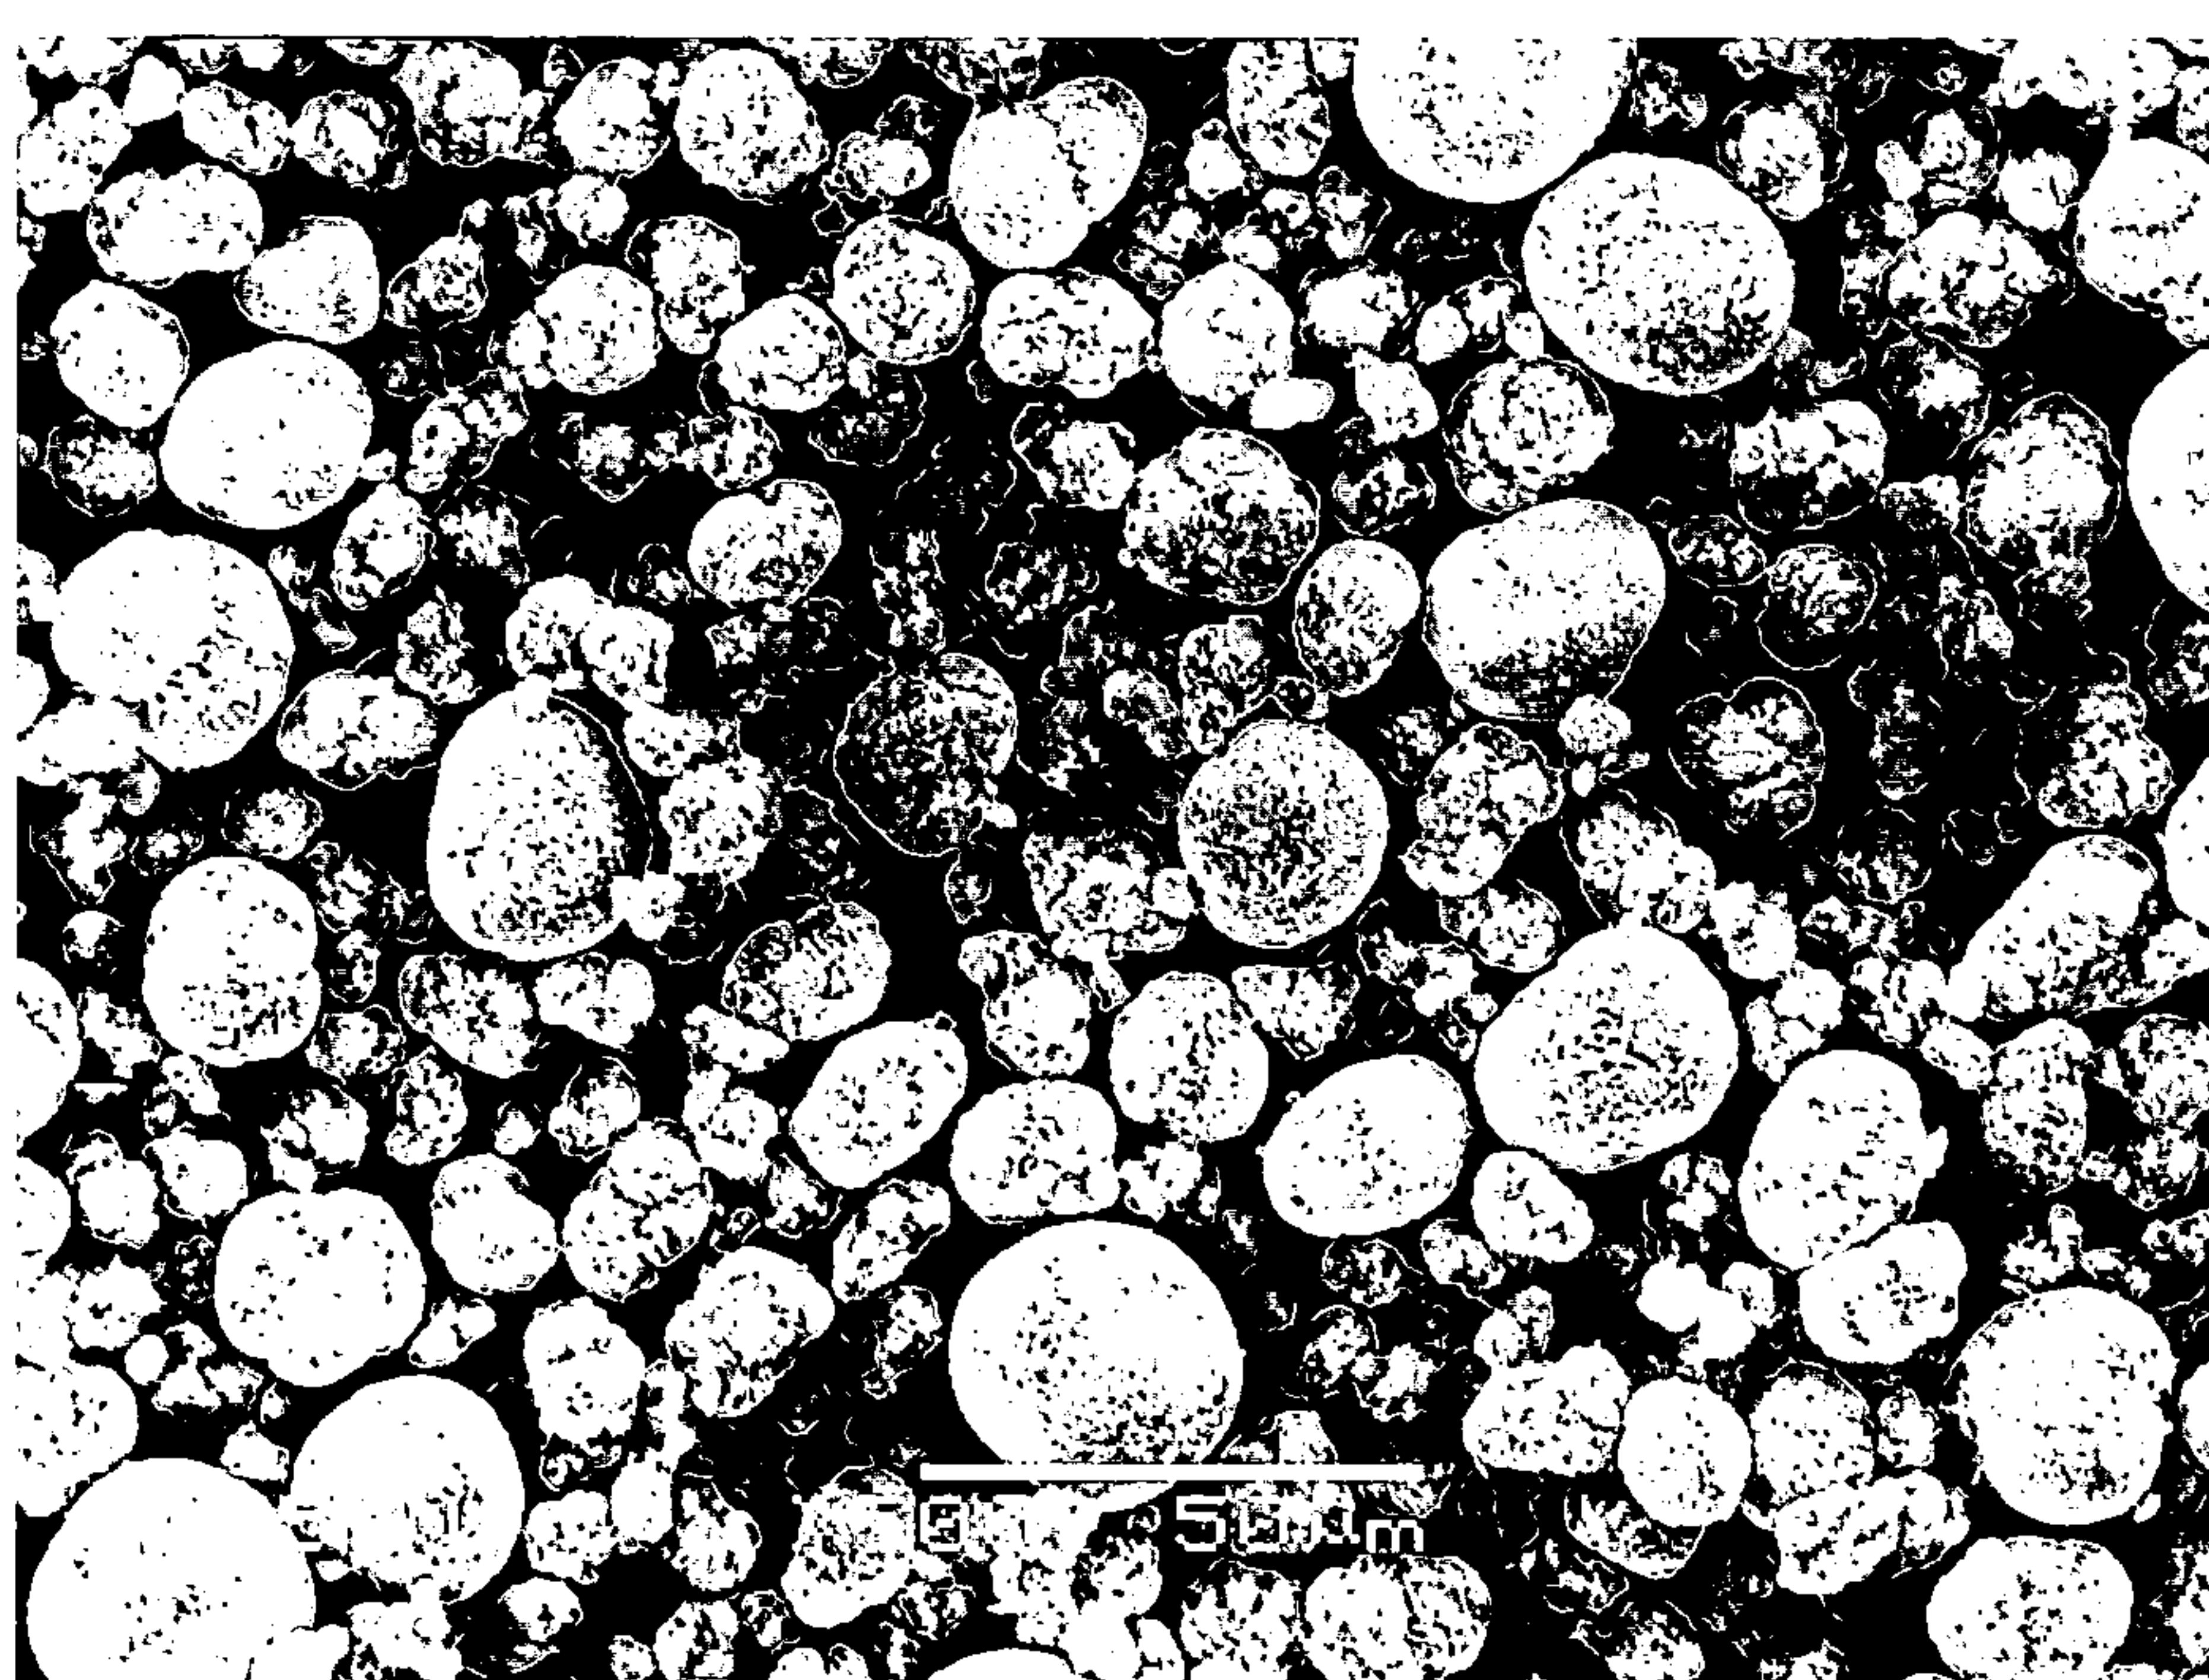

5

Figure 4

3/3



Figure 5

5

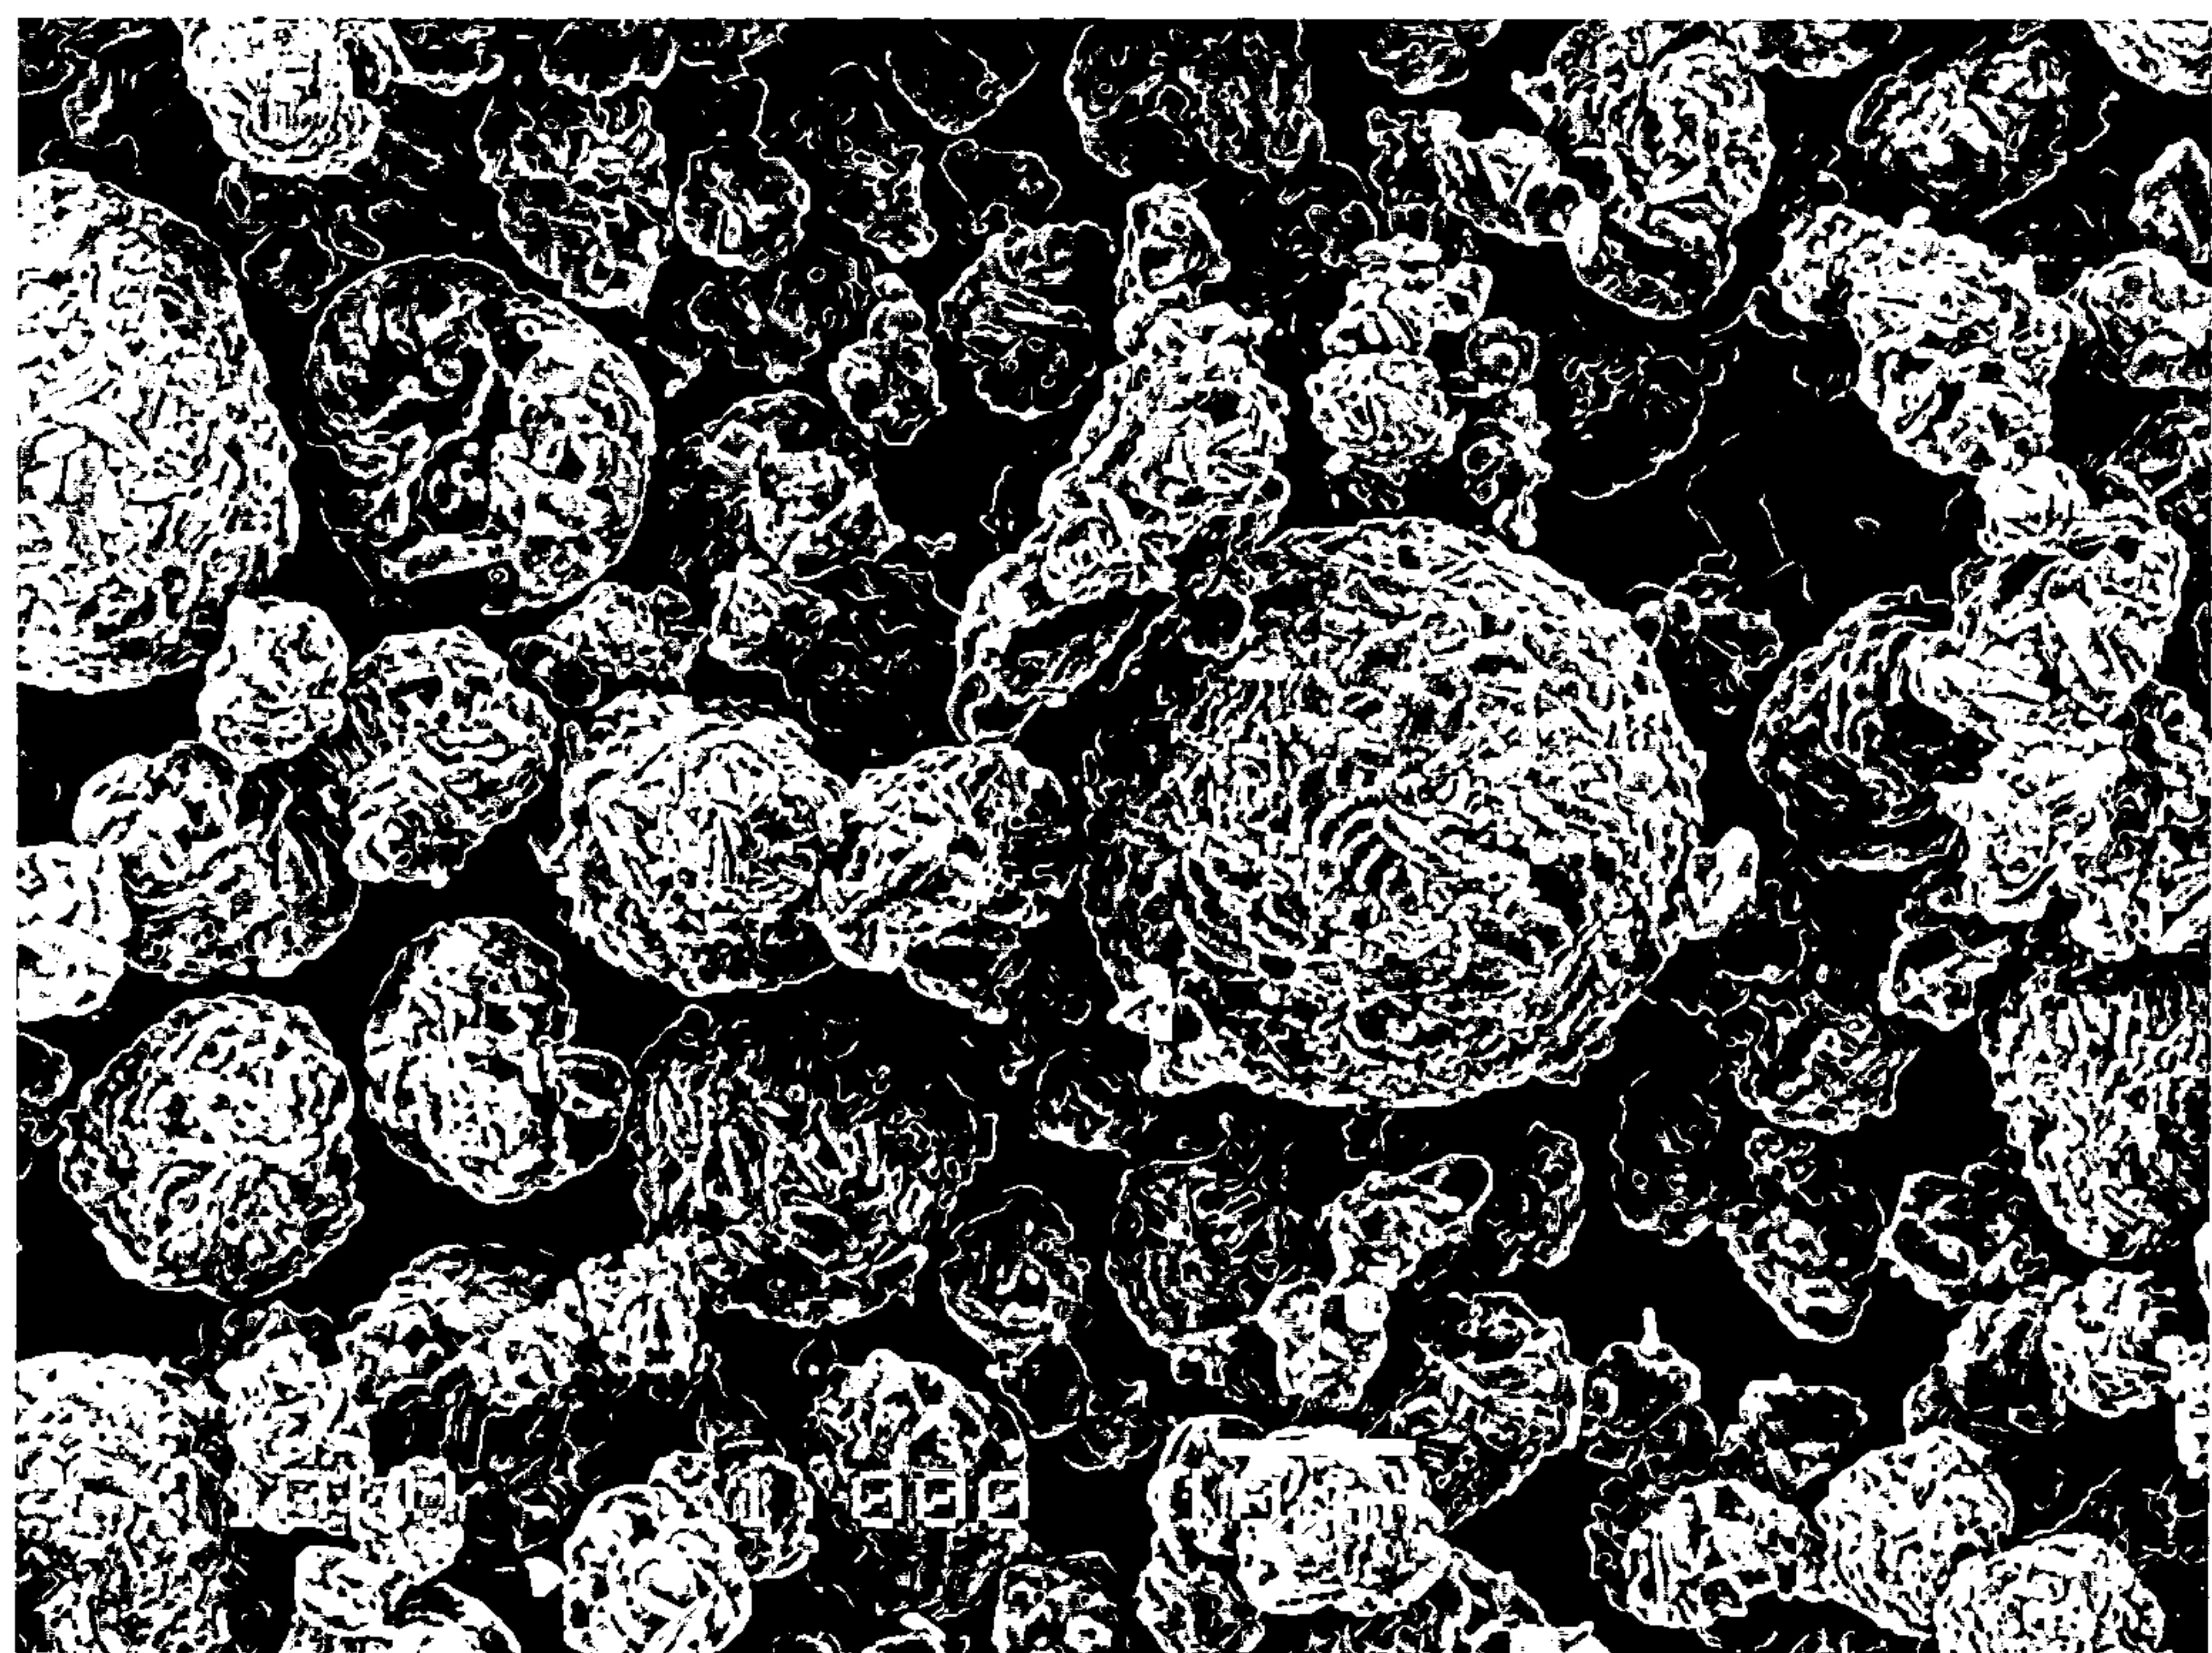


Figure 6

