



(86) Date de dépôt PCT/PCT Filing Date: 2004/08/26
(87) Date publication PCT/PCT Publication Date: 2005/04/07
(45) Date de délivrance/Issue Date: 2011/05/17
(85) Entrée phase nationale/National Entry: 2006/03/24
(86) N° demande PCT/PCT Application No.: JP 2004/012254
(87) N° publication PCT/PCT Publication No.: 2005/030541
(30) Priorité/Priority: 2003/09/29 (JP2003-337339)

(51) Cl.Int./Int.Cl. *B60R 25/04* (2006.01)


(72) Inventeurs/Inventors:
KONNO, TAKESHI, JP;
ONOZUKA, TADASHI, JP;
WATARAI, SADANORI, JP

(73) Propriétaires/Owners:
HONDA MOTOR CO., LTD., JP;
HONDALOCK MFG. CO., LTD., JP

(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : CLE DE TELECOMMANDE POUR VEHICULE

(54) Title: REMOTE CONTROLLING KEY FOR VEHICLE

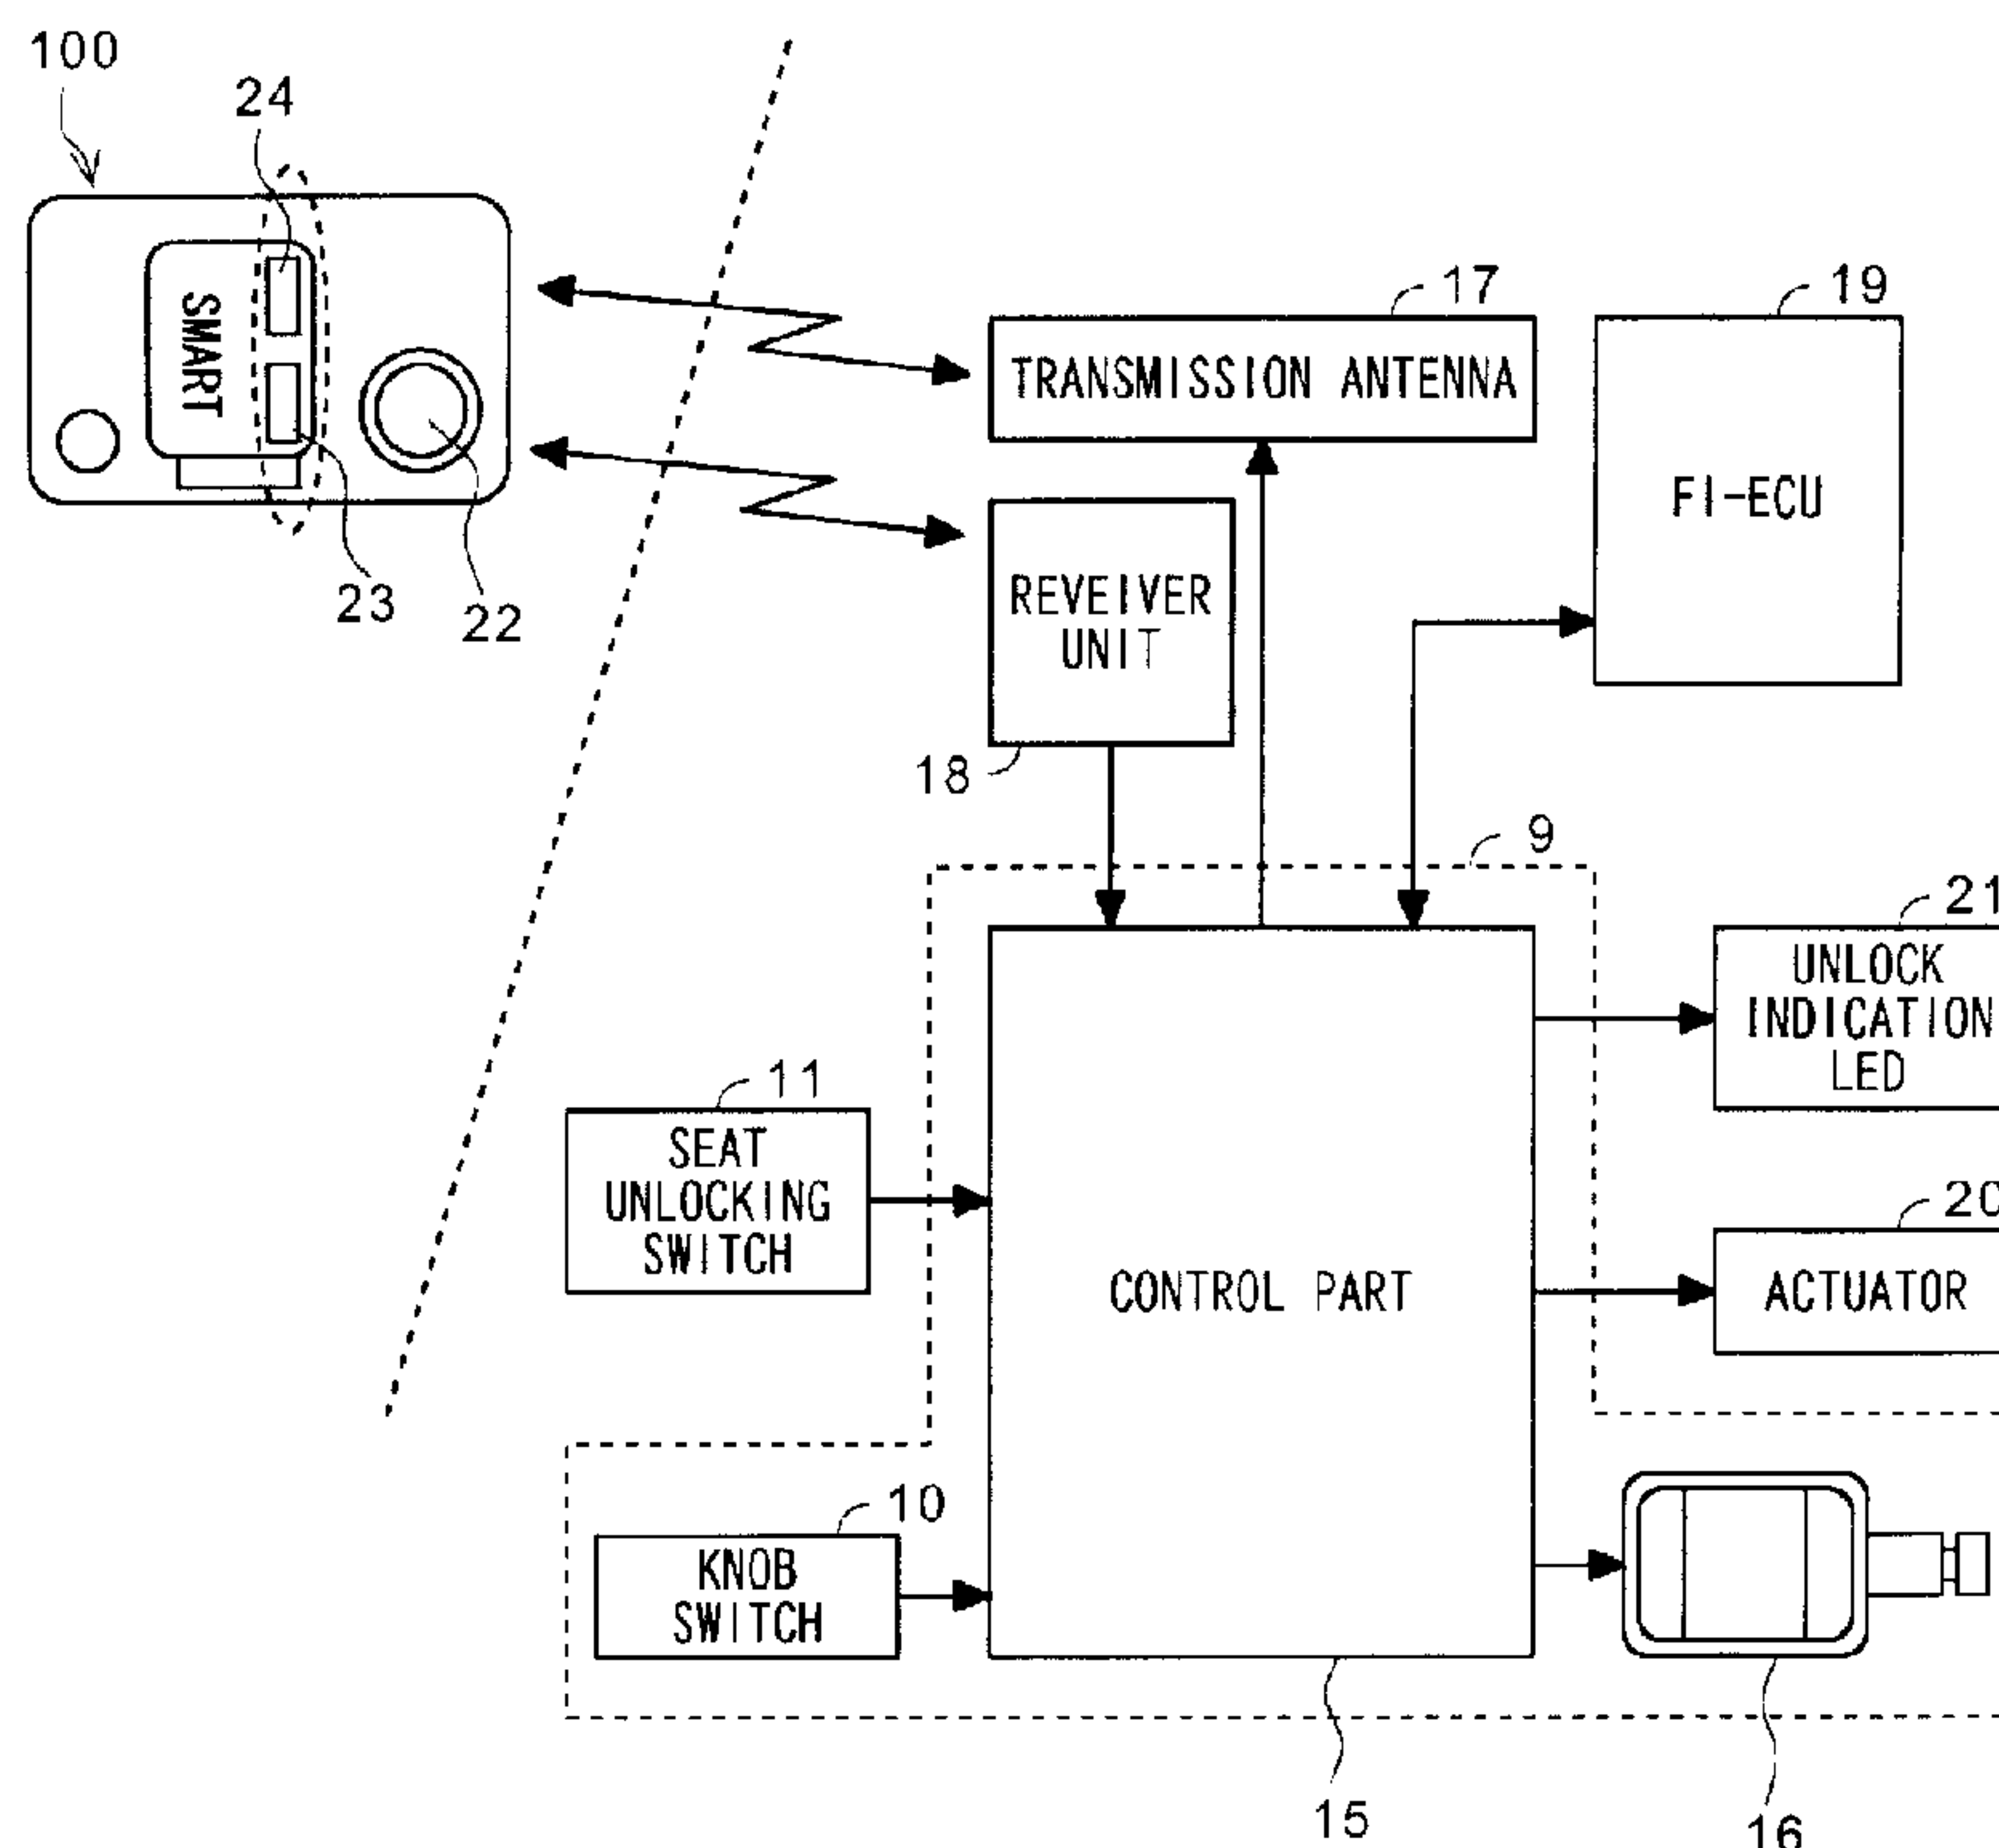

(57) Abrégé/Abstract:

The invention is to provide a remote key capable of preventing the malfunction of a keyless engine starting system. A remote key 100 conducts communication with a vehicle in the verification area of the vehicle and transmits identification information to the vehicle to unlock the lock of an engine starting switch 10 on the vehicle, thereby bringing an engine to a state in which it is ready to start. A push button 22 brings a function of conducting communication with the vehicle to an inoperable state (a state of stop) or to an active state (a standby state of receiver). LEDs 23, 24 indicate the switching operation being performed by the push button 22 or the present state of the communication function. The push button 22 indicates a state in response to a short-time operation and switches from the present state to the other in response a long push.

ABSTRACT

The invention is to provide a remote key capable of preventing the malfunction of a keyless engine starting system. A remote key 100 conducts communication with a vehicle in the verification area 5 of the vehicle and transmits identification information to the vehicle to unlock the lock of an engine starting switch 10 on the vehicle, thereby bringing an engine to a state in which it is ready to start. A push button 22 brings a function of conducting communication with the vehicle to an inoperable state (a state of 10 stop) or to an active state (a standby state of receiver). LEDs 23, 24 indicate the switching operation being performed by the push button 22 or the present state of the communication function. The push button 22 indicates a state in response to a short-time operation and switches from the present state to the other in response a long 15 push.

SPECIFICATION**REMOTE CONTROLLING KEY FOR VEHICLE****TECHNICAL FIELD**

5 The invention relates to a remote controlling key (hereinafter referred to as "remote key") for a vehicle and in particular, to a remote key suitable for a vehicle starting system capable of unlocking the lock of a vehicle by short-distance wireless communication.

10 BACKGROUND ART

 A keyless entry system for a four-wheel automobile has been known in which when a person who has an exclusively designed remote key (for example, a card key having a wireless communication function) comes near to a locked vehicle and enters a predetermined verification
15 area, a door is unlocked and an engine is brought to a state of being ready to start. In this keyless entry system, when the person goes away from the vehicle with the card key, the door is locked and the engine cannot be started. This keyless entry system is disclosed in, for example, Japanese Unexamined Patent Publication
20 No. 10-317754.

 A keyless entry system that has a normal mode of transmitting a remote control signal to a vehicle side to prevent a malfunction in the control of the system or to reduce the consumption of a battery and a transmission output stop mode of stopping the output of the
25 remote control signal has been known (Japanese Unexamined Patent Publication No. 2003-64918).

[Patent document 1] JP 10-317754 A

[Patent document 2] JP 2003-64918 A

DISCLOSURE OF THE INVENTION

PROBLEM TO BE SOLVED BY THE INVENTION

5 In a four-wheel automobile having doors, even if an engine is brought to a state of being ready to start by the function of a remote key, an engine startup operating procedure including steps of opening the door first and then, for example, of pushing a knob needs to be performed. Hence, even if an operation of unlocking
10 a lock and an operation of bringing the engine to a state of being ready to start are performed on the vehicle side by conducting communication with the remote key, a preparatory operation for starting the engine can not be performed without the intentional operation of a remote key possessor, that is, a driver.

15 However, in a motorcycle having no door, an engine startup operation can be performed only by a driver coming near to the vehicle with a remote key. Hence, even if the driver does not intend to start the engine, a preparatory operation for starting the engine can be performed immediately when the remote key comes near to the
20 vehicle. For example, when the driver comes near to the vehicle to wash or maintain the vehicle, a preparation for starting the engine is started. To be specific, an engine start operating knob is unlocked.

 The invention provides, in a keyless engine
25 starting system, a remote key for a vehicle that can prevent a preparation of starting an engine from being started unless a driver

performs an operation of starting the engine.

MEANS FOR SOLVING PROBLEM

The first feature of the present invention that a remote controlling key for a vehicle of the type in which identification information is transmitted in response to a startup signal from the vehicle in a verification area set for the vehicle to bring an engine starting switch provided in the vehicle to an operable state, the remote controlling key comprising: switching means for stopping or activating a function of transmission/receiver means that receives the startup signal and transmits the identification information.

The second feature of the present invention that further comprising indicating means for indicating a state where the function of the transmission/receiver means is stopped and a state where the function of the transmission/receiver means is activated.

The third feature of the present invention that wherein the indicating means is so constructed as to indicate a state of the transmission/receiver means when the switching means is operated continuously for a first time period, and wherein the switching means is so constructed as to switch the function of the transmission/receiver means when it is operated continuously for a second time period longer than the first time period.

According to another aspect, the invention provides for a remote controlling key for a motorcycle of the type in which

identification information is transmitted in response to a startup signal that is transmitted by pushing an engine starting switch provided in the motorcycle in a verification area set for the motorcycle to enable an engine start operation by the engine starting switch, the remote controlling key comprising:

a transmission/receiver means for transmitting the identification information when receiving the startup signal;

a single manual operation switching means for stopping or activating a function of the transmission/receiver means; and

an indicating means for indicating when a function of the transmission/receiver means is stopped or activated,
wherein:

the function of the transmission/receiver means is switched when the manual switching means is continuously operated for a predetermined time period, and the indicating means indicates a current status of the transmission/receiver means, and

the predetermined time period is set to include more shorter time period domain, and the operation of the manual operation switch shorter than the shorter time period is judged as an error operation, thus the current operation of the manual operation switch is treated as invalid.

In the above aspect of the invention, the motorcycle may be a scooter. Also, the indicating means may comprise a couple of LED lamps, where one of the lamps illuminates in one color to indicate function stopping state of the transmission/receiver

means and the other lamp illuminates in another color to indicate function activate state of the transmission/receiver means.

EFFECT OF THE INVENTION

According to the invention having the above features, it is possible to stop the function of the transmission/receiver means of the remote key or to activate the function, that is, to bring

the transmission/receiver means into a state capable of conducting communication, by means of the switching means. With this, in a case where a driver does not intend to start the engine, even if the driver comes into a verification area with a remote key, the keyless engine starting system does not operate. When the driver does not drive the vehicle for a long time, the driver can stop the function of the transmission/receiver means to prevent the electricity consumption of the power source within the remote key. It is possible to recognize, by means of indicating means, whether or not the transmission/receiver function of the remote key is stopped.

According to the third feature, if the switching means is not pushed for relatively a long time, the function of the transmission/receiver means of the remote key is not switched, so that it is possible to switch the state of the transmission/receiver means on the basis of a intentional operation.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a general block diagram of a keyless engine starting system in accordance with one embodiment of the invention.

Fig. 2 is a block diagram to show the construction of a remote key.

Fig. 3 is a flow chart to show a processing in the remote key based on the operation of a push button.

Fig. 4 is a schematic view to show the outline of a processing of the remote key.

Fig. 5 is an external view of a knob switch.

Fig. 6 is an operating timing chart of the keyless engine starting system.

Fig. 7 is a perspective view of a motorcycle to which the remote key of the invention is applied.

5 **EXPLANATION OF LETTERS OR NUMERALS**

9- handle lock module, 10- engine starting switch (knob switch), 15- control part, 22- pushbutton, 23, 24- indicator lamp, 26- receiver circuit, 100- remote key

BEST MODE FOR CARRYING OUT THE INVENTION

10 One embodiment of the invention will be described with reference to the drawings. Fig. 7 is an external perspective view of a scooter type motorcycle to which a keyless engine starting system in accordance with one embodiment of the invention is applied. In the drawing, a steering handle, that is, a handlebar 2 turnably
15 supported by a vehicle frame (not shown) is arranged on the front portion of the scooter type motorcycle 1. The periphery of the base of the handlebar 2 is covered with a panel 4 in which instruments 3 are arranged. The panel 4 is connected to a floor part 6 via a longitudinal panel 5. The front portion of the panel 4 (front side
20 of a vehicle) is covered with a front cowl 8 having a headlamp (not shown) and turn signal lamps 7. A steering lock module 9 is housed in a space covered with the panel 4 and the front cowl 8. The steering lock module 9 has an engine starting switch (hereinafter referred to as "knob switch") 10 whose operating portion, that is, knob is
25 exposed to the panel 4. The steering lock module 9 also has a mechanism that engages a lock bar driven by the operation of this knob switch

10 with a lock hole formed in the shaft of the handlebar 2 to make the handlebar 2 unable to turn, and a seat unlocking switch 11. As the concrete structure of the steering lock can be adopted, for example, a structure disclosed in Japanese Unexamined Patent
5 Publication No. 9-301239.

The floor part 6 is further connected to a rear cowl 12. A seat 13 is disposed on the top of the rear cowl 12. The seat 13 also serves as a lid for covering a storage box of a helmet and the like and a fuel tank (both not shown) that are covered with
10 the rear cowl 12. The seat 13 is freely opened or closed so as to perform a function as a lid and has an electrically operated locking device 14 operated by a solenoid.

Fig. 1 is the general system construction view of a keyless engine starting system including the steering lock module 9. The
15 steering lock module 9 is composed of a control part 15 including a microcomputer, the knob switch 10, the seat unlocking switch 11, and a solenoid 16 for unlocking a lock to prevent the knob switch 10 from turning. A transmitting antenna 17 and a receiving unit 18 for conducting communication with a remote key 100, a fuel injection
20 control unit (hereinafter referred to as "ECU") 19, and an actuator 20 for unlocking the seat locking device 14 are connected to the control part 15. Further, an LED 21 for indicating the unlocking of the steering lock can be connected to the control part 15. The indicator LED 21 can be provided, for example, on the panel 4.

25 The remote key 100 has a push button 22, an indicator lamp 23, and an indicator lamp 24. It is recommended that the indicator

lamp 23 and the indicator lamp 24 be constructed of LEDs. The functions of the indicator lamp 23 and the indicator lamp 24 will be later described.

Fig. 2 is a block diagram to show the construction of the remote key 100. The remote key 100 has a communication function of conducting communication with the steering lock module 9 to transmit ID information to the steering lock module 9. The remote key 100 includes a receiver circuit 26 to which a plurality of antennas 25-1, 25-2, 25-3 for allowing non-directional transmission and receiver are connected, a transmission circuit 27, and an indicator lamp drive circuit 28 for driving the indicator lamp (green LED) 23 and the indicator lamp (red LED) 24, an EEPROM 29 as a storage device for storing various kinds of data, and a CPU 30 for controlling these constituent elements. The remote key 100 is driven by a built-in power source 31. The power source 31 is, for example, a lithium battery. Signals correspond to the state of the push button 22 are inputted to the CPU 30.

The CPU 30 has a function of allowing or not-allowing receiver from the steering module 9 in response to the state of the push button 22. In other words, by operating the push button 22 in a predetermined manner, the CPU 30 can be made to respond to or neglect a transmission signal from the steering lock module 9.

Fig. 3 is a flow chart to show the processing of the CPU 30 based on the operation of the push button 22. In Fig. 3, it is determined at step S1 whether or not the push button 22 is pushed and if this determination result is affirmative, the sequence

proceeds to step S2. It is determined at step S2 whether or not the push button 22 is pushed continuously for a first predetermined time T (for example, 0.1 second) or more. If this determination result is affirmative, it is determined that the operation of the push button 22 is an instantaneous operation, that is, a short time period push operation, and the sequence proceeds to step S3. It is determined that an operation performed for a time shorter than the time T is an error and the sequence passes this flow of process. It is determined at step S3 whether or not the push button 22 is pushed continuously for a second predetermined time T1 ($T1 > T$: for example, 1 second) or more. If this determination result is affirmative, it is determined that the operation of the push button 22 is a long-time operation (a long push) and the sequence proceeds to step S4.

It is determined at step S4 whether or not the present state of the receiver circuit 26 of the remote key 100 is active, that is, in a standby state of receiver. If the state of the receiver circuit 26 is active, the sequence proceeds to step S5 where the receiver circuit 26 is brought to a state of stop, that is, a state in which function is stopped. To show that the receiver circuit 26 is brought to the state in which function is stopped, the sequence proceeds to step S6 where the red LED 24 is lit. Here, the state of illumination of this red LED 24 is finished in a predetermined short time, that is, the red LED 24 is lit only instantaneously.

On the other hand, if the determined result at step S4 is negative, the sequence proceeds to step S7 where the receiver circuit 26 is

PCT/JP2004/012254

brought to an active state, that is, a standby state of receiver. To show that the receiver circuit 26 is brought to the standby state of receiver, the sequence proceeds to step S8 where the green LED 23 is lit. Here, the state of illumination of this green LED 23 is finished in a predetermined short time, that is, the green LED 23 is lit only instantaneously.

If the determination result at step S3 is negative, that is, if the operation of the push button 22 is a short-time operation that is not elongated to a long push, the sequence proceeds to step S9 where it is determined whether or not the receiver circuit 26 is in the standby state of receiver. If the determination result at step S9 is affirmative, the sequence proceeds to step S10 where the green LED 23 is blinked to show that the receiver circuit 26 is in the standby state of receiver. The number of blinks is set at, for example, four. If the determination result at step S9 is negative, the sequence proceeds to step S11 where the red LED 24 is blinked to show that the receiver circuit 26 is in the state in which function is stopped. The number of blinks is set at, for example, four.

Fig. 4 is a block diagram to summarize the processings in Fig. 3. As shown in the drawing, in a case where the push button 22 is operated only instantaneously (for example, less than 0.1 second) by mistake, the operation is neglected and regarded as an error and if the push button 22 is operated for a short time, the operation is regarded as an intentional operation, which can be recognized by the indicator lamp showing the present state of the receiver

circuit 26. Further, if the push button 22 is pushed for a long time, the receiver circuit 26 is switched between the state in which function is stopped and the standby state of receiver, and this switching of the receiver circuit 26 is indicated.

5 If any one of the following processings is performed, the receiver circuit 26 can be brought to the state of stop: firstly, the power of the receiver circuit 26 is turned off; secondly, even if receiver is conducted, the CPU 30 is not started, that is, is not brought to a run mode; and thirdly, even if the CPU 30 is started,
10 the CPU 30 is not made to perform a processing of checking ID information.

 In the keyless engine starting system shown in Fig. 1, when the push button 22 is operated to make the receiver circuit 26 of the remote key 100 active and a driver comes into a verification
15 area with the remote key 100, the entire system operates. When the receiver circuit 26 is in the state of stop, the system does not operate. Hence, when the driver goes out of the verification area with the remote key 100, the keyless engine starting system is in an initial state in which each lock device is locked.

20 Fig. 5 shows one example of the knob switch 10. In Fig. 5, in the initial state, the knob switch 10 is at a lock position. In this state, the knob switch 10 is locked and can be pushed but can not be turned. When the knob switch 10 is pushed, communication with the remote key 100 is started and ID information is checked
25 and if the ID information is verified, the knob switch 10 can be turned. When the knob switch 10 is turned to an ON position,

communication is conducted with the ECU 19 and the ID information is checked between the ECU 19 and the handle lock module 9. If the ID information is verified, the steering lock is unlocked and the engine is brought to a state in which it is allowed to start and
5 a function of the switch 11 for unlocking the seat lock device 14 is also made active. When the knob switch 10 is turned to a starting position (ignition), operations of starting the engine, that is, the driving of a motor for starting the engine, the injecting of fuel, and igniting operation are started. In place of setting the
10 knob switch 10 at the starting position, it is also recommended that another starting switch be provided. For example, another starting switch can be provided near the grip of the handlebar 2.

Fig. 6 is a timing chart to show the operation of the keyless engine starting system. The general operation of the keyless engine
15 starting system will be described with reference to Fig. 1 and Fig. 6. First, when the knob switch 10 is pushed at a timing t_0 , the control part 15 starts. Then, the control part 15 outputs a startup signal at a timing t_1 and transmits ID information at a timing t_2 .

The receiver circuit 26 of the remote key 100 starts in response
20 to the startup signal of the control part 15 and the CPU 30 also starts at the same time. The remote key 100 receiving the ID information before a timing t_3 transmits the ID information at a timing t_4 . The control part 15 checks the transmitted ID information against the received ID information and if the ID information is
25 verified, the solenoid 16 is operated at a timing t_5 to stop preventing the knob switch 10 from turning. When preventing the knob switch

10 from turning is stopped, the seat unlocking switch 11 is brought to an operable state and when this seat unlocking switch 11 is pushed, the solenoid 20 for unlocking the seat locking device 14 is operated.

5 In this embodiment, the push button 22 is used to switch the state of the receiver circuit 26 of the remote key 100, but in place of this push button 22, for example, a switch for sliding a knob between an ON position and an OFF position can be used. This sliding switch can be easily recognized from the front and the side.

10 In a case where the receiver circuit 26 receives the ID information after the push button 22 is pushed for a long time when the receiver circuit is active, in place of stopping the function of the receiver circuit, data different from the predetermined ID information can be transmitted back. This is because even if the vehicle-mounted unit 1 receives the data different from the
15 predetermined ID information, the vehicle-mounted unit 1 does not bring the knob switch 10 to an operable state.

The invention can be used not only for the above-described motorcycle but also for a wide variety of vehicles in which knob switches are not covered such as four-wheel vehicle, agriculture
20 machine, and construction machine. The knob switch is not limited to this embodiment. In short, any switch can be used if it can be used as a switch for a keyless engine starting device.

CLAIMS

1. A remote controlling key for a motorcycle of the type in which identification information is transmitted in response to a startup signal that is transmitted by pushing an engine starting switch provided in the motorcycle in a verification area set for the motorcycle to enable an engine start operation by the engine starting switch, the remote controlling key comprising:

a transmission/receiver means for transmitting the identification information when receiving the startup signal;

a single manual operation switching means for stopping or activating a function of the transmission/receiver means; and

an indicating means for indicating when a function of the transmission/receiver means is stopped or activated,

wherein:

the function of the transmission/receiver means is switched when the manual switching means is continuously operated for a predetermined time period, and the indicating means indicates a current status of the transmission/receiver means, and

the predetermined time period is set to include more shorter time period domain, and the operation of the manual operation switch shorter than the shorter time period is judged as an error operation, thus the current operation of the manual operation switch is treated as invalid.

2. The remote control key for a motorcycle as claimed in claim 1, wherein:

the predetermined time period is provided so as to include a first time period and a second time period longer than the first time period,

the indicating means is configured to indicate a status of the transmission/receiver means when the manual switching means continuously operates for the first time period, and

the manual switching means is configured to switch the function of the transmission/receiver means when the manual switching means continuously operates for the second time period.

3. The remote control key for a motorcycle as claimed in claim 1,

wherein the motorcycle is a scooter type.

4. The remote control key for a motorcycle as claimed in claim 1, wherein the indicating means is comprised of a couple of LED lamp, where one of the lamps illuminates in one color to indicate function stopping state of the transmission/receiver means and the other lamp illuminates in another color to indicate function activate state of the transmission/receiver means.

1 / 5

F i g . 1

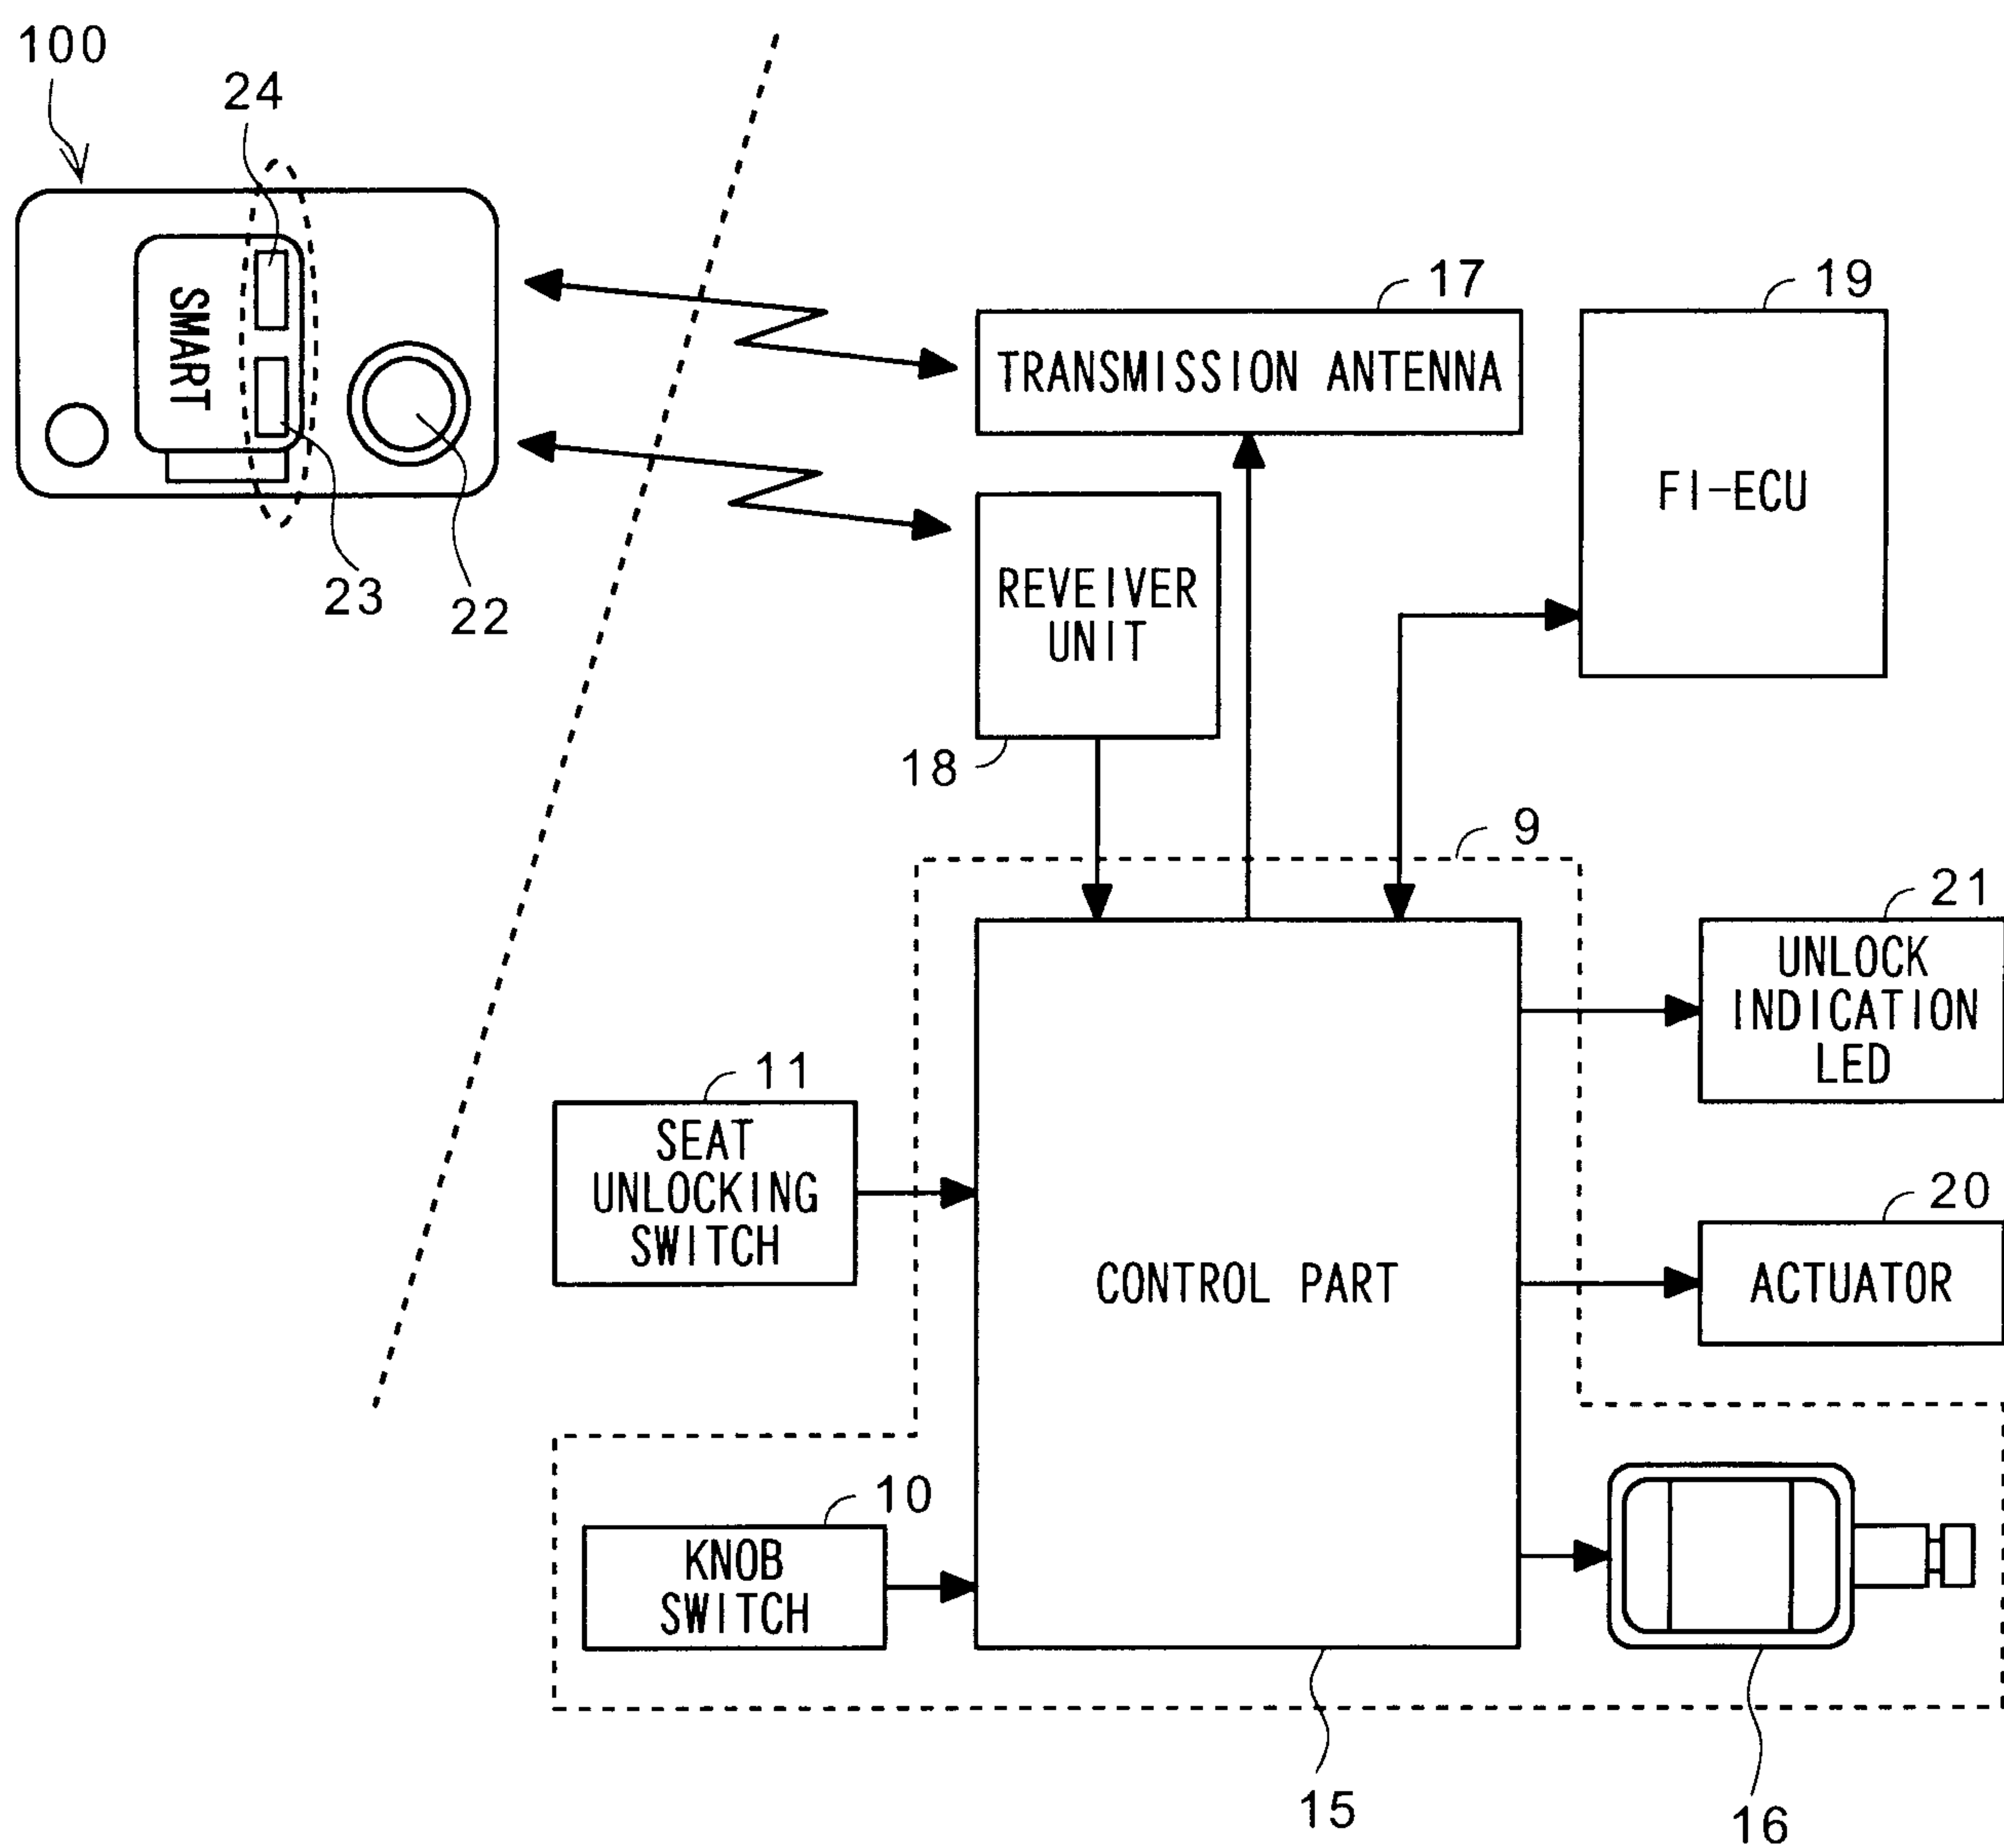


Fig. 2

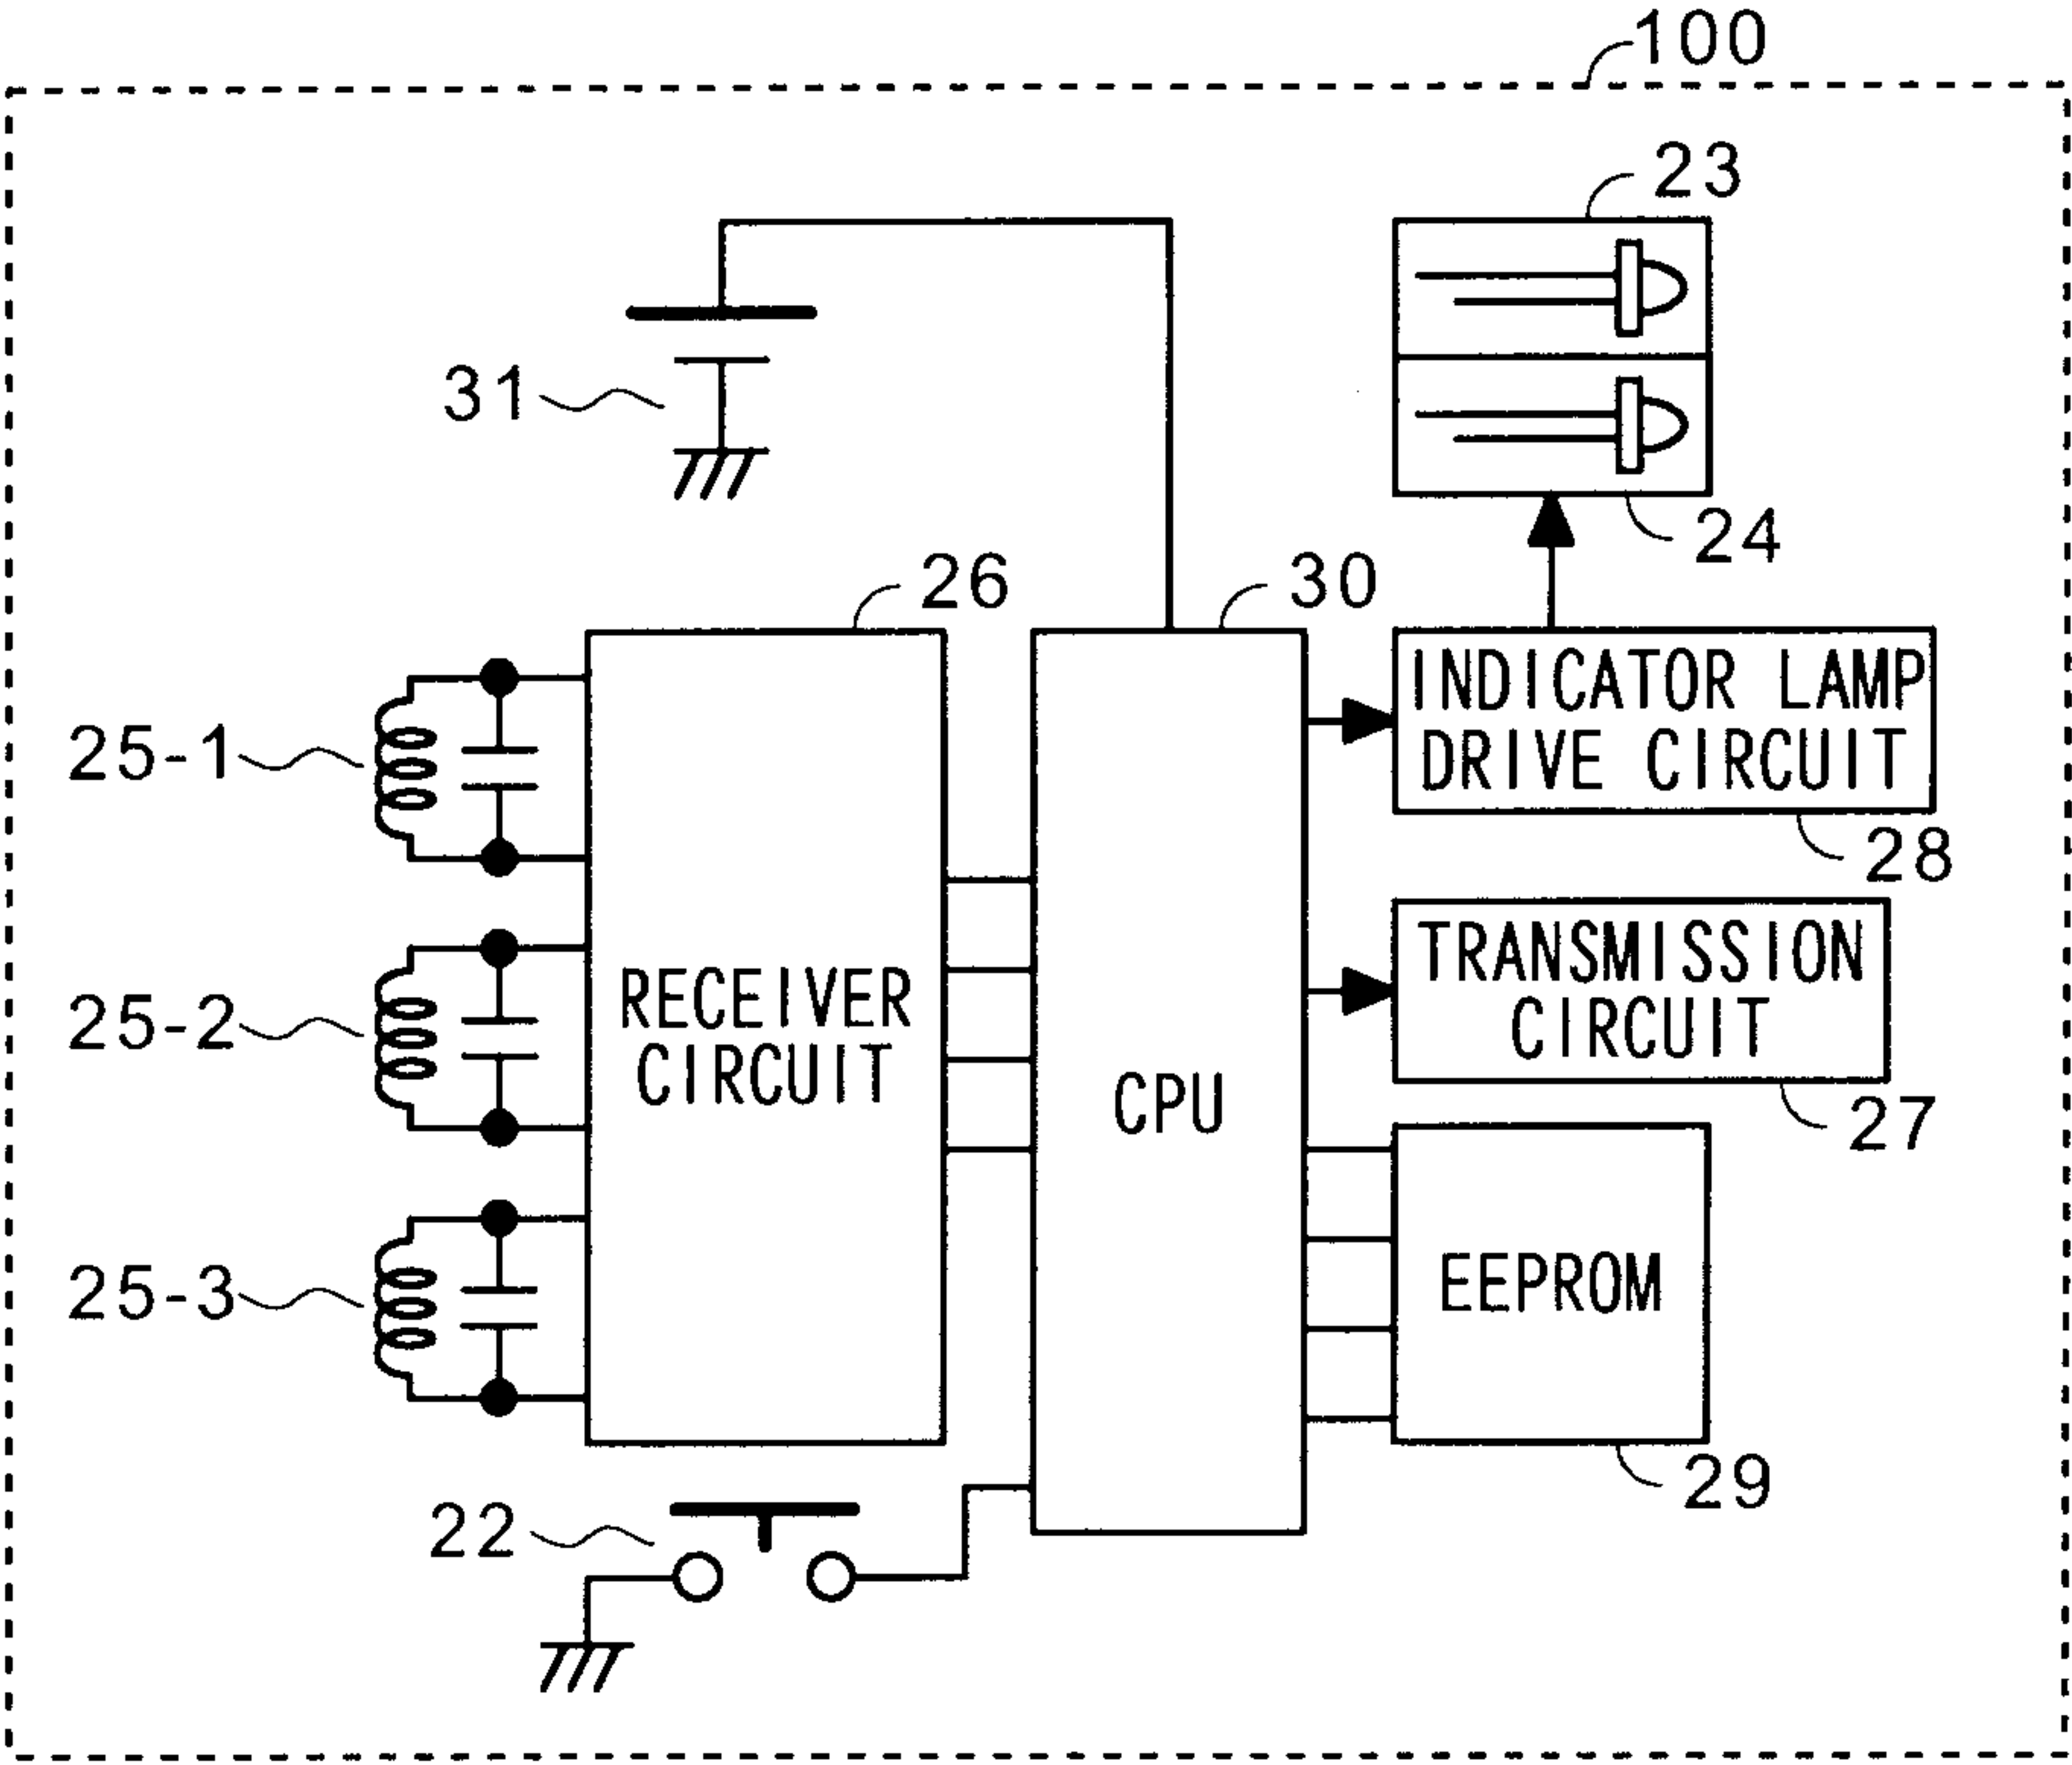


Fig. 4

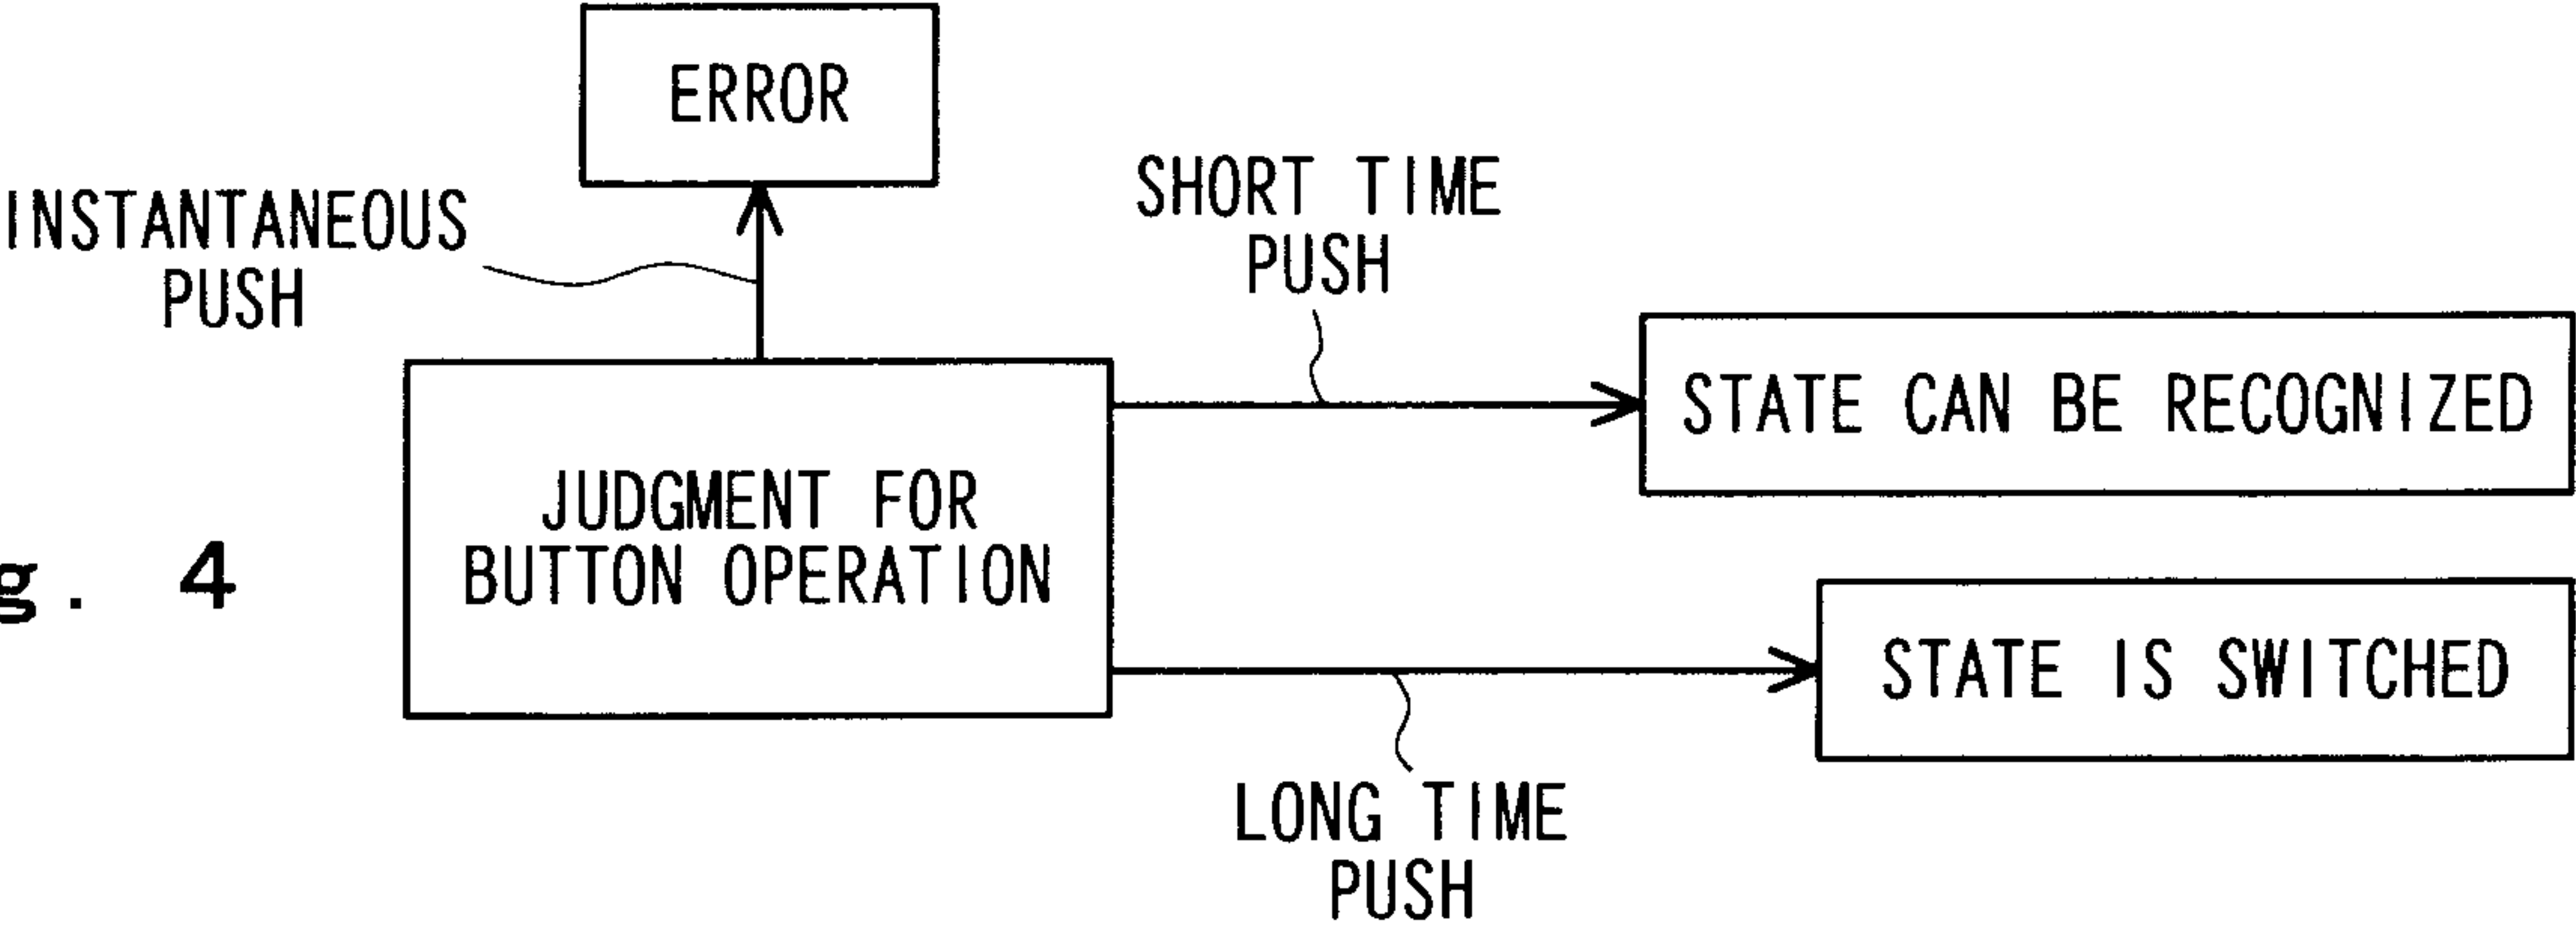


Fig. 5



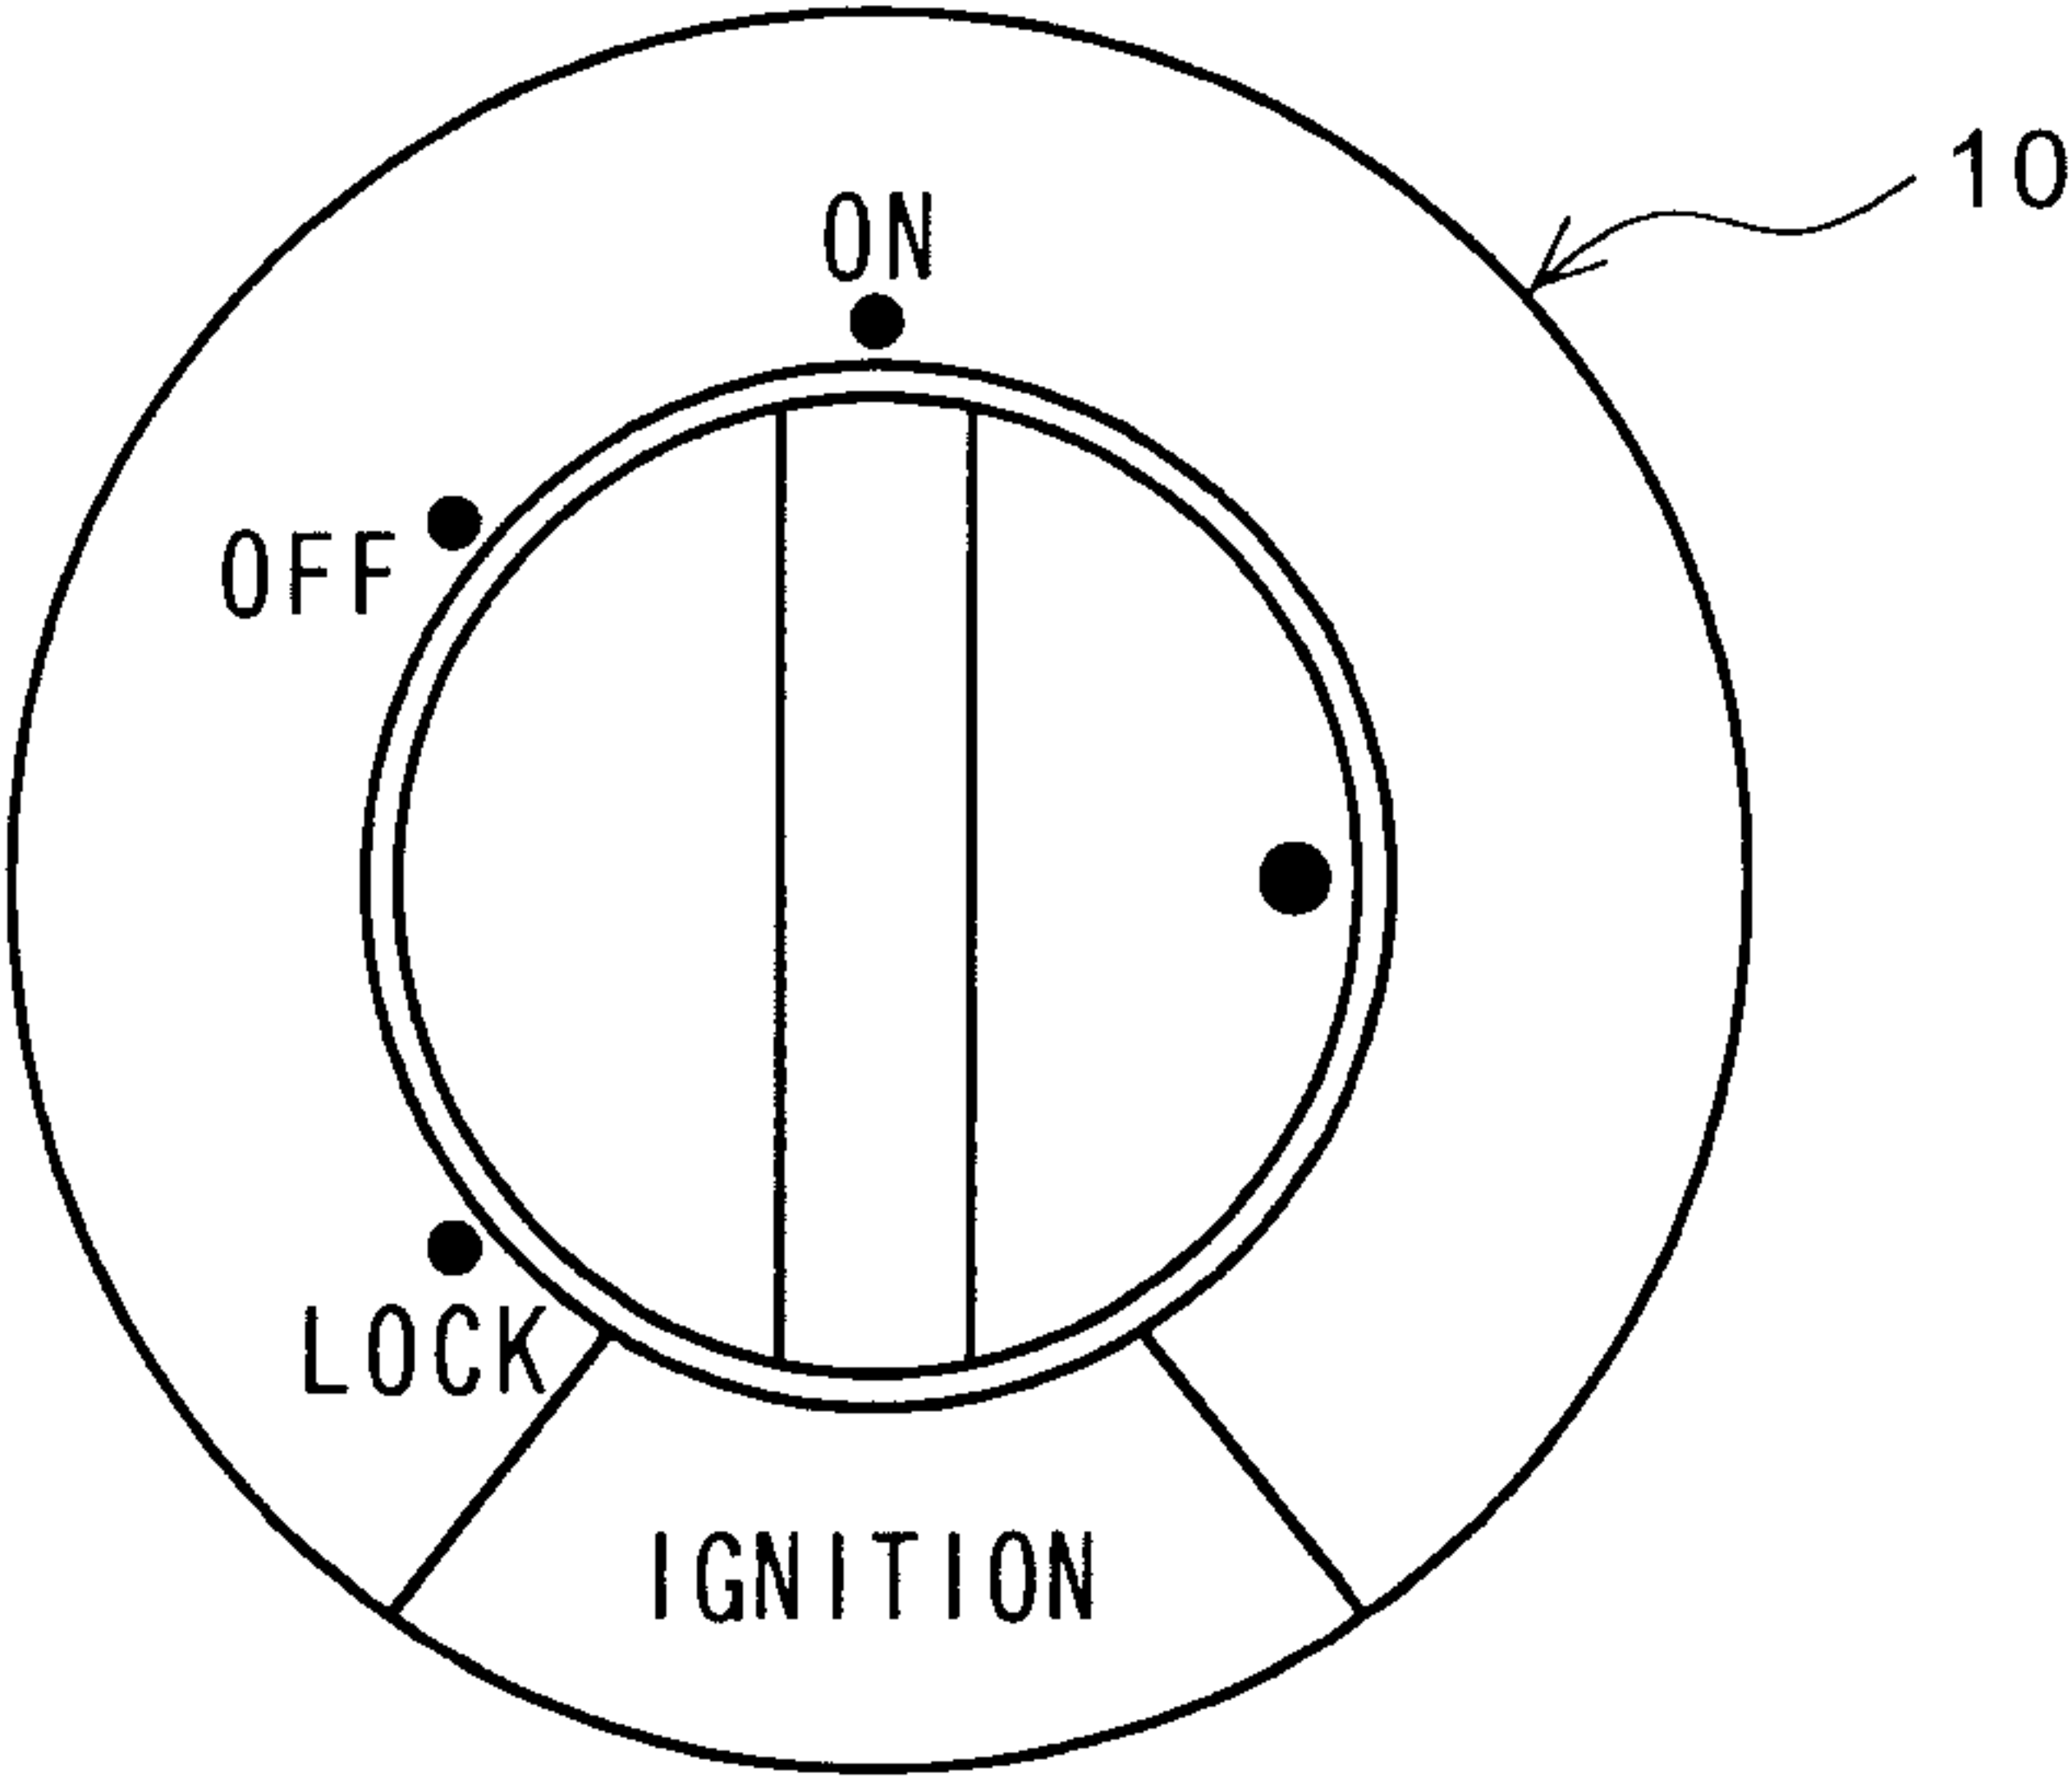


Fig. 3

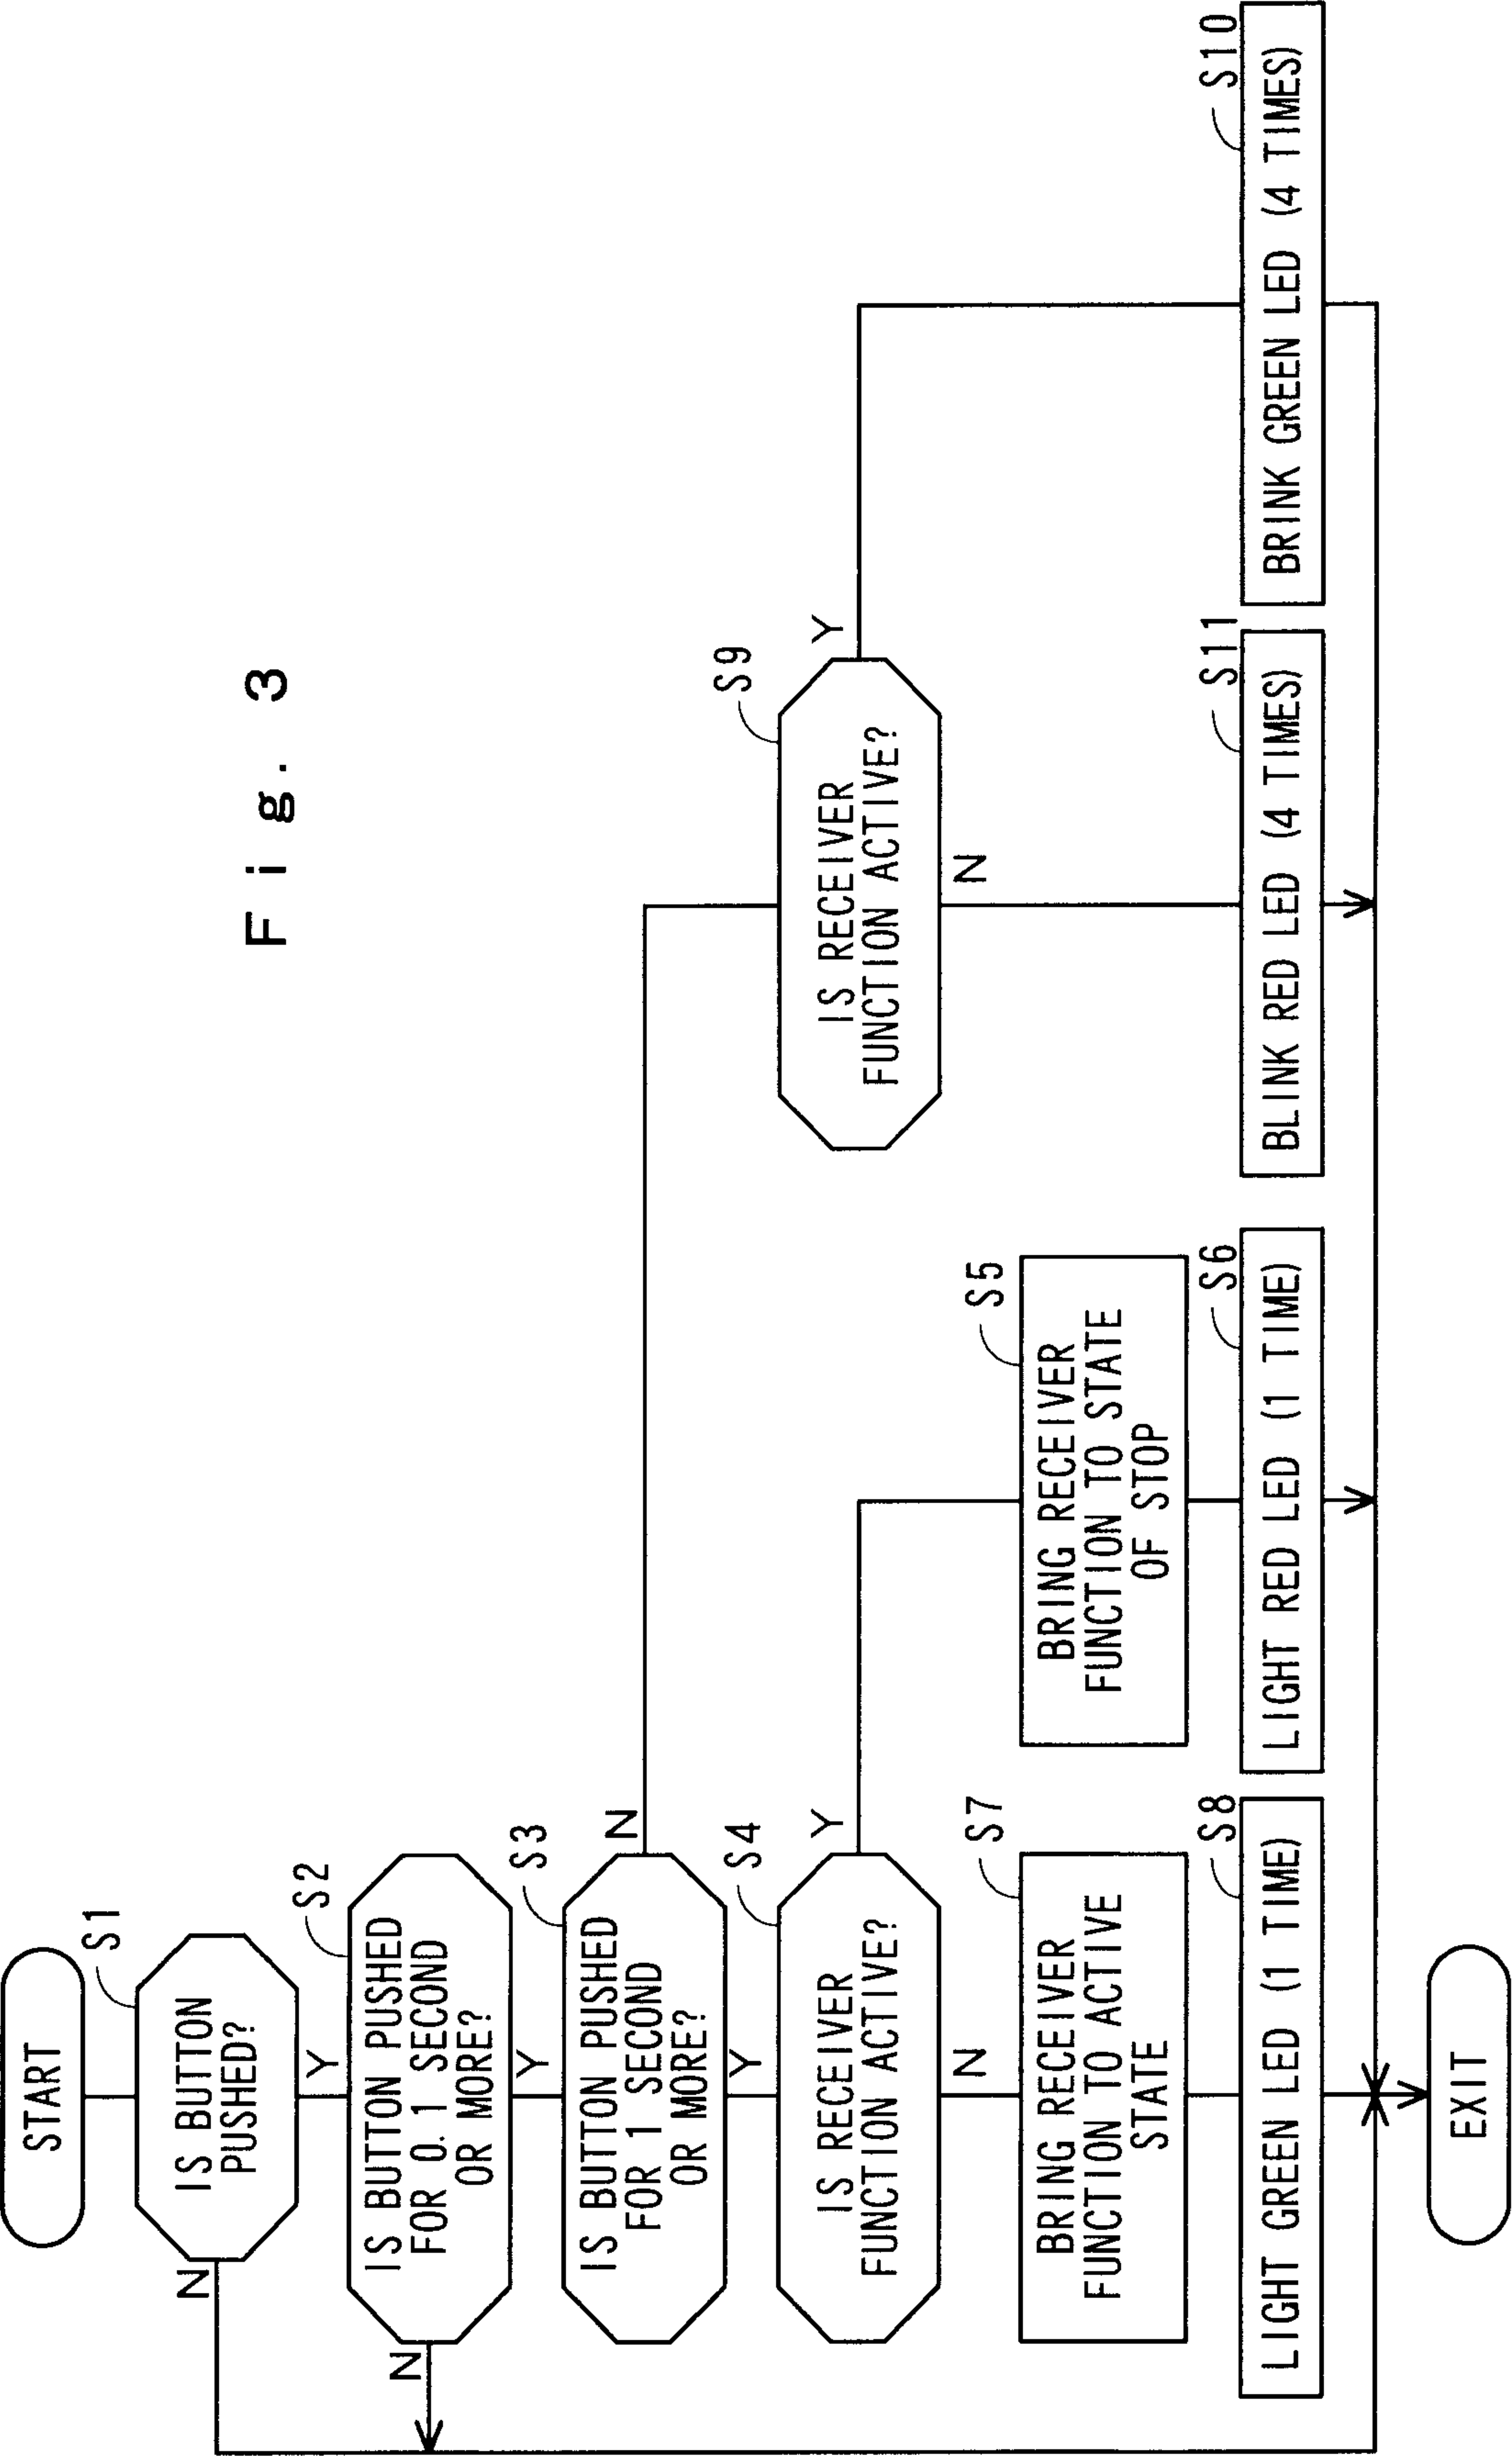

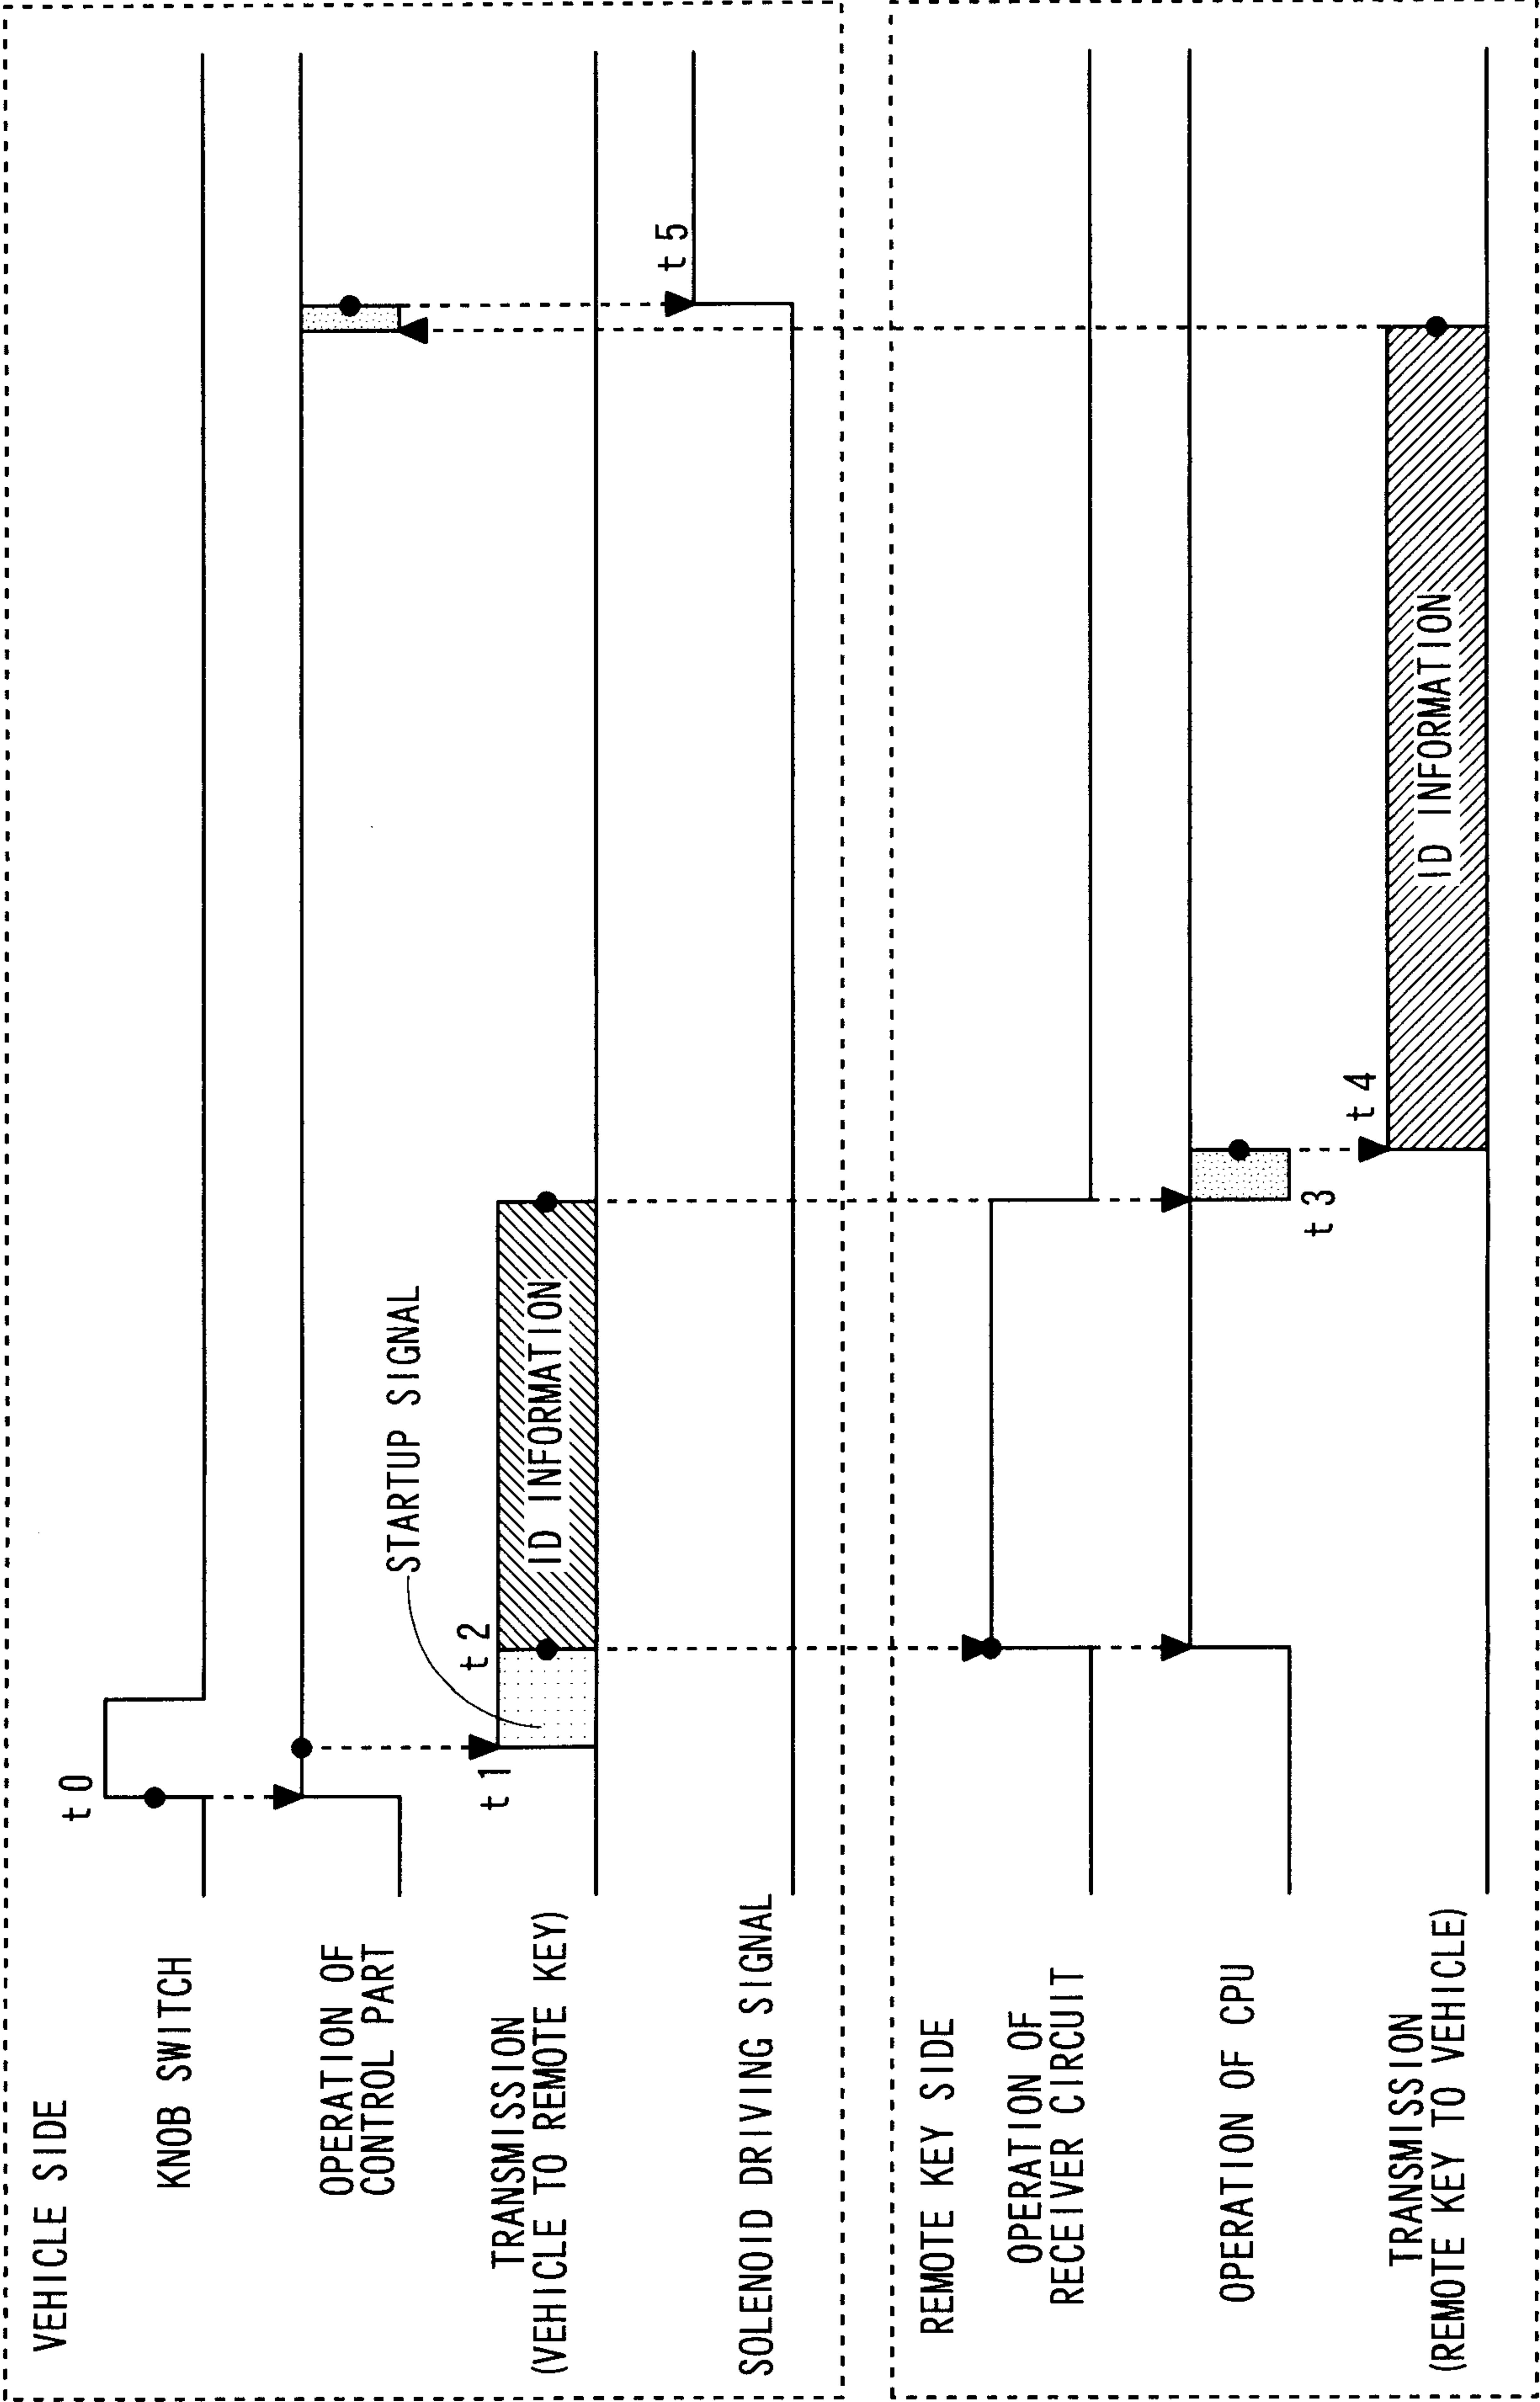

F i g . 6

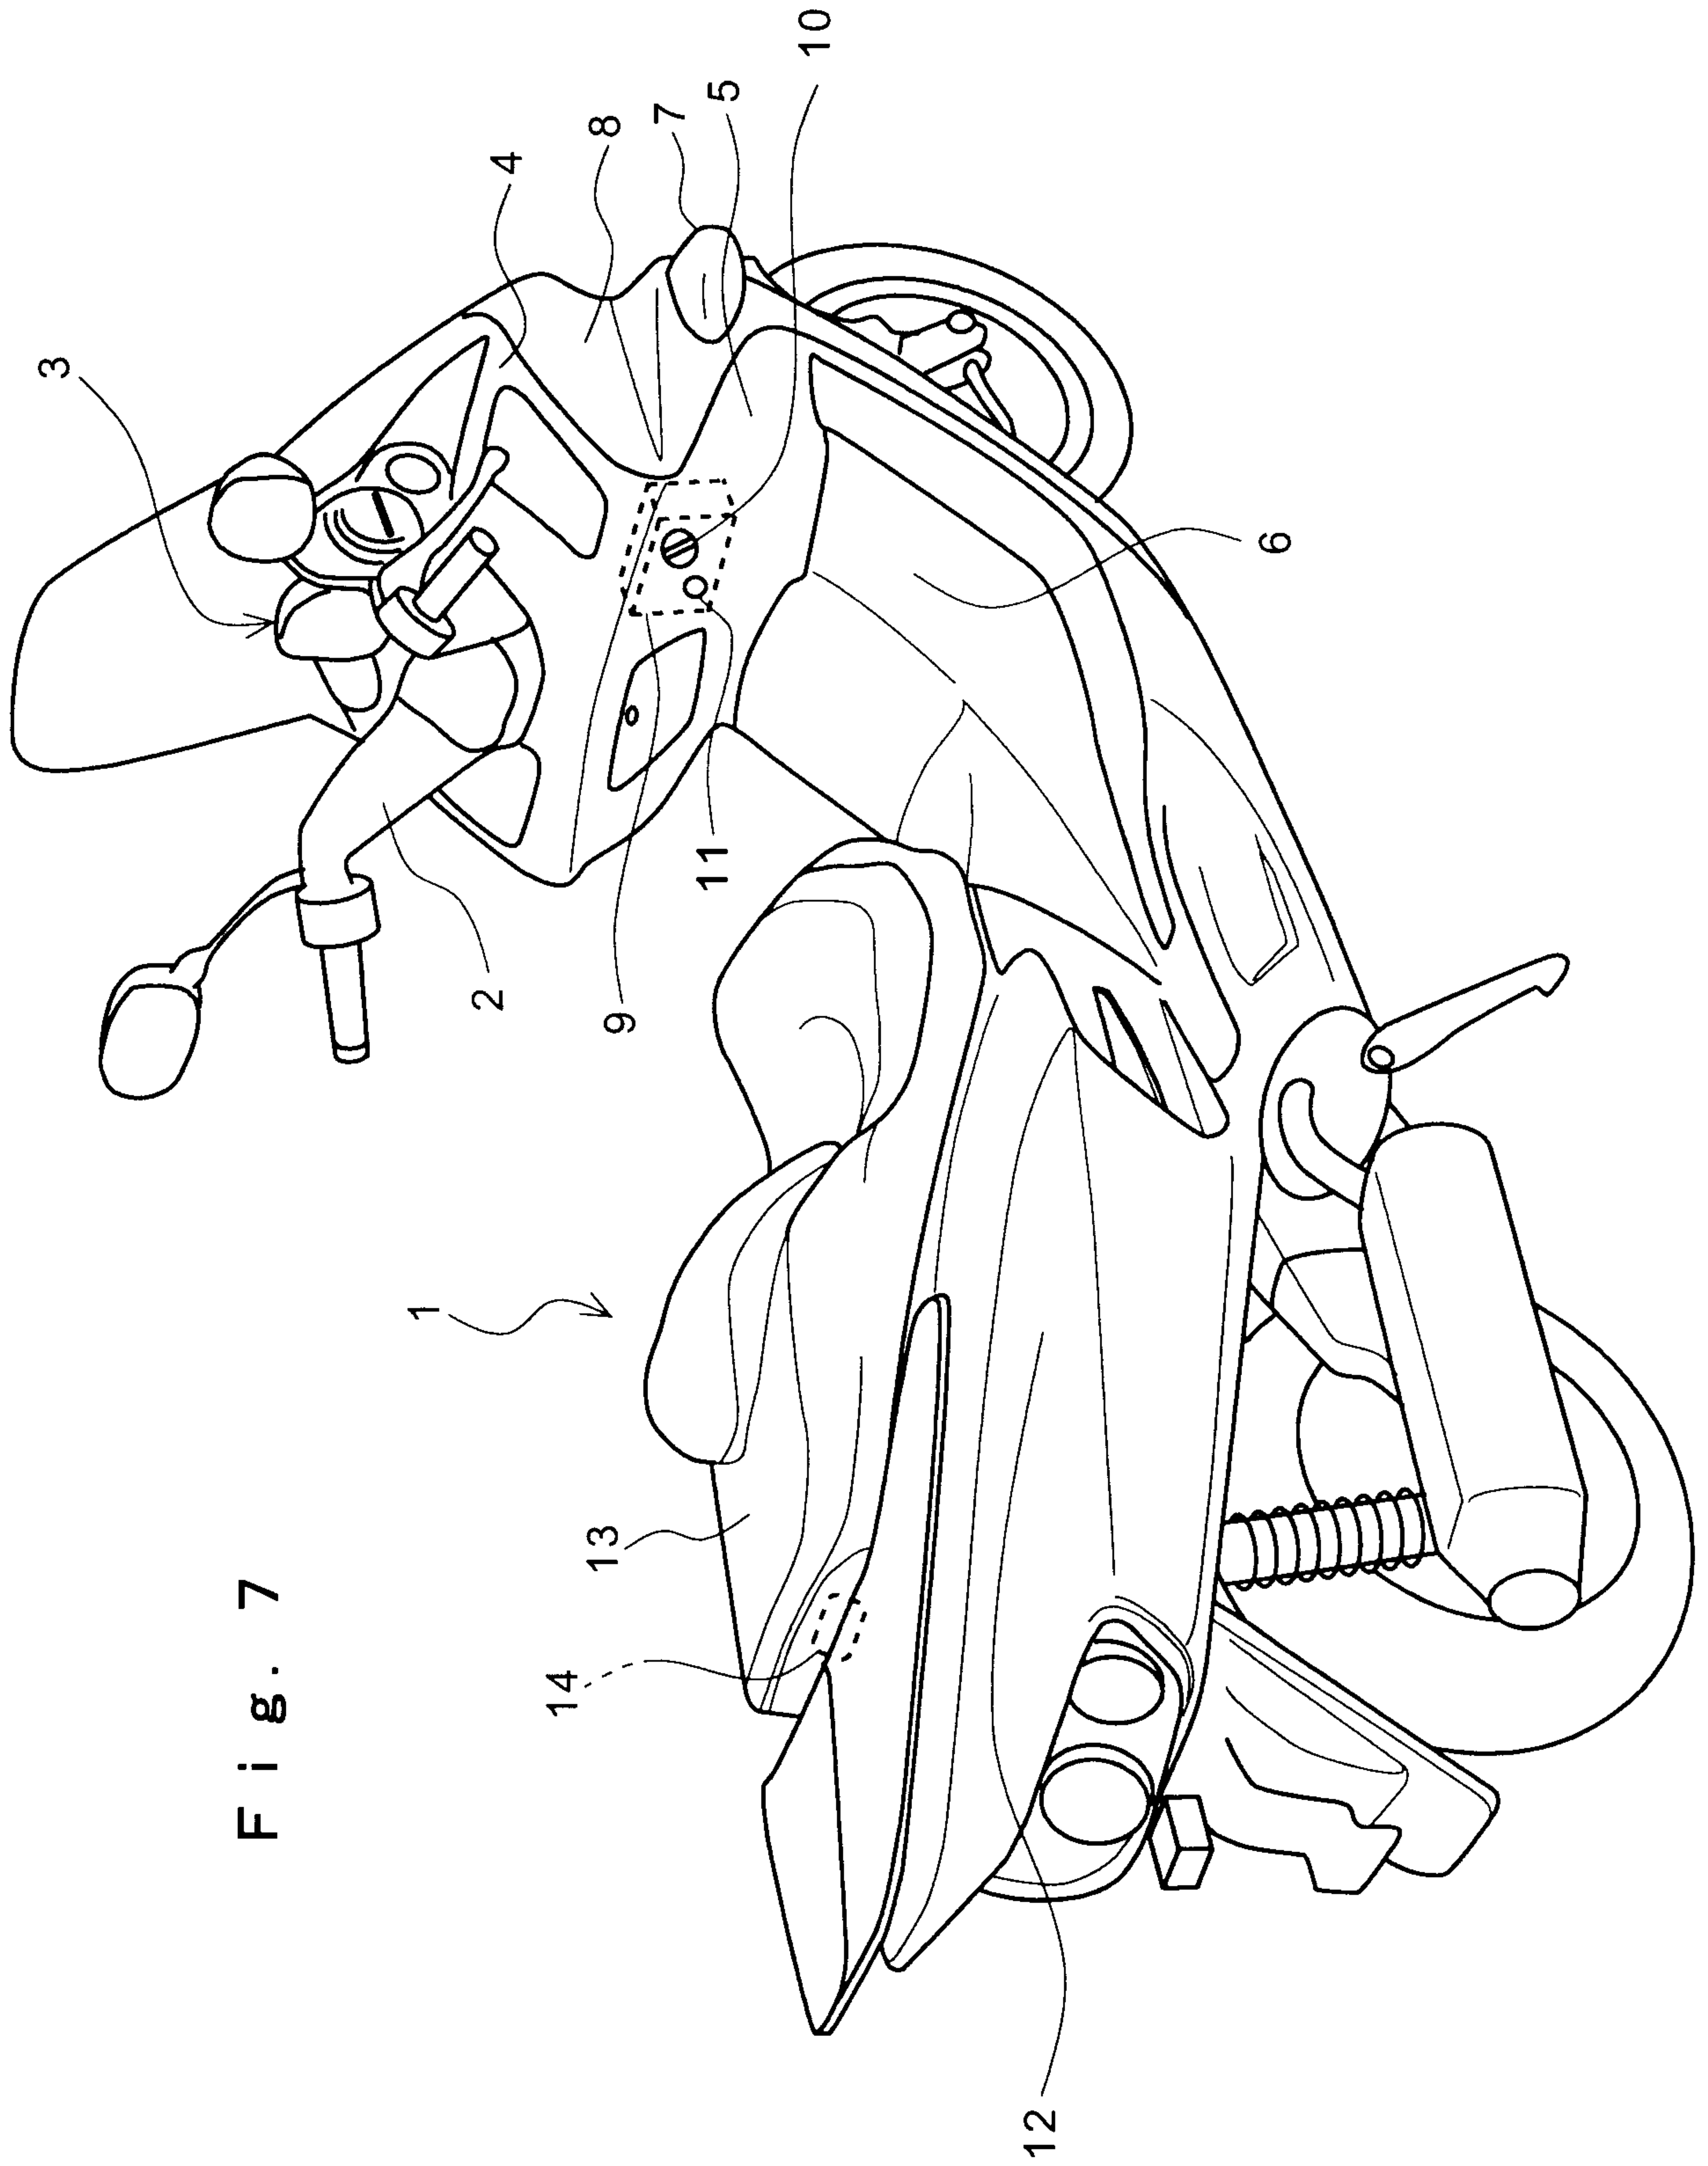


Fig. 7

