

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 628 651 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

03.11.1999 Bulletin 1999/44

(51) Int Cl.⁶: **D06F 39/02**

(21) Application number: **94108421.2**

(22) Date of filing: **01.06.1994**

(54) **Top loading washing machine, with washing agents dispenser in the door**

Obenbeschickbare Waschmaschine mit einer in dem Deckel eingebauten
Waschmittelabgabevorrichtung

Machine à laver à chargement par le haut comportant un distributeur de produits de lavage dans son
couvercle

(84) Designated Contracting States:

DE ES FR GB IT

(30) Priority: **07.06.1993 IT TO930406**

(43) Date of publication of application:

14.12.1994 Bulletin 1994/50

(73) Proprietor: **Merloni Elettrodomestici S.p.A.**

60044 Fabriano (AN) (IT)

(72) Inventors:

- **Bongini, Dino**
I-60044 Fabriano (AN) (IT)
- **Duri, Sandro**
I-62020 Fiuminata (MC) (IT)

(56) References cited:

EP-A- 0 083 532	EP-A- 0 128 073
DE-A- 2 804 036	DE-B- 1 096 319
FR-A- 1 519 399	FR-A- 2 455 113
FR-A- 2 590 917	US-A- 4 043 158

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 628 651 B1

Description

[0001] The present invention relates to a top loading laundry washing machine comprising a door being movable between a substantially vertical position for loading, and a substantially horizontal position, for operation, the lower part of the door being provided with a washing agents dispensing device.

[0002] As is known, in the washing machines of the cited type the loading and unloading of laundry to be washed is realized through an aperture obtained in the superior wall of the cabinet of the machine, which faces a corresponding aperture present in the superior part of the washing chamber; the basket of the machine, assembled so as to revolve within the chamber, also presents an opening, that can be closed with appropriate means; said opening in the loading/unloading phases of the laundry is made to be found at the top position, by way of known means.

[0003] The abovementioned aperture obtained in the superior wall of the cabinet of the machine is apt at being closed by a door, generally hinged along the rear side of the latter, and being movable between a substantially vertical position for loading, and a substantially horizontal position, of operation and closure.

[0004] In the described type of machine it is known to provide on the lower part of the door a dispensing device, able to provide different kinds of washing agents, such as detergents and additives in powder and/or liquid form; such known devices are provided for carrying out the delivery of detergents, generally in powder, and/or of additives, generally liquid softeners, in different established times, under the control of the programmer, or timer, of the laundry washing machine.

[0005] The realisation of such top loading washing machines, and the realisation of dispensers used within the same, is generally shown to be complicated, expensive, and at times unreliable.

[0006] For example, from the document EP-A-83.532 a dispenser of the type described is known, comprising two distinct containers for the washing agents, obtained on the lower surface of the door. Such containers, of a cylindrical form, provide loading thresholds which define the maximum dose of the agents that can be contained within. The machine further comprises two nozzles apt at creating, with water coming from the water mains, tangential jets respect the cylindrical wall of the two containers, so as to generate a circular movement of water within the containers themselves and to create as a consequence a vortex that lifts and moves the washing agent over the said threshold level, thus causing it to fall in the washing chamber of the machine.

[0007] Such solution, however, is shown to be complicated, above all due to the difficulty of controlling and conveying the various jets of water necessary for obtaining the removal of the washing agents.

[0008] A dispensing device of the same kind is known from the document EP-A-213.385, whereby appropriate

conduits are provided in the door for feeding water coming from the water mains to distinct compartments of the washing agents, and a nozzle for the inlet of water to such conduits, movable under the control of the machine. Such solution also, even though better than the other, has the risk of blockage and it is however shown to be complicated and expensive for obtaining a satisfying removal of the various washing agents.

[0009] From document FR-A-2.455.113 the taking advantage of the rotation of the basket of a laundry washing machine is known for creating a vortex of water that removes the washing agents from the compartments obtained in a double door. In such solution, water enters the containers of the agents through appropriate apertures obtained in a first door, covered in use by a second door, to then flow in the washing chamber with the relative washing agent through a siphon.

[0010] Such solution also presents drawbacks, generally due to the difficulty of directing the flow of water produced by the rotation of the basket in the cited opening of the door; such system, apart from complicating the realisation of the door, also has blockage risks and cannot then guarantee the complete removal of the washing agents.

[0011] From DE-A-2.804.036 a top loading washing machine is known, comprising a door in the lower surface of which a detergent dispenser is provided, which allows the detergent to fall by gravity towards the washing chamber of the machine. The dispenser comprise a compartment for receiving a washing agent in powder form, which has an aperture facing the washing chamber, when the door is in its closed position. Occlusion means are provided for said aperture, which are made to open by way of an appropriate actuating organ controlled by the programming device of the machine, said occlusion means being realised by a strip of fabric which can be wound onto a spring actuated sprocket.

[0012] From FR-B-1.519.399 a top loading washing machine is also known, wherein the detergent dispenser comprises an open receptacle fixed to the lower surface of the door; the detergent delivery towards the washing chamber of the machine is realised through a nozzle, which directs a jet of water within said receptacle.

[0013] The aim of the present invention is that of overcoming the aforementioned drawbacks, in relation to top loading washing machines equipped with a dispenser of washing agents arranged on the lower part of the door, and in particular to indicate such a machine that is functional, of a simple and economical realisation, and reliable in all conditions of use.

[0014] In view of such aims, the present invention has as its subject a top loading laundry washing machine, having the characterising features of the annexed claim 1.

[0015] Further aims and advantages of the present invention will result in being clear from the detailed description and annexed drawings, supplied purely as an explanatory and nonlimiting example, wherein:

- figure 1 represents a partial and schematic section of the laundry washing machine subject of the present invention, with the loading door open;
- figure 2 represents a partial and schematic section of the laundry washing machine of figure 1, with the loading door closed;
- figure 3 represents a partial and schematic section of the laundry washing machine subject of the invention, with the loading door open, in a possible variant embodiment;
- figure 4 represents a partial and schematic section of the laundry washing machine of figure 3, with the loading door closed.

[0016] With the expression washing agent, when not expressly specified, it is meant form herein on any substance added to the washing water, such as a detergent, softener, whitener, etc.

[0017] In the cited figures, 1 indicates as a whole the cabinet of a top loading laundry washing machine; 2 indicates the door of the machine, hinged in a point 3 and destined to close a top loading aperture 4 of the cabinet 1; 5 partially indicates the programming device, or timer, of the machine; 6 indicates the washing chamber of the laundry washing machine, while 7 indicates its basket, that rotates around a horizontal axis; the basket 7 is equipped with an aperture that, during the functioning of the machine is closed by way of appropriate mobile flaps 8 and 9, which are in themselves known. Between the mouth of the washing chamber and the loading aperture 4 a bellow type seal 10 is present, for instance made of rubber.

[0018] With 11 a plastic box-like element is indicated, applied to the lower surface of the door 2.

[0019] Advantageously the geometry of the superior part of the laundry washing machine has been chosen so as to allow its use for the simple gathering of dirty laundry; in particular the size of the element 11 and the flaps 8 and 9 (such flaps are of different lengths), the disposition of the loading aperture 4 and that of the seal 10, are chosen so as to allow the closure of the door 2 even when the opening/closure flaps 8 and 9 of the basket 7 are raised (as can be seen from the dotted lines of figure 4); such measure therefore allows, when the machine is off, to introduce to the basket, over time, the laundry to be washed, without having to always leave the door 2 open, or without the necessity of having to open the door 2 and the flaps 8 and 9 every time.

[0020] The frontal part of the element 11 has a recess apt at housing a washing agent dispenser 12, comprising at least one single-dose compartment for the washing agent (detergent or rinsing additive), equipped with a small flap, which is made to open at an opportune moment of the washing phase.

[0021] The dispenser 12 is, in the illustrated case, fastened in the recess of element 11 by way of snap fittings, in a position slightly inclined respect the door 2.

[0022] For simplifying the present description it is as-

sumed that the body of the dispenser 12 comprises a single compartment, for containing an appropriate single dose of detergent of a powder form. Several of its constructive elements from herein on cited are not illustrated, inasmuch as they are known.

[0023] The cited single-dose compartment, indicated with 13, advantageously has a wall of an inclined profile so as to make easier, in addition to the inclination of the body 12 of the dispenser, the release due to gravity of the detergents; such compartment 13 is equipped with a small entry flap 14, hinged in point 15, equipped with a suitable seal. A spring interacts between the body of the dispenser 12 and the relative small flap 14, apt at bringing the small flap to an open position when a suitable release device, for instance an electromagnetic one, frees a small hooking tooth, directly obtained on the small flap 14. Naturally electric cables are also provided, that connect in a known manner the timer 5 to the actuation device or devices present in the dispenser 12 for releasing the small flap at an appropriate moment.

[0024] The element 11, within the space not used by the dispenser 12, advantageously has a seat 16, apt at housing a spherical washing agent container 17, of the type that can be directly inserted in the basket of the laundry washing machine between the laundry to be washed; when such spherical container 17 is not being used during the washing phase, it can therefore be replaced by the user in the seat 16.

[0025] Finally, 18 indicates one of the laundry dragging elements defined in the basket 7, that has a wall 19, the function of which shall be clarified later in the present description.

[0026] In figure 1, the laundry washing machine is ready for the loading of laundry to be washed.

[0027] As can be seen, the door 2 is vertically open. In such position, the dispenser 12 is facing upwards, with the small flap 14 open, so as that the compartment 13 for containing the detergent, also facing upwards, can be easily filled by the user, in the sense indicated with the arrow A.

[0028] Upon termination of the introduction of laundry and the loading of detergent, the user of the laundry washing machine closes the flaps 8 and 9 of the basket, the small flap 14 of the dispenser 12 (in the sense indicated with the arrow B) and the door 2 of the machine. At this point the start of the washing cycle can be given.

[0029] At an appropriate moment of the washing cycle, the timer 5 commands the electromagnetic release device of the small flap 14 of the compartment 13; its hook is freed and the flap 14, under the action of the spring, automatically opens so as to allow for the release of the detergent; such situation can be seen in figure 2.

[0030] As is seen, in following the opening of the flap 14, the detergent flows due to gravity in the washing chamber, as indicated with the arrow C; as previously mentioned, the release of the detergent is favoured by the inclination of the dispenser 12 and by the profile of the internal wall of the compartment 13; even the slight

vibrations of the machine favour the release of the detergent.

[0031] During rotation of the basket, that takes place in the sense indicated by arrow D, the wall 19 provides for collecting water from the washing chamber, so as to launch upward splashes, in the direction of the dispenser 12. A part of such splashes will therefore enter the compartment 13, as indicated by arrow E, to then drop back into the washing chamber; in this way, therefore, even the minimal quantity of detergent remaining inside the compartment 13 of powder detergent will be removed by the splashes; the fact that the splashes are in the air actually favours the removal of the detergent, due to the braking effect they have when striking the compartment 13.

[0032] Naturally, in a realisation phase, the form, number and dimensions of the walls 19, and the rotational speed of the basket, shall be decided for creating a vortex and splashes of water substantially directed towards the compartment 13 containing the washing agent, but without an excessive need of precision.

[0033] Naturally the dispenser 12 could also be provided with a compartment for containing a second washing agent, for example a liquid softener, that could be substantially identical to that indicated with 13, with a relative flap 14.

[0034] In such a case, upon termination of the actual washing phase, in a successive moment, the timer 5 sends impulses to the release device of the flap of the compartment containing the softener. As before the flap opens and the softener can flow due to gravity in the chamber; also in this case the total removal of the softener is assured by the splashes caused by the wall 19, similar to that described above with reference to powder detergent.

[0035] Finally, once the programmed operation cycle has finished, the user can open the door of the machine for unloading the washed laundry, and the machine will once again be in the condition illustrated in figure 1.

[0036] Figure 3 illustrates a possible variant of the top loading washing machine according to the invention.

[0037] In the case of such variant, as opposed to equipping the basket 7 with walls 19 for generating splashes that strike the compartment or compartments 13 of the dispenser 12, an appropriate nozzle 20 is provided, for instance arranged in the upper part of the seal 10, in a position being remote respect the dispenser 12, but being directed in its position.

[0038] Such nozzle 20 could for example be that provided in the laundry washing machine for charging the washing chamber water coming from the water mains, and that, according to the proposed variant, it can also be advantageously utilised for striking the dispenser 12 with jets of water.

[0039] As is seen in figure 4, according to the proposed variant, after the opening of the small flap 14 the jet 21 exiting the nozzle 20, provides for the total removal of washing agent, fallen or flowed due to gravity in the

washing chamber 6, as previously described.

[0040] Naturally, the jet 21 may be created in various ways; for instance such jet 21 could be obtained by withdrawing the water from the chamber, utilising for this purpose an appropriate drainage pump; with such aims use can for example be made of the artifices for the recirculation of the washing liquid, used for the cleaning of the containers of the dispensers of the known type (note for example US patent US-A-3.896.641).

[0041] It is however clear that the results obtained with the variants illustrated and/or described are the same as those described with reference to figures 1 and 2.

[0042] From the given description the characteristics of the top loading laundry washing machine subject of the present invention are clear, as are clear its advantages.

[0043] According to the inventive idea, the washing agent (detergent or additive be it powder or liquid) flows due to gravity in the washing chamber, therefore without the necessity of having to provide for complicated and expensive feeding runs or liquid drains for the dispensing device. The eventual jet of water that strikes the dispenser of the machine according to the invention is used to guarantee the total removal of the washing agent, therefore the generation of such jet can be realised using simple means, unlike those used in top loading washing machines with an integral dispenser in the door of the known type (in which, moreover, the total removal of the washing agent is not always guaranteed).

[0044] The risk of blockages of the dispensing device of the machine according to the invention is practically eliminated (due to the fact that conduits and siphons, or openings of reduced dimensions are omitted) and its assembly in the realisation phase of the machine is simple and fast.

[0045] It is also to be mentioned that the dispensing device 12 can be equipped with more actuators, each apt at commanding a delivery operation (it can therefore provide actioning devices being separated for the feeding in the chamber of detergents and additives), or equipped with a single actuator for operating in all the delivery cycles, be it for the detergents or for the additives.

[0046] In the same way, the dispenser 12, united to a single-dose compartment for containing the powder detergent, could be provided with a small metering chamber of the liquid additive, associated to a reserve tank, that can be periodically reloaded by the user with known means; in such case the dispenser of the liquid substance would take advantage of the opening and closing movements of the door of the laundry washing machine, horizontal when closed and vertical when open, for loading the liquid additive from the reserve tank to the metering chamber; also in this case the machine's programmer provides for commanding the discharge, at an appropriate moment, of the liquid additive from the metering chamber to the washing chamber of the washing

machine (and the removal of the additive is eventually completed by the jets produced in the above mention manner).

[0047] It is clear that numerous variants are possible to the dispensing device subject of the present invention, without for this departing from the scope of novelty inherent in the innovative idea.

[0048] A possible variant is that of providing means that allow the user to remove at least part of the dispenser 12 for cleaning purposes. With such aim a snap fit fastening means in the recess of the element 11 could be provided, with an appropriate release button.

[0049] In another possible variant, for the liquid washing agent, in the body of the dispenser 12, or even in the space defined by the element 11, a liquid reserve tank (for example a softener) and a small chamber could be obtained, that is found inside of said tank, for the metering of such liquid agent to be delivered. As previously mentioned, during the closure of the door of the washing machine, i.e. during the movement of the door from a position being substantially vertical to a horizontal one; an established quantity of liquid agent contained in the tank is withheld in the metering chamber, from which, at an appropriate moment of the washing cycle, is made to fall in the washing chamber.

[0050] It is however clear that other variants are possible without departing from the inventive idea, as is also clear that in the practical realisation of the invention the various elements described can be substituted by technically equivalent elements.

Claims

1. Top loading laundry washing machine, comprising a door (2) in the lower part of which a washing agents dispenser (12) is provided, comprising at least one compartment (13) for receiving a washing agent, said compartment (13) having an aperture for the loading of said washing agent and its subsequent discharge in a washing chamber (6), occlusion means (14) being provided for said aperture, which are made to open by way of an appropriate actuating organ controlled by the programming device (5) of the machine, wherein following the opening of said occlusion means (14), said washing agent can fall due to gravity within said washing chamber (6), characterised in that:

- said door (2) is movable between a substantially vertical position and a substantially horizontal position and has on its underside a box-like portion (11), being of a plastic material and defining a recess within which the body of said dispenser (12) is at least partly housed, the aperture of said compartment (13) facing upwards when the door (2) is in its substantially vertical position;

- said occlusion means comprise a flap (14) being hinged to the body of said dispenser (13), a elastic means interacting between the body of the dispenser (12) and said flap (14) for bringing said flap (14) to an open position when the latter is released by said actuating organ, said flap (14) being apt at retaining within said compartment (13) detergent either in the powder or the liquid form;
- either the body of the dispenser (12) is fixed within said recess in an inclined position or said compartment (13) has a wall of an inclined profile, for favouring the delivery due to gravity of the washing agent within said washing chamber (6).

2. Top loading laundry washing machine, according to claim 1, characterised in that means are provided for allowing the removal of at least a part of said dispenser (12), for cleaning purposes.

3. Top loading laundry washing machine, according to claim 1, characterised in that means (18-19;20) are provided for directing substantially in correspondence of said compartment (13) jets or splashes of liquid (E;21).

4. Top loading laundry washing machine, according to claim 3, characterised in that said jets or splashes (E;21) are obtained by way of washing liquid present in said washing chamber (6).

5. Top loading laundry washing machine, according to claim 4, characterised in that said jets or splashes (E;21) are produced by the rotation of the laundry basket (7) of the machine.

6. Top loading laundry washing machine, according to claim 5, characterised in that said basket (7) provides for appendices (19), apt at collecting and throwing upwards, in the direction of the dispenser (12), liquid (E) gathered from said washing chamber (6).

7. Top loading laundry washing machine, according to claim 3, characterised in that a nozzle (18), in a position being remote with respect to said dispenser (12), is provided for directing said jets or splashes of liquid (21) towards said compartment (13).

8. Top loading laundry washing machine, according claim 7, characterised in that the liquid exiting said nozzle (20) is water coming from the water mains.

9. Top loading laundry washing machine, according to claims 4 and 7, characterised in that the liquid exiting said nozzle (20) is drawn from said washing chamber (6).

10. Top loading laundry washing machine, according to claim 1, characterised in that a reserve tank for a liquid washing agent and a small chamber for the metering of a single dose of said liquid agent are defined in said box-like element (11) and/or in the body of said dispenser (12).

11. Top loading laundry washing machine, according to at least one of the previous claims, characterised in that a seat (16) is defined in said box-like element (11) apt at housing a washing agent container (17) of the type that can be directly inserted in the basket of the laundry washing machine between the laundry to be washed.

Patentansprüche

1. Toplade-Wäschewaschmaschine mit einer Tür (2), in deren unterem Abschnitt eine Waschmittelabgabeeinrichtung (12) vorgesehen ist, die zumindest ein Fach (13) zur Aufnahme eines Waschmittels besitzt, wobei das Fach (13) eine Öffnung zum Einfüllen des Waschmittels und zum anschließenden Abgeben des Waschmittels in eine Waschkammer (6) aufweist, wobei Okklusionsmittel (14) für die Öffnung vorgesehen sind, welche durch ein geeignetes Betätigungselement geöffnet werden können, das durch eine Programmeinrichtung (5) der Maschine gesteuert wird, und wobei nach dem Öffnen der Okklusionsmittel (14) das Waschmittel infolge der Schwerkraft in die Waschkammer (6) fallen kann,

dadurch gekennzeichnet, daß:

- die Tür (2) zwischen einer im wesentlichen vertikalen Position und einer im wesentlichen horizontalen Position bewegbar ist und an ihrer Unterseite einen schachtelartigen Abschnitt (11) aufweist, der aus einem Kunststoffmaterial hergestellt ist und eine Ausnehmung bildet, innerhalb der der Körper der Abgabeeinrichtung (12) zumindest teilweise aufgenommen ist, wobei die Öffnung des Fachs (13) nach oben weist, wenn sich die Tür (2) in ihrer im wesentlichen vertikalen Position befindet,
- die Okklusionsmittel eine Klappe (14), die an dem Körper der Abgabeeinrichtung (13) schwenkbar angebracht ist, und ein elastisches Mittel aufweisen, welches zwischen dem Körper der Abgabeeinrichtung (12) und der Klappe (14) wirkt, um die Klappe (14) in eine geöffnete Position zu bringen, wenn diese durch das Betätigungsorgan freigegeben wird, wobei die Klappe (14) in der Lage ist, in dem Fach (13) Waschmittel sowohl in flüssiger Form als auch in Pulverform zu halten, und
- entweder der Körper der Abgabeeinrichtung

(12) innerhalb der Ausnehmung in einer geneigten Position angeordnet ist oder das Fach (13) eine Wand mit einem geneigten Profil aufweist, um die Abgabe des Waschmittels in die Waschkammer (6) infolge der Einwirkung von Schwerkraft zu unterstützen.

2. Toplade-Wäschewaschmaschine nach Anspruch 1, **dadurch gekennzeichnet**, daß Mittel vorgesehen sind, um das Entfernen von zumindest einem Teil der Abgabeeinrichtung (12) für Reinigungszwecke zu ermöglichen.

3. Toplade-Wäschewaschmaschine nach Anspruch 1, **dadurch gekennzeichnet**, daß Mittel (18-19;20) vorgesehen sind, um Flüssigkeitsstrahlen oder Flüssigkeitsspritzer (E;21) im wesentlichen korrespondierend zu dem Fach (13) zu führen.

4. Toplade-Wäschewaschmaschine nach Anspruch 3, **dadurch gekennzeichnet**, daß die Strahlen oder Spritzer (E;21) durch die Waschlüssigkeit, die sich in der Waschkammer (6) befindet, erzeugbar sind.

5. Toplade-Wäschewaschmaschine nach Anspruch 4, **dadurch gekennzeichnet**, daß die Strahlen oder Spritzer (E;21) durch die Drehung des Waschkorbes (7) der Maschine erzeugbar sind.

6. Toplade-Wäschewaschmaschine nach Anspruch 5, **dadurch gekennzeichnet**, daß der Korb (7) Ansätze (19) aufweist, die in der Lage sind, Flüssigkeit (E), welche aus der Waschkammer (6) aufgenommen wird, zu sammeln und in Richtung der Abgabeeinrichtung (12) nach oben zu schleudern.

7. Toplade-Wäschewaschmaschine nach Anspruch 3, **dadurch gekennzeichnet**, daß eine Düse (18) in einer Position entfernt von der Abgabeeinrichtung (12) zum Hinlenken der Flüssigkeitsstrahlen oder Flüssigkeitsspritzer (21) in Richtung auf das Fach (13) vorgesehen ist.

8. Toplade-Wäschewaschmaschine nach Anspruch 7, **dadurch gekennzeichnet**, daß die Flüssigkeit, die aus der Düse (20) austritt, Wasser ist, das aus der Wasserleitung stammt.

9. Toplade-Wäschewaschmaschine nach den Ansprüchen 4 und 7, **dadurch gekennzeichnet**, daß die aus der Düse (20) austretende Flüssigkeit aus der Waschkammer (6) abgezogen wird.

10. Toplade-Wäschewaschmaschine nach Anspruch 1, **dadurch gekennzeichnet**, daß ein Reservetank für ein flüssiges Waschmittel und eine kleinere

Kammer für das Abmessen einer einzelnen Dosis des flüssigen Waschmittels in dem schachtelartigen Element (11) und/oder in dem Körper der Abgabeeinrichtung (12) ausgebildet sind.

11. Toplade-Wäschewaschmaschine nach zumindest einem der vorstehenden Ansprüche, **dadurch gekennzeichnet**, daß ein Sitz (16) in dem schachtelartigen Element (11) ausgebildet ist, der in der Lage ist, einen Waschmittelbehälter (17) von der Art aufzunehmen, der direkt in den Korb der Wäschewaschmaschine zwischen die zu waschende Wäsche eingesetzt werden kann.

Revendications

1. Machine à laver le linge à chargement par le haut, comportant une porte (2) dans la partie inférieure de laquelle est prévu un distributeur d'agent de lavage (12), comportant au moins un compartiment (13) destiné à recevoir un agent de lavage, ledit compartiment (13) ayant une ouverture pour le chargement dudit agent de lavage et son évacuation consécutive dans une chambre de lavage (6), des moyens d'occlusion (14) étant prévus pour ladite ouverture, qui sont amenés à s'ouvrir au moyen d'un organe d'actionnement approprié commandé par le dispositif de programmation (5) de la machine, dans laquelle, à la suite de l'ouverture desdits moyens d'occlusion (14), ledit agent de lavage peut tomber du fait de la gravité dans ladite chambre de lavage (6), caractérisée en ce que :

- ladite porte (2) est mobile entre une position sensiblement verticale et une position sensiblement horizontale et a sur son côté inférieur une partie en forme de boîte (11) qui est en matière plastique et définissant un renforcement dans lequel le corps dudit distributeur (12) est au moins partiellement logé, l'ouverture dudit compartiment (13) étant dirigée vers le haut lorsque la porte (2) est sa position sensiblement verticale;
- lesdits moyens d'occlusion comportent un volet (14) qui est articulé sur le corps dudit distributeur (13), des moyens élastiques interagissant entre le corps du distributeur (12) et ledit volet (14) afin d'amener ledit volet (14) vers une position ouverte lorsque ce dernier est libéré par ledit organe d'actionnement, ledit volet (14) étant capable de retenir dans ledit compartiment (13) du détergent sous la forme de poudre ou de liquide;
- le corps du distributeur (12) est fixé dans ledit renforcement dans une position inclinée ou bien ledit compartiment (13) possède une paroi d'un profil incliné, afin de favoriser la distribu-

tion du fait de la gravité de l'agent de lavage dans ladite chambre de lavage (6).

2. Machine à laver le linge à chargement par le haut selon la revendication 1, caractérisée en ce que des moyens sont prévus pour permettre le retrait d'au moins une partie dudit distributeur (12), à des fins de nettoyage.
3. Machine à laver le linge à chargement par le haut selon la revendication 1, caractérisée en ce que des moyens (18, 19; 20) sont prévus pour diriger de manière sensiblement en correspondance avec ledit compartiment (13) des jets ou des projections de liquide (E; 21).
4. Machine à laver le linge à chargement par le haut selon la revendication 3, caractérisée en ce que lesdits jets ou projections (E; 21) sont obtenus au moyen du liquide de lavage présent dans ladite chambre de lavage (6).
5. Machine à laver le linge à chargement par le haut selon la revendication 4, caractérisée en ce que lesdits jets ou projections (E; 21) sont produits par la rotation du panier à linge (7) de la machine.
6. Machine à laver le linge à chargement par le haut selon la revendication 5, caractérisée en ce que ledit panier (7) prévoit des appendices (19), capables de collecter et de projeter vers le haut, dans la direction du distributeur (12), du liquide (E) recueilli dans ladite chambre de lavage (6).
7. Machine à laver le linge à chargement par le haut selon la revendication 3, caractérisée en ce qu'une buse (18), dans une position qui est éloignée par rapport au dit distributeur (12), est prévu pour diriger lesdits jets ou projections de liquide (21) vers ledit compartiment (13).
8. Machine à laver le linge à chargement par le haut selon la revendication 7, caractérisée en ce que les liquides sortant de ladite buse (20) est de l'eau provenant de l'adduction.
9. Machine à laver le linge à chargement par le haut selon les revendications 4 et 7, caractérisée en ce que le liquide sortant de ladite buse (20) est prélevé dans ladite chambre de lavage (6).
10. Machine à laver le linge à chargement par le haut selon la revendication 1, caractérisée en ce qu'un réservoir pour un agent de lavage liquide et une petite chambre pour le dosage d'une dose unique dudit agent liquide sont définis dans ledit élément en forme de boîte (11) et/ou dans le corps dudit distributeur (12).

11. Machine à laver le linge à chargement par le haut selon au moins une des revendications précédentes, caractérisée en ce qu'un siège (16) est défini dans ledit élément en forme de boîte (11) afin de renfermer un réservoir d'agent de lavage (17) du type qui peut être directement inséré dans le panier de la machine à laver le linge entre le linge devant être lavé.

5

10

15

20

25

30

35

40

45

50

55

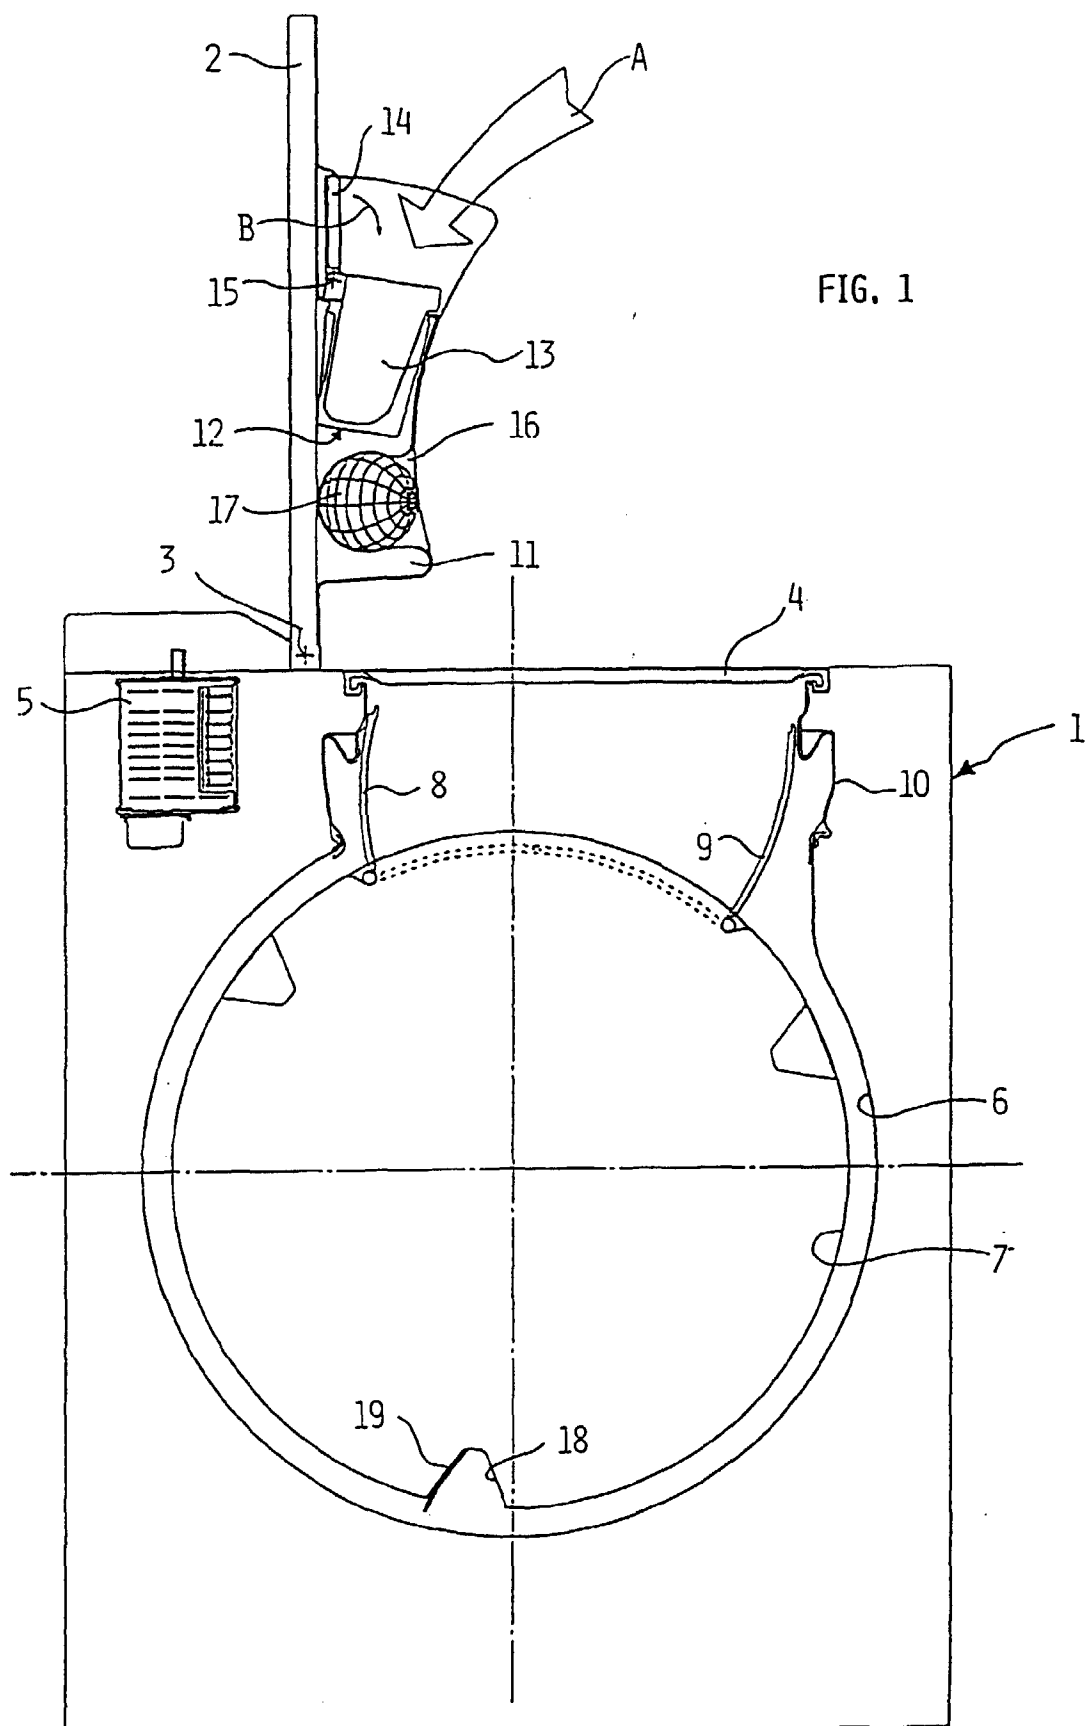
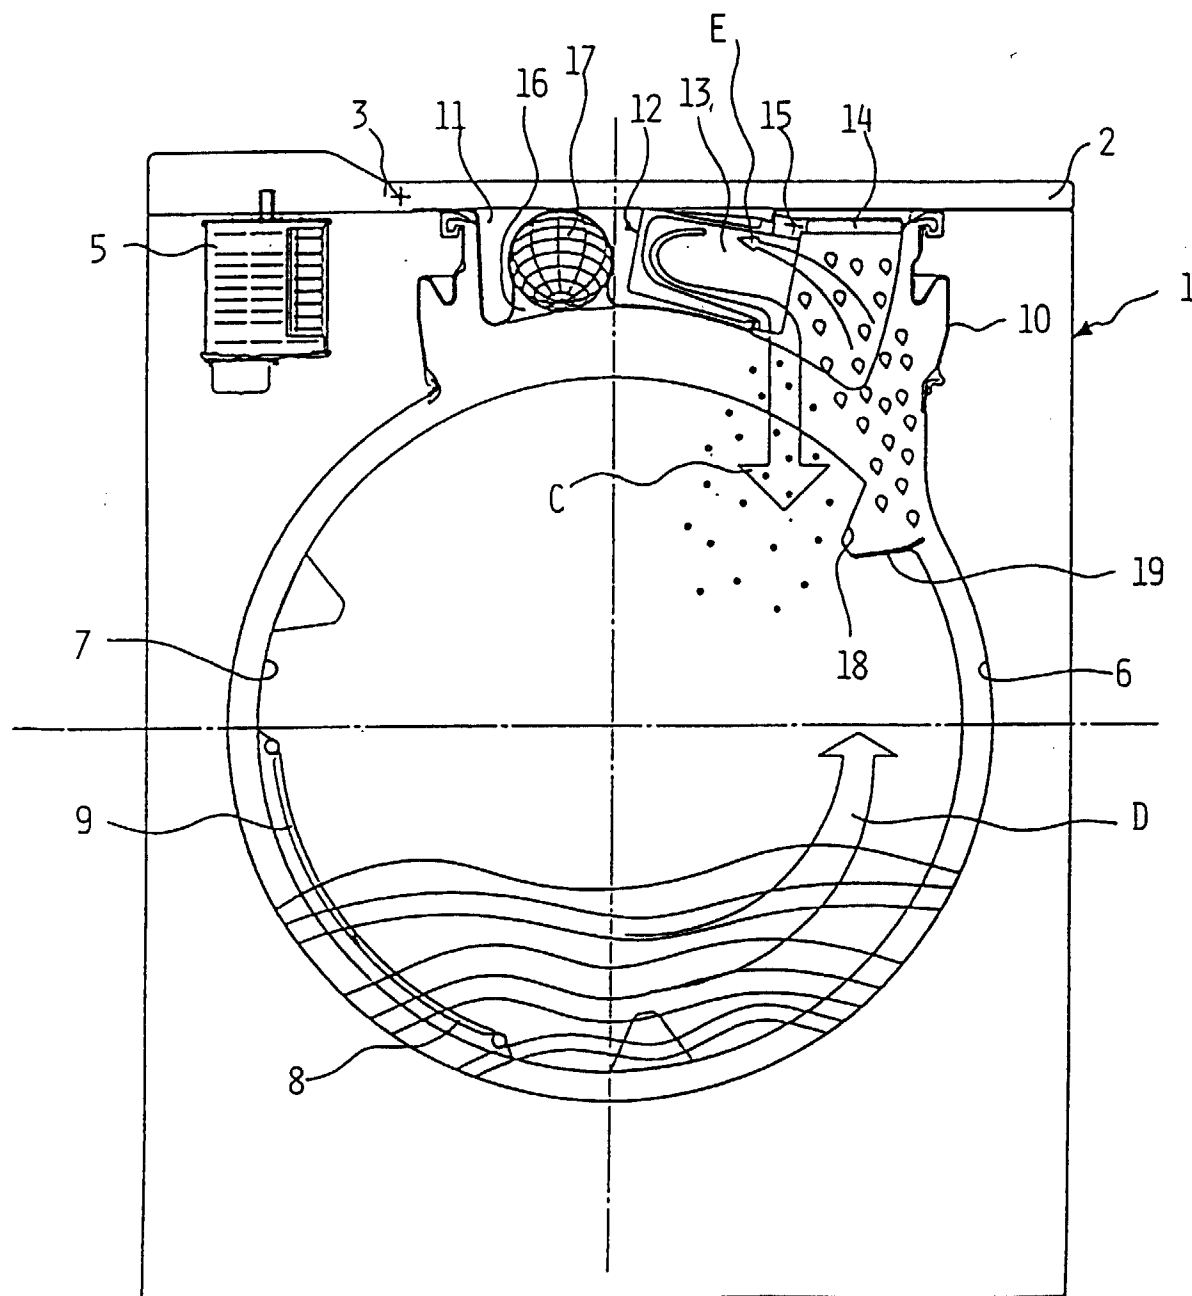


FIG. 2



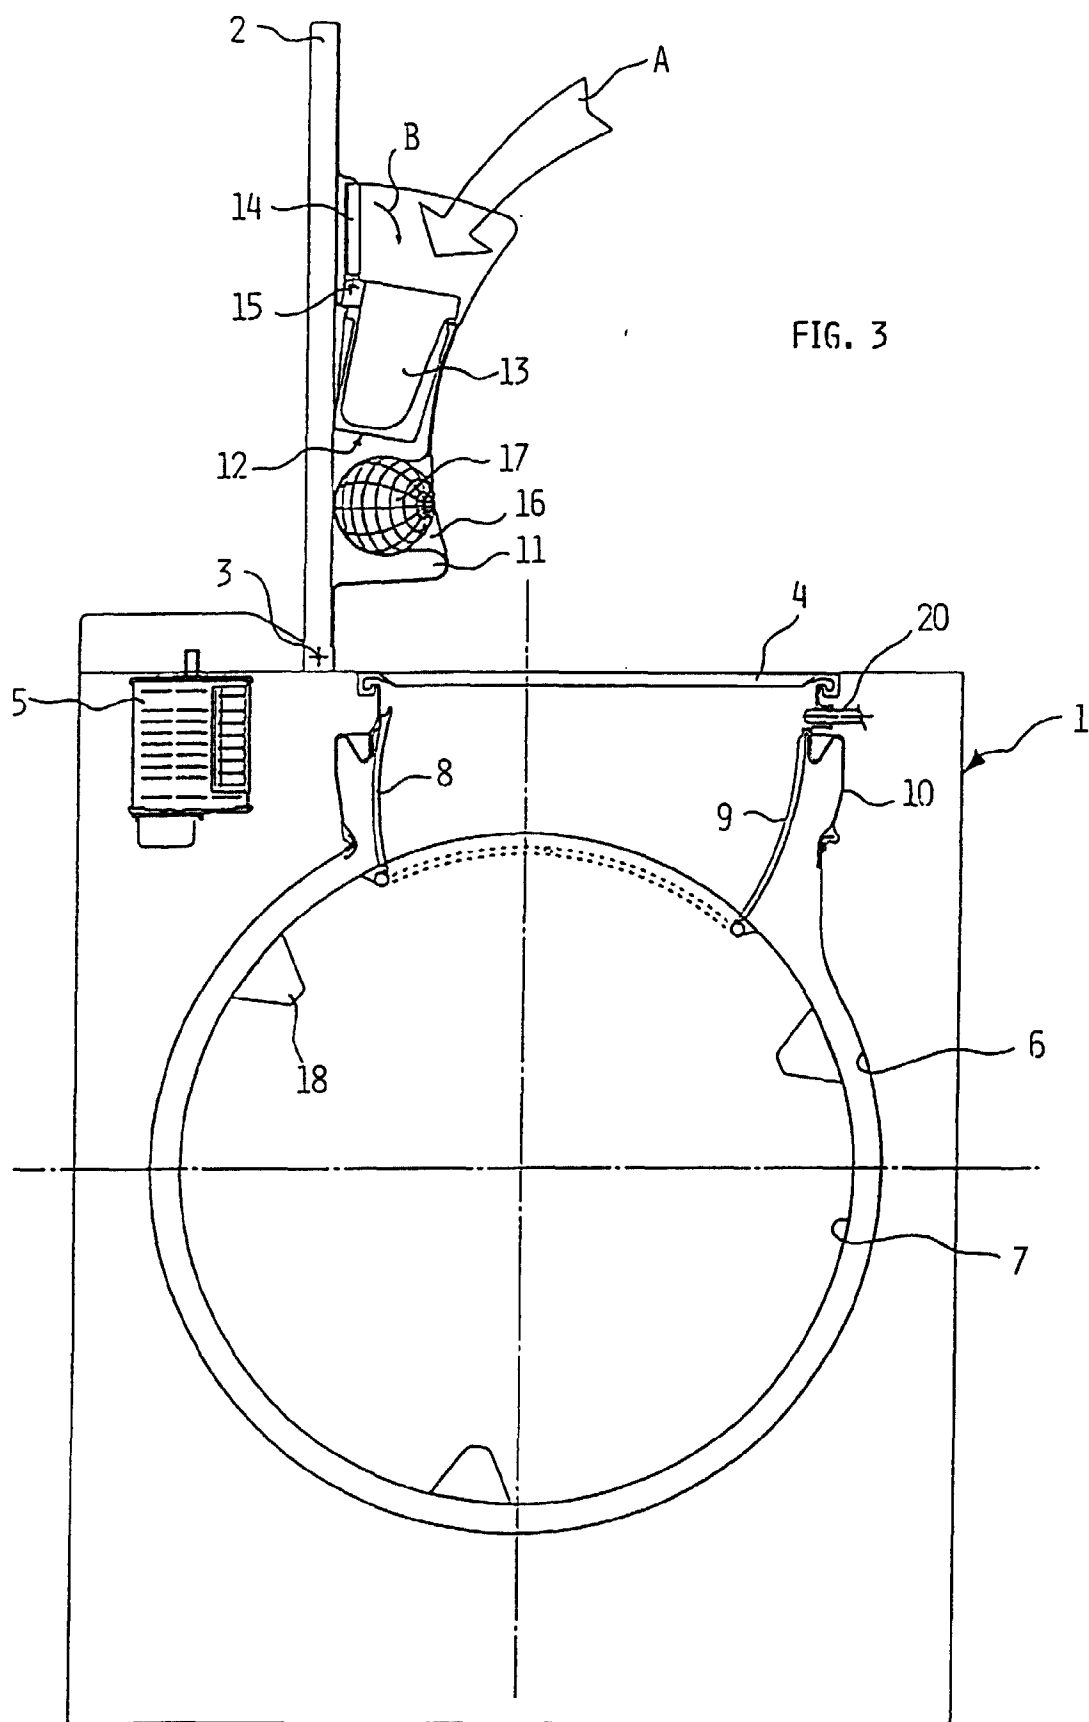


FIG. 4

