

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2003 (20.11.2003)

PCT

(10) International Publication Number
WO 03/095697 A1

(51) International Patent Classification⁷: **C23C 08/20**,
C21D 01/09

(21) International Application Number: PCT/US03/13037

(22) International Filing Date: 28 April 2003 (28.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/140,239 7 May 2002 (07.05.2002) US

(71) Applicant and

(72) Inventor: HUANG, Xiaodi [US/US]; 406 Second Street,
Houghton, MI 49931 (US).

(74) Agent: SIEGEL, Timothy, E.; 1868 Knapps Alley, Suite
206, West Linn, OR 97068-4644 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR MANUFACTURING CLAD COMPONENTS

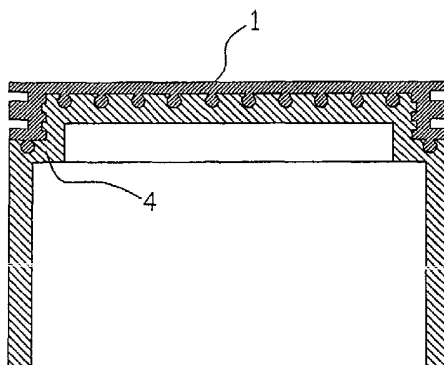

(57) **Abstract:** A method for manufacturing a clad component in which a cladding workpiece having a section (1) comprising a first metal onto which a number of metal beads (2) are rigidly bonded is inserted into a mold. A molten second metal (4) is poured into the mold, where it flows about and covers the beads (2) and is then permitted to cool. This process forms an article made of the second metal (4), which is mechanically interlocked to the beads (2), clad by the first metal (1). Typically the first metal (1) is a high-melting point strong metal, such as steel, and the second metal (4) is a lower-melting point, weaker, but lighter metal, such as aluminum.



WO 03/095697 A1

METHOD FOR MANUFACTURING CLAD COMPONENTS

TECHNICAL FIELD

The present invention is in the field of metal parts
5 forming.

BACKGROUND ART

Driven by the desire to reduce automobile weight and
improve fuel efficiency, the auto industry has dramatically
10 increased aluminum use in automobiles in recent years. To
further reduce weight, more iron and steel components need to
be replaced with aluminum. Aluminum and its alloys have many
attractive properties. Poor wear resistance, however, and low
working temperature limit its potential wider uses. To solve
15 the above noted problems, various methods of manufacturing
lightweight components made of ceramic-reinforced aluminum
metal matrix composites (MMC) or so-called ceramic metal
composites (CMC) have been disclosed. In these methods, molten
aluminum mixed with ceramic particles is poured into a mold to
20 produce a component, or molten aluminum infiltrates a porous
ceramic preform to produce a component. The aluminum MMC does
improve wear resistance, but creates other problems. The
aluminum MMC is very brittle, with about a 90% reduction in
ductility with 10-15 vol.% ceramic particles in an aluminum
25 matrix. As a result, monolithic aluminum MMC components are
more prone to sudden catastrophic failure. This would likely
cause serious liability problems if MMC was used for safety-
sensitive parts such as a brake rotor and drum. In addition,
it is difficult to machine aluminum MMC to final
30 specifications. The SiC or alumina in the aluminum MMC wears
cutting tools very fast. Also, aluminum MMC brake rotors do
not stand the friction heat well, causing adhesive wear and
galling on the rotor rubbing surfaces. Finally, aluminum MMC
material is also expensive.

U.S. Patent 5,183,632 discloses a method of manufacturing an aluminum disc rotor with aluminum composite rubbing surfaces which consists of aluminum and ceramic powders that are bonded to the aluminum rotor body by heating
5 and pressing.

U.S. Patent 5,224,572 discloses a lightweight brake rotor with a thin ceramic coating on rubbing surfaces.

U.S. Patent 5,884,388 discloses a method of manufacturing a friction-wear aluminum part by thermally arc-
10 spraying a mixture of aluminum and stainless steel onto the wear surface.

U.S. Patent Application Pub. No. 2001/0045332 A1 discloses a titanium or aluminum brake disc bonded with stainless steel on the rubbing surfaces by brazing.

15 Japanese Patent Application No. JP-A No. H9-42339 discloses an aluminum brake disc bonded with an alloy steel on the rubbing surfaces by explosive cladding.

DISCLOSURE OF THE INVENTION

20 The present invention is a method for manufacturing a clad component in which a cladding workpiece having a section comprising a first metal onto which a number of metal beads are rigidly bonded is inserted into a mold. A molten second metal is poured into the mold, where it flows about and
25 covers the beads and is then permitted to cool. This process forms an article made of the second metal, which is mechanically interlocked to the beads, clad by the first metal. Typically the first metal is a high-melting point strong metal, such as steel, and the second metal is a lower-
30 melting point, weaker, but lighter metal, such as aluminum.

The foregoing and other objectives, features and advantages of the invention will be more readily understood upon consideration of the following detailed description of

the preferred embodiment(s), taken in conjunction with the accompanying drawings.

5 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows the mechanical interlocking mechanism disclosed by this invention.

FIG. 2 shows the bonding structure of a steel-capped aluminum piston.

10

BEST MODES FOR CARRYING OUT THE INVENTION

A preliminary cladding workpiece **1** that is 0.5-20 mm thick, preferably 1-5mm thick, and made of a strong, high-melting point metal, such as steel, is manufactured by
15 blanking, cutting, bending and/or drawing from a metal sheet. Alternatively, preliminary workpiece **1** may be manufactured by metal casting, powder metallurgy, extrusion, forging, welding, machining, or other means. In another alternative embodiment, workpiece **1** is manufactured from a laminated metal sheet. The
20 laminated metal sheet consists of metal bonded to a "surface material," such as a different metal or a composite consisting of a metal matrix and particles of ceramic or graphite or both, or whisker or fiber reinforcement.

A binder, preferably organic, such as rosin, gum,
25 glue, dextrin, acrylic, cellulose, phenolic or polyurethane, is applied to a portion of the preliminary cladding workpiece **1** (FIG. 1) evenly or in a certain pattern. As an alternative embodiment, the binder is blended with additives. These additives may consist of metal and/or carbon particles in the
30 size range from 0.1-500 μ m, preferably 25-147 μ m, in the binder and additive ratio up to 1:10, preferably either 50:1 to 10:1 or 1:1 to 1:6.

Metal beads **2** (FIG. 1), which may be of either

regular or irregular shapes, adhere on the binder-applied surface **5** of the cladding work piece **1**. The regular or irregular shapes may include spherical, cylindrical, polyhedral, ellipsoidal, T-shape, I-shape, L-shape, V-shape, screw, cone, staple, and other shapes which can generate mechanical interlocking. Equal-size metal spheres of 0.5-20 mm in diameter have been found to yield good results. These metal beads **2** adhere on the binder-bearing surface **5** by a random distribution or in a certain distribution pattern.

Alternatively, binder may be applied to the beads **2**, rather than, or in addition to, the surfaces **5** of the cladding workpiece **1**. The distance between beads is preferably 1.5-10 times of the bead's diameter. As an alternative embodiment, the metal beads **2** adhere on the entire binder-bearing surface **5** in one layer. As another alternative embodiment, the metal beads **2** adhere on the binder-applied surface **5** in more than one layer, with binder applied between the layers to bind the layers of beads together.

The workpiece **1**, now including the binder and the beads **2**, is loaded into a furnace. At an elevated temperature, the binder and possibly a portion of the beads **2** and the cladding workpiece surface material **5**, form a transient metal liquid. The transient metal liquid forms necks **3** (FIG. **1**) on the beads **2**. Due to atomic diffusion of elements in the metal necks to adjacent regions, the metal necks become solid at the elevated temperature. The cross-sectional diameter of a metal neck **3** is smaller than the bead's diameter, preferably $1/3$ - $2/3$ of the bead's diameter. After cooling, the beads **2** are welded onto the preliminary cladding workpiece **1** through the metal necks **3**. As an alternative embodiment, the binder itself forms metal liquid and builds metal necks at an elevated temperature. The metal necks become solid after cooling. As an alternative embodiment, metal beads **2** bonded on the

binder-bearing surface **5** in more than one layer form a porous metal layer on the preliminary cladding workpiece **1**. The beads are held together by the transient metal liquid during heating in a furnace. After cooling, this porous metal layer is firmly
5 bonded on the thin article **1** by way of the solidified transient metal liquid. The pores in the porous metal layer are interconnected.

As an alternative, several workpieces are prepared simultaneously by following the above method using a larger
10 original preliminary cladding workpiece, which is then cut into pieces after the beads are firmly adhered to it. At least some of the pieces are then used as cladding workpieces in the final steps of the process.

Carburizing and nitriding may be conducted on the
15 cladding work piece **1** during heating by controlling the atmosphere of the furnace during the heating procedure. Other heat treatments such as annealing, normalizing, quenching and tempering also can be performed during heating in the furnace.

The cladding workpiece can be further shaped by
20 bending, punching, drawing or welding. The metal beads **2** can be deformed by pressing to form them into shapes better adapted for mechanical interlocking. The cladding workpiece can be coated or plated with a material partially or entirely by chemical vapor deposition, physical vapor deposition,
25 thermal spray coating, plating, spraying, brushing, or dipping. In addition, the cladding workpiece can be treated by flame hardening, laser surface hardening, or electron beam surface hardening.

The cladding workpiece is then inserted into a sand
30 or metal mold. Second metal **4** (FIG. **1**) is melted and cast into this mold to form a component with the cladding workpiece **1**. Any metal casting methods commonly used by the metal casting industry, such as green sand casting, die casting, squeeze

casting, coremaking and inserting, investment casting, lost foam casting, and others, can be used in this invention. Although metallurgical bonding may exist, the first metal surface, including the surface of the beads **2** and the necks **3** and the cladding workpiece surface **5** bonds with the second metal body **4** primarily by mechanical interlocking, such as the second metal catches the necks of beads **3** or penetrates into the pores of the porous layer. The resulting component is machined, if necessary, to produce the final product with the required dimension accuracy and enhanced properties on the working surface/surfaces.

To enhance performance, the critical surface/surfaces can be roughened by sand blasting, drilled, slotted, or machined by other means. To further enhance the surface properties, the critical surface/surfaces can be hardened by chemical vapor deposition, physical vapor deposition, laser surface hardening, or electron beam surface hardening.

FIG. **2** illustrates the structure of a steel-capped aluminum piston.

Dynamometer test results demonstrate that a steel-surfaced aluminum brake rotor produced by the methods described above presents equivalent braking performance in comparison with a cast iron rotor that weighs about twice as much. The steel-surfaced aluminum brake rotor has the same dimensions and was tested under the identical conditions as the cast iron rotor. During a destruction fade test, the steel-surfaced aluminum brake rotor worked until the rotor surface temperature was over 1400°F.

Parts made according to this method are projected for use in various applications for which light weight is desirable, but which also require enhanced surface properties such as wear resistance, thermal barrier, higher operation

temperatures, and a desirable coefficient of friction. These applications include steel surfaced aluminum brake rotors, drums, pistons, gears, army tank tracks and clutch components. Projected applications also include steel surfaced magnesium
5 components, steel surfaced titanium components, and other multiple material systems.

INDUSTRIAL APPLICABILITY

The present invention finds applications in the
10 forming of metal parts having reduced weight for an equal degree of wear resistance. Particular application is found in the automotive industry.

The terms and expressions that have been employed in the foregoing specification are used as terms of description
15 and not of limitation. There is no intention, in the use of such terms and expressions, of excluding equivalents of the features shown and described or portions thereof, it being recognized that the scope of the invention is defined and limited only by the claims which follow.

CLAIMS:

1. A method for manufacturing a clad component comprising:

- 5 (a) providing a cladding workpiece having a section comprising a first metal, said section having an external surface area and wherein a multiplicity of metal beads are rigidly bonded to at least a portion of said external surface area;
- 10 (b) inserting said workpiece into a mold;
- (c) providing a molten second metal; and
- 15 (d) pouring said molten second metal into said mold so that it flows about and covers said beads and permitting said molten second metal to cool, thereby forming an article made of said second metal, which is mechanically interlocked to said beads, clad by
- 20 said first metal.

2. The method of claim 1 wherein said cladding workpiece is provided by being produced in a process comprising:

- 25 (a) providing said preliminary workpiece made of a first metal and having a preliminary workpiece external surface area;
- (b) providing a binder;
- (c) providing a set of metal beads;
- 30 (d) using said binder to adhere said set of metal beads over at least a portion of said preliminary workpiece external surface area; and

(e) heating said preliminary
workpiece and permitting said preliminary
workpiece to cool, wherein said heating and
cooling is sufficient to form a rigid bond
5 between said metal beads and said portion of
said preliminary workpiece external surface
area, thereby forming a final preliminary
workpiece.

10 3. The method of claim 2 wherein said final
preliminary workpiece is used as said cladding workpiece.

4. The method of claim 2 wherein said final
preliminary workpiece is cut into sections, one of said
15 sections being used as said cladding workpiece.

5. The method of claim 2, wherein said binder
includes metal particles.

20 6. The method of claim 2, wherein said binder
includes carbon particles.

7. The method of claim 2, wherein said metal beads
are spheroids.
25

8. The method of claim 2, wherein said step of
heating said workpiece causes necks to form between said beads
and said portion of said external surface area.

30 9. The method of claim 8, wherein the cross-sectional
diameter of said necks is smaller than the diameter of said
beads.

10. The method of claim 2, wherein said step of heating said workpiece also includes carburizing said workpiece.

5 11. The method of claim 2, wherein said step of heating said workpiece also includes nitriding said workpiece.

12. The method of claim 2, wherein said step of heating said workpiece also includes annealing said workpiece.

10

13. The method of claim 2, wherein said step of heating said workpiece also includes normalizing said workpiece.

15 14. The method of claim 1, wherein said mold is a sand mold.

15. The method of claim 1, wherein said mold is a metal mold.

20

16. The method of claim 2, further including a step of machining said final preliminary workpiece.

17. The method of claim 2, further comprising
25 shaping said final preliminary workpiece.

18. The method of claim 2, further comprising deforming said metal beads by pressing said metal beads of said final preliminary workpiece.

30

19. The method of claim 2, further comprising coating said final preliminary workpiece.

20. The method of claim 16, further comprising coating said final preliminary workpiece after machining.

21. The method of claim 1, further comprising
5 machining said clad component to a specified shape having specified surface characteristics.

1/1

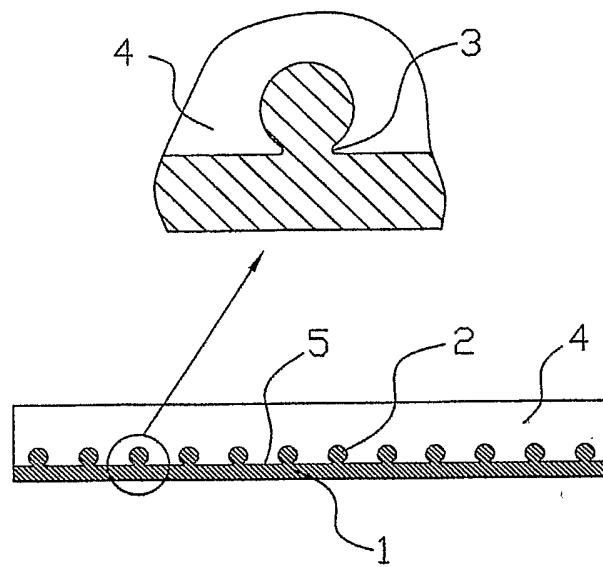


FIG. 1

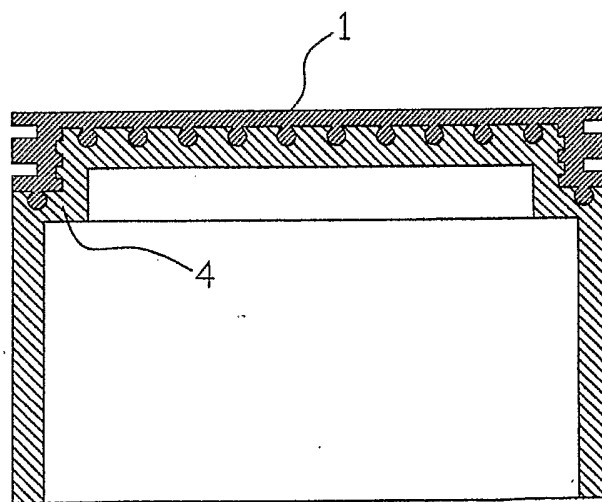


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/13037

A. CLASSIFICATION OF SUBJECT MATTER																				
IPC(7) : C23C 08/20; C21D 01/09																				
US CL : 148/516, 522, 524, 527, 528, 221, 538; 164/98																				
According to International Patent Classification (IPC) or to both national classification and IPC																				
B. FIELDS SEARCHED																				
Minimum documentation searched (classification system followed by classification symbols) U.S. : 148/516, 522, 524, 527, 528, 221, 538; 164/98																				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched																				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Please See Continuation Sheet																				
C. DOCUMENTS CONSIDERED TO BE RELEVANT																				
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																		
Y ✓	US 5,207,776 A (PEARCE) 04 May 1993 (04.05.1993), col. 2, lines 13-44 and Figure 2.	1-21																		
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.																				
<table border="0"> <tr> <td colspan="2">* Special categories of cited documents:</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> <td></td> </tr> <tr> <td>"E" earlier application or patent published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> <td></td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> <td></td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			* Special categories of cited documents:		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone		"E" earlier application or patent published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art		"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family		"O" document referring to an oral disclosure, use, exhibition or other means			"P" document published prior to the international filing date but later than the priority date claimed		
* Special categories of cited documents:		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																		
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"E" earlier application or patent published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family																			
"O" document referring to an oral disclosure, use, exhibition or other means																				
"P" document published prior to the international filing date but later than the priority date claimed																				
Date of the actual completion of the international search 28 June 2003 (28.06.2003)		Date of mailing of the international search report 17 JUL 2003																		
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450 Facsimile No. (703)305-3230		Authorized officer Sikyin Ip Telephone No. 703-308-0661																		

INTERNATIONAL SEARCH REPORT

PCT/US03/13037

Continuation of B. FIELDS SEARCHED Item 3:

CA, EAST

search terms: clad cladding cast casting beads mold mould crucible