



(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.11.2024 Bulletin 2024/45

(51) International Patent Classification (IPC):
H01Q 1/12 (2006.01) H01Q 1/32 (2006.01)
H01Q 9/04 (2006.01) H01Q 19/10 (2006.01)

(21) Application number: 24162051.7

(52) Cooperative Patent Classification (CPC):
H01Q 1/3208; H01Q 1/1271; H01Q 9/0407;
H01Q 9/0457; H01Q 19/10

(22) Date of filing: 26.04.2023

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL
NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA
Designated Validation States:
KH MA MD TN

(72) Inventor: SCHIDL, Stefan
1100 Wien (AT)

(74) Representative: Weiser & Voith
Patentanwälte Partnerschaft
Kopfgasse 7
1130 Wien (AT)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
23170058.4 / 4 456 318

Remarks:

This application was filed on 07.03.2024 as a
divisional application to the application mentioned
under INID code 62.

(71) Applicant: Kapsch TrafficCom AG
1120 Wien (AT)

(54) ONBOARD UNIT FOR A WIRELESS VEHICLE IDENTIFICATION SYSTEM

(57) An onboard unit (1) for wireless communication (2) with a vehicle identification system (3) via radio waves (W, W') comprises a housing (4) with a front side (5) and a rear side (6) and a circuit board (11) therein, an antenna (12) connected to the circuit board (11) and arranged in the housing (4) near the front side (5), and a solar cell (13) supported by the housing (4) near the rear side (6), powering the circuit board (11) and having a photosen-

sitive side (15) and an electrically conductive layer (17), the photosensitive side (15) being visible from outside the housing (4), wherein the antenna (12) is arranged at a distance (D) from the electrically conductive layer (17) of the solar cell (13) such that radio waves (W) penetrating the front side (5) interfere at the antenna (12) with radio waves (W') reflected by the electrically conductive layer (17).

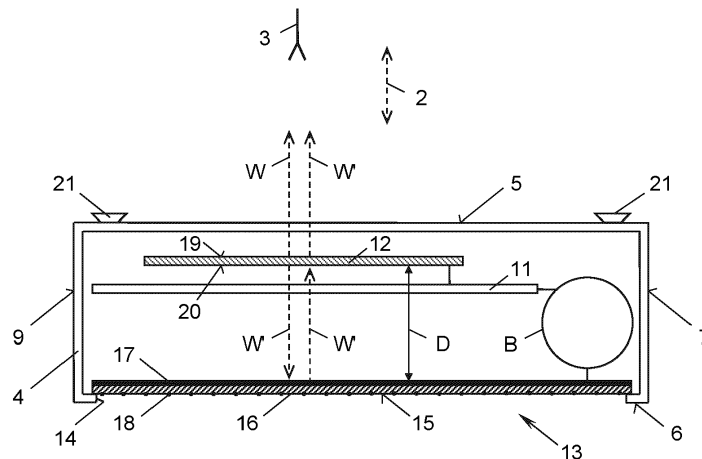


Fig. 2

Description

[0001] The present invention relates to an onboard unit for wireless communication with a vehicle identification system, in particular a road toll, parking space management or access system, via radio waves.

[0002] Onboard units (OBUs) of this type use a wide variety of short range communication standards for wireless communication such as DSRC (Dedicated Short Range Communication), in particular CEN-DSRC, ETSI ITS-G5, WAVE, WLAN (in particular IEEE 802.11x), RFID, NFC etc. Radio waves around 5,8 GHz or 5,9 GHz are commonly used, yielding wave lengths of about 5 cm.

[0003] The onboard units typically have a battery-powered transponder with an antenna for this sort of wireless communication. Recently, solar-powered onboard units have been proposed to extend the battery life or get rid of the battery at all, see, e.g., CN 203567522 U, CN 105469610 A, CN 209730882 U, CN 110751739 A, US 2012/0234922 A1 or US 2006/0244573 A1.

[0004] It is an object of the invention to improve solar-powered onboard units with respect to their wireless communication capabilities.

[0005] This object is achieved by means of an onboard unit for wireless communication with a vehicle identification system via radio waves, comprising:

a housing with a front side and a rear side and a circuit board in the housing,
 an antenna for radio waves which is connected to the circuit board and arranged in the housing near the front side, and
 a solar cell supported by the housing near the rear side, powering the circuit board and having a photosensitive side and an electrically conductive layer, the photosensitive side being visible from outside the housing,
 wherein the antenna is arranged at a distance from the electrically conductive layer of the solar cell such that radio waves penetrating the front side interfere at the antenna with radio waves reflected by the electrically conductive layer, and
 wherein the distance is chosen such that

$$2 \cdot D = n \cdot \lambda \pm \delta,$$

with

D ... being the distance,

n ... being an integer,

λ ... being the wavelength of the center frequency of the radio waves, and

δ ... being in the range of $0 \leq \delta < \lambda/3$.

[0006] The onboard unit of the invention uses the electrically conductive layer of the solar cell as a reflector for the radio waves of the antenna, not only to avoid losing radio power towards the solar cell but to use it as additional steering radio power for communication. The electrically conductive layer of the solar cell redirects the radio waves towards the antenna, improving the antenna gain in a selected direction. The radio waves penetrating the front side constructively interfere at the antenna with the radio waves reflected by the electrically conductive layer, and the antenna gain in a direction normal to the extension of the antenna is increased.

[0007] The inventive onboard unit has thus two distinctive sides, a front side with an antenna for improved radio communication and a rear side with a solar cell exclusively for powering. The front side can face the vehicle's identification system, e.g., radio beacons along or across the road, while the rear side can face the ambient light in the vehicle interior to energise the solar cell. In effect, a solar-powered onboard unit with improved radio communication is provided.

[0008] Preferably, the distance of the electrically conductive layer of the solar cell to the antenna is an integer multiple of half the wavelength of the center frequency of the radio waves, optimising constructive interference in a given frequency band.

[0009] The electrically conductive layer of the solar cell can be any type, e.g., a grid or mesh of wires across the photosensitive side of the cell ("front-contacted solar cell") or, in case of a rear-contacted solar cell, a continuous sheet or coating of conductive material across its rear side. In case of a grid or mesh the holes of the grid or mesh should, of course, be significantly smaller than the wavelength of the radio waves.

[0010] In front-contacted solar cells the electrically conductive layer of the solar cell might even face away from the antenna. Preferably, however, the electrically conductive layer faces the antenna to avoid attenuation of the reflected radio waves used for constructive interference.

[0011] According to a preferred feature of the invention the antenna is a patch antenna parallel to the electrically conductive layer. The distance between the antenna and the electrically conductive layer will then be constant and can

be easily calculated.

[0012] In all embodiments the front side of the onboard unit may optionally be provided with an adhesive strip or a suction cup for attaching the housing to a windscreen of a vehicle. The onboard unit's rear side with the solar cell will then face the vehicle's interior and gather the ambient light in the vehicle, while the front side with the antenna can be

turned to roadside equipment of the vehicle identification system.

[0013] The invention will now be described in further detail by means of an exemplary embodiment thereof under reference to the enclosed drawing, in which show:

Fig. 1 the onboard unit of the invention in a rear view;

Fig. 2 the onboard unit of the invention in a sectional view according to the section II - II in Fig. 1; and

Fig. 3 an exemplary patch antenna for the onboard unit of Figs. 1 and 2 in an exploded perspective view.

[0014] Figs. 1 and 2 show an onboard unit 1 for wireless communication 2 via radio waves with a (symbolically depicted) vehicle identification system 3. The onboard unit 1 may be installed on any sort of vehicle, e.g., a car, truck, train, ship, aircraft etc. The vehicle identification system 3 can be any system which requires a vehicle to be identified, e.g., a road toll system (electronic toll collection system, ETCS), a parking space management system, an access system for restricted areas like cities, country borders etc., a management system for shunting yards, airports aprons, gates for ships, or the like.

[0015] The wireless communication 2 between the onboard unit 1 and the system 3 can be based on any short range communication standard, e.g., a DSRC standard according to CEN, UNI or ETSI ITS-G5, a WAVE standard according to IEEE 802.11x, a WLAN, RFID, NFC or Bluetooth standard or the like. In the present example the onboard unit 1 is a DSRC OBU for an ETCS, and the wireless communication 2 operates in frequency bands around center frequencies of 5,8 GHz or 5,9 GHz, respectively, equivalent to a wavelength λ of about 5 cm.

[0016] The onboard unit 1 has a housing 4 in the form of a small flat box with a front side 5, a rear side 6 and four lateral sides 7 - 10. The housing 4 can have any shape and size as long as it has two opposite sides of which one can serve as a front side 5 and another one can serve as a rear side 6.

[0017] The housing 4 protects and mounts a circuit board 11, e.g., a printed circuit board (PCB), with all the electronics that form an active or passive transponder for the wireless communication 2 with the system 3. An antenna 12 is electrically connected to the circuit board 11. The antenna 12 will in most cases be a patch antenna, i.e., an antenna extending in two dimensions. The antenna 12 may lie parallel to the front side 5 of the housing 4 to save space. For optimum communication the antenna 12 can be nearly as large as the entire front side 5. The antenna 12 is near the front side 5 of the housing 4 and may be supported by the circuit board 11 and/or the housing 4.

[0018] Fig. 3 shows an example of an aperture-coupled patch antenna 12 in form of a metallic layer on a substrate 12' attached to the front (here: top) side of the circuit board 11. The circuit board 11 has a slot going through from its front to its rear (here: bottom) side, where a microstrip connector 12" is used to couple a high frequency signal through the slot 11' into the patch antenna 12 for emission as radio waves.

[0019] The circuit board 11 is powered by a solar cell 13 either directly or via a rechargeable battery B as an energy buffer. The solar cell 13 is supported by the housing 4 near the rear side 6 of the housing 4. The solar cell 13 can be applied onto the rear side 6 of the housing 4. Alternatively, the solar cell 13 can be installed in the housing 4 behind a window 14 in the rear side 6 that leaves at least the photosensitive side 15 of the solar cell 13 visible from outside the housing 4. The window 14 can be closed by a transparent cover or be left open.

[0020] The solar cell 13 can be of any known type, e.g., crystalline or amorphous, rigid or flexible. The solar cell 13 has a photovoltaic layer 16 converting light energy impinging on its photosensitive side 15 into electric energy. To this end the photovoltaic layer 16 is contacted by at least one electrically conductive layer 17. In some cases the electrically conductive layer 17 will be a continuous sheet or coating of conductive material on the side of the solar cell 13 that faces away from its photosensitive side 15, while a grid or mesh of wires 18 at the photosensitive side 15 serves as an opposite electrode for the photovoltaic layer 16. The electrically conductive layer 17 may, however, itself be a grid or mesh of wires or conductors, for example in front-contacted solar cells. Generally speaking the solar cell 13 has at least one electrically conductive layer 17 co-extending with its photosensitive side 15 that is either a continuous conductive sheet or coating or at least a grid or mesh of electrical conductors with a spacing significantly smaller than the wavelength λ so that it acts very much like a continuous electrically conductive layer for that wavelength.

[0021] The antenna 12 is arranged at a distance D from the electrically conductive layer 17 of the solar cell 13. In the present example the antenna 12 is parallel to the electrically conductive layer 17 so that the distance D is constant over the extension of the antenna 12, although different profiles of the distance D may be suited for different types of antennas 12. The antenna 12 and the electrically conductive layer 17 may thus not necessarily be planar as shown but could also be curved, e.g., in parallel.

[0022] The distance D - which includes here also the averaged distance D of a distance profile - is chosen such that the electrically conductive layer 17 acts as a useful reflector for the antenna 12. In particular, the antenna 12 emits/receives both (i) radio waves W from/to its front side 19 that faces the front side 5 of the housing 4 and (ii) radio waves W' from/to

its rear side 20 that faces the solar cell 13. The latter radio waves W' are reflected by the electrically conductive layer 17 and redirected as reflections to the antenna 12. The reflected radio waves W' interfere at the antenna 12 with the radio waves W in constructive interference as the distance D is about half the wavelength λ of the center frequency of the frequency bands of the radio waves W , W' , or any integer multiple thereof. More specifically, for constructive interference the distance D is chosen such that

$$2 \cdot D = n \cdot \lambda \quad (n = 1, 2, 3, \dots) \pm \delta,$$

with δ in the range of $0 \leq \delta < \lambda/3$.

[0023] The front side 5 of the housing 4 may be provided with one or more adhesive strips or suction cups 21 for attachment to, e.g., the inside of a windscreen of a vehicle. The front side 5 will then be directed - through the windscreen - outwards, towards the system 3, whereas the rear side 6 with the photosensitive side 15 of the solar cell 13 will face the vehicle's interior to gather ambient light there.

[0024] The invention is not restricted to the specific embodiments described in detail herein but encompasses all variants, modifications and combinations thereof which fall into the scope of the appended claims.

Claims

1. An onboard unit for wireless communication with a vehicle identification system via radio waves, comprising:

a housing (4) with a front side (5) and a rear side (6),

a circuit board (11) in the housing,

an antenna (12) for radio waves (W , W') which is connected to the circuit board (11) and arranged in the housing (4) near the front side (5), and

a solar cell (13) supported by the housing (4) near the rear side (6), powering the circuit board (11) and having a photosensitive side (15) and an electrically conductive layer (17), the photosensitive side (15) being visible from outside the housing (4),

wherein the antenna (12) is arranged at a distance (D) from the electrically conductive layer (17) of the solar cell (13) such that radio waves (W) penetrating the front side (5) interfere at the antenna (12) with radio waves (W') reflected by the electrically conductive layer (17),

characterised in that the distance (D) is chosen such that

$$2 \cdot D = n \cdot \lambda \pm \delta,$$

with

D ... being the distance,

n ... being an integer,

λ ... being the wavelength of the center frequency of the radio waves (W), and

δ ... being in the range of $0 \leq \delta < \lambda/3$.

2. The onboard unit according to claim 1, **characterised in that** the distance (D) is an integer multiple of half the wavelength (λ) of the center frequency of the radio waves (W , W').

3. The onboard unit according to claim 1 or 2, **characterised in that** the electrically conductive layer (17) of the solar cell (13) faces the antenna (12).

4. The onboard unit according to any one of claims 1 to 3, **characterised in that** the antenna (12) is a patch antenna which is parallel to the electrically conductive layer (17).

5. The onboard unit according to any one of claims 1 to 4, **characterised in that** the front side (5) is provided with an adhesive strip or a suction cup (21) for attaching the housing (4) a windscreen of a vehicle.

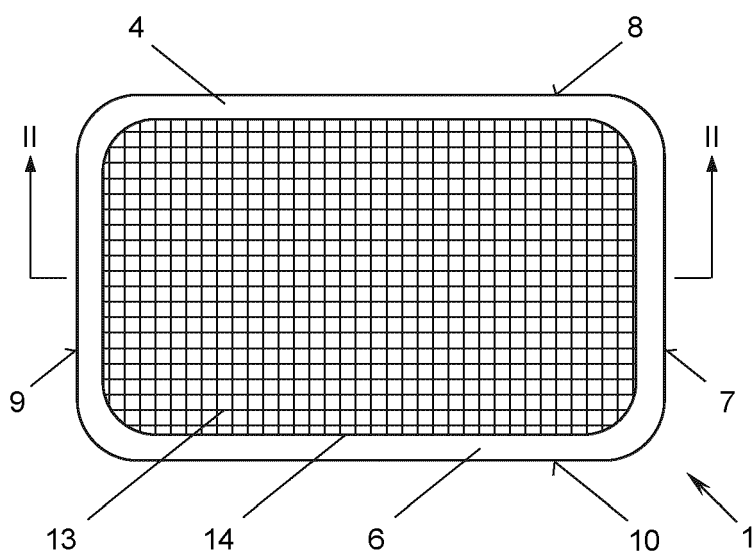


Fig. 1

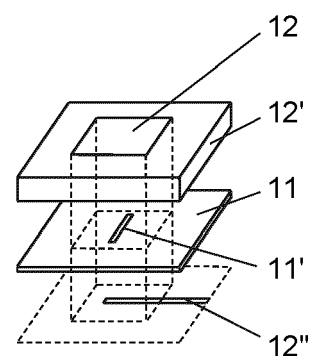


Fig. 3

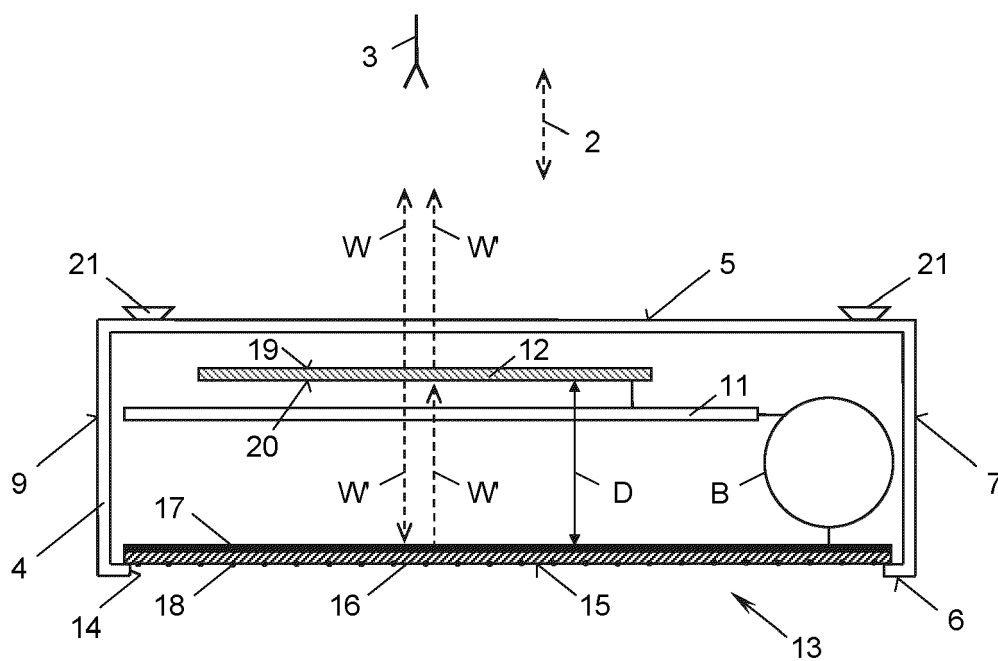


Fig. 2



EUROPEAN SEARCH REPORT

Application Number

EP 24 16 2051

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2006/244573 A1 (WENDLER STEVE [US]) 2 November 2006 (2006-11-02)	1,3	INV. H01Q1/12
Y	* paragraph [0014] - paragraph [0029];	5	H01Q1/32
A	figures 1,3a *	2,4	H01Q9/04 H01Q19/10
Y	US 2012/181859 A1 (NAGY OLIVER [AT] ET AL) 19 July 2012 (2012-07-19)	5	
A	* paragraph [0018] *	1-4	
Y	GB 539 979 A (EUGENE FRANCIS MCDONALD) 1 October 1941 (1941-10-01) * page 1 - page 4; figures 1,9 *	5	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01Q
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 17 June 2024	Examiner Collado Garrido, Ana
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 24 16 2051

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-06-2024

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006244573 A1	02-11-2006	US 2006244573 A1	02-11-2006
		WO 2006096670 A2	14-09-2006
US 2012181859 A1	19-07-2012	CA 2772086 A1	28-04-2011
		DK 2320383 T3	10-09-2012
		EP 2320383 A1	11-05-2011
		ES 2388564 T3	16-10-2012
		PL 2320383 T3	28-09-2012
		PT 2320383 E	06-08-2012
		SI 2320383 T1	28-09-2012
		US 2012181859 A1	19-07-2012
		WO 2011047395 A1	28-04-2011
GB 539979 A	01-10-1941	FR 878927 A	09-02-1943
		GB 539979 A	01-10-1941

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 203567522 U [0003]
- CN 105469610 A [0003]
- CN 209730882 U [0003]
- CN 110751739 A [0003]
- US 20120234922 A1 [0003]
- US 20060244573 A1 [0003]