

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2016/055283 A1

(43) International Publication Date
14 April 2016 (14.04.2016)

(51) International Patent Classification:
H05B 37/02 (2006.01)

(74) Agents: **VERWEIJ, P., D.** et al.; Philips Lighting B.V., Philips Lighting Intellectual Property, High Tech Campus 5, 5656 AE Eindhoven (NL).

(21) International Application Number:

PCT/EP2015/072052

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:

25 September 2015 (25.09.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14188251.4 9 October 2014 (09.10.2014) EP

(71) Applicant: **PHILIPS LIGHTING HOLDING B.V.** [NL/NL]; High Tech Campus 45, 5656 AE Eindhoven (NL).

(72) Inventors: **DE SAMBER, Marc, Andre**; c/o High Tech Campus 5, NL-5656 AE Eindhoven (NL). **VERBAKEL, Frank**; c/o High Tech Campus 5, NL-5656 AE Eindhoven (NL). **VAN OS, Jacobus, Petrus, Johannes**; c/o High Tech Campus 5, NL-5656 AE Eindhoven (NL).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: OPTICALLY POWERED LIGHTING SYSTEM

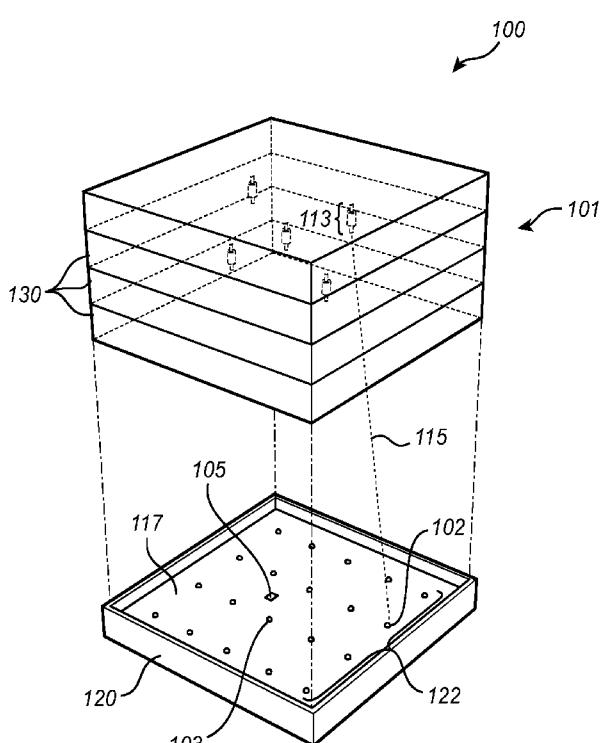


Fig. 1

(57) **Abstract:** A lighting device (100) is provided comprising optically transmissive emitters and receivers. The receivers are configured to receive power via an optical signal transmitted from a light source (102). Furthermore, the receiver is provided with functionality for converting the optical signal to electrical power and supply an emitter with the electrical power. The optical signal may further comprise an address such that a receiver-emitter pair of the device may be wirelessly individually addressed and controlled. The optical signals of the device are not guided but are free to propagate through optically transmissive receivers, optically transmissive emitters or other optically transmissive materials of the lighting device. This enables a lighting device which provides new light effects in a simple manner.



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Optically powered lighting system

FIELD OF THE INVENTION

The present invention relates to lighting devices. In particular, the present invention relates to communication in lighting devices.

5 BACKGROUND OF THE INVENTION

Fluorescent and incandescent lighting are commonly used lighting technologies for various lighting applications such as for example illumination of an office space or a shopping mall. However, incandescent lighting is not competitively energy efficient and fluorescent lighting tubes commonly contain environmentally unfriendly elements that are not easily disposed of. In recent years, light emitting diodes (LEDs) have emerged as a strong competitor on the market for lighting applications, mainly due to their superior energy efficiency over other existing technologies.

10 The previous technology may not reach the high demands on design and functionality which comes with the recent development of lighting devices. For example, new lighting effects are sought after which extend beyond the capabilities of previous 15 technology. Such lighting effects may for example be arbitrarily moving or deformable light patterns.

20 With increasing complexity of both integrated circuits as well as of circuits comprising discrete components arranged on a PCB follows problems related to the communication between components and providing electrical power to the devices. In order to achieve highly a versatile lighting device, the light sources of the devices has to be able to communicate in a fast and almost simultaneous manner. Furthermore, it would be desirable to be able to place the light sources of a lighting device almost arbitrarily with respect to each other and also with respect to the power source.

25 With the present technology, communication paths between different components (e.g. light-emitting diodes), and for providing power becomes more and more challenging due to the number of interconnections. For example, with an increasing number of discrete components such as e.g. light-emitting diodes on a PCB, the connection paths becomes more complex while the area of the PCB may be limited, which may in turn lead to

limitations in functionality of the final device. Accordingly, it is desirable to find new approaches for addressing the complexity and drawbacks that comes with communication between components of lighting devices for providing versatile lighting.

5 SUMMARY OF THE INVENTION

A general object of the present invention is to provide a lighting device provided with more flexible communication between different parts of the device.

According to a first aspect of the invention it is therefore provided an lighting device comprising:

- 10 an optically transmissive light-emitting device;
- an optically transmissive light-receiving device electrically connected to said optically transmissive light-emitting device to form a first receiver-emitter pair; and
- a light-source;
- arranged such that an optical signal transmitted from said light-source propagates unguided from said light-source, is received by said light-receiving device,
- 15 wherein a portion of said optical signal is transmitted through said optically transmissive light-receiving device and said optically transmissive light-emitting device.

An optically transmissive component is a component that may allow for at least enough of an optical signal to pass through a material of the component such that the 20 optical signal may accurately be received by the light-receiving device. Optically transmissive may be e.g. transparent, semi-transparent, translucent, or combinations thereof. The light source emits an optical signal which is received by the optically transmissive light-receiving device. The optical signal propagates unguided, in other words, optical signals are not guided from a light source, or any other device to another device but are emitted by the 25 light-source and may propagate freely through both optically transmissive materials and air or any envelope material that surrounds the light source of the light-emitting devices.

The present invention is based on the realization that by using components made from optically transmissive materials, light-sources or other light-emitting devices arranged in the device may transmit optical signals in several directions which enable 30 communication with more than one other light-receiving device. For example, the light-receiving devices are optically transmissive such that the optical signal may at least partly be passed through a material of a light-receiving device. The optical signal may therefore reach e.g. a second optically transmissive light-receiving device independent of location of the light-receiving devices which facilitates an increased number of available arrangements of

light-receiving/emitting devices. In such a device, the components arranged therein may communicate through optical signals which will not be obstructed by the optically transmissive components of the device. The invention enables flexibility in designing a structure and layout of a lighting device that is independent of the locations of the

5 components within the device. This way, novel lighting effects may be enabled since communication, for example between different parts of the lighting device or for powering of light-emitting devices may be done without being limited by the physical locations of the light-emitting devices. The flexibility of design includes means for power the optically transmissive components (i.e. optically transmissive light-emitting devices and light-

10 receivers). Thus, a number of electrical connections between components of the device made via physical connections such as wires can be reduced, or even eliminated. Furthermore, increase in lighting system size may increase the spacing between light emitting diodes which means that in prior art, a relatively large amount of substrate (e.g. printed circuit board) must be used with respect to the number of light-emitting devices, thus additional cost and

15 limited shape variations are introduced in prior art. These drawbacks are alleviated by the invention.

According to one embodiment of the invention, said optically transmissive light-receiving device is configured to convert the optical signal emitted by the light-source to electric power, and to provide the electric power to said optically transmissive light-emitting device. Thereby, the optically transmissive light-emitting device may wirelessly be provided with power from the light-source. The light-source may be provided with electrical power from the mains via a power converter. In order to convert the optical signal to electrical power, the optically transmissive light-emitting device may be provided with photovoltaic functionality.

25 According to another embodiment of the invention, the lighting device may further comprise a second receiver-emitter pair and a second light-source arranged to provide power to said second receiver-emitter pair. In words, there may be a separate light source for each receiver-emitter pair.

According to another embodiment of the invention, the optical signal from

30 said first and second light-sources comprises an address recognized by the respective optically transmissive light-receiving device in the corresponding receiver-emitter pair such that the respective light-emitting device is individually addressed and powered. This way, a user may control, via a processor connected to the light-sources, which of the light-emitting devices connected to a light-receiving device that should be activated. Thereby, optical 3D

effects may be obtained with the remotely powered light-emitting devices. Furthermore, dynamic light-effects are enabled.

According to another embodiment of the invention, the lighting device may comprise a plurality of receiver-emitter pairs arranged in a two- or three-dimensional layout structure. Thus, the receiver-emitter pairs may be arranged in a matrix structure which may be embedded or integrated in optically transmissive material which may be solid, fluid, or viscous. The material may act as a carrier for the receiver-emitter pairs. Furthermore, a more visually appealing appearance for a user is possible since it may be possible to obtain a nearly transparent appearance of the entire or at least parts of the lighting device. Each of the receiver-emitter pairs may be considered a pixel each having its own functionality (e.g. receive light, process the received light, emit light). Furthermore, each of the receiver-emitter pairs may further have an associated optically transmissive processor for recognizing the address of the received light and thereby determine if the associated light-emitting device should emit an optical signal.

Preferably, the wavelength of said optical signal emitted by the light source for providing power is outside the visible range of wavelengths. The optical range of wavelengths is approximately 400-800 nm. The preferred range of wavelengths is with the blue to UV-A range or the Near Infrared range. Furthermore, the emitter of the receiver-emitter pair may preferably emit visible light.

The optically transmissive light-receiving device and the optically transmissive light-emitting device of a receiver-emitter pair may be arranged such that they form a mechanically integrated unit.

According to an embodiment of the invention, said receiver-emitter pair may be electrically connected to a second optically transmissive light-receiving device.

Furthermore, the receiver-emitter pair may be electrically connected to a second optically transmissive light-emitting device.

In other words, the lighting device may comprise a second receiver and/or a second emitter. Thereby, additional functionality, such as communication between two receiver-emitter pairs with optical signals may be enabled.

The second optically transmissive light-emitting device may be configured to emit an optical signal depending on information content received by said second light-receiving device. The light-emitting device may act as a pixel output which may be controlled by information received by the further optically transmissive light-receiving device. The received information may be embedded in an optical signal received by the

further optically transmissive light-receiving device. The information content may be processed by a processor (which may be optically transmissive) connected to the optically transmissive light-emitting device of the receiver-emitter pair and the further receiver-emitter pair of the same unit. The further optically transmissive light-receiving device may be 5 electrically connected to the optically transmissive light-emitting device. This opens for the possibility to allow communication between receiver-emitter units of the lighting device. Thereby, cross-communication within the lighting device may be enabled which may further improve the flexibility in controlling the light-emitting devices.

10 The light-source is preferably arranged separate and at a distance from the optically transmissive light-receiving device. For example, the light-source may be arranged such that no physical connection is present between the light-source and the optically transmissive light-receiving device.

15 Moreover, the lighting device may comprise a feedback mechanism configured to switch off the light-source if said separation exceeds a predetermined distance. The feedback mechanism may comprise an optical receiver or a mechanical switch.

Furthermore, each of the pixels comprising the receiver-emitter pair may comprise an energy storage which may be charged by the optical signal. This way, the lighting device may be operated in an off-line mode, thus not while being provided with optical power.

20 The lighting device may further comprise a communication light-source arranged adjacent to said light-source, wherein said communication light-source is configured to send an optical signal to the receiver-emitter pair for controlling the emitter of the receiver-emitter pair. The communication light source may send digital data to all receiver-emitter pairs for communication from a central control unit. The communication 25 light-source may be arranged in the same mechanical unit as the light source for providing power.

Furthermore, the optically transmissive light-receiving device may advantageously be configured to receive optical signals reaching the light-receiving device from all directions, i.e. a receiver may be entirely made from optically transmissive materials.

30 The light-receiving device may advantageously be a solid state phototransistor or photodiode. The light-emitting device may advantageously be a solid state lighting device, in which light is generated through recombination of electrons and holes. Such light-emitting device may advantageously be a light-emitting diode. The optically transmissive light-receiving device is advantageously made from indium-gallium-zinc-oxide. However, the

optically transmissive light-receiving device may be made from any other suitable material. Furthermore, the optically transmissive carrier (the solid material) boards may be made from plastic or glass.

Further features of, and advantages with, the present invention will become 5 apparent when studying the appended claims and the following description. The skilled person realize that different features of the present invention may be combined to create embodiments other than those described in the following, without departing from the scope of the present invention.

10 BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects of the present invention will now be described in more detail, with reference to the appended drawings showing exemplary embodiments of the invention, wherein:

Fig. 1 illustrates a lighting device according to an embodiment of the invention;

15 Fig. 2 shows a cross-sectional view of the embodiment shown in Fig. 1;

Fig. 3 schematically illustrates a pixel according to an embodiment of the inventive concept; and

Fig. 4 schematically illustrates exemplary components of a pixel.

20 DESCRIPTION OF EXAMPLE EMBODIMENTS OF THE PRESENT INVENTION

In the following description, the present invention is described with reference to example applications. It should, however, be noted that this by no means limits the scope of the invention, which is equally applicable to other applications, such as general light equipments, LED lamps, coded light luminaires, heads-up displays, television sets, and 25 displays.

Fig. 1 illustrates an exemplary lighting device 100 according to an embodiment of the invention. In Fig. 2, a cross-section of the lighting device 100 is shown. In this embodiment, a plurality of light-sources 102, 102' are configured to wirelessly provide power to receiver-emitter units 113, 113'. The light sources 102, 102' are arranged in an 30 "optical backplane" arranged as a bottom plate 117. The light sources 102, 102' of the bottom plate 117 are connected to a power converter 120 configured to convert electrical power from the mains 119 to power appropriate for the light sources 102, 102'. The power converter 120 is connected to the mains 119 at a power inlet 121 of the power converter 120. The wireless power is provided through an optical signal 115, 115' which is received by an

optically transmissive light receiving device 108, 108' (as shown in Fig. 3) of a receiver-emitter unit 113, 113'. The units 113, 113' are arranged to form pixels of a light-cube 101. Furthermore, the light cube 101 may be placed on the bottom plate 117 in a slide-in manner without electrical connections between the bottom plate 117 and the light cube 101, the only 5 contact being the obvious mechanical supporting function of the bottom plate 117. Thereby, the light-source 102 is arranged physically separated from the light cube 101. As is shown in Fig. 1, the bottom plate 117 may comprise a two-dimensional array 122 of light-emitting devices 102 (only one is numbered in order to avoid cluttering in the drawing). Moreover, there may be a feedback mechanism unit 105 which detects if the light-cube 101 is removed 10 from the bottom plate 117 and consequently switches off the powering light sources 102 when no power is needed. For example, a mechanical switch may be flipped as a response to the removal of the light-cube 101 from the bottom plate 117, or the feedback mechanism may comprise an optical receiver configured to detect the visual light emitted by the light-emitting devices of the receiver-emitter unit 113 (e.g. emitter 104 shown in Fig. 3), and if the optical 15 receiver of the feedback unit 105 does not detect the visual light, the light-sources 102 are switched off.

In addition, there may optionally be a light source (103) of communication in the bottom plate 117. The communication light-source (e.g. light source 102) may send digital high frequency data to all the receivers 108, 108' of the light cube 101. Thereby, 20 communicating with all the pixels of the light cube 101.

Fig. 3 schematically illustrates an exemplary receiver-emitter unit 113 according to an embodiment of the invention. The receiver-emitter unit 113 may receive optical power from a light-source 102 by receiving an optical signal 115 which is converted by a receiver 108 of the receiver-emitter unit 113. The unit 113 comprises a receiver-emitter 25 pair 104, 108. The receiver 108 has a photovoltaic functionality, thereby comprising a photovoltaic element, for converting an optical signal 115 to electrical power. The emitter 104 configured to emit visible light 201 using the power received from the receiver 108. Furthermore, the receiver-emitter unit 113 may receive an optical signal 220 which may be processed by a processor 106 (shown in Fig. 4) arranged in the unit 113 and may further be 30 used for instructing the processor to control the emitter 104. In addition, receiver-emitter unit 113 may emit an optical signal 221 towards a second receiver-emitter unit for control of the second unit.

Fig. 4 illustrates, in more detail, the receiver-emitter unit 113 schematically shown in Fig. 3. The receiver-emitter unit 113 comprises a receiver-emitter pair comprising

the optically transmissive light-receiving device 108 and the optically transmissive light-emitting device 104 with the functionality described with reference to Figs. 1 - 3.

Furthermore, the receiver-emitter unit 113 comprises a second optically transmissive light-receiving device 202 and, may also comprise a second optically transmissive light-emitting

5 device 210. The emitter 210 and the receiver 202 may be electrically connected via at least a conductor 214, 214'. However, the receiver 202 may first be connected to the emitter 104 of the first receiver-emitter pair 206 with conductor 214. In addition, the emitter 104 is electrically connected via conductor a 214' to the emitter 210 of the second receiver-emitter pair 208. The receiver 108 of is equipped with photovoltaic functionality (i.e. a photovoltaic 10 element) such that it may provide electrical power to at least the emitter 104. The power may also be provided to the second light-receiving device 202 or the second light-emitting device 210. The emitter 104 is configured to emit visible light 201. The conductors 214, 214' may be optically transmissive, and may be made from e.g. indium-tin-oxide (ITO). As shown in Figs. 3 and 4, the receiver-emitter pair 108, 104 and the additional receiver 202 and 15 additional emitter 210 may be arranged in a mechanical unit, which may constitute a pixel of the light-cube shown in Fig. 1.

The second receiver 202 may be configured to receive an optical signal 220 which may comprise information for the receiver 202 to process with a processing unit 106 connected to the receiver 202 or integrated with the receiver 202. The information may be an 20 instruction for the emitter 104 to emit an optical signal 201 (i.e. light) of a specific wavelength, of flashing frequency, or a certain sequence of flashing, etc. The information received by the receiver 202 may be converted at the receiver 202 to e.g. a TTL (transistor-transistor logic) signal provided to the emitter 104. Moreover, the emitter 104 may be configured to send a signal in the form of a TTL signal to the emitter 210. The signal sent 25 from the emitter 210 comprises information which is forwarded from the present receiver-emitter unit 113 to a second receiver-emitter unit (e.g. unit 113' shown in Fig. 2) of the lighting device. The forwarded signal may be used for synchronizing units of the lighting device. Furthermore, the receiver 202 may comprise an optical filter, a photon detector, amplifiers, and/or a processor. Note that the receivers 202 and 108 may physically be one 30 receiver which may receive both optical signals 220 and 115. The emitter 210 may comprise driver electronics, optical emitter, and/or collimating optics. Optionally, the unit 113 may be embedded in an optical guiding material which may redirect the optical signal around the unit 113, thus improving the propagation of optical signals further.

Each unit 113, and components (106, 104, 108) thereof are optically transmissive meaning that an optical signal, e.g. optical signal 115 may be transmitted through the unit 113", and its components as shown in Fig. 2. Furthermore, the units 113 are arranged in a layered structure, in a 3-dimensional matrix layout. However, the units 113 may 5 also be randomly arranged in the lighting device, inside the light-cube 101. Note also that the number of units 113 may be many more than what is shown in the drawings which illustrate the concept.

Furthermore, with reference to Fig. 2, the power converter 120 comprises a processor 118 providing intelligence for controlling the light-emitting devices 102. The 10 processor is electrically connected to the light sources 102. For example, an optical signal emitted by a light-emitting device 102 for providing power may comprise an address which may be identified by the processing unit 106 connected to the light-receiving device in that unit 113. As a further example, the optical signal 115' for providing power emitted by light-emitting device 102' may comprise an address only identified by the processing unit 106' 15 connected to optically transmissive light-emitting device 104' and optically transmissive light-receiving device 108' in unit 113' (the unit 113' comprises a second receiver-emitter pair). In this way, the light-emitting devices 104, 104' of any of the pixels 113 (i.e. units 113) of the light cube 101 may be individually addressed and powered wirelessly. Furthermore, the bottom plate 117 may comprise a two-dimensional array of light-emitting devices 102. 20 The optical signals 115, 115' for providing power are preferably in the wavelength range of blue to UV-A light, Infrared or Near Infrared light, or at least outside the visible range of the spectrum. The material 130 of the light cube 101 is preferably optically transmissive, for example made from glass or a plastic material. Furthermore, the light cube may be enclosed in a material which reflects the optical signal for powering such that the efficiency of 25 providing power increases through the recycled (reflected) optical signals.

In each of the illustrated embodiments of the invention, the optical signal may propagate unguided from the optically transmissive light-emitting devices or the light-sources to at least one of the optically transmissive light-receiving devices and may propagate through and/or within an optically transmissive material. The light-emitting devices are 30 advantageously light-emitting diodes and the light-receiving devices are advantageously photodiodes or phototransistors.

Additionally, variations to the disclosed embodiments can be understood and effected by the skilled person in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims. For example, an optically transmissive

component may be any of the light-receiving devices, light-emitting devices, circuit boards, substrates, etc through which an optical signal may propagate.

In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. The mere fact that certain 5 measures are recited in mutually different dependent claims does not indicate that a combination of these measured cannot be used to advantage.

Summarizing, a lighting device 100 is provided comprising optically transmissive emitters and receivers. The receivers are configured to receive power via an optical signal transmitted from a light source 102. Furthermore, the receiver is provided with 10 functionality for converting the optical signal to electrical power and supply an emitter with the electrical power. The optical signal may further comprise an address such that a receiver-emitter pair of the device may be wirelessly individually addressed and controlled. The optical signals of the device are not guided but are free to propagate through optically transmissive receivers, optically transmissive emitters or other optically transmissive 15 materials of the lighting device. This enables a lighting device which provides new light effects in a simple manner.

CLAIMS:

1. A lighting device (100) comprising:
an optically transmissive light-emitting device (104);
an optically transmissive light-receiving device (108) electrically connected to
said optically transmissive light-emitting device to form a first receiver-emitter pair (104,
5 108); and

a light-source (102);
arranged such that an optical signal (115) transmitted from said light-source
propagates unguided from said light-source, is received by said light-receiving device,
wherein a portion of said optical signal is transmitted through said optically
10 transmissive light-receiving device and said optically transmissive light-emitting device.

2. The device according to claim 1, wherein said optically transmissive light-
receiving device is configured to convert the optical signal emitted by the light-source (102)
to electric power, and to provide the electric power to said optically transmissive light-
15 emitting device.

3. The device according to claim 2, further comprising:
a second receiver-emitter pair (104', 108') and a second light-source (102')
arranged to provide power to said second receiver-emitter pair.

20 4. The device according to claim 3, wherein the optical signal from said first and
second light-sources comprises an address recognized by the respective optically
transmissive light-receiving device in the corresponding receiver-emitter pair such that the
respective light-emitting device is individually addressed and powered.

25 5. The device according to any one of claim 2 to 4, comprising a plurality of
receiver-emitter pairs arranged in a two- or three-dimensional layout structure.

6. The device according to claim 5, wherein said plurality of receiver-emitter pairs are integrated in a solid optically transmissive carrier.

7. The device according to any one of claims 2 to 6, wherein the wavelength of 5 said optical signal emitted by the light source for providing power is outside the visible range of wavelengths.

8. The device according to any one of claims 2 to 7, wherein the optically transmissive light-receiving device and the optically transmissive light-emitting device in 10 each receiver-emitter pair form a mechanically integrated unit (113).

9. The device according to any one of the preceding claims, wherein said receiver-emitter pair is electrically connected to a second optically transmissive light-receiving device (202).

15 10. The device according to any one of the preceding claims, wherein said receiver-emitter pair is electrically connected to a second optically transmissive light-emitting device (210).

20 11. The device according to claim 9, wherein said second optically transmissive light-emitting device is configured to emit an optical signal (221) depending on information content received from said second optically transmissive light-receiving device.

25 12. The device according to any one of claims 9 to 11, wherein, in said receiver-emitter unit, said further optically transmissive light-receiving device is electrically connected to the optically transmissive light-emitting device,

wherein said optically transmissive light-emitting device is configured to emit an optical signal (201) depending on information content received from said further light-receiving device.

30 13. The device according to claim 1, further arranged and configured such that said light-source is arranged separate and at a distance from said optically transmissive light-receiving device.

14. The device according to claim 13, further comprising a feedback mechanism unit (105) configured to switch off the light-source if said separation exceeds a predetermined distance.

5 15. The device according to any one of the preceding claims, further comprising a communication light-source (103) arranged adjacent to said light-source, wherein said communication light-source is configured to send an optical signal to the receiver-emitter pair for controlling the emitter of the receiver-emitter pair.

1/3

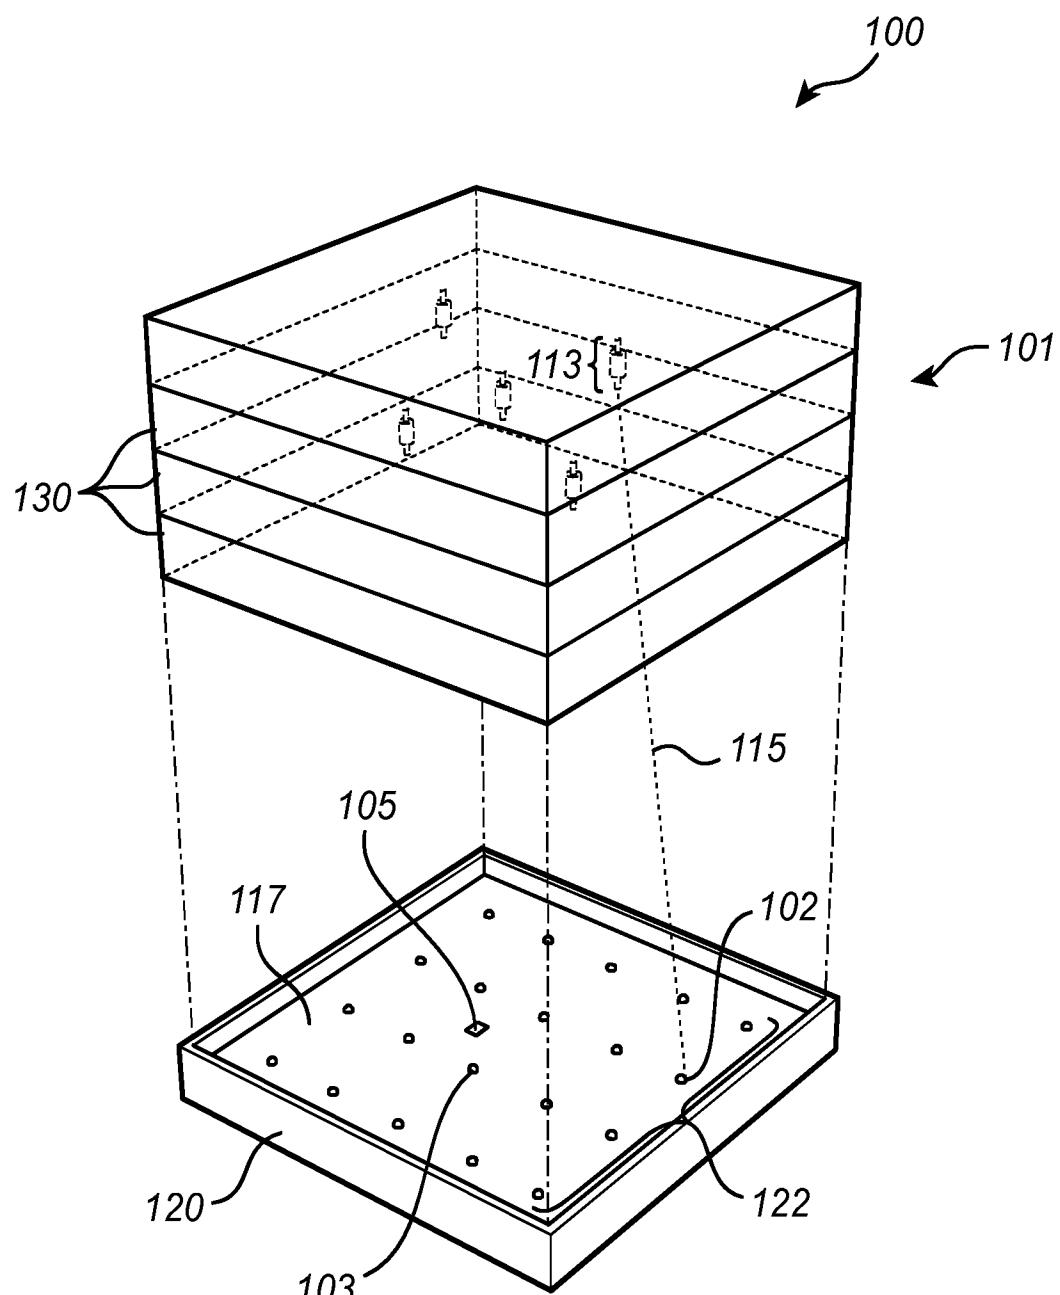


Fig. 1

2/3

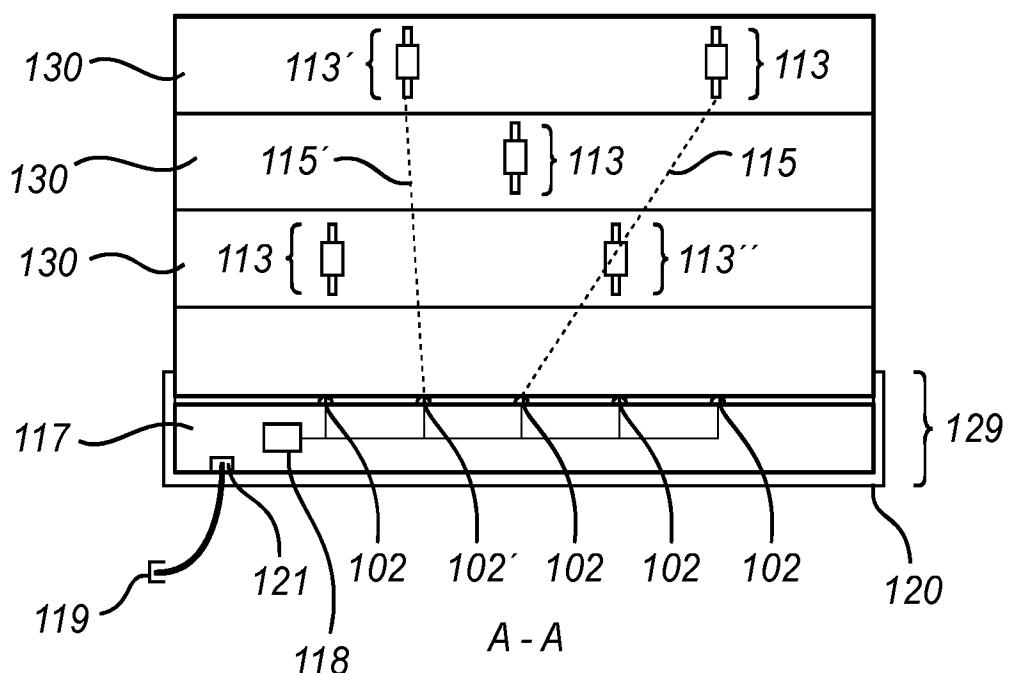


Fig. 2

3/3

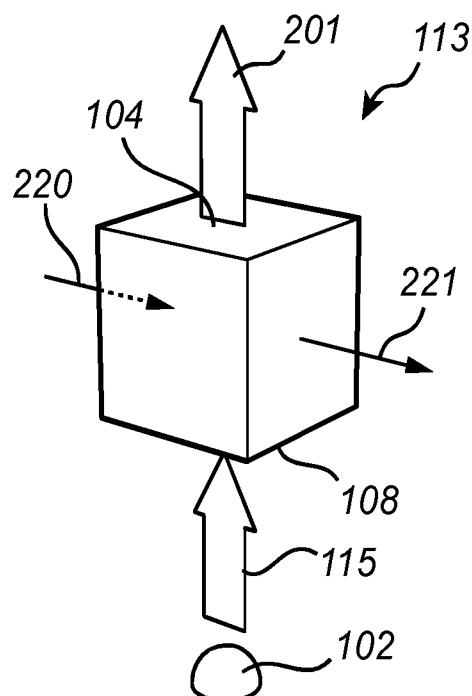


Fig. 3

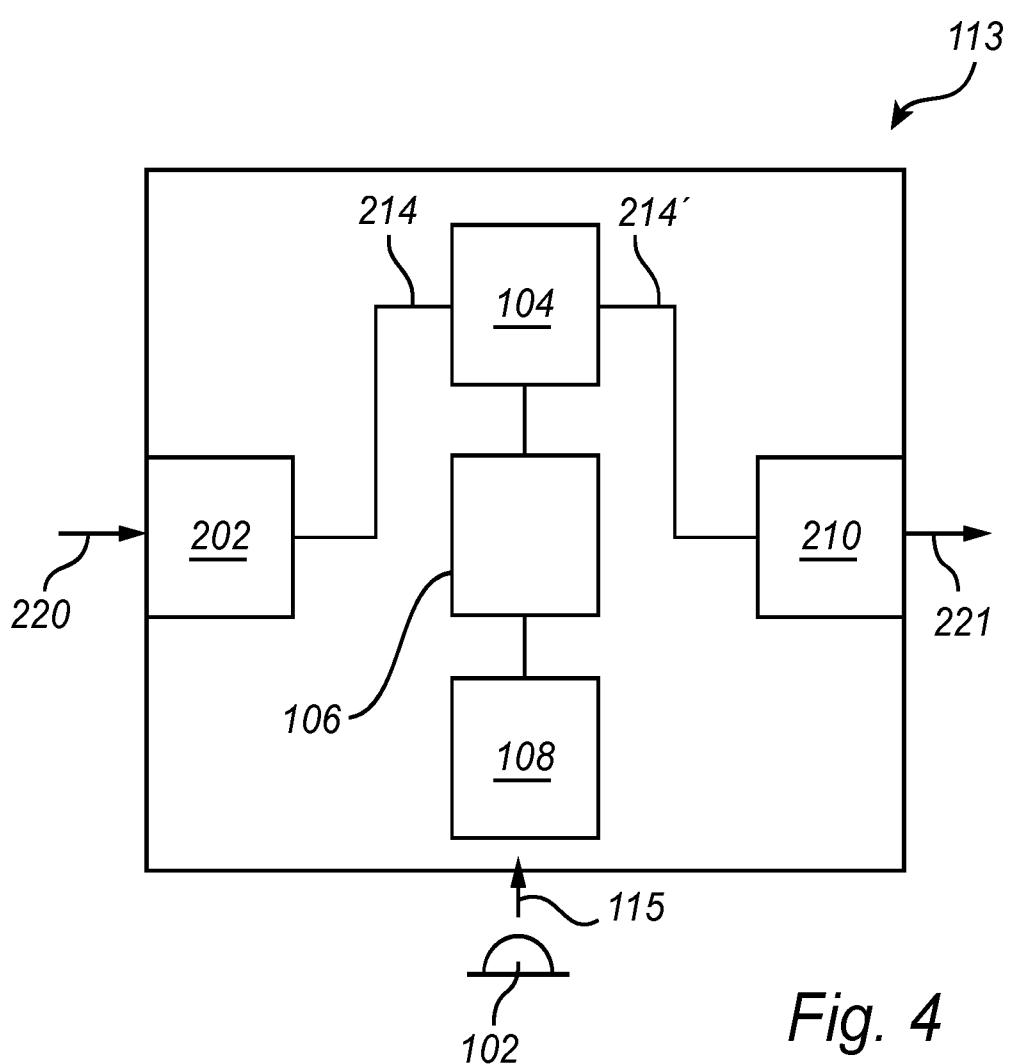


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/072052

A. CLASSIFICATION OF SUBJECT MATTER
INV. H05B37/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/327780 A1 (HOSCHOPF HANS [AT]) 30 December 2010 (2010-12-30) paragraph [0012] - paragraph [0069]; figures 1-3 -----	1-5,13, 14
A	WO 2013/108166 A1 (KONINKL PHILIPS NV [NL]) 25 July 2013 (2013-07-25) page 2, line 26 - page 12, line 18; figures 1-2 -----	1-15
A	EP 2 503 852 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]) 26 September 2012 (2012-09-26) paragraph [0008] - paragraph [0067] ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
18 December 2015	05/01/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Hernandez Serna, J

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/072052

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012/281879 A1 (VLUTTERS RUUD [NL] ET AL) 8 November 2012 (2012-11-08) paragraph [0008] - paragraph [0124]; figure 2 -----	1-15
A	US 2013/140995 A1 (JONES MORGAN [US]) 6 June 2013 (2013-06-06) paragraph [0003] - paragraph [0039]; figures 1, 4 -----	1-15
A	US 2013/328486 A1 (JONES MORGAN [US]) 12 December 2013 (2013-12-12) paragraph [0003] - paragraph [0090] -----	1-15
A	US 2003/057887 A1 (DOWLING KEVIN J [US] ET AL) 27 March 2003 (2003-03-27) paragraph [0040] - paragraph [0132] -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/072052

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2010327780	A1 30-12-2010	CN 102090148 A EP 2088836 A1 EP 2238814 A1 US 2010327780 A1 WO 2009095222 A1		08-06-2011 12-08-2009 13-10-2010 30-12-2010 06-08-2009
WO 2013108166	A1 25-07-2013	CN 104041190 A CN 104041191 A EP 2805586 A1 EP 2805587 A1 JP 2015509324 A JP 2015513806 A US 2014375217 A1 US 2015028763 A1 WO 2013108166 A1 WO 2013108167 A1		10-09-2014 10-09-2014 26-11-2014 26-11-2014 26-03-2015 14-05-2015 25-12-2014 29-01-2015 25-07-2013 25-07-2013
EP 2503852	A1 26-09-2012	CN 103430626 A EP 2503852 A1 EP 2689638 A1 JP 2014515892 A KR 20140023935 A RU 2013146941 A US 2014314420 A1 WO 2012127439 A1		04-12-2013 26-09-2012 29-01-2014 03-07-2014 27-02-2014 27-04-2015 23-10-2014 27-09-2012
US 2012281879	A1 08-11-2012	CN 102726123 A EP 2524575 A1 JP 5698763 B2 JP 2013517597 A US 2012281879 A1 WO 2011086501 A1		10-10-2012 21-11-2012 08-04-2015 16-05-2013 08-11-2012 21-07-2011
US 2013140995	A1 06-06-2013	NONE		
US 2013328486	A1 12-12-2013	NONE		
US 2003057887	A1 27-03-2003	NONE		