



- (51) International Patent Classification:
G08B 23/00 (2006.01)
- (21) International Application Number:
PCT/US2012/028617
- (22) International Filing Date:
9 March 2012 (09.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/083,260 8 April 2011 (08.04.2011) US
- (71) Applicant (for all designated States except US): **SONY COMPUTER ENTERTAINMENT INC.** [JP/JP]; 1-7-1 Konan, Minato-Ku, Tokyo, Tokyo, JAPAN 108-0075 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CHEN, Ruxin** [US/US]; 919 East Hillsdale Blvd., Foster City, California 94404 (US). **KALINLI, Ozlem** [US/US]; 919 East Hillsdale Blvd., Foster City, California 94404 (US).
- (74) Agent: **ISENBERG, Joshua D.**; JDI Patent, 809 Corporate Way, Fremont, California 94539 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TONGUE TRACKING INTERFACE APPARATUS AND METHOD FOR CONTROLLING A COMPUTER PROGRAM

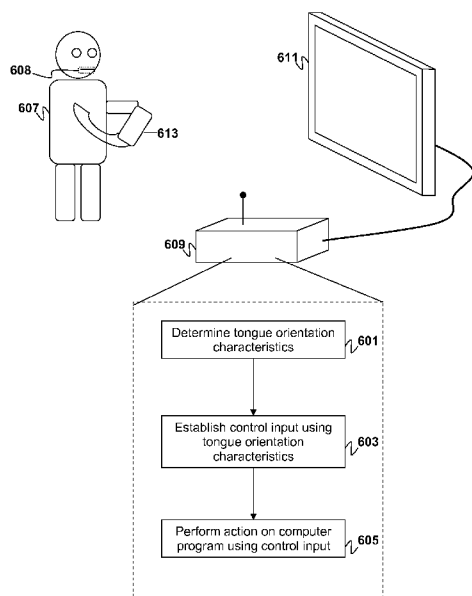


FIG. 6

(57) Abstract: A tongue tracking interface apparatus for control of a computer program may include a mouthpiece configured to be worn over one or more teeth of a user of the computer program. The mouthpiece can include one or more sensors configured to determine one or more tongue orientation characteristics of the user. Other sensors such as microphones, pressure sensors, etc. located around the head, face, and neck, can also be used for determining tongue orientation characteristics.

TONGUE TRACKING INTERFACE APPARATUS AND METHOD FOR CONTROLLING A COMPUTER PROGRAM

FIELD OF THE INVENTION

Embodiments of the present invention are directed to control interfaces for computer
5 programs and more specifically to control interfaces that are controlled by the tongue.

BACKGROUND OF THE INVENTION

There are a number of different control interfaces that may be used to provide
input to a computer program. Examples of such interfaces include well-known interfaces
such as a computer keyboard, mouse, or joystick controller. Such interfaces typically
10 have analog or digital switches that provide electrical signals that can be mapped to
specific commands or input signals that affect the execution of a computer program.

Recently, interfaces have been developed for use in conjunction with computer
programs that rely on other types of input. There are interfaces based on microphones or
microphone arrays, interfaces based on cameras or camera arrays, and interfaces based on
15 touch. Microphone-based systems are used for speech recognition systems that try to
supplant keyboard inputs with spoken inputs. Microphone array based systems can track
sources of sound as well as interpret the sounds. Camera based interfaces attempt to
replace joystick inputs with gestures and movements of a user or object held by a user.
Touch based interfaces attempt to replace keyboards, mice, and joystick controllers as the
20 primary input component for interacting with a computer program.

Different interfaces have different advantages and drawbacks. Keyboard
interfaces are good for entering text, but less useful for entering directional commands.
Joysticks and mice are good for entering directional commands and less useful for
entering text. Camera-based interfaces are good for tracking objects in two-dimensions,
25 but generally require some form of augmentation (e.g., use of two cameras or a single
camera with echo-location) to track objects in three dimensions. Microphone-based
interfaces are good for recognizing speech, but are less useful for tracking spatial
orientation of objects. Touch-based interfaces provide more intuitive interaction with a
computer program, but often experience latency issues as well as issues related to

misinterpreting a user's intentions. It would be desirable to provide an interface that supplements some of the interfaces by analyzing additional characteristics of the user during interaction with the computer program.

It is within this context that embodiments of the present invention arise.

5

BRIEF DESCRIPTION OF THE DRAWINGS

FIGs. 1A-1C are schematic diagrams illustrating a tongue tracking interface apparatus for control of a computer program according to an embodiment of the present invention.

FIGs. 2A-2B illustrate an alternative tongue tracking interface apparatus for control of a computer program according to an embodiment of the present invention.

10 FIGs. 3A-3B illustrate another alternative tongue tracking interface apparatus for control of a computer program according to an embodiment of the present invention.

FIGs. 4A-4F illustrate several alternative configurations for tongue tracking interface apparatus for control of a computer program according to embodiments of the present invention.

15 FIG. 5 illustrates an alternative tongue tracking interface apparatuses for control of a computer program according to an embodiment of the present invention.

FIG. 6 is a schematic/flow diagram illustrating a tongue tracking interface method for controlling a computer program.

20 FIG. 7 illustrates a block diagram of a computer apparatus that may be used to implement a tongue tracking interface method for controlling a computer program according to an embodiment of the present invention.

FIELD OF THE INVENTION

Embodiments of the present invention are related to a tongue tracking interface apparatus and method for controlling a computer program.

25

DESCRIPTION OF SPECIFIC EMBODIMENTS

FIG. 1A-C illustrate an example of a tongue tracking interface apparatus **101** that may be used for control of a computer program according to an embodiment of the

present invention. In this particular embodiment, the tongue tracking interface apparatus **101** is a mouthpiece with a caged magnetic ball **103**. FIG. 1A depicts a front view of the tongue tracking interface apparatus as perceived from outside of the user's mouth. FIG. 1B depicts a bottom-up view of the tongue tracking interface apparatus as perceived from the inside of the user's mouth. FIG. 1C provides a detailed view of the caged magnetic ball **103**.

As illustrated, the mouthpiece **101** may be in the form of a mouth guard to be worn around the user's teeth during interaction with the computer program. However, it is important to note that the mouthpiece **101** may be in the form of dentures, a dental retainer, braces, tongue ring or any other tool that may be comfortably fixed within a user's mouth during interaction with the computer program. Furthermore, while only a single mouthpiece **101** is depicted in FIG. 1A and 1B, the tongue tracking interface apparatus may be extended to include multiple mouthpieces to facilitate tracking of a user's tongue orientation characteristics.

The mouthpiece **101** includes a caged magnetic ball **103** located on the backside of the mouthpiece **101** configured so that the caged magnetic ball **103** sits behind the user's teeth when the mouthpiece **101** is worn. It is important to note that the caged magnetic ball **103** may be positioned in various locations of the mouthpiece **101** depending on the application involved.

The caged magnetic ball **103** includes a magnetized ball **107** positioned inside a cage **105** fixed to the mouthpiece **101**, such that the ball may rotate freely within the confines of the cage **105**. The behavior of the caged magnetic ball **103** may mimic that of a trackball found on commonly-used computer mice. The user's tongue **T** can manipulate the ball **103** within the cage. The magnetized ball **107** has an associated magnetic field that changes (e.g., change in direction, magnitude, polarization) when rotated. A magnetic sensor **104** located outside of the user's mouth in close proximity to the mouthpiece **101** may be configured to detect changes in the magnetized ball's **107** associated magnetic field. The sensor **104** may be coupled to a computer processor **106**, which may be programmed to interpret the signals from the sensor **104**. Certain movements of the magnetized ball **107** made by the user's tongue may lead to changes in

its associated magnetic field that may then be analyzed to determine a corresponding tongue orientation characteristic associated with that particular movement. By way of example, and not by way of limitation, these tongue orientation characteristics may include: whether the tongue is moving to the left, right, up, or down; whether the tongue is rubbing against the teeth; whether the tongue is clicking forward or backward, or whether the tongue is rotating. The sensor **104** can detect these changes and send corresponding signals to the processor. Software running on the processor **106** can interpret the signals from the sensor as appropriate inputs.

FIG. 2A-B illustrate an alternative tongue tracking interface apparatus for control of a computer program according to an embodiment of the present invention. In this particular embodiment, the tongue tracking interface apparatus **201** is a mouthpiece with one or more pressure sensors or capacitor sensors **203** configured to track one or more tongue orientation characteristics of the user. Pressure sensors can generate a signal if the tongue touches them with sufficient pressure. Capacitor sensors can sense the presence of the tongue some distance before the tongue physically touches the sensors through a change in capacitance due to the proximity of the tongue. FIG. 2A depicts a front view of the tongue tracking interface apparatus as perceived from outside of the user's mouth. FIG. 2B depicts a bottom-up view of the tongue tracking interface apparatus as perceived from the inside of the user's mouth.

Again, the mouthpiece **201** may be in the form of a mouth guard to be worn around the user's teeth during interaction with the computer program. However, as mentioned above, it is important to note that the mouthpiece **201** may be in the form of dentures, a dental retainer, braces, tongue ring or any other tool that may be comfortably fixed within a user's mouth during interaction with the computer program. Furthermore, while only a single mouthpiece **201** is depicted in FIG. 2A and 2B, the tongue tracking interface apparatus may be extended to include multiple mouthpieces to facilitate tracking of a user's tongue orientation characteristics.

The mouthpiece **201** includes one or more pressure sensors or capacitor sensors **203** located on the front side of the mouthpiece **201** configured so that the pressure sensors or capacitor sensors **203** sit in front of the user's teeth when the mouthpiece **201**

is worn. It is important to note that any number of pressure sensors or capacitor sensors **203** may be situated on the mouthpiece depending on the application involved. Likewise, the pressure sensors or capacitor sensors **203** may be positioned at various locations on the mouthpiece **201** depending on the application involved.

5 The pressure sensors or capacitor sensors **203** essentially act as transducers, generating signals as a function of the pressure imposed. The signals can be coupled wirelessly to a processor **206**. Certain movements made by the user's tongue may activate the pressure sensors or capacitor sensors **203** causing them to generate signals that may then be analyzed by the processor **206** to determine a corresponding tongue
10 orientation characteristic associated with that particular movement of the user's tongue **T**. By way of example, and not by way of limitation, these tongue orientation characteristics may include: whether the tongue is moving to the left, right, up, or down; whether the tongue is rubbing against the teeth; whether the tongue is clipping, or whether the tongue is rotating. By way of example, and not by way of limitation, the signal generated by the
15 pressure sensor **203** corresponding to the movement of the user's tongue may be transmitted for analysis electromagnetically through the user's skin or by way of ultrasound.

FIG. 3A-B illustrate yet another alternative tongue tracking interface apparatus for control of a computer program according to an embodiment of the present invention.
20 In this particular embodiment, the tongue tracking interface apparatus **301** is a mouthpiece with a thermal camera **303** configured to track one or more orientation characteristics of the tongue **T** of the user. The thermal camera **303** may be wirelessly coupled to a processor **306**. FIG. 3A depicts a front view of the tongue tracking interface apparatus as perceived from outside of the user's mouth. FIG. 3B depicts a bottom-up
25 view of the tongue tracking interface apparatus as perceived from the inside of the user's mouth.

Again, the mouthpiece **301** illustrated is in the form of a mouth guard to be worn around the user's teeth during interaction with the computer program. However, as mentioned above, it is important to note that the mouthpiece **301** may be in the form of
30 dentures, a dental retainer, braces, tongue ring or any other tool that may be comfortably

fixed within a user's mouth during interaction with the computer program. Furthermore, while only a single mouthpiece **301** is depicted in FIG. 3A and 3B, the tongue tracking interface apparatus may be extended to include multiple mouthpieces to facilitate tracking of a user's tongue orientation characteristics.

5 In this embodiment, the mouthpiece **301** includes a thermal camera **303** located on the back side of the mouthpiece **301** configured so that the thermal camera **303** sits behind the user's teeth when the mouthpiece **301** is worn. It is important to note that any number of thermal cameras **303** may be situated on the mouthpiece depending on the application involved. Likewise, the thermal cameras **303** may be positioned at various
10 locations on the mouthpiece **301** depending on the application involved.

 The thermal camera **303** is configured to capture images using infrared radiation. All objects emit a certain amount of blackbody radiation as a function of their temperatures, and the thermal camera **303** is configured to capture such emitted blackbody radiation. Such thermal images capture by the thermal camera **303** may then
15 be analyzed by the processor **306** to determine a corresponding tongue orientation characteristic associated with that particular thermal image. By way of example, and not by way of limitation, these tongue orientation characteristics may include: whether the tongue is moving to the left, right, up, or down; whether the tongue is rubbing against the teeth; whether the tongue is clipping, or whether the tongue is rotating. By way of
20 example, and not by way of limitation, the image captured by the thermal camera **303** corresponding to the movement of the user's tongue may be transmitted for analysis electromagnetically through the user's skin or by way of ultrasound.

 FIGs. 4A-E illustrate several alternative tongue tracking interface apparatuses for control of a computer program according to an embodiment of the present invention. In
25 these particular embodiments, the tongue tracking interface apparatus makes use of a headset **403** to be worn by the user **401** during interaction with a computer program. The headset **403** includes one or more sensors configured to track one or more tongue orientation characteristics of the user **401**. The headset **403** can be coupled to a processor **406**, e.g., by wireless connection, such as a radiofrequency personal area network

connection. The implementation and configuration of these sensors will be discussed in further detail below.

FIGs. 4A-4B illustrate a first tongue tracking interface apparatus that involves a headset **403**. FIG. 4A illustrates the headset **403** as worn by the user **401** during
5 interaction with the computer program. The headset **403** includes two earphones **405** to be inserted into the ears **413** of the user **401** during interaction with the computer program. FIG. 4B provides a more detailed view of the earphone **405** as it is positioned in the user's ear **413**.

Each earphone **405** contains a microphone **407** located at the tip to be inserted in
10 the user's ear **413**. These microphones **407** are configured to detect sound corresponding to movement of the user's **401** tongue. The statistical characteristic of the sound will be mapped to a particular tongue orientation characteristic of the user (e.g., whether the tongue is moving to the left, right, up, or down, etc.). While each earphone **405** in our example includes only a single microphone **407** at the tip, the microphone **407** could
15 easily be replaced with a microphone array to improve performance in analyzing the sound.

FIG. 4C illustrates an alternative configuration of the tongue tracking interface apparatus described above with respect to FIG. 4A and FIG 4B. To help supplement analysis of sound generated by the user's ears **413**, an additional stethoscope acoustic
20 sensor **409** may be included in the center of each earphone **405**. The stethoscope acoustic sensor **409** is configured to detect sound generated by the user's jaw while the earphone **405** is inserted into the user's ear **413**. A heart beat signal could be detected and used to either enhance touch movement detection or used in combination with tongue movement to provide additional control of the processor **406**. The detected heart beat signal can be
25 used to remove the heartbeat from the input signal from the acoustic sensor **409** so that detection of tongue movement can be enhanced. The sound from the user's jaw may then be analyzed to help supplement analysis of sound from the user's tongue. The user's jaw movement may provide additional information to aid in more accurately determining the user's one or more tongue orientation characteristics during interaction with the computer
30 program. By way of example, and not by way of limitation, the statistical characteristics

of the sound made by the user's tongue and the sound made by the user's jaw may be combined and then subsequently mapped to a particular tongue orientation characteristic of the user

Alternatively, the tongue tracking interface apparatus described above with respect to FIG. 4A and FIG. 4B could be supplemented using a microphone located at a contact point between the headset and the user's mouth as illustrated in FIG. 4D. The microphone **411** may be connected to the headset as a separate component, independent of the earphones **405**. While our example includes only a single contact point microphone **411**, the contact point microphone **411** could easily be replaced with a microphone array to improve performance in analyzing the sound.

Alternatively, the tongue can be modeled as a dipole in which the anterior pole is positive and the posterior pole is negative. Then the tongue is the origin of a steady electric potential field. The corresponding electrical signal can be measured using a pair of electrodes placed on the skin proximate the tongue **T**, e.g., as shown in FIG. 4E. The electrodes may be mounted to a headset and coupled to an electric field sensor **410**. By way of example, and not by way of limitation, first and second electrodes **412**, **414** may be placed at the opposite sides of cheeks. Alternatively, the electrodes may be located below and above the lips, etc. If the tongue **T** moves from the centre position towards right, this change in dipole orientation causes a change in electric potential field and thus the measured electrical signal amplitude. The electrical signal amplitude (or change in signal amplitude) may be transmitted from the sensor to the processor **406**, e.g., by wireless transceiver. By analyzing these changes in the measured electrical signal amplitude, tongue movement can be tracked.

One or more electrodes can be used to track tongue movements horizontally and vertically. The electrodes can be designed so that they are wearable. For example, the person can wear a headset like that shown in Fig 4D with one sensor **412** on the left cheek touching the skin and one electrode **414** on the right cheek touching the skin. Similarly groups of two or more electrodes may be placed on either side of the cheeks such that one electrode touches to the skin at lower part of cheeks and one electrode touches to the skin at upper part of cheeks. The sensor **410** can interpret measured

electrical signals from multiple electrodes and estimate tongue movement; e.g., whether the tongue is moving up/down, left/right, or at an intermediate angle, etc. Alternatively, the sensor **410** can transmit the measured electrical signals to the processor **406**, where the measured electrical signals are analyzed to track tongue movement.

5 The tongue tracking interface apparatus described above with respect to FIG. 4A and B could alternatively be supplemented by a necklace configured to detect sound generated by the user's throat during interaction with the computer program as illustrated in FIG. 4F. The necklace **415** is configured to be worn around the user's neck during interaction with the computer program. The necklace **415** includes one or more
10 microphones **417** that are configured to detect sound generated by movement of the user's neck. The sound from the user's neck may then be analyzed by suitable software running on the processor **406** to help supplement analysis of sound from the user's tongue. The user's neck movement may provide additional information to aid in more accurately determining the user's one or more tongue orientation characteristics during
15 interaction with the computer program. The neck movement itself could be used in combination with the tongue's movement to provide the control signal to the processor **406**. By way of example, and not by way of limitation, the statistical characteristics of the sound made by the user's tongue and the sound made by the user's neck may be combined and then subsequently mapped to a particular tongue orientation characteristic
20 of the user. While our example includes only two microphones **417** on the necklace **415**, the necklace **415** may be adapted to include any number of microphones in any number of locations depending on the application.

 In some embodiments, the necklace **415** can also include pressure sensors, which can be located on either side of the throat. The pressure sensors can provide pressure
25 signals that can be mapped to corresponding orientation characteristics of the tongue. By way of example, when the tongue moves, the pressure sensors on the right and left sides of throat can measure differences in pressure caused by tongue movement. The differences in pressure can be mapped to tongue orientation characteristics. It is further noted that embodiments of the invention include implementations involving combination
30 of microphones and pressure sensors.

FIG. 5 illustrates an alternative tongue tracking interface apparatuses for control of a computer program according to an embodiment of the present invention. In this particular embodiment, the tongue tracking interface apparatus makes use of a headset **503** to be worn by the user **501** during interaction with a computer program. The headset
5 may be coupled to a processor **506**, e.g., by a wireless or wired connection.

The headset **503** is configured to be worn by the user **501** during interaction with the computer program. The headset **503** includes a sensor **505** configured to determine one or more tongue orientation characteristics of the user during interaction with the computer program. By way of example and not by way of limitation, this sensor may be
10 realized as a Bluetooth sensor, infrared sensor, or ultrasound sensor.

A Bluetooth sensor may sense tongue orientation characteristics of the user by sending Bluetooth signals through the mouth, and analyzing the reflected signal to determine which tongue orientation characteristics (e.g., whether the tongue is moving to the left, right, up, or down, etc.) are present on the user.

15 An infrared sensor may perform similarly by sending infrared signals through the mouth and then subsequently analyzing the reflected signals to determine which orientation characteristics are present on the user. Alternatively, the infrared sensor may capture an infrared image of the user's mouth profiling the blackbody radiation emitted from various locations within the user's mouth. This image may then be analyzed by the
20 processor **506** to determine the presence of certain tongue orientation characteristics of the user.

The ultrasound sensor may operate by first sending a sound wave through the user's mouth. The sound wave is then partially reflected from the layers between different tissues. The ultrasound sensor may capture some of these reflections, and then
25 analyze them to create a digital image of the inside of the user's mouth. By way of example, and not by way of limitation, the reflected sound waves may be analyzed to determine the length of time between transmission and receipt and the magnitude of the reflected sound wave. From this information, the ultrasound sensor may create a digital image of the inside of the user's mouth which may subsequently be used by the processor
30 **506** to determine the presence of certain tongue orientation characteristics of the user.

While only a single sensor **505** is shown in FIG. 5, additional sensors could be easily added at different locations around the user's mouth to facilitate determination of the user's tongue orientation characteristics.

FIG. 6 is a schematic/flow diagram illustrating a tongue tracking interface method for controlling a computer program. A user **607** may interact with a computer program running on an electronic device **609**. By way of example, the electronic device may include a computer processor that executes the program. Examples of suitable electronic devices include computers, laptop computers, video game consoles, digital cameras, digital televisions, cellular phones, and wheelchairs, electronic toys including toy airplanes, robots, musical instruments, audio speakers, and the like. It is further noted that tongue movement can be mapped, e.g., by a lookup table, to corresponding sounds, which may be pre-recorded or synthesized in a pre-determined manner. Consequently, sounds, including vocal sounds, may be directly generated from tongue movement even if the user's mouth is never opened. Similarly, tongue movement mapped to corresponding sounds can directly be converted into text, which can be fed into the electronic devices. This in effect allows speech recognition to be implemented through mapping of tongue movement to units of speech instead of mapping acoustic signals.

By way of example and not by way of limitation, the computer program may be a video game running on a video game system. The device **609** may be operably connected to a visual display **611** configured to display contents of the computer program to facilitate interaction between the user **607** and the computer program. The user **607** may communicate with the computer program through a user interface apparatus **613**. By way of example and not by way of limitation, the user interface apparatus **613** may be a keyboard, controller, joystick, steering wheel, etc. The user **607** may also be wearing a tongue tracking interface apparatus **608**, which may be configured as described above with respect to FIGs. 1A-1C, FIGs. 2A-2B, FIGs. 3A-3B, FIGs. 4A-4E, and FIG. 5.

During interaction with the computer program, the tongue tracking interface apparatus may determine one or more tongue orientation characteristics of the user as illustrated at **601**. The tongue tracking interface apparatus may determine the one or more tongue orientation characteristics in accordance with any of the methods discussed

above with respect to the tongue tracking interface apparatus described with respect to FIGs. 1A-1C, FIGs. 2A-2B, FIGs. 3A-3B, FIGs. 4A-4E, and FIG. 5. By way of example, and not by way of limitation, these tongue orientation characteristics may include: whether the tongue is moving to the left, right, up, or down; whether the tongue is rubbing against the teeth; whether the tongue is clipping, or whether the tongue is rotating.

Once the user's one or more tongue orientation characteristics have been determined, a control input may be established for the computer program using the orientation characteristics determined as illustrated at **603**. For example, if the user's tongue is moving to the right, a control input that corresponds to moving an object in the virtual environment created by the computer program to the right may be established.

After the control input has been established, the computer program may perform an action based on the control input as illustrated at **605**. By way of example, and not by way of limitation, this action may be the movement of an object associated with a virtual environment created by the computer program.

FIG. 7 illustrates a block diagram of a computer apparatus that may be used to implement a tongue tracking interface method for controlling a computer program according to an embodiment of the present invention. The apparatus **700** generally may include a processor module **701** and a memory **705**. The processor module **701** may include one or more processor cores. An example of a processing system that uses multiple processor modules, is a Cell Processor, examples of which are described in detail, e.g., in Cell Broadband Engine Architecture, which is available online at [http://www-306.ibm.com/chips/techlib/techlib.nsf/techdocs/1AEEE1270EA2776387357060006E61BA/\\$file/CBEA_01_pub.pdf](http://www-306.ibm.com/chips/techlib/techlib.nsf/techdocs/1AEEE1270EA2776387357060006E61BA/$file/CBEA_01_pub.pdf), which is incorporated herein by reference.

The memory **705** may be in the form of an integrated circuit, e.g., RAM, DRAM, ROM, and the like. The memory **705** may also be a main memory that is accessible by all of the processor modules. In some embodiments, the processor module **701** may have local memories associated with each core. A program **703** may be stored in the main memory **705** in the form of processor readable instructions that can be executed on the

processor modules. The program **703** may be configured to implement a tongue tracking interface method for controlling a computer program. The program **703** may be written in any suitable processor readable language, e.g., C, C++, JAVA, Assembly, MATLAB, FORTRAN, and a number of other languages. Input data **707** may also be stored in the memory. Such input data **707** may include determined tongue orientation characteristics of the user. During execution of the program **703**, portions of program code and/or data may be loaded into the memory or the local stores of processor cores for parallel processing by multiple processor cores.

The apparatus **700** may also include well-known support functions **709**, such as input/output (I/O) elements **711**, power supplies (P/S) **713**, a clock (CLK) **715**, and a cache **717**. The apparatus **700** may optionally include a mass storage device **719** such as a disk drive, CD-ROM drive, tape drive, or the like to store programs and/or data. The device **700** may optionally include a display unit **721** and user interface unit **725** to facilitate interaction between the apparatus **700** and a user. The display unit **721** may be in the form of a cathode ray tube (CRT) or flat panel screen that displays text, numerals, graphical symbols, or images. The user interface **725** may include a keyboard, mouse, joystick, light pen, or other device that may be used in conjunction with a graphic user interface (GUI). The apparatus **700** may also include a network interface **723** to enable the device to communicate with other devices over a network, e.g., a local area network, a personal area network, such as a Bluetooth® network, or a wide area network, such as the internet.

To facilitate generation of sounds, the apparatus **700** may further include an audio processor **730** adapted to generate analog or digital audio output from instructions and/or data provided by the processing module **701**, memory **705**, and/or storage **719**. The audio output may be converted to audible sounds, e.g., by a speaker **724**, which may be coupled to the I/O elements **711**.

One or more tongue tracking interface apparatuses **733** may be connected to the processor module **701** via the I/O elements **711**. As discussed above, these tongue tracking interface apparatuses **733** may be configured to determine one or more tongue orientation characteristics of a user in order to facilitate control of a computer program

running on the device **700**. The tracking interface maybe configured as described above with respect to FIGs. 1A-1C, FIGs. 2A-2B, FIGs. 3A-3B, FIGS. 4A-4E or FIG. 5. The tongue tracking interface apparatus **733** may be coupled to the I/O elements via a suitably configured wired or wireless link. In some embodiments, the tongue tracking interface

5 **733** may alternatively be coupled to the processor **701** via the network interface **723**.

The components of the system **700**, including the processor **701**, memory **705**, support functions **709**, mass storage device **719**, user interface **725**, network interface **723**, and display **721** may be operably connected to each other via one or more data buses **727**. These components may be implemented in hardware, software, firmware, or some

10 combination of two or more of these.

According to another embodiment, instructions for controlling a device using tongue tracking and the statistical behavior of one specific user's tongue movement may be stored in a computer readable storage medium. By way of example, and not by way of limitation, FIG. 8 illustrates an example of a non-transitory computer readable storage

15 medium **800** in accordance with an embodiment of the present invention. The storage medium **800** contains computer-readable instructions stored in a format that can be retrieved, interpreted, and executed by a computer processing device. By way of example, and not by way of limitation, the computer readable storage medium **800** may be a computer-readable memory, such as random access memory (RAM) or read only

20 memory (ROM), a computer readable storage disk for a fixed disk drive (e.g., a hard disk drive), or a removable disk drive. In addition, the computer-readable storage medium **800** may be a flash memory device, a computer-readable tape, a CD-ROM, a DVD-ROM, a Blu-Ray, HD-DVD, UMD, or other optical storage medium.

The storage medium **800** contains instructions for controlling a computer program

25 using tongue tracking instructions **801** configured to control a computer program using a tongue tracking interface apparatus. The instructions for controlling a computer program using tongue tracking **801** may be configured to implement control of a computer program using tongue tracking in accordance with the method described above with respect FIG. 6. In particular, the instructions for controlling a computer program using

30 tongue tracking **801** may include determining tongue orientation characteristics

instructions **803** that are used to determine one or more tongue orientation characteristics of a user while the user is interacting with the computer program. The determination of tongue orientation characteristics may be accomplished using any of the implementations discussed above.

5 The instructions for controlling a computer program using tongue tracking **801** may also include establishing control input instructions **805** that are used to establish one or more control inputs for the computer program based on the one or more tongue orientation characteristics determined. The control input inputs may be used to instruct the computer program to manipulate an object in a virtual environment associated with
10 the computer program, as discussed above.

 To utilize the control inputs established by the control input instructions **805**, the instructions for controlling a computer program using tongue tracking **801** may additionally include performing computer program action instructions **807** that instruct the computer program to perform one or more actions in accordance with the established
15 control inputs. By way of example, and not by way of limitation, these instructions may implement a look-up table that correlates a established control inputs to corresponding actions to be implemented by the computer program. Each action may be implemented by executing a corresponding set program code instructions.

 While the above is a complete description of the preferred embodiment of the
20 present invention, it is possible to use various alternatives, modifications, and equivalents. Therefore the scope of the present invention should be determined not with reference to the above description, but should, instead, be determined with reference to the appended claims, along with their full scope of equivalents. Any feature described herein, whether preferred or not, may be combined with any other feature described
25 herein, whether preferred or not. In the claims that follow, the indefinite article “A” or “An” refers to a quantity of one or more of the item following the article, except where expressly stated otherwise. The appended claims are not to be interpreted as including means-plus-function limitations, unless such a limitation is explicitly received in a give claim using the phrase “means for”.

WHAT IS CLAIMED IS:

- 1 1. A tongue tracking interface apparatus for control of a computer program, comprising:
2 a mouthpiece configured to be worn over one or more teeth of a user of the computer
3 program, the mouthpiece including one or more sensors configured to determine one
4 or more tongue orientation characteristics of the user.
- 1 2. The apparatus of claim 1, wherein the one or more sensors include a caged magnetic
2 ball that may be manipulated with the user's tongue, the caged magnetic ball having
3 an associated magnetic field.
- 1 3. The apparatus of claim 1, wherein the one or more sensors include a pressure sensor.
- 1 4. The apparatus of claim 1, wherein the one or more sensors include a thermal camera.
- 1 5. A tongue tracking interface apparatus for control of a computer program, comprising:
2 a headset to be worn by a user of the computer program, the headset including one or
3 more sensors configured to determine one or more tongue orientation characteristics
4 of the user.
- 1 6. The tongue tracking interface apparatus of claim 5, wherein the one or more sensors
2 include two microphones, each microphone being located on the tip of a
3 corresponding earphone of the headset, the microphones being configured to
4 determine one or more tongue orientation characteristics of the user.
- 1 7. The tongue tracking interface apparatus of claim 6, further comprising two
2 stethoscope acoustic sensors, each stethoscope acoustic sensor being located at the
3 center of a corresponding earphone, the stethoscope acoustic sensors being
4 configured to detect sound generated by movement of the user's jaw.
- 1 8. The tongue tracking interface apparatus of claim 6, further comprising one or more
2 additional microphones, the additional microphones being located at a contact point
3 between the headset and the user's chin, the microphone being configured to detect
4 sound generated by movement of the user's jaw.

- 1 9. The tongue tracking interface apparatus of claim 5, wherein the one or more sensors
2 includes an ultrasound sensor, the ultrasound sensor being configured to capture one
3 or ultrasound signals from the user's mouth.
- 1 10. The tongue tracking interface apparatus of claim 5, wherein the one or more sensors
2 includes an infrared sensor, the infrared sensor being configured to capture one or
3 more infrared signals from the user's mouth.
- 1 11. The tongue tracking interface apparatus of claim 5, wherein the one or more sensors
2 includes a Bluetooth sensor, the Bluetooth sensor being configured to determine one
3 or more tongue orientation characteristics of the user.
- 1 12. The tongue tracking interface apparatus of claim 5, further comprising a necklace to
2 be worn around a neck of the user, the necklace including one or more sensors
3 configured to detect sound generated by movement of the user's jaw, neck, or throat.
- 1 13. The tongue tracking interface apparatus of claim 12, wherein the one or more sensors
2 includes a microphone, the microphone being configured to detect sound generated
3 by movement of the user's jaw, neck, or throat.
- 4 14. The tongue tracking interface apparatus of claim 12, wherein the one or more sensors
5 includes a pressure sensor, the pressure sensor being configured to detect pressure
6 generated by movement of the user's jaw, neck, or throat.
- 1 15. The tongue tracking interface apparatus of claim 1, wherein the one or more sensors
2 are configured to detect a change in electric field of the tongue resulting from
3 movement of the tongue.
- 1 16. A tongue tracking interface method for control of a computer program, comprising:
2 a) determining one or more tongue orientation characteristics of a user of the
3 computer program; and
4 b) establishing a control input for the computer program using the one or more tongue
5 orientation characteristics determined in a).
- 1 17. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using a pressure sensor attached to a dental retainer
3 worn by the user.

- 1 18. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using a thermal camera attached to a dental retainer
3 worn by the user.
- 1 19. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using a magnetic ball attached to a dental retainer worn
3 by the user and external magnetic sensors.
- 1 20. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using a dental retainer worn by the user and one or more
3 microphones.
- 1 21. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using two microphones, each microphone being located
3 on the tip of an earphone to be inserted into the user's ears.
- 1 22. The method of claim 21, wherein determining one or more tongue orientation
2 characteristics in a) further comprises using two acoustic sensors, each acoustic
3 sensor being located in the middle of the earphone to be inserted into the user's ears,
4 the acoustic sensors being configured to process sound generated by the user's jaws,
5 the sound generated by the user's jaws providing supplemental data to facilitate
6 determination of the one or more tongue orientation characteristics.
- 1 23. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using one or more microphones, each microphone being
3 located in close proximity to the user's mouth.
- 1 24. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using an ultrasound device located in close proximity to
3 the user's mouth.
- 1 25. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using an infrared sensor located in close proximity to the
3 user's mouth.

1 26. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) involves using a Bluetooth sensor in close proximity to the user's
3 mouth.

1 27. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) further includes determining one or more corresponding throat
3 orientation characteristics of the user using one or more microphones placed on the
4 user's throat, the one or more corresponding throat orientation characteristics
5 providing supplemental data to facilitate determination of the one or more tongue
6 orientation characteristics.

7 28. The method of claim 16, wherein determining one or more tongue orientation
8 characteristics in a) further includes determining one or more corresponding throat
9 orientation characteristics of the user using one or more pressure sensors placed on
10 the user's throat, the one or more corresponding throat orientation characteristics
11 providing supplemental data to facilitate determination of the one or more tongue
12 orientation characteristics.

1 29. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) includes determining whether the tongue is moving up, down, to
3 the left, or to the right.

1 30. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) includes determining whether the tongue is rubbing against teeth.

1 31. The method of claim 16, wherein determining the one or more tongue orientation
2 characteristics in a) includes determining whether the tongue is clipping.

1 32. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics in a) includes determining whether the tongue is rotating.

1 33. The method of claim 16, wherein establishing a control input for the computer
2 program includes using a history of the user's past tongue activity.

1 34. The method of claim 16, wherein determining one or more tongue orientation
2 characteristics includes detecting a change in an electric field of the tongue resulting
3 from movement of the tongue.

1 35. An apparatus for control of a computer program, comprising:

2 a tongue tracking interface apparatus;

3 a processor operably coupled to the tongue tracking interface apparatus;

4 a memory; and

5 computer-coded instructions embodied in the memory and executable by the

6 processor, wherein the computer coded instructions are configured to implement a

7 tongue tracking interface method for control of a computer program, the method

8 comprising:

9 a) determining one or more tongue orientation characteristics of a user of the

10 computer program using the tongue tracking interface apparatus; and

11 b) establishing a control input for the computer program using the one or more tongue

12 orientation characteristics determined in a).

1 36. A computer program product, comprising:

2 a non-transitory, computer-readable storage medium having computer readable

3 program code embodied in said medium for implementing a tongue tracking interface

4 method for control of a computer program, said computer program product having:

5 a) computer readable program code means for determining one or more tongue

6 orientation characteristics of a user of the computer program; and

7 b) computer readable program code means for establishing a control input for the

8 computer program using the one or more tongue orientation characteristics

9 determined in a).

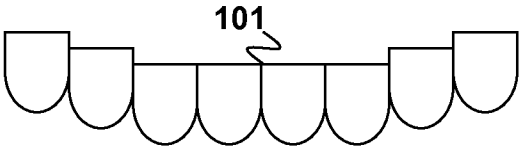


FIG. 1A

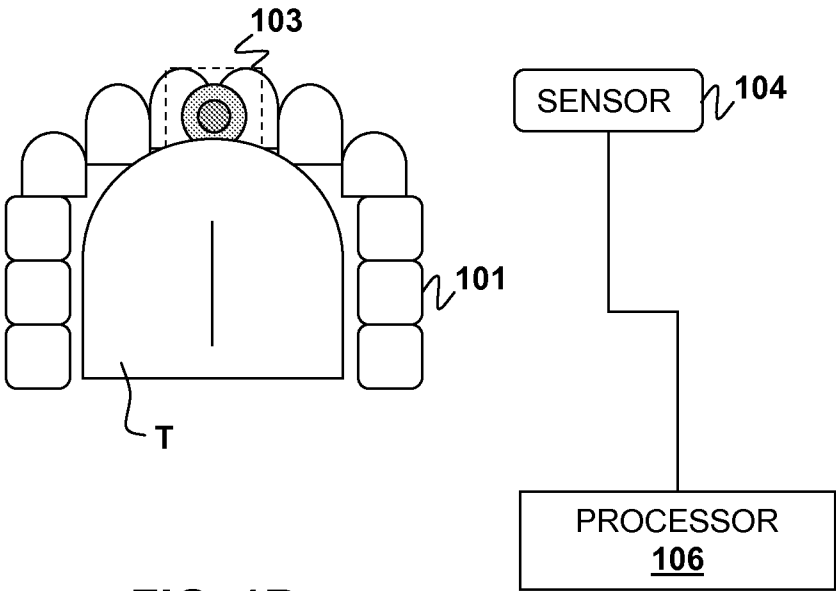


FIG. 1B




FIG. 1C

FIG. 2A

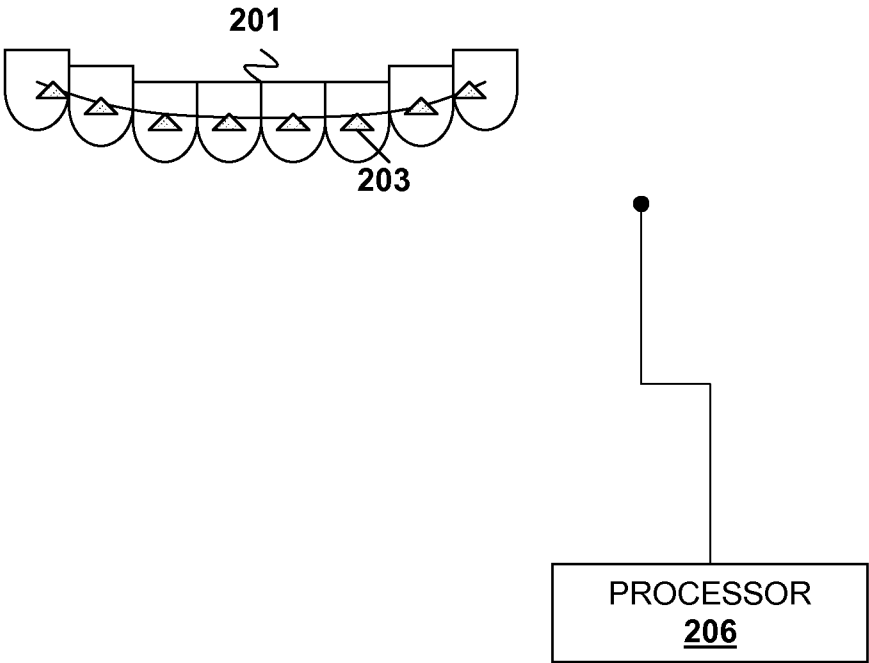
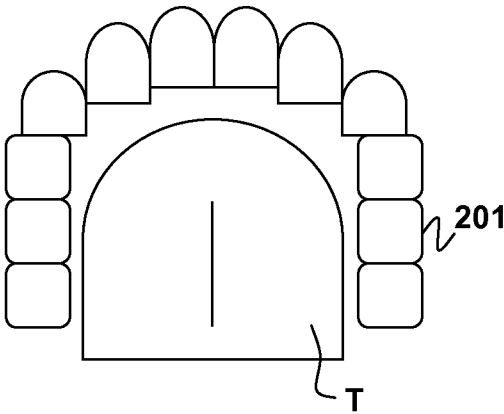


FIG. 2B



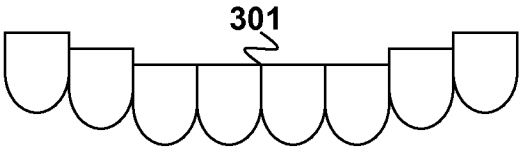


FIG. 3A

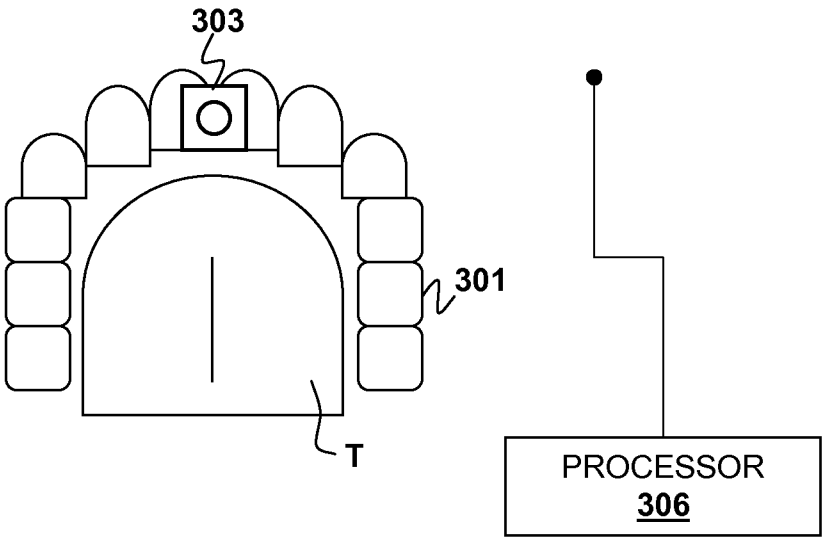


FIG. 3B

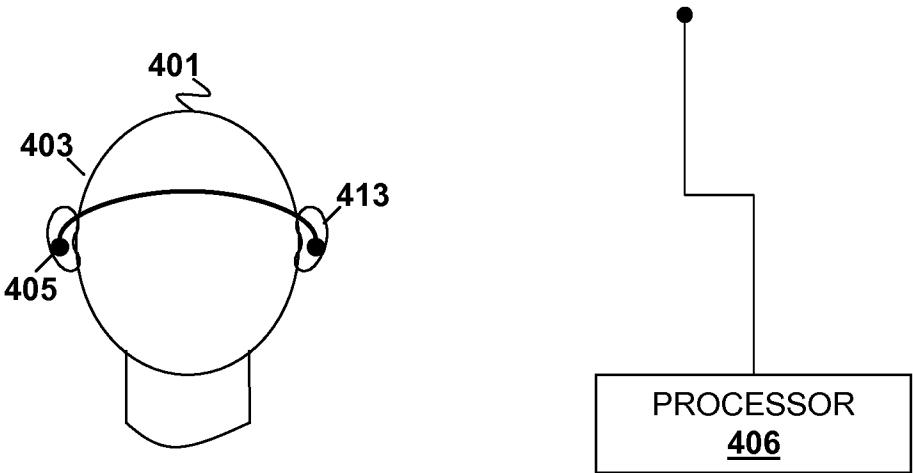


FIG. 4A

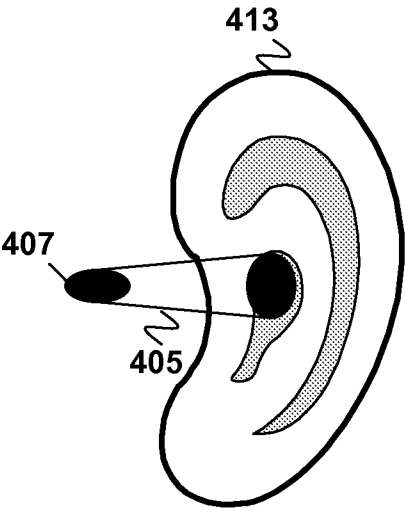


FIG. 4B

5/10

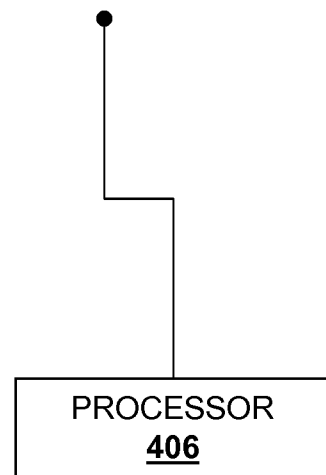
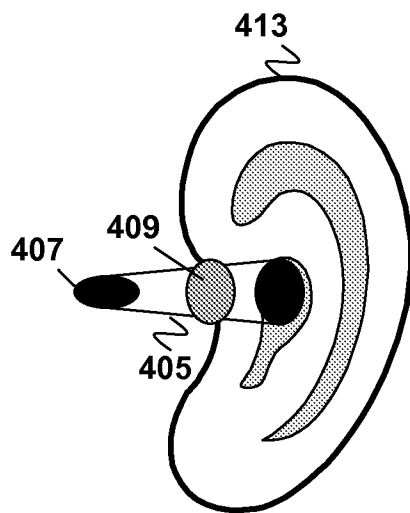


FIG. 4C

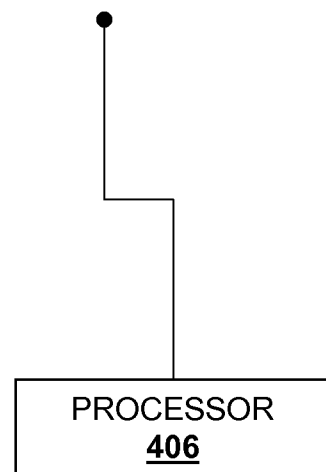
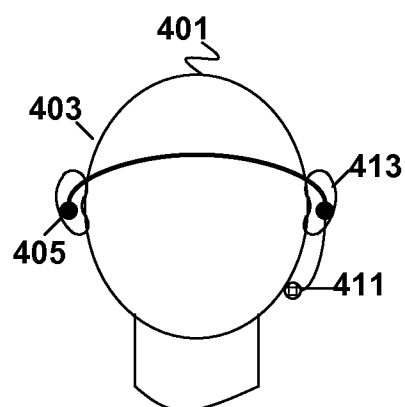


FIG. 4D

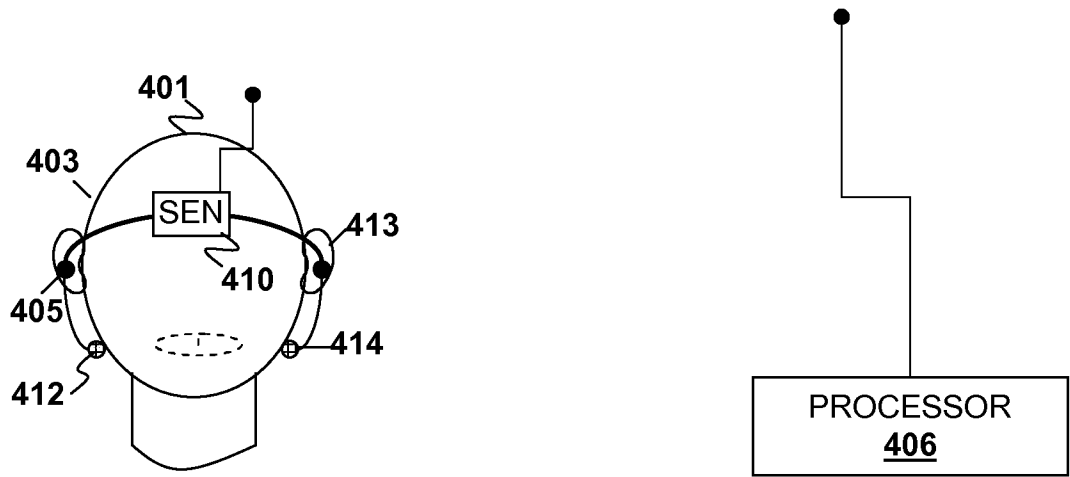


FIG. 4E

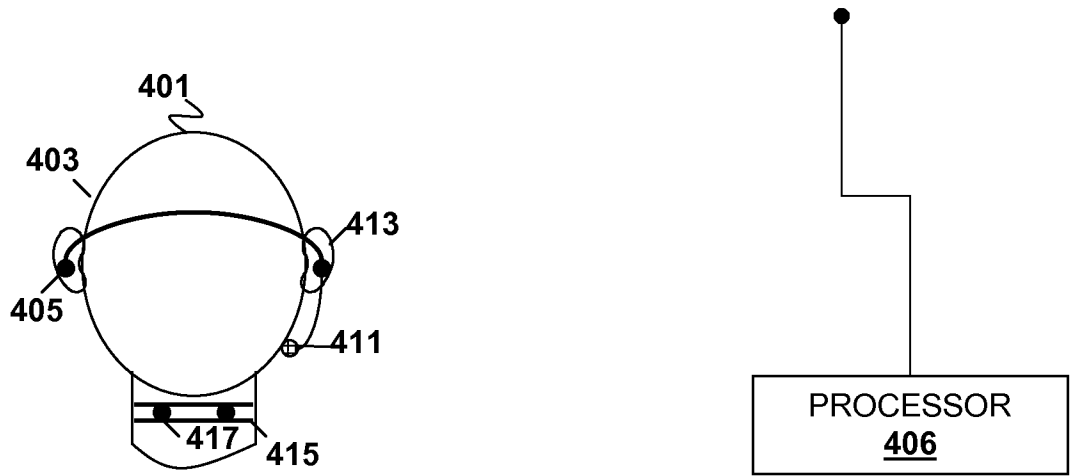


FIG. 4F

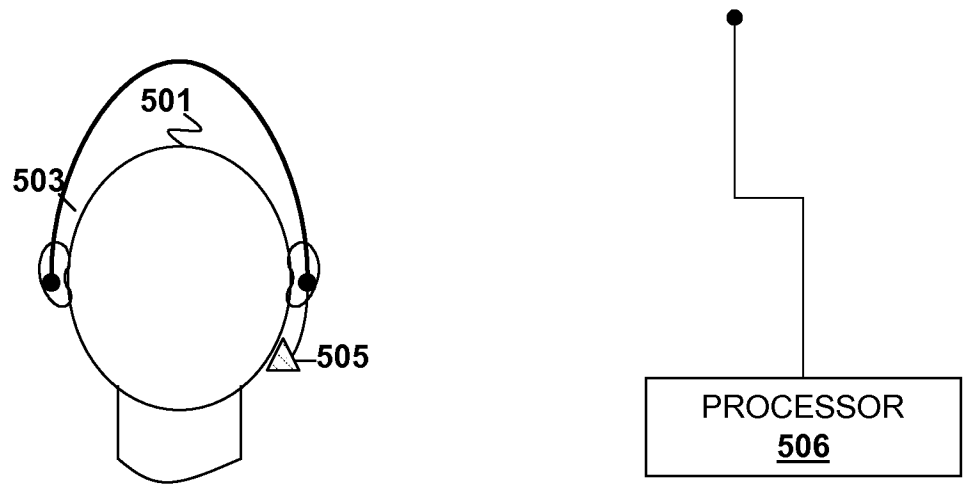
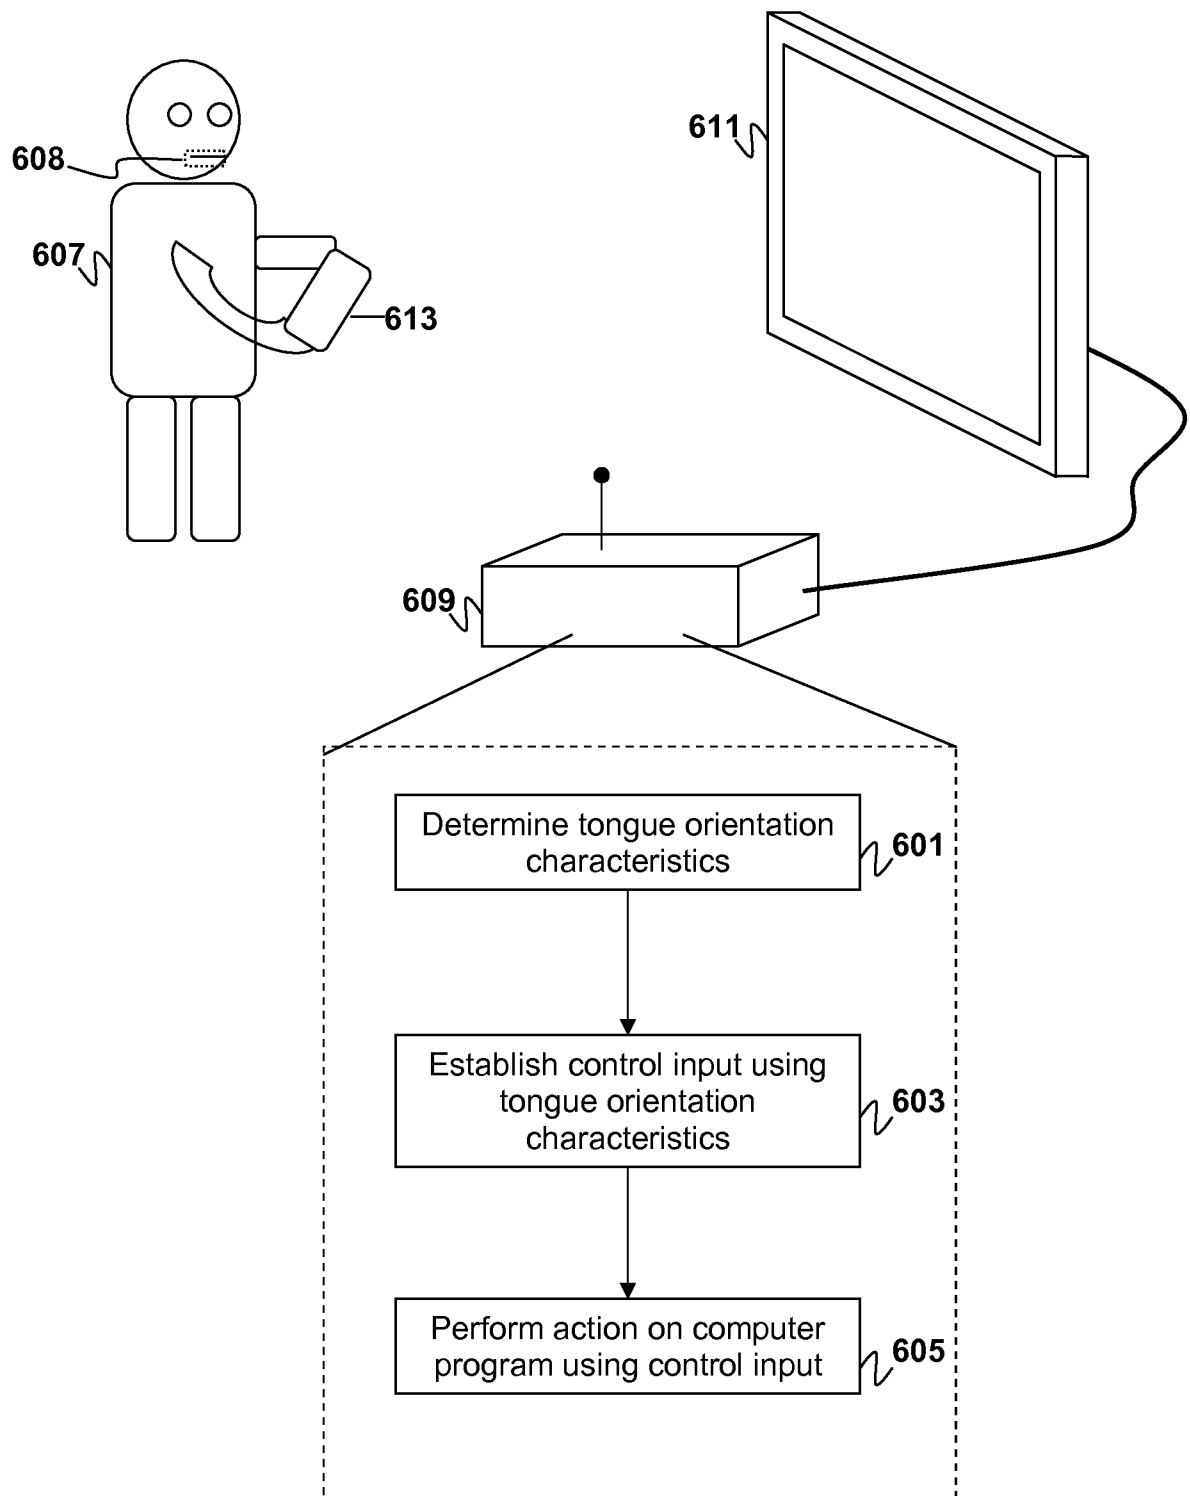
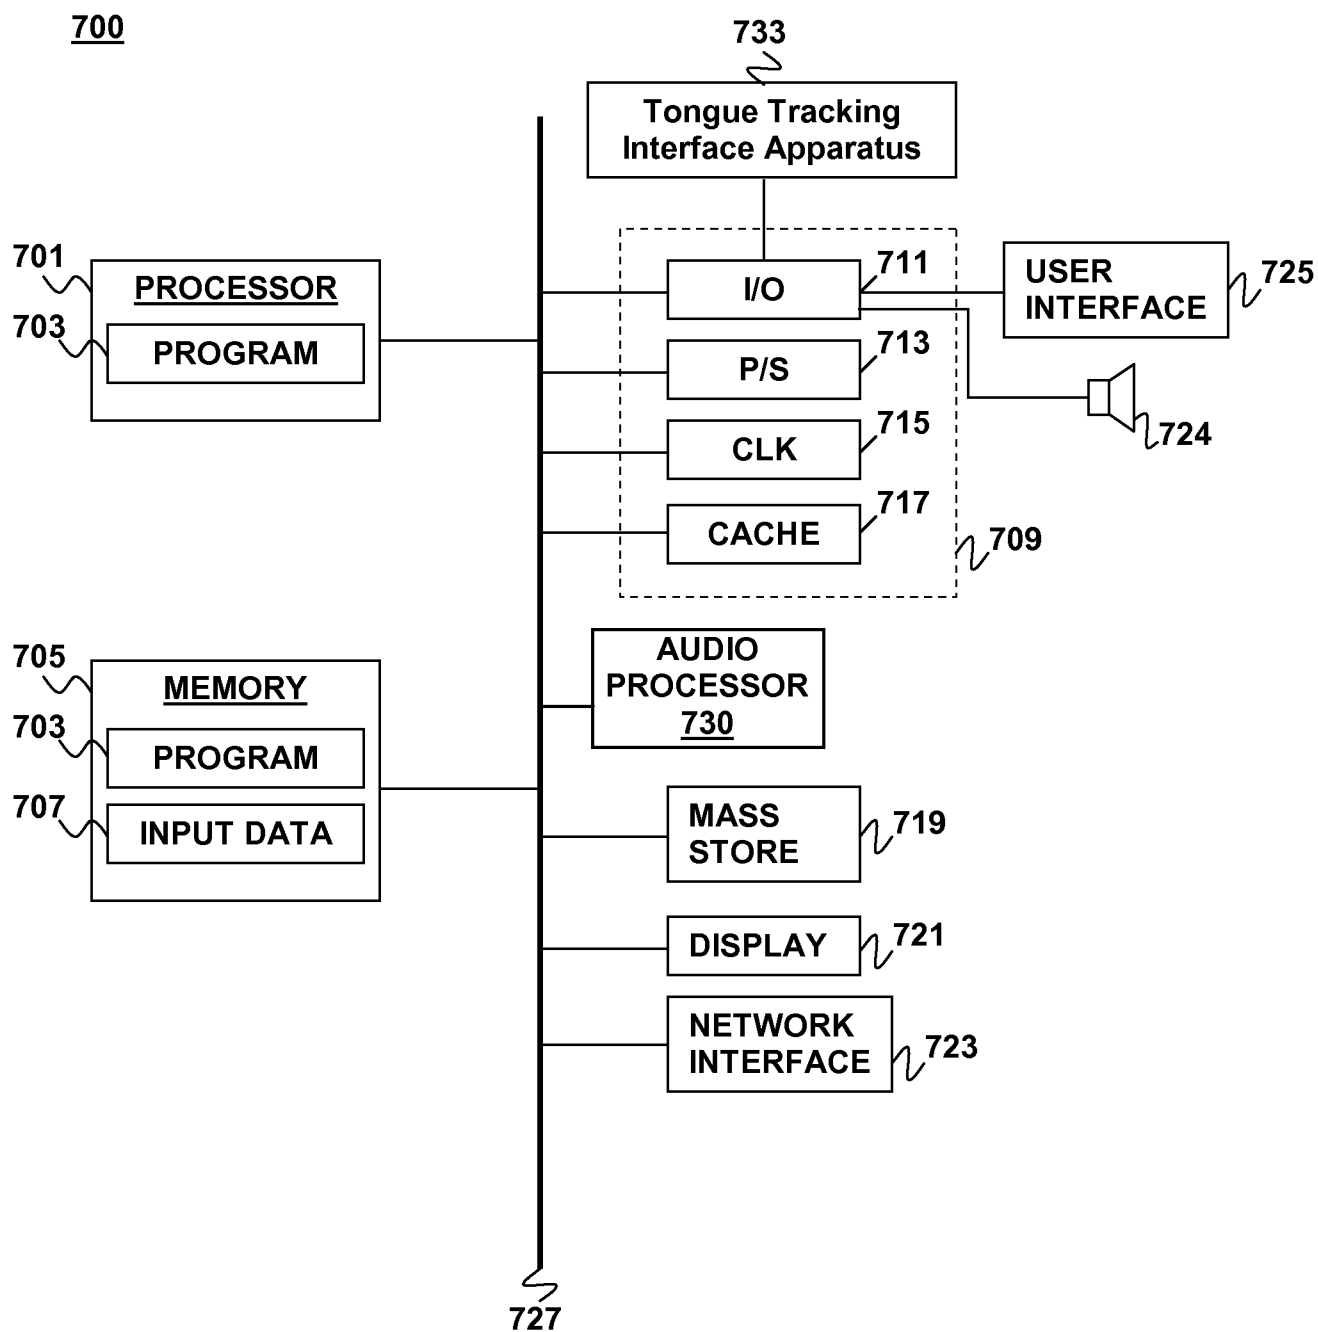


FIG. 5

8/10

**FIG. 6**

9/10

**FIG. 7**

10/10

800

801



**INSTRUCTIONS FOR CONTROLLING
COMPUTER PROGRAM USING
TONGUE TRACKING**

**DETERMING TONGUE ORIENTATION
CHARACTERISTICS
INSTRUCTIONS
803**

**ESTABLISHING CONTROL INPUT
INSTRUCTIONS
805**

**PERFORMING COMPUTER PROGRAM ACTION
INSTRUCTIONS
807**

FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2012/028617

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G08B 23/00 (2012.01)

USPC - 340/573.1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - G08B 21/00, 21/02, 23/00 (2012.01)

USPC - 340/573.1, 686.1, 686.2, 689

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Patents, Google Scholar

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2009/0309747 A1 (GHOVANLOO et al) 17 December 2009 (17.12.2009) entire document	1, 2, 5, 6, 11, 16, 19-21, 23, 26, 29-33, 35, 36 --- 3, 4, 7-10, 12-15, 17, 18, 22, 24, 25, 27, 28, 34
Y	US 2011/0057874 A1 (AL-TAWIL) 10 March 2011 (10.03.2011) entire document	3, 17
Y	US 2004/0243416 A1 (GARDOS) 02 December 2004 (02.12.2004) entire document	4, 18
Y	US 2004/0154550 A1 (MCQUILKIN) 12 August 2004 (12.08.2004) entire document	4, 18
Y	US 6,006,175 A (HOLZRICHTER) 21 December 1999 (21.12.1999) entire document	15, 34
Y	US 2009/0030346 A1 (KOJIMA et al) 29 January 2009 (29.01.2009) entire document	10, 12-14, 25, 27, 28
Y	US 2006/0064037 A1 (SHALON et al) 23 March 2006 (23.03.2006) entire document	9, 24
Y	US 7,778,430 B2 (NAKAJIMA et al) 17 August 2010 (17.08.2010) entire document	7, 8, 22

☐ Further documents are listed in the continuation of Box C. ☐

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

33 June 2012

Date of mailing of the international search report

28 JUN 2012

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774