



(22) Date de dépôt/Filing Date: 2002/02/11

(41) Mise à la disp. pub./Open to Public Insp.: 2002/08/21

(45) Date de délivrance/Issue Date: 2007/08/14

(30) Priorité/Priority: 2001/02/21 (CH01 810 183.2)

(51) Cl.Int./Int.Cl. *C22C 21/08* (2006.01)

(72) Inventeurs/Inventors:

WINKLER, REINHARD, DE;
HOLLRIGL, GUNTER, CH;
WUEST, JURGEN, DE;
WAHRISCH, KLAUS, DE


(73) Propriétaire/Owner:

ALCAN TECHNOLOGY & MANAGEMENT LTD., CH

(74) Agent: OGILVY RENAULT LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : ALLIAGE DE TYPE ALMgSI POUR MOULAGE

(54) Title: AlMgSi CASTING ALLOY

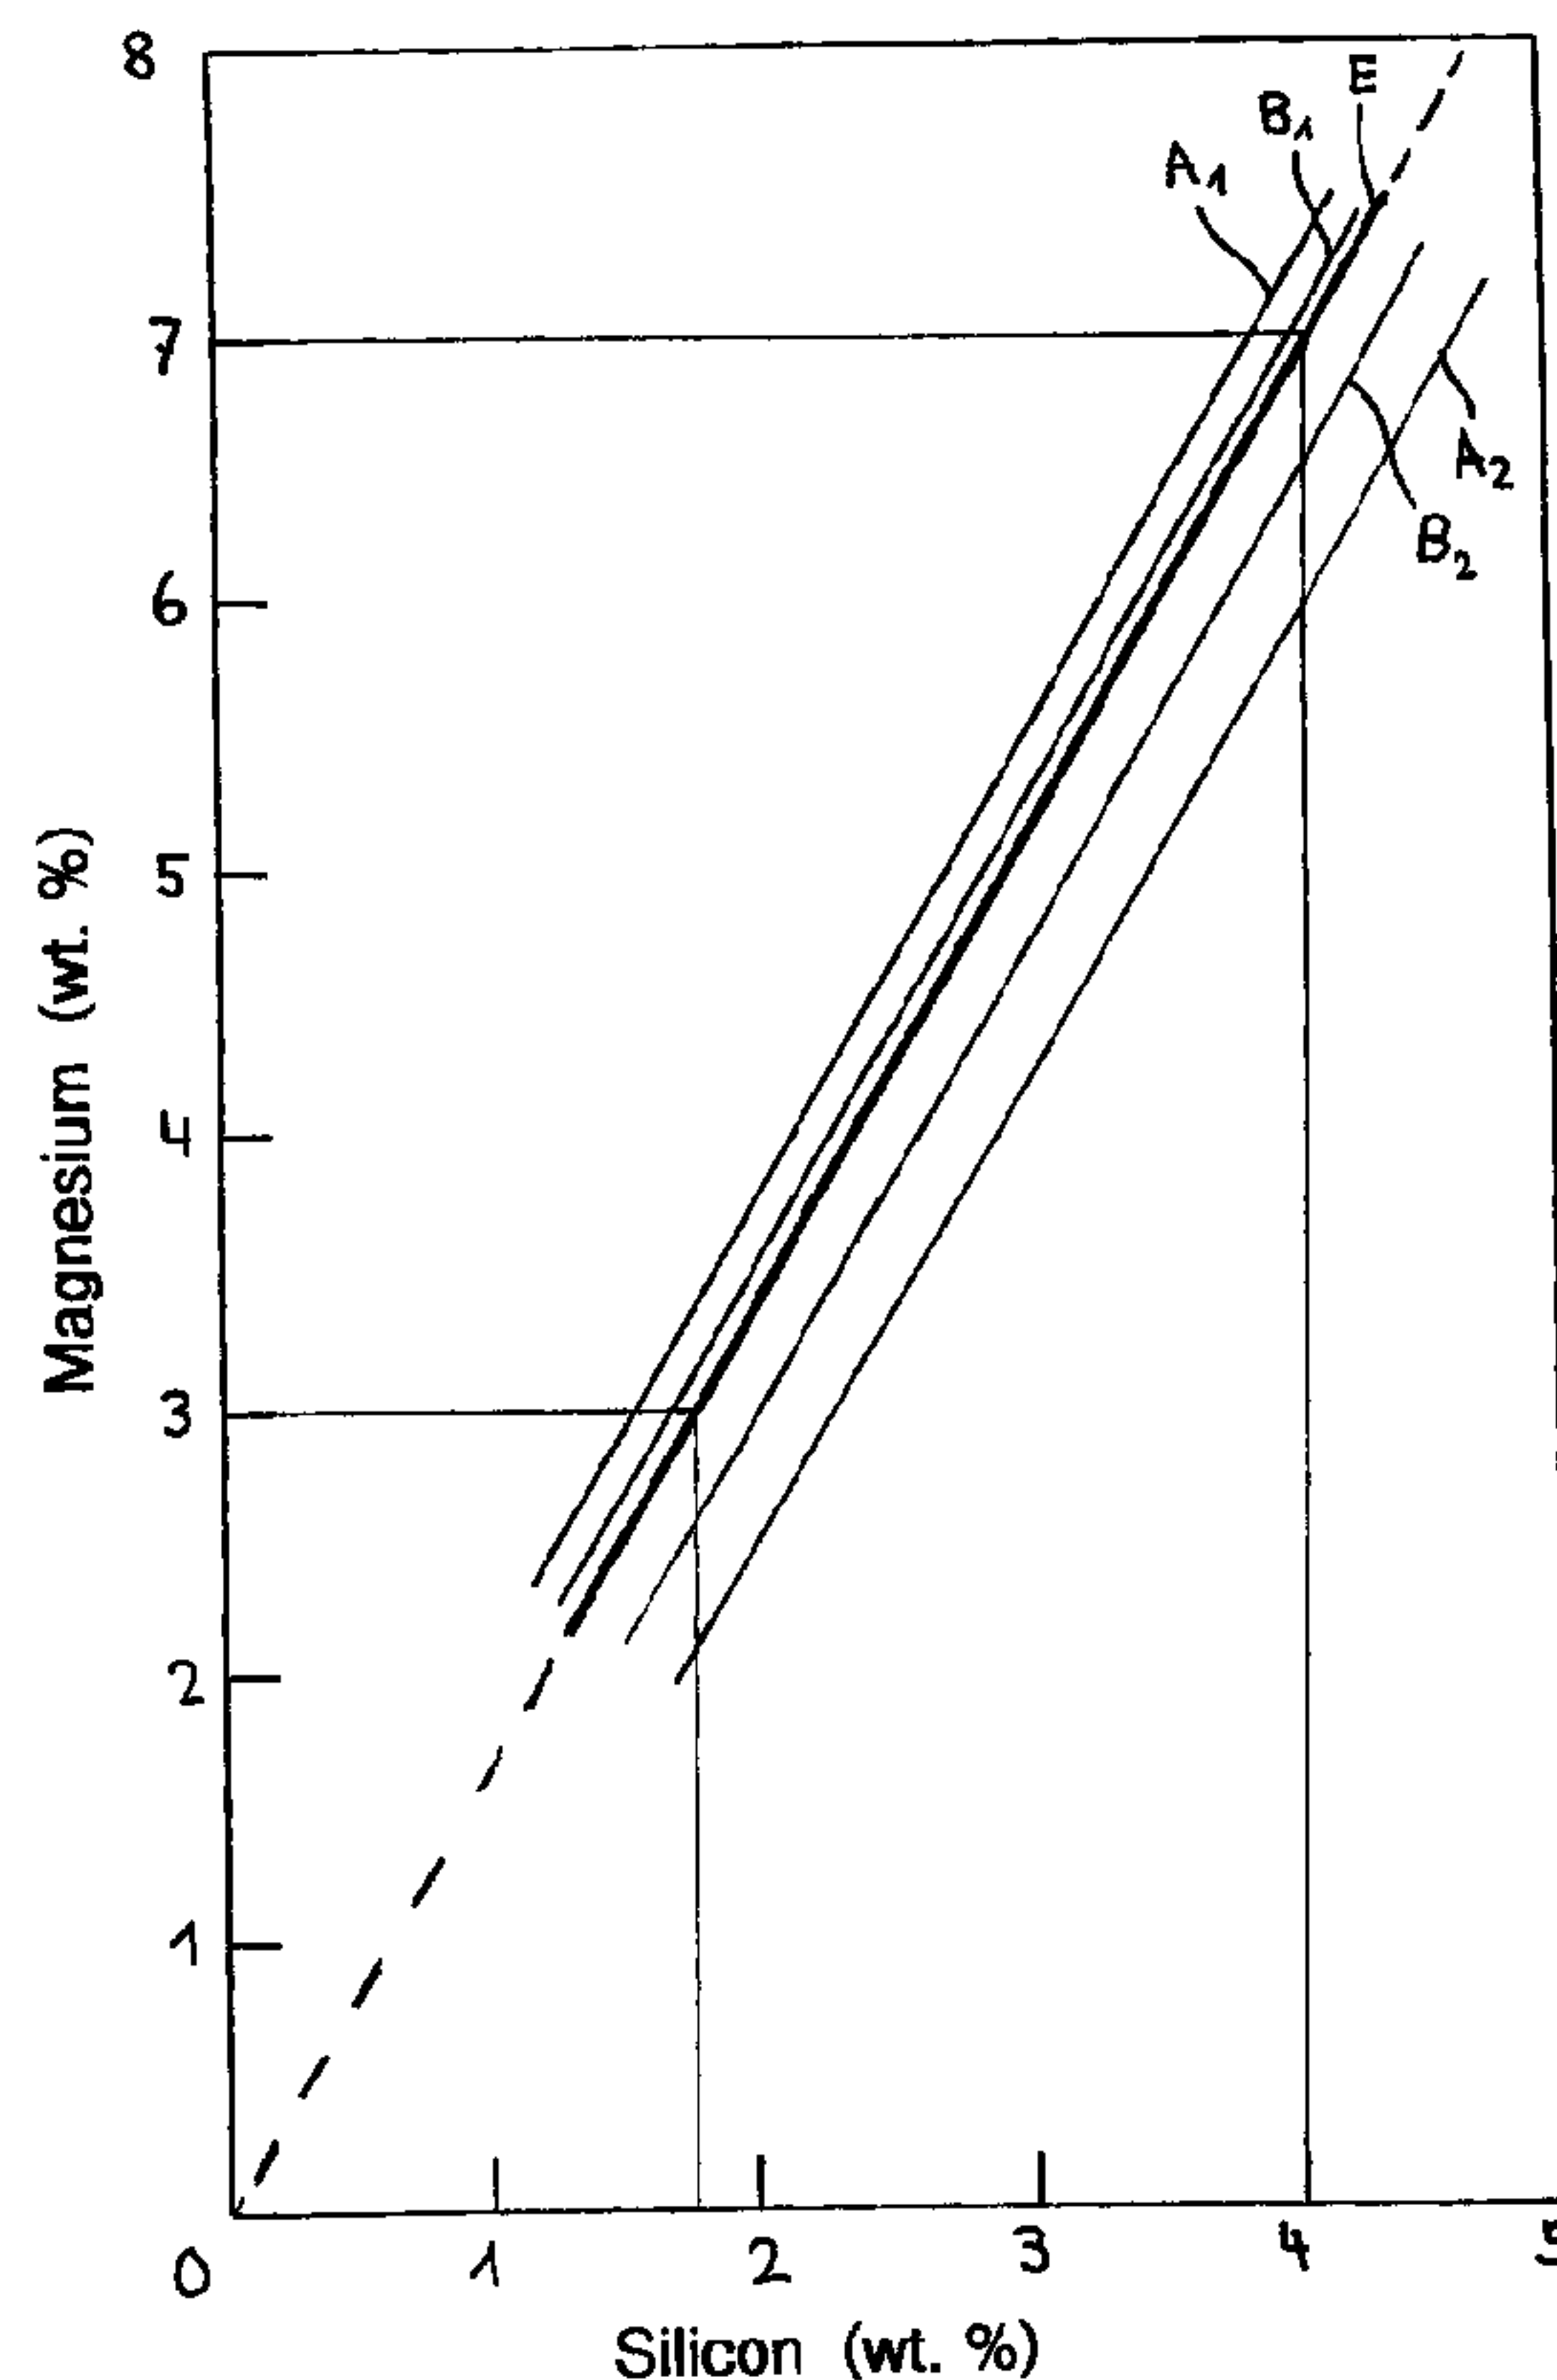

(57) Abrégé/Abstract:

A casting alloy of the AlMgSi type contains

Magnesium 3.0 to 7.0 wt. %

Silicon 1.7 to 3.0 wt. %

Manganese 0.2 to 0.48 wt. %

Iron 0.15 to 0.35 wt. %

(57) Abrégé(suite)/Abstract(continued):

Titanium max. 0.2 wt. % as desired

Ni 0.1 to 0.4 wt %

and aluminium as the rest along with production related impurities, individually at most 0.02 wt. %, in total at most 0.2 wt. %, with the further provision that the magnesium and silicon are present in the alloy in a Mg : Si weight ratio of 1.7 : 1, corresponding to the composition of the quasi binary eutectic made up of the solid state phases Al and Mg₂Si, whereby the deviation from the exact composition of the quasi-binary eutectic amounts to at most -0.5 to +0.3 wt. % for magnesium and -0.3 to +0.5 wt. % for silicon. The finely dispersed precipitates of the intermetallic phase Mg₂Si results in high ductility. Good spherodisation of the Mg₂Si precipitate particles takes place already at temperatures less than 400°C.

Abstract

A casting alloy of the AlMgSi type contains

5

Magnesium	3.0	to	7.0	wt. %
Silicon	1.7	to	3.0	wt. %
Manganese	0.2	to	0.48	wt. %
Iron	0.15	to	0.35	wt. %
10 Titanium	max.		0.2	wt. %
as desired				
Ni	0.1	to	0.4	wt %

15 and aluminium as the rest along with production related impurities, individually at most 0.02 wt. %, in total at most 0.2 wt. %, with the further provision that the magnesium and silicon are present in the alloy in a Mg : Si weight ratio of 1.7 : 1, corresponding to the composition of the quasi binary eutectic made up of the solid state phases Al and Mg_2Si , whereby the deviation from the exact composition of the quasi-binary eutectic amounts to at most -0.5 to 20 +0.3 wt. % for magnesium and -0.3 to +0.5 wt. % for silicon.

The finely dispersed precipitates of the intermetallic phase Mg_2Si results in high ductility. Good spherodisation of the Mg_2Si precipitate particles takes place already at temperatures less than 400°C.

25

(Fig. 1)

AlMgSi Casting Alloy

The invention relates to a casting alloy of the AlMgSi type. Also within the scope of the invention is the use of the casting alloy for pressure diecasting, rheocasting and thixocasting, the use of the casting alloy for manufacturing large area and thin-walled components with a high capacity for absorbing kinetic energy by plastic deformation and the use of the casting alloy for manufacturing a component in the form of a safety element in automobile manufacture.

10 By using modern casting methods it is possible to produce components made of an aluminium alloy which can bear high loads. The aluminium alloys employed, however, must meet a number of requirements. One essential requirement defining the suitability of an alloy is the ability to satisfy specific mechanical properties. Certain minimum values of yield strength and tensile strength determine
15 the load bearing capacity of a structure. In vehicle manufacture there is the further requirement that components that are bent as a result of collision should, prior to fracture, absorb as much energy as possible by plastic deformation – which calls for high ductility in the material selected. Under large series production conditions, it is possible to produce thin-walled castings in a cost favourable manner using
20 pressure diecasting, rheocasting and thixocasting methods i.e. in a form for use as crash-relevant components in automobile manufacture. Thin walled parts place high demands on castability. Aluminium alloys able to provide the required flow behaviour or mould filling capacity are mainly those alloys with a eutectic containing silicon.

25 An AlMgSiMn alloy that is suitable for diecasting, rheocasting and thixocasting safety components for the automobile industry is known from EP-A-0 792 380. The alloy exhibits a magnesium excess compared with the composition corresponding to the quasi-binary eutectic. As a result of the high manganese content, sticking in
30 the mould is avoided and the ease of removal from the mould is good. Apart from that, the alloy has a very low iron content.

Components with wall thicknesses that are in some cases small, such as those employed as structural parts in automobile manufacture, tend to distort on quench-
35 ing with water and must, therefore, subsequently undergo complicated straightening operations. Also, residual gas porosity and a high solution treatment temper-

- 2 -

ature can lead to blisters at the surface of the component. In the production of components of the kind mentioned above using pressure diecasting, rheocasting and thixocasting attempts are made, therefore, to meet the minimum strength and elongation values without high temperature solution treatment and subsequent
5 water quenching.

For crash-relevant components in automobile manufacture the emphasis is placed on ductility i.e. formability and on ductile failure expressed by the elongation at fracture. The strength, expressed by the yield strength, can thereby be relatively
10 low.

The object of the invention is to specify an aluminium alloy by means of which a high elongation at fracture can be reached with adequate yield strength, also without performing high temperature solution treatment and subsequent water quench-
15 ing.

That objective is achieved by way of the invention in the form of a casting alloy of the AlMgSi type containing:

20	Magnesium	3.0	to	7.0	wt. %
	Silicon	1.7	to	3.0	wt. %
	Manganese	0.2	to	0.48	wt. %
	Iron	0.15	to	0.35	wt. %
	Titanium	max.		0.2	wt. %
25	as desired				
	Ni	0.1	to	0.4	wt %

and aluminium as the rest along with production related impurities, individually at most 0.02 wt. %, (weight-%) in total at most 0.2 wt. %, and with the further
30 provision that the magnesium and silicon are present in the alloy in a Mg : Si weight ratio of 1.7 : 1, corresponding to the quasi binary eutectic made up of the phases Al and Mg₂Si, whereby the deviation from the exact composition of the quasi-binary eutectic amounts to at most -0.5 to +0.3 wt. % for magnesium and -0.3 to +0.5 wt. % for silicon.

35

- 3 -

As a result of the selected, specific ratio of Mg : Si, the alloy according to the invention exhibits extremely favourable precipitation of the eutectic phase Mg_2Si i.e. extremely finely and uniformly distributed, resulting in improved ductility with respect to comparable state-of-the-art alloys. Because of the higher iron content, it is possible to use aluminium of lower purity as its basis, thus reducing the production costs for the alloy. The higher iron content also makes it possible to reduce the amount of manganese added to the alloy to reduce the tendency to sticking to the diecasting mould. To achieve optimal mechanical properties care must be taken to ensure that the deviation from the exact composition for the quasi-binary eutectic amounts, at most, to -0.2 to $+0.1$ wt. % for magnesium and at most -0.1 to $+0.2$ wt. % for silicon.

In a casting alloy of optimal composition the concentrations of magnesium and silicon lie essentially in a weight ratio of Mg : Si of $1.7 : 1$ corresponding to the composition of the quasi-binary eutectic.

The optional addition of 0.1 to 0.4 wt. % nickel leads to a further improvement in the ability to remove the part from the die i.e. reduction in sticking behaviour, as a result of which the manganese content in the alloy can be kept to the lower limit.

20

The higher iron and if desired nickel content in comparison with the alloy previously known from EP-A-0 792 380 has a positive influence on the mechanical properties as the $Al_{12}(Mn,Fe)_3Si$ phases occurring in this alloy are notably finer and more uniformly distributed in the structure.

25

Using the alloy according to the invention it is possible to meet all the requirements concerning strength and ductility of a safety part in automobile manufacture, this after performing the following three types of heat treatment viz., A, B and C:

30 Type A: As cast condition, moderate strength and good ductility, no heat treatment necessary

Type B: Highest strength and moderate ductility, two heat treatments necessary

35

- 4 -

Type C: Moderate strength and highest ductility, one heat treatment necessary.

A heat treatment of type A leads to a yield strength $R_{p0.2}$ of up to 180 MPa and an elongation at fracture A_5 of up to 13%. These strength and elongation properties can not be achieved with the normal diecasting, rheocasting and thixocasting alloys in the as-cast condition, i.e. without heat treatment.

With a type B heat treatment i.e. with solution treatment and precipitation hardening, strength values expressed as the yield strength $R_{p0.2}$ of up to 380 MPa can be reached, which is not possible with commercially available diecasting, rheocasting or thixocasting alloys.

With a type C heat treatment involving a solution heat treatment at 380 – 460°C followed by air cooling it is possible to dispense with an artificial age-hardening heat treatment. As a result of the finely dispersed precipitation of the Mg_2Si phase, ductility, or rounding off of the precipitates, is achieved already at a treatment temperature of less than 400°C. In the case of a type C heat treatment condition the alloy according to the invention is therefore a preferred version for components that have to meet the high demands related to crash behaviour. Apart from the fact that that components solution treated at a temperature below 400°C and cooled in still air exhibit little distortion, the formation of gas-related blisters can be avoided by this heat treatment as a result of the relatively low temperature.

A eutectic-spherodising anneal at temperatures around 500°C - currently normal in connection with diecasting, rheocasting and thixocasting alloys of the AlSi type - can be omitted to achieve the properties necessary for crash-relevant components.

As already mentioned, the alloy according to the invention is preferably employed for diecasting, rheocasting and thixocasting.

The preferred field of application for the alloy according to the invention is the production of large area, thin walled components having a large capacity for absorbing kinetic energy by plastic deformation. These properties correspond with the requirements made of safety components in automobile manufacture – for

- 5 -

which reason the alloy is particularly suitable for manufacturing the above mentioned safety components.

Further advantages, features and details of the invention are revealed in the following description of preferred exemplified embodiments and with the aid of the drawing which shows in simplified form in

Fig. 1 the Mg : Si ratio in the alloy according to the invention, along with the tolerance limits.

10

Shown by line E in figure 1 is the optimal Mg : Si weight ratio of 1.7 : 1 corresponding to the composition of the quasi-binary Al/Mg₂Si eutectic, whereby the region of interest here is 3.0 to 7.0 wt.% for the magnesium content and 1.7 to 3.0 wt.% for the silicon content. The maximum tolerable limits for magnesium and silicon are defined by the two straight lines A1 and A2, the preferred tolerance limits are indicated by the straight lines B1 and B2, whereby A1 and B1, with reference to the eutectic composition of the phases Al and Mg₂Si, lie on the magnesium excess side and A2 and B2 lie on the silicon excess side. The casting alloy according to the invention has its larger tolerance region on the silicon excess side.

20

Examples

A cast part with a wall thickness of 2.5 mm was produced on a diecasting machine using an alloy of the following composition (wt.%)

25

Mg	Si	Mn	Ni	Fe	Ti
3.25	1.91	0.25	0.19	0.19	0.08

and aluminium as the rest along with impurities resulting from the manufacturing process individually at most 0.02 wt.%, in total at most 0.2 wt.%. Tensile test pieces were prepared from the casting and the mechanical properties of these determined after subjecting them to heat treatments according to the types A, B and C. The following heat treatments were carried out:

35 Type A: As-cast, no heat treatment

- 6 -

Type B: Solution treatment for 3h at 540°C, quenched in water, precipitation hardening for 8h at 170°C.

Type C: 50 minutes heat treatment at 390°C, followed by cooling in still air.

5

The results are summarised in the following table where Rp0.2 represents the yield strength, Rm the tensile strength at failure and A5 the elongation at failure. The values represent the average values from five test pieces.

Heat treatment	Rp0.2 (MPa)	Rm (MPa)	A5 (%)
Type A	186.2	324.6	12.0
Type B	355.8	430.2	4.1
Type C	110.3	240.2	16.5

- 7 -

Claims

1. Casting alloy of the AlMgSi type, characterised in that the alloy contains

5	Magnesium	3.0	to	7.0	wt. %
	Silicon	1.7	to	3.0	wt. %
	Manganese	0.2	to	0.48	wt. %
	Iron	0.15	to	0.35	wt. %
	Titanium	max.		0.2	wt. %
10	as desired				
	Ni	0.1	to	0.4	wt %

and aluminium as the rest along with production related impurities, individually at most 0.02 wt. %, in total at most 0.2 wt. %, with the further provision
 15 that the magnesium and silicon are present in the alloy in a Mg : Si weight ratio of 1.7 : 1, corresponding to the composition of the quasi binary eutectic made up of the solid state phases Al and Mg₂Si, whereby the deviation from the exact composition of the quasi-binary eutectic amounts to at most -0.5 to +0.3 wt. % for magnesium and -0.3 to +0.5 wt. % for silicon.

20


2. Casting alloy according to claim 1, characterised in that the deviation from the exact composition for the quasi-binary eutectic amounts, at most, to -0.2 to +0.1 wt. % for magnesium and at most -0.1 to +0.2 wt. % for silicon.
- 25 3. Casting alloy according to claim 1, characterised in that the concentrations of magnesium and silicon lie essentially in a Mg : Si weight ratio of 1.7 : 1 corresponding to the composition of the quasi-binary eutectic.
4. Use of a casting alloy according to one of the claims 1 to 3 for diecasting,
 30 rheocasting and thixocasting.
5. Use of a casting alloy according to one of the claims 1 to 3 for production of large area and thin walled components having a high capacity for absorbing kinetic energy by plastic deformation.

35

- 8 -

6. Use of a casting alloy according to one of the claims 1 to 3 for production of a component functioning as a safety component in vehicle manufacture.

1/1

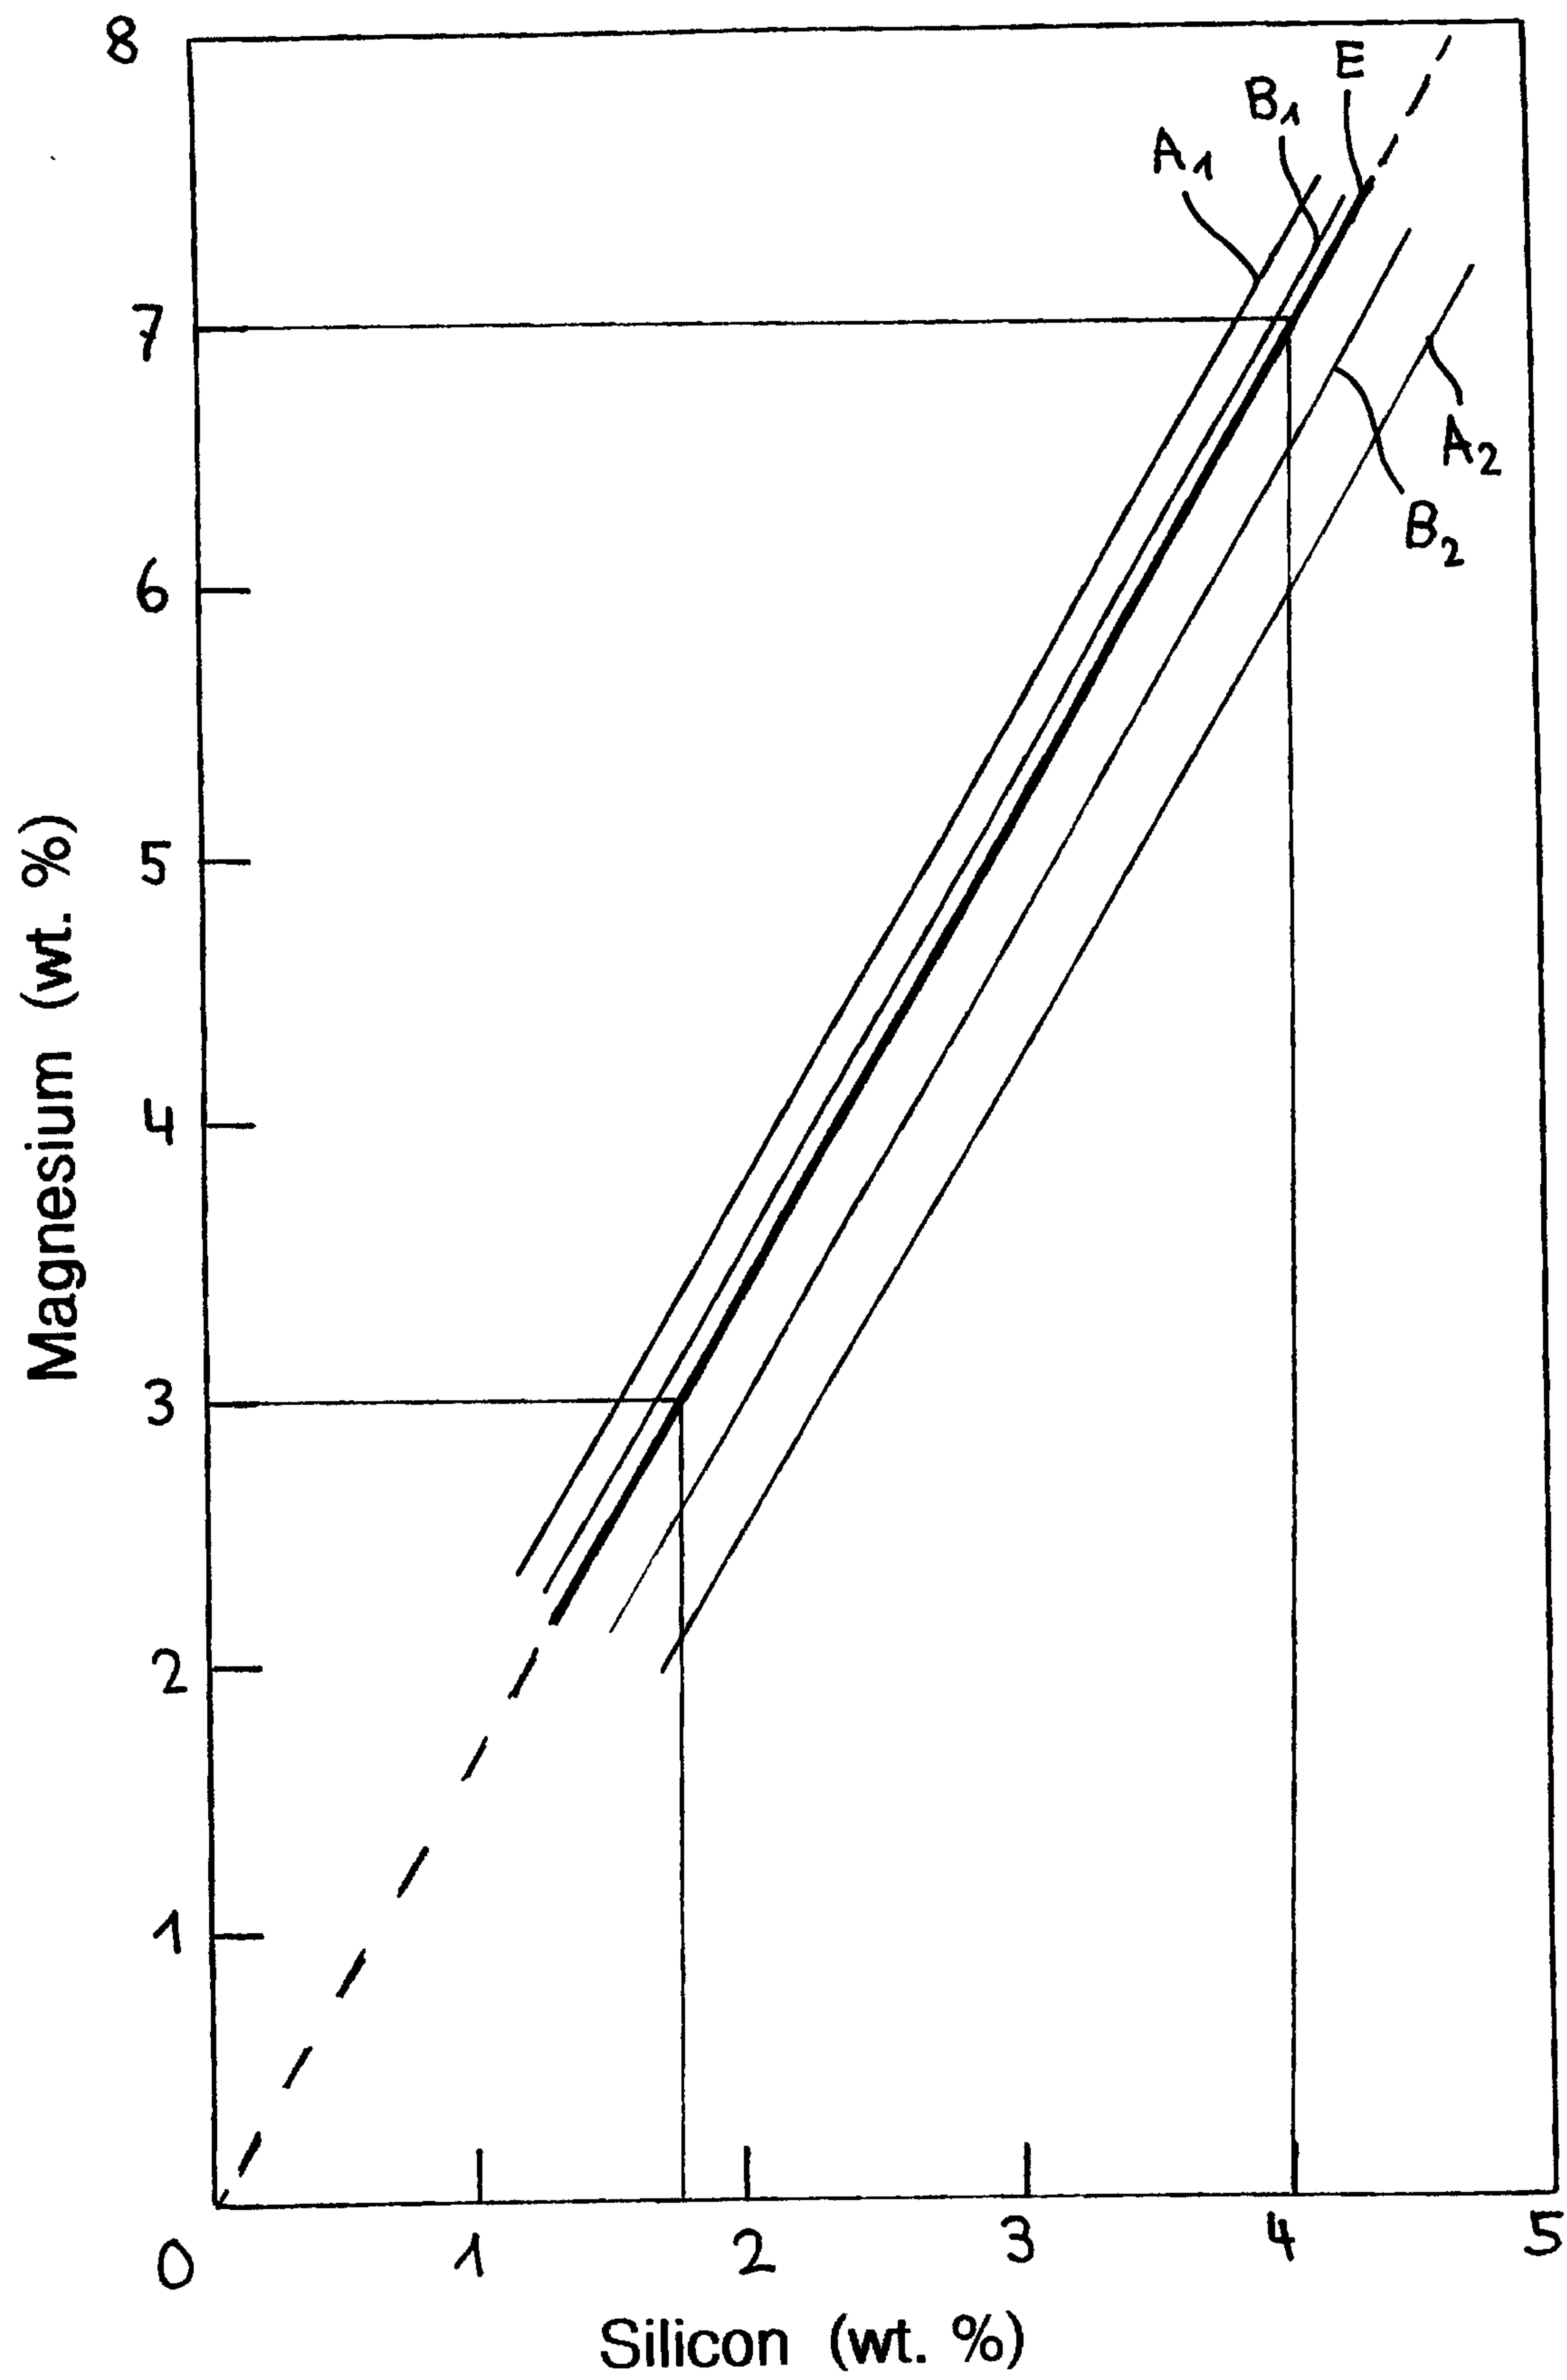**Fig. 1**

