



(51) International Patent Classification:
H01L 21/302 (2006.01)

(21) International Application Number:
PCT/US2010/003090

(22) International Filing Date:
6 December 2010 (06.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/640,910 17 December 2009 (17.12.2009) US

(71) Applicant (for all designated States except US): LAM
RESEARCH CORPORATION [US/US]; 4650 Cushing
Parkway, Fremont, California 94538-6470 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HART, William, T.
[US/US]; 3521 Arcadian Court, Castro Valley, California
94546 (US). EGLEY, Fred, Dennis [US/US]; 374 Stow-
ell Avenue, Sunnyvale, California 94058 (US).

(74) Agent: SKIFF, Peter, K.; Buchanan Ingersoll & Rooney
P.C., P. O. Box 1404, Alexandria, VA 22313-1404 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: UV LAMP ASSEMBLY OF DEGAS CHAMBER HAVING ROTARY SHUTTERS

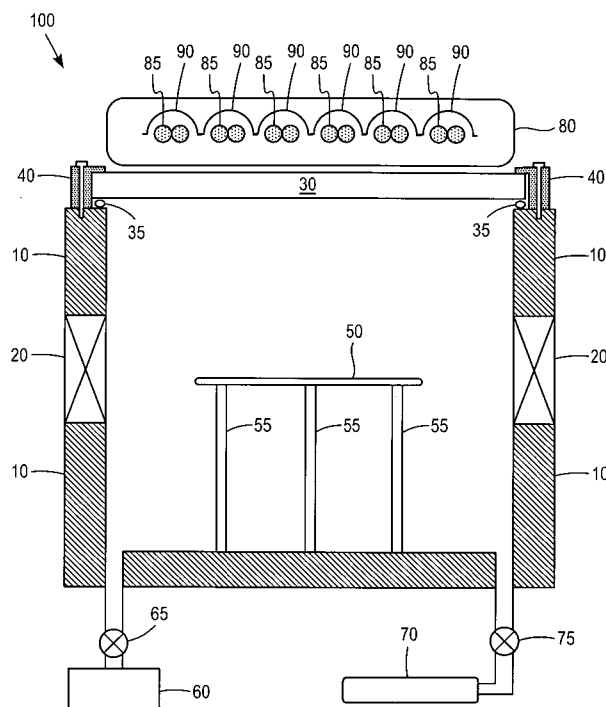


FIG. 1

(57) Abstract: A UV lamp assembly having rotary shut-
ters. Each rotary shutter has a concave wall with a refle-
ctive concave surface. The rotary shutters can be collec-
tively rotated between an open position and a closed po-
sition. At the open position, the rotary shutters do not
block UV light of UV lamps from leaving the UV lamp
assembly while at the closed position the rotary shutters
block UV light from leaving the UV lamp assembly.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

UV LAMP ASSEMBLY OF DEGAS CHAMBER HAVING ROTARY SHUTTERS

Background

[0001] During plasma processing of semiconductor substrates wherein the
5 semiconductor substrates are exposed to halogen-containing process gases, a residue
of the process gases can remain on surfaces of the semiconductor substrates. Such
residue can cause defects in the semiconductor substrates in downstream processing
steps, and can contaminate other semiconductor substrates in the processing
pipeline. Therefore, it is desirable to remove such residue from the semiconductor
10 substrates in a degas chamber.

Summary

[0002] A UV lamp assembly of a degas chamber comprising a plurality of parallel
UV lamps and rotary shutters, each rotary shutter comprising a concave wall
15 surrounding a UV lamp and two flanges extending outwardly from longitudinal
edges of the concave wall, the rotary shutters configured to rotate between an open
position and a closed position, wherein the rotary shutters at the open position are
arranged above the UV lamps so as to not block UV light of the UV lamps from
passing into the degas chamber; and the rotary shutters at the closed position, at
20 which the flanges of adjacent rotary shutters overlap to prevent UV light leakage,
are arranged below the UV lamps so as to block UV light of the UV lamps from
passing into the degas chamber.

Brief Description Of Figures

25 [0003] Fig. 1 shows a schematic cross section of a degas chamber comprising a
UV lamp assembly.

[0004] Fig. 2a shows a perspective view of a rotary shutter.

[0005] Fig. 2b shows an enlarged top view of an end portion of the rotary shutter
in Fig. 2a.

[0006] Fig. 3 shows a schematic cross section of the UV lamp assembly of Fig. 1, wherein the rotary shutters are in an open position.

[0007] Fig. 4 shows a schematic cross section of the UV lamp assembly of Fig. 1, wherein the rotary shutters are in an closed position.

5 [0008] Fig. 5a shows a perspective view of a UV lamp assembly wherein the rotary shutters are in the open position.

[0009] Fig. 5b shows a perspective view of a UV lamp assembly wherein the rotary shutters are in the closed position.

10 [0010] Fig. 6 shows a partial exploded view of a UV lamp assembly according to one embodiment.

[0011] Fig. 7 shows a partial exploded view of a UV lamp assembly according to another embodiment.

[0012] Fig. 8 shows a perspective view of the UV lamp assembly of Fig. 7, wherein rotary shutters are in a closed position.

15 [0013] Fig. 9 shows a perspective view of the UV lamp assembly of Fig. 7, wherein rotary shutters are in an open position.

Detailed Description

[0014] Fig. 1 shows a schematic cross section of an exemplary degas chamber
20 100. The degas chamber 100 comprises a chamber wall 10, made of a metallic material such as aluminum. A quartz window 30 is clamped to a top of the chamber wall 10 by a plurality of clamps 40. The quartz window 30 is preferably made of synthetic quartz for its high transmission of UV light. Synthetic quartz is typically untwined and produced in an autoclave via the hydrothermal process. A continuous
25 O-ring 35 between the quartz window 30 and the chamber wall 10 provides a vacuum seal. A UV lamp assembly 80 is disposed above the quartz window 30, preferably with a gap therebetween. A vacuum pump 60 is connected to the degas chamber 100 through an exhaust port which can be closed by a valve 65. A gas source 70 is connected to the degas chamber 100 through a gas line which can be
30 closed by another valve 75.

[0015] The quartz window 30 is configured to be mounted on the top of the degas chamber 100 in which UV light from the UV lamp assembly 80 is transmitted

through the quartz window 30 while a gas such as ozone or oxygen is flowed in the degas chamber 100 to remove halogen-containing residues such as etch byproducts from a semiconductor substrate 50 such as a 300 mm wafer supported in the degas chamber 100. Details of the quartz window 30 are disclosed in a commonly
5 assigned U.S. Patent Application No. 12/607,659, which is hereby incorporated by reference. However, the UV lamp assembly 80 can be used with degas chamber systems other than that shown in Fig. 1.

[0016] Referring to Fig. 1, during processing in the degas chamber 100, the semiconductor substrate 50 is transferred through a loading door 20 in the chamber
10 wall 10 and placed on a plurality of substrate support pins 55. The degas chamber 100 is evacuated by the vacuum pump 60 and ozone gas or O₂ gas from the gas source 70 flows into the degas chamber 100. Gas pressure in the degas chamber 100 is preferably maintained from 10 mTorr to 10 Torr. The UV lamp assembly 80 irradiates the semiconductor substrate 50 through the quartz window 30 with UV
15 light preferably of a wavelength of 254 nm and intensity between 0.05 and 5 W/cm², for a period of 10 seconds to 1 minute. Ozone gas or O₂ gas absorbs UV light and decomposes into O radicals (atomic oxygen) which react with halogen-containing residue on the semiconductor substrate 50. The reaction products are gaseous and are evacuated from the degas chamber 100 by the vacuum pump 60.

[0017] During a process of transporting the semiconductor substrate 50 into and out from the degas chamber 100, it is desirable to prevent UV light of the UV lamp assembly 80 from escaping the degas chamber 100, in order to protect human operators and equipment nearby. However, to minimize delay in processing substrates and to prevent premature failure of UV lamps 85, it is desirable that UV
25 lamps 85 in the UV lamp assembly 80 remain powered rather than being switched on and off during each substrate transport.

[0018] The UV lamp assembly 80 includes rotary shutters 90 which can be rotated to a closed position to block UV light from the UV lamps 85 when UV light is not needed in the degas chamber 100, such as during the process of transporting the
30 substrate 50 into and out from the degas chamber 100. When UV light from the UV lamps 85 is needed for a degas process, the rotary shutters 90 in the UV lamp

assembly 80 can be rotated to an open position and allow UV light to reach the substrate 50 in the degas chamber 100.

[0019] Fig. 2a shows a perspective view of a rotary shutter 90 according to an embodiment. The rotary shutter 90 comprises a concave (e.g. semi-cylindrical, semi-prismatic) wall 95 and two preferably co-planar flanges 93 and 94 extending outwardly along longitudinal edges of the concave wall 95. The flanges 93 and 94 preferably have a width of about 0.07 to 0.09 inch. The rotary shutter 90 is made of a material opaque to UV light, such as aluminum. A concave surface 91 of the concave wall 95 is preferably a reflective surface (such as a polished bare aluminum surface). Interior surfaces of the degas chamber 100 exposed to UV light of the UV lamp assembly 80 are preferably blackened (e.g. by anodization on aluminum surfaces) to reduce undesirable reflection of UV light.

[0020] Preferably, the flanges 93 and 94 stop short of the ends of the concave wall 95 to provide a gap in the longitudinal direction by at least about 0.1 inch from each end edge of the concave wall 95 which allows the concave wall 95 to be received in a groove of a support member. Fig. 2b shows an enlarged top view of an end portion the rotary shutter 90.

[0021] Fig. 3 shows a cross sectional schematic of the UV lamp assembly 80, wherein rotary shutters 90 are in an open position, according to an embodiment. The UV lamp assembly 80 comprises a plurality of UV lamps 85 disposed parallel to each other. The UV lamps 85 can be arranged parallel with each other and preferably cover substantially the entire area of the quartz window 30 to achieve uniform UV light intensity above a substrate in the chamber. The UV lamps 85 can have identical or different lengths sized to overlay the quartz window 30. A single rotary shutter 90 surrounds each UV lamp 85. Each UV lamp 85 can have a tubular shape, a dual-tubular shape or other suitable shape. In the open position, the rotary shutters 90 are arranged above the UV lamps 85 and UV light from the UV lamps 85 can pass directly through the quartz window 30 into the degas chamber 100. The concave surface 91 of each rotary shutter 90 reflects UV light downward to enhance intensity and uniformity of the UV light. The rotary shutters 90 are maintained in the open position during a degas process.

[0022] Fig. 4 shows a cross sectional schematic of the UV lamp assembly 80, wherein rotary shutters 90 are in a closed position, according to an embodiment. In the closed position, the rotary shutters 90 are arranged below the UV lamps 85 and block a substantial portion (preferably more than 99%) of UV light from the UV lamps 85 from passing through the window 30. In the closed position, a lower side of a flange 93 of one rotary shutter 90 overlaps an upper side of a flange 94 of an adjacent rotary shutter preferably by about 0.03 to 0.05 inch, more preferably by about 0.04 inch to minimize UV light leakage.

[0023] The rotary shutters 90 can be rotated from the open position to the closed position by simultaneously rotating all the rotary shutters 90 around the UV lamps 85 by about 180°. The rotary shutters 90 can be rotated from the closed position to the open position by simultaneously rotating all the rotary shutters 90 in the opposite direction by about 180°.

[0024] The rotary shutters 90 can be driven between the open and closed positions by any suitable mechanism. The UV lamps 85 are preferably held stationary and do not rotate when the rotary shutters 90 move from the closed position to the open position. For dual-tubular shaped UV lamps 85, the outermost UV lamps 85a can be angled such that one of the dual tubes is located closer to the quartz window 30 and the other one of the dual tubes is located farther from the quartz window 30.

[0025] Fig. 5a shows a perspective view of an exemplary UV lamp assembly 80 comprising six UV lamps 85 positioned parallel to each other. The rotary shutters 90 are in the open position. The UV lamps 85 can be any tubular UV lamps, such as White-Rodgers UVP-06207 Germicidal UV Lamps. Two outermost UV lamps 85a can be shorter in length to accommodate the particular shape of the quartz window 30 (not shown). For example, the outermost lamps can extend 30 to 90% of the length of the other four lamps therebetween.

[0026] Fig. 5b shows a perspective view of the UV lamp assembly 80 of Fig. 5a wherein the rotary shutters 90 are in the closed position.

[0027] Fig. 6 shows a UV lamp assembly 80 according to one embodiment. One end of a rotary shutter 90 is attached (adhered, fastened, soldered, or the like) to a smaller outer diameter surface 601a of a rotatable annular shutter support 601 and an opposite end of the shutter 90 is attached to an outer periphery 602a of a stemmed

shutter support 602. A larger diameter outer surface 601b of the shutter support 601 is rotatably mounted in a cylindrical recess (not shown) in an inner surface of a bearing block 603 which includes a plurality of laterally spaced apart mounting holes 603a to fixedly support a series of parallel UV lamps 85. A flanged bearing 5 605 having a center hole 605a is mounted in one of a plurality of laterally spaced apart holes 604a in a bearing block 604 arranged parallel to and spaced from the bearing block 603. A stem 602b of the stemmed shutter support 602 is rotatably supported in the center hole 605a of the flanged bearing 605. The UV lamp 85 is disposed through a mounting hole 603a in the bearing block 603 and passes through 10 the center of the shutter support 601. An opposite end of the lamp 85 is supported by one axial end of a support pin 608. The support pin 608 has a stem rotatably supported in a center hole 602c of the stemmed shutter support 602. With this mounting arrangement, each UV lamp 85 remains stationary while the rotary shutter 90 rotates between the open and closed positions. An electrical socket 620 is 15 connected to the UV lamp 85 to provide electrical power thereto. The stem 602b is attached to a drive pulley 606 located on an outer surface of the bearing block 604 and an outer surface of the drive pulley 606 engages a drive belt (not shown). The drive belt is moved back and forth by a suitable drive mechanism such that the drive pulley 606 effects rotation of the stemmed shutter support 602 by movement of the 20 drive belt to rotate the shutter to the open and closed positions. The bearing block 603 and the flanged bearing 605 can be made of a heat resistant polymer material such as Torlon[®]. The bearing block 604 and the shutter support 602 can be made of a metallic material such as aluminum.

[0028] In another embodiment as shown in Figs. 7-9, one end of each UV lamp 85 25 has electrical connections for receiving electricity from a socket 620. This end is supported through one of a plurality of laterally spaced apart holes 661 in a socket plate 651 made of Torlon[®]. The other end of the UV lamp 85 is supported by a stemmed support pin 653 made of Teflon[®]. For a dual-tubular shaped UV lamp, the pin 653 includes a fitting which has curved surfaces mating with outer surfaces of 30 the dual-tubular shaped UV lamp. The rotary shutter 90 surrounding the UV lamp 85 is attached to an annular bearing 652 made of Torlon[®] and a drive spindle 655 having a stem 655b and a center hole 655a. The UV lamp 85 passes through a

center hole of the bearing 652 and the bearing 652 is rotatably mounted in a cylindrical recess in an inner surface of the socket plate 651. A flanged bearing 656 having a center hole 656a is mounted in one of a plurality of laterally spaced apart holes 662 in a support plate 654 arranged parallel to the socket plate 651. The stem 655b of the drive spindle 655 extends through and is rotatably mounted in the center hole 656a of the flanged bearing 656. A stem 653a of the stemmed support pin 653 is rotatably supported in the center hole 655a of the drive spindle 655.

[0029] Referring to Figs. 8-9, a cantilevered drive arm 657 is fixedly attached to the stem 655b of each of the drive spindles 655 outwardly of an outer surface of the support plate 654. Ends of the drive arms 657 are rotatably attached to vertical arms of a horizontally extending arm linkage 672 which moves laterally back and forth to simultaneously rotate the drive arms 657 clockwise and counterclockwise to open and close the rotary shutters. The arm linkage 672 has a vertical actuator arm 671 rotatably attached to an end of a revolving arm 681 of a rotary actuator 680 which rotates the revolving arm 681 between laterally offset positions. The rotary actuator 680 is operable to drive the arm linkage 672 such that ends 673 of the arm linkage 672 engage two stops (shown in Figs. 8-9 respectively). At each stop, an end 673 of the arm linkage 672 triggers a position switch 670 which signals the rotary actuator 680 to stop rotation and prevent over-driving the arm linkage 672.

[0030] While the UV lamp assembly and the rotary shutters have been described in detail with reference to specific embodiments thereof, it will be apparent to those skilled in the art that various changes and modifications can be made, and equivalents employed, without departing from the scope of the appended claims. For example, UV lamps can be replaced by other types of lamps.

We Claim:

1. A UV lamp assembly for a degas chamber comprising a plurality of parallel UV lamps and rotary shutters, each rotary shutter comprising a concave wall
5 surrounding a UV lamp and two flanges extending outwardly from longitudinal edges of the concave wall, the rotary shutters configured to rotate between an open position and a closed position, wherein the rotary shutters at the open position are arranged above the UV lamps so as to not block UV light of the UV lamps from passing into the degas chamber; and the rotary shutters at the closed position, at
10 which the flanges of adjacent rotary shutters overlap to prevent UV light leakage, are arranged below the UV lamps so as to block UV light of the UV lamps from passing into the degas chamber.
2. The UV lamp assembly of claim 1 wherein a concave surface of the concave
15 wall is a reflective surface.
3. The UV lamp assembly of claim 1 wherein the concave wall is semi-cylindrical.
- 20 4. The UV lamp assembly of claim 1 wherein the flanges of each rotary shutter are co-planar; have a width of about 0.07 to 0.09 inch; and longitudinal ends of the flanges are spaced at least about 0.1 inch from longitudinal ends of the concave wall.
5. The UV lamp assembly of claim 1 wherein the flanges of each rotary shutter
25 overlap the flanges of an adjacent rotary shutter by about 0.03 to 0.05 inch at the closed position.
6. The UV lamp assembly of claim 1 further comprising:
a support block having a hole for each rotary shutter;
30 a spindle having a stem for each rotary shutter;
a drive mechanism; and

wherein:

the rotary shutter is attached to the spindle;

the stem of the spindle is rotatably supported in the hole of the support block;

and

- 5 the stem of the spindle is driven by the drive mechanism such that the attached rotary shutter is rotatable between the open and closed positions.

7. The UV lamp assembly of claim 1, wherein each UV lamp comprises a pair of parallel cylindrical tubes bonded together.

10

8. The UV lamp assembly of claim 1, comprising four UV lamps having a first length and two UV lamps having a second length at least 10% shorter than the first length, the four longer length lamps located between the two shorter length lamps, the rotary shutters on the six lamps being operated simultaneously.

15

9. A degas chamber comprising the UV lamp assembly of claim 1.

10. A degas chamber of claim 9 wherein interior surfaces of the degas chamber exposed to UV light of the UV lamp assembly are blackened to reduce reflection of
20 UV light.

11. A method of processing a semiconductor substrate using the degas chamber of claim 9, comprising:

rotating the rotary shutters to the closed position;

25 transporting a semiconductor substrate into the degas chamber;

rotating the rotary shutters to the open position;

supplying ozone gas or O₂ gas into the degas chamber while maintaining a vacuum pressure in the chamber of 10 mTorr to 10 Torr;

30 generating O radicals by irradiating the ozone gas or O₂ gas in the degas chamber through a quartz window with UV light;

removing halogen-containing residues on the semiconductor substrate by
reaction with the O radicals;
rotating the rotary shutters to the closed position;
removing the semiconductor substrate from the degas chamber.

1/9

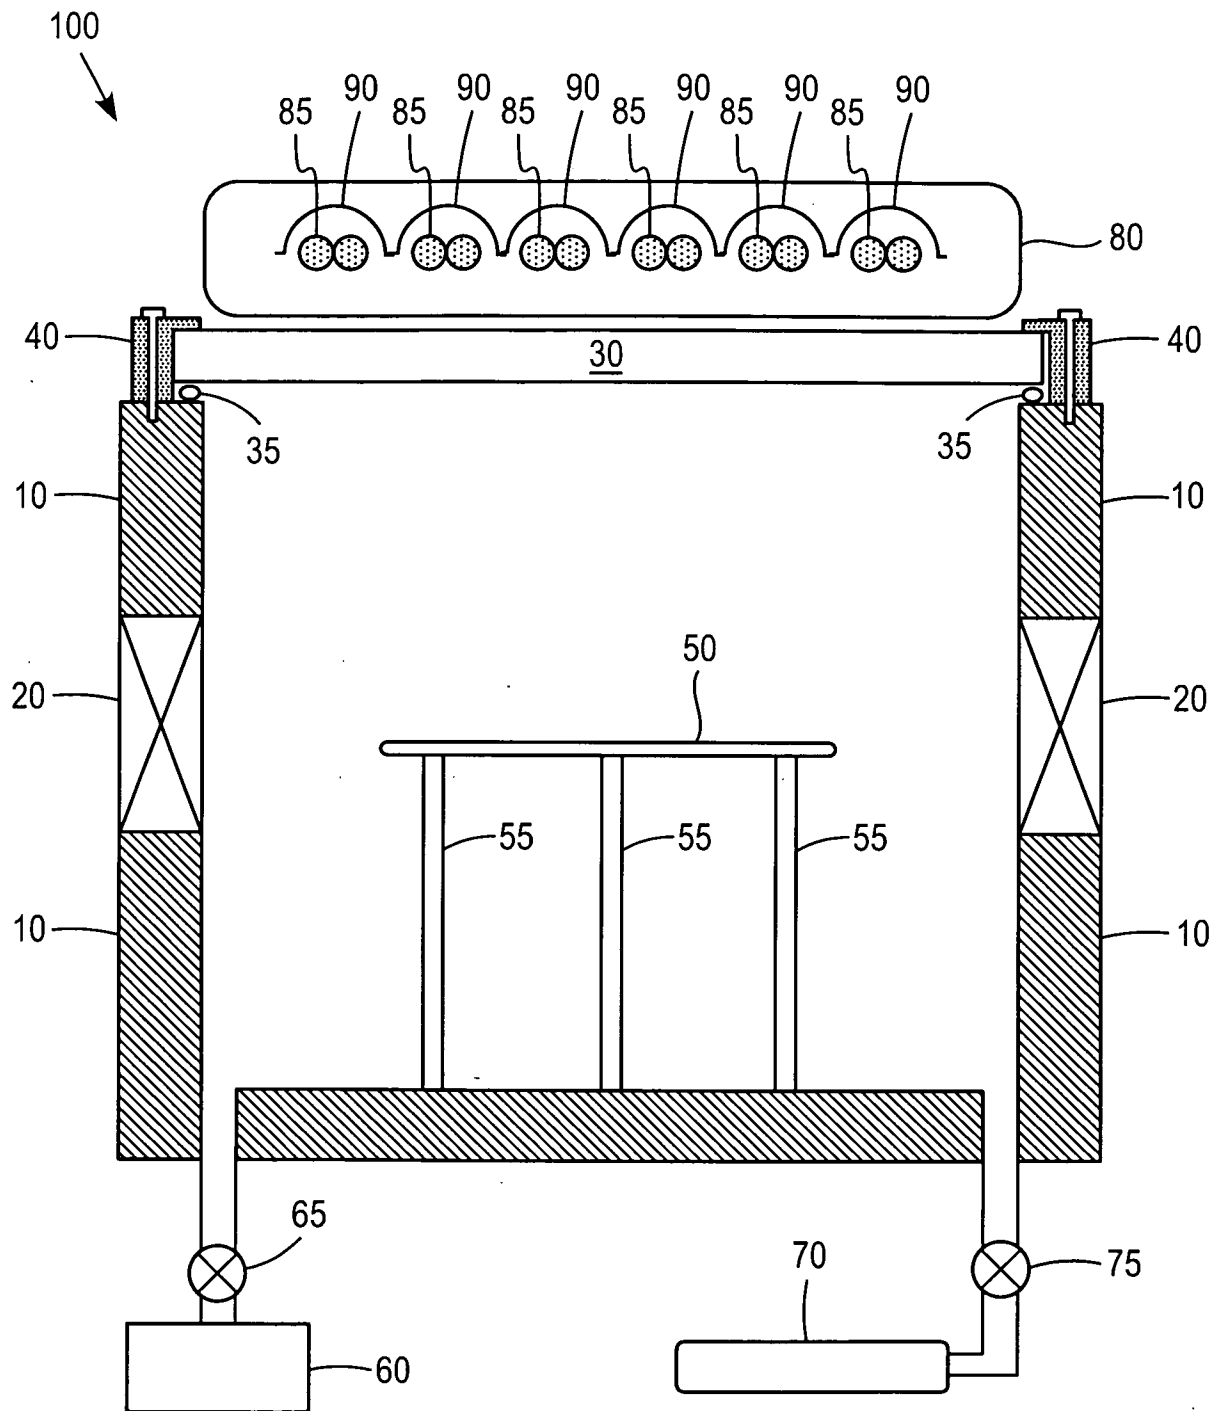


FIG. 1

2/9

FIG. 2A

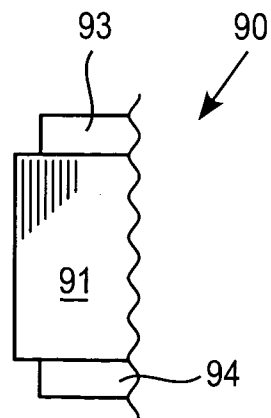
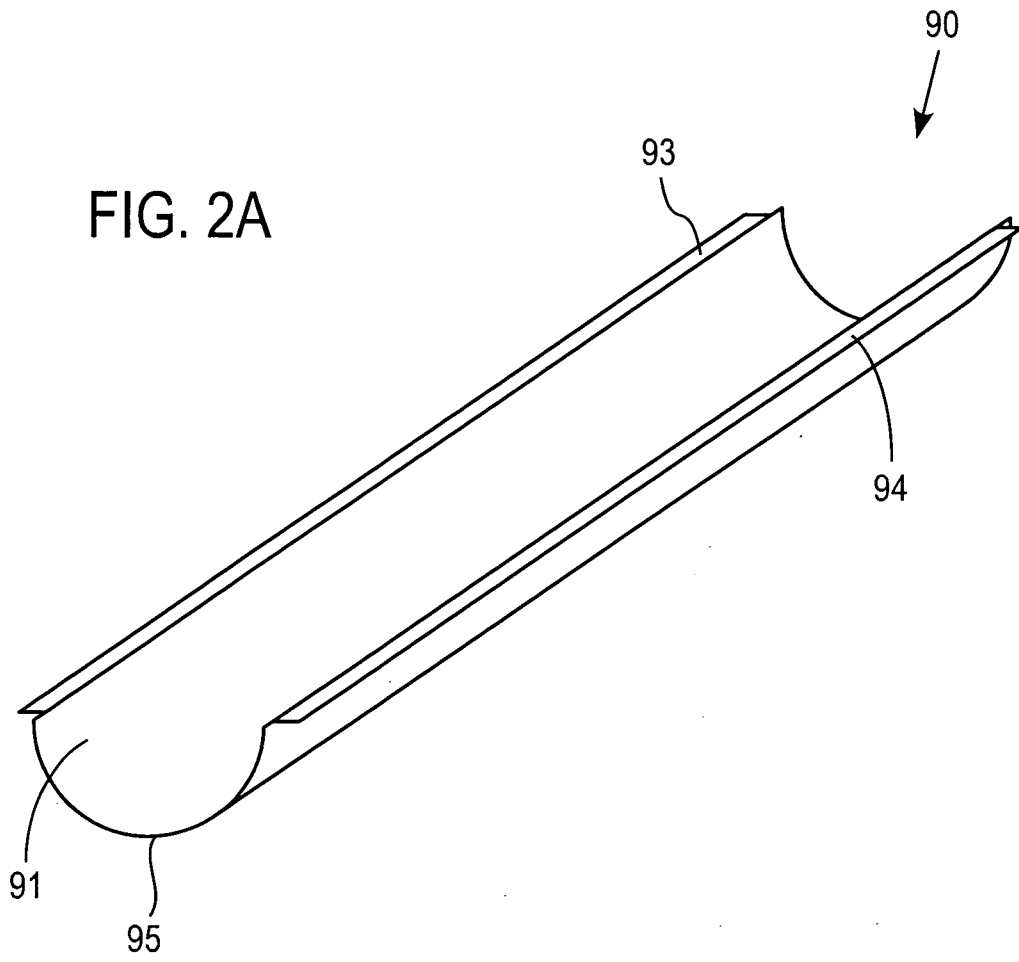


FIG. 2B

3/9

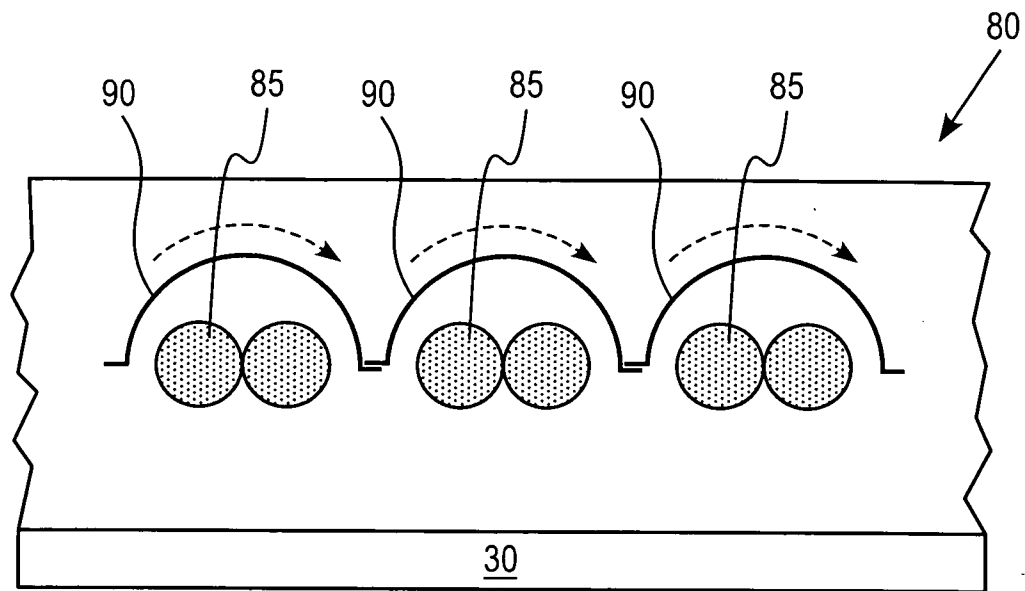


FIG. 3

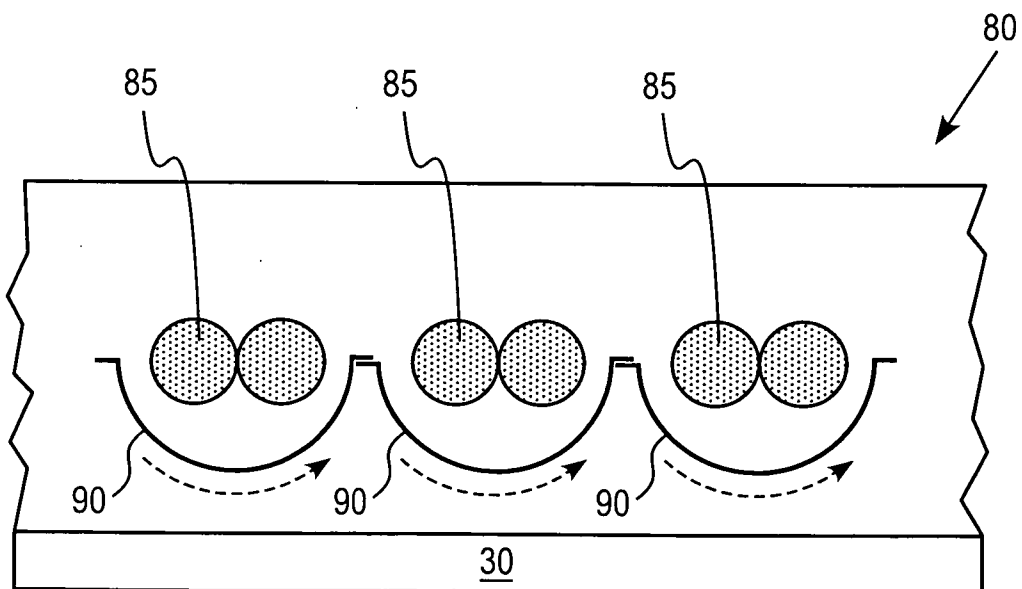
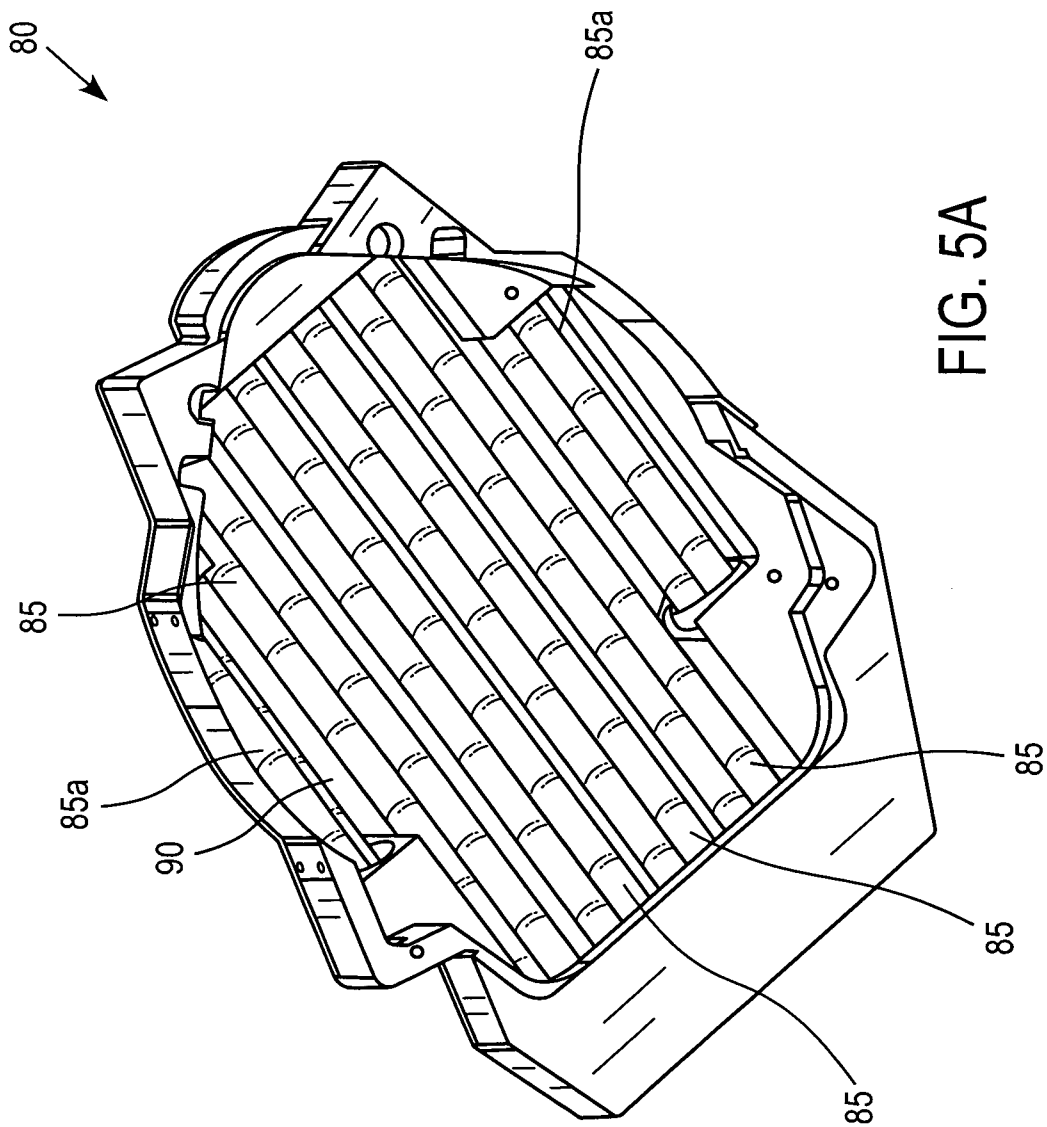


FIG. 4



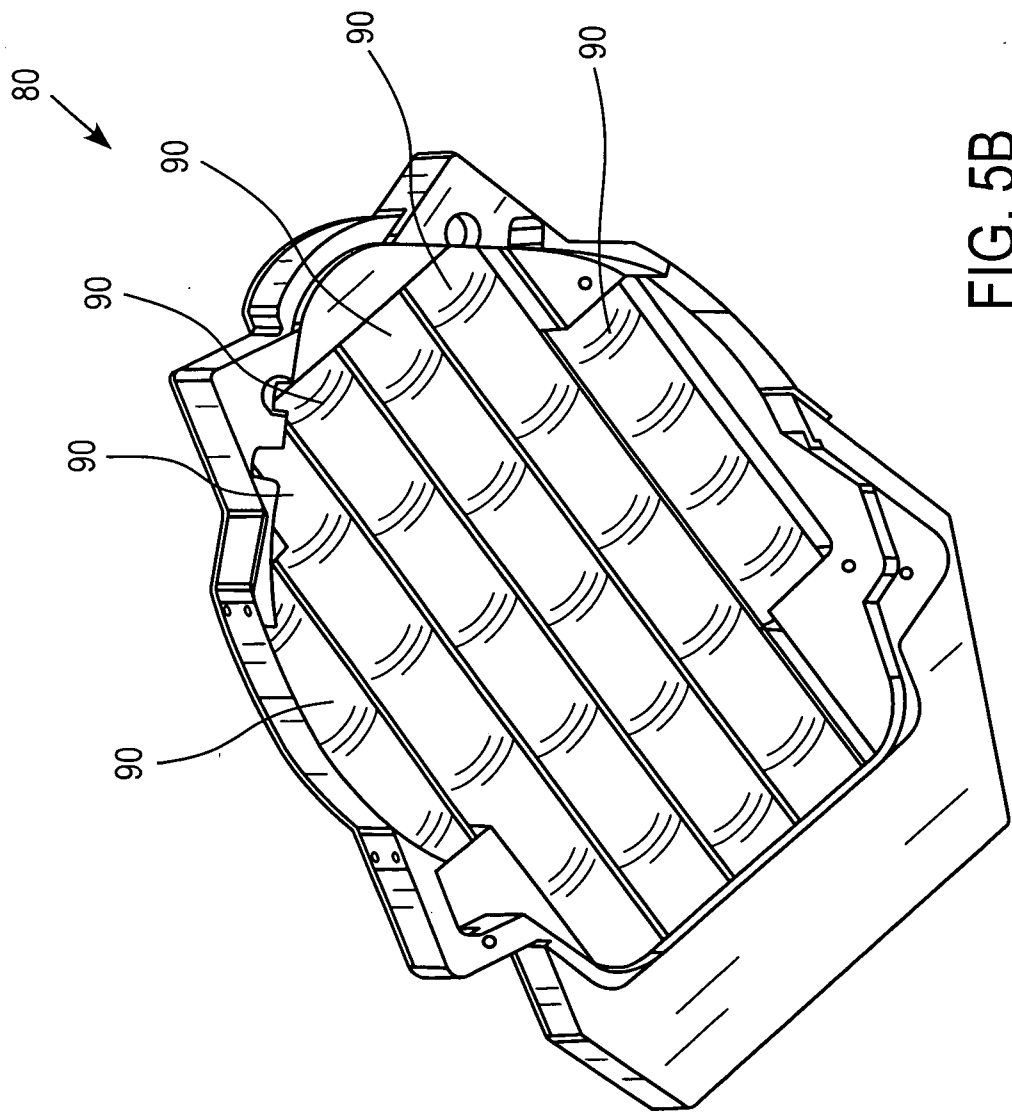


FIG. 5B

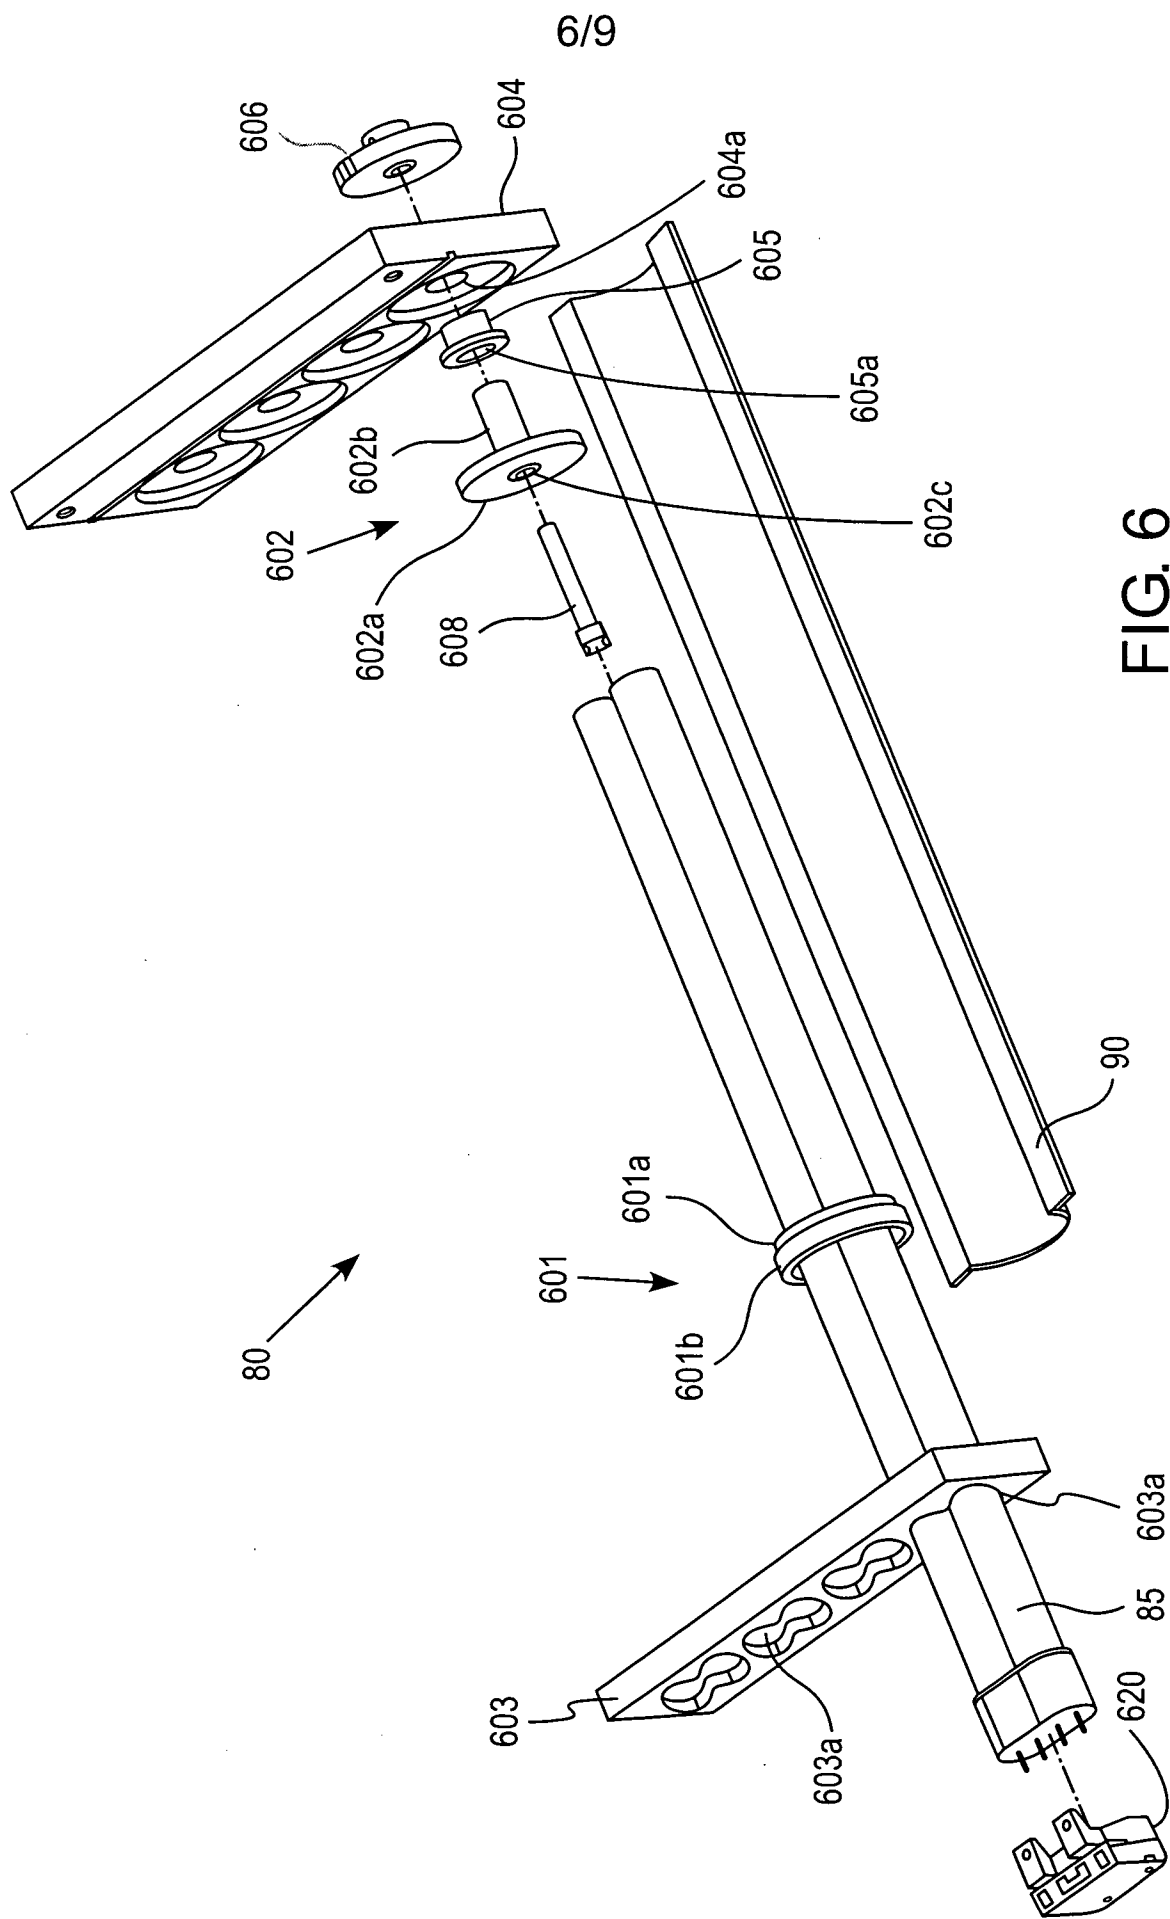
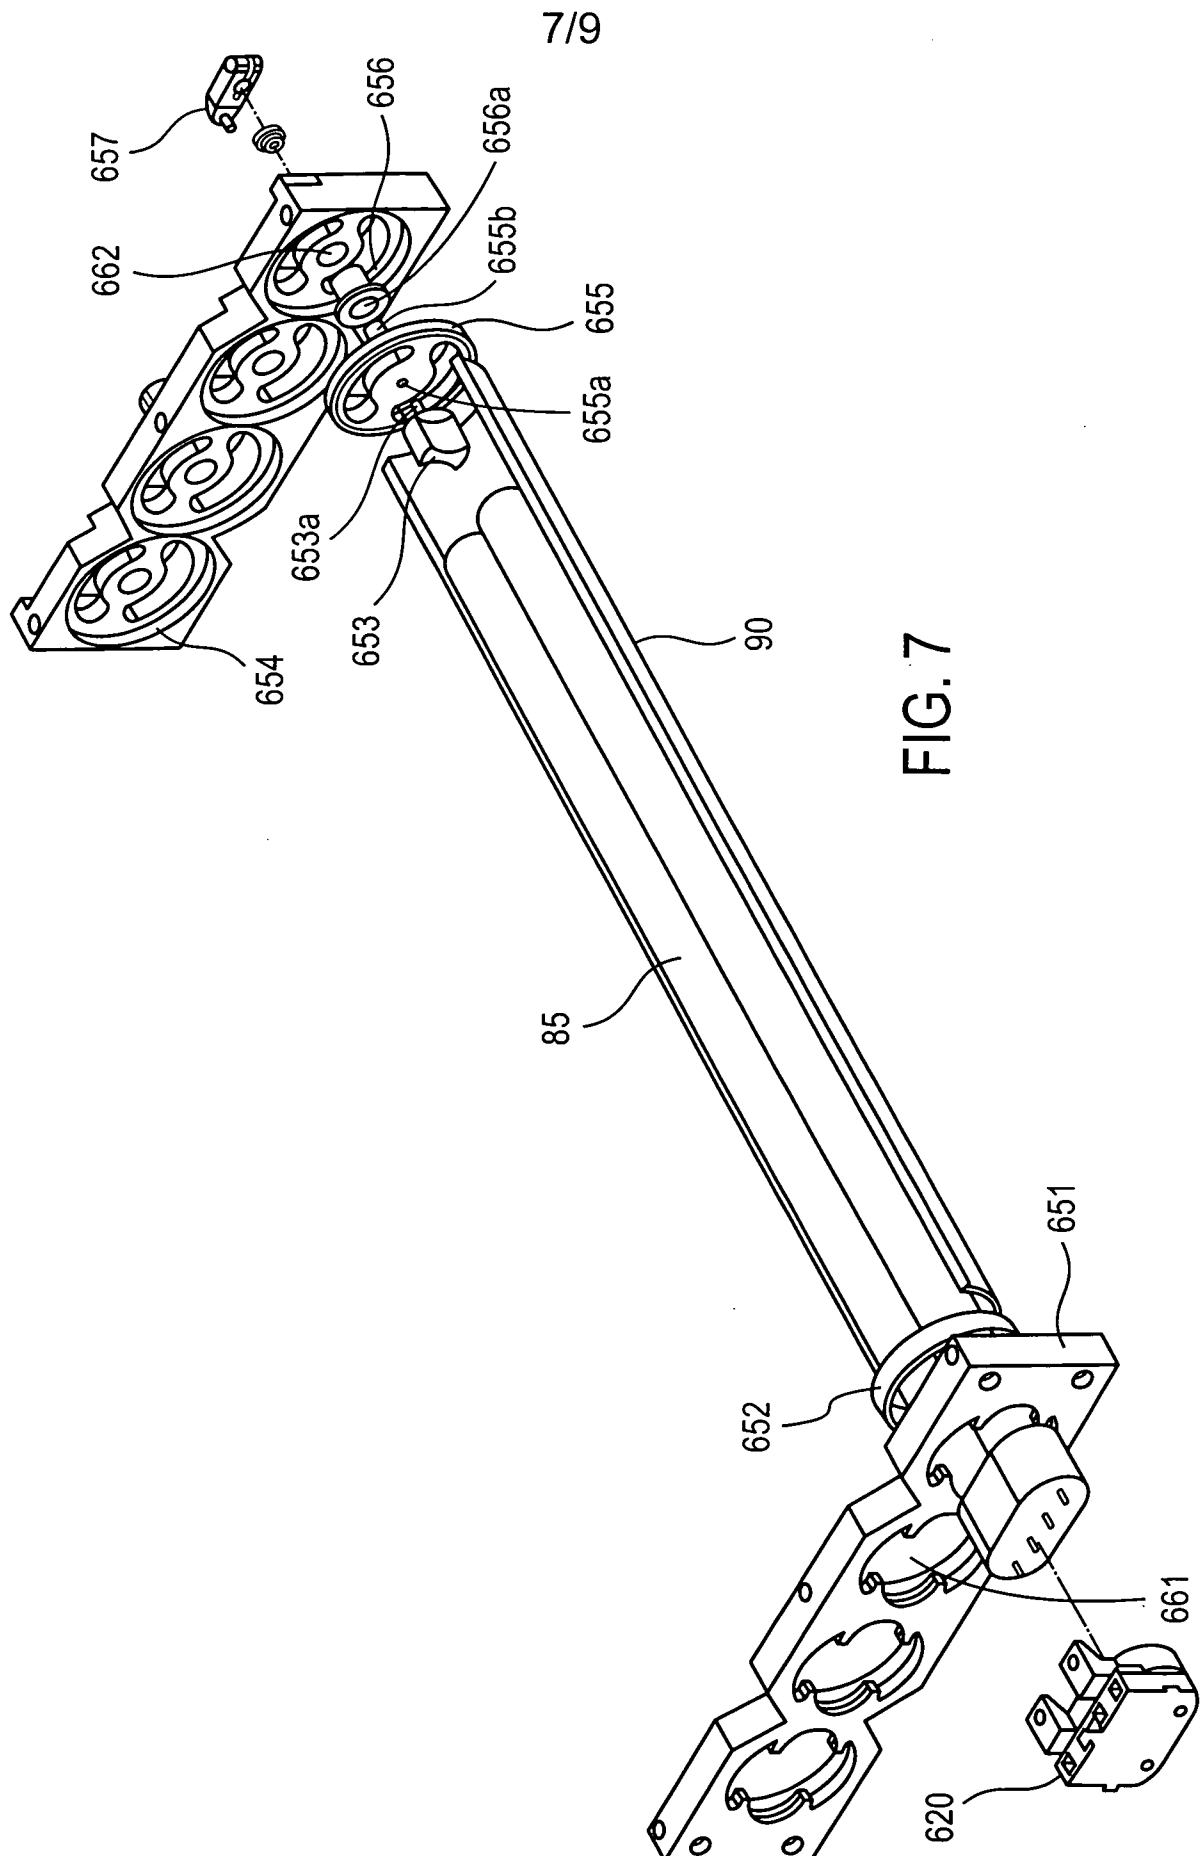
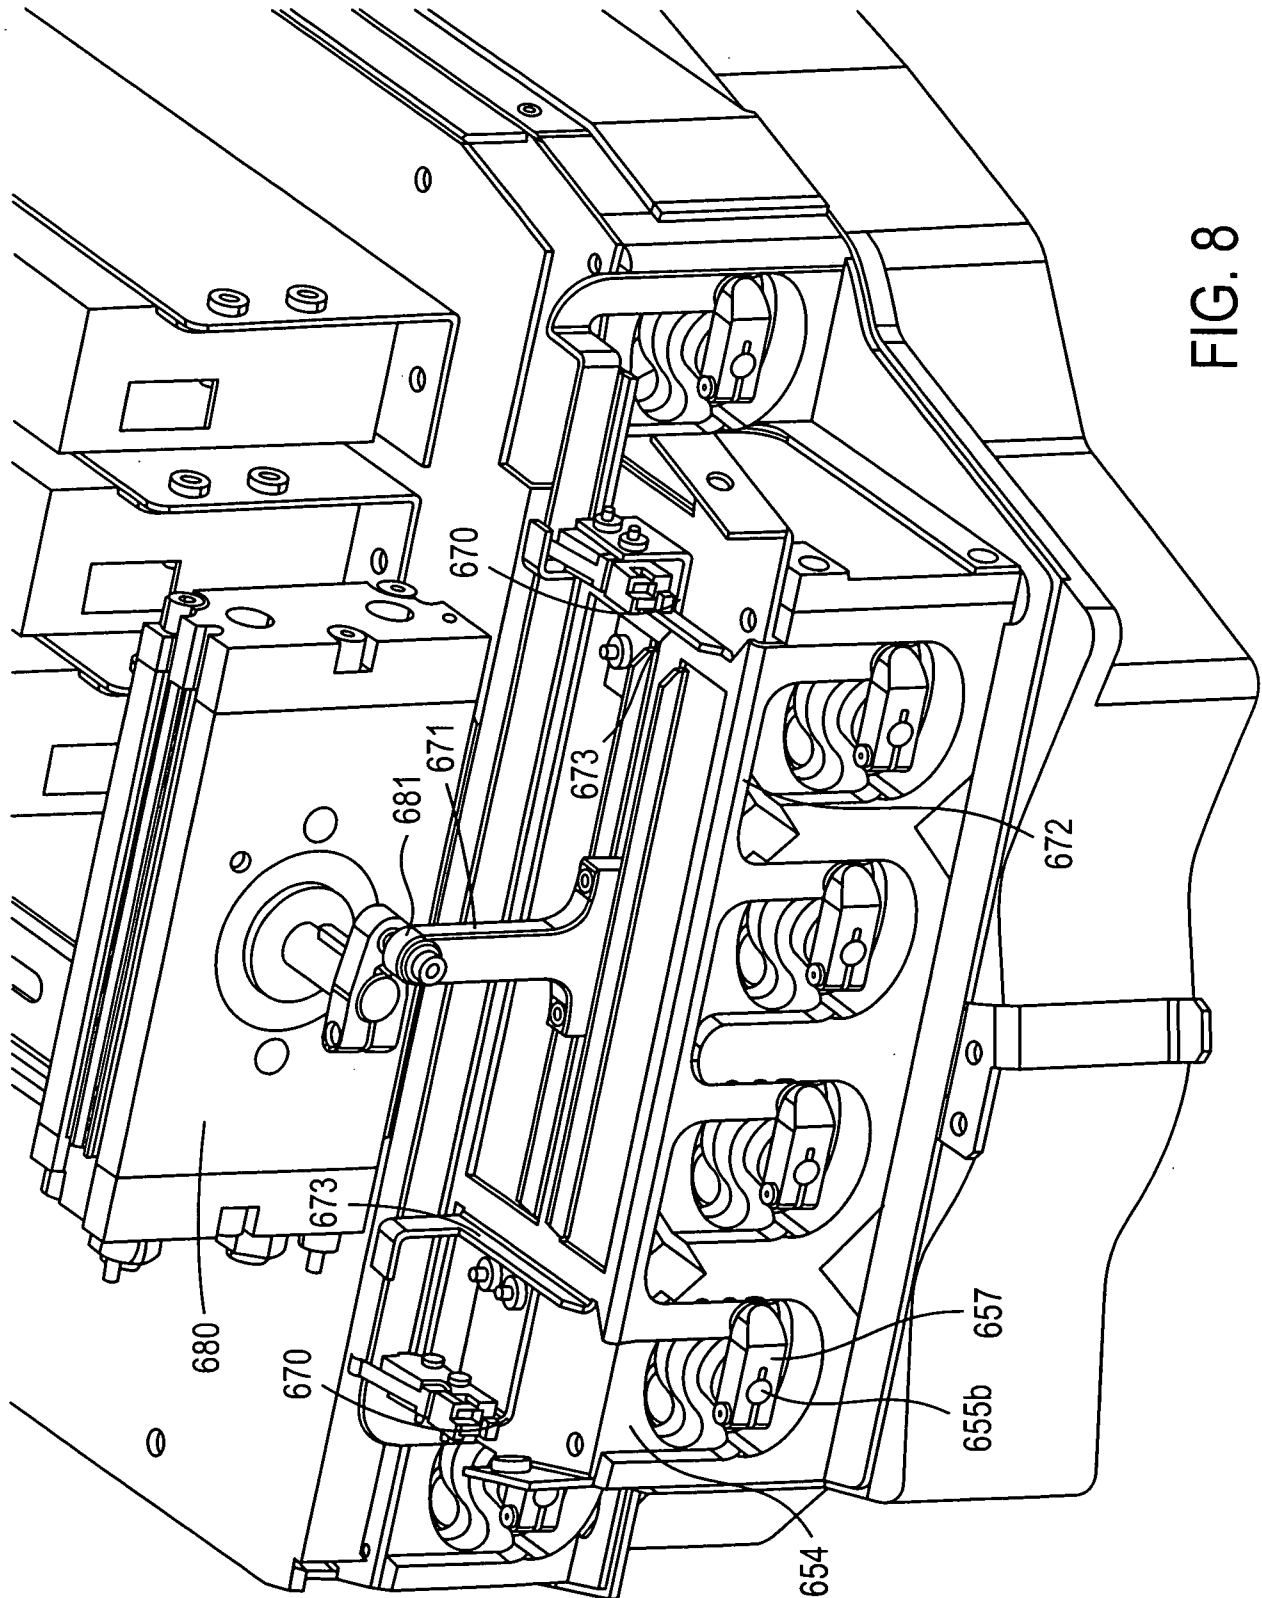


FIG. 6





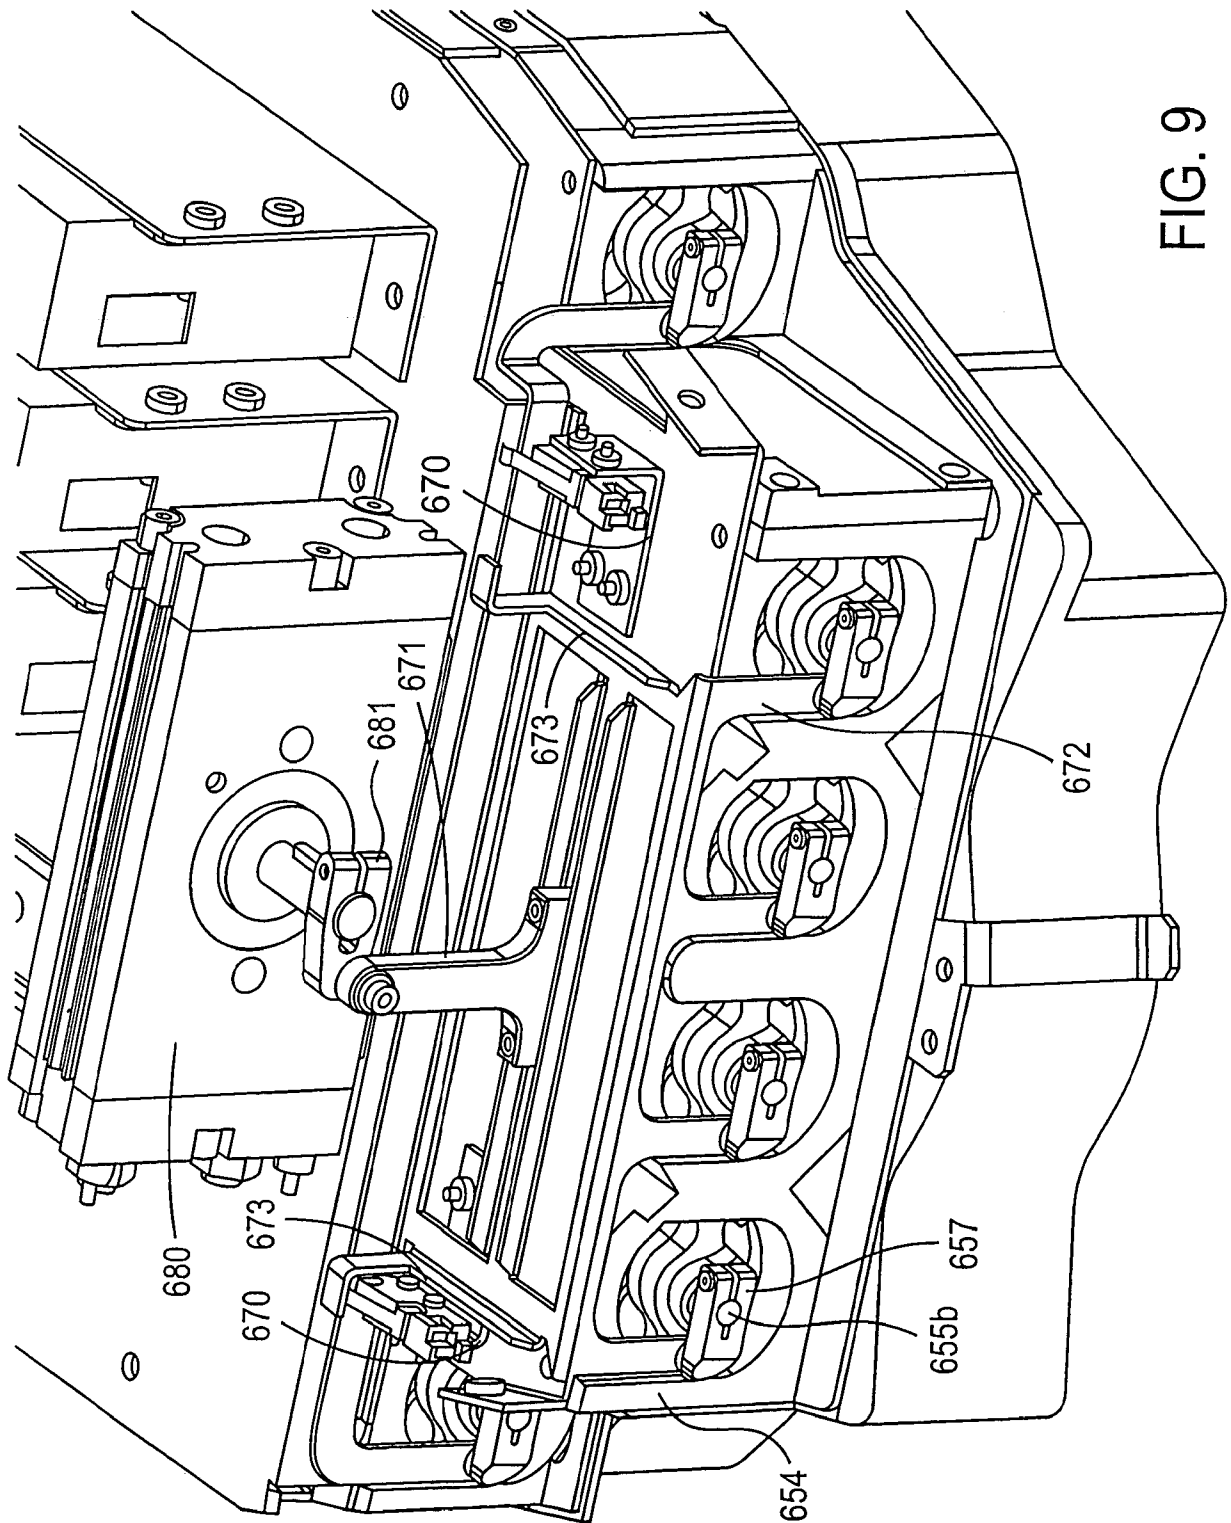


FIG. 9