

(19)



(11)

EP 4 234 431 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

28.08.2024 Bulletin 2024/35

(51) International Patent Classification (IPC):

B65D 41/34^(2006.01) B65D 55/16^(2006.01)

(21) Application number: **23171082.3**

(52) Cooperative Patent Classification (CPC):

B65D 55/16

(22) Date of filing: **12.11.2019**

(54) **TETHERED PLASTIC SCREW STOPPER**

STOPPER FÜR ANGEBUNDENEN KUNSTSTOFFSCHRAUBSTOPFEN

BOUCHON À VIS EN PLASTIQUE ATTACHÉ

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **12.11.2018 US 201862759931 P**

(43) Date of publication of application:

30.08.2023 Bulletin 2023/35

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:

19884687.5 / 3 880 575

(73) Proprietor: **SIDEL PARTICIPATIONS SAS**

Octeville Sur Mer 76930 (FR)

(72) Inventor: **DODD, Kirk**

Fort Smith, 72908 (US)

(74) Representative: **Sidel Group**

c/o Gebo Packaging Solutions France

5-7 Rue du Commerce

ZI - CS 73445 Reichstett

67455 Mundolsheim Cedex (FR)

(56) References cited:

WO-A1-2021/074726 US-A- 3 904 062

US-A- 5 725 115 US-A1- 2011 174 760

US-A1- 2011 297 682 US-B2- 9 010 555

EP 4 234 431 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

[0001] This invention relates to a tethered plastic screw stopper.

BACKGROUND

[0002] In the field of liquid packaging, it is very common to seal the aperture of a container with a stopper, often made from a plastic material. Such container is usually a plastic or glass bottle, but other materials may be used as well.

[0003] The stopper has a tubular shape closed at its top edge by a top wall. The stopper comprises a roof attached to a tamper shell through bridges. Bridges are distributed around the circumference of the roof and the tamper shell. The bridges may be made when molding the stopper or after through undergoing a cutting step during the manufacturing process.

[0004] Usually the bottle neck includes outer fixation feature, such as thread(s) for screw type stopper or annular fixation rings for snap type stopper, to secure the stopper on the bottle neck.

[0005] For screw type stoppers, the tamper shell comprises inner thread(s) arranged inside side walls. The bottle neck fixation feature may include outer thread(s). Such combination of outer and inner thread(s) allows the stopper to be screwed on a bottle neck to seal it and unscrewed for bottle opening. A snap type stopper may include an inner annular area and the bottle neck fixation feature may include outer fixation ring, in order to slot in force the stopper on the bottle neck. A snap type stopper may include a tamper shell with a movable sealing roof from a closed position to a partial opening position, and reversely. The roof may be separated upon opening or may be connected to the tamper shell.

[0006] In a bottle sealing position of the stopper, the tamper shell may be secured around the bottle neck through inner shell retaining features or through the retaining features diameter being smaller than a diameter of a tamper shell of the bottle neck.

[0007] The roof may be removable. During bottle opening, the bridges form a weakness line and may be torn apart from the roof, separating it from the bottle. The weakness line may be torn when user unscrews the tamper shell of the stopper or when user lifts the roof by tilting.

[0008] There is a recycling risk with separable roof as consumers may not always screw or snap back the roof onto the bottle neck once empty. The stopper may be thrown away as litter or put into the trash bin, or worse make its way into a landfill, which is not good in view of the environmental considerations.

[0009] One solution includes linking the roof to the tamper shell secured on the bottle neck, so the roof stays attached to the bottle after bottle opening. Such an at-

tached stopper may be called a "tethered stopper."

[0010] U.S. Patent No. 9,010,555 teaches a plastic screw stopper including a peripheral strip between a tamper shell and a roof. Such peripheral strip is linked to the tamper shell through a bottom weakness line and to the roof through a top weakness line. The bottom weakness line and top weakness line are parallel and extend across the periphery of the stopper in order to incorporate one or two hinges in close proximity to each other. When unscrewing the stopper the bottom weakness line and top weakness line tear apart, but the two hinges hold the roof on the tamper shell. The roof becomes unmovable and as capable of toggling around the hinges beside of the stopper secured on the bottle neck.

[0011] U.S. 8,490,805 teaches a plastic screw stopper comprises a helicoidal strip between a tamper shell and a roof. Such helicoidal strip is obtained by cutting the tamper shell around the stopper. The outer wall of the tamper shell is placed against a blade and the stopper is moved in rotation relative to the blade according to an angular stroke greater than an entire turn or more than 360°. During rotation, the stopper is being moved in an axial movement relative to the blade. The cut line forms a helicoidal weakness line which remains attached at one end to the tamper shell and at its opposite end to the roof after opening. US20110297682 teaches a stopper with strips that are connected with a plurality of top and bottom bridges at different position along the strip. EP2331418 teaches a stopper with strips that have no top nor bottom bridge.

[0012] Other known art prior art systems include a tethered stopper comprising a spiral strip. The spiral strip is made during the stopper molding so there is no cutting or slitting operations. Other known prior art systems include tethered stoppers comprising two strips linking the closure shell to the tamper band secured on the bottle.

SUMMARY

[0013] This invention is a tethered plastic screw stopper where its closure shell remains attached to its tamper band after the bottle is opened by use of a strip made into the plastic material of the stopper between the tamper band and the closure shell using a bottom weakness line and a top weakness line. Each strip remains connected to the tamper band secured on the bottle neck by a least a bottom hinge managed into the bottom weakness line. The opposite ends of each strip are directly linked to the closure shell through a junction point.

[0014] The stopper further comprises a specific top weakness line where the junction point of the strip with the closure shell is located over a bottom bridge located at the nearest from the bottom hinge(s), so called "nearest bottom bridge" on a side of the screwing direction of the closure shell.

[0015] Thus, the invention systematically allows the nearest bottom bridge to be broken due to the junction point location where the closure shell and the strip ends

are upwardly moved the farthest from the tamper band during closure shell unscrewing motion. A force is applied on the closest bridge due to the specific position of the junction point of the end of the strip.

DETAILED DESCRIPTION OF THE DRAWINGS

[0016] The figures are not necessarily to scale and some features may be exaggerated or minimized, such as to show details of particular components. Emphasis is placed on illustrating the principles of the invention. In the figures, like reference numerals designate corresponding parts throughout the different views.

Figure 1 is a diagrammatic lateral view of a tethered stopper in a closed position on a bottle.

Figure 2 is a diagrammatic lateral view similar to Figure 1 during the opening of the stopper.

Figure 3 is a diagrammatic horizontal cross section view along the bottom weakness line a tethered stopper.

Figure 4 is a diagrammatic horizontal cross section view along the top weakness line of the tethered stopper.

DETAILED DESCRIPTION

[0017] As required, detailed embodiments of the present disclosure are disclosed herein. The disclosed embodiments are merely examples that may be embodied in various and alternative forms, and combinations thereof. As used herein, for example, exemplary, and similar terms, refer expansively to embodiments that serve as an illustration, specimen, model or pattern.

[0018] In some instances, well-known components, systems, materials or methods have not been described in detail in order to avoid obscuring the present disclosure. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the present disclosure.

[0019] Phrasing such as 'configured to' perform a function, including in the claims, can include any or all of being sized, shaped, positioned in the arrangement, and comprising material to perform the function.

[0020] Terms indicating quantity, such as 'first' or 'second' are used for exemplary and explanation purposes and are not intended to dictate the specific ordering of a component with respect to other components. Terms indicating position such as 'top' or 'bottom' and 'left' or 'right' are used for exemplary and explanation purposes with respect to other components.

[0021] Various embodiments of the present disclosure are disclosed herein. The described embodiments are merely exemplary illustrations of implementations set for a clear understanding of the principles of the disclosure. Variations, modifications, and combinations may be

made to the described embodiments without departing from the scope of the claims. All such variations, modifications, and combinations are included herein by the scope of this disclosure and the claims.

[0022] This invention relates to a tethered plastic screw stopper 100 for closing a bottle neck 102. The stopper 100 is integrally made of one plastic piece by a molding fabrication step. Other parts or elements of the stopper 100 can be further created into the entire plastic piece through a cutting or slitting step.

[0023] The stopper 100 is a screw type and comprises inner fixation features, such as thread(s), designed to cooperate with outer complementary fixation features made on the bottle neck 102.

[0024] In some embodiments, as illustrated in Figures 1 through 4, the screwing direction of the stopper 100 is typically clockwise and extends from right to left. The screwing orientation is represented as a directional arrow in Figures 1 through 4. The unscrewing direction of the stopper 100 oppositely extends relative to the screw direction, so counterclockwise from left to right. In other embodiments, the screwing direction can be designed counterclockwise.

[0025] The stopper 100 comprises a closure shell 104 and underneath a tamper band 106. The tamper band 106 and the closure shell 104 are separably linked together by way of a strip 108.

[0026] In some embodiments, the stopper 100 includes one strip 108. In other embodiments, the stopper 100 includes two or more strips 108. For example, the stopper 100 includes two strips 108 positioned on opposite sides of the stopper 100. The two strips 108 can be positioned in a symmetrical or asymmetrical layout.

[0027] The strip 108 is separably connected to the closure shell 104 through a plurality of top bridges 112 that form a top weakness line 110. Similarly, the strip 108 is separably connected to the tamper band 106 through a plurality of bottom bridges 116 that form a bottom weakness line 114.

[0028] The bottom weakness line 114 comprises at least one hinge 118 configured to connect the strip 108 and the tamper band 106. In some embodiments, the bottom weakness line 114 comprises two hinges 118 where each hinge 118 connects a respective strip 108 to the tamper band 106. The two hinges 118 can be spaced through a hole or a less thick material managed into the tamper band 106 between the two hinges 118.

[0029] The top bridges 112 and bottom bridges 116 are each configured to be stretched and ultimately broken when unscrewing the closure shell 104. The top and bottom bridges 112, 116 are regularly or irregularly positioned around the perimeter of the top and bottom weakness lines 110, 114 respectively.

[0030] Each strip 108 comprises an extremity at an end of the top weakness line 110, linking the strip 108 with the closure shell 104 at a junction point 120. For example, in the embodiment having two strips 108, there is a junction point 120 at each end of the top weakness line 110,

linking the extremity of each strip 108 to the closure shell 104.

[0031] The top weakness line 110 is configured in order to form an end 122 of the strip 108 positioned above a bottom bridge 116 located at the nearest to the hinge 118 on the left side of the hinge considering a clockwise screwing direction of the closure shell 104. When facing the stopper looking at the hinge(s) 118, if the screw direction is clockwise, then the junction point of the left strip relative to the hinge 118 is located over the nearest left bottom bridge 116 (denoted with parallel vertical lines in Figure 2).

[0032] The end of the top weakness line located on the left of the hinge 118 for a clockwise screwing stopper is angularly located between -40° to 40° relative to the vertical axis of the bottom bridge 116 located at the nearest from the hinge 118. In some embodiments, the hinge 118 is more particularly located between -20° to 20° relative to the vertical axis of the bottom bridge 116 located at the nearest from the hinge 118. For example, when looking at the hinge 118, the junction point 120 of the left strip 108 is angularly situated approximately 20° relative to the left nearest bottom bridge 116. Such angular variation is shown in the drawings illustrated in dotted lines on Figures 3 and 4.

[0033] In some embodiments, the top weakness line 110 is asymmetric relative to the bottom weakness line 114 which is symmetric relative to a vertical plane crossing the diameter of the stopper 100. So when molding or further slitting the stopper 100, the top weakness line 110 is angularly switched or turned offset in relation with the position of the hinge(s) 118 of the bottom weakness line 114. Thus, one strip 108 (e.g., the left strip) in a clockwise screwing configuration, is shorter than the opposite strip 108 (e.g., the right strip). In other embodiments, such as show in Figure 3, the bottom weakness line 114 is symmetric relative to a vertical plane crossing the diameter of the stopper 100 where the plane being shown by a fine continuous line.

[0034] While various embodiments of the invention have been described, it will be apparent to those of ordinary skill in the art that many more embodiments and implementations are possible that are within the scope of the claims.

Claims

1. A tethered plastic screw stopper (100), comprising:

a closure shell (104);
a tamper band (106) separably connected to the closure shell (104) by a plurality of bridges (112, 116), namely a plurality of top bridges (112) that form a top weakness line (110) and a plurality of bottom bridges (116) that form a bottom weakness line (114), that connect a bottom edge of the closure shell (104) to a top edge of the

tamper band (106), each of the bridges (112, 116) configured to be stretched and broken when the closure shell (104) is moved from a first orientation prior to opening to a second orientation after opening;

a strip (108) made into the plastic material of the stopper (100) between the tamper band (106) and the closure shell (104) using the bottom weakness line (114), formed by the plurality of bottom bridges (116), and the top weakness line (110), formed by

the plurality of top bridges (112), top and bottom bridges (112, 116) being regularly or irregularly positioned around the perimeter of the top and bottom weakness lines (110, 114), respectively, wherein

the strip (108) is connected to the closure shell (104) at a junction point (120), the strip (108) comprising an extremity at an end of the top weakness line (110) positioned above a first set of bridges (116) located along the bottom weakness line, the extremity linking the strip (108) with the closure shell (104) at the junction point (120); and a hinge (118) linking the strip (108) and the tamper band (106), the hinge (118) being positioned beneath a set of bridges (112) located along the top weakness line (110), and when facing the stopper (100) and looking at the hinge (118), the end of the top weakness line (110) is located on the left of the hinge (118);

characterized in that

said end of the top weakness line (110) is angularly positioned within 40° of the vertical axis of the bottom bridge (116) located at the nearest from the hinge (118) considering a clockwise screwing motion configuration.

2. The tethered plastic screw stopper (100) according to claim 1, wherein the end of the top weakness line (110) is located on the left of the hinge (118) and is angularly positioned within 20° of the vertical axis of the bottom bridge (116) located at the nearest from the hinge (118) considering a clockwise screwing motion configuration.

3. The tethered plastic screw stopper (100) according to claim 1, wherein:

the strip (108) is a first strip, the screw stopper (100) further comprises a second strip (108) having an extremity at the other end of the top weakness line (110), linking the second strip with the closure shell (104) at a second junction point (120),

the bottom weakness line (114) comprises two hinges (118), where each hinge (118) connects a respective strip (108) to the tamper band (106), the second strip (108) is separably connected

- to the closure shell (104) through the top weakness line (110) and to the tamper band (106) through the bottom weakness line (114) and the second strip (108) is positioned opposite the first strip (108) about a diameter of the tamper band (106). 5
4. The tethered plastic stopper (100) according to claim 3, wherein the two strips (108) are positioned on opposite sides of the stopper (100), in a symmetrical layout 10
5. The tethered plastic stopper (100) according to claim 3, wherein, when looking at the hinges (118), the junction point (120) of the left strip is angularly situated approximately 20° relative to the bottom bridge (116) located at the nearest from the bottom hinge (118). 15
6. The tethered plastic stopper (100) according to any of the preceding claims, wherein the stopper (100) is a screw type and comprises inner fixation features, such as thread(s), designed to cooperate with outer complementary fixation features made on the bottle neck. 20 25
7. The tethered plastic stopper (100) according to any of the preceding claims, wherein the strip (108) is separably connected to the closure shell (104) through a plurality of top bridges (112) that form the top weakness line (110), and, similarly, is separably connected to the tamper band (106) through a plurality of bottom bridges (116) that form the bottom weakness line (114). 30 35
8. The tethered plastic stopper (100) according to any of claims 3 to 9, wherein each of the two strips (108), is separably connected to the closure shell (104) through a plurality of top bridges (112) that form the top weakness line (110), and, similarly, is separably connected to the tamper band (106) through a plurality of bottom bridges (116) that form the bottom weakness line (114). 40 45

Patentansprüche

1. Stopper (100) für angebundenen Kunststoffschraubstopfen, umfassend:

eine Verschlusskapsel (104);
 ein Originalitätsband (106), das durch eine Vielzahl von Brücken (112, 116), namentlich eine Vielzahl von oberen Brücken (112), die eine obere Schwächelinie (110) ausbilden, und eine Vielzahl von unteren Brücken (116), die eine untere Schwächelinie (114) ausbilden, die einen unteren Rand der Verschlusskapsel (104) mit

einem oberen Rand des Originalitätsbandes (106) verbinden, trennbar mit der Verschlusskapsel (104) verbunden ist, wobei jede der Brücken (112, 116) dazu ausgelegt ist, gedehnt und gebrochen zu werden, wenn die Verschlusskapsel (104) von einer ersten Ausrichtung vor dem Öffnen zu einer zweiten Ausrichtung nach dem Öffnen bewegt wird;

einen Streifen (108), eingearbeitet in das Kunststoffmaterial des Stoppers (100) zwischen dem Originalitätsband (106) und der Verschlusskapsel (104) unter Verwendung der unteren Schwächelinie (114), ausgebildet durch die Vielzahl von unteren Brücken (116), und der oberen Schwächelinie (110), ausgebildet durch die Vielzahl von oberen Brücken (112), wobei die oberen und unteren Brücken (112, 116) regelmäßig oder unregelmäßig um den Umfang der oberen beziehungsweise unteren Schwächelinie (110, 114) positioniert sind, wobei der Streifen (108) an einem Verbindungspunkt (120) mit der Verschlusskapsel (104) verbunden ist, wobei der Streifen (108) eine Extremität an einem Ende der oberen Schwächelinie (110), positioniert über einem ersten Satz von Brücken (116), angeordnet entlang der unteren Schwächelinie, umfasst, wobei die Extremität den Streifen (108) am Verbindungspunkt (120) mit der Verschlusskapsel (104) verbindet; und ein Gelenkteil (118), das den Streifen (108) und das Originalitätsband (106) verbindet, wobei das Gelenkteil (118) unter einem Satz von Brücken (112), angeordnet entlang der oberen Schwächelinie (110), positioniert ist, und sich das Ende der oberen Schwächelinie (110) beim Blick in Richtung des Stoppers (100) und Betrachten des Gelenkteils (118) links von dem Gelenkteil (118) befindet;

dadurch gekennzeichnet, dass

das Ende der oberen Schwächelinie (110) abgewinkelt innerhalb von 40° der vertikalen Achse der unteren Brücke (116), unter Berücksichtigung einer Schraubbewegungskonfiguration im Uhrzeigersinn am nächsten zum Gelenkteil (118) angeordnet, positioniert ist.

2. Stopper (100) für angebundenen Kunststoffschraubstopfen nach Anspruch 1, wobei das Ende der oberen Schwächelinie (110) links von dem Gelenkteil (118) angeordnet ist und abgewinkelt innerhalb von der vertikalen Achse der unteren Brücke (116), unter Berücksichtigung einer Schraubbewegungskonfiguration im Uhrzeigersinn am nächsten zum Gelenkteil (118) angeordnet, positioniert ist. 50
3. Stopper (100) für angebundenen Kunststoffschraubstopfen nach Anspruch 1, wobei:

- der Streifen (108) ein erster Streifen ist, der Stopper (100) für den Schraubstopfen ferner einen zweiten Streifen (108) mit einer Extremität am anderen Ende der oberen Schwächelinie (110), den zweiten Streifen an einem zweiten Verbindungspunkt (120) mit der Verschlusskapsel (104) verbindend, umfasst, die untere Schwächelinie (114) zwei Gelenkteile (118) umfasst, wobei jedes Gelenkteil (118) einen entsprechenden Streifen (108) mit dem Originalitätsband (106) verbindet, der zweite Streifen (108) über die obere Schwächelinie (110) mit der Verschlusskapsel (104) und über die untere Schwächelinie (114) mit dem Originalitätsband (106) trennbar verbunden ist, und der zweite Streifen (108) um einen Durchmesser des Originalitätsbands (106) gegenüber dem ersten Streifen (108) positioniert ist.
4. Stopper (100) für angebundenen Kunststoffschraubstopfen nach Anspruch 3, wobei die zwei Streifen (108) auf gegenüberliegenden Seiten des Stoppers (100), in einer symmetrischen Anordnung, positioniert sind.
5. Stopper (100) für angebundenen Kunststoffschraubstopfen nach Anspruch 3, wobei beim Betrachten der Gelenkteile (118) der Verbindungspunkt (120) des linken Streifens relativ zur unteren Brücke (116), am nächsten zum unteren Gelenkteil (118) angeordnet, um etwa abgewinkelt positioniert ist.
6. Stopper (100) für angebundenen Kunststoffschraubstopfen nach einem der vorhergehenden Ansprüche, wobei der Stopper (100) ein Schraubentyp ist und innere Befestigungsmerkmale, beispielsweise (ein) Gewinde, umfasst, dafür vorgesehen, mit äußeren komplementären Befestigungsmerkmalen, die am Flaschenhals ausgeführt sind, zusammenzuwirken.
7. Stopper (100) für angebundenen Kunststoffschraubstopfen nach einem der vorhergehenden Ansprüche, wobei der Streifen (108) durch eine Vielzahl von oberen Brücken (112), welche die obere Schwächelinie (110) ausbilden, trennbar mit der Verschlusskapsel (104) verbunden ist und, auf ähnliche Weise, durch eine Vielzahl von unteren Brücken (116), welche die untere Schwächelinie (114) ausbilden, trennbar mit dem Originalitätsband (106) verbunden ist.
8. Stopper (100) für angebundenen Kunststoffschraubstopfen nach einem der Ansprüche 3 bis 9, wobei jeder der zwei Streifen (108) durch eine Vielzahl von oberen Brücken (112), welche die obere

Schwächelinie (110) ausbilden, trennbar mit der Verschlusskapsel (104) verbunden ist und, auf ähnliche Weise, durch eine Vielzahl von unteren Brücken (116), welche die untere Schwächelinie (114) ausbilden, trennbar mit dem Originalitätsband (106) verbunden ist.

Revendications

1. Bouchon à vis en plastique solidaire (100) comprenant :

une enveloppe de fermeture (104) ;
 une bague d'inviolabilité (106) raccordée de manière séparable à l'enveloppe de fermeture (104) par une pluralité de liens (112, 116), à savoir une pluralité de liens supérieurs (112) qui forment une ligne de moindre résistance supérieure (110) et une pluralité de liens inférieurs (116) qui forment une ligne de moindre résistance inférieure (114), qui raccordent un bord inférieur de l'enveloppe de fermeture (104) à un bord supérieur de la bague d'inviolabilité (106), chacun des liens (112, 116) étant conçu pour être étiré et rompu lorsque l'enveloppe de fermeture (104) est déplacée d'une première orientation avant ouverture à une seconde orientation après ouverture ;
 une bande (108) formée dans la matière plastique du bouchon (100) entre la bague d'inviolabilité (106) et l'enveloppe de fermeture (104) au moyen de la ligne de moindre résistance inférieure (114), formée par la pluralité de liens inférieurs (116), et de la ligne de moindre résistance supérieure (110), formée par la pluralité de liens supérieurs (112), les liens supérieurs et inférieurs (112, 116) étant placés de manière régulière ou irrégulière autour du périmètre des lignes de moindre résistance supérieure et inférieure (110, 114), respectivement, la bande (108) étant raccordée à l'enveloppe de fermeture (104) au niveau d'un point de jonction (120), la bande (108) comprenant une partie terminale située à une extrémité de la ligne de moindre résistance supérieure (110) placée au-dessus d'un premier ensemble de liens (116) situés le long de la ligne de moindre résistance inférieure, la partie terminale reliant la bande (108) à l'enveloppe de fermeture (104) au niveau du point de jonction (120) ; et
 une charnière (118) reliant la bande (108) et la bague d'inviolabilité (106), la charnière (118) étant placée sous un ensemble de liens (112) situés le long de la ligne de moindre résistance supérieure (110), et l'extrémité de la ligne de moindre résistance supérieure (110) étant située, lorsqu'on se trouve face au bouchon (100)

- en regardant la charnière (118), à gauche de la charnière (118) ;
caractérisé en ce que
 ladite extrémité de la ligne de moindre résistance supérieure (110) a une position angulaire située au plus à 40° de l'axe vertical du lien inférieur (116) situé le plus près de la charnière (118) pour une configuration avec un mouvement de vissage horaire.
2. Bouchon à vis en plastique solidaire (100) selon la revendication 1, dans lequel l'extrémité de la ligne de moindre résistance supérieure (110) est située à gauche de la charnière (118) et a une position angulaire située au plus à de l'axe vertical du lien inférieur (116) situé le plus près de la charnière (118) pour une configuration avec un mouvement de vissage horaire.
3. Bouchon à vis en plastique solidaire (100) selon la revendication 1, dans lequel :
- la bande (108) est une première bande, le bouchon à vis (100) comprenant, en outre, une seconde bande (108) comportant une partie terminale située à l'autre extrémité de la ligne de moindre résistance supérieure (110), reliant la seconde bande à l'enveloppe de fermeture (104) au niveau d'un second point de jonction (120),
 la ligne de moindre résistance inférieure (114) comprend deux charnières (118), chaque charnière (118) raccordant une bande (108) respective à la bague d'inviolabilité (106),
 la seconde bande (108) est raccordée de manière séparable à l'enveloppe de fermeture (104) par le biais de la ligne de moindre résistance supérieure (110) et à la bague d'inviolabilité (106) par le biais de la ligne de moindre résistance inférieure (114) et
 la seconde bande (108) est placée à l'opposé de la première bande (108) autour d'un diamètre de la bague d'inviolabilité (106).
4. Bouchon en plastique solidaire (100) selon la revendication 3, dans lequel les deux bandes (108) sont placées sur des côtés opposés du bouchon (100), dans une disposition symétrique.
5. Bouchon en plastique solidaire (100) selon la revendication 3, dans lequel, en regardant les charnières (118), le point de jonction (120) de la bande gauche a une position angulaire située approximativement à relativement au lien inférieur (116) situé le plus près de la charnière inférieure (118).
6. Bouchon en plastique solidaire (100) selon l'une quelconque des revendications précédentes, le bouchon (100) étant du type à vis et comprenant des éléments de fixation intérieurs, tels qu'un ou plusieurs filets, conçus pour coopérer avec des éléments de fixation extérieurs complémentaires formés sur le goulot de bouteille.
7. Bouchon en plastique solidaire (100) selon l'une quelconque des revendications précédentes, dans lequel la bande (108) est raccordée de manière séparable à l'enveloppe de fermeture (104) par le biais d'une pluralité de liens supérieurs (112) qui forment la ligne de moindre résistance supérieure (110) et, de façon similaire, est raccordée de manière séparable à la bague d'inviolabilité (106) par le biais d'une pluralité de liens inférieurs (116) qui forment la ligne de moindre résistance inférieure (114).
8. Bouchon en plastique solidaire (100) selon l'une quelconque des revendications 3 à 9, dans lequel chacune des deux bandes (108) est raccordée de manière séparable à l'enveloppe de fermeture (104) par le biais d'une pluralité de liens supérieurs (112) qui forment la ligne de moindre résistance supérieure (110) et, de façon similaire, est raccordée de manière séparable à la bague d'inviolabilité (106) par le biais d'une pluralité de liens inférieurs (116) qui forment la ligne de moindre résistance inférieure (114).

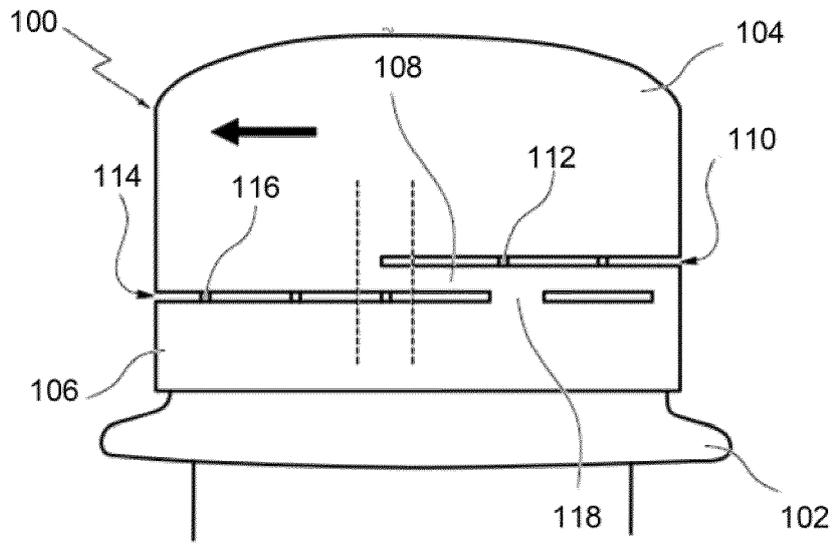


Fig. 1

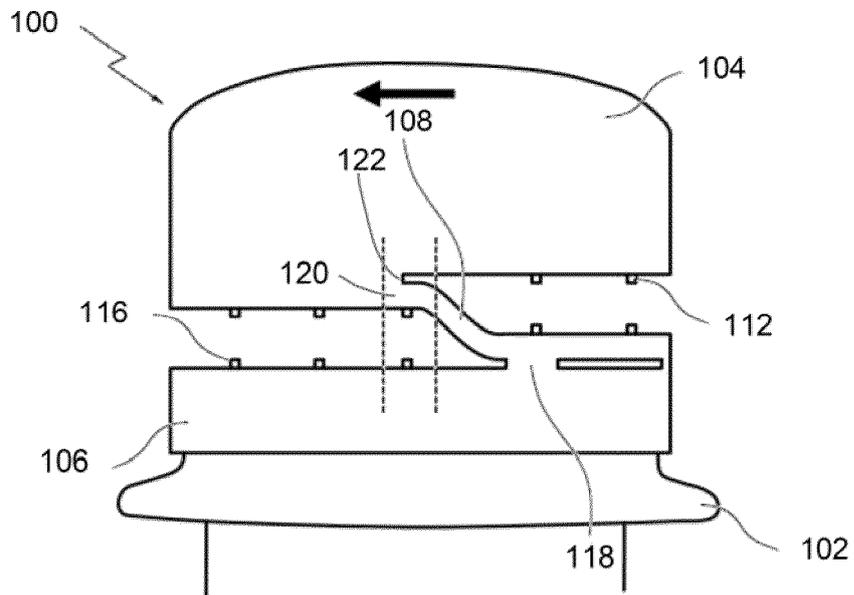


Fig. 2

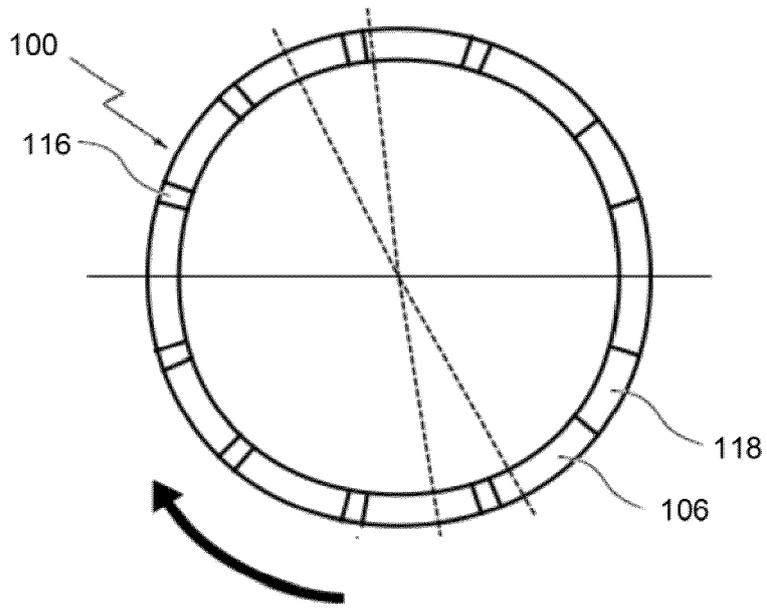


Fig. 3

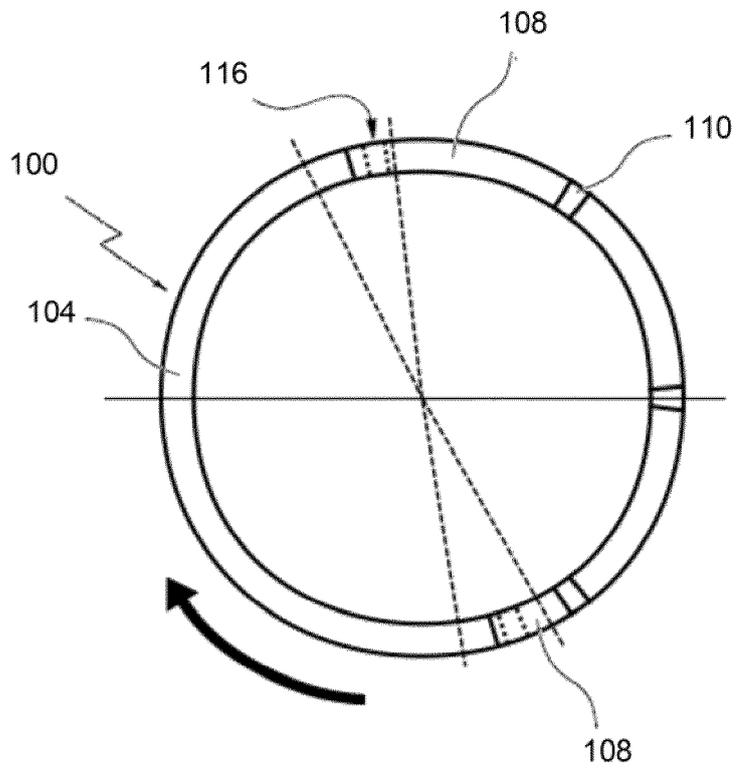


Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 9010555 B [0010]
- US 8490805 B [0011]
- US 20110297682 A [0011]
- EP 2331418 A [0011]