



(22) Date de dépôt/Filing Date: 2012/07/09

(41) Mise à la disp. pub./Open to Public Insp.: 2013/11/30

(45) Date de délivrance/Issue Date: 2019/08/06

(30) Priorité/Priority: 2012/05/31 (US13/484,737)

(51) Cl.Int./Int.Cl. *F24C 15/04* (2006.01)

(72) Inventeurs/Inventors:

BRADEN, BEN, US;
DORSTEN, RUSSELL, US;
HENDRICKS, DONALD, US;
PARKER, ROSE MARIE, US;
RUSSELL, TIMOTHY, US

(73) Propriétaire/Owner:

BSH HOME APPLIANCES CORPORATION, US

(74) Agent: SMART & BIGGAR

(54) Titre : APPAREIL ELECTROMENAGER AYANT UN SYSTEME D'INSTALLATION D'UNE PORTE DE VERRE INTERIEURE

(54) Title: HOUSEHOLD APPLIANCE HAVING A MOUNTING SYSTEM FOR AN INNER DOOR GLASS

(57) **Abrégé/Abstract:**

A household cooking appliance including a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening, and a door covering the opening and moveable about a hinge between an open position and a closed position. The door includes a full glass inner panel having an inner surface that abuts the seal when the door is in a closed position and shock-absorbing means for absorbing and distributing a shock or an impact on the full glass inner panel.

ABSTRACT OF THE DISCLOSURE

A household cooking appliance including a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening, and a door covering the opening and moveable about a hinge between an open position and a closed position. The door includes a full glass inner panel having an inner surface that abuts the seal when the door is in a closed position and shock-absorbing means for absorbing and distributing a shock or an impact on the full glass inner panel.

50777-308

1

**HOUSEHOLD APPLIANCE HAVING A MOUNTING SYSTEM
FOR AN INNER DOOR GLASS**

[0001]

5

FIELD OF THE INVENTION

[0002] The present invention is directed to a self-cleaning household appliance having a door, and more particularly, to a household appliance having a door with a flexible mounting system for a glass inner panel.

BACKGROUND OF THE INVENTION

[0003] Conventional self-cleaning ovens and ranges commonly may include an oven door with a traditional metal "plunger" on the inside surface of the door. The plunger may include a plurality of glass panels to permit viewing an interior of the oven chamber. Ovens having self-cleaning features have become popular among consumers and commonly are offered by manufacturers on many oven models. In a self-cleaning process, the oven door commonly is closed and locked by a mechanical latch to prevent opening during the self-cleaning process and then the oven chamber is heated to a high temperature, such as 900 - 1000° F, to reduce food pieces or other contaminants in the oven chamber to ash. In this way, the oven "self-cleans" the oven chamber, for example, without a user needing to apply a cleaning solution or solvent to the surface and/or to scrub the surface.

SUMMARY OF THE INVENTION

[0004] The present invention is directed to a household cooking appliance comprising a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening, and a door covering the opening and moveable about a hinge between an open position and a closed position. The door includes a full glass inner panel having an inner surface that abuts the seal when the door is in a closed position and shock-absorbing means for absorbing and distributing shocks and impacts on the full glass inner panel.

[0005] In this way, the present invention can provide an oven door having a full glass inner panel and means for fixing and supporting the full glass inner panel and for absorbing

shocks or impacts on the glass such that an impact to the glass can be distributed over the glass without breaking the glass. The full glass inner panel can be configured to “float” or move with respect to other components of the door to minimize or avoid the glass contacting firm surfaces of the door assembly. The present invention also can provide an oven door having an inner glass panel that is easy to wipe and clean, increases an amount of space in the cooking chamber, reduces a number of glass panels needed to a suitable surface temperature of the door skin, and provides an aesthetically pleasing appearance for marketing purposes.

[0006] To provide a better understanding of the invention, a summary of the problems with the conventional designs recognized by the present invention along with the reasons for improving the arrangement of the conventional self-cleaning oven door and the corresponding advantages provided by the present invention will be explained in greater detail.

[0007] Some conventional appliances, without self-cleaning features, may include a door in which the inside surface comprises a solid sheet of glass instead of a traditional metal “plunger”. The implementation of such glass inner surfaces primarily has been driven by marketing objectives and commonly for cosmetic purposes. Such glass inner surfaces also can provide practical advantages such as making wiping and cleaning of the inside surface of an oven door easier and simpler for a user. However, the known appliances have not provided an oven door with a solid sheet of glass for appliances with self-cleaning features for at least the following reasons.

[0008] Conventional doors with a traditional metal “plunger” may include an inner glass panel that is supported by the plunger and inset from the edges of the plunger such that the entire

glass panel is disposed inside the opening of the oven chamber. During a self-cleaning process, the entire inner glass panel is subjected to heating to the self-cleaning temperature (e.g., such as 900 - 1000° F). Thus, the entire inner glass is heated to the same temperature and little or no temperature differential exists between different areas of the glass.

[0009] An oven door having a solid sheet of glass extending from edge to edge (i.e., side-to-side and top-to-bottom) of the inner side of the door has a first, inner portion of glass covering the opening to the oven chamber and disposed within a perimeter of a gasket surrounding the opening of the oven chamber. However, in stark contrast to a conventional door with a metal plunger, the solid sheet of glass also has a second, outer or perimeter portion of glass that extends past the gasket surrounding the opening of the oven chamber and to the edge of the door. In a self-cleaning process, the inner portion of the full glass inner surface within the gasket of the oven chamber opening is subjected to heating along with the rest of the interior of the oven chamber up to the self-cleaning temperature (e.g., such as 900 - 1000° F). At the same time, the outer portion of the full glass inner surface that extends past the gasket may remain at or near room temperature. As a result, an extreme temperature differential may exist between the heated inner portion and the room temperature outer portion of the full glass inner surface during a self-cleaning process. These extreme temperature differentials can be problematic for conventional inner glass panels, which commonly have a relatively high coefficient of thermal expansion and may fracture, break, or even explode into pieces when exposed to extreme temperature differentials.

[0010] For example, conventional inner glass panels commonly may be formed from glass, such as soda-lime glass, that is capable of withstanding a predetermined amount of force (e.g., impact force, for example, resulting from a user dropping a pot or pan on the door when the door is in an open position in order) that may be exerted on the inner glass in order to comply with industry and government standards. However, the commonly used glass materials ordinarily have a relatively high coefficient of thermal expansion. Therefore, if a full glass inner surface of a self-cleaning oven door is formed using the conventional inner glass panels, the inner glass panel may break, fracture, or even explode into pieces when subjected to the extreme temperature differentials associated with a self-cleaning process. Therefore, the conventional glass panels are not suitable for a full glass inner surface of an oven with a self-cleaning feature.

[0011] These problems have been addressed by the present invention by forming the inner glass panel from a transparent ceramic material with a low coefficient of thermal expansion. For example, a ceramic material, which can withstand large temperature differentials across an entire surface without breaking, can be used for the inner glass. More particularly, the door can include a full glass inner panel formed by a transparent ceramic material commonly used, for example, for fireplace glass (e.g., Robax® or Resistan™, manufactured by SCHOTT North America, Inc.), which can withstand large temperature differentials across its surface without breaking. In this way, the present invention can provide a full glass inner panel that can withstand the inner portion of the full glass inner surface within the gasket of the oven chamber opening being subjected to heating to the self-cleaning temperature while the outer or perimeter

portion of the full glass inner surface that extends past the gasket remains at or near room temperature.

[0012] For example, a self-clean household cooking appliance can be provided that includes a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening, and a door covering the opening and moveable about a hinge between an open position and a closed position. The door includes a full glass inner panel that abuts the seal when the door is in a closed position. The full glass inner panel includes an inner surface having a first portion and a second portion. The first portion is adjacent to a first area within the perimeter of the seal surrounding the opening and directly exposed to heating of the oven chamber, and the second portion is adjacent to a second area outside of the perimeter of the seal and not being exposed to heating of the oven chamber. The full glass inner panel extends substantially from edge-to-edge of the door. Accordingly, the exemplary embodiments can provide a self-cleaning oven door for a self-cleaning oven having a full glass inner panel that is capable of withstanding the high temperatures and extreme temperature differentials associated with a self-cleaning oven across its surface without breaking, while also being capable of fixing and supporting the full glass inner panel and absorbing shocks or impacts on the glass to comply with ratings agencies and industry/government standards. The exemplary embodiments can provide a self-cleaning oven door with a full inner glass surface that is glass and that is easy to wipe clean, thereby providing a clean aesthetic appearance. The exemplary self-cleaning oven door can include a suspension system that absorbs impact to the full glass inner panel to resist breakage of the ceramic panel. The exemplary self-cleaning oven door can

increase an amount of space in the cooking chamber by eliminating the door “plunger,” and thus, eliminating an intrusion of the door into the space within the oven chamber. The exemplary self-cleaning oven door also can reduce a number of glass panels needed to a suitable surface temperature of the door skin. The full glass inner panel of the exemplary self-cleaning oven door also can provide a clean cosmetic appearance that is desirable to many users.

[0013] The present invention further recognizes, however, that forming the inner glass panel of a door for a self-cleaning oven from a transparent ceramic material with a low coefficient of thermal expansion presents a unique set of difficulties and problems, which may not be present in ovens without self-cleaning features.

[0014] For example, the present invention recognizes that a transparent ceramic material with a low coefficient of thermal expansion commonly may be brittle compared to conventional glass panels. As a result, a glass panel formed from transparent ceramic material with a low coefficient of thermal expansion may not be capable of withstanding the forces (e.g., impact forces) that may be exerted on an inner glass panel of an oven, for example, by a user dropping a pot or pan on the door when the door is in an open position, and thus, may not comply with ratings agencies and industry/government standards. The present invention has found that a glass panel formed by simply replacing the conventional glass with a glass panel formed from transparent ceramic material commonly may fail to comply with the applicable ratings agency and industry/government standards for oven doors, such as one or more drop tests in which a mass is dropped on the glass panel of an open door from a predetermined height. Moreover, the present invention recognizes that conventional devices for mounting hinges, a door latch, or one

or more of the glass panels of the door may not be suitable for a door having a full transparent ceramic inner panel extending from edge to edge of the door.

[0015] The exemplary embodiments of the present invention address each of these problems, for example, by supporting the full glass inner panel, which is formed from a transparent ceramic material with a low coefficient of thermal expansion, with a shock absorbing fixation or support means for distributing forces exerted on the glass to prevent breakage and comply with ratings agencies and industry/government standards.

[0016] An exemplary embodiment is directed to means for fixing and supporting the full glass inner panel and for absorbing shocks or impacts on the glass such that an impact to the glass can be distributed over the glass without breaking the glass, and such that the glass can be configured to “float” or move with respect to other components of the door to minimize or avoid the glass contacting firm surfaces of the door assembly. The exemplary means for fixing and supporting the full glass inner panel and for absorbing shocks or impacts on the glass can include one or more insulation components and flexible metal parts that permit the glass to “float” or move with respect to the components of the door.

[0017] For purposes of this disclosure, the term “float” means that the full transparent ceramic inner glass is configured to move by one or more predetermined distances in one or more directions with respect to the door, such as a side-to-side direction with respect to the door, a top-to-bottom direction with respect to the door, and a front-to-back direction with respect to the door (i.e., approximately normal to a planar surface of the glass) or a combination thereof.

[0018] For purposes of this disclosure, the term “inner glass” is defined as the glass panel of the door that is disposed on an inner side of the door that is closest to an opening of the oven chamber. The term “outer glass” is defined as the cosmetic glass panel of the door skin that is furthest from the opening of the oven chamber. The term “middle glass” is
5 defined as a glass panel that is disposed between the inner glass and the outer glass.

[0019] In another embodiment, a coating (e.g., an energy+ coating) that commonly may be used on fireplaces may be provided on the inner glass to minimize or reduce external door surface temperatures to an acceptable level. Additionally, the door can include a middle glass that is supported between the full glass inner panel and the door skin (outer) glass panel.
10 The middle glass can include a tin oxide coating on both sides and can serve as a part of the flexible mounting/suspension system for the inner glass panel. In this embodiment, the door skin (outer) glass may not have a heat reflective coating.

[0020] Moreover, according to the present invention, an embodiment may control a temperature on the exterior of the self-cleaning oven door to be within acceptable limits such
15 that a predetermined safe temperature can be maintained on the exterior surfaces of the door (e.g., door skin, outer glass, etc.), even at high self-cleaning temperatures associated with a self-cleaning process.

[0020a] In accordance with another embodiment of the invention, there is provided a household cooking appliance comprising: a housing having an oven chamber accessible
20 through an opening, the opening having a seal surrounding a perimeter of the opening; and a door covering the opening and moveable about a hinge between an open position and a closed position, the door including: an outer door skin comprising: a front surface including an outer glass panel; a first side surface; a second side surface opposed to the first side surface; an upper surface; and a lower surface opposed to the upper surface; a full glass inner panel
25 forming a rear surface of the door and extending substantially from an edge of the first side surface to an edge of the second side surface and from an edge of the upper surface to an edge of the lower surface, the full glass inner panel having a front surface that faces toward a front of the door and a rear surface forming the rear surface of the door, wherein a portion of the rear surface of the full glass inner panel abuts the seal when the door is in a closed position;

and shock-absorbing means for resiliently and movably supporting the front surface of the full glass inner panel at a location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, wherein the shock-absorbing means resiliently and movably support the front surface of the full glass inner panel such that the edges of the front surface of the full glass inner panel are maintained in a spaced position from firm surfaces of components of the door when the full glass inner panel moves in a direction toward the front of the door, wherein the shock-absorbing means absorb and distribute a shock or an impact on the full glass inner panel and prevent the front surface of the full glass inner panel from contacting the firm surfaces of the components of the door when the full glass inner panel moves in the direction toward the front of the door, and wherein the shock-absorbing means minimize heat transfer from the full glass inner panel to other heat conducting components of the door.

[0020b] In accordance with another embodiment of the invention, there is provided a household cooking appliance comprising: a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening; and a door covering the opening and moveable about a hinge between an open position and a closed position, the door including: an outer door skin comprising: a front surface including an outer glass panel; a first side surface; a second side surface opposed to the first side surface; an upper surface; and a lower surface opposed to the upper surface; a full glass inner panel forming a rear surface of the door and extending substantially from an edge of the first side surface to an edge of the second side surface and from an edge of the upper surface to an edge of the lower surface, the full glass inner panel having a front surface that faces toward a front of the door and a rear surface forming the rear surface of the door, wherein a portion of the rear surface of the full glass inner panel abuts the seal when the door is in a closed position; and a flexible support system that flexibly supports the front surface of the full glass inner panel, at a location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, in a resilient and movable manner and in a spaced position from components of the door when the full glass inner panel moves in a direction toward the front of the door such that the flexible support system absorbs and distributes a shock or an impact on the full glass inner panel and prevents the outer perimeter edge of the front surface

of the full glass inner panel from contacting the components of the door when the full glass inner panel moves in the direction toward the front of the door, and wherein the flexible support system minimizes heat transfer from the full glass inner panel to other heat conducting components of the door.

5 **[0020b]** In accordance with another embodiment of the invention, there is provided a household cooking appliance comprising: a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening; and a door covering the opening and moveable about a hinge between an open position and a closed position, wherein the door includes: an outer door skin comprising: a front surface including
10 an outer glass panel; a first side surface; a second side surface opposed to the first side surface; an upper surface; and a lower surface opposed to the upper surface; a full glass inner panel forming a rear surface of the door and extending substantially from an edge of the first side surface to an edge of the second side surface and from an edge of the upper surface to an edge of the lower surface, the full glass inner panel having a front surface that faces toward a
15 front of the door and a rear surface forming the rear surface of the door, wherein a portion of the rear surface of the full glass inner panel abuts the seal when the door is in a closed position; and a flexible metal frame between the outer door skin and the front surface of the full glass inner panel that is configured to receive an insulation layer around an outer
20 perimeter of the frame and support the front surface of the full glass inner panel, at a location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, in a resilient and movable manner and in a spaced position from firm surfaces of components of the door when the full glass inner panel moves in a direction toward the front of the door such that the flexible metal frame absorbs and distributes an impact force on the full glass inner panel and prevents the front surface of the full glass inner
25 panel from contacting the firm surfaces of the components of the door when the full glass inner panel moves in the direction toward the front of the door, and wherein the flexible metal frame minimizes heat transfer from the full glass inner panel to other heat conducting components of the door.

30 **[0021]** Other features and advantages of the present invention will become apparent to those skilled in the art upon review of the following detailed description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] These and other aspects and features of embodiments of the present invention will be better understood after a reading of the following detailed description, together with the attached drawings, wherein:

Figures 1A - 1C are a front view, a side view, and a perspective view, respectively, of a household appliance according to an exemplary embodiment of the invention.

Figure 2 is an exploded view of the exemplary household appliance of FIGS. 1A - 1C.

Figure 3 is a front perspective view of a household appliance according to another exemplary embodiment of the invention.

Figure 4 is a front perspective view of a household appliance according to another exemplary embodiment of the invention.

Figure 5 is a front perspective view of a self-cleaning oven door according to an exemplary embodiment of the invention.

Figures 6A - 6D are a rear perspective view of a self-cleaning oven door, a partial perspective view of an edge retainer of the self-cleaning oven door taken at VI-B of Figure 6A, a partial perspective side view of a hinge cover of the self-cleaning oven door taken at VI-C of Figure 6A, and a partial perspective bottom view of a hinge cover of the self-cleaning oven door taken at VI-C of Figure 6A, respectively, according to an exemplary embodiment of the invention.

Figure 7 is a rear perspective view of a transparent ceramic inner panel of a self-cleaning oven door according to an exemplary embodiment of the invention.

Figure 8 is a rear perspective view of a partially assembled self-cleaning oven door having an inner glass shock absorbing support system according to an exemplary embodiment of the invention.

Figure 9A - 9C are a front plan view, a side view, and a partial perspective view of elements of an inner glass shock absorbing support system, respectively, and Figure 9D is a partial cross-sectional view taken at section IX-D - IX-D of Figure 9C according to an exemplary embodiment of the invention.

Figures 10A - 10C are a partial perspective view of a door hinge assembly and hinge retainer, a perspective view of a hinge retainer, and a front view of a hinge retainer of an inner glass shock absorbing support system according to an exemplary embodiment of the invention.

Figure 11 is another rear perspective view of a partially assembled self-cleaning oven door having elements of an inner glass inner glass shock absorbing support system according to an exemplary embodiment of the invention.

Figure 12 is a rear perspective view of a partially assembled self-cleaning oven door having elements of an inner glass shock absorbing support system and elements of a middle glass mounting system according to exemplary embodiments of the invention.

Figure 13 is a perspective view of a lower retainer of a middle glass mounting system according to an exemplary embodiment of the invention.

Figure 14 is a rear plan view of a partially assembled self-cleaning oven door having elements of a middle glass mounting system and elements of an outer glass mounting system according to exemplary embodiments of the invention.

Figures 15A - 15D are a side perspective view of a left-hand side bracket, a side view of a left-hand side bracket, a side perspective view of a right-hand side bracket, and an end view of a left-hand side bracket, respectively, of a middle glass mounting system and an outer glass mounting system according to exemplary embodiments of the invention.

Figure 16 is a rear perspective view of a partially assembled self-cleaning oven door having upper and lower air ramps/guides according to an exemplary embodiment of the invention.

Figures 17A and 17B are rear perspective views of an upper and a lower air ramp/guide, respectively, according to an exemplary embodiment of the invention.

Figure 18 is a rear perspective view of a partially assembled self-cleaning oven door having an outer glass mounting system according to an exemplary embodiment of the invention.

Figures 19A and 19B are a perspective view and an end view of an outer glass bracket according to an exemplary embodiment of the invention, and Figure 19C is a perspective partial assembly view of an outer glass mounting system according to an exemplary embodiment of the invention.

Figure 20 is a rear perspective view of a partially assembled self-cleaning oven door having elements of an outer glass mounting system according to an exemplary embodiment of the invention.

Figure 21 is another rear perspective view of a partially assembled self-cleaning oven door having elements of an outer glass mounting system according to an exemplary embodiment of the invention.

Figures 22A and 22B are a perspective view and an end view, respectively, of an element of an outer glass mounting system according to an exemplary embodiment of the invention.

Figure 23A is a perspective view of a door latch, and Figures 23B and 23C are partial perspective views of a latch system of a self-cleaning oven door according to an exemplary embodiment of the invention.

Figures 24A and 24B are partial perspective views of a latch system of a self-cleaning oven door according to an exemplary embodiment of the invention.

Figure 25A is partial perspective view of a door having a hinge retainer assembly according to an exemplary embodiment of the invention, Figure 25B is a partial perspective view of a door having a hinge retainer assembly according to another exemplary embodiment of the invention, and Figure 25C is a cut-away, partial side view of a door having the hinge retainer assembly of Figure 25A.

**DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS OF THE
INVENTION**

[0023] The present invention now is described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0024] Referring now to the drawings, Figures 1A - 25C illustrate exemplary embodiments of a self-cleaning household appliance having an oven door with a full glass inner panel and shock-absorbing means for absorbing and distributing shocks and impacts on the full glass inner panel. Prior to describing the exemplary embodiments of a full glass inner panel and shock-absorbing means in greater detail, and to provide a better understanding of the invention, this disclosure will first describe examples a self-cleaning household appliance and an exemplary oven door of a self-cleaning household appliance. Other features and components of the oven door, including examples of a middle glass mounting system and an outer glass mounting system, also will be described following the description of the full glass inner panel to provide a better understanding of the overall arrangement and features of the exemplary oven door. To provide a better understanding of the invention, the description will start with the components of an innermost side of the door and progress toward the front door skin of the door.

[0025] With reference to FIGS. 1A - 1C, a household cooking appliance can include, for example, a gas cooking range 100 having a housing 102 including one or more cooking or warming devices, such as a cooktop, gas oven, electric oven, steam oven, convection oven, and/or warming drawer. In other embodiments, the appliance 100 can include one or more oven cooking chambers without a cooktop. In other embodiments, the appliance 100 can include a standalone appliance, wall mounted appliance, such as a stand-alone oven or wall mounted oven. For example, the appliance housing 102 can include a cooktop 104 and control panel 106. The cooktop 104 can include, for example, a gas cooktop having a plurality of gas burners, or other types of cooktops, such as an electric cooktop, an induction cooktop, or the like. The exemplary household appliance 100 can include one or more doors, such as a baking oven door 200, a steam oven door 300, and/or a warming drawer door 400 for providing access to one or more chambers of the housing 102. The housing 102 can include pedestal feet 108 for example for supporting the stand alone appliance and a kick panel 110.

[0026] Referring to FIG. 2, an exploded view of the appliance 100 of FIGS. 1A - 1C includes housing parts 102A, 102B, 102C, 102D, the cooktop 104, and control panel 106, a baking oven door 200, a steam oven door 300, and a warming drawer door 400, and kick panel 110. For example, the housing of the exemplary household appliance 100 shown in FIG. 2 can include left-hand and right-hand sidewalls 102A, 102B and one or more rear panels 102D on a frame 103. The exemplary appliance 100 can include other devices and features, such as, for example, a backsplash or venting device 102C, hideaway label plate 105, etc. The frame 103 can include one or more chambers for cooking or warming devices, such as a baking oven chamber

112, steam oven chamber 113, and/or warming drawer chamber 114, each covered by the baking oven door 200, steam oven door 300, and warming drawer door 400, respectively.

[0027] The exemplary embodiments are not limited to the oven 100 of FIGS. 1A - 1C having the baking oven door 200, steam oven door 300, and warming drawer door 400, and can be applied to other appliances, such as the appliance 100 illustrated in FIGS. 3 and 4. Like reference numerals are used to identify the features of the embodiments of the appliance 100 in FIGS. 1A - 4. The features shown in FIGS. 3 and 4 are similar to, or the same as, the features of FIGS. 1A - 1C, and therefore, are not repeated.

[0028] With reference to FIG. 5, an exemplary embodiment of a self-cleaning oven door 200 (as illustrated in the examples of FIGS. 1A - 4) will now be described.

[0029] The self-cleaning oven door 200 can include a door skin 202 having a front surface 202a that faces away from the oven chamber, side surfaces 202b, a lower surface (not shown), and a top surface 202c. The top surface 202c can include a plurality of vents 203 for permitting air flow through the door. The door skin (outer) glass may be provided with or without a heat reflective coating. The door 200 can include a handle 204 supported from the door skin 202 by handle mounts 206. The door 200 can include an outer glass panel 298 and a plurality of interior glasses panels (e.g., middle glass, inner glass; not shown in FIG. 5) for viewing an interior of the oven chamber through the door 200 while keeping a temperature of the outer glass panel 298 at an acceptable temperature. The door 200 can include hinge claws 212 to facilitate pivoting of the door 200 with respect to the appliance housing for opening and closing the oven chamber.

[0030] With reference to FIG. 6A, an exemplary embodiment of the door 200 of FIG. 5 can include a full glass panel formed by a transparent ceramic inner panel 220 (e.g., a full glass ceramic inner panel, which is shown in greater detail in FIG. 7). The door 200 can include a lip 205 extending for example along an inner edge of the top surface 202c. The lip 205 can be integrally formed with the top surface 202c or formed as a separate component coupled to the top surface 202c. The top surface 202c can include a latch cover 216 having a guide opening 219 for receiving and guiding a door lock to a latch plate (not shown), which may be disposed under the latch cover 216. The latch cover 216 can be integrally formed with the top surface 202c or formed as a separate part. As shown in FIG. 6A, the door 200 can include hinge covers 214 that are adjacent to or surround the hinge claws 212, which facilitate pivoting of the door 200 with respect to the appliance housing for opening and closing the oven chamber. The hinge cover 214 can include an opening for accommodating the hinge claw 212 and also covering portions of a hinge assembly within the door 200 from view. The hinge cover 214 can be formed, for example, from metal such as stainless steel. The hinge cover 214 also can be part of a system that retains the ceramic transparent panel 220 in the door 200 by restraining the panel 200 at the bottom of the door 200 while at the same time covering the hinge assembly, as described in more detail with reference to FIGS. 6B - 6D.

[0031] With reference again to FIG. 6A, an example of a transparent ceramic inner panel 220 includes a first inner portion 222 that is disposed adjacent to an area within a gasket (not shown) surrounding the opening of the oven chamber opening (e.g., 112 in FIG. 2) and sealing the door 200 to the opening. The area of the transparent ceramic inner panel 220 that contacts

and seals against the gasket (not shown) when the door 200 is closed is exemplarily illustrated by the dashed line 223. The transparent ceramic inner panel 220 includes a second, outer or perimeter portion 224 that is disposed adjacent to an area of the oven outside of the gasket (not shown) that surrounds the opening to the oven chamber, or in other words, outside the area illustrated by the dashed line 223. As a result of this arrangement, during a self-cleaning operation, the first inner portion 222 is subjected to heating to the self-cleaning temperature along with the oven chamber, while the second, outer or perimeter portion 224 remains at or near room temperature, thereby subjecting the transparent ceramic inner panel 220 to a large temperature differential between portions 222 and 224. As shown in FIG. 6A, the transparent ceramic inner panel 220 can extend substantially from edge to edge of the door 200 in both the width direction and the height direction of the door 200 (i.e., from side 202b to side 202b in the width direction and from the top surface 202c to the bottom surface (202d in FIG. 6D) in the height direction). In other embodiments, the transparent ceramic inner panel 220 may be configured to extend to an area adjacent to one or more of the sides, top, and bottom of the door that is outside of the area illustrated by the dashed line 223.

[0032] With reference to the enlargements VI-B and VI-C of FIG. 6A, which are illustrated in FIGS. 6B - 6D, the exemplary door 200 can be assembled by inserting a top edge of the transparent ceramic inner panel 220 under the lip 205 of the top surface 202c and then resting the transparent ceramic inner panel 220 into position, as shown in FIG. 6B. Each of the hinge covers 214 then can be installed over at least a portion of each lower corner of the transparent ceramic inner panel 220 and coupled to the lower surface 202d of the door 200 using fasteners,

such as one or more screws, as shown in FIGS. 6C and 6D. The hinge cover 214 can include, for example, a side portion that is disposed adjacent to the side 202b and secures the transparent ceramic inner panel 220 in a dimension extending in a direction of a width of the door (i.e., from side 202b to side 202b). The hinge cover 214 also can include, for example, a bottom portion that is disposed adjacent to the bottom 202d and secures the transparent ceramic inner panel 220 in a first vertical direction of a height of the door extending from the top 202c toward the bottom 202d. The lip 205 can secure the transparent ceramic inner panel 220 in a second vertical direction of the height of the door extending from the bottom 202d toward the top 202c. In this way, the transparent ceramic inner panel 220 can be secured in all three dimensions by the combination of the lip 205 and the hinge cover 214, for example, without openings or fasteners extending through the transparent ceramic inner panel 220. In an embodiment, a suitable amount of clearance can be provided between the transparent ceramic inner panel 220 and the lip 205 and/or the hinge cover 214 such that the transparent ceramic inner panel 220 can “float” in the mounted position to allow for some movement for impact absorption and/or growth/expansion of the panel 220 during heating.

[0033] With reference to FIG. 7 an exemplary embodiment of the transparent ceramic inner panel 220 will now be described.

[0034] The transparent ceramic inner panel 220 can include a first inner portion 222 that is disposed adjacent to an area within a gasket (not shown) surrounding the opening of the oven chamber opening (e.g., 112 in FIG. 2) and sealing the door 200 to the opening. The area of the transparent ceramic inner panel 220 that contacts and seals against the gasket (not shown) when

the door 200 is closed is exemplarily illustrated by the dashed line 223. The transparent ceramic inner panel 220 can include a second, outer or perimeter portion 224 that is disposed adjacent to an area of the oven outside the area illustrated by the dashed line 223. In this example, the transparent ceramic inner panel 220 can include a hinge cutout 226 at each lower corner for accommodating or providing clearance for the door hinges, for example, without having openings or components, such as a hinge or screw, penetrating the transparent ceramic inner panel 220. The hinge cutout 226 at each corner also can provide a surface for engaging the hinge covers (shown in FIGS. 6A - 6D) to secure the transparent ceramic inner panel 220 in two dimensions. The transparent ceramic inner panel 220 can include a latch cutout 228 formed in a top edge of the panel 220 for accommodating or providing clearance for a door latch (not shown in FIG. 7), for example, without having openings or components, such as a latch or screw, penetrating the transparent ceramic inner panel 220.

[0035] The transparent ceramic inner panel 220 can have a low coefficient of thermal expansion capable of withstanding large temperature differentials across an entire surface without breaking. More particularly, the transparent ceramic inner panel 220 can be formed by a transparent ceramic material commonly used, for example, for fireplace glass (e.g., Robax® or Resistan™, manufactured by SCHOTT North America, Inc.), which can withstand large temperature differentials across its surface without breaking, and thus, may withstand the first inner portion 222 of the full glass inner surface being subjected to heating to the self-cleaning temperature while the second, outer or perimeter portion 224 of the full glass inner surface remains at or near room temperature. In another embodiments, the transparent ceramic inner

panel 220 may include a coating such as a heat reflective coating (e.g., Energy Plus coating), which commonly may be used on fireplace glass, to assist with minimizing or reducing an external surface temperature of the door to an acceptable level.

[0036] With reference to FIGS. 8 - 11, an exemplary embodiment of an inner glass shock absorbing support system will now be described.

[0037] FIG. 8 illustrates the door 200 with the transparent ceramic inner panel 220 removed. As shown in FIG. 8, the door 200 can include an inner glass shock absorbing support system having an energy absorbing support means (e.g., shock absorbing support means, such as 230 or 230 in combination with 234 and/or 242, 244) for evenly, flexibly, and resiliently supporting the transparent ceramic inner panel 220 in a manner that permits the transparent ceramic inner panel 220 to “float” in the mounted position to allow for some movement for shock/impact absorption. In this way, the shock absorbing support means can absorb and distribute forces (e.g., shock or impact forces from a dropped pot or pan, etc.) exerted on the transparent ceramic inner panel 220 to prevent the panel 220 from breaking or fracturing and to enable the panel 220 to comply with ratings agencies and industry/government standards.

[0038] More particularly, the shock absorbing support means can include, for example, one or more flexible, compressible, or resilient parts or mounts configured to absorb and distribute forces exerted on the transparent ceramic inner panel 220, such as forces exerted by a user dropping a pot or pan on the open door while loading or unloading the cooking appliance. In the example illustrated in FIG. 8, the shock absorbing support means can include a flexible, deflectable, or resilient metal support 230 or the like for suspending the transparent ceramic

inner panel 220 within the door 200 in a manner that flexibly supports a surface of the transparent ceramic inner panel 220 and that permits the transparent ceramic inner panel 220 to “float” in the mounted position to allow for some movement for impact absorption. An example of a deflectable metal support 230 will be described in greater detail with reference to FIGS. 9A - 9D.

[0039] The shock absorbing support means further can include a first insulation layer 234 surrounding the deflectable metal support 230. The first insulation layer 234 can be secured using one or more hangers (not shown) that suspend the first insulation layer 234 in position from one or more components of the door 200. A portion of the first insulation layer 234 can flexibly and resiliently support an interior surface of the transparent ceramic inner panel 220. A portion of the first insulation layer 234 optionally can extend under at least a portion of the deflectable support 230. The first insulation layer 234 also can assist with reducing heat transfer from the transparent ceramic inner panel 220 to the other components of the door, such as the middle glass panel or outer glass panel, thereby assisting with reducing the temperature of the outer glass panel. The first insulation layer 234 can function alone or in cooperation with the deflectable metal support 230. An example of a shock absorbing support means including a deflectable metal support 230 and insulation layer 234 will be described in greater detail with reference to FIGS. 9A, 9B, and 9D.

[0040] With reference again to FIG. 8, the door 200 can include a hinge assembly 240 on each side, such as an off-the-shelf hinge assembly. The shock absorbing support means further can include a second insulation layer 242 disposed on a surface of each hinge assembly 240 that

flexibly supports an interior surface of the transparent ceramic inner panel 220. The second insulation layer 242 can be secured to the hinge assembly 240 using, for example, one or more movable or resilient insulation retainers 244, which will be described in greater detail with reference to FIGS. 10A - 10C.

[0041] As shown in FIG. 8, the transparent ceramic inner panel 220 can be supported at a plurality of locations by one or more of a deflectable metal support 230, a first insulation layer 234, a second insulation layer 242, and/or an insulation retainer 244. One of ordinary skill in the art will recognize that all of the support means are not necessary and various combinations of these elements can support the transparent ceramic inner panel 220 in a “floating” manner (i.e., movable manner) to provide impact absorption. The door 200 also can include additional or alternative flexible support means in combination with the illustrated examples. The present invention is not limited to the illustrated examples and other flexible support means are contemplated by the present invention. According to the exemplary embodiment, the shock absorbing support means can provide controlled movement (e.g., limited controlled movement) to absorb energy exerted on the transparent ceramic inner panel 220 and prevent breakage of the transparent ceramic inner panel 220.

[0042] An exemplary embodiment of a deflectable metal support 230, which may form a part of the inner glass shock absorbing support system, will now be described with reference to FIGS. 9A - 9D.

[0043] As shown in FIGS. 9A - 9D, the inner glass shock absorbing support system can include a support 230 formed for example by a thin, flexible metal support frame disposed

around a perimeter of a viewing area through the glass panels of the door 220. In the example, the support 230 includes a rectangular frame having a plurality of sides 230a, 230b, 230c, and 230d. The sides of the support 230 can be integrally formed or coupled together to form a frame. The exemplary embodiment is illustrated with a rectangular-shaped frame. However, the frame can have other shapes, such as a circular-shaped frame. In other embodiments, the support 230 can be formed from separate elements that are not linked together. For example, the sides 230a, 230b, 230c, and 230d can be individually mounted or suspended within the door to flexibly support areas or regions of the panel 220.

[0044] With reference again to the example support 230 illustrated in FIGS. 9A - 9D, the sides 230a, 230b, 230c, and 230d can be shaped such that a portion of the sides 230a, 230b, 230c, and 230d is capable of flexing, deflecting, or otherwise moving when a force or impact force is exerted on the support 230 to absorb or distribute the forces and prevent breakage of the transparent ceramic inner panel 220.

[0045] As shown in FIGS. 9A - 9D, a first insulation layer 234 optionally can extend around a perimeter of the support 230. The first insulation layer 234 can include an opening that corresponds to a perimeter size and shape of the support 230 such that the first insulation layer 234 fits snugly around the support 230. The first insulation layer 234 can have a uniform thickness to evenly support the underside of the transparent ceramic inner panel 220. In other embodiments, the insulation layer 234 can have an uneven thickness, for example, to provide additional support or impact absorption in particular areas, such as areas that are more highly prone to impact forces or areas that are directly supported by other shock absorbing support

means such as the support 230. As shown in FIGS. 9A and 9B, the sides 230a, 230b, 230c, and 230d can have a size and shape such that at least a portion of the first insulation layer 234 is disposed under a portion of one or more of the sides 230a, 230b, 230c, and 230d. The portion of the first insulation layer 234 can provide additional support and/or resiliency for the portion of the sides 230a, 230b, 230c, and 230d.

[0046] As shown in the example illustrated in FIGS. 9A - 9D, each of the sides 230a, 230b, 230c, and 230d can include a wall (e.g., a vertical or angled wall) on a side facing an interior of the support 230, with the first insulation layer 234 being disposed on an outside of the vertical wall. In this way, the sides 230a, 230b, 230c, and 230d of the support 230 can be configured to block the interior edges of the first insulation layer 234 from view through the viewing area of the glass panels (see e.g., V1 in FIG. 8), thereby improving the cosmetic appearance of the door.

[0047] As shown in FIG. 9C, the support 230 can be formed from a thin metal part or thin, perforated metal part such that the support 230 can flex at one or more locations to absorb impact energy. For example, the support 230 can be formed or bent in a way that permits the support to flex at one or more locations. In other examples, the support 230 can include a plurality of perforations or slots 231 disposed between connecting portions 232. In this example, the perforations are oriented in a lengthwise direction of the support, thereby enabling the support 230 to be flexible along the entire length of the support to evenly support the transparent ceramic inner panel 220. The perforations or slots 231 and connecting portions 232 can be disposed, for example, along a bend in the support 230 such that the support 230 can easily flex

or fold along the bend. By providing a thin support or a support with perforations or slots 231, the embodiments can provide an additional advantage of reducing an amount of material of the support 230, which may minimize or reduce an amount of heat absorbed by the support 230, for example, when the oven is at high temperatures such as self-cleaning temperatures. In this way, the exemplary support 230 can minimize an effect of the support 230 acting like a heat sink, and thereby assist with keeping the exterior surface of the door cool.

[0048] As schematically illustrated in FIG. 9D, the support 230 can include a plurality of portions configured to be flexible or movable to absorb a force exerted on the transparent ceramic inner panel 220. The support 230 can be disposed between the transparent ceramic inner panel 220 and a middle glass panel 250 of the door. The insulation layer 234 can be disposed such that at least a part of the layer 234 is disposed under a portion of the support 230. In operation, when a force F is exerted on the transparent ceramic inner panel 220, for example in a direction shown by the arrows in FIG. 9D, the support 230 can flex or move in the direction of the force F , thereby permitting the transparent ceramic inner panel 220 to move downward in the direction of the force F and absorbing the impact on the transparent ceramic inner panel 220 to prevent breaking of the transparent ceramic inner panel 220. The support 230 and/or the surface of the transparent ceramic inner panel 220 can push against the first insulation layer 234 to compress the first insulation layer 234, thereby further absorbing the impact energy on the transparent ceramic inner panel 220. The support 230 and/or the first insulation layer 234 can function as a spring system or a spring/damper system for absorbing the impact forces on the transparent ceramic inner panel 220.

[0049] One of ordinary skill in the art will recognize that the support 230 can be configured in a variety of ways and can have a variety of sizes and shapes configured to provide impact absorption and/or to cooperate with the insulation layer 234. The support 230 can include linear portions or curved portions that permit the support 230 to flex. The support can include a plurality of portions configured to flex or deflect under the influence of one or more predetermined amounts of force. For example, an outer portion of the support 230 may be configured to flex under less force than an inner or middle portion of the support. In other embodiments, an outer portion of the support 230 may be configured to flex under greater force than an inner or middle portion of the support. The support 230 can include a plurality of different portions or flexible areas and is not limited to the example arrangement illustrated in FIGS. 9A - 9D. The support 230 can have a uniform thickness or a plurality of portions having a different thickness, for example, to facilitate flexing or deflecting upon the application of different amounts of force. The support 230 can include a plurality of perforations, slots, or cutouts to reduce an amount of material, and thereby, minimize or reduce an effect of the support 230 acting as a heat sink. In other embodiments, the support 230 can be formed of a thin metal to minimize a heat sink effect such that perforations, slots, or cutouts are not necessary. The support 230 can be coated with a reflective material or have a reflective color that minimizes or prevents the support 230 from absorbing heat, thereby assisting with keeping the external surface of the door cool. The support 230 can be formed from a metal, such as 300 annealed stainless steel. The support 230 can include one or more corresponding slots or other features for engaging one or more hangers or other components of the door to suspend the support 230 in

position. The support 230 can be configured to have a portion that blocks the interior edges of the first insulation layer 234 from view through the viewing area of the glass panels (see e.g., V1 in FIG. 8), thereby improving the aesthetic appearance of the door. The support 230 can be selected from a material that discolours evenly when heated, thereby improving the cosmetic appearance of the door, for example, during a self-cleaning process when the elements of the door are subjected to heating. In other embodiments, the insulation can be disposed on an opposite side of the support 230. In this case, a separate part may be provided to block the insulation 234 from view through the viewing area of the glass panels.

[0050] An exemplary embodiment of a second insulation layer and an insulation retainer 244, which may form a part of the inner glass shock absorbing support system, will now be described with reference to FIGS. 10A - 10C.

[0051] In the exemplary embodiments, the transparent ceramic inner panel 220 extends from edge to edge of the door. Therefore, a part of the transparent ceramic inner panel 220 on each side will be disposed over each hinge assembly 240 (compare FIGS. 6A and 8). As shown in FIG. 10A, the inner glass shock absorbing support system can include a second insulation layer 242 disposed between a surface of the hinge assembly 240 and the transparent ceramic inner panel 220 to provide impact absorption and also to prevent or minimize a likelihood of the transparent ceramic inner panel 220 contacting the firm or rigid surface of the hinge assembly 240 when the transparent ceramic inner panel 220 is subjected to impact forces. The second insulation layer 242 can have a uniform thickness along the length of the hinge assembly 240

such that it evenly supports the panel 220 and can be configured to compress under the force of the transparent ceramic inner panel 220.

[0052] The second insulation layer 242 can be secured to the surface of the hinge assembly 240 to prevent the layer 242 from moving, sliding, or being displaced by the motion of the door during opening or closing or by the force of the transparent ceramic inner panel 220 pressing against the layer 242. In one embodiment, the second insulation layer 242 can be glued to the surface of the hinge assembly 240. One of ordinary skill in the art will recognize that adhesives or glue may emit undesirable or unpleasant odors during heating to high temperature, such as a temperature associated with a self-cleaning process. As shown in FIG. 10A, another embodiment eliminates the need to use adhesives or glue by providing one or more insulation retainers 244 disposed on the hinge assembly 240 to secure the second insulation layer 242 in place. The second insulation layer 242 can be secured between the insulation retainer 244 and a surface of the hinge assembly 240. The insulation retainers 244 can be configured to flex or deflect, or to be movable or slidable, in the direction shown by the arrows in FIG. 10A such that the transparent ceramic inner panel 220 does not contact a firm surface that may cause the panel 220 to break. The second insulation layer 242 correspondingly can compress upon the exertion of forces by the transparent ceramic inner panel 220 on the insulation layer 242 and/or the insulation retainer 244.

[0053] As shown in FIGS. 10B and 10C, the insulation retainer 244 can include a body having a top portion 502 that is flush with an underside of the transparent ceramic inner panel 220 and an upper surface of the insulation layer 242 and the hinge assembly 240. The insulation

retainer 244 can include a pair of opposing leg portions 504 that extend along the sides of the hinge assembly 240. A length of each of the leg portions 504 can be greater than a height of the side of the hinge assembly 240 such that an end of each leg portion 504 extends past a bottom of the hinge assembly 240. The end of each leg portion 504 can include a free end 506 that wraps around at least a portion of the wall of the hinge assembly 240 to prevent the retainer 244 from dislodging from the hinge assembly 240. For example, the free end 506 illustrated in FIGS. 10B and 10C can have a substantially U-shaped portion that extends up along an interior of the side of the hinge assembly 240. In other embodiments, the free end 506 can be an L-shaped portion, V-shaped portion, etc. Alternatively, the free end 506 can be pressure fit on an outside surface of the hinge assembly 240 or engage a slot or groove in the hinge assembly 240, for example, if the retainer 244 is configured to move up or down upon impact by the transparent ceramic inner panel 220. The retainer 244 can include one or more perforations, cutouts, or slots (e.g., 503, 505) for providing areas of the retainer 244 that easily flex or move when a force is applied to the retainer 244. The perforations, cutouts, or slots (e.g., 503, 505) also can reduce an amount of material of the retainer 244, thereby reducing an effect of the retainer 244 acting as a heat sink during heating of the oven chamber, such as during a self-cleaning process. In yet another embodiment, the retainer 244 can be configured to be fixed with respect to the hinge assembly 240 and include a flexible or deflectable top portion 502 to absorb an impact or force exerted by the transparent ceramic inner panel 220 and to prevent the transparent ceramic inner panel 220 from contacting a firm surface.

[0054] As shown in FIG. 10C, the second insulation layer 242 can be disposed between the top portion 502 of the hinge retainer 244 and the upper surface of the hinge assembly 240. In operation, when a force F is applied, the transparent ceramic inner panel 220 moves downward against the retainer 244 and the second insulation layer 242. The retainer 244 can be configured to move downward along with the transparent ceramic inner panel 220 and compress the second insulation layer 242 toward the surface of the hinge assembly 240, thereby absorbing the force F exerted on the panel 220 and preventing the panel 220 from contacting the rigid surface of the hinge assembly 240. As shown in FIG. 10C, the free ends 506 of the retainer 244 can be configured to extend past the ends of the hinge assembly 240 such that a space S1 is present. The space S1 can provide sufficient clearance for the retainer 244 to move in the direction of the force F toward the hinge assembly 240 and back to an original position due to the resiliency of the second insulation layer 242. The space S1 also can permit the retainer 244 to be easily and simply installed over the second insulation layer 242 during assembly, thereby reducing manufacturing costs and time.

[0055] With reference to FIGS. 11 and 12, an exemplary embodiment of a top reflector 270 and a lower retainer 252, each of which may form a part of the inner glass shock absorbing support system and/or a part of the middle glass mounting system, will now be described.

[0056] FIG. 11 shows the partial door assembly without the first insulation layer, the second insulation layer, and the insulation retainers such that the middle glass panel 250 is visible. FIG. 12 further shows the partial door assembly without the flexible support 230. As shown in FIG. 11, the door 200 can include a top reflector 270 that extends across a top portion

of the door and may reflect heat, couple the hinge assemblies 240 to each other, and hide the first insulation layer (234 in FIG. 8). The top reflector 270 can include one or more hooks, tabs, or hangers 272 (e.g., “wreath hangers”) for engaging one or more corresponding slots (e.g., 231 in FIG. 9C) formed in the deflectable metal support 230. The hooks 272 can be integrally formed with the top reflector 270 or separate from the top reflector 270. As shown in FIG. 11, the hooks 272 of the top reflector 270 can be used to suspend the deflectable metal support 230 in the door assembly. The top reflector 270 can reflect heat (e.g., infrared (IR) heat) at the top of the door (which generally is the part of the door that is exposed to the most oven heat) back towards the oven cavity. As shown in FIGS. 11 and 12, the top reflector 270 can include fixation points that can be coupled to a top end of each hinge assembly 240 to stabilize and fix a position and spacing of the hinge assemblies 240. The top reflector 270 can include a flange 274 or other part that blocks a view of the first insulation layer (234 in FIG. 8) from being visible when viewed through the vents (203 in FIG. 6A) the top surface 202c of the door 200. The top reflector 270 also can serve as an upper stop for the first insulation layer (234 in FIG. 8) to prevent the insulation layer from drifting upward out of place. The top reflector 270 can include one or more openings or slots 275 for engaging a wing, tab, clip or other fastening means on the left-hand and right-hand brackets (280 shown in FIGS. 14 - 15D) for coupling the left-hand and right-hand brackets to the top reflector 270.

[0057] With reference again to FIGS. 11 and 12, the door 200 can include a lower retainer 252. The lower retainer 252 can be coupled to left-hand and right-hand brackets (280 shown in FIGS. 14 - 15D) to stabilize and fix the left-hand and right-hand brackets with respect

to each other. The lower retainer 252 can include one or more integral or separately formed hangers 236 (e.g., “wreath hangers”) having hooks 236a for engaging one or more corresponding slots (e.g., 231 in FIG. 9C) formed in a lower side of the deflectable metal support 230. As shown in FIG. 11, the hooks 236a can be used to suspend the deflectable metal support 230 in position in the door assembly. In this way, the lower retainer 252 may form a part of the inner glass shock absorbing support system.

[0058] The lower retainer 252 can secure the middle glass in two dimensions, such as up-down and forward-back. The lower retainer 252 can serve as a lower stop for the first insulation layer (234 in FIG. 8) to prevent the middle glass panel 250 and the insulation layer from drifting downward out of place. The lower retainer 252 also can include a flange, wall, or other part that blocks a view of the first insulation layer (234 in FIG. 8) from being visible when viewed through the bottom surface of the door 200.

[0059] With reference to FIG. 13, an exemplary embodiment of a lower retainer 252 can include a generally Z-shaped retainer having a base portion 520 having a plurality of first fastening means for coupling the lower retainer 252 to the door assembly. In the example, the first fastening means can include openings 529 for receiving threaded studs or the like for coupling the lower retainer 252 to the door assembly. The base portion 520 also can include a plurality of second fastening means, such as openings 527, for receiving one or more screws or the like for coupling the lower retainer 252 to the left-hand and right-hand brackets (280 shown in FIGS. 14 - 15D), thereby stabilizing and fixing the left-hand and right-hand brackets with respect to each other. The lower retainer 252 can include a Z-shaped portion formed by walls

522, 524, and 526. The Z-shaped portion can serve to fix a lower end of the middle glass panel 250 in place and prevent the middle glass panel 250 and the insulation layer from drifting downward out of place.

[0060] With reference again to FIG. 13, the lower retainer 252 can include one or more slots 525 or other means for coupling one or more hangers 236 (e.g., “wreath hangers”) having hooks 236a for engaging one or more corresponding slots (e.g., 231 in FIG. 9C) formed in a lower side of the deflectable metal support 230. The hooks 236a can be used to suspend the deflectable metal support 230 in position in the door assembly. In this way, the lower retainer 252 may form a part of the inner glass shock absorbing support system.

[0061] With reference again to FIGS. 12 and 13, and with further reference to FIGS. 14 - 15D, an exemplary embodiment of a middle glass mounting system will now be described. The middle glass mounting system can be configured to secure the middle door glass panel with a predetermined spacing from the inner glass panel to provide an air gap that ensures sufficient thermal insulation between the inner glass panel and the middle glass panel. The middle glass mounting system can be configured to prevent the middle glass panel, the insulation, and the hinge assemblies from shifting or moving relative to each other and relative to the door skin. The middle glass mounting system can be configured to minimize a thermal mass in the retention system in order to assist with reducing external door surface temperatures. The middle glass mounting system can reflect heat at the top of the door away from the top of the door and back towards the oven cavity. The middle glass mounting system also can secure the insulation-

hiding flexible frame for supporting the inner glass panel and provide additional means for blocking the insulation from view from above or below the door.

[0062] FIG. 12 shows the middle glass panel 250 supported by a middle glass mounting system. The middle glass panel 250 can include, for example, soda lime glass with a tin oxide coating or the like. The middle glass mounting system can include the lower retainer 252 (shown in detail in FIG. 13), which can secure the middle glass in two dimensions. As explained, the lower retainer 252 can prevent a lower end of the middle glass panel 250 from drifting downward out of place and from moving in a rearward direction away from the door skin. The top reflector 270 extends across a top portion of the door and can prevent an upper end of the middle glass panel 250 from drifting out of place and moving in a rearward direction away from the door skin.

[0063] With reference to Figure 14, the door assembly is illustrated without the middle glass panel 250 such that the components of the middle glass mounting system are visible. The middle glass mounting system further can include left-hand and right-hand brackets 280 that support the middle glass panel 250 from a front side of the door. The left-hand and right-hand brackets 280 can secure the middle glass panel 250 in two dimensions, such as in a side-to-side direction and in the upward direction. As explained, the left-hand and right-hand brackets 280 can cooperate with the lower retainer 252 and the upper reflector 270. The left-hand and right-hand brackets 280 can be secured in position and spacing with respect to each other at a lower end by the lower retainer 252, which may be coupled (for example, at 527) to a lower end of

each of the brackets 280, and at a top end by a top reflector 270, which may be coupled (for example at 275) to each of the brackets 280.

[0064] With reference to FIGS. 15A - 15D, an exemplary embodiment of left-hand and right-hand brackets 280 will now be described. The left-hand and right-hand brackets 280 can be mirror images of each other and extend along each side of the middle glass panel. The bracket 280 can include a base portion formed, for example, by a Z-shaped portion 550a, 550b, 550c, and 550d. A base portion 550a of the Z-shaped portion can include a plurality of openings 553 for engaging, for example, a plurality of threaded studs or the like for coupling the base portion to the door assembly, such as to the door skin (202a in FIG. 14). The Z-shaped portion 550a, 550b, 550c, and 550d can be configured to cooperate with corresponding Z-shaped mounting brackets of the outer glass panel, which will be described with reference to FIG. 18.

[0065] With reference again to FIGS. 15A - 15D, the bracket 280 can include support surfaces 552 and 554 that support the middle glass panel 250 (shown by dashed lines in FIG. 15B) from a front side of the door. The bracket 280 can include a clip, tab, or projection 556 or the like at an upper end and that engages an end of the middle glass panel 250 which keep the glass from moving rearward towards the inner glass panel and upwards toward a top of the door. The bracket 280 can include one or more "fingers" or tabs/projections 558, 560 disposed on a side of the bracket 280 for controlling side-to-side movement of the middle glass panel 250. As shown in FIG. 15A, the left-hand bracket 280 has the tabs 558, 560 on the left-hand side to engage a left-hand edge of the middle glass panel 250. As shown in FIG. 15C, the right-hand bracket 280 has the tabs 558, 560 on the right-hand side to engage a right-hand edge of the

middle glass panel 250. In this manner, the left-hand and right-hand brackets 280 can cooperate to secure the middle glass panel 250 from moving in a side-to-side direction. The bracket 280 can include a cutout 551 or the like, such as perforations, slots, notches, etc., that reduce or minimize a thermal mass of the bracket 280, thereby reducing or minimizing an effect of the bracket 280 acting as a heat sink and helping to reduce external door surface temperatures. The brackets 280 can be formed from light-weight materials to minimize or reduce the sprung weight of door. The light-weight materials, which also may have a reflective or semi-reflective surface, also may reduce heat absorption, thereby further minimizing or reducing external door skin surface temperatures.

[0066] As explained above, the left-hand and right-hand brackets 280 can cooperate with the lower retainer 252 and the upper reflector 270 to increase the stiffness of the door assembly. More particularly, the left-hand and right-hand brackets 280 can be secured in position and spacing with respect to each other at a lower end by the lower retainer 252, which may be coupled (for example, at 527) to an opening 555 of each of the brackets 280, and at a top end by a top reflector 270, which may be coupled (for example at 275) to each of the brackets 280 by the wing/tab 556.

[0067] With reference to FIGS. 16 - 22B, an exemplary embodiment of an outer glass mounting system will now be described. The mounting system for the outer glass panel can secure the cosmetic outer glass panel tightly against the stainless steel door skin such that no gaps are visible between the outer glass panel and the door skin at a top, bottom, left, or right of the glass panel 298. The mounting system for the outer glass panel can ensure laminar air flow

through the door from bottom to top to ensure proper cooling of the door components during high temperature baking or self-cleaning cycles. The mounting system for the outer glass panel can be configured to minimize or eliminate any visible marks or fasteners on the exterior of the door skin. The outer glass panel can be formed, for example, from soda lime glass with low iron content.

[0068] With reference to FIG. 16, an exemplary embodiment of the oven door can include one or more air guides or ramps, such as an upper air guide or ramp 260 and a lower air guide or ramp 262, which may promote laminar air flow between the middle glass panel (250, not shown in FIG. 16) and the outer glass panel 298. The upper air guide 260 and lower air guide 262 can be disposed between the brackets 280, as shown in FIG. 16, and may cooperate with the fastening means of the outer glass panel 298.

[0069] FIGS. 17A and 17B illustrate exemplary embodiments of an upper air guide or ramp 260 and a lower air guide or ramp 262, respectively. With reference to FIG. 17A, the upper air guide or ramp 260 can include a planar airflow surface 570 that is positioned at an angle with respect to the outer glass panel and the middle glass panel when the ramp 260 is installed by a riser portion 572. The ramp 260 can include another angled portion or lip 574 for guiding or deflecting heated air flowing upward from the surface of the outer glass panel to the planar airflow surface 570. The ramp 260 can include a plurality of openings 575 for engaging, for example, the fastening means of the outer glass panel 298, such as one or more threaded studs (described with reference to FIG. 19C).

[0070] With reference to FIG. 17B, the lower air guide or ramp 262 can include a planar airflow surface 580 that is positioned at an angle with respect to the outer glass panel and the middle glass panel when the ramp 262 is installed by a riser portion 582. The ramp 262 can include a plurality of openings 583 for engaging, for example, the fastening means of the outer glass panel 298, such as one or more threaded studs (described with reference to FIG. 19C). The upper air guide 260 and the lower air guide 262 can ensure laminar air flow through the door from bottom to top to ensure proper cooling of the door components during high temperature baking or self-cleaning cycles. In this way, the outer glass panel mounting system can minimize or eliminate turbulent air flow through door.

[0071] With reference again to FIG. 18, the outer glass panel 298 can be secured to the door skin by brackets. FIG. 18 shows upper and lower brackets 282. The outer glass mounting system also can include left-hand and right-hand side brackets (Z-brackets), which are not visible in FIG. 18. With reference to FIGS. 19A - 19C, the brackets 282 may be Z-brackets including with designed-in interference to press the outer glass panel 298 firmly against the door skin by holding the panel 298 at the edges, for example, in a manner similar to a “rabbet” on a back of a picture frame. The bracket 282 can include a Z-shaped cross-section formed by portions 590, 592, 594, and 596. The portion 590 can be a base portion having a plurality of openings 591 for engaging one or more fasteners, such as threaded studs 604 in FIG. 19C (and described with reference to FIGS. 22A and 22B) to secure the bracket 282 to the door skin.

[0072] As shown in FIG. 19C, the openings 575 in the air ramp 260 can be configured to align with the openings 591 of the bracket 282 such that the bracket 282 and the air ramp 260

engage the same threaded studs 604. A nut (not shown in FIG. 19C) can be threaded onto the stud 604 to secure the ramp 260 and the bracket 282 in place and providing a tight, gap-free fit of outer glass panel 298 to door skin.

[0073] With reference to FIGS. 20 - 22B, a plurality of strips 284 (e.g., metal pin strips) can be coupled to the door skin 202a for coupling the brackets (282 in FIGS. 18 - 19C) to the door skin 202a without marking an exterior side of the door skin 202a. FIG. 20 shows the outer glass panel 298 in place, and FIG. 21 shows the door skin 202a without the outer glass panel 298. With reference to FIGS. 22A and 22B, an exemplary strip 284 can include a plate portion 602 having a plurality of studs 604, such as threaded studs for receiving a nut in threaded engagement. In other embodiments, the studs 604 can include other fastening means, such as an internal bore for receiving a screw or bolt, a notch or groove for receiving a retainer clip or o-ring, etc.

[0074] As shown in FIG. 22B, an exemplary embodiment of the strip 284 can be formed by inserting a plurality of threaded studs 604 having heads 606 through openings formed in the plate portion 602. The studs 604 can be coupled to the plate portion 602 by means, such as welding, or formed by stamping a shape into the plate portion 602.

[0075] With reference again to FIGS. 19C and 20, in operation, the cosmetic glass outer panel 298 ("skin" or "outer" glass) can be placed centered inside the door skin 202a at a correct position. The strips 284 having the threaded studs 604 can be secured to the inside of the door skin 202a, around a perimeter of the outer glass panel 298 using, for example, adhesive tape. In other embodiments, the strips 284 can be secured to the door skin 202a using other coupling

means, such as adhesive paste, welding, soldering, etc. If an adhesive is used, then the door can be configured such that a temperature at the door skin where the tape is attached to the door skin 202a does not exceed an allowable temperatures for the adhesive. In this way, the strips 284 can be coupled to the interior surface of the door skin 202a without penetrating or marking an exterior of the door skin 202a, thereby maintaining a desired cosmetic appearance of the door skin 202a.

[0076] According to the exemplary embodiments, the outer glass panel mounting system can minimize or eliminate turbulent air flow through door and cosmetic blemishes on the exterior of the door skin, while providing a tight, gap-free fit of outer glass panel to door skin that remains securely attached to the door skin through a full operating temperature range of the appliance, including a self-cleaning process. The outer glass panel mounting system also can provide the ability to remove the outer glass panel for service without breaking/reapplying adhesive.

[0077] As explained, the full transparent ceramic inner panel 220 extends across the width and height of the inner surface of the door, and therefore, the door does not include a porcelain liner or plunger having cutouts for the oven latch to engage in order to lock the range door during a self-cleaning process. With reference to FIGS. 23A - 24B, an exemplary embodiment of a latch system, which can be coupled to a door having a full glass inner panel, will now be described.

[0078] As shown in FIG. 23A, a latch retainer 620 can include a body/plate portion 622 having an opening 623 for receiving and engaging a corresponding a oven lock (not shown in

FIG. 23A). The latch retainer 620 can include a mounting portion for coupling the latch retainer 620 to an inner surface of the door skin. In this example, the latch retainer 620 can include a plurality of flanges for stabilizing the latch retainer 620 against the door skin surface (202c in FIG. 23B) and coupling the latch retainer 620 to the door skin surface (202c in FIG. 23B). For example, the latch retainer 620 can include one or more flanges 624 projecting substantially perpendicularly from one or both sides of the plate portion 622, each flange 624 having an opening 625 for fastening the latch retainer 620 to a part of the door skin surface (202c in FIG. 23B) such that the latch retainer 620 projects substantially perpendicularly from the door skin surface (202c in FIG. 23B). In other embodiments, the latch retainer 620 can be configured to project at an angle from the door skin surface (202c in FIG. 23B). The latch retainer 620 can include a flange 626 projecting substantially perpendicularly from one or both sides of the plate portion 622 for stabilizing the latch retainer 620 against the door skin surface (202c in FIG. 23B). In other embodiments, the flange 626 can be configured to position the latch retainer 620 at an angle from the door skin surface (202c in FIG. 23B). The flanges 624 and flange 626 can be disposed in a same plane and on opposite sides of the plate portion 622.

[0079] With reference to FIGS. 23B - 24B, the latch retainer 620 can be coupled to an inner surface of the door skin surface (e.g., top surface 202c) using fasteners, such as threaded screws 628. The top surface 202c can include one or more mounting surfaces 630 (shown in FIGS. 23B and 23C) formed between the slots 203 to provide a stable location for mounting the latch retainer 620. As shown in FIG. 24B, the door skin can include a latch cover 216 projecting downward from the upper surface 202c of the door and disposed in a plane of the inner glass

panel 220 (e.g. corresponding to the latch opening 228 of the inner glass panel 220 in FIG. 7).

The latch cover 216 can include a lock guide opening 219 for receiving and guiding a door lock to the opening 623 of the latch retainer 620, which may be disposed in an interior of the door and adjacent to the latch cover 216. The latch cover 216 can be integrally formed with the door skin or a separate element attached to the door skin. The latch retainer 620 can be coupled to an inner surface of the door skin (e.g., top surface 202c) using fasteners, such as threaded screws 628 or the like. As shown in FIGS. 24A and 24B, the guide opening 219 of the latch cover 216 can receive and guide a latch/lock 702 of a lock assembly 700 to the opening 623 of the latch retainer 620. The latch 702 then can engage the latch retainer 620 through the opening 623 to secure the door in a locked position, for example, for performing a self-cleaning process.

[0080] The exemplary latch retainer 620 can provide means for locking a door having a full glass inner panel and for maintaining a spacing between the door latch 702 and the door skin while also providing a sufficient amount of strength needed to securely latch/lock the door in a closed position for a self-cleaning cycle. In this way, the exemplary embodiments can provide a latch system for a door without a conventional plunger or frame and instead having an inner surface formed by a non-structural full glass inner panel. The exemplary latch system can be formed easily and with minimal expense and can also be easily repaired or replaced.

[0081] As explained, the full transparent ceramic inner panel 220 extends across the width and height of the inner surface of the door, and therefore, the door does not include a porcelain liner or plunger, which conventionally may be used to mount the door hinge assemblies. With reference to FIGS. 25A - 25C, an exemplary embodiment of a hinge retainer

system, which can be used to couple a hinge assembly to a door skin of a door having a full glass inner panel, will now be described.

[0082] A lower end of a hinge assembly (240 in FIG. 8) can be coupled to the bottom end of the door skin (as shown in FIG. 6D). With reference to FIGS. 25A - 25C, an upper end of a hinge assembly (240 in FIG. 25C) can be coupled to the door skin 202a with a hinge retainer 800. As shown in FIGS. 25A and 25B, exemplary embodiments of a hinge retainer 800 can include a body/plate portion 802 having one or more openings 803 for receiving and engaging one or more fasteners (e.g., 804, 808). The hinge retainer 800 can include a side wall 806 extending from the plate portion 802. The side wall 806 can extend perpendicular to the plate portion 802, as shown in FIG. 25A, or at an angle to the plate portion 802, as shown in FIG. 25B. The hinge retainer 800 can include a mounting flange 810 having, for example, an opening 811 for receiving a fastener (not shown in FIGS. 25A and 25B; 812 in FIG. 25C) to couple an upper end of a hinge assembly (240 in FIG. 25C) to the hinge retainer 800. The side wall 806 can include one or more cutouts, slots, or perforations 807 for minimizing a thermal mass of the hinge retainer 800 in order to assist with reducing external door surface temperatures. As shown in FIGS. 25A and 25B, the hinge retainer 800 can be coupled to the door skin 202a in a corner region of the door, for example, adjacent to the side surface 202b and the top surface 202c, which includes the lip 205.

[0083] FIG. 25C shows a partial cutaway view of an upper region of the door showing an exemplary arrangement of the door handle 206, door skin 202a, and top surface 202c. The lip 205 and the latch cover 216 of the top surface 202c are visible in FIG. 25C, along with the latch

retainer 620 and the fastener (threaded screw 628) coupling the latch retainer 620 to the top surface 202c. FIG. 25C also shows the arrangement of an upper end of each of the metal strip 284, the bracket 280, and the hinge assembly 240. The upper air guide 260 also is visible in FIG. 25C.

[0084] As shown in FIG. 25C, the hinge retainer 800 can couple an upper end of the hinge assembly 240 to the door skin 202a in a corner region of the door, for example, adjacent to the top surface 202c. The fastener 804 can be configured to engage an opening (803 in FIGS. 25A and 25B) in the body/plate portion 802 of the hinge retainer 800 and extend through a corresponding opening in the door skin 202a that is disposed adjacent to the door endcaps 206 such that the fastener 804 couples the body/plate portion 802 of the hinge retainer 800 and the door endcap 206 to the door skin 202a, also piercing the door handle 204 and thus locking the door handle 204 into place between the two door endcaps 206. The fastener 804 can be concealed from view by the door endcap 206 when installed. The fastener 808 also can be configured to engage another opening (803 in FIGS. 25A and 25B) in the body/plate portion 802 of the hinge retainer 800 and extend through a corresponding opening in the door skin 202a that is concealed from view by the door endcap 206 when installed. The side wall 806 extends from the body/plate portion 802, on one end, to the mounting flange 810, on the other end. The mounting flange 810 can be coupled to the upper portion of the hinge assembly 240 by one or more fasteners 812. According to the exemplary embodiments illustrated in FIGS. 25A - 25C, the hinge retainer 800 can be used to couple the upper end of the hinge assembly 240 to the door

skin 202a of a door having a full glass inner panel (i.e., without a “plunger”) without any markings, fasteners, etc. being visible from an outside of the door.

[0085] The present invention has been described herein in terms of several preferred embodiments. However, modifications and additions to these embodiments will become apparent to those of ordinary skill in the art upon a reading of the foregoing description. It is intended that all such modifications and additions comprise a part of the present invention to the extent that they fall within the scope of the several claims appended hereto.

CLAIMS:

1. A household cooking appliance comprising:
 - a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening; and
 - a door covering the opening and moveable about a hinge between an open position and a closed position, the door including:
 - an outer door skin comprising:
 - a front surface including an outer glass panel;
 - a first side surface;
 - a second side surface opposed to the first side surface;
 - an upper surface; and
 - a lower surface opposed to the upper surface;
 - a full glass inner panel forming a rear surface of the door and extending substantially from an edge of the first side surface to an edge of the second side surface and from an edge of the upper surface to an edge of the lower surface, the full glass inner panel having a front surface that faces toward a front of the door and a rear surface forming the rear surface of the door, wherein a portion of the rear surface of the full glass inner panel abuts the seal when the door is in a closed position; and
 - shock-absorbing means for resiliently and movably supporting the front surface of the full glass inner panel at a location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, wherein the shock-absorbing means resiliently and movably support the front surface of the full glass inner panel such that the edges of the front surface of the full glass inner panel are maintained in a spaced position from firm surfaces of components of the door when the full glass inner panel moves in a direction

toward the front of the door, wherein the shock-absorbing means absorb and distribute a shock or an impact on the full glass inner panel and prevent the front surface of the full glass inner panel from contacting the firm surfaces of the components of the door when the full glass inner panel moves in the direction toward the front of the door, and wherein the shock-absorbing means minimize heat transfer from the full glass inner panel to other heat conducting components of the door.

2. The household cooking appliance of claim 1, wherein the shock-absorbing means include a flexible metal part resiliently and movably supporting the front surface of the full glass inner panel at the location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, thereby maintaining a spaced position of the edges of the front surface of the full glass inner panel with respect to the edges of the first side surface, the second side surface, the upper surface, and the lower surface of the outer door skin when the full glass inner panel moves in the direction toward the front of the door.

3. The household cooking appliance of claim 2, wherein the shock-absorbing means includes an insulation layer resiliently and movably supporting the front surface of the full glass inner panel with respect to the edges of the first side surface, the second side surface, the upper surface, and the lower surface of the outer door skin.

4. The household cooking appliance of claim 2, wherein the shock-absorbing means further includes an insulation layer cooperating with the flexible metal part to resiliently and movably support the front surface of the full glass inner panel with respect to the edges of the first side surface, the second side surface, the upper surface, and the lower surface of the outer door skin.

5. The household cooking appliance of claim 1, wherein the door further comprises:

means for movably retaining the rear surface of the full glass inner panel in a position adjacent to the edges of the first side surface, the second side surface, the upper

surface, and the lower surface of the outer door skin without penetrating through the full glass inner panel.

6. The household cooking appliance of claim 5, wherein the means for movably retaining includes:

a retaining lip extending across an edge of the upper surface of the door and retaining a top edge of the rear surface of the full glass inner panel.

7. The household cooking appliance of claim 6, wherein the means for movably retaining further includes:

a hinge cover disposed adjacent to the hinge of the door, the hinge cover retaining a corner area of the rear surface of the full glass inner panel.

8. The household cooking appliance of claim 7, wherein a perimeter of the full glass inner panel includes a cutout corresponding to the hinge and the hinge cover, wherein the hinge cover engages an edge of the rear surface of the full glass inner panel at the cutout to retain the full glass inner panel.

9. The household cooking appliance of claim 1, wherein a perimeter of the full glass inner panel includes a first cutout at a first location corresponding to the hinge of the door.

10. The household cooking appliance of claim 9, wherein a perimeter of the full glass inner panel includes a second cutout at a second location corresponding to a self-clean latch of the door, the self-clean latch configured to lock the door in the closed position during a self-cleaning process.

11. The household cooking appliance of claim 1, wherein the door further comprises:

a middle glass panel disposed between the outer glass panel and the front surface of the full glass inner panel.

12. The household cooking appliance of claim 1, wherein the full glass inner panel includes a transparent ceramic inner panel.

13. The household cooking appliance of claim 11, wherein the shock-absorbing means is disposed between the location of the front surface of the full glass inner panel and the middle glass panel.

14. The household cooking appliance of claim 13, wherein the shock-absorbing means includes a flexible metal part disposed between the location of the front surface of the full glass inner panel and the middle glass panel, the flexible metal part resiliently and movably supporting the front surface of the full glass inner panel with respect to the edges of the first side surface, the second side surface, the upper surface, and the lower surface of the outer door skin.

15. The household cooking appliance of claim 14, wherein the shock-absorbing means includes a first insulation layer disposed between the front surface of the full glass inner panel and the middle glass panel, the first insulation layer surrounding a perimeter of the flexible metal part.

16. The household cooking appliance of claim 15, wherein a part of the first insulation layer is disposed between the flexible metal part and the middle glass panel.

17. The household cooking appliance of claim 16, wherein the door further comprises:

a hinge assembly disposed between the front surface of the full glass inner panel and the outer surface of the door skin; and

a second insulation layer disposed between the full glass inner panel and the hinge assembly.

18. The household cooking appliance of claim 17, wherein the door further comprises:

deflectable insulation retaining means for moveably securing the second insulation layer to the hinge assembly between the front surface of the full glass inner panel and the hinge assembly.

19. The household cooking appliance of claim 18, wherein the deflectable insulation retaining means includes a flexible metal retainer movable with respect to the hinge assembly in a direction normal to the front surface of the full glass inner panel.

20. The household cooking appliance of claim 14, wherein the flexible metal part is suspended between the front surface of the full glass inner panel and the middle glass panel by a hanger extending from a component of the door.

21. The household cooking appliance of claim 1, wherein the door further comprises:

means for movably retaining one or more edges of the rear surface of the full glass inner panel, in a position adjacent to one or more of the edges of the first side surface, the second side surface, the upper surface, and the lower surface of the outer door skin, without penetrating through the full glass inner panel.

22. The household cooking appliance of claim 21, wherein the means for movably retaining includes:

a retaining lip extending across an edge of the upper surface of the outer door skin facing the oven chamber, wherein a top edge of the rear surface of the full glass inner panel is retained under the retaining lip.

23. The household cooking appliance of claim 21, wherein the means for movably retaining includes:

a hinge cover coupled to the outer door skin, wherein the hinge cover retains a corner area of the rear surface of the full glass inner panel.

24. The household cooking appliance of claim 23, wherein a perimeter of the full glass inner panel includes a cutout corresponding to the hinge and the hinge cover, wherein the hinge cover engages an edge of the front surface of the full glass inner panel at the cutout to retain the full glass inner panel.

25. The household cooking appliance of claim 1, wherein the rear surface of the full glass inner panel includes a first portion and a second portion, the first portion being adjacent to a first area within the perimeter of the seal surrounding the opening and directly exposed to heating of the oven chamber, and the second portion being adjacent to a second area outside of the perimeter of the seal and being insulated from the heating of the oven chamber by the seal.

26. The household cooking appliance of claim 25, wherein the full glass inner panel includes a transparent ceramic inner panel.

27. The household cooking appliance of claim 1, wherein the shock-absorbing means resiliently and movably supports the front surface of the full glass inner panel in a plurality of directions.

28. The household cooking appliance of claim 1, wherein the shock-absorbing means resiliently and movably supports the front surface of the full glass inner panel in a side-to-side direction with respect to the door, a top-to-bottom direction with respect to the door, and a front-to-back direction with respect to the door.

29. The household cooking appliance of claim 1, wherein the shock-absorbing means includes a flexible metal part directly contacting the front surface of the full glass inner panel at the location and resiliently and movably supporting the front surface of the full glass inner panel with respect to edges of the first side surface, the second side surface, the upper surface, and the lower surface of the outer door skin.

30. The household cooking appliance of claim 1, wherein the door includes:
- a middle glass panel disposed between the outer glass panel and the front surface of the full glass inner panel,
- wherein the shock-absorbing means is disposed between the middle glass panel and the front surface of the full glass inner panel and directly contacts the front surface of the full glass inner panel at the location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, and wherein the shock-absorbing means resiliently and movably support the front surface of the full glass inner panel in a position spaced apart from the middle glass panel.
31. The household cooking appliance of claim 2, wherein the door includes:
- a middle glass panel disposed between the outer glass panel and the front surface of the full glass inner panel,
- wherein the flexible metal part is disposed between the middle glass panel and the front surface of the full glass inner panel and directly contacts the front surface of the full glass inner panel at the location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, and wherein the flexible metal part resiliently and movably supports the front surface of the full glass inner panel in a position spaced apart from the middle glass panel.
32. The household cooking appliance of claim 1, wherein the shock-absorbing means is suspended between the location of the front surface of the full glass inner panel and a middle glass panel.
33. The household cooking appliance of claim 2, wherein the flexible metal part includes one of a plurality of perforations and a plurality of slots.

34. A household cooking appliance comprising:

a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening; and

a door covering the opening and moveable about a hinge between an open position and a closed position,

the door including:

an outer door skin comprising:

a front surface including an outer glass panel;

a first side surface;

a second side surface opposed to the first side surface;

an upper surface; and

a lower surface opposed to the upper surface;

a full glass inner panel forming a rear surface of the door and extending substantially from an edge of the first side surface to an edge of the second side surface and from an edge of the upper surface to an edge of the lower surface, the full glass inner panel having a front surface that faces toward a front of the door and a rear surface forming the rear surface of the door, wherein a portion of the rear surface of the full glass inner panel abuts the seal when the door is in a closed position; and

a flexible support system that flexibly supports the front surface of the full glass inner panel, at a location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, in a resilient and movable manner and in a spaced position from components of the door when the full glass inner panel moves in a direction toward the front of the door such that the flexible support system absorbs and distributes a shock or an impact on the full glass inner panel and prevents the outer perimeter

edge of the front surface of the full glass inner panel from contacting the components of the door when the full glass inner panel moves in the direction toward the front of the door, and wherein the flexible support system minimizes heat transfer from the full glass inner panel to other heat conducting components of the door.

35. The household cooking appliance of claim 34, wherein the flexible support system is suspended between the location of the front surface of the full glass inner panel and a middle glass panel.

36. The household cooking appliance of claim 35, wherein the flexible support system includes a flexible metal part having one of a plurality of perforations and a plurality of slots.

37. A household cooking appliance comprising:

a housing having an oven chamber accessible through an opening, the opening having a seal surrounding a perimeter of the opening; and

a door covering the opening and moveable about a hinge between an open position and a closed position, wherein the door includes:

an outer door skin comprising:

a front surface including an outer glass panel;

a first side surface;

a second side surface opposed to the first side surface;

an upper surface; and

a lower surface opposed to the upper surface;

a full glass inner panel forming a rear surface of the door and extending substantially from an edge of the first side surface to an edge of the second side surface and

from an edge of the upper surface to an edge of the lower surface, the full glass inner panel having a front surface that faces toward a front of the door and a rear surface forming the rear surface of the door, wherein a portion of the rear surface of the full glass inner panel abuts the seal when the door is in a closed position; and

a flexible metal frame between the outer door skin and the front surface of the full glass inner panel that is configured to receive an insulation layer around an outer perimeter of the frame and support the front surface of the full glass inner panel, at a location of the front surface of the full glass inner panel that is spaced away from edges of the full glass inner panel, in a resilient and movable manner and in a spaced position from firm surfaces of components of the door when the full glass inner panel moves in a direction toward the front of the door such that the flexible metal frame absorbs and distributes an impact force on the full glass inner panel and prevents the front surface of the full glass inner panel from contacting the firm surfaces of the components of the door when the full glass inner panel moves in the direction toward the front of the door, and wherein the flexible metal frame minimizes heat transfer from the full glass inner panel to other heat conducting components of the door.

38. The household cooking appliance of claim 37, further comprising the insulation layer,

wherein the insulation layer and the flexible metal frame resiliently and movably support the front surface of the full glass inner panel at the location, with respect to edges of the first side surface, the second side surface, the upper surface, and the lower surface of the outer door skin.

39. The household cooking appliance of claim 38, wherein the insulation layer extends between at least a portion of a front surface of the flexible metal frame and the outer door skin.

40. The household cooking appliance of claim 37, wherein the door further comprises:

a retaining lip extending across an edge of the upper surface of the door, the retaining lip movably retaining a top edge of the rear surface of the full glass inner panel, in a position adjacent to the edge of the upper surface, without penetrating through the full glass inner panel; and a hinge cover disposed adjacent to the hinge of the door, the hinge cover retaining a corner area of the rear surface of the full glass inner panel, in a position adjacent to an edge of the lower surface and an edge of one of the first side surface and the second side surface of the outer door skin, without penetrating through the full glass inner panel.

41. The household cooking appliance of claim 37, further comprising:

an insulation retainer for retaining a second insulation layer over the hinge to support the front surface of the full glass inner panel such that the insulation retainer and the second insulation layer absorb and distribute the impact force on the full glass inner panel.

42. The household cooking appliance of claim 37, wherein the flexible metal frame is suspended between the location of the front surface of the full glass inner panel and a middle glass panel.

43. The household cooking appliance of claim 42, wherein the flexible metal frame includes one of a plurality of perforations and a plurality of slots.

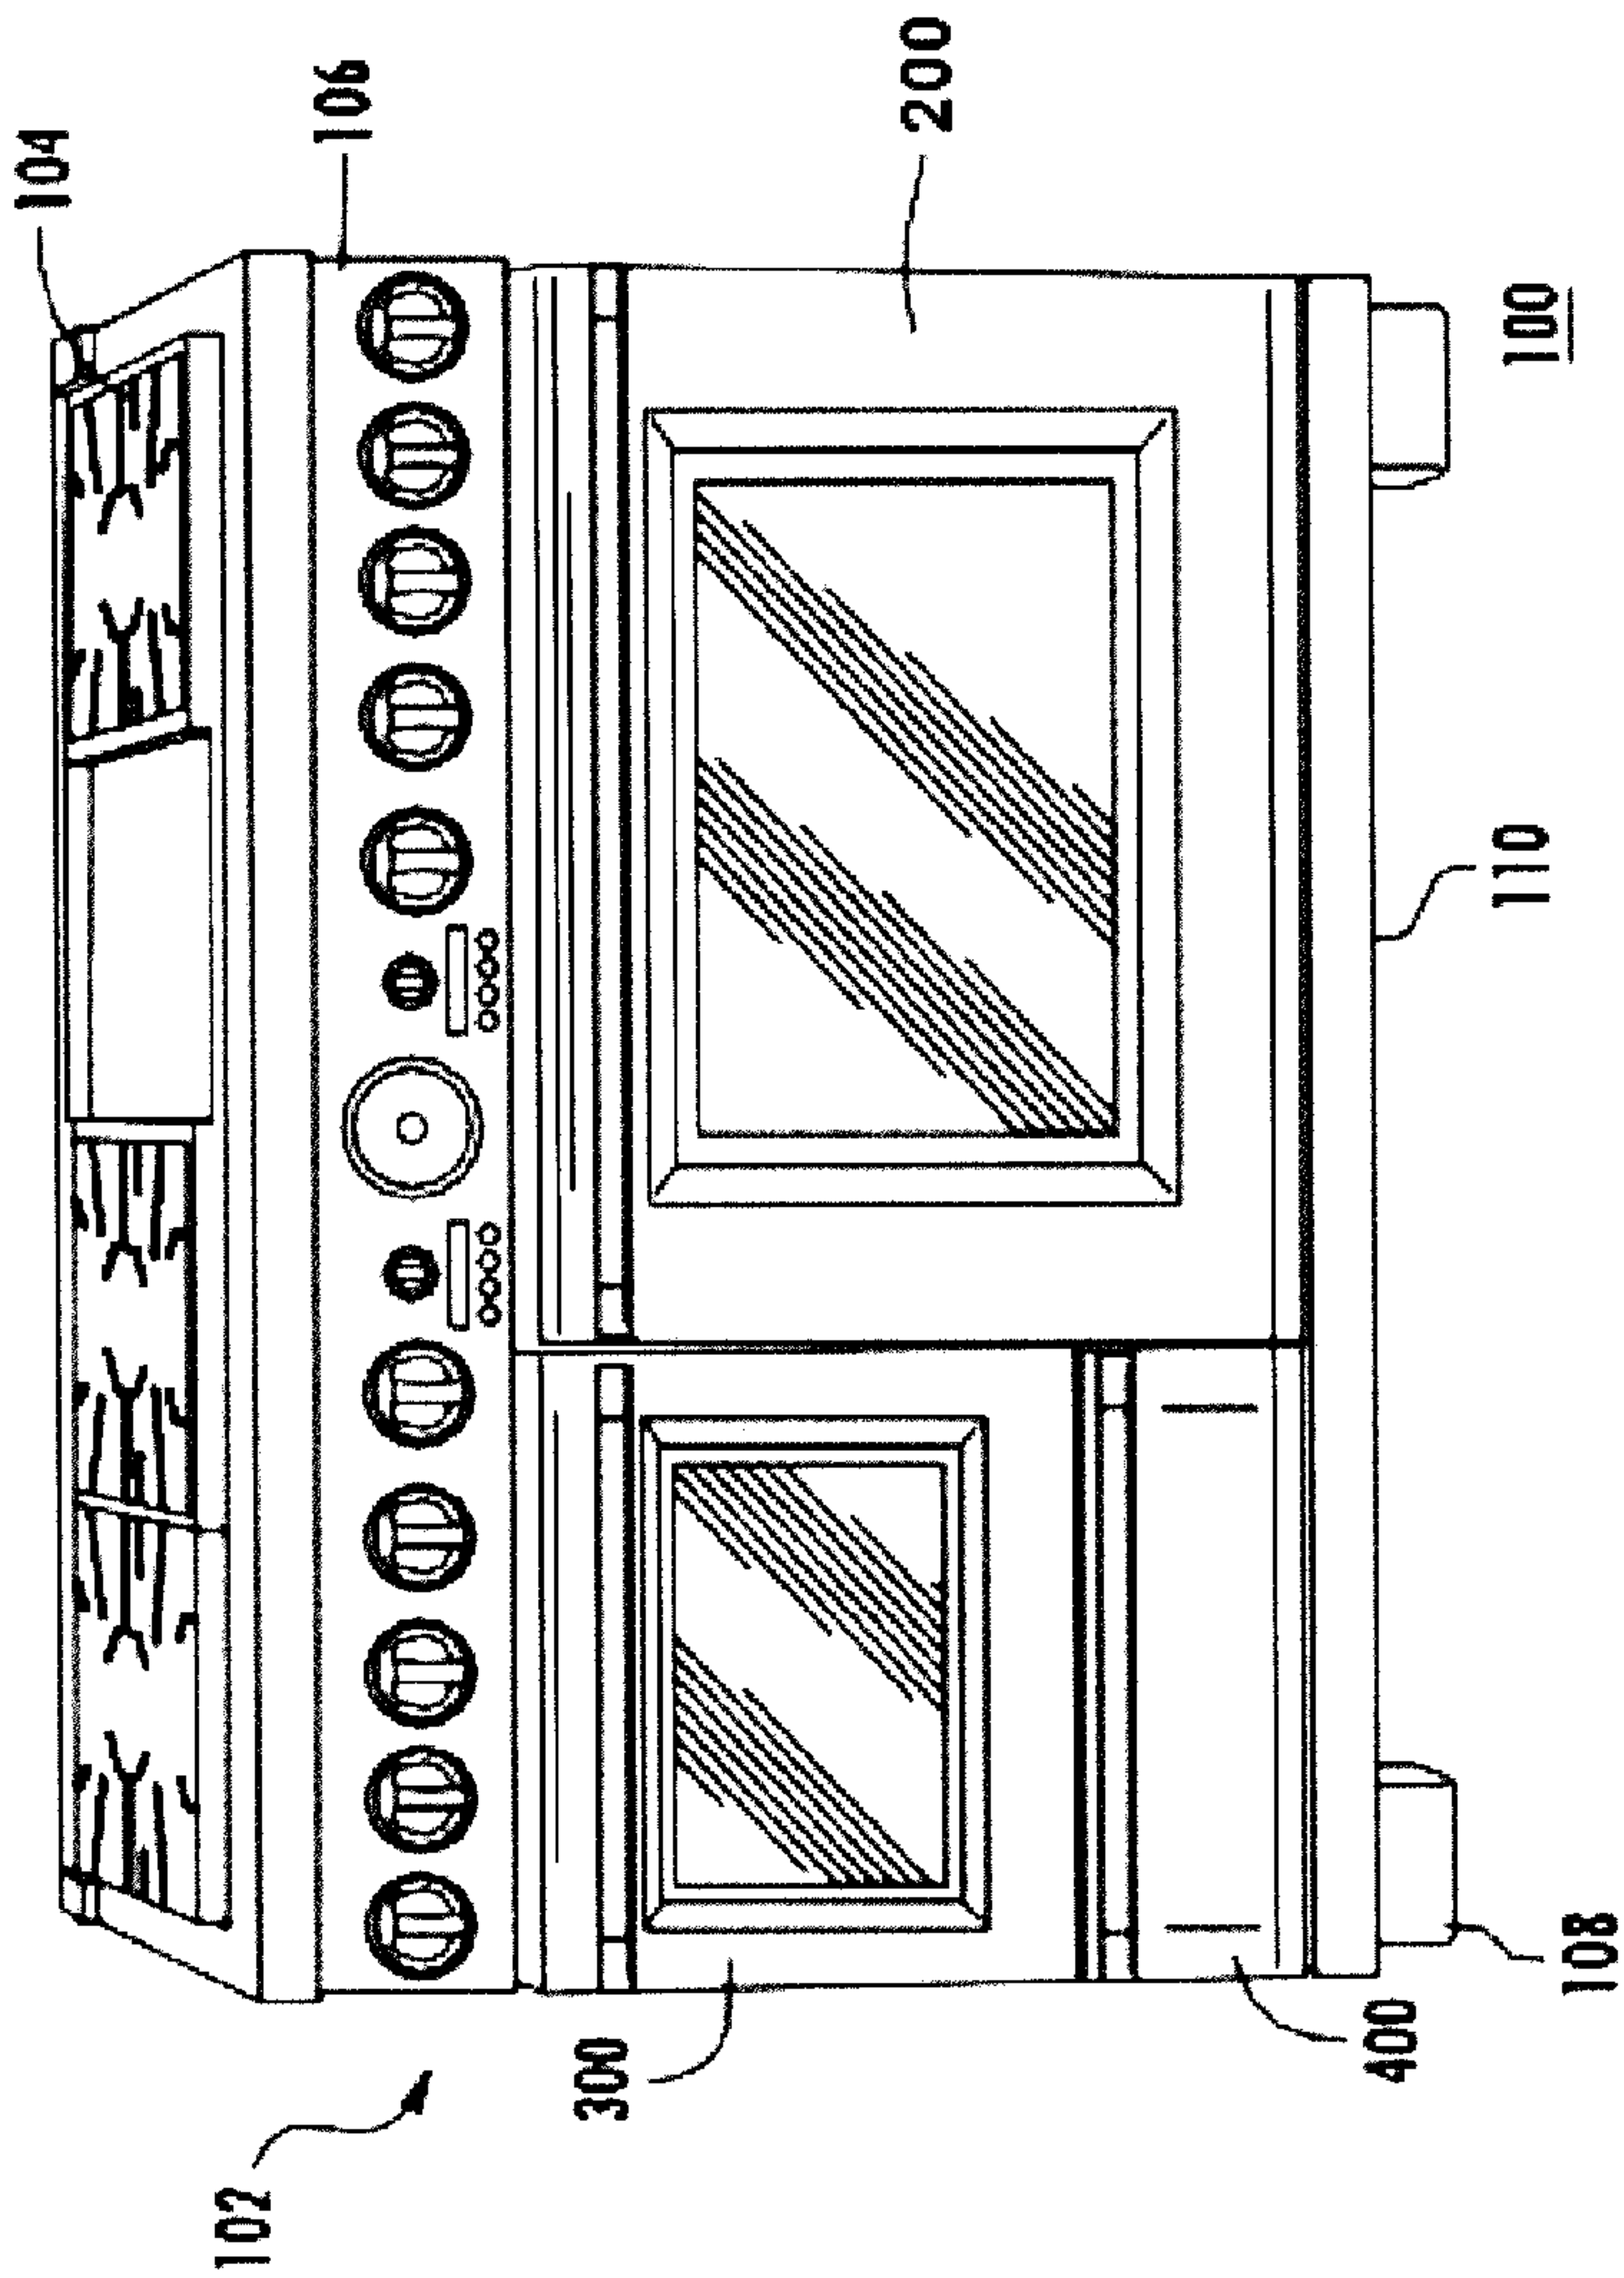


FIG. 1A

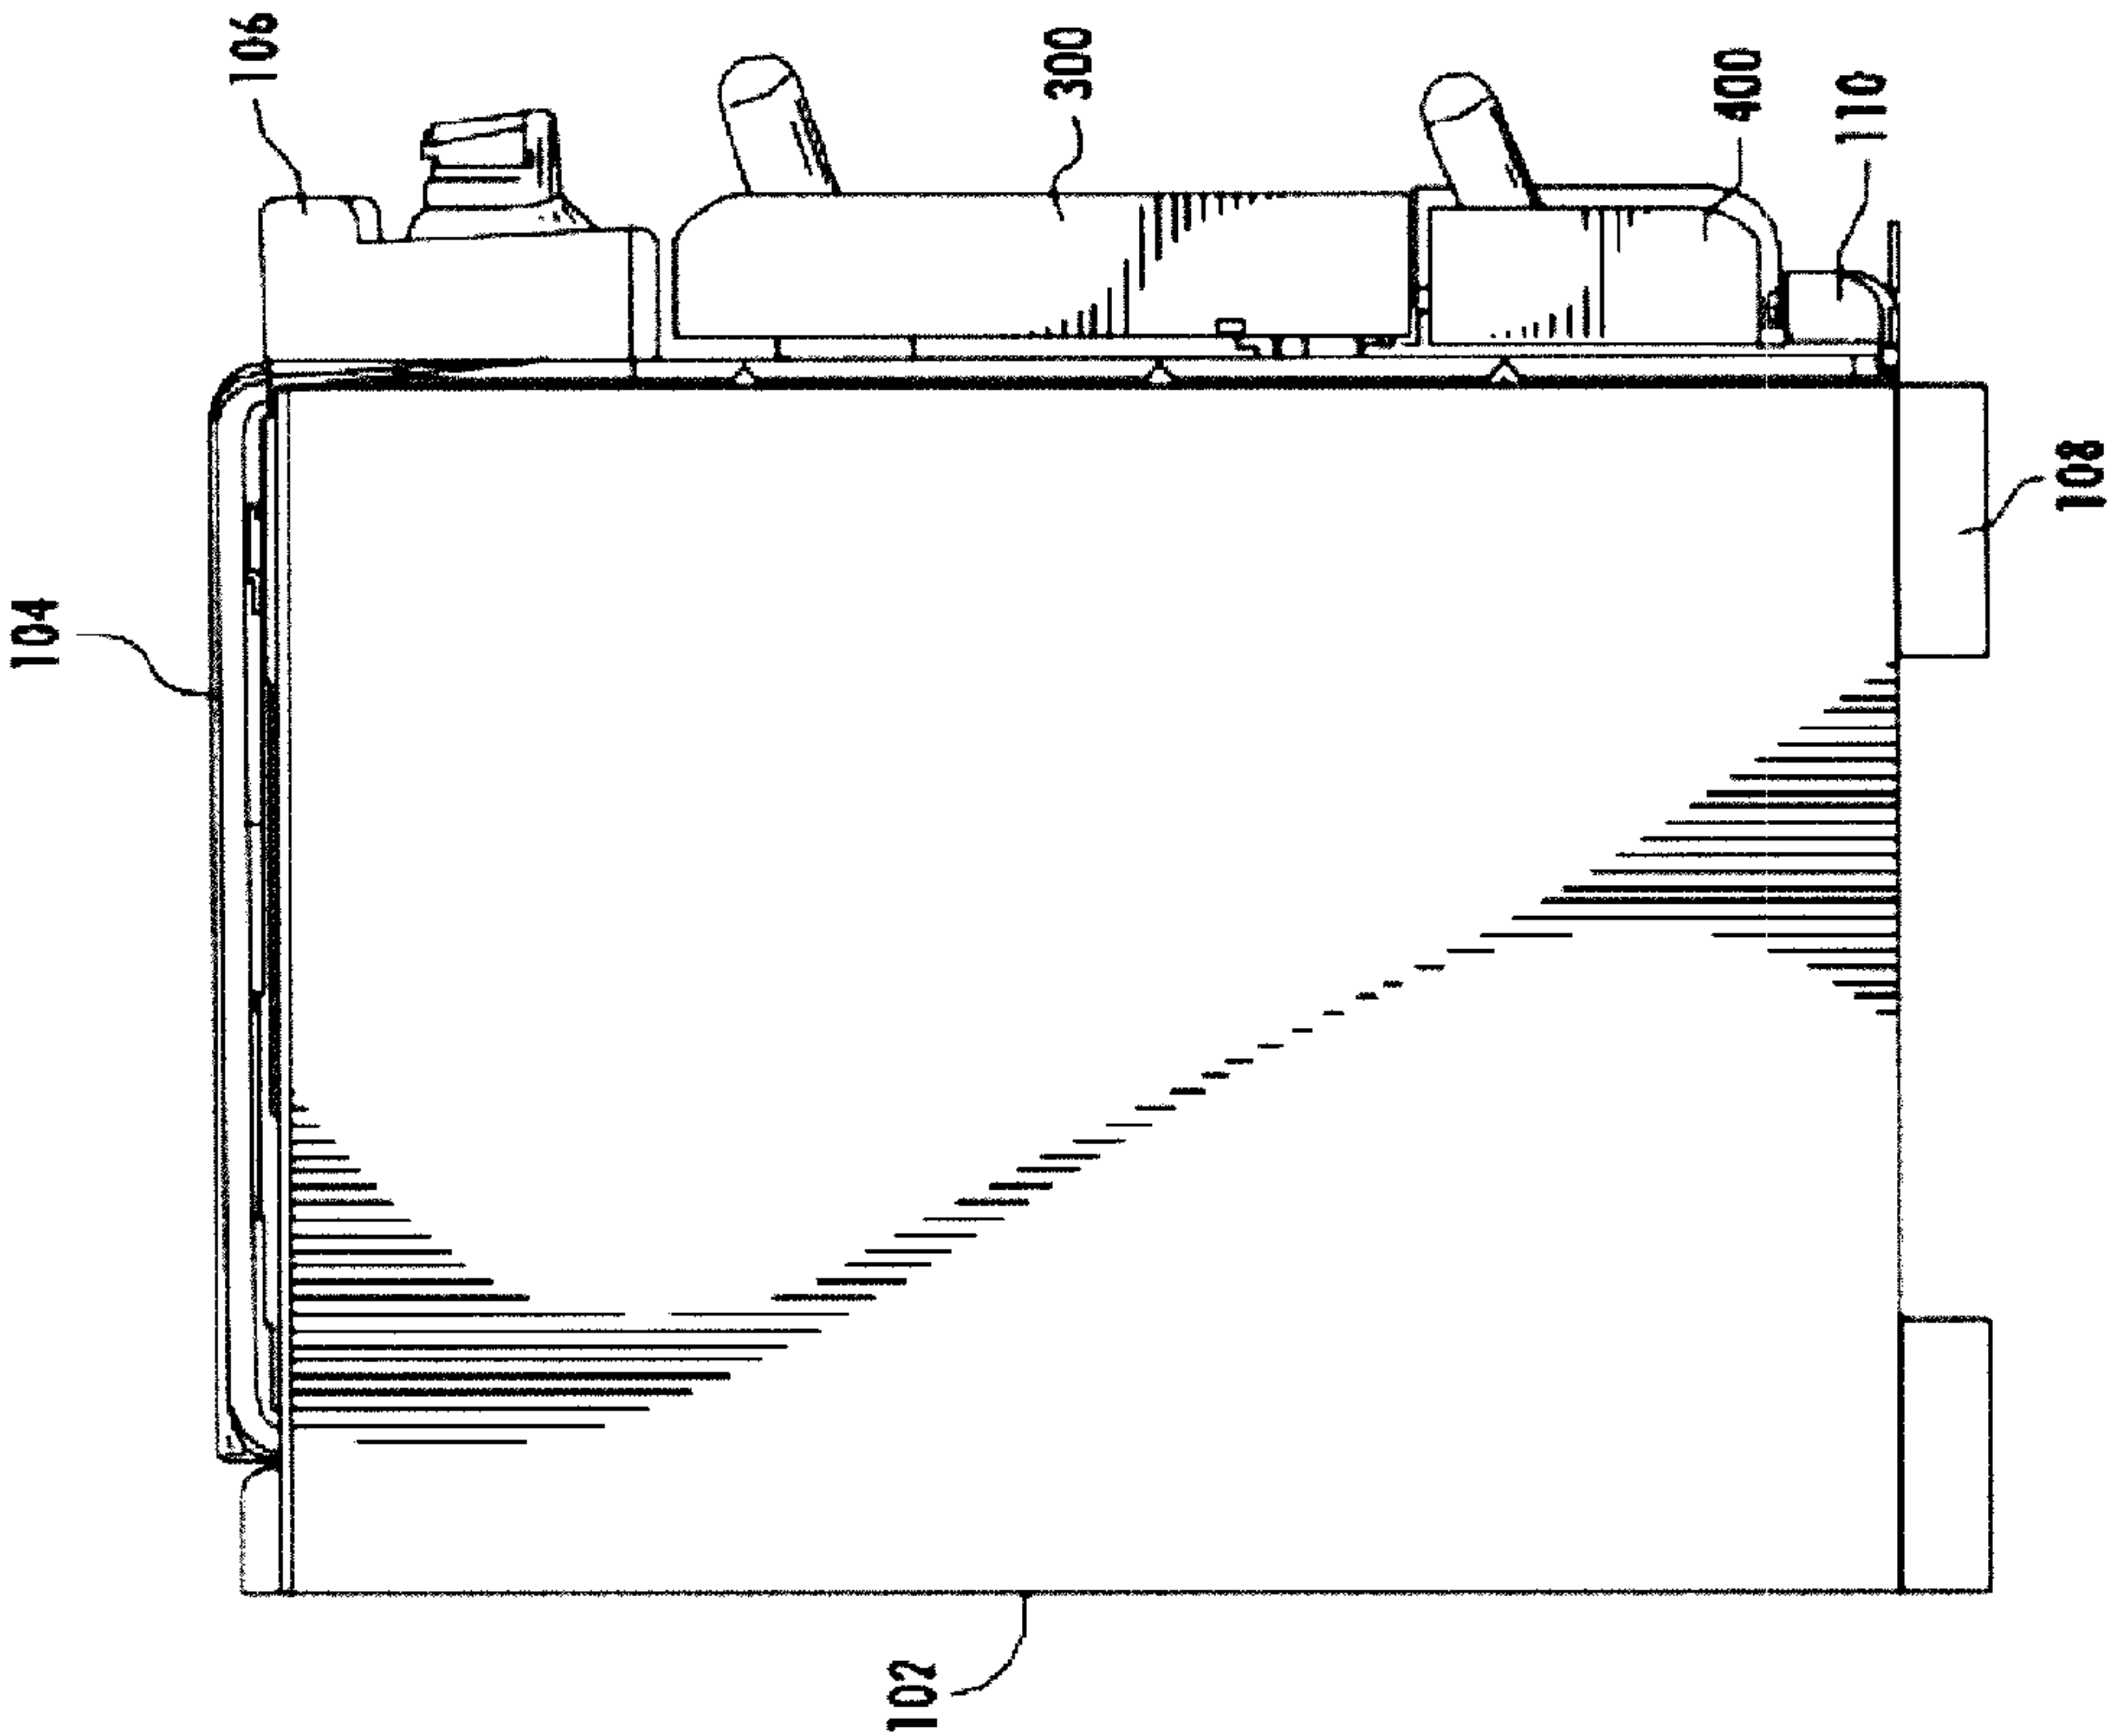


FIG. 1B

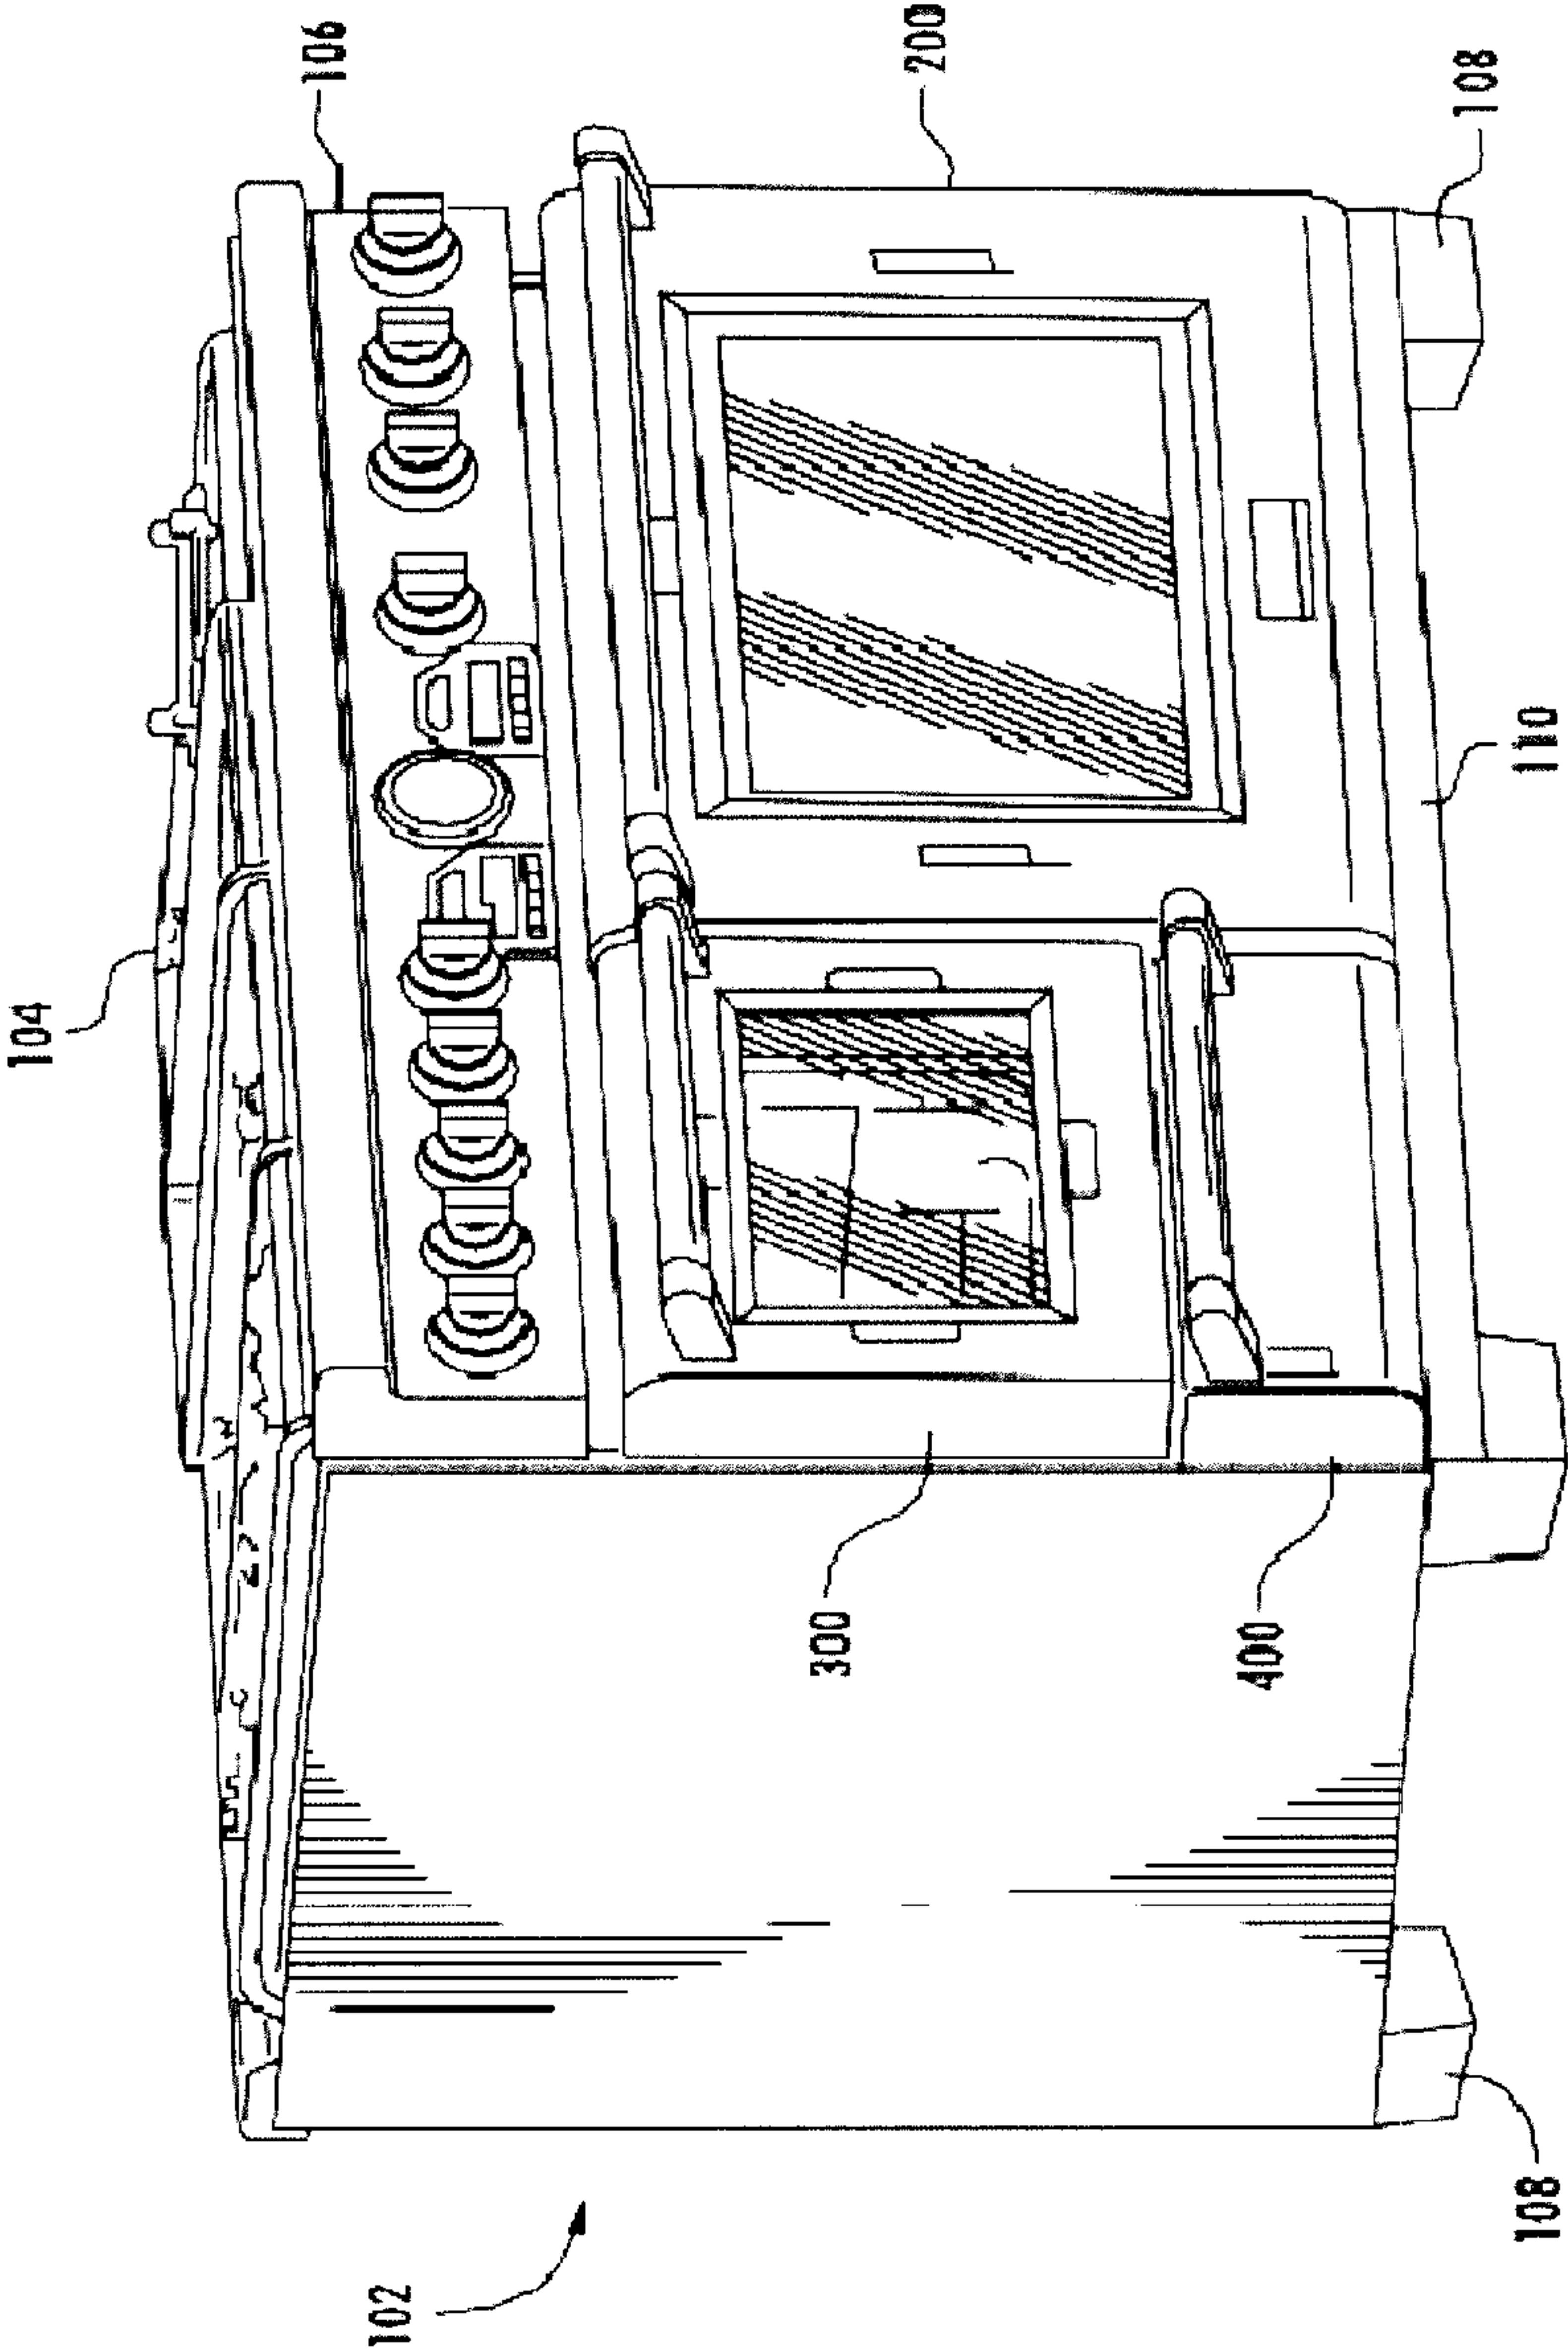


FIG. 1C

4 / 29

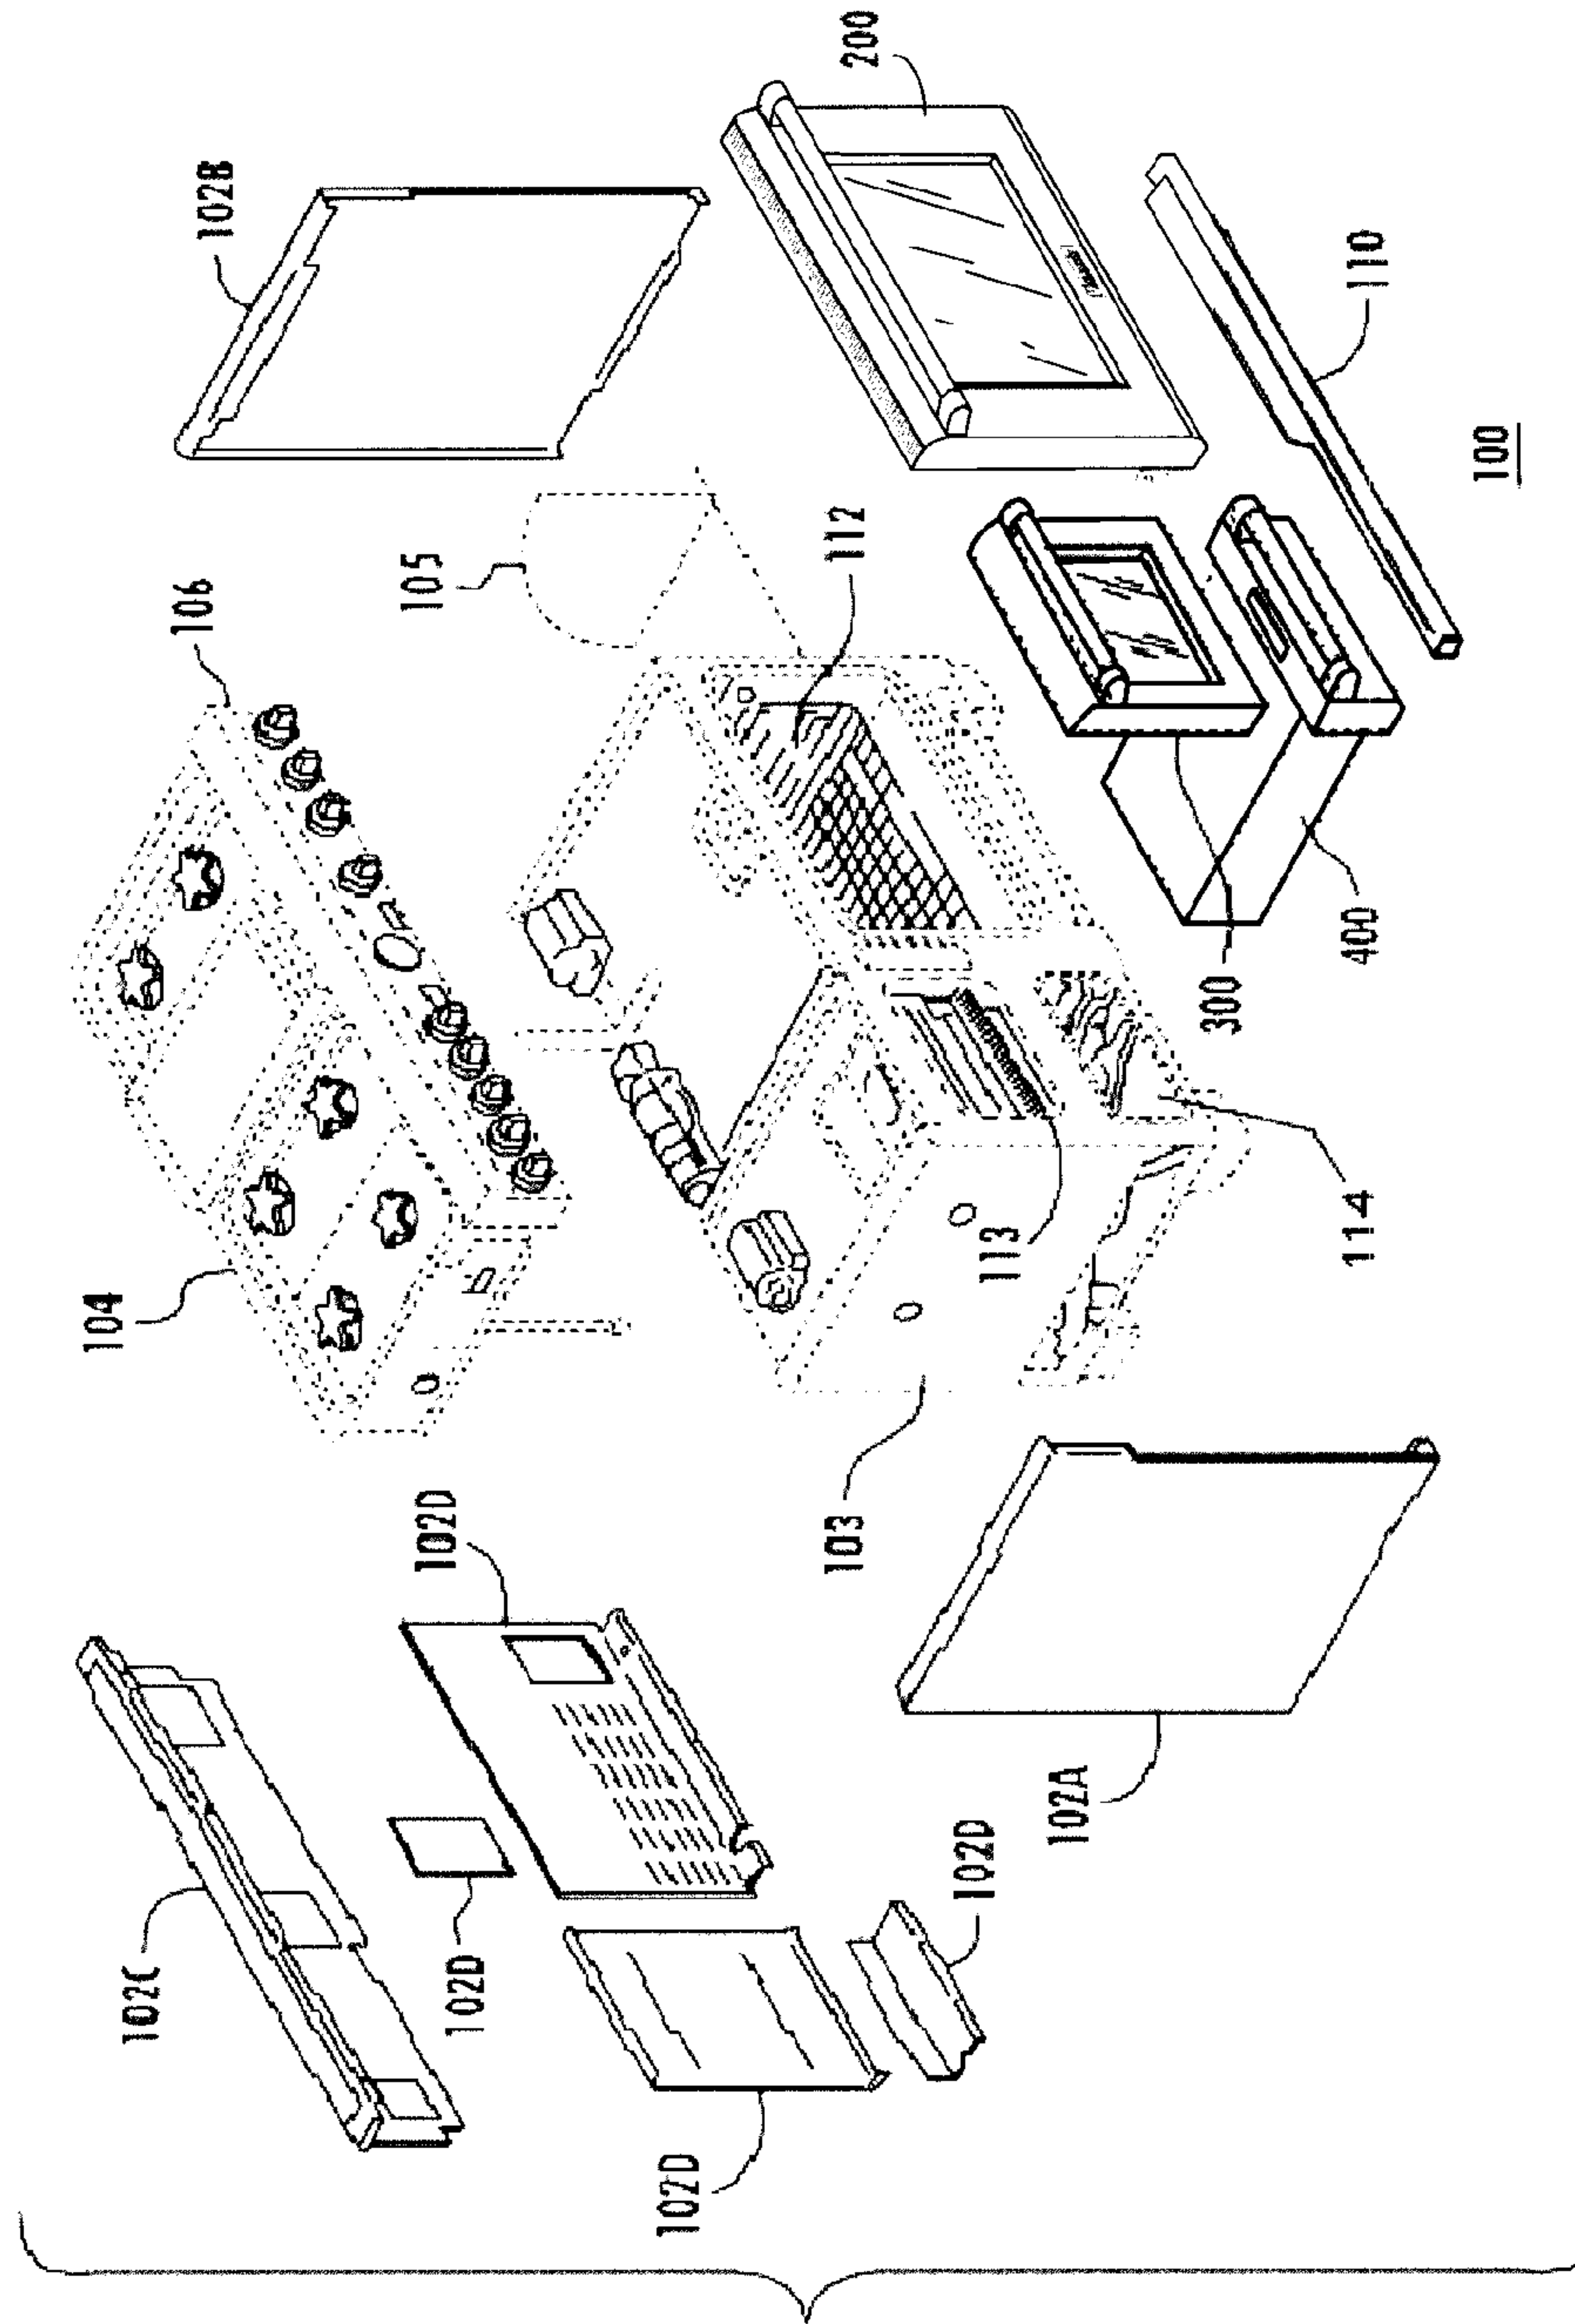


FIG. 2

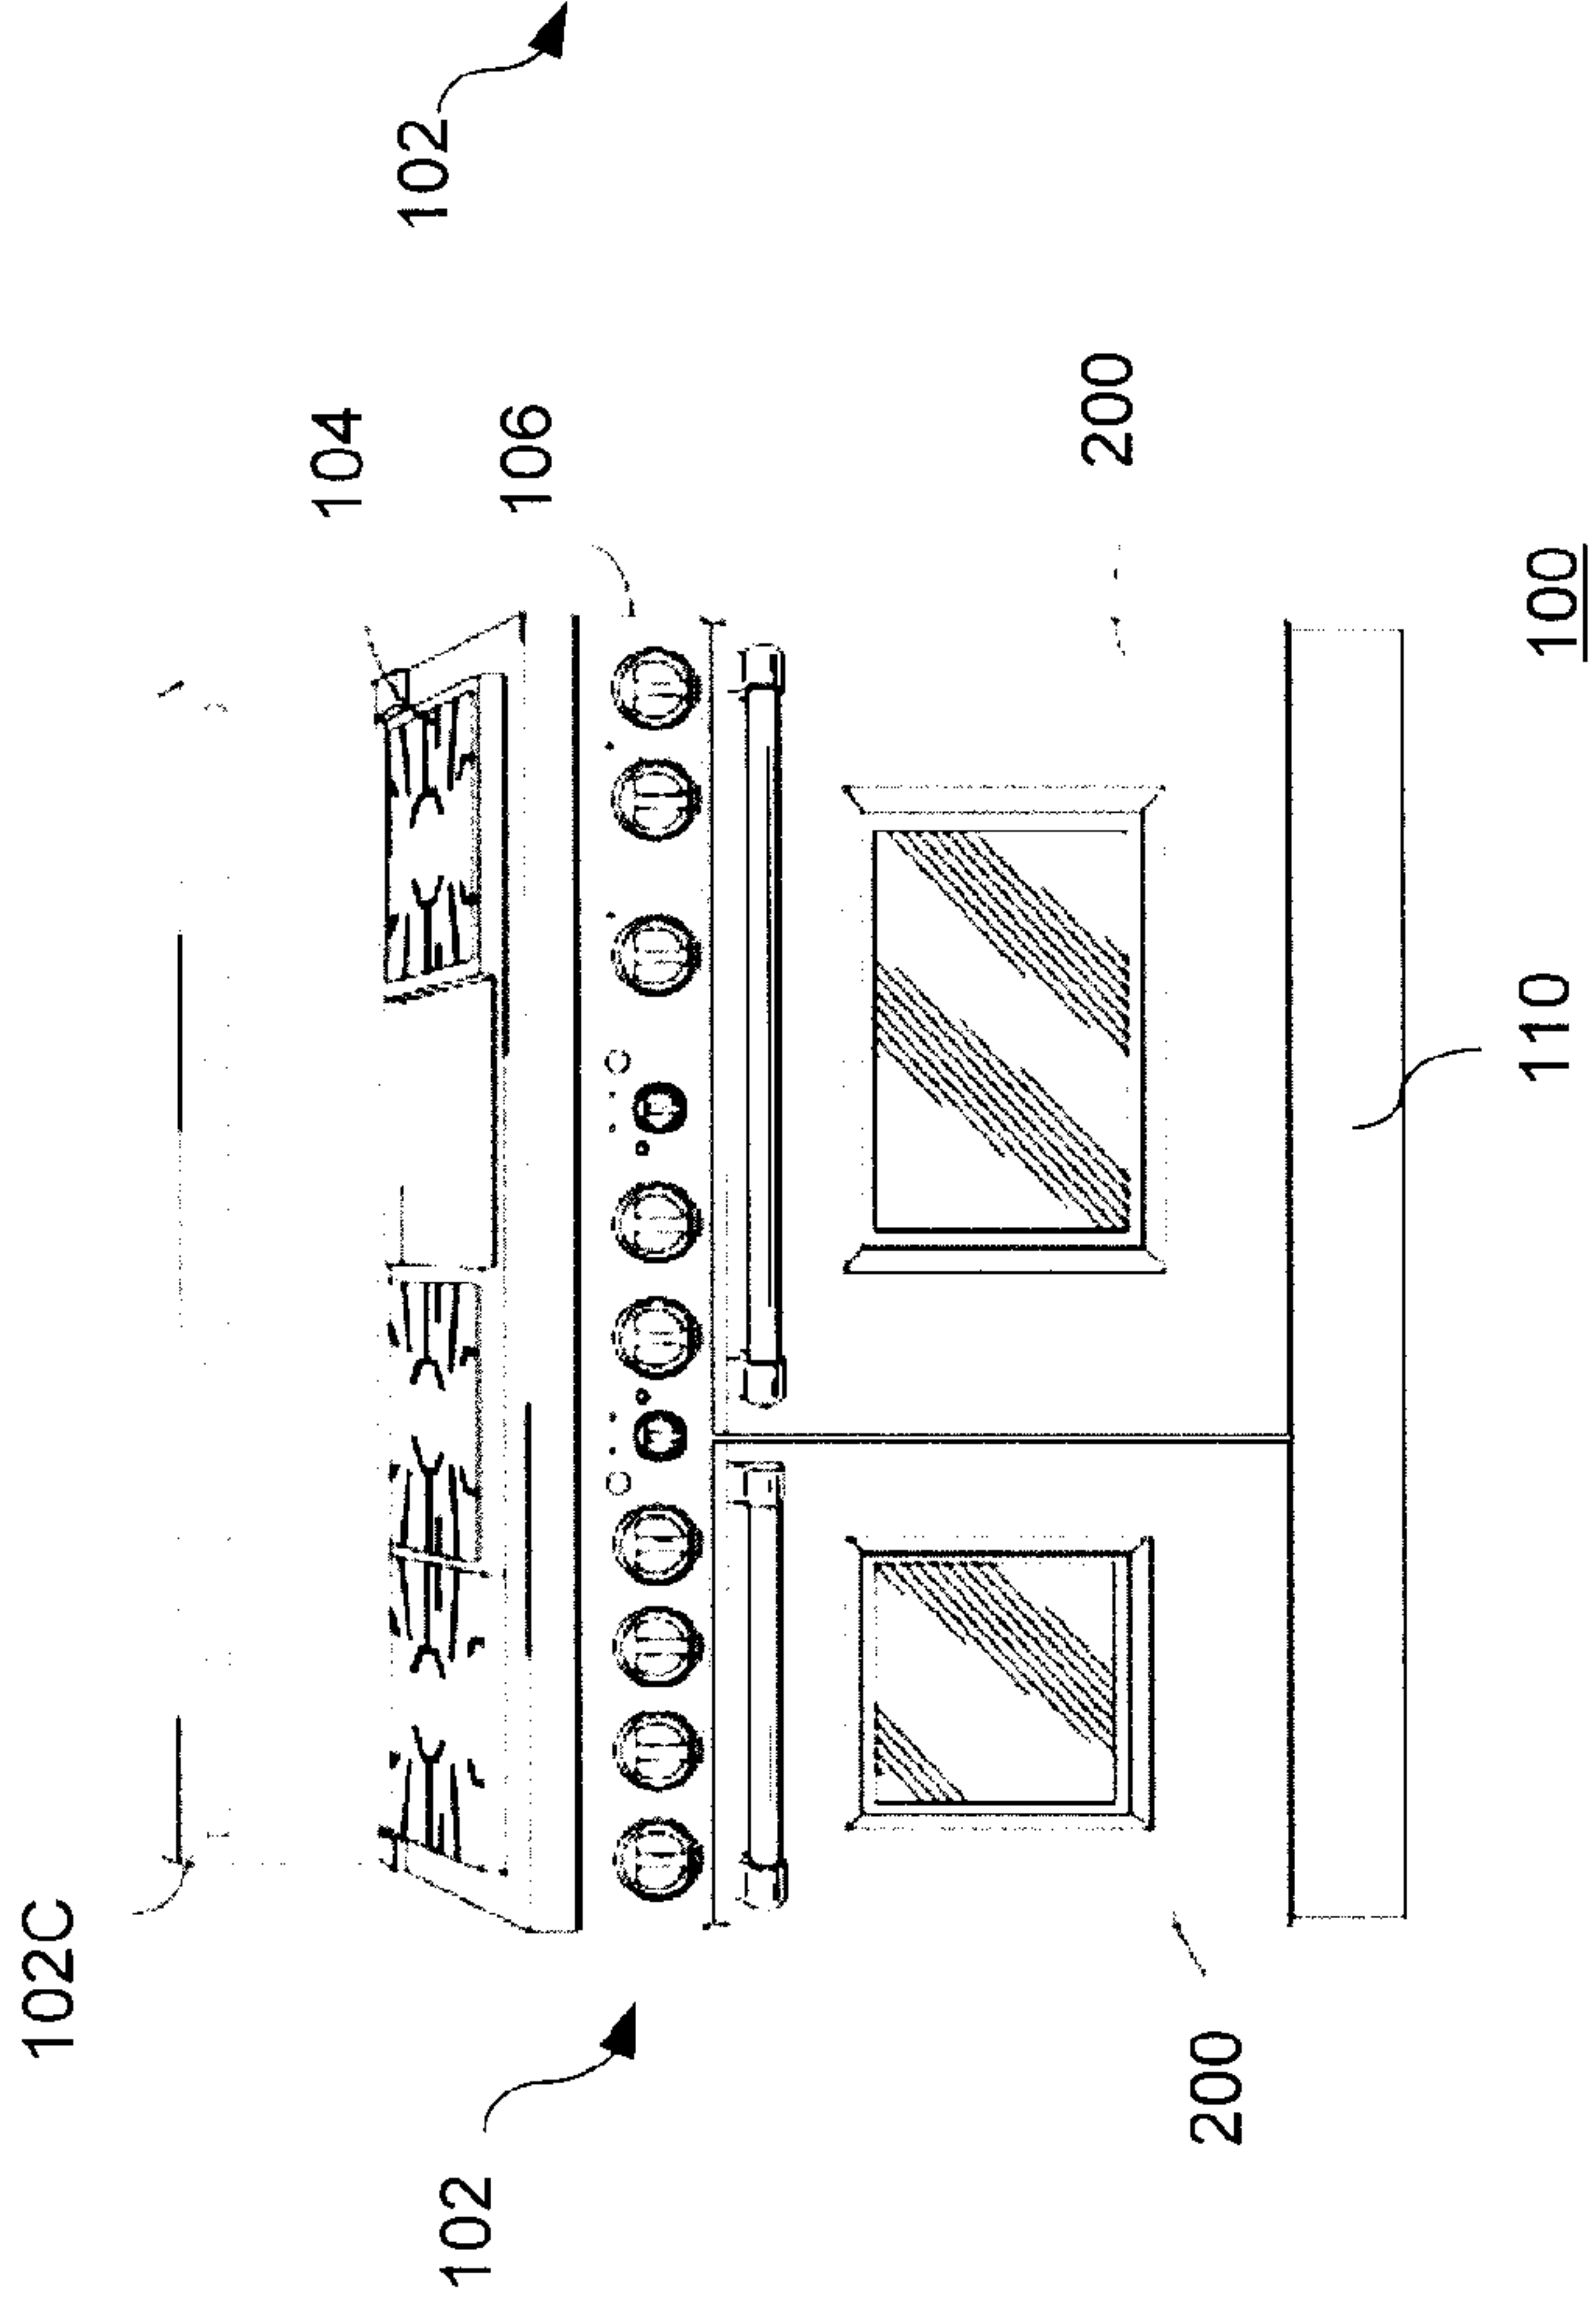


FIG. 3

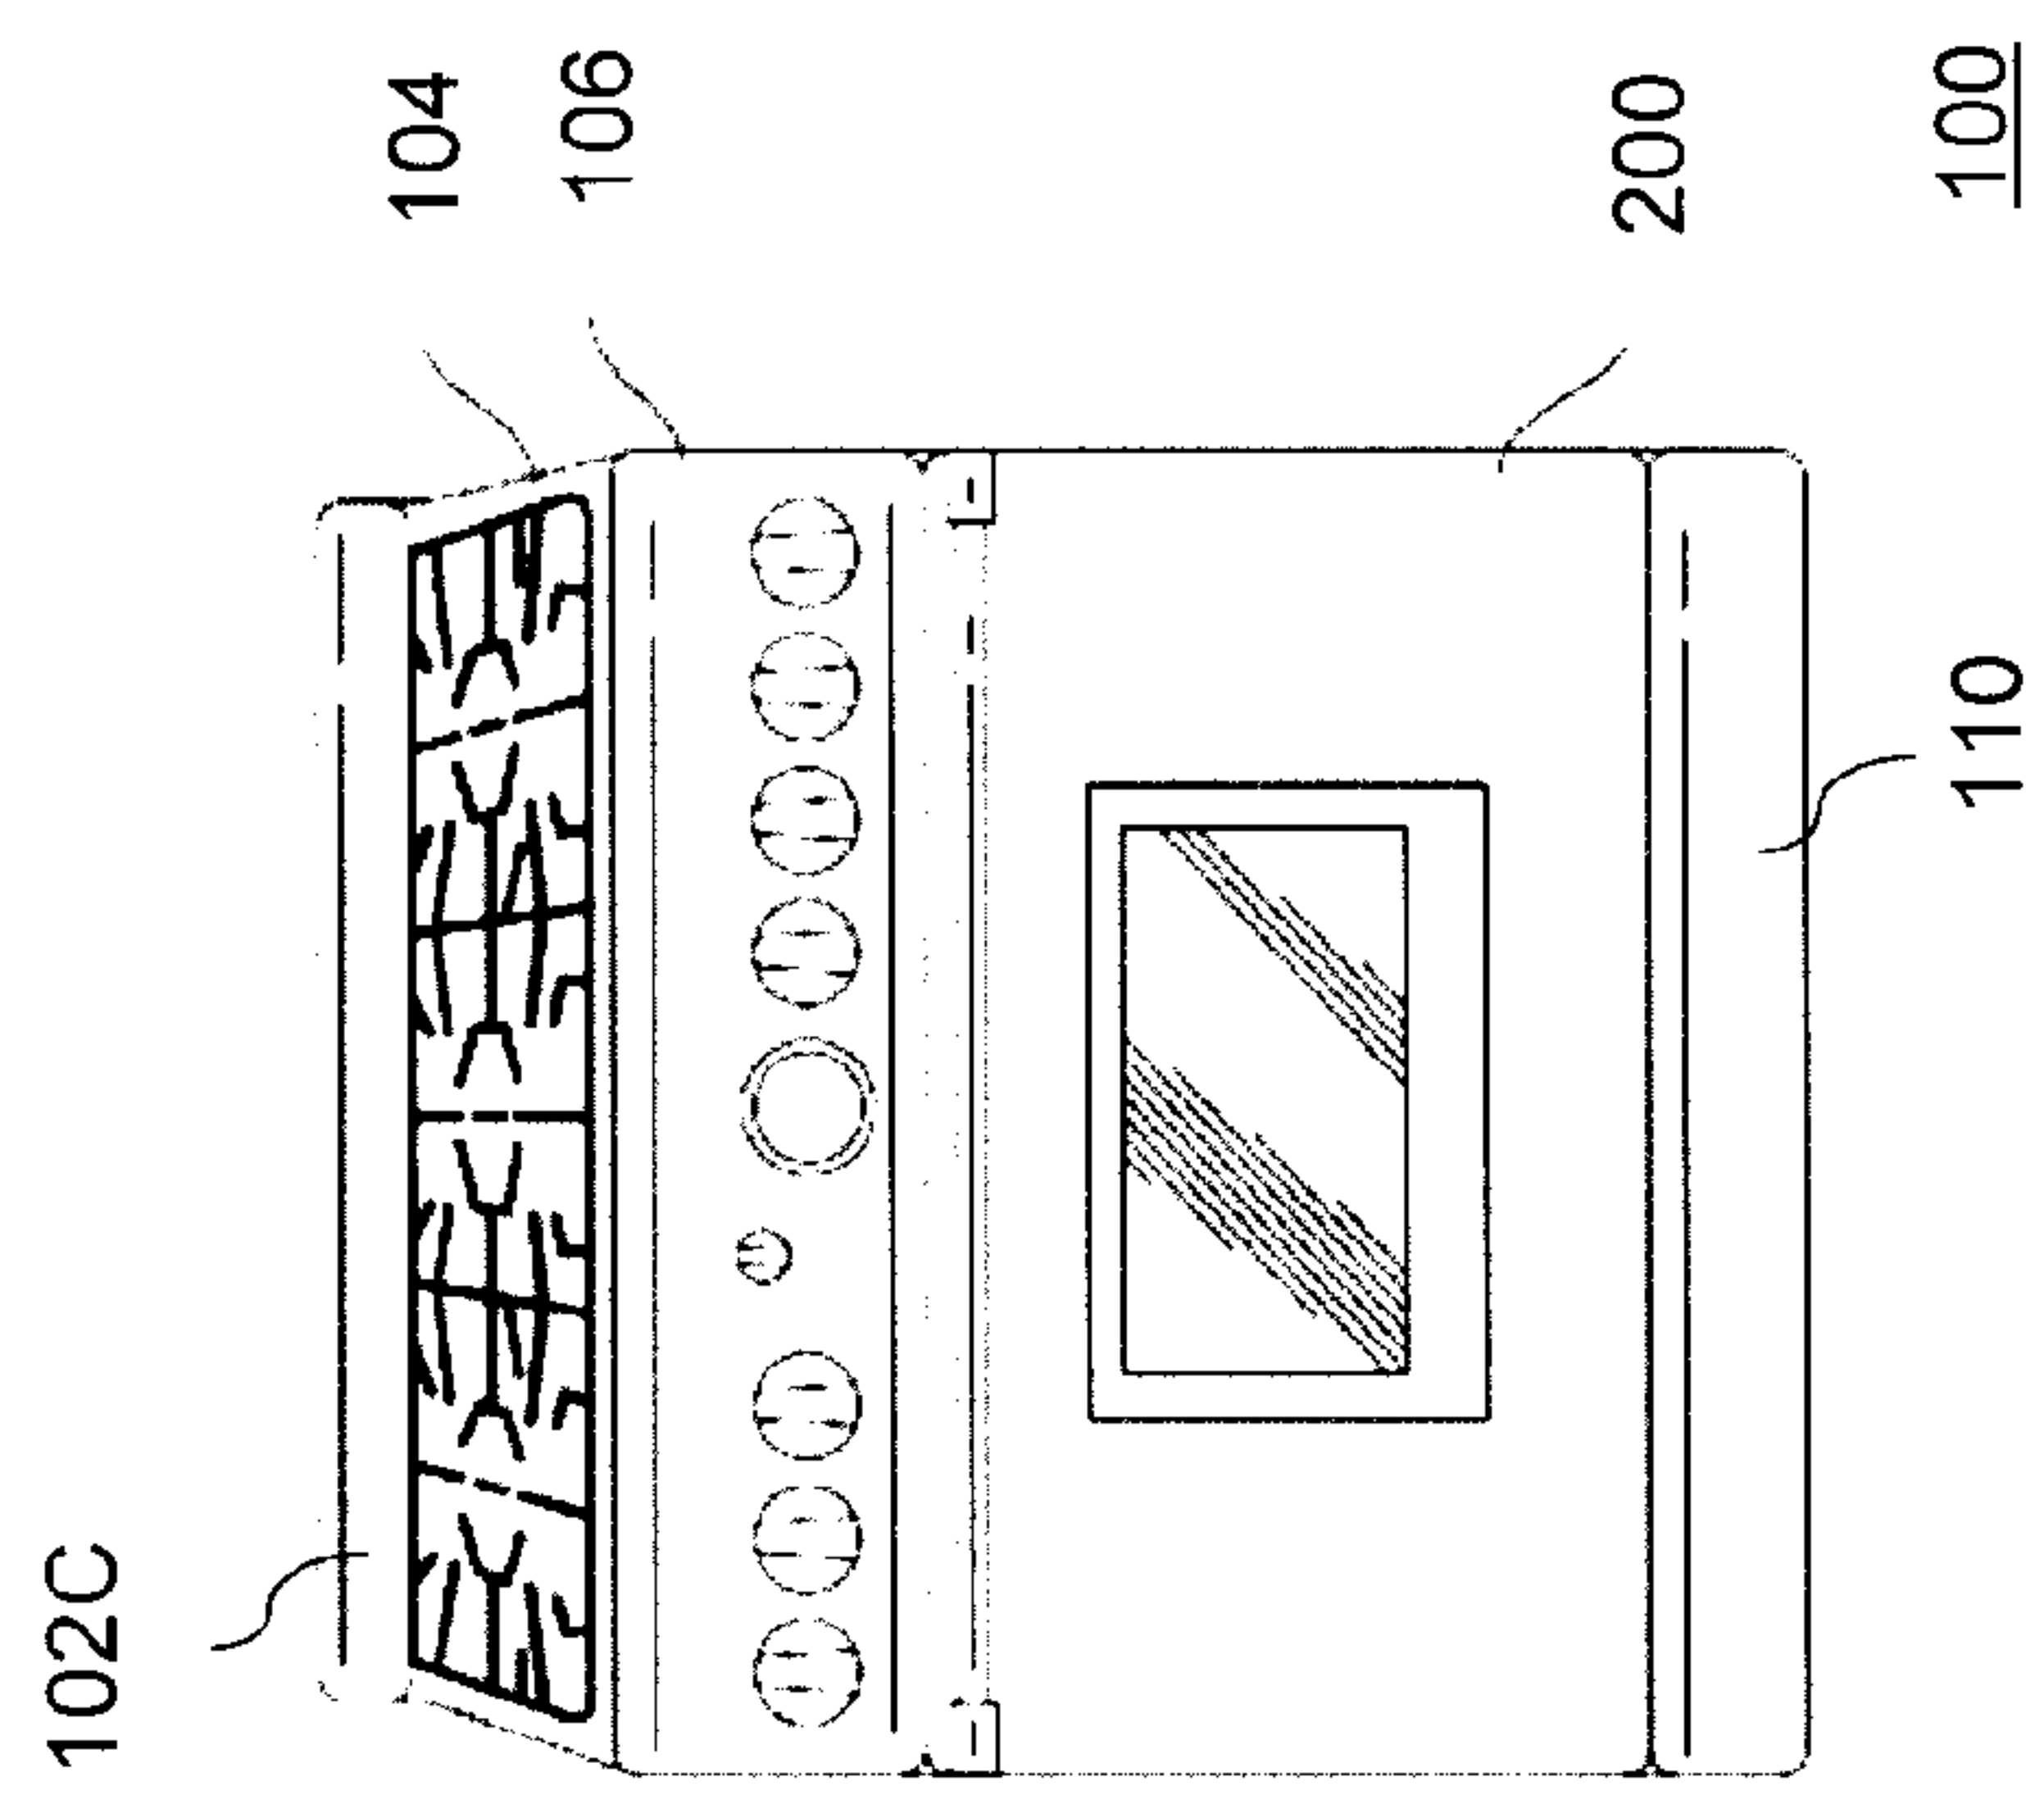
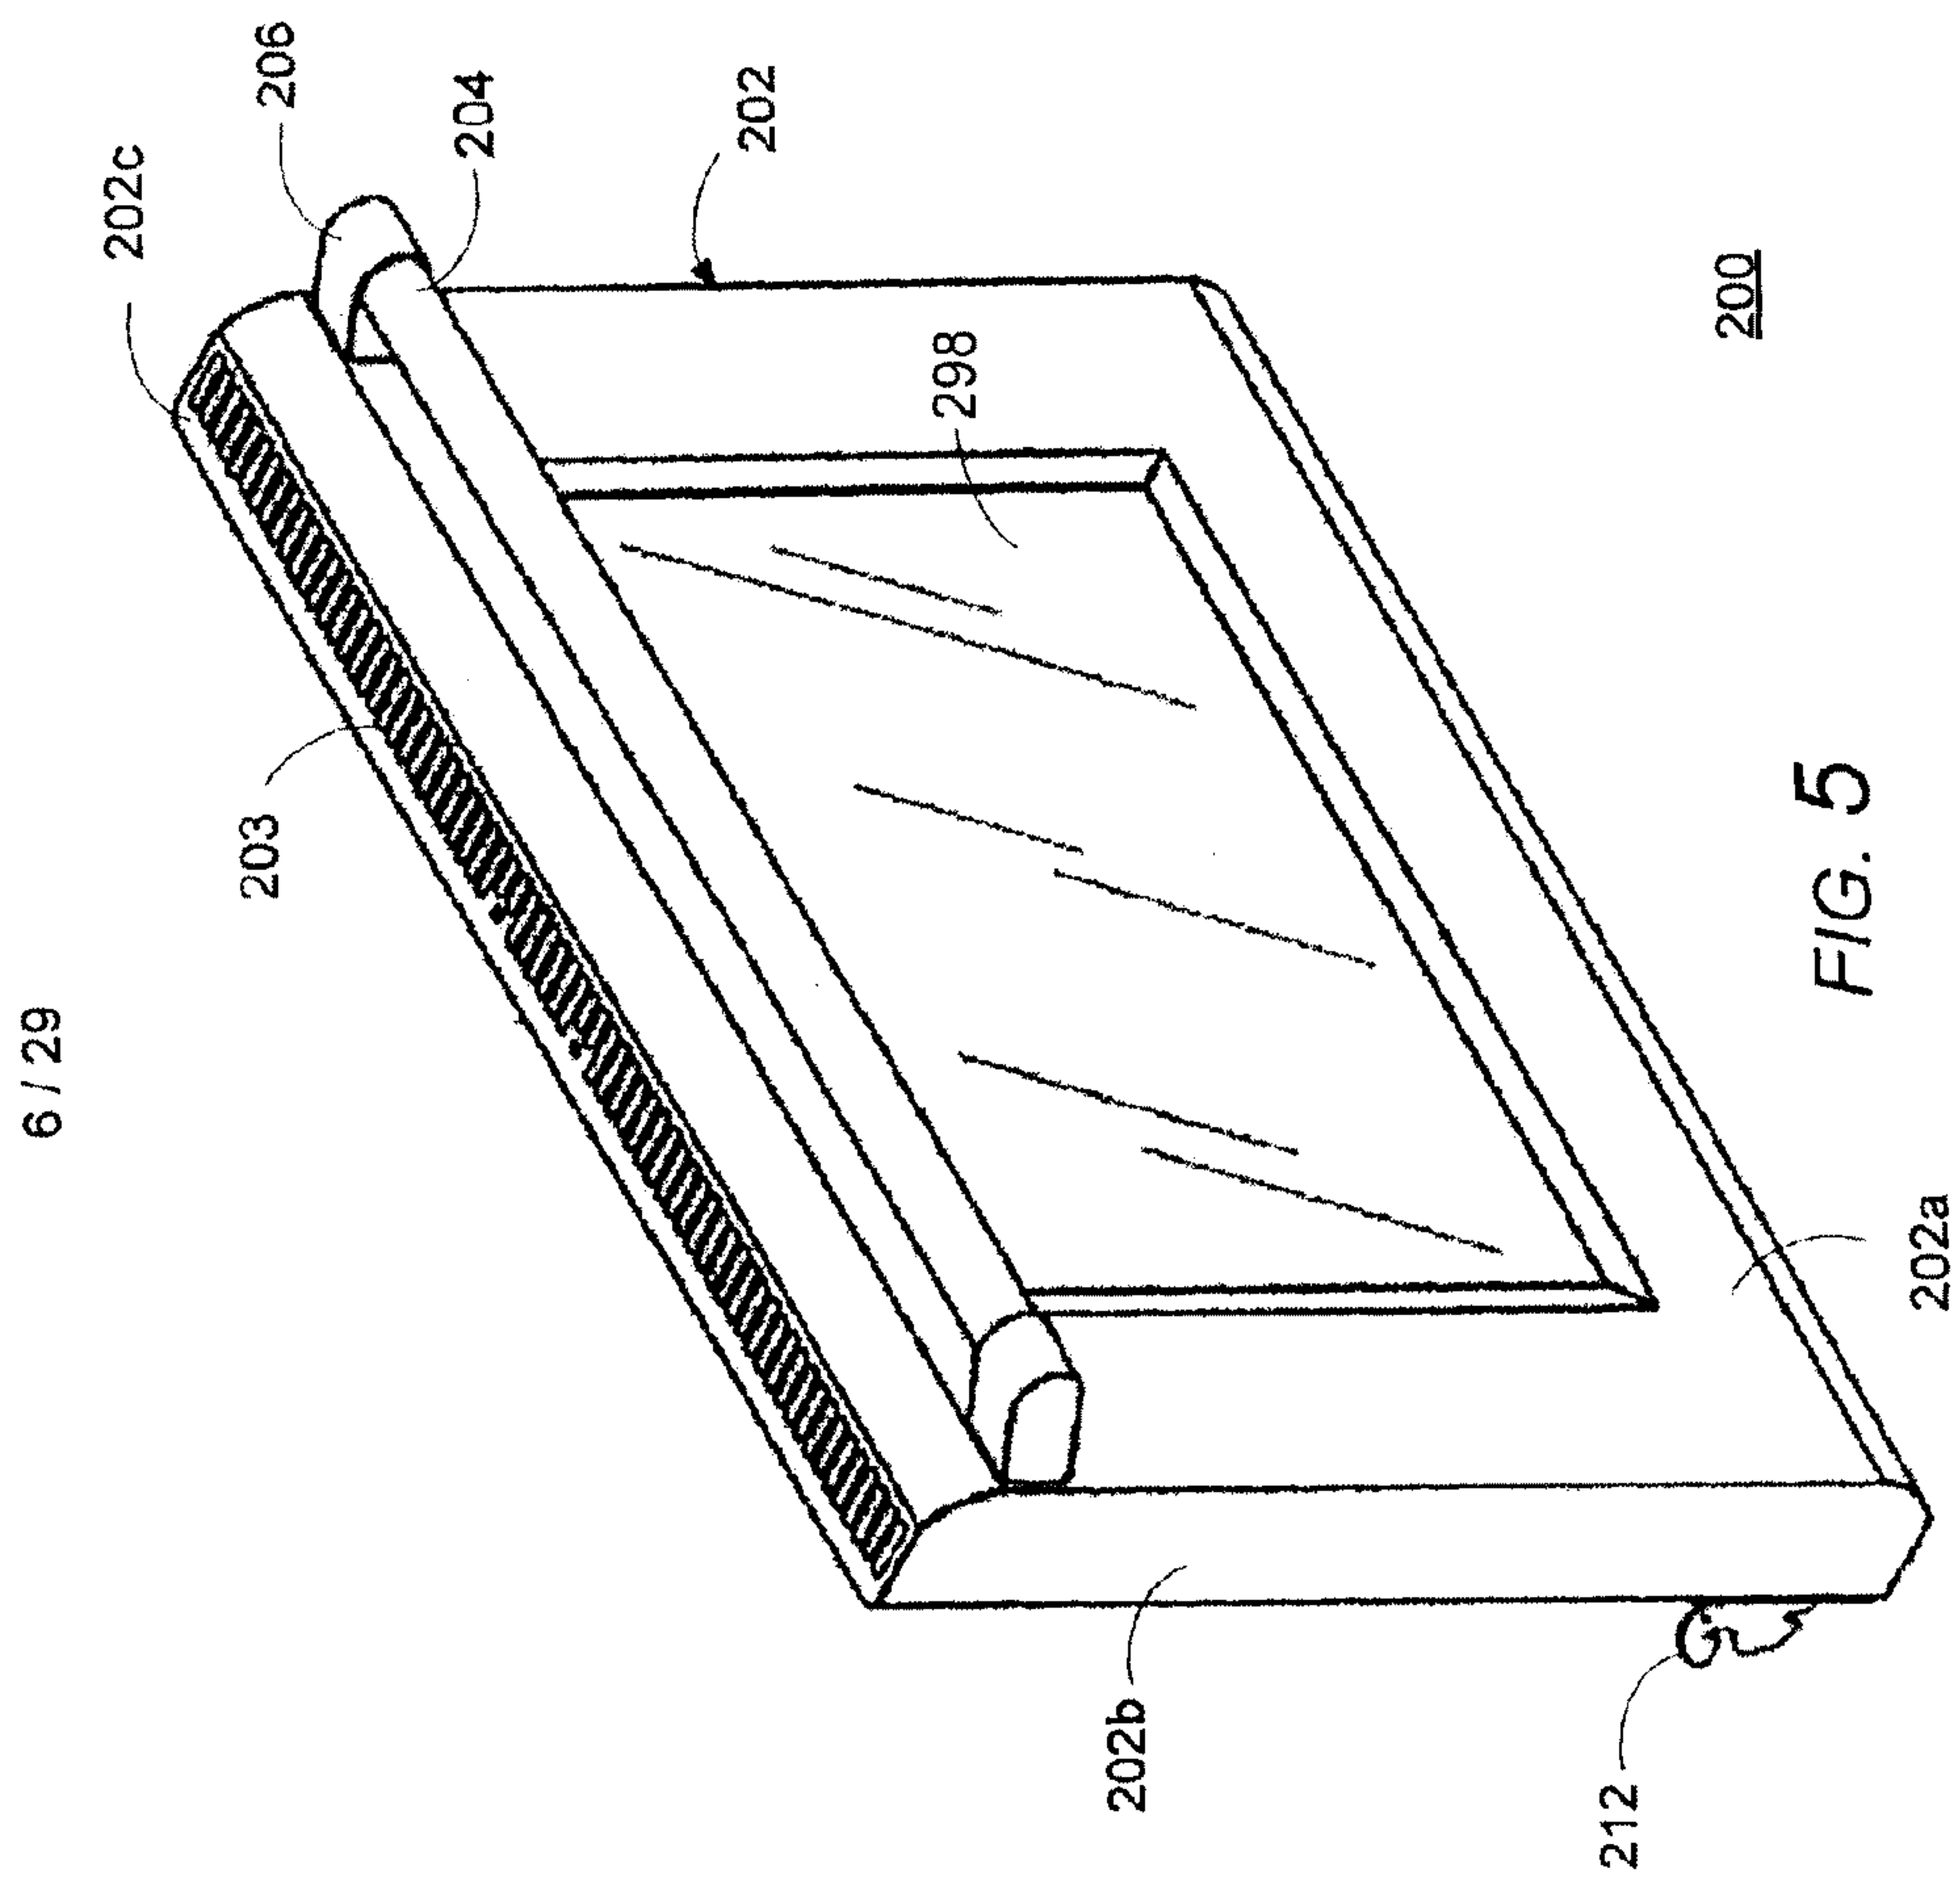


FIG. 4



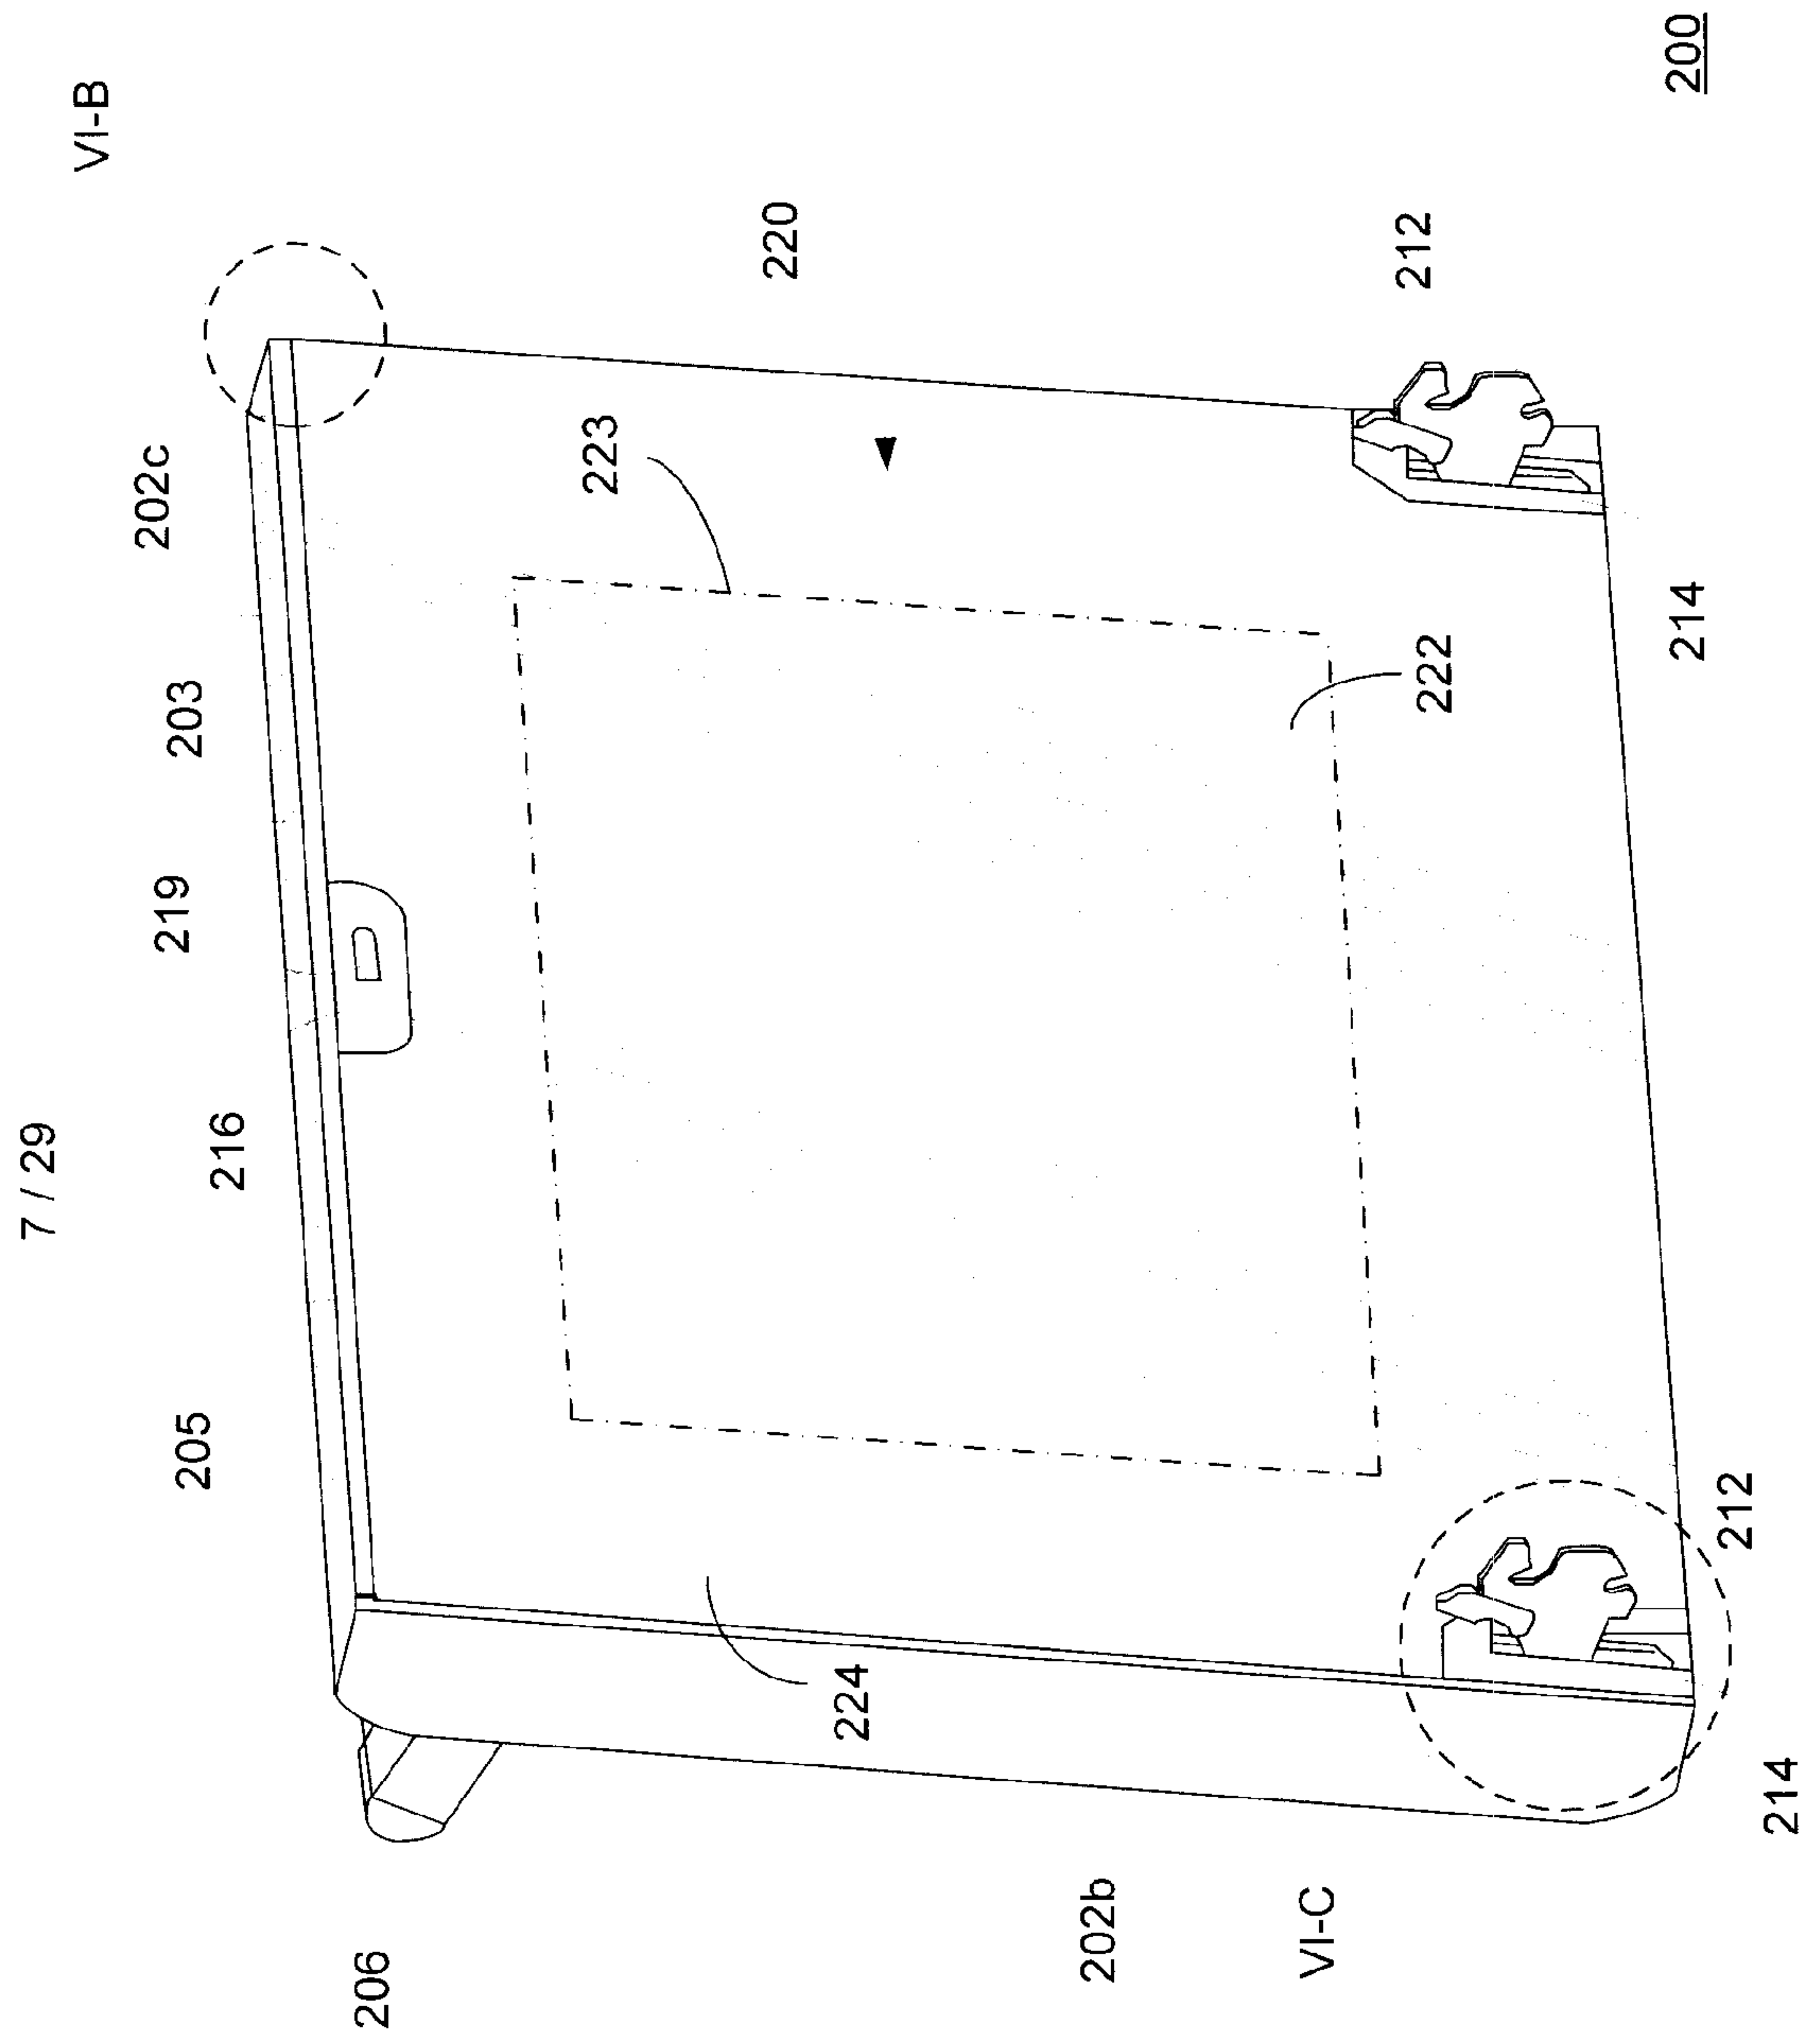


FIG. 6A

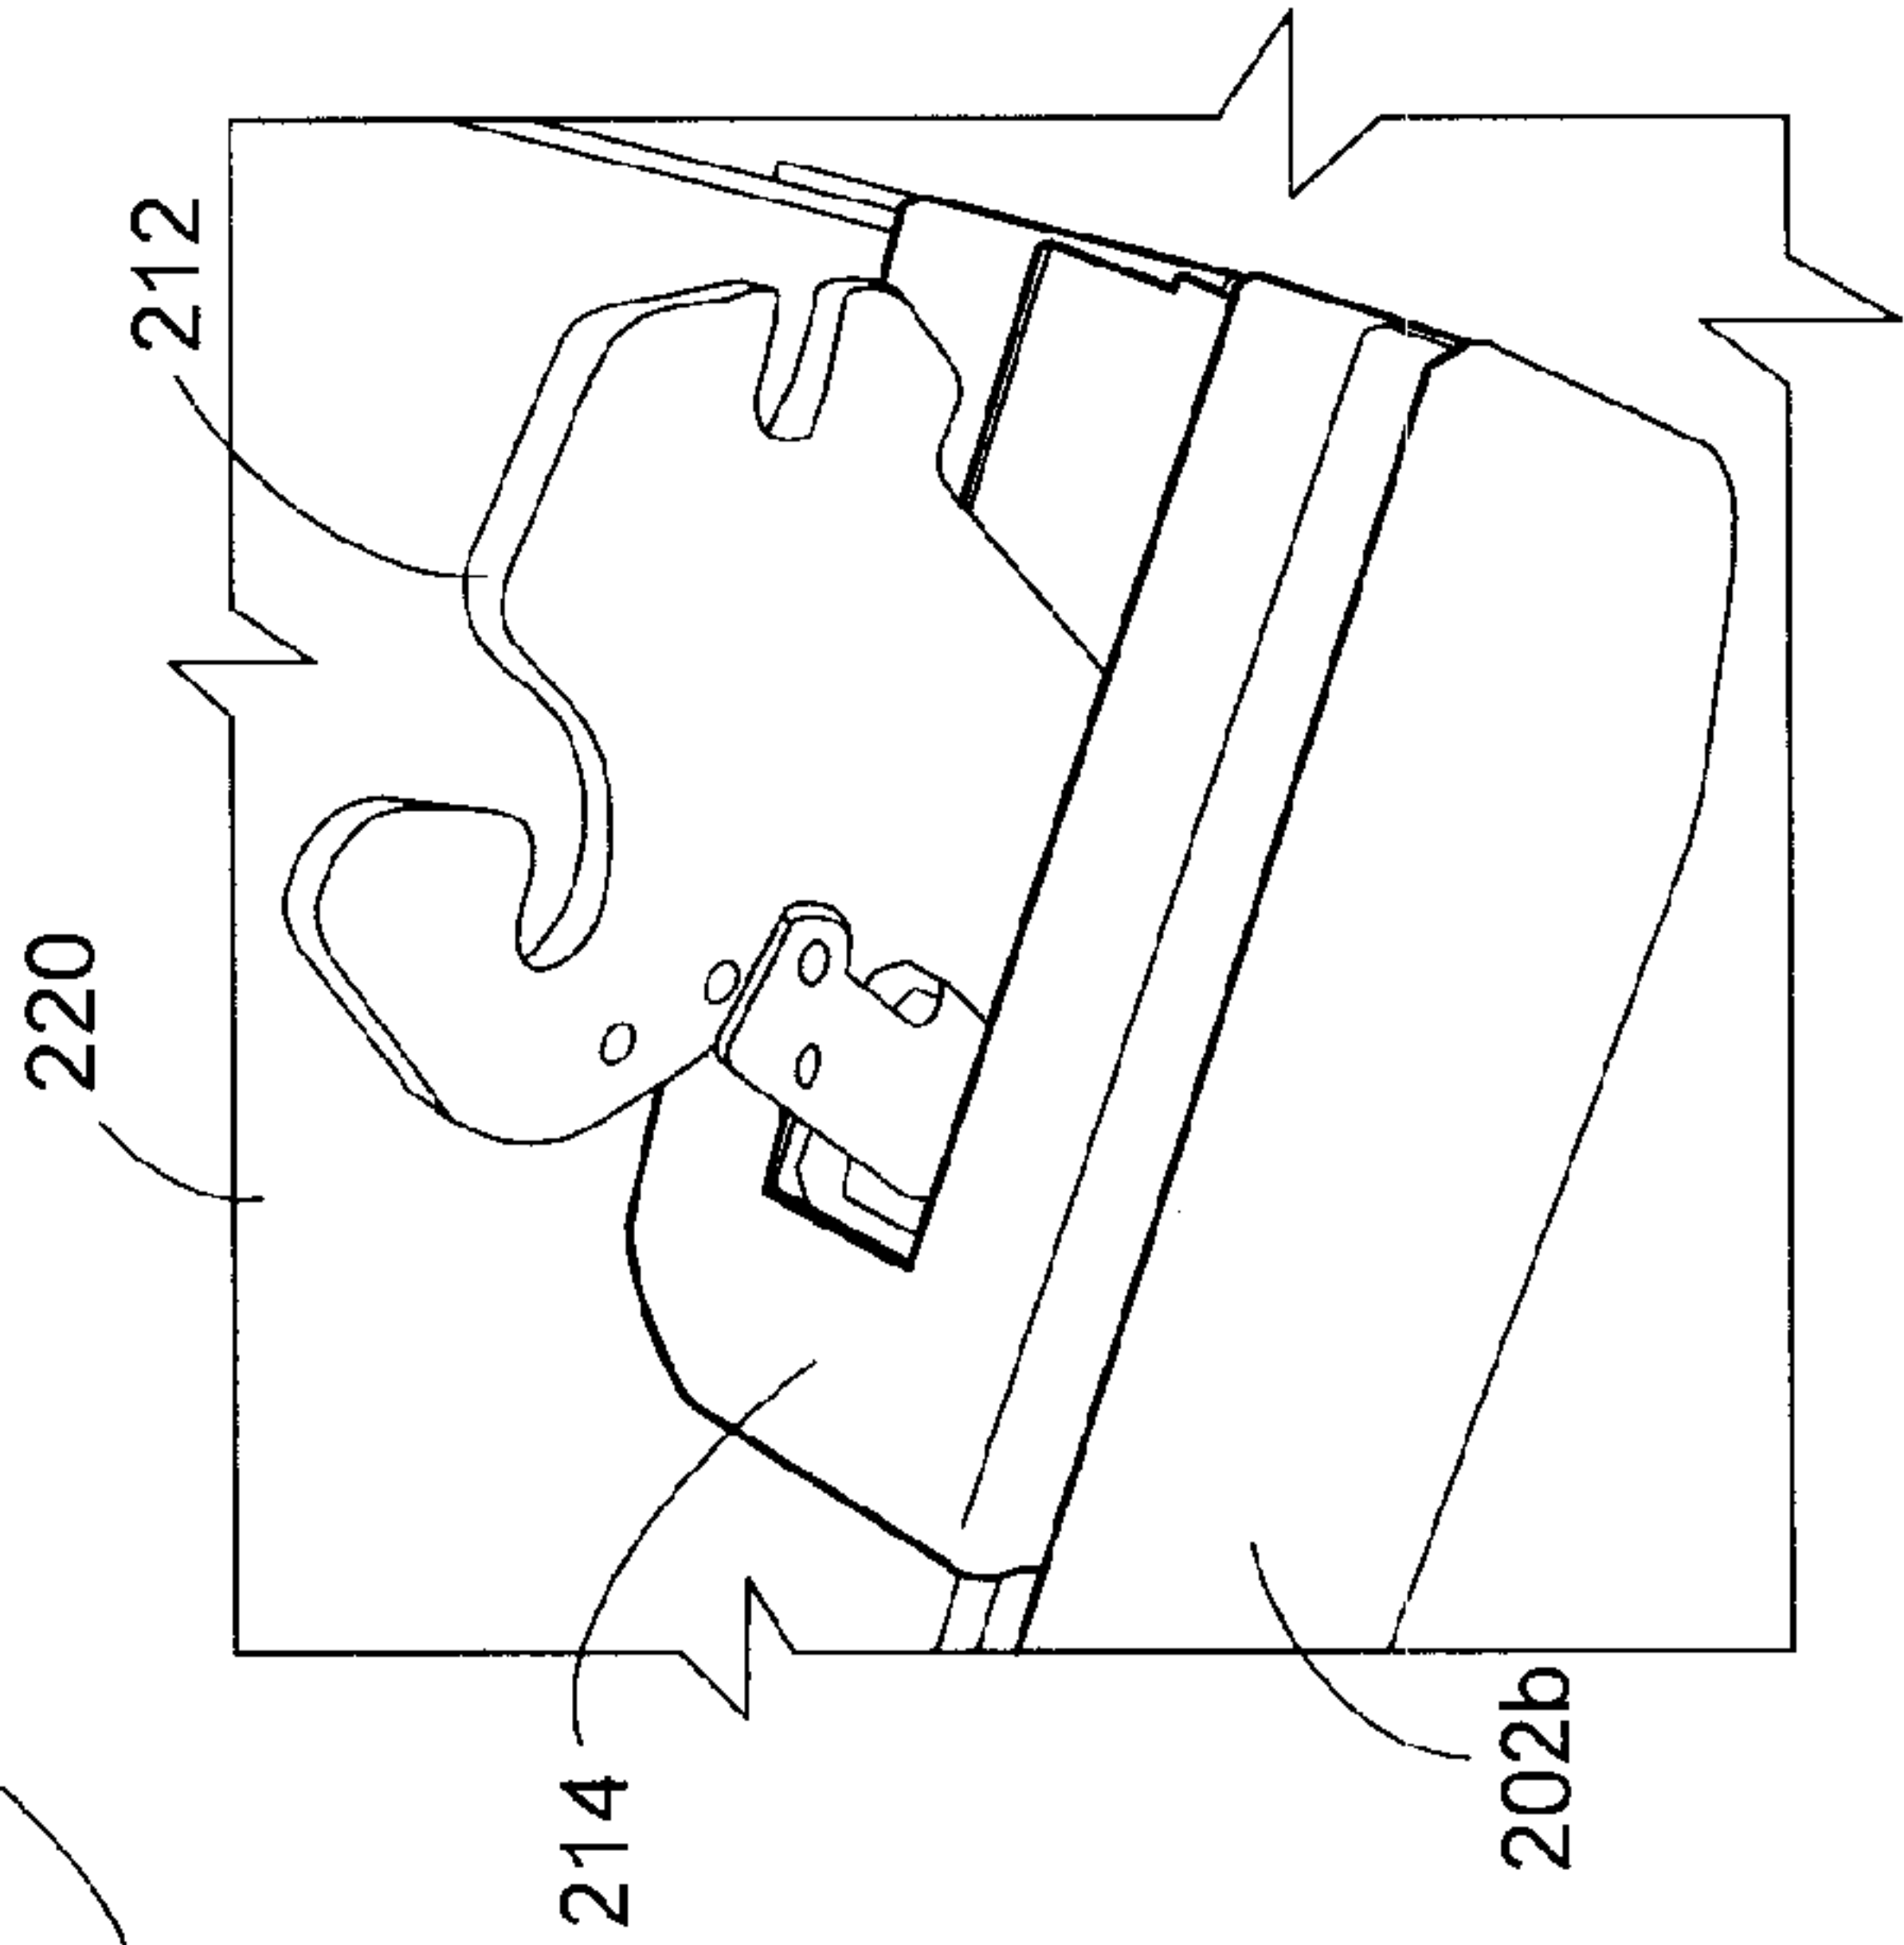
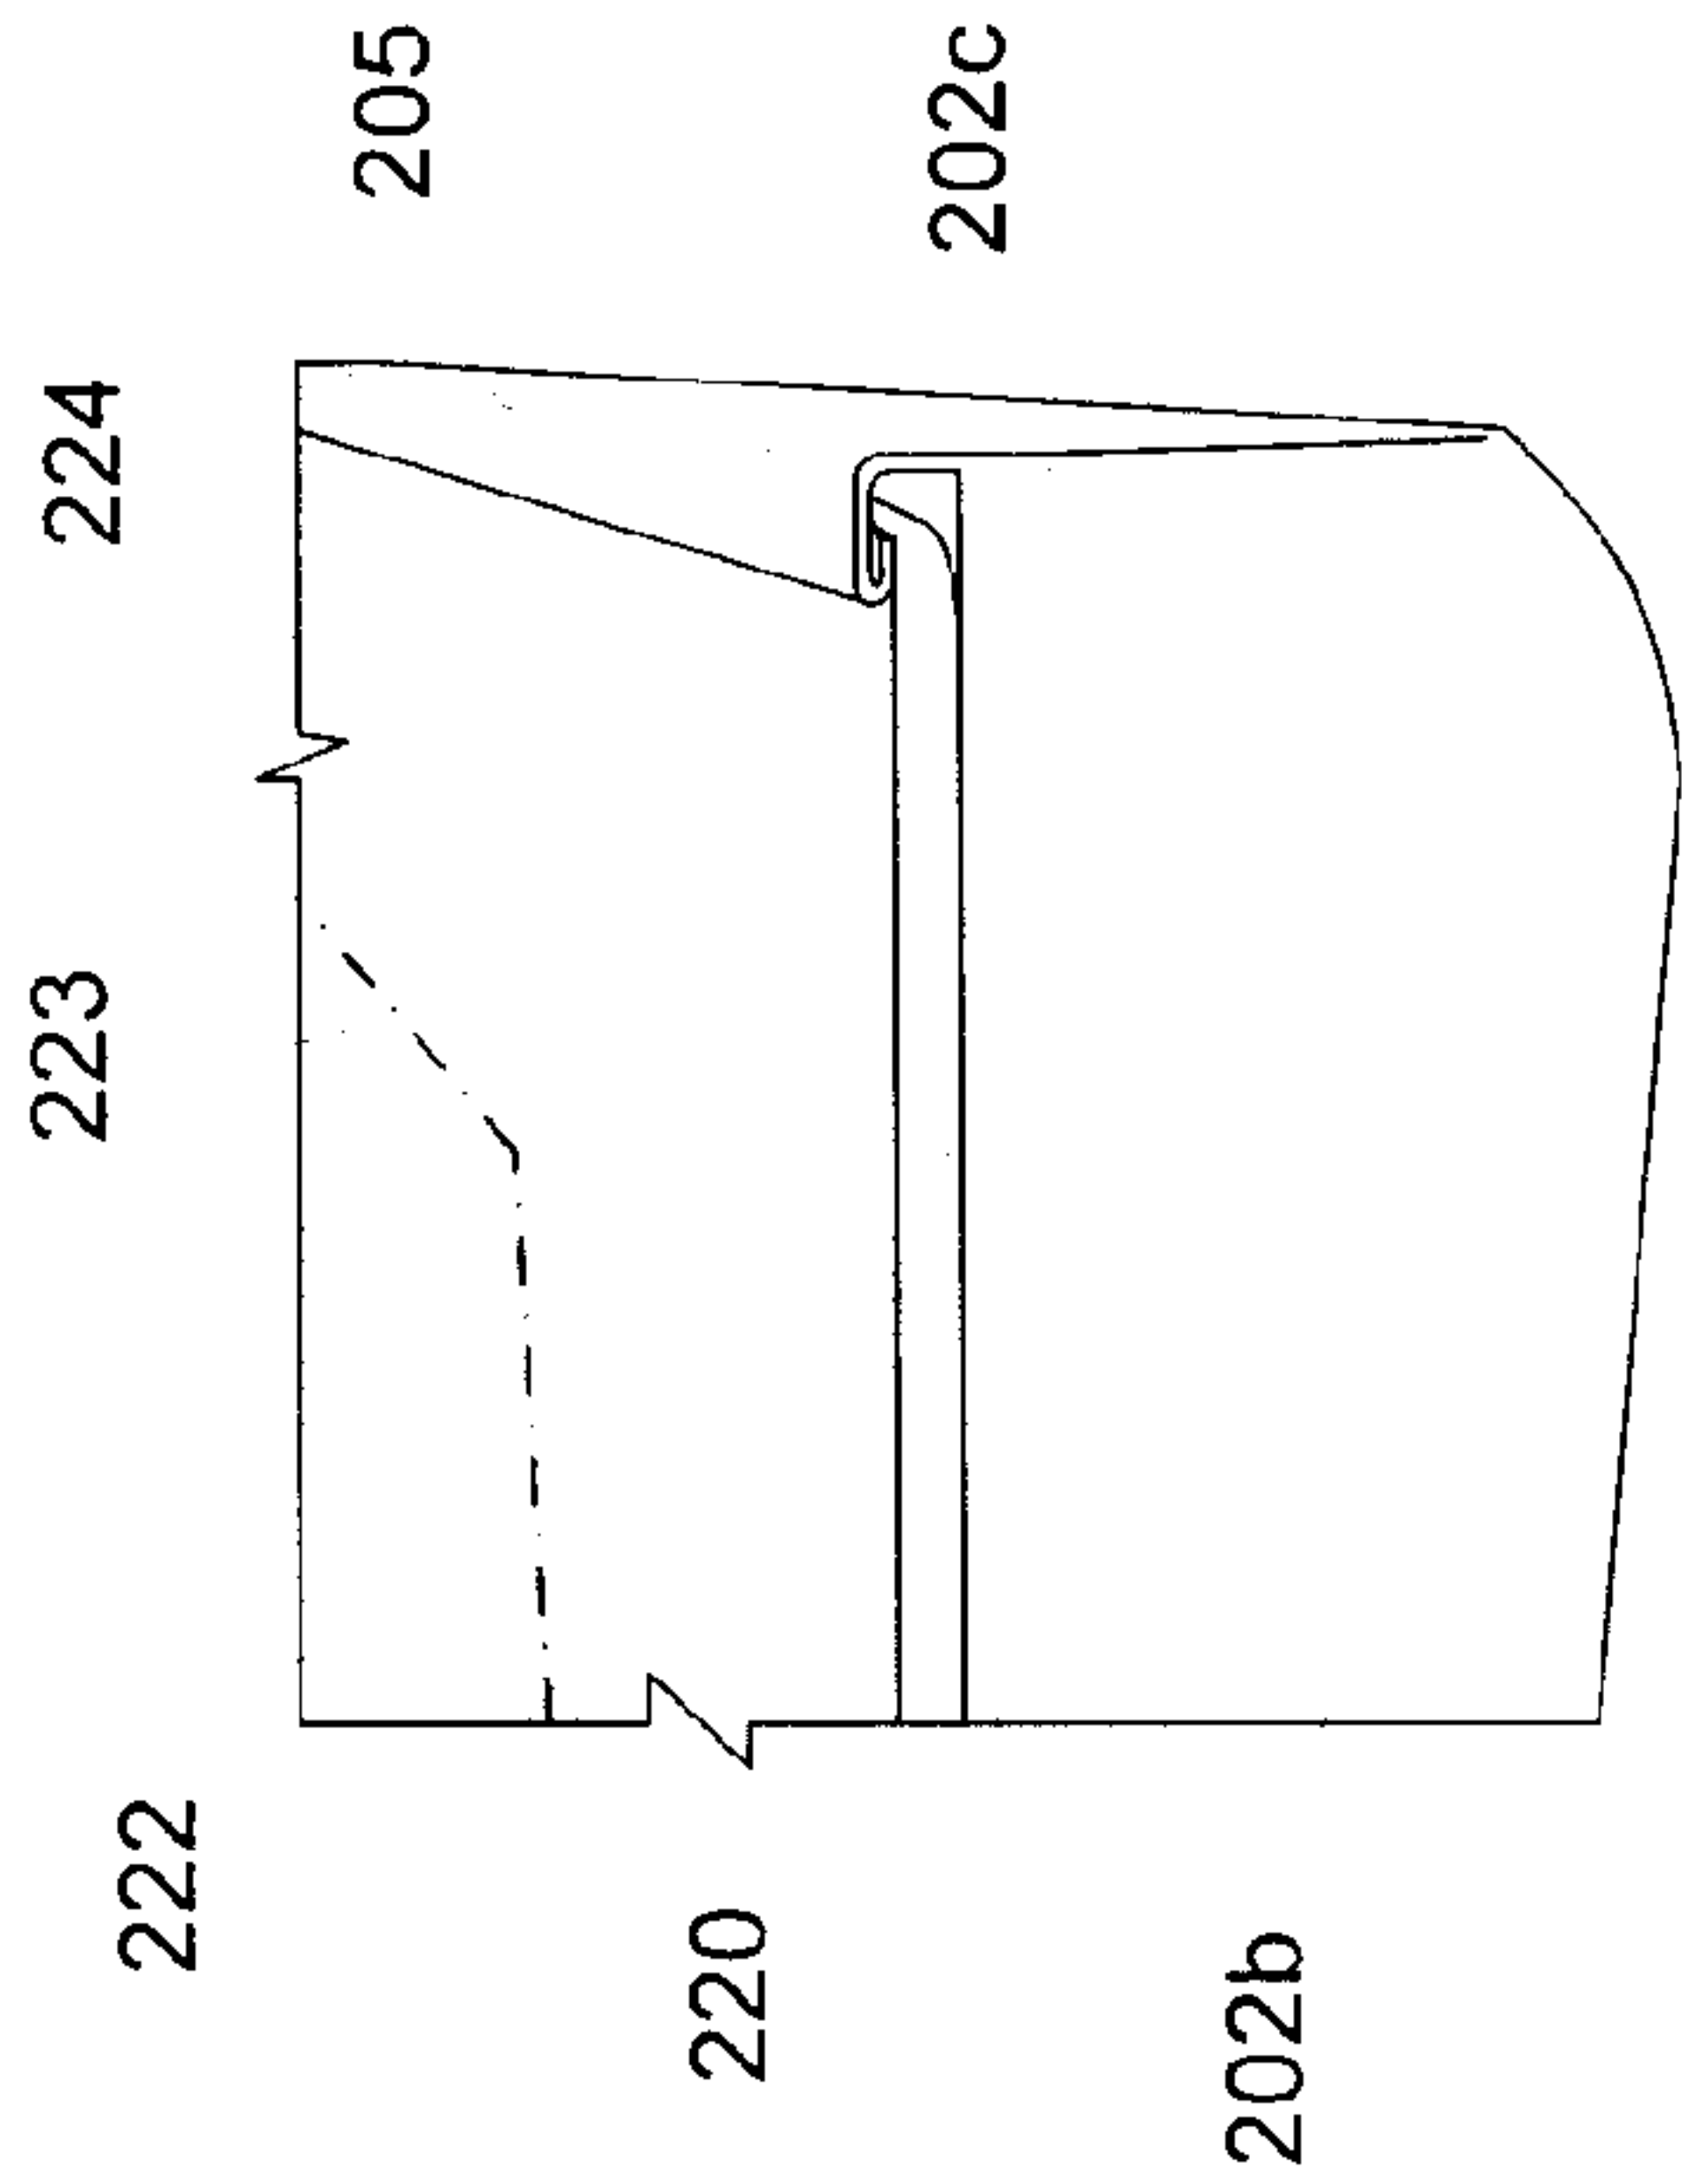


FIG. 6B

FIG. 6C

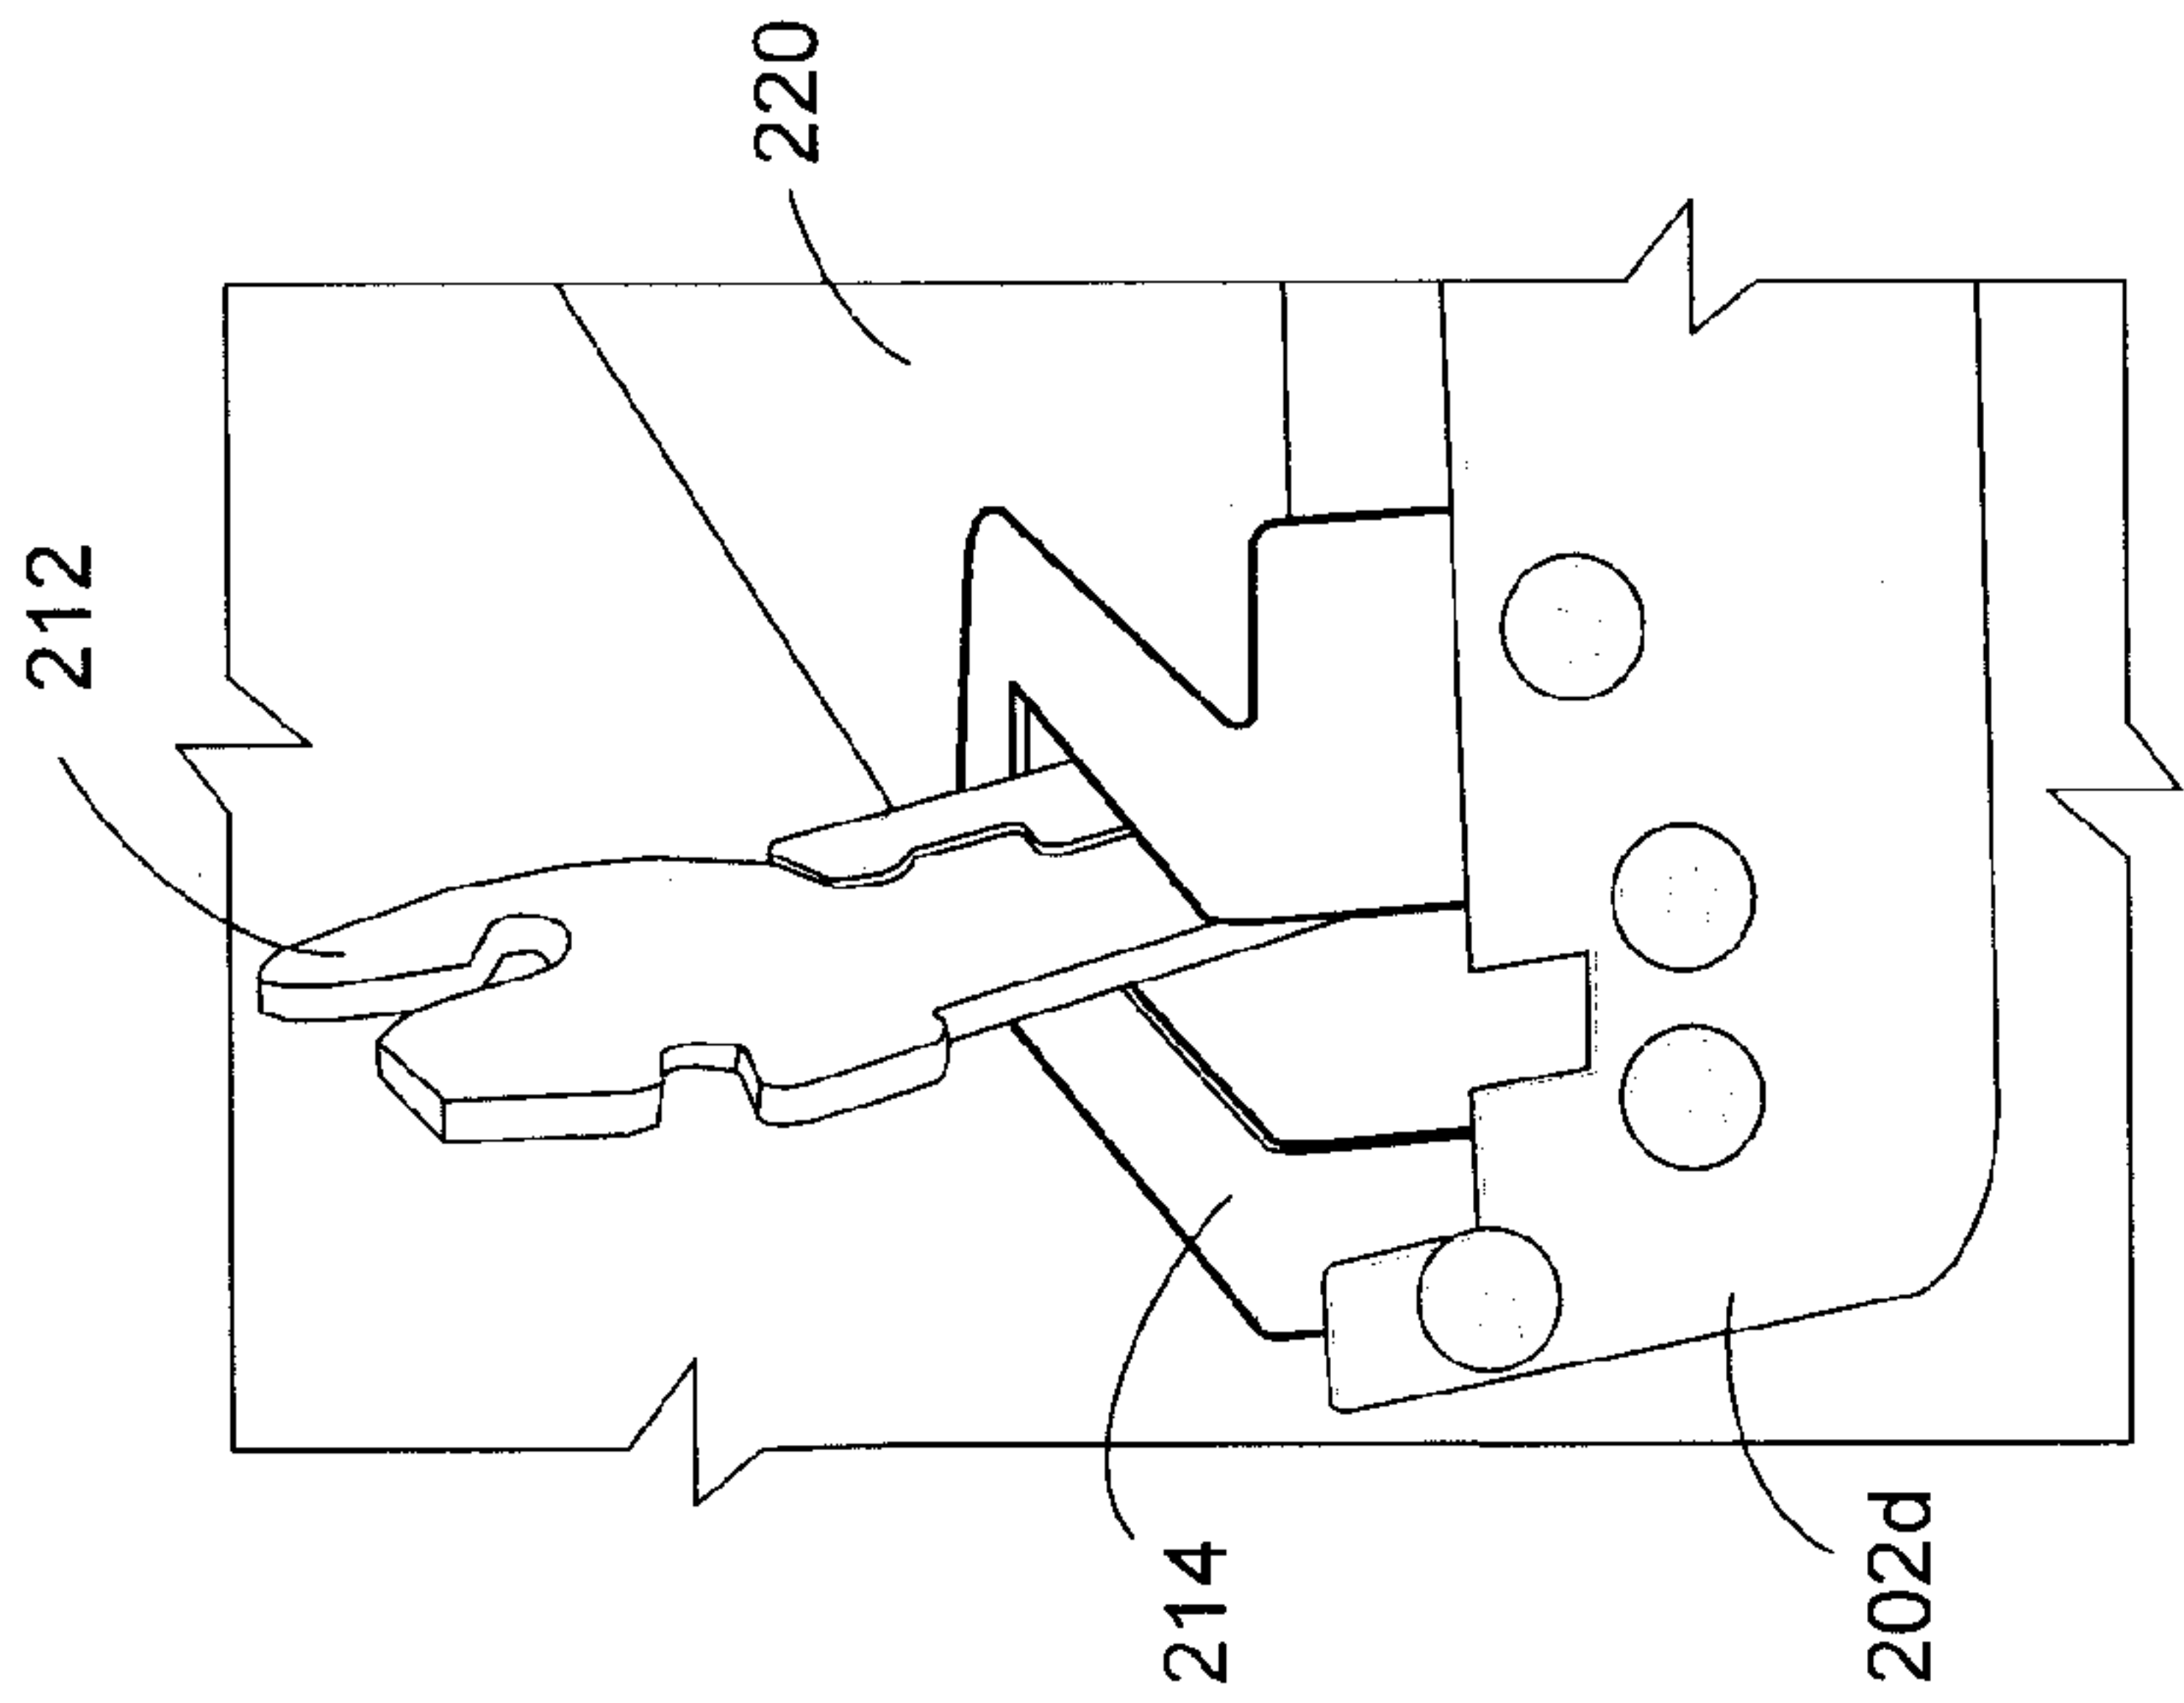


FIG. 6D

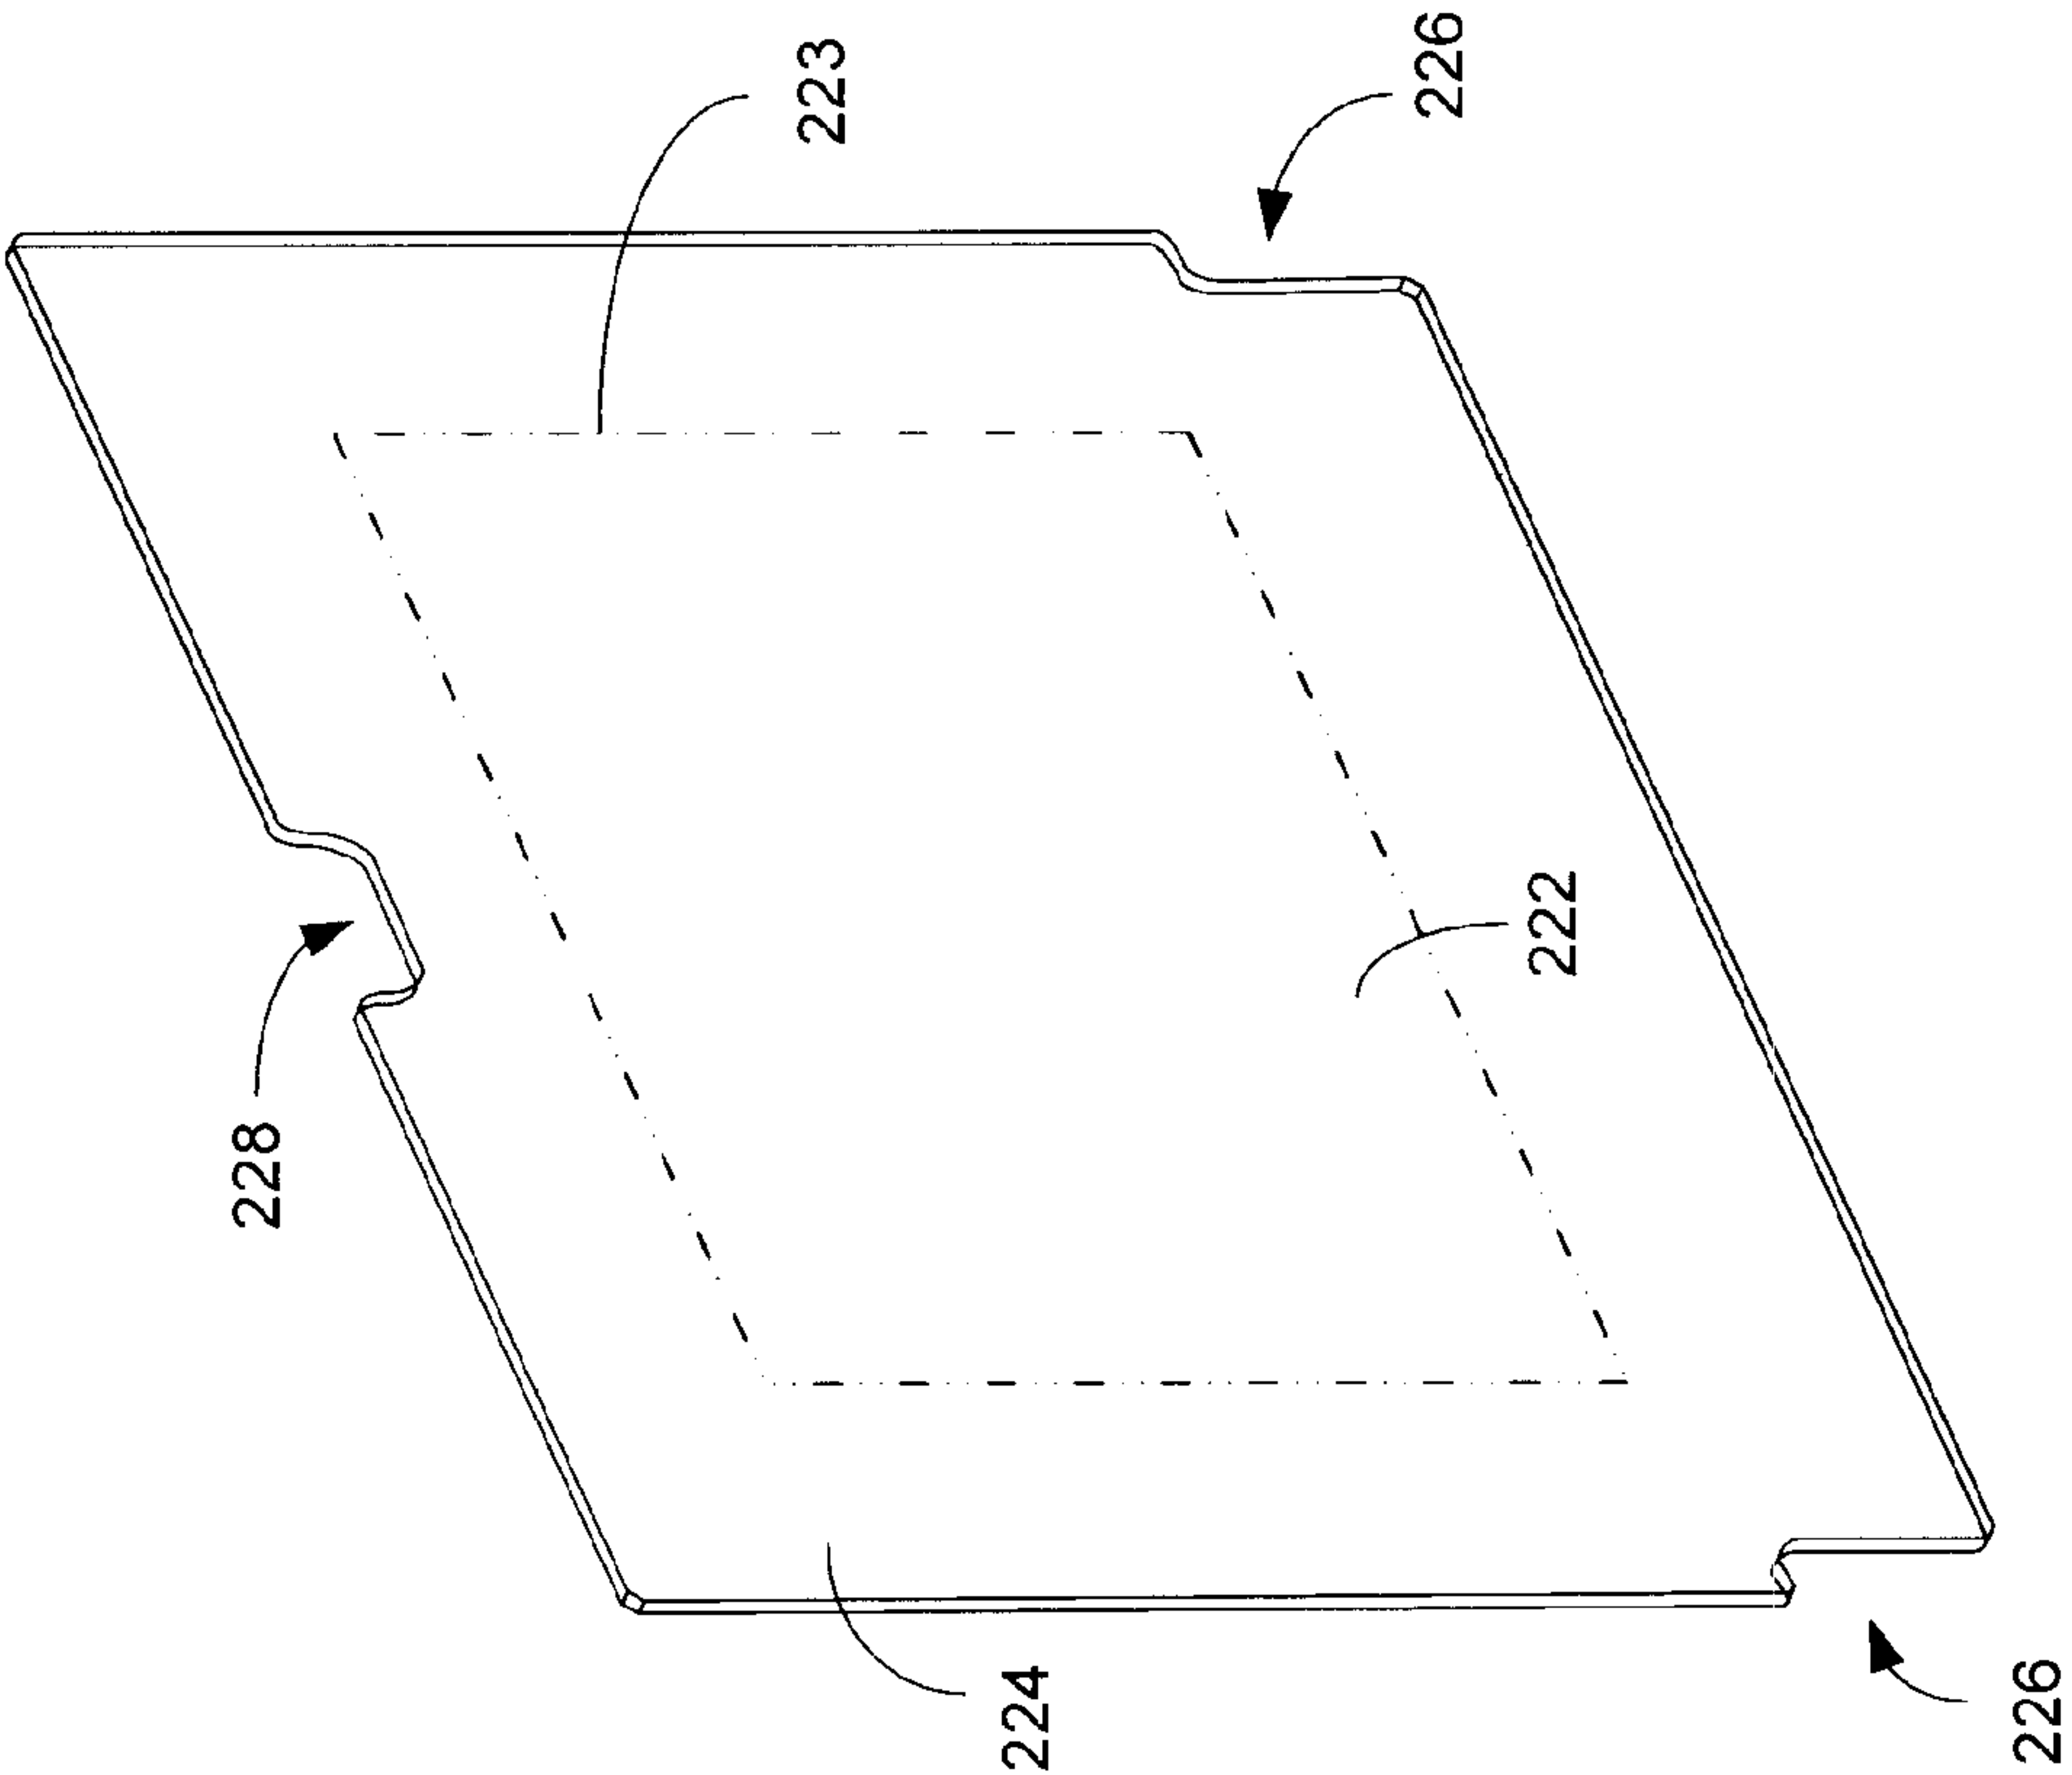


FIG. 7

220

10 / 29

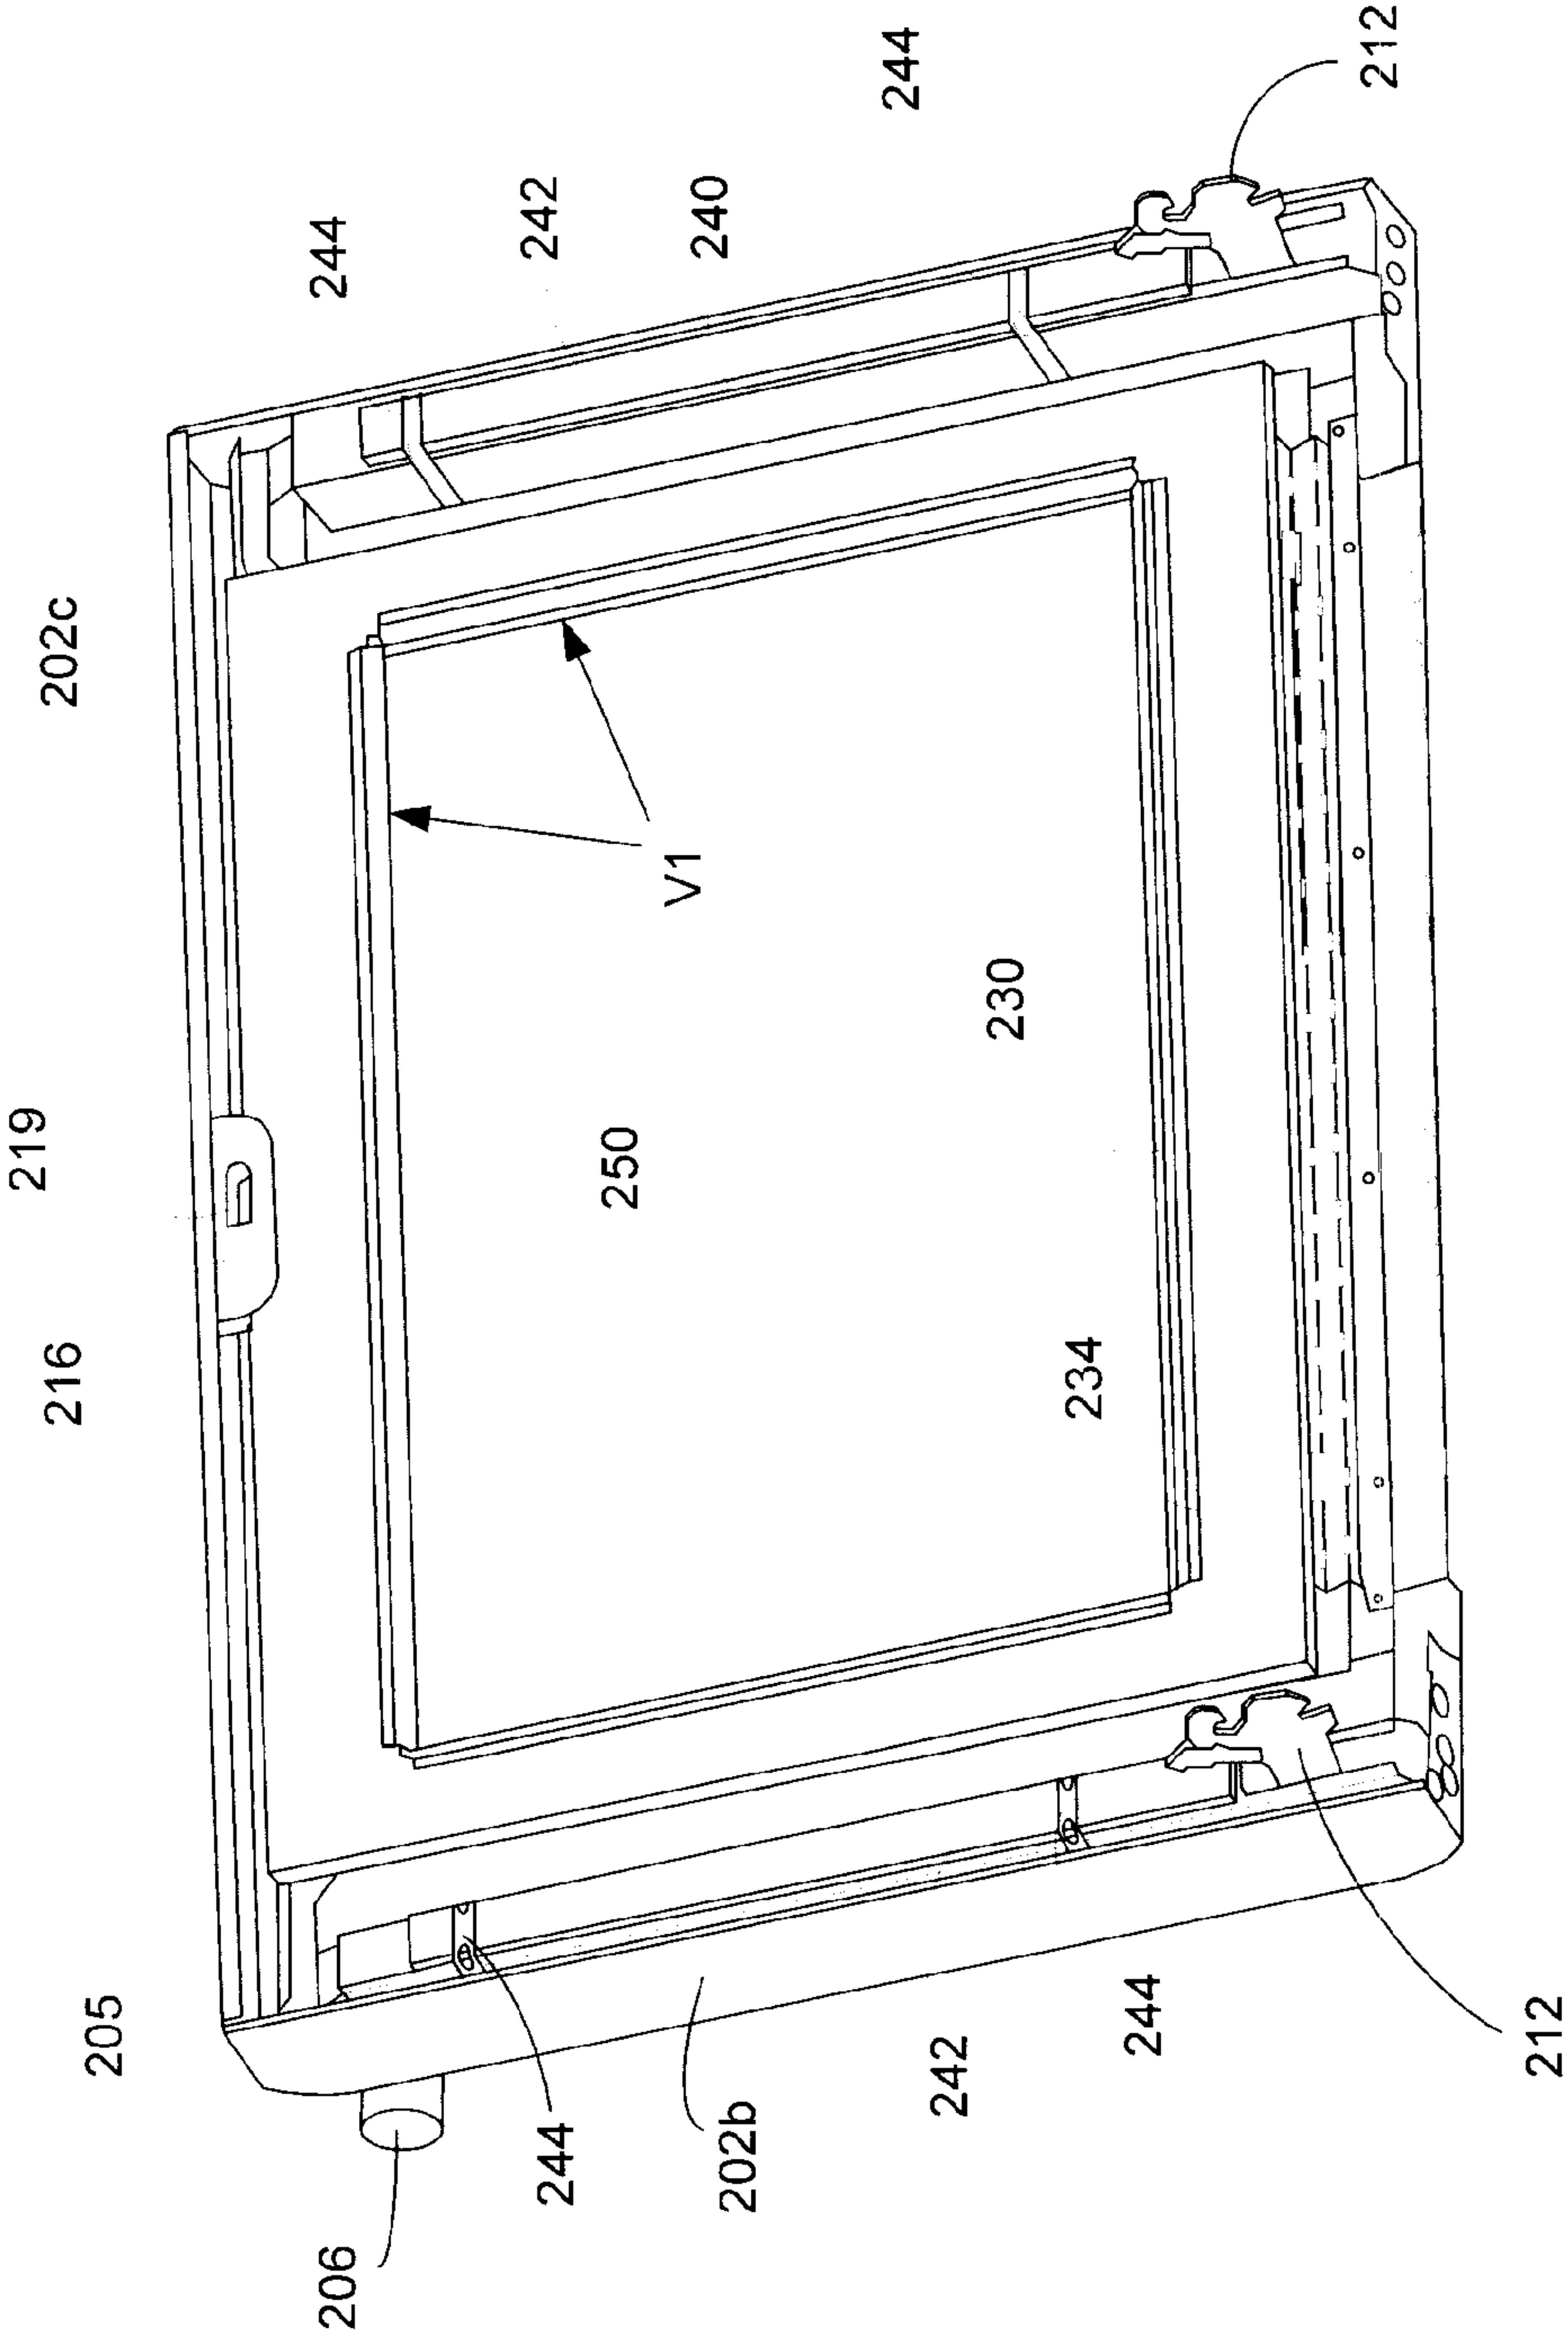


FIG. 8

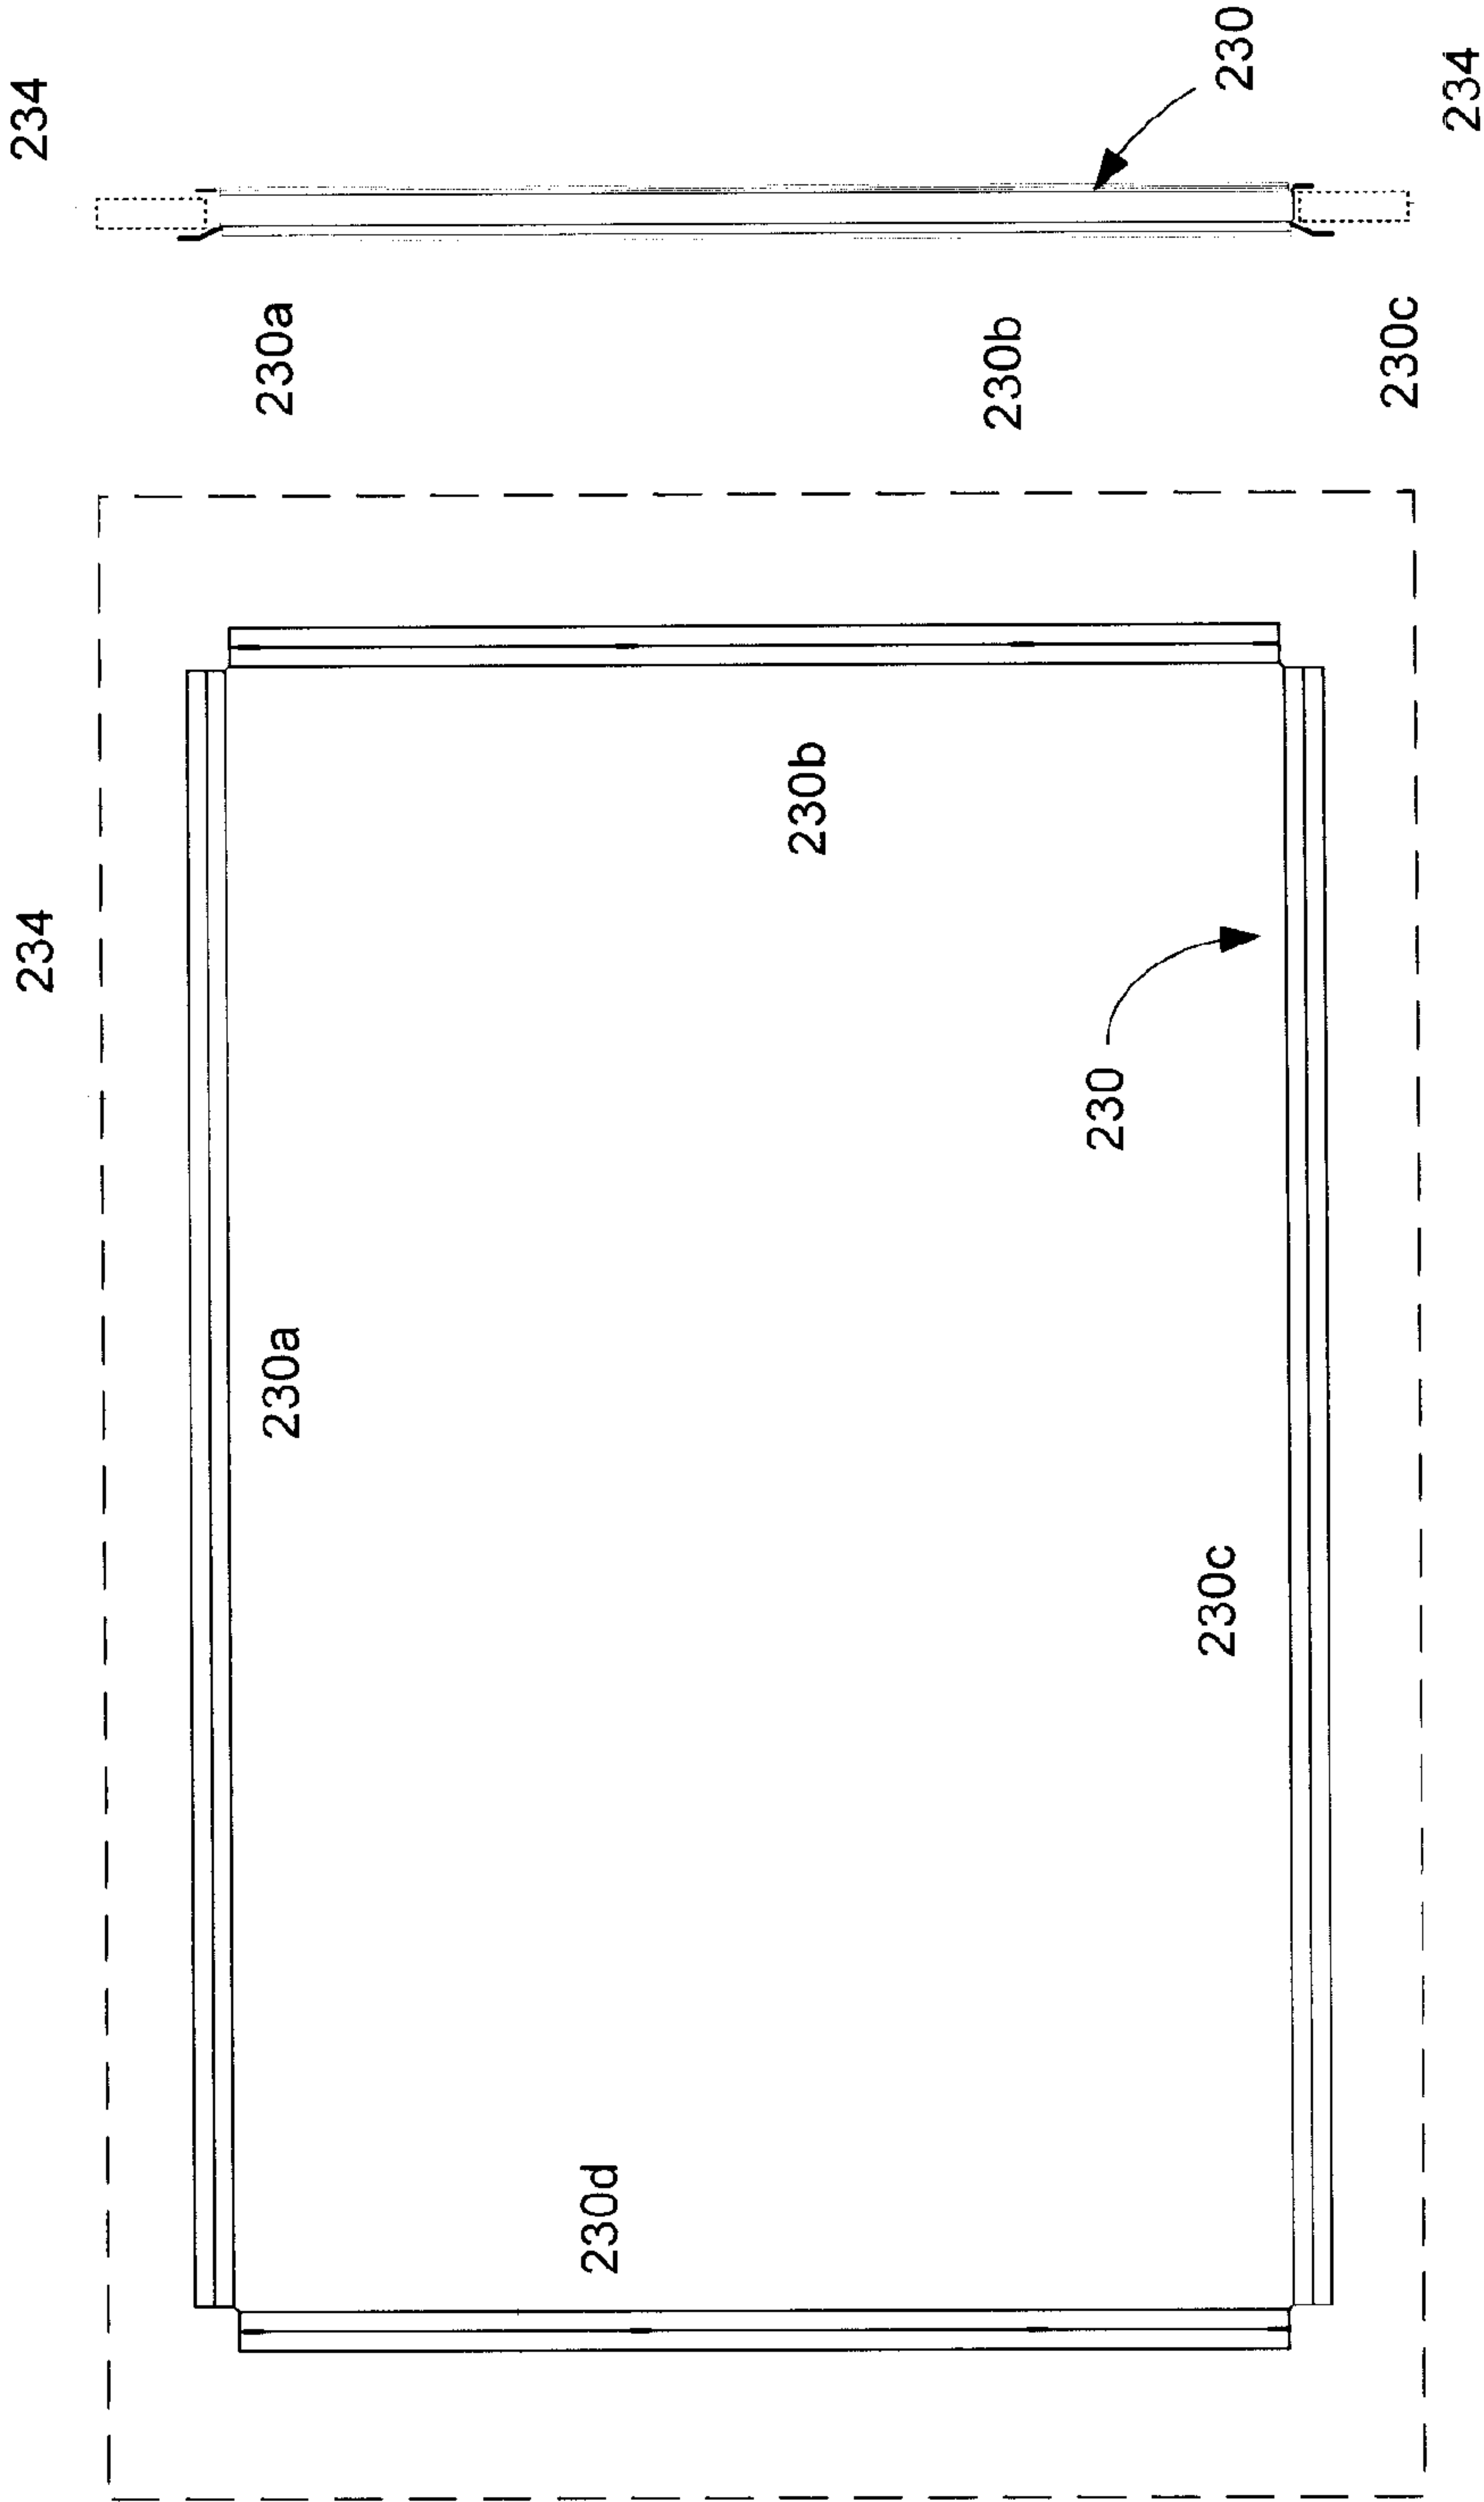


FIG. 9A

FIG. 9B

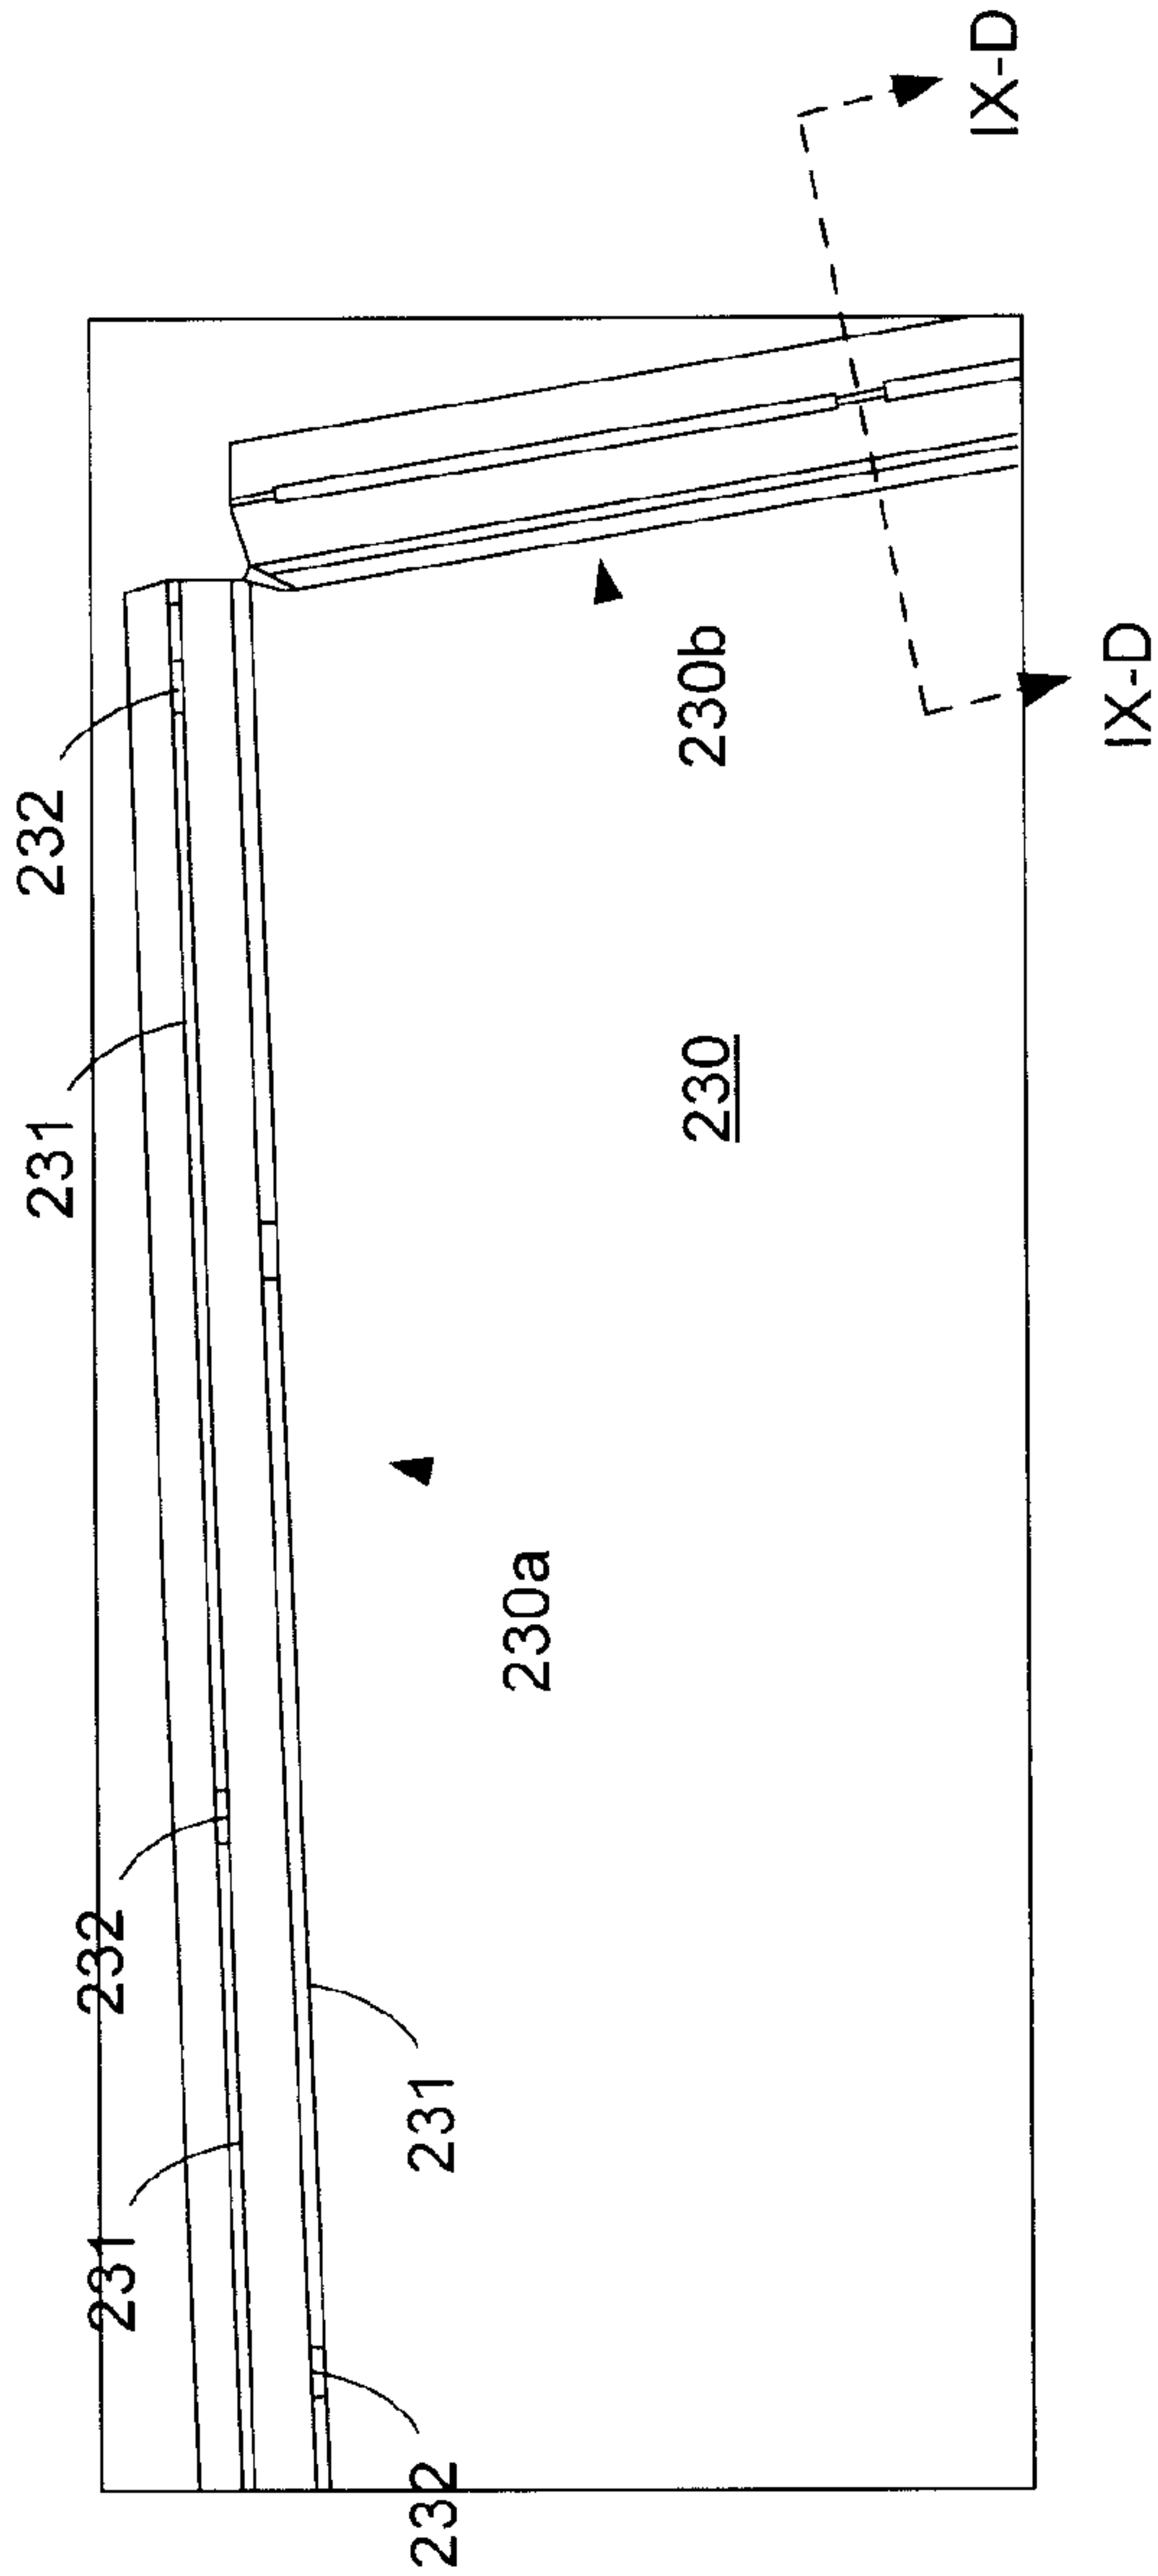


FIG. 9C

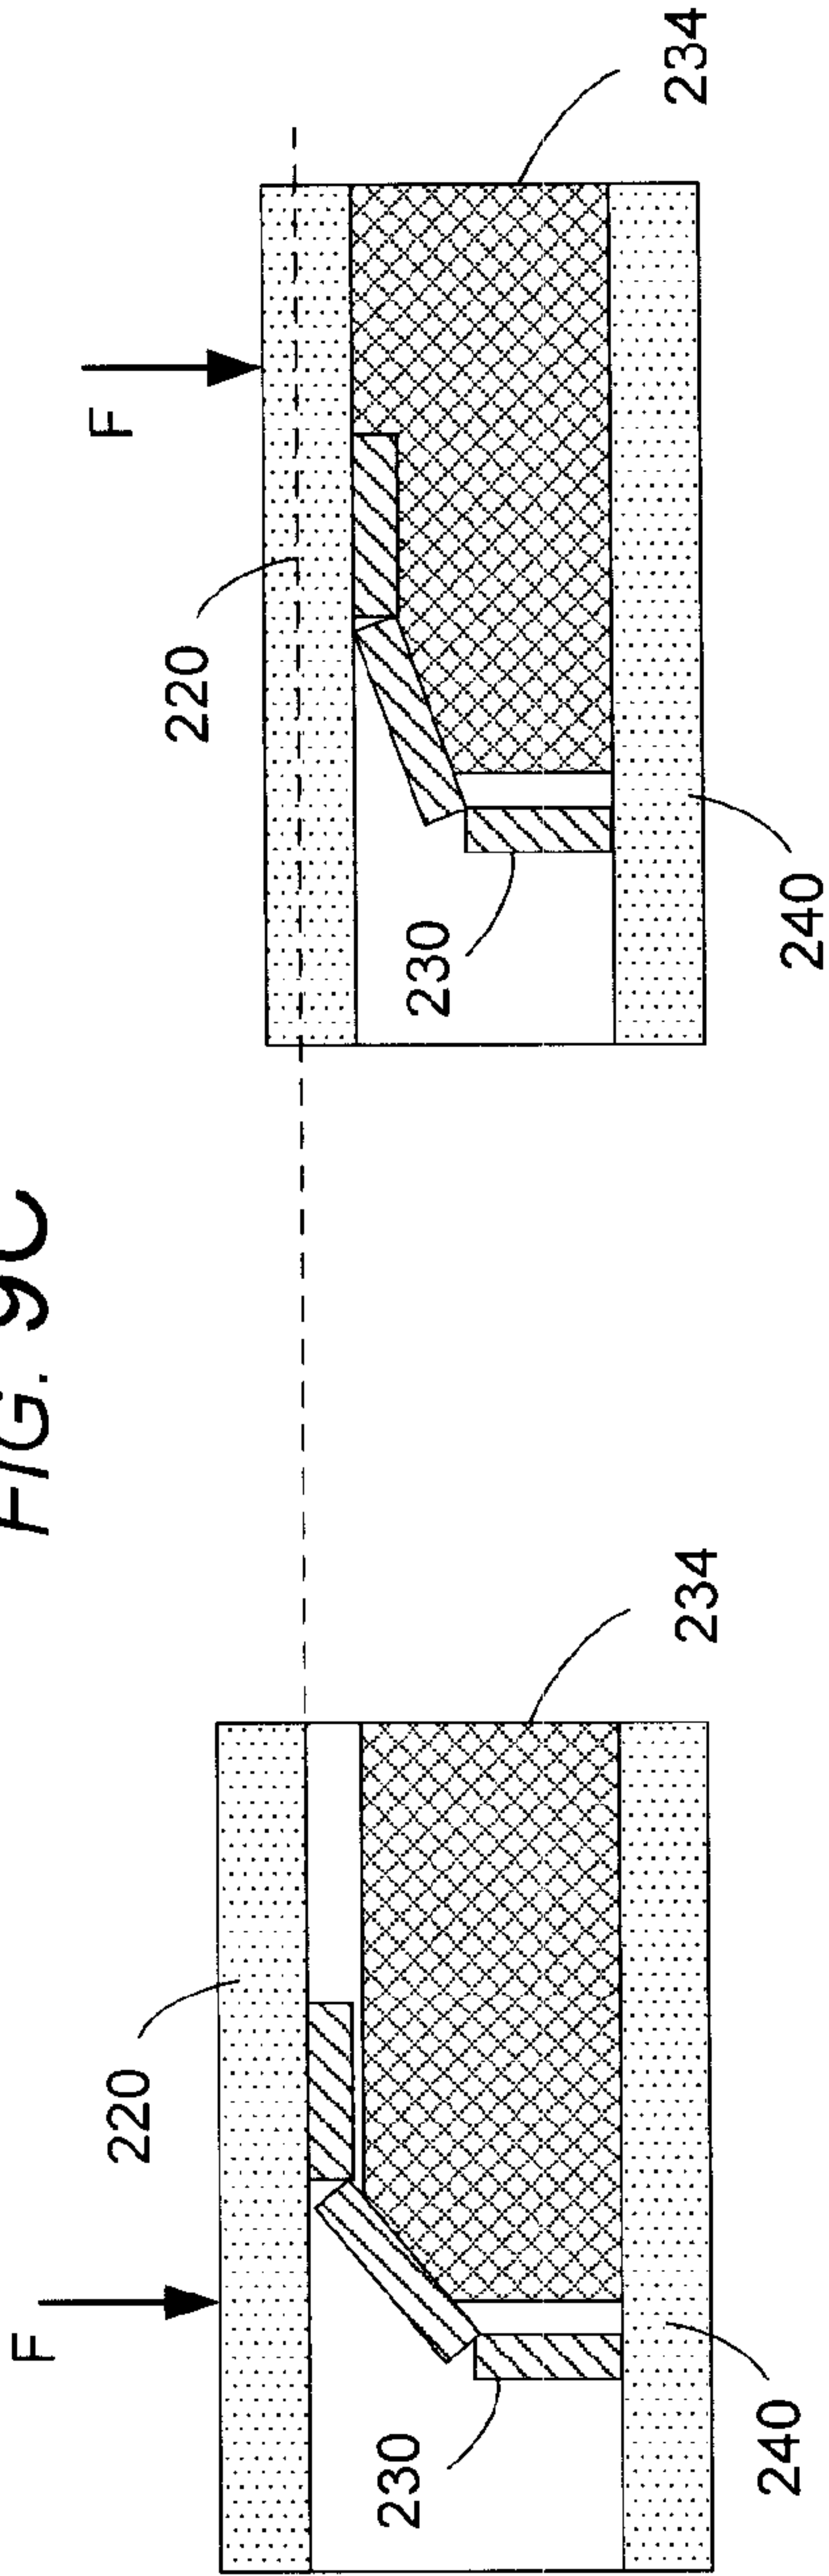


FIG. 9D

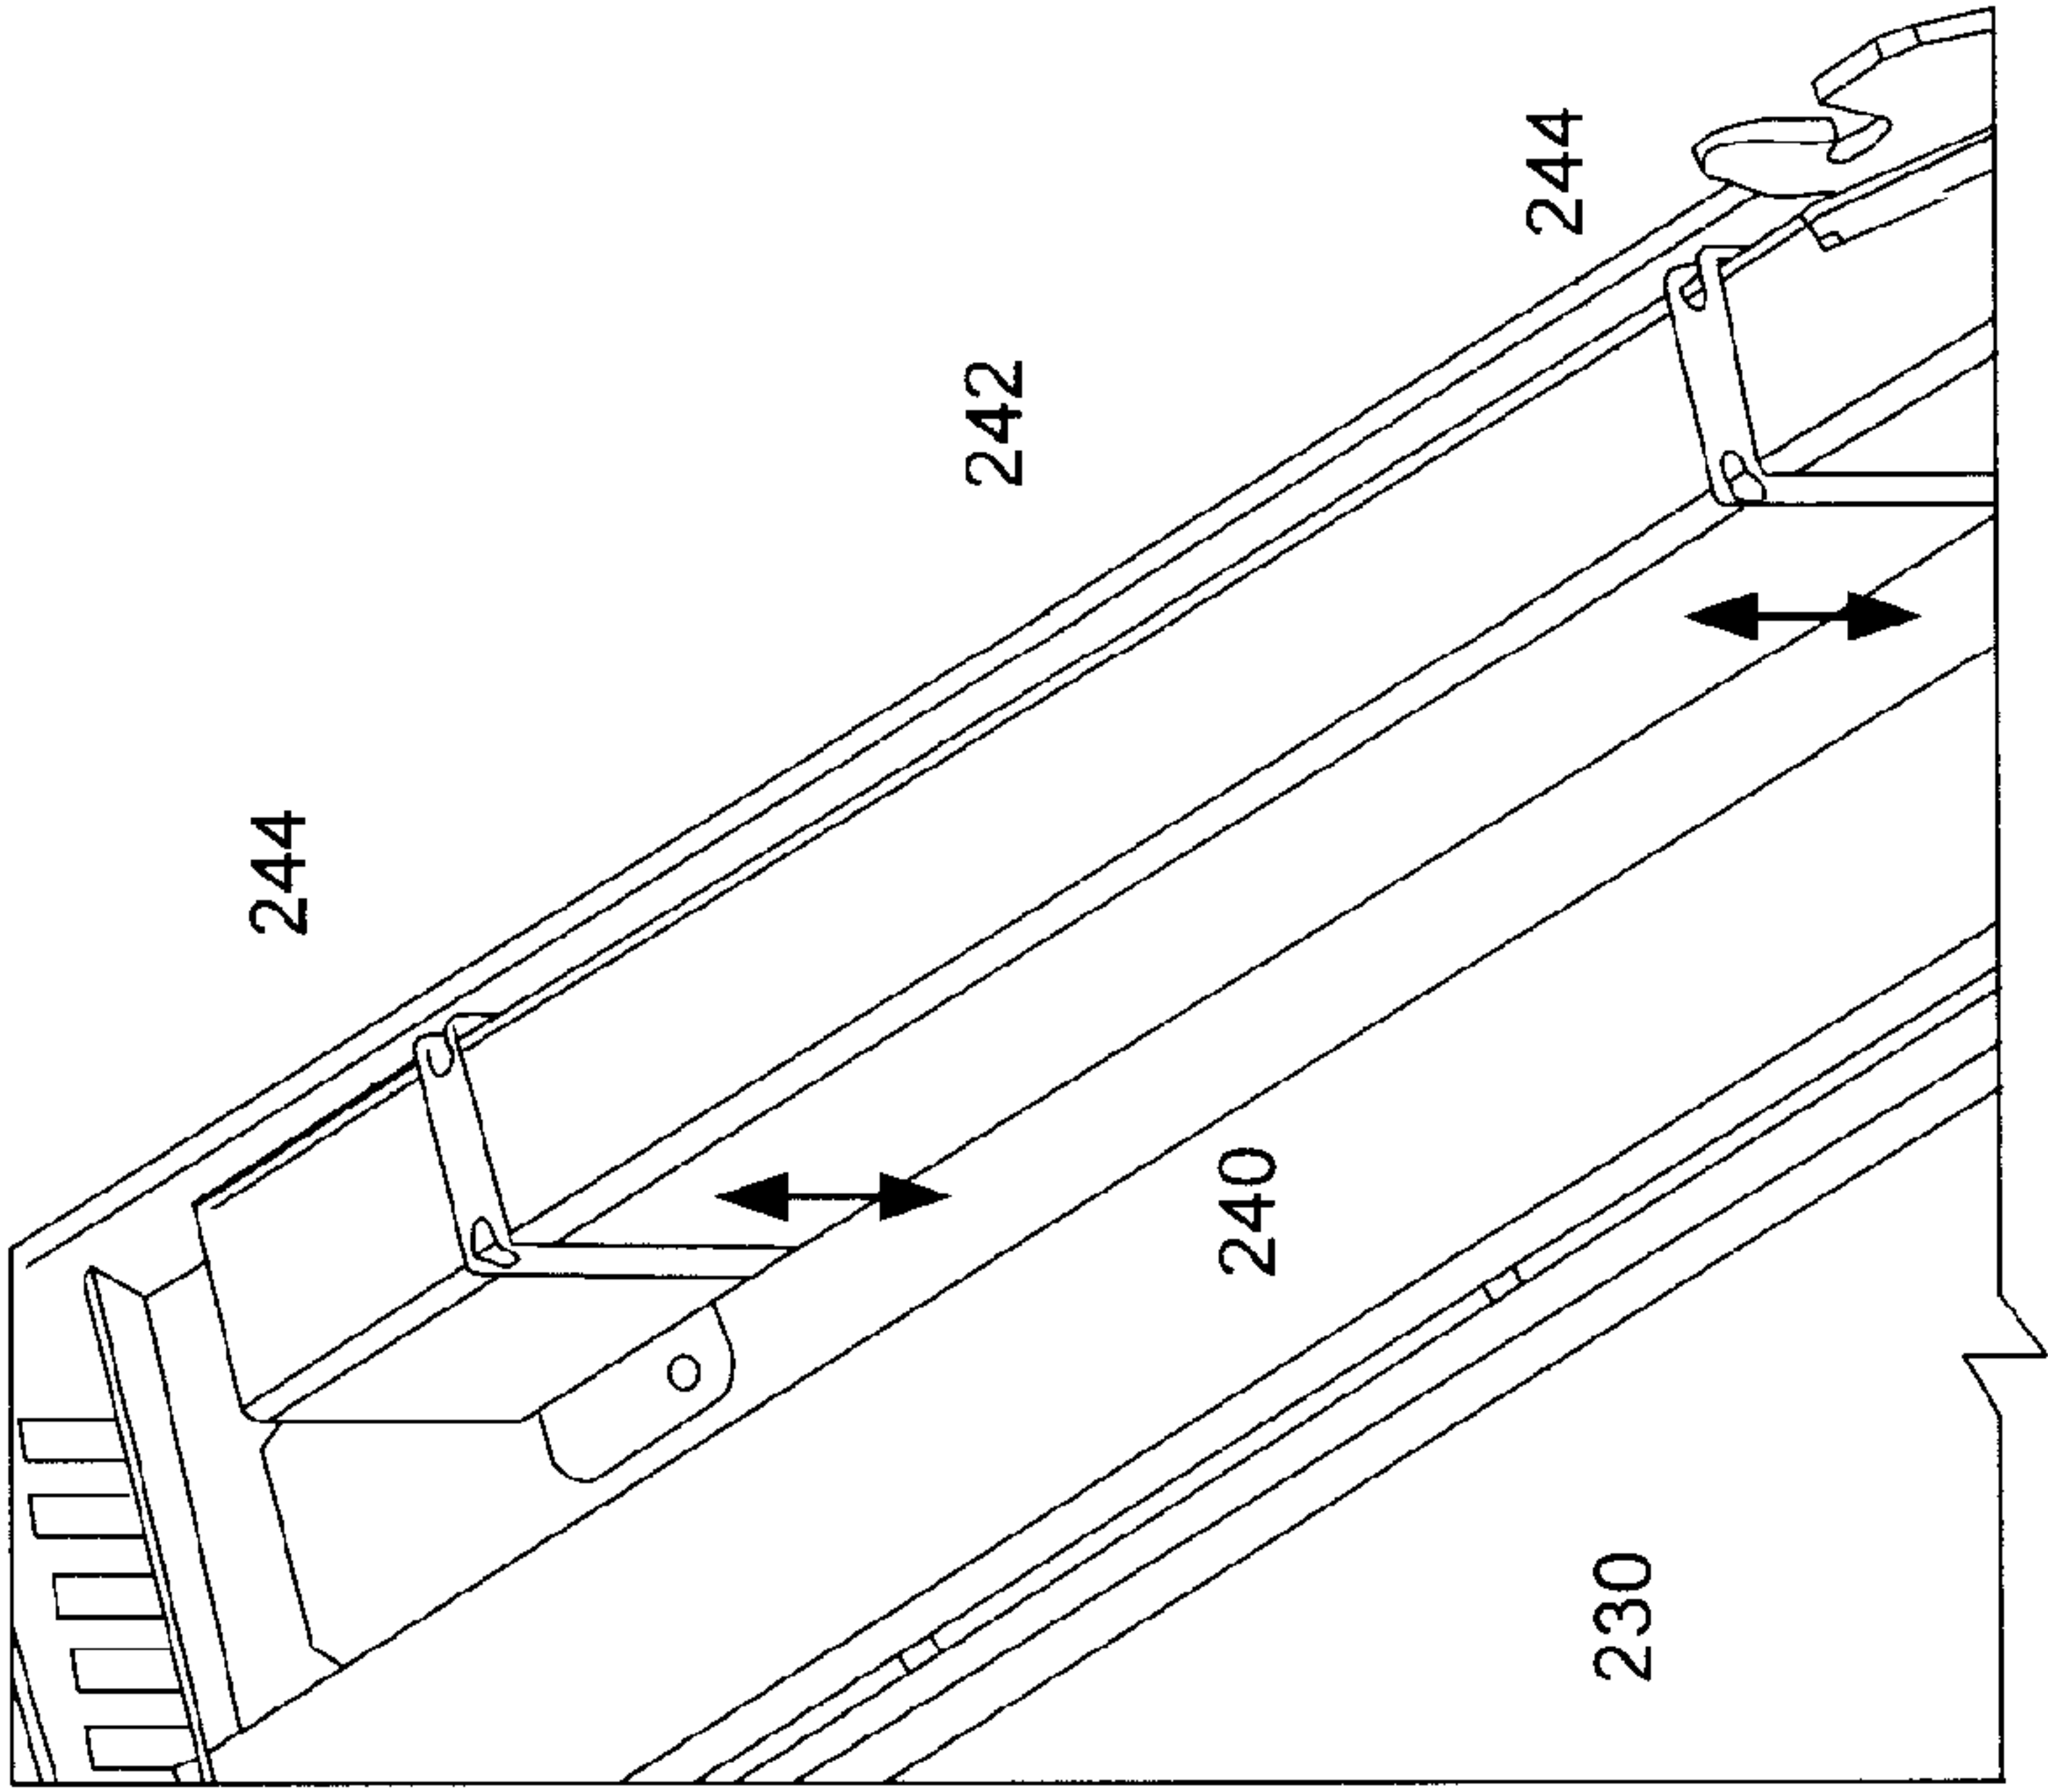


FIG. 10A

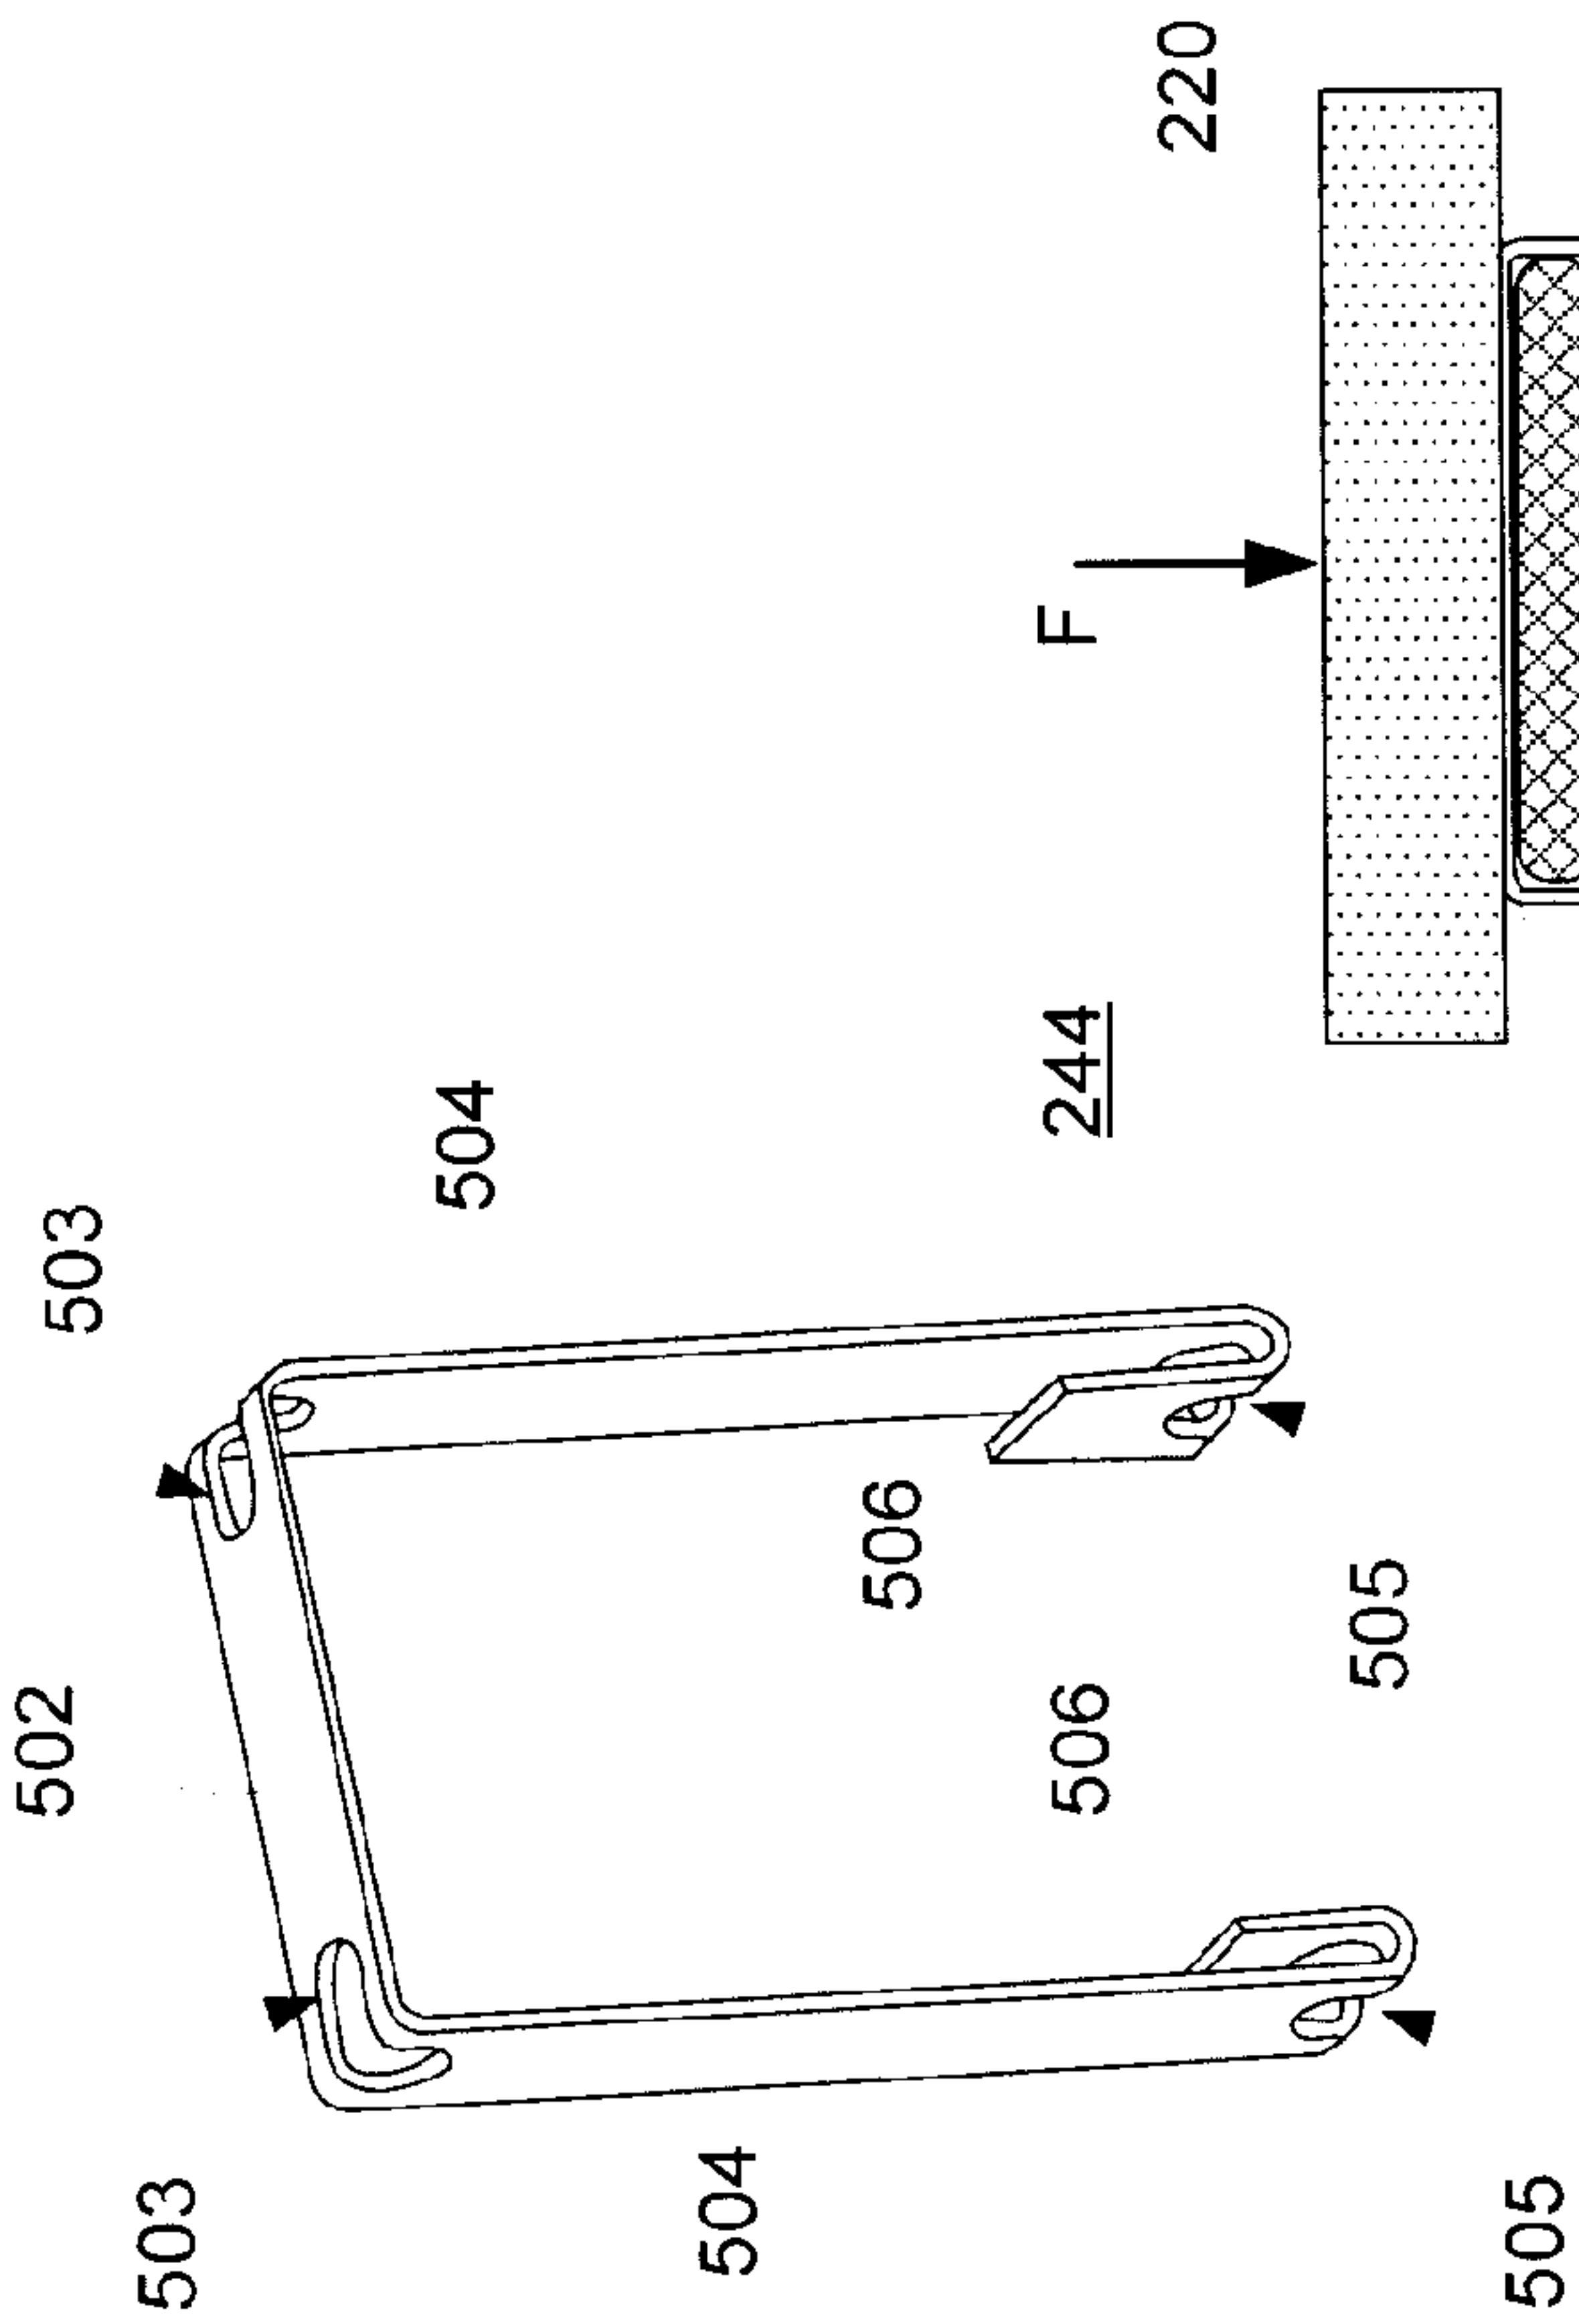


FIG. 10B

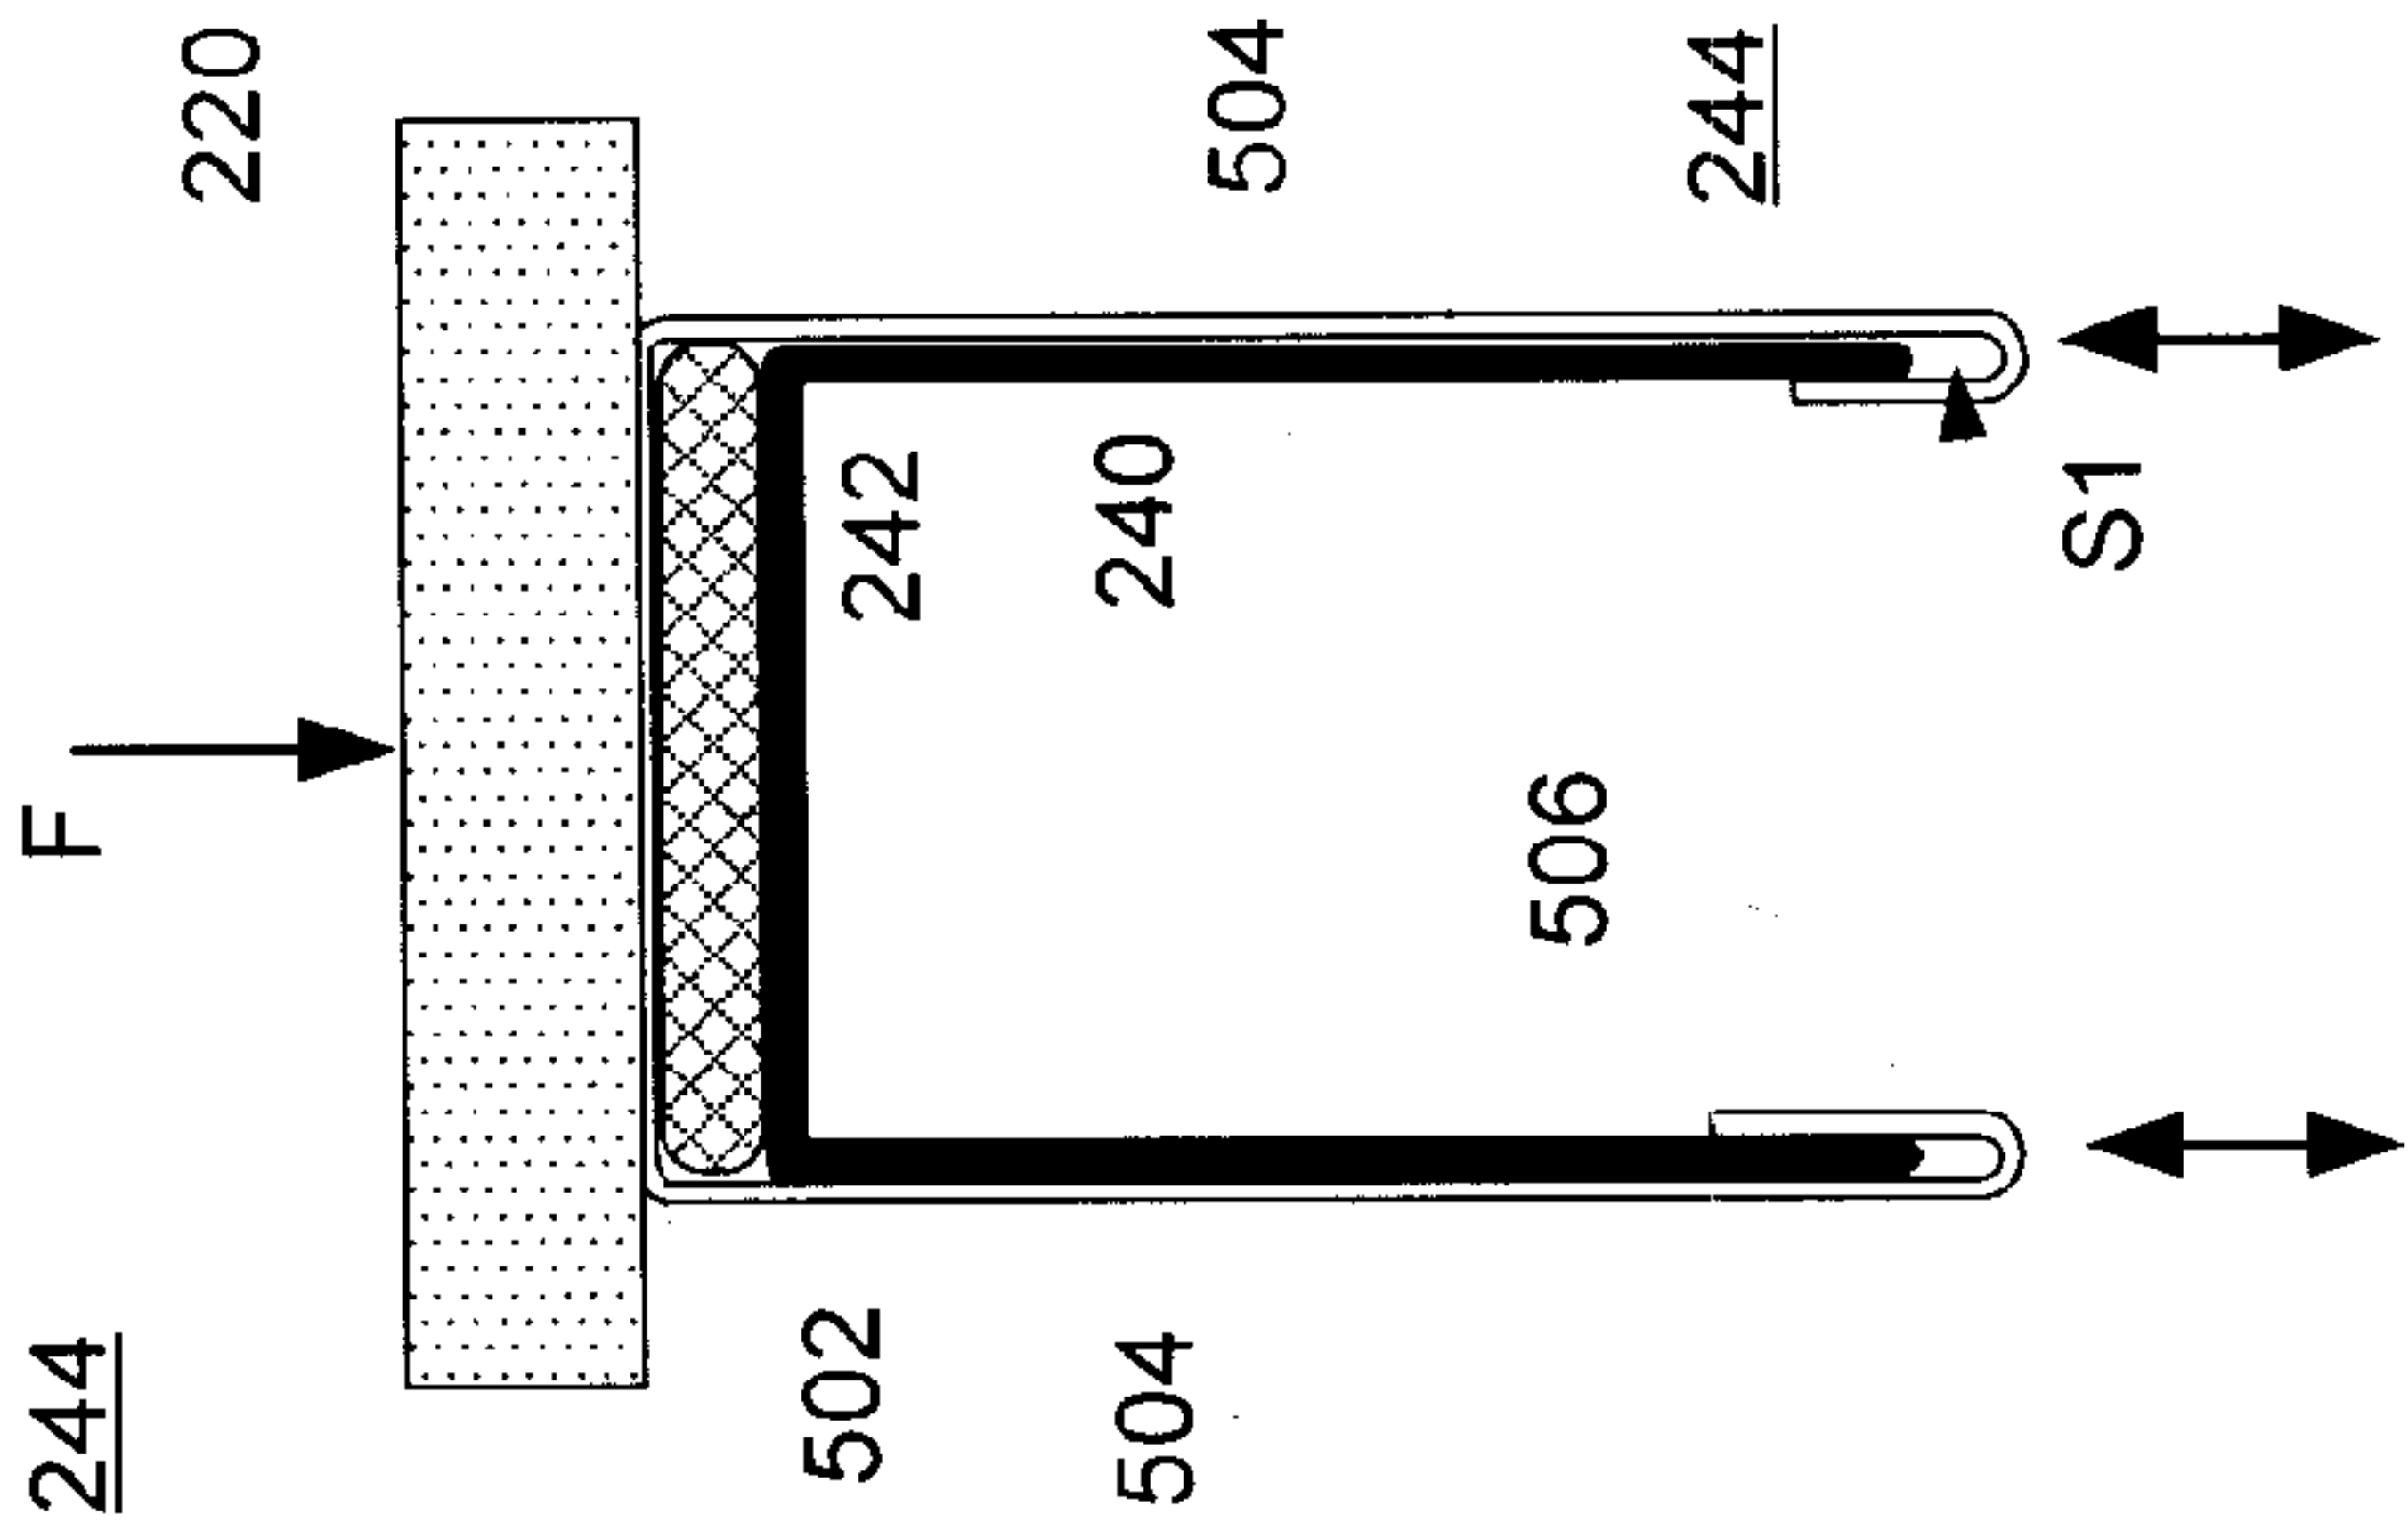


FIG. 10C

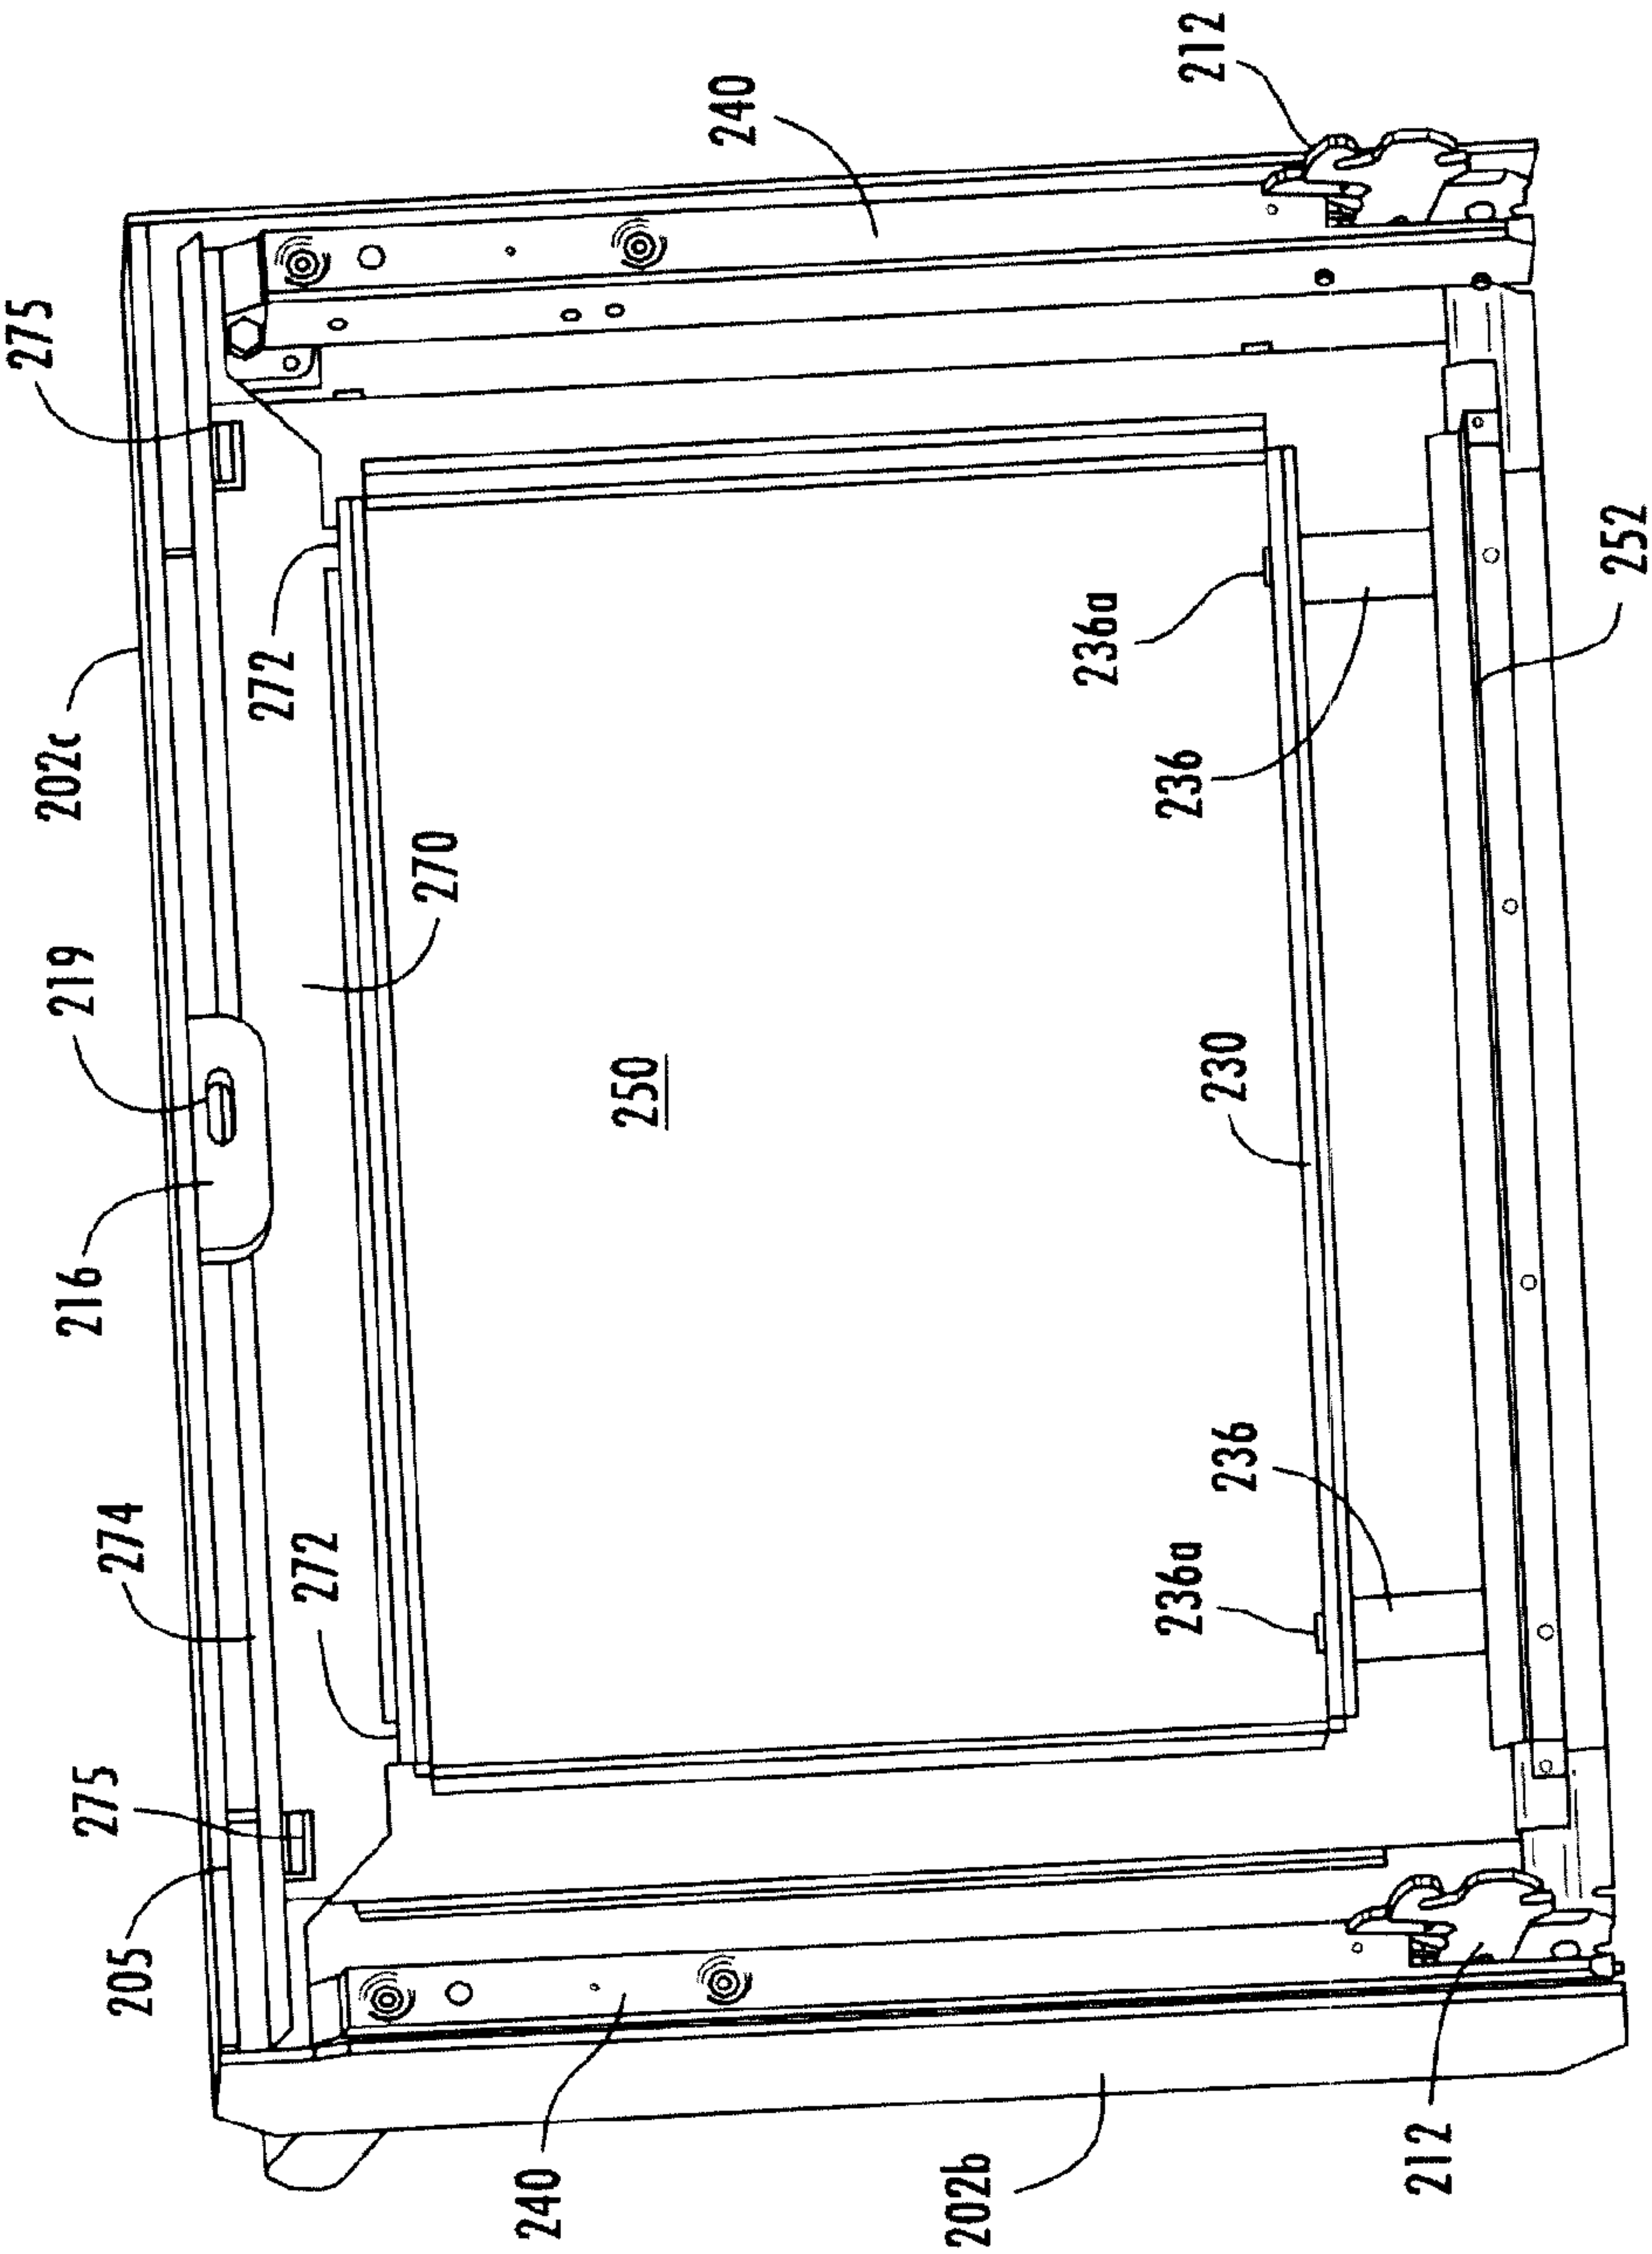


FIG. 11

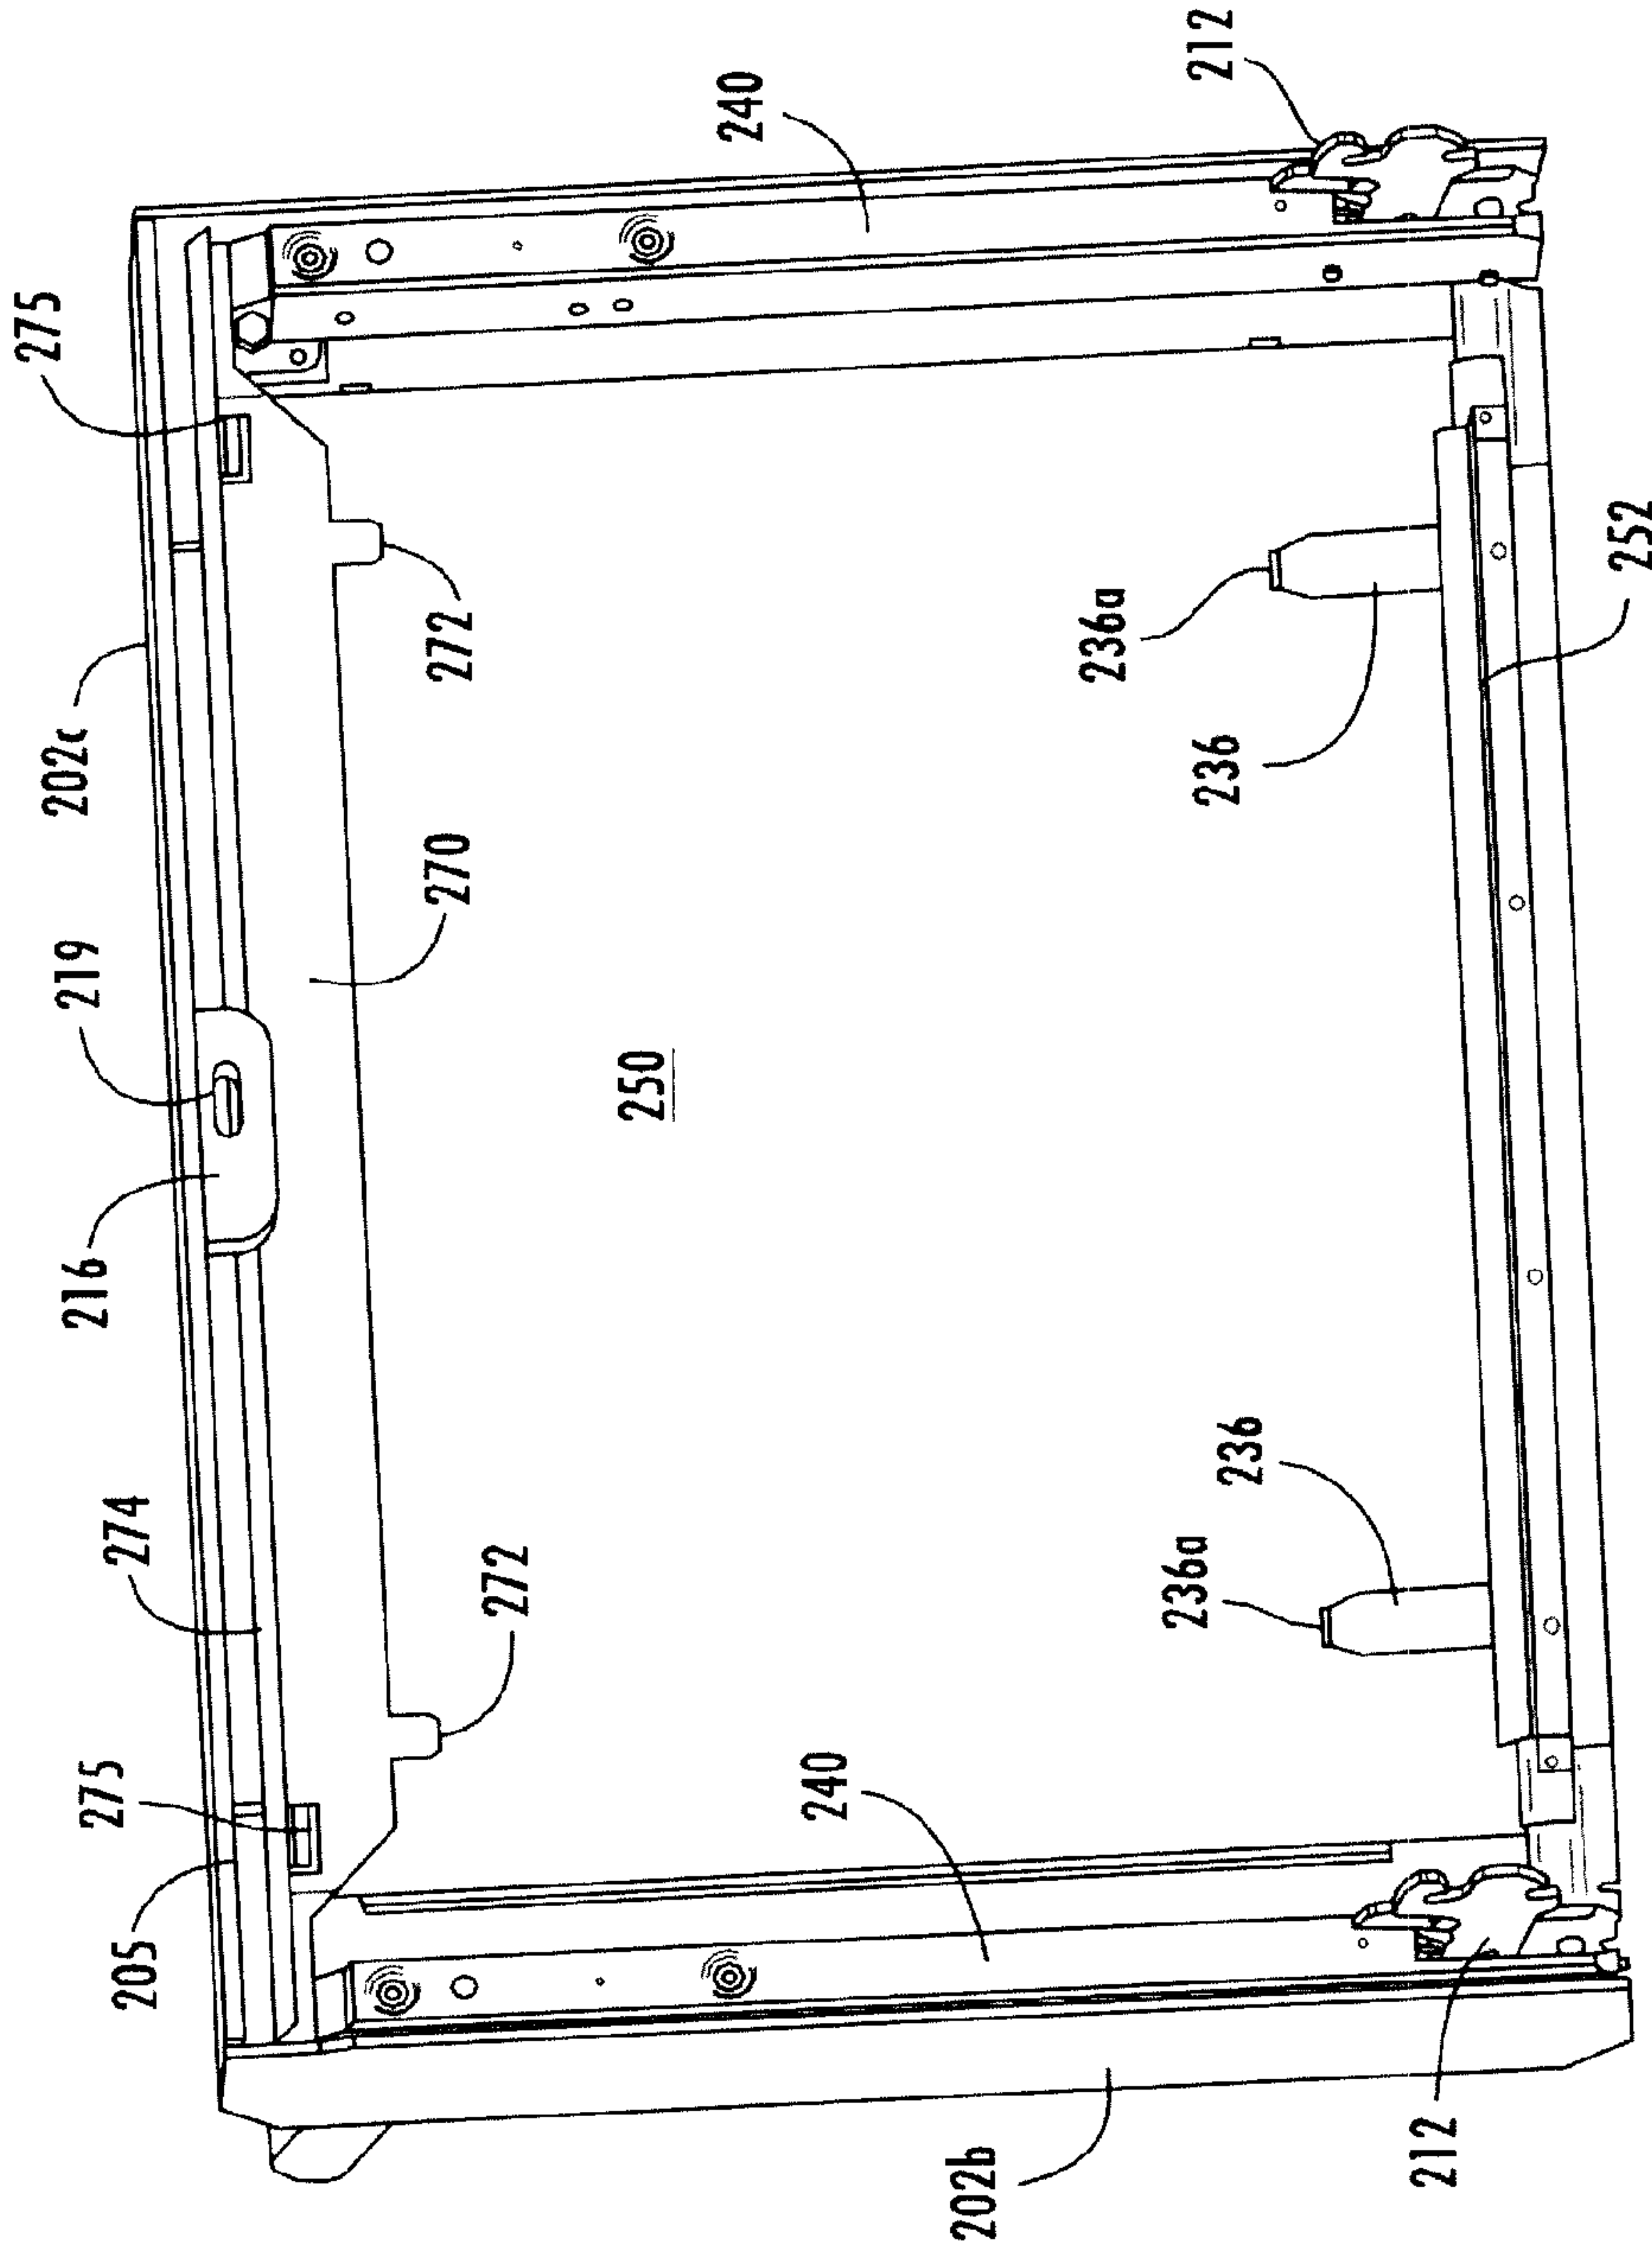


FIG. 12

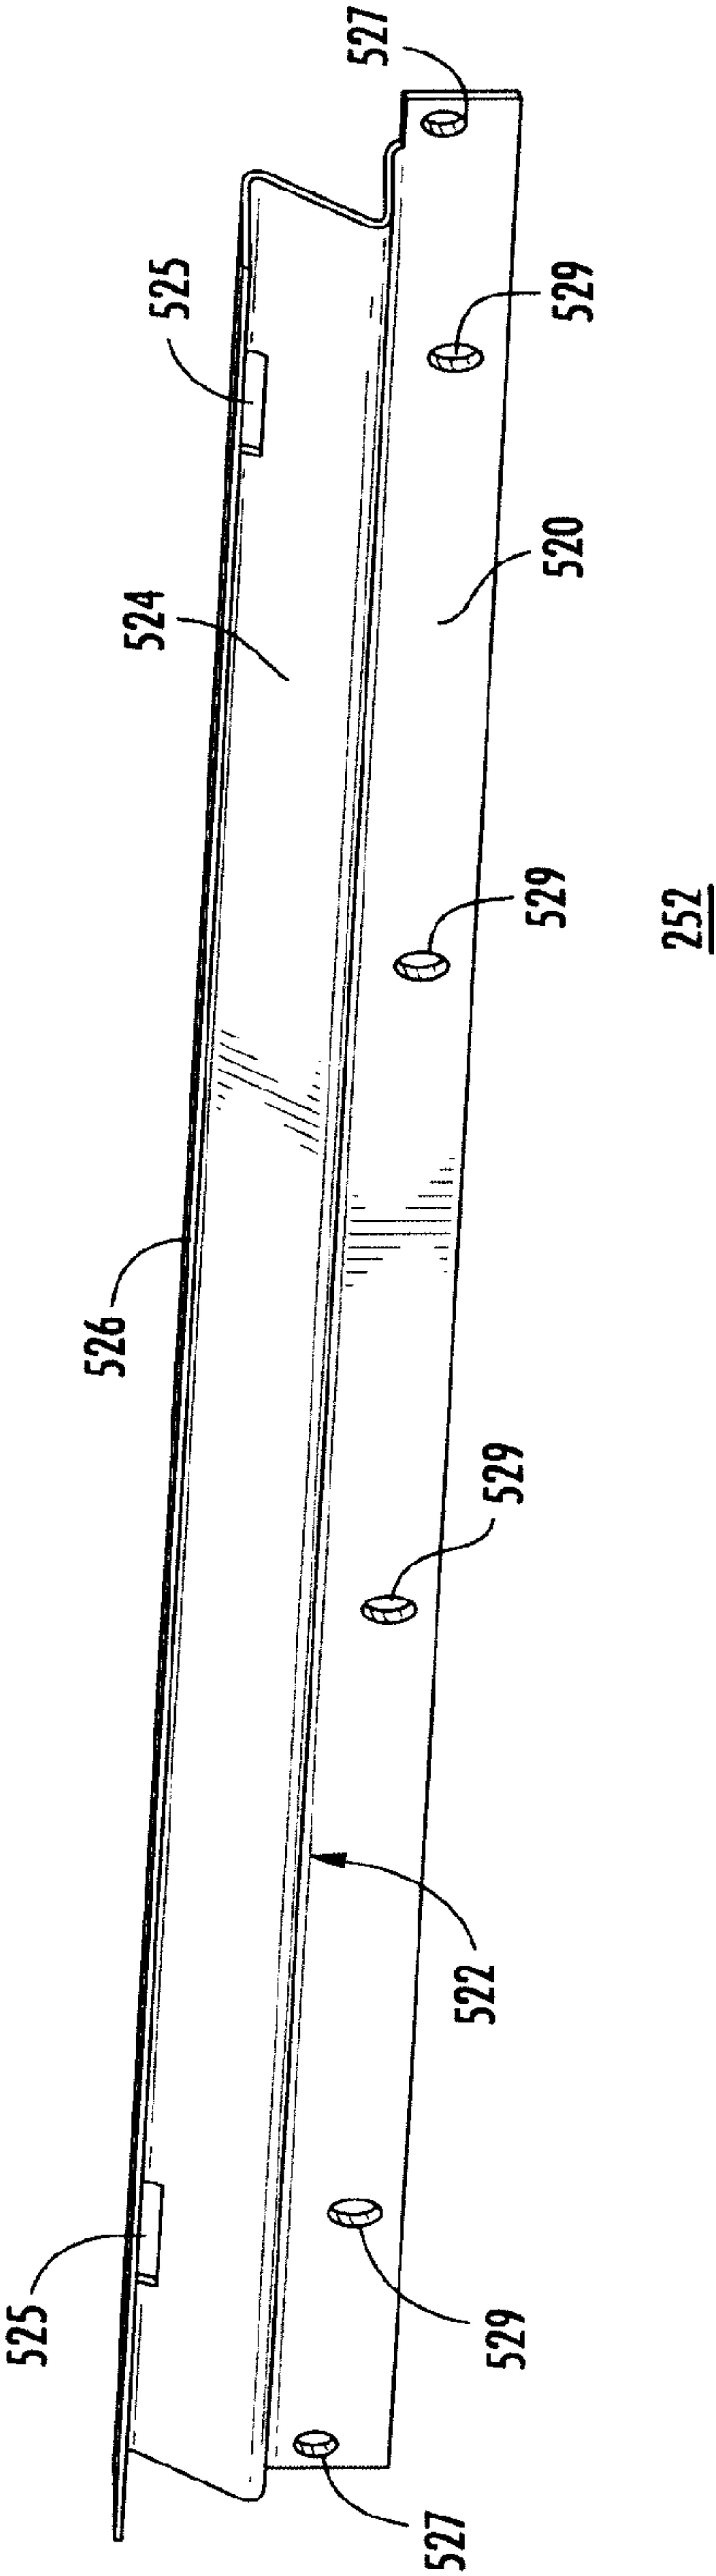


FIG. 13

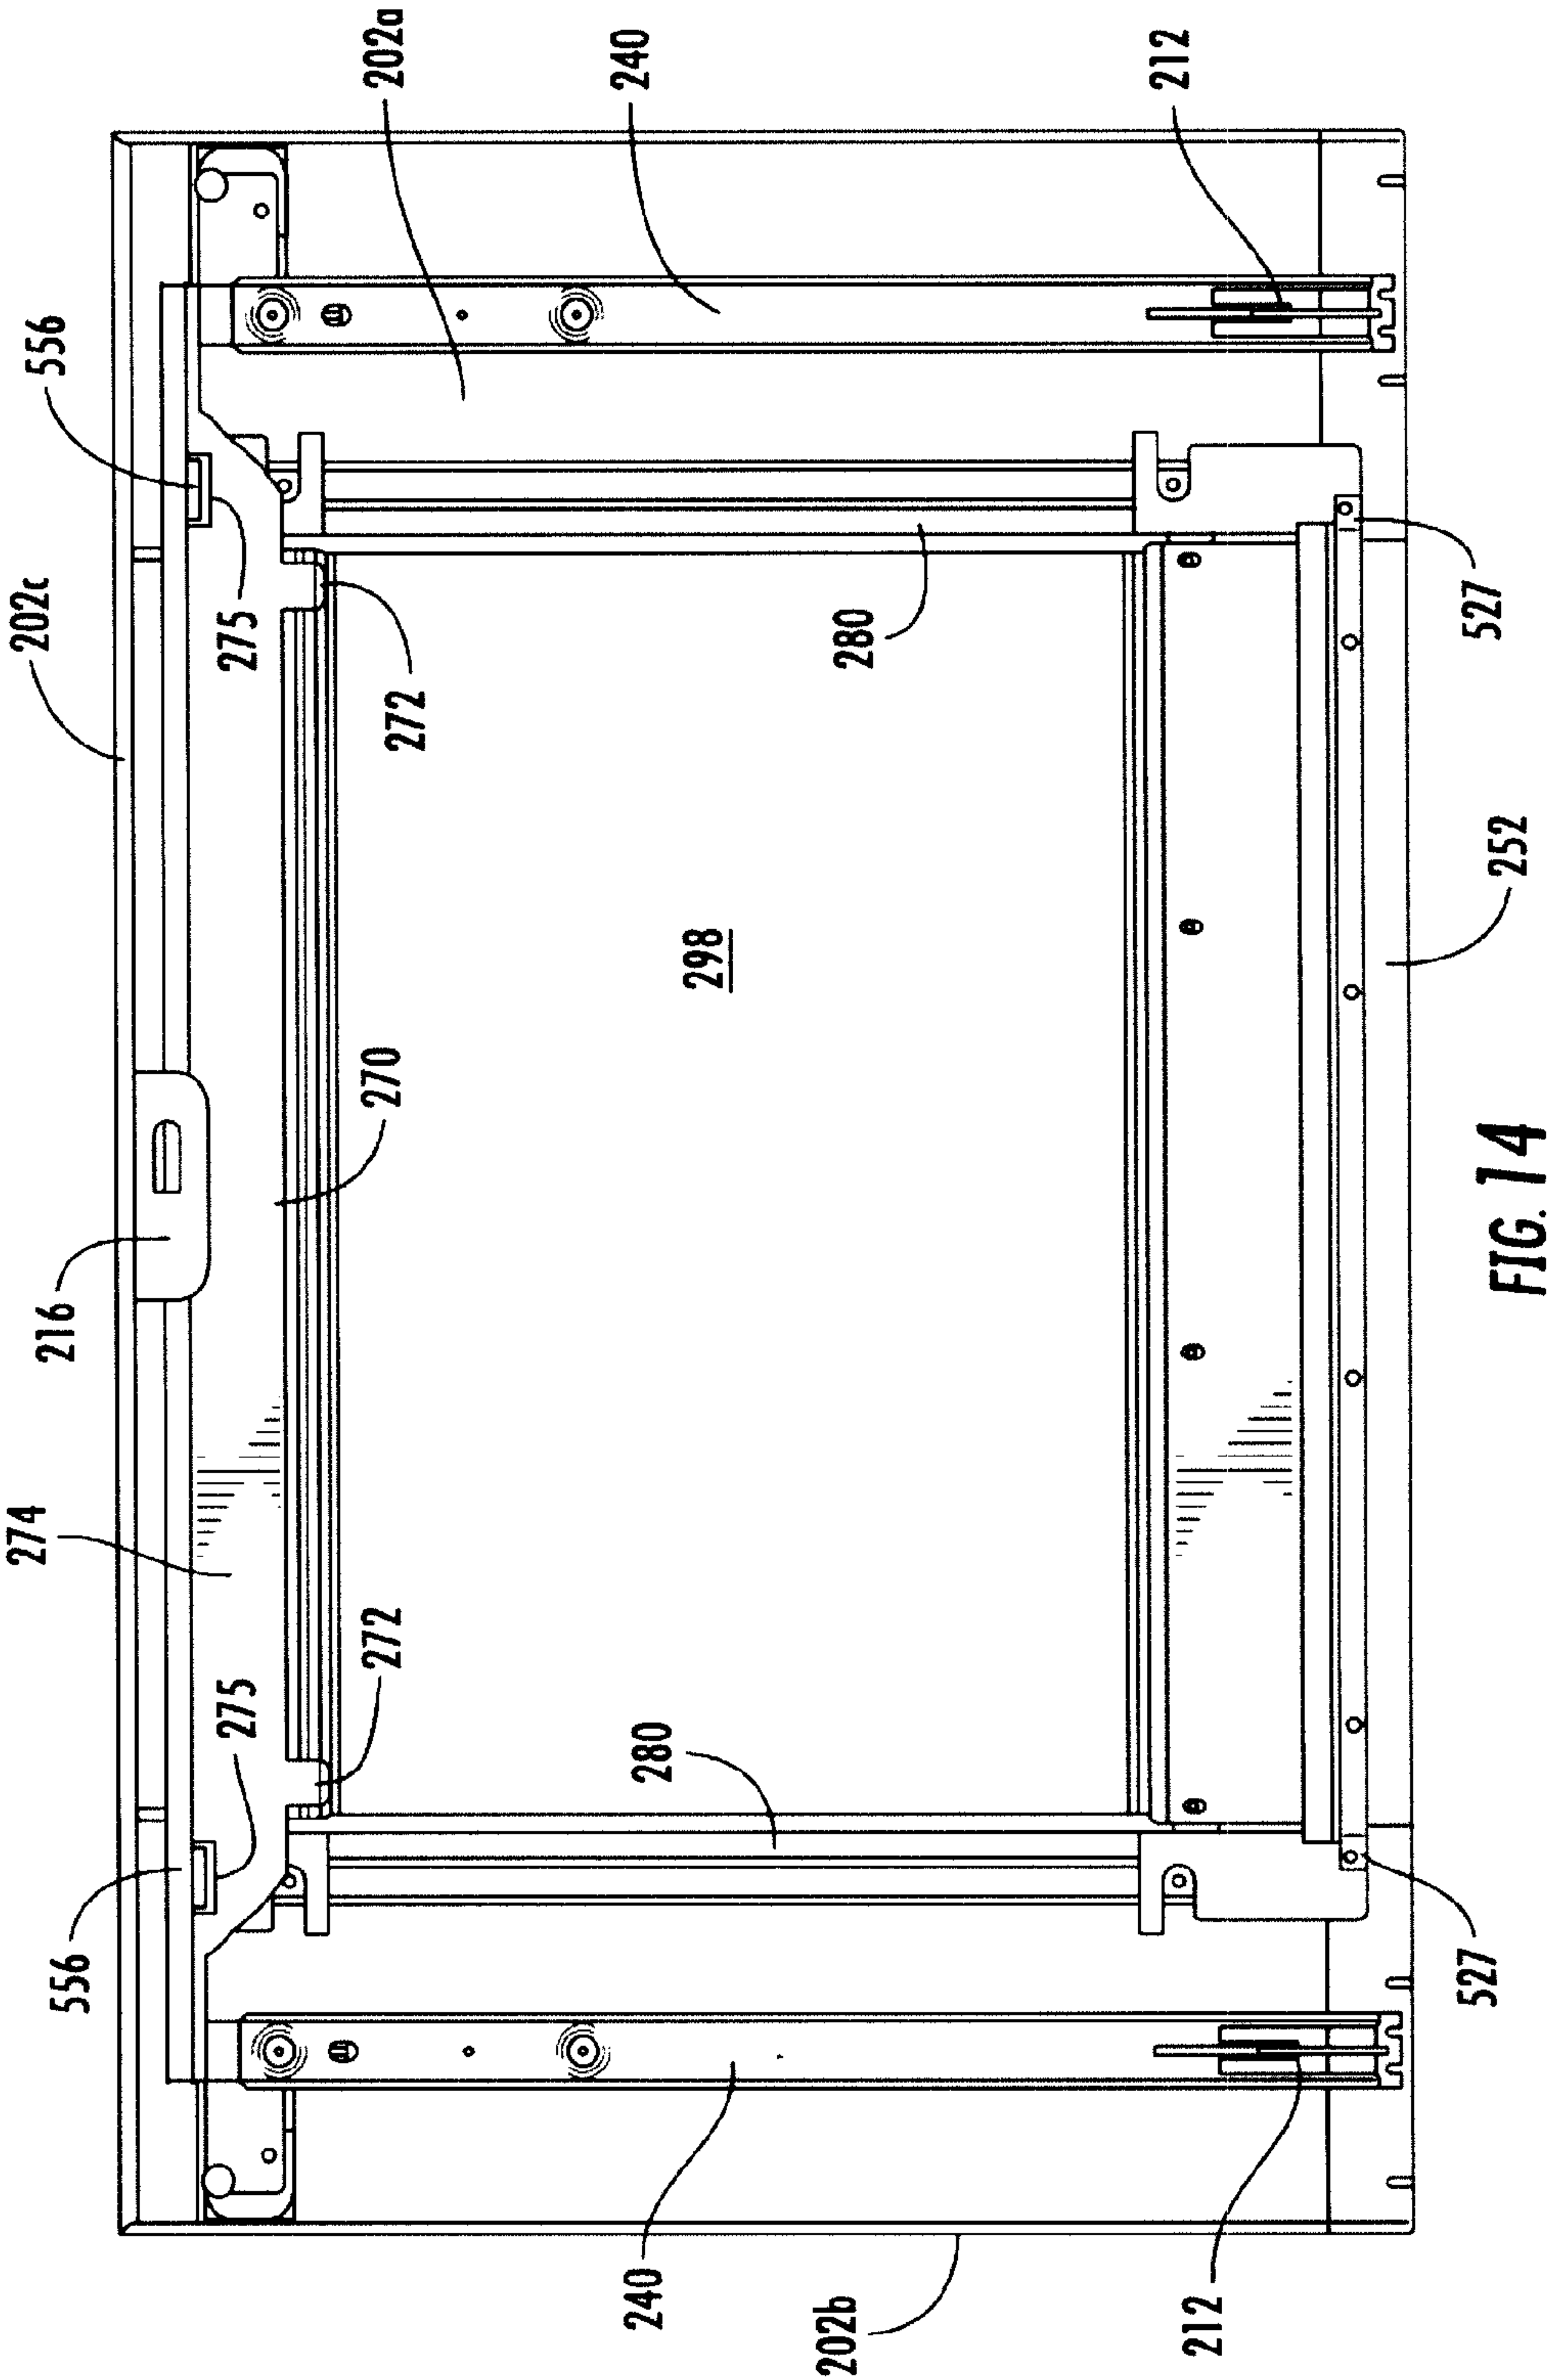


FIG. 14

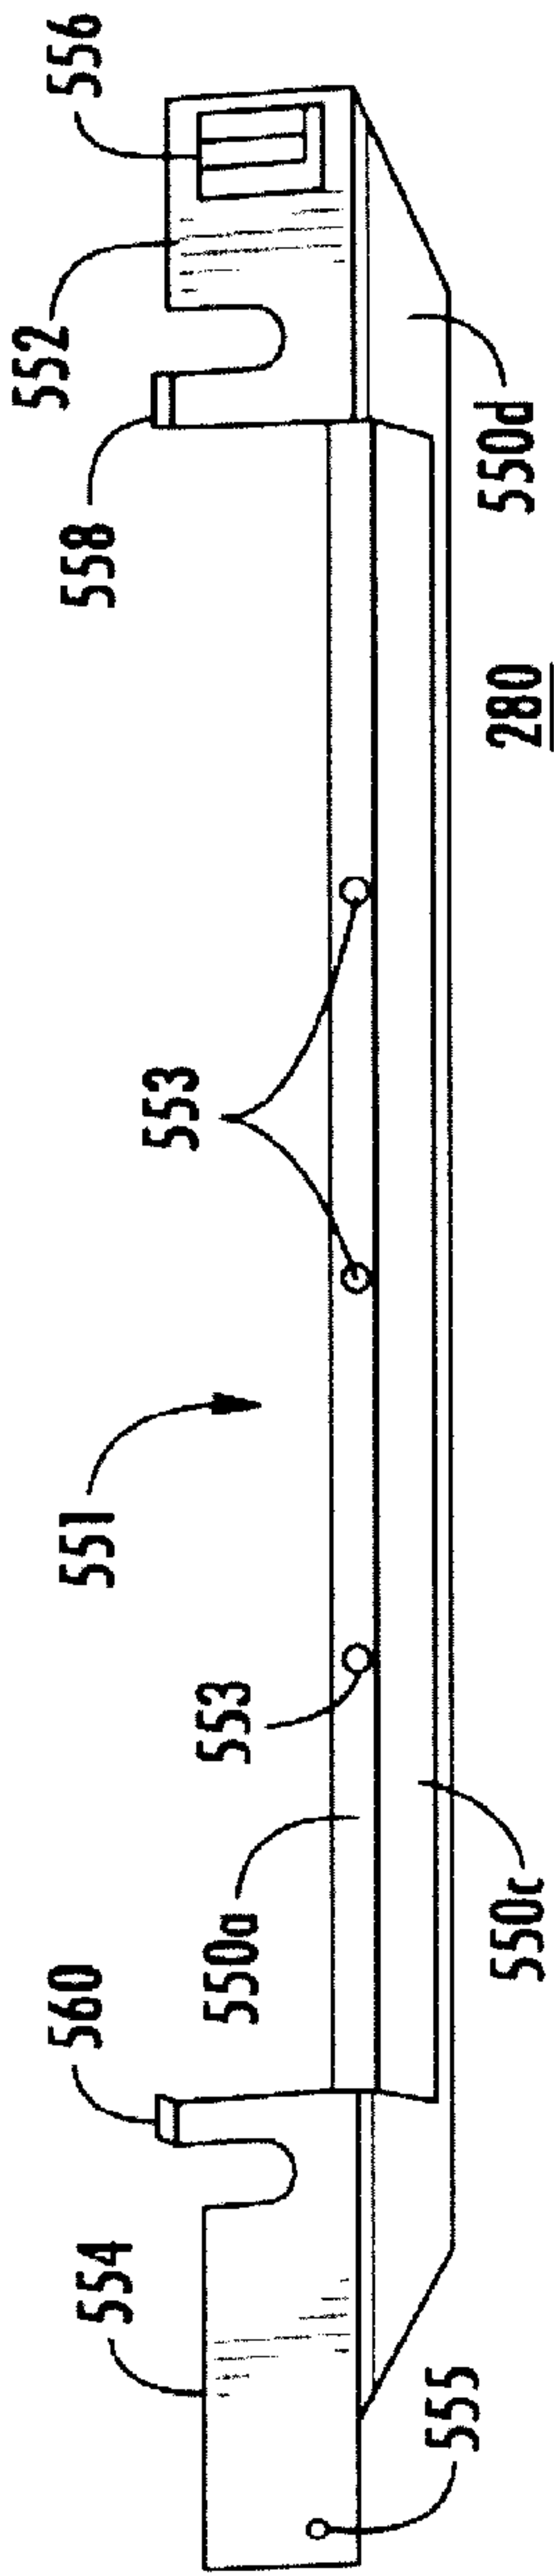


FIG. 15A

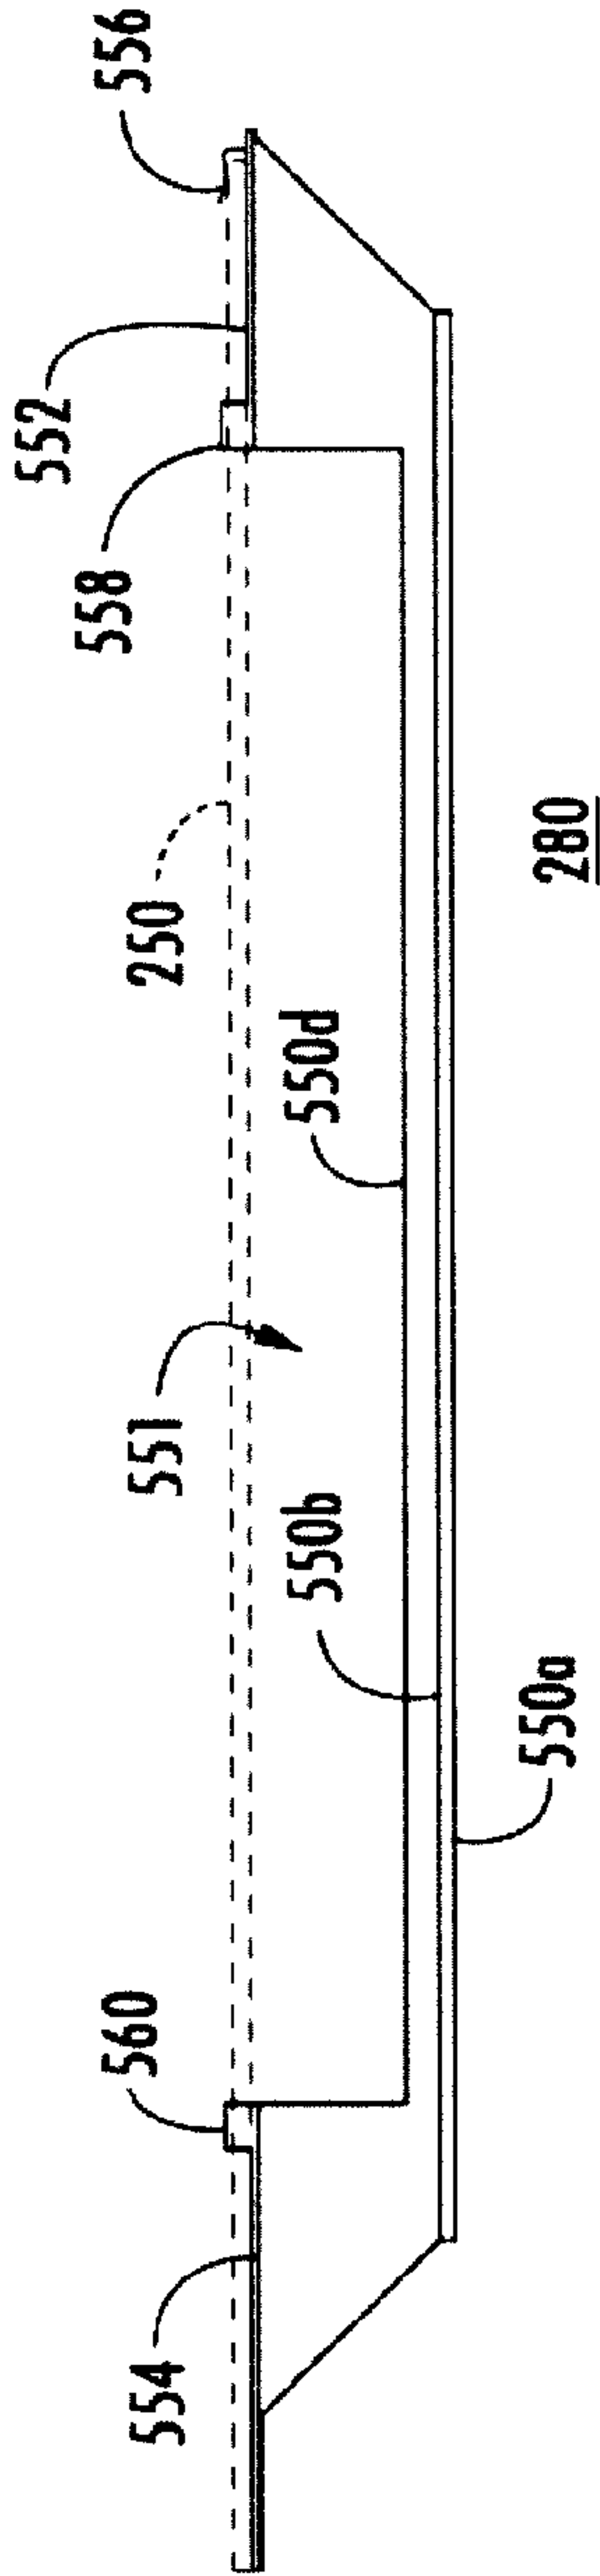


FIG. 15B

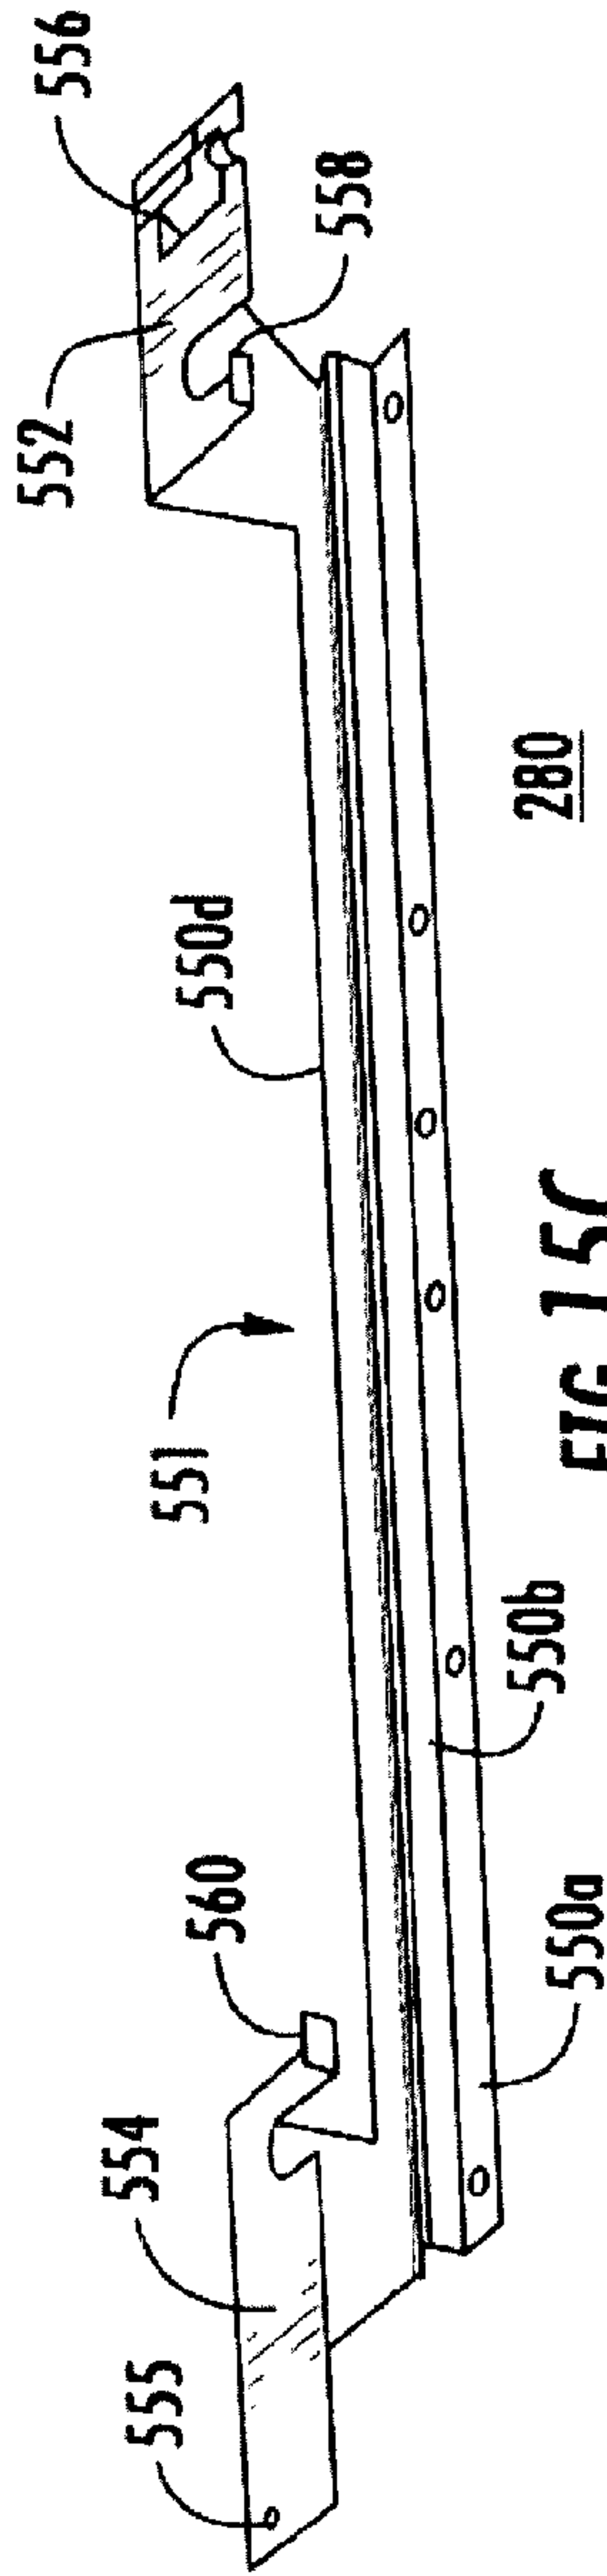


FIG. 15C

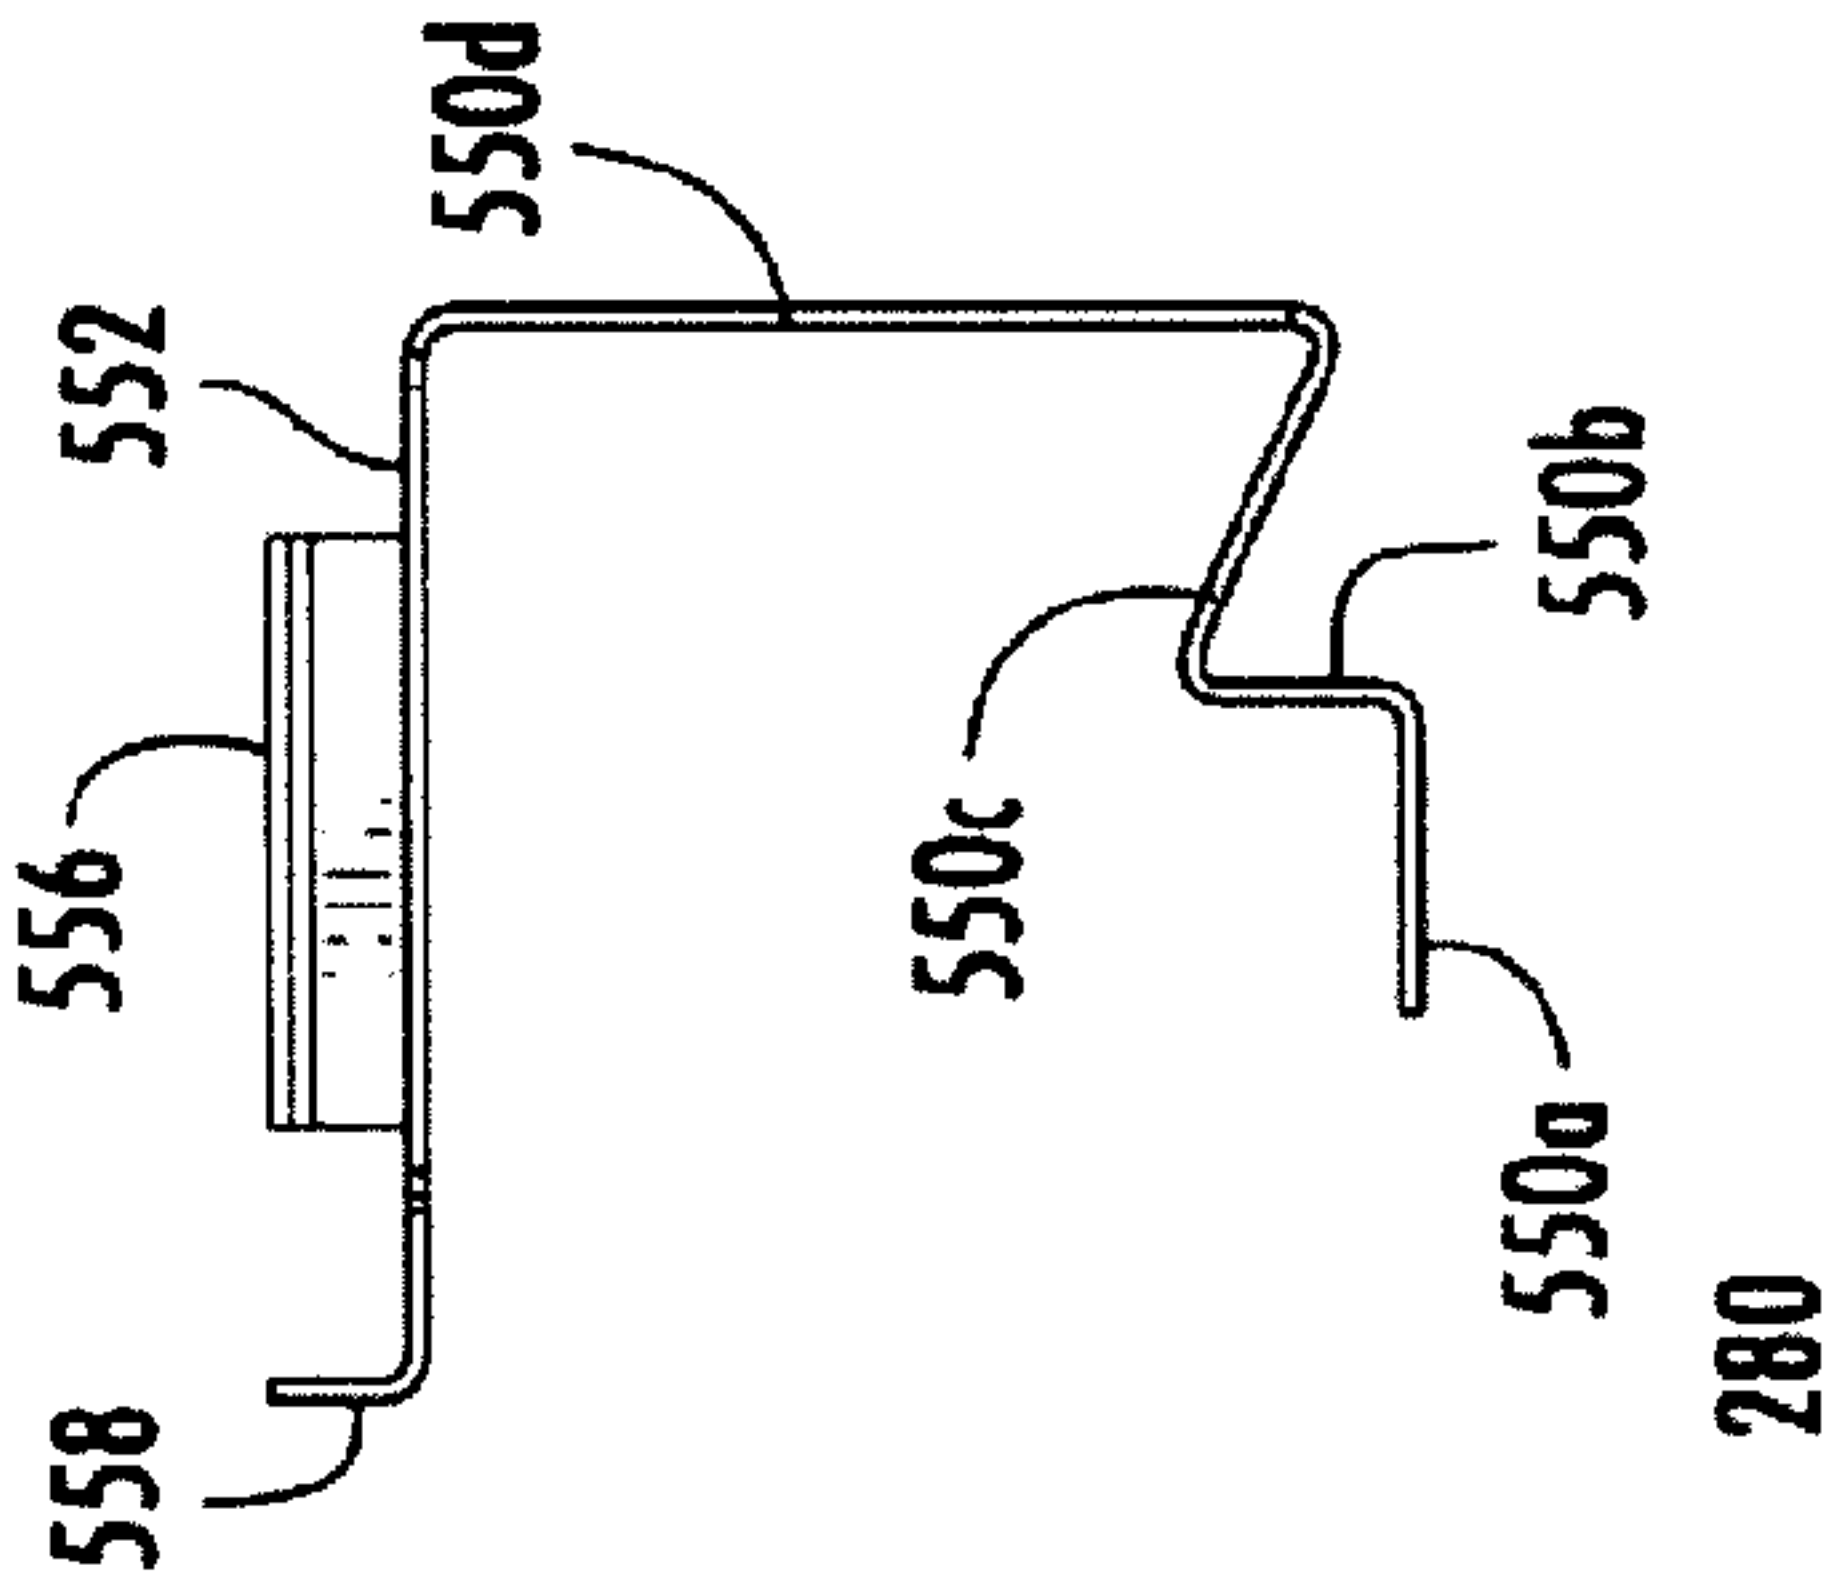


FIG. 15D

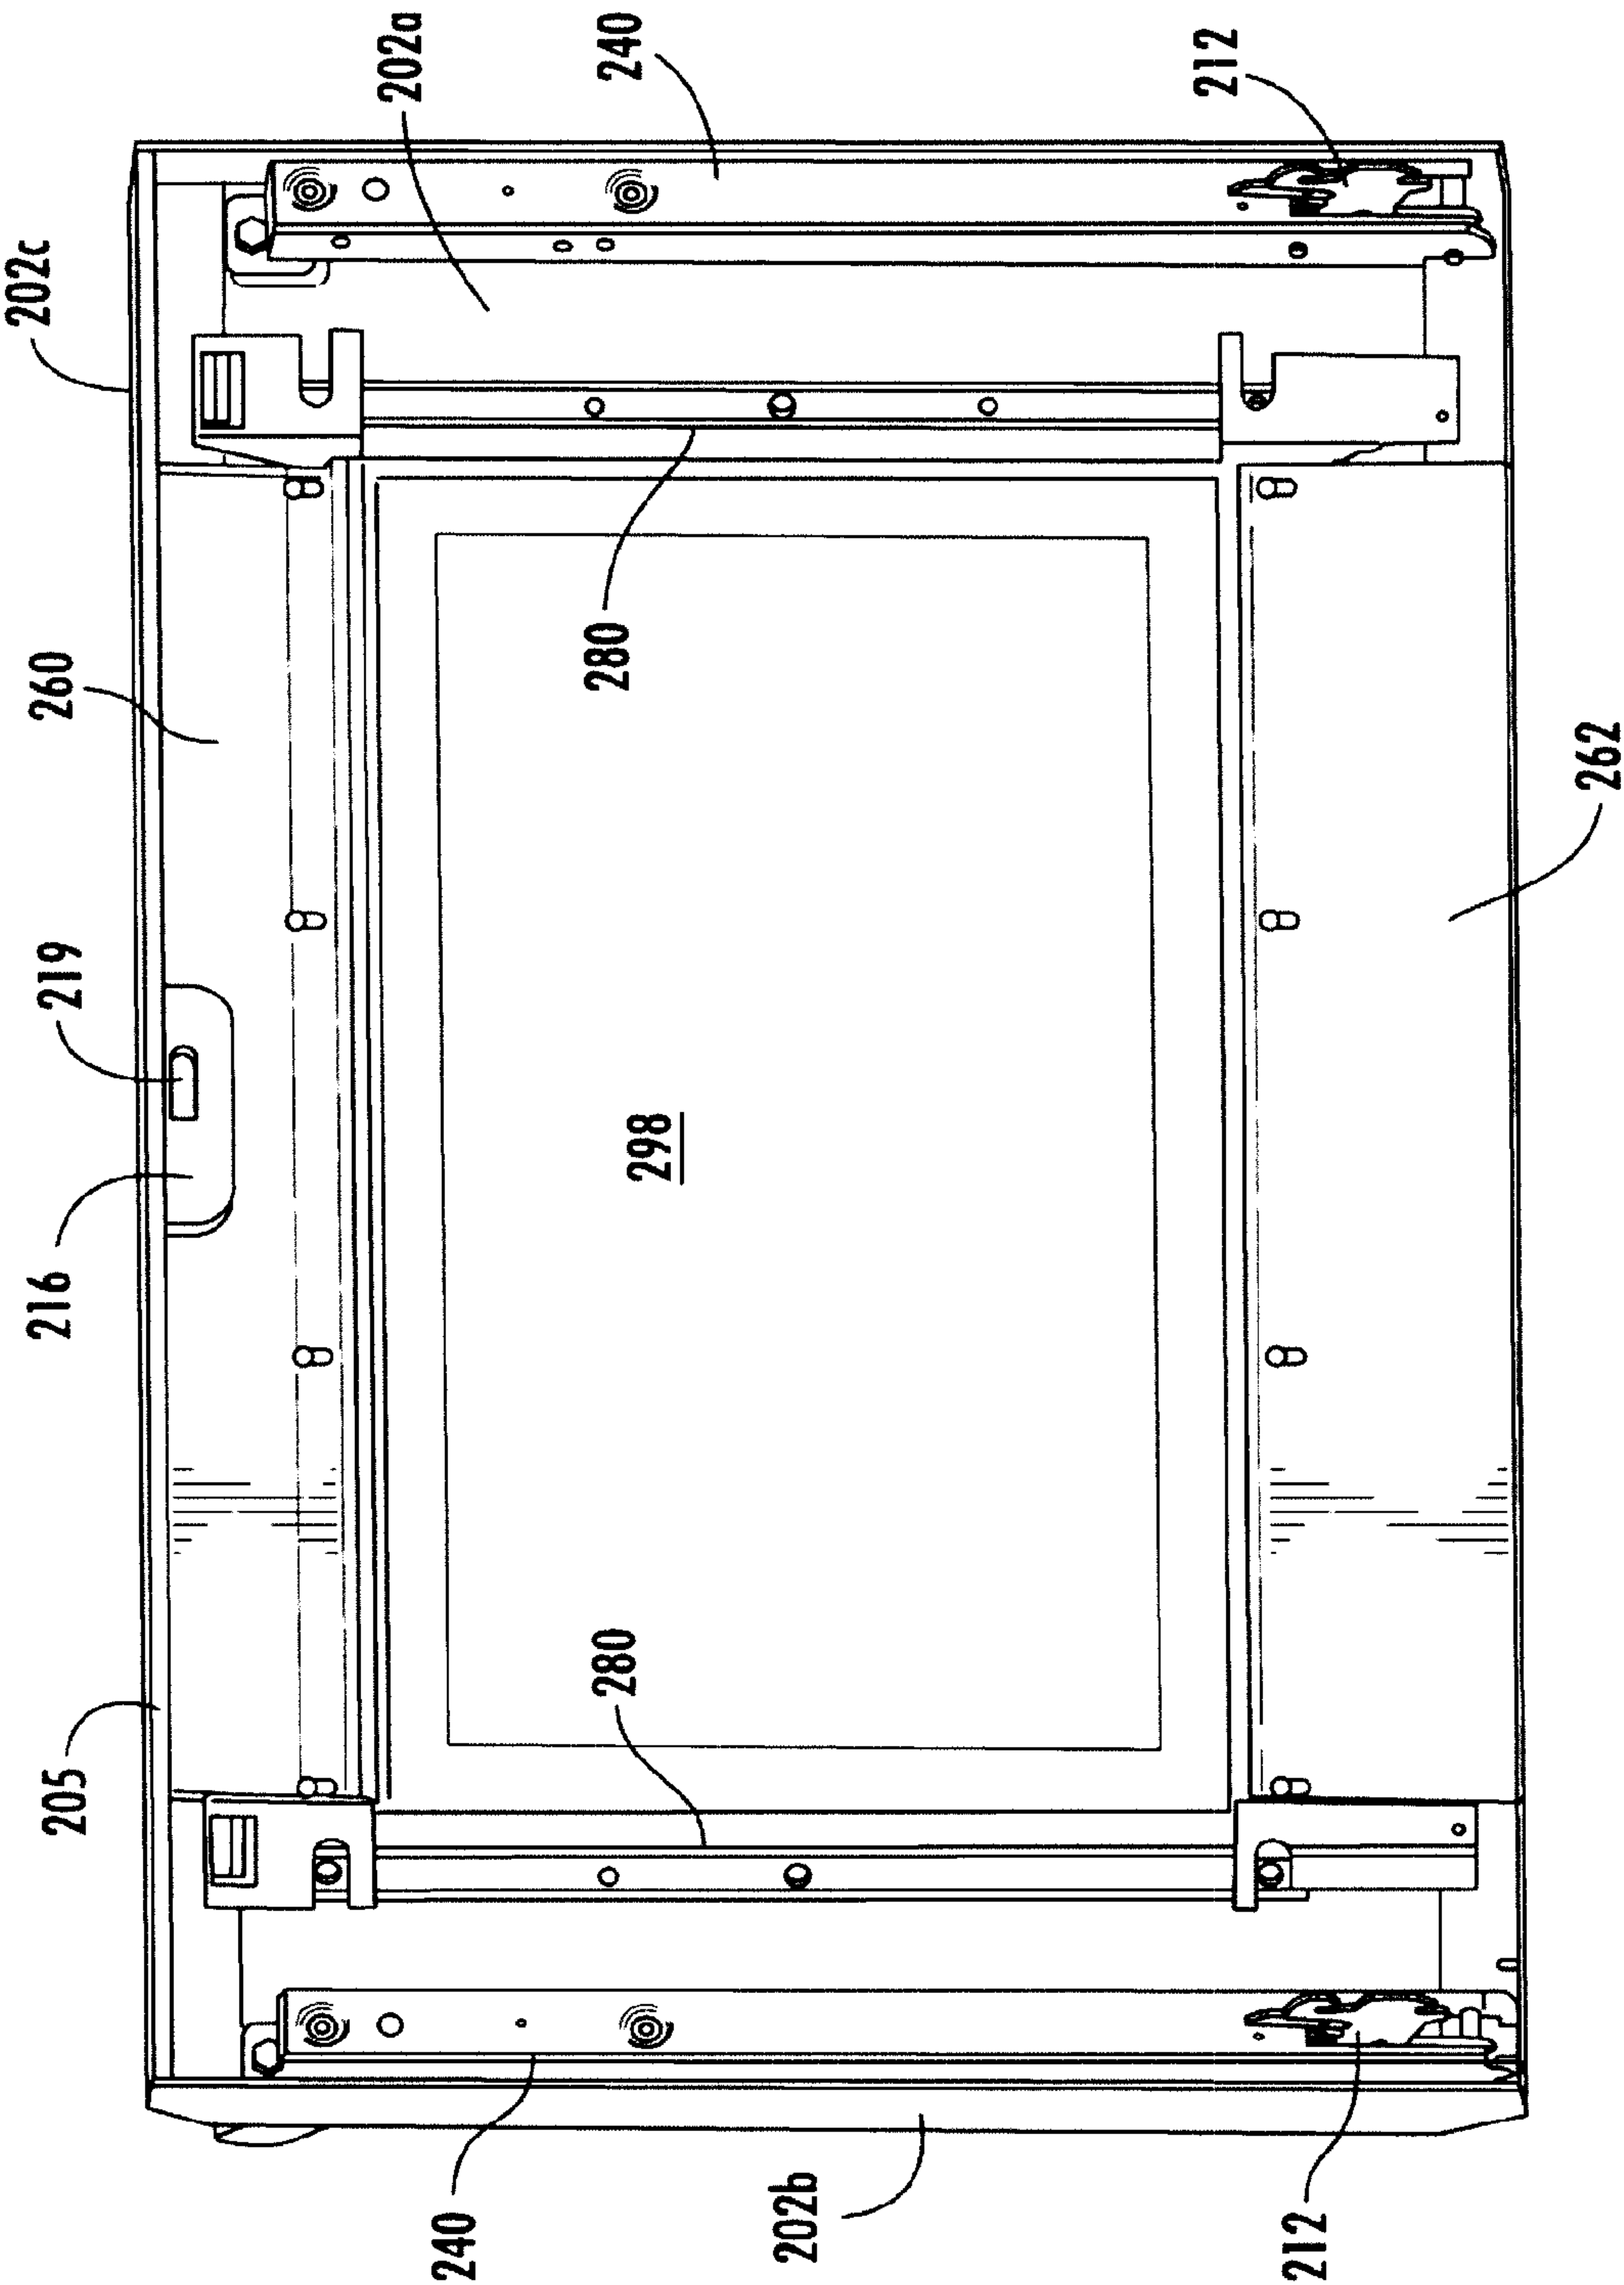


FIG. 16

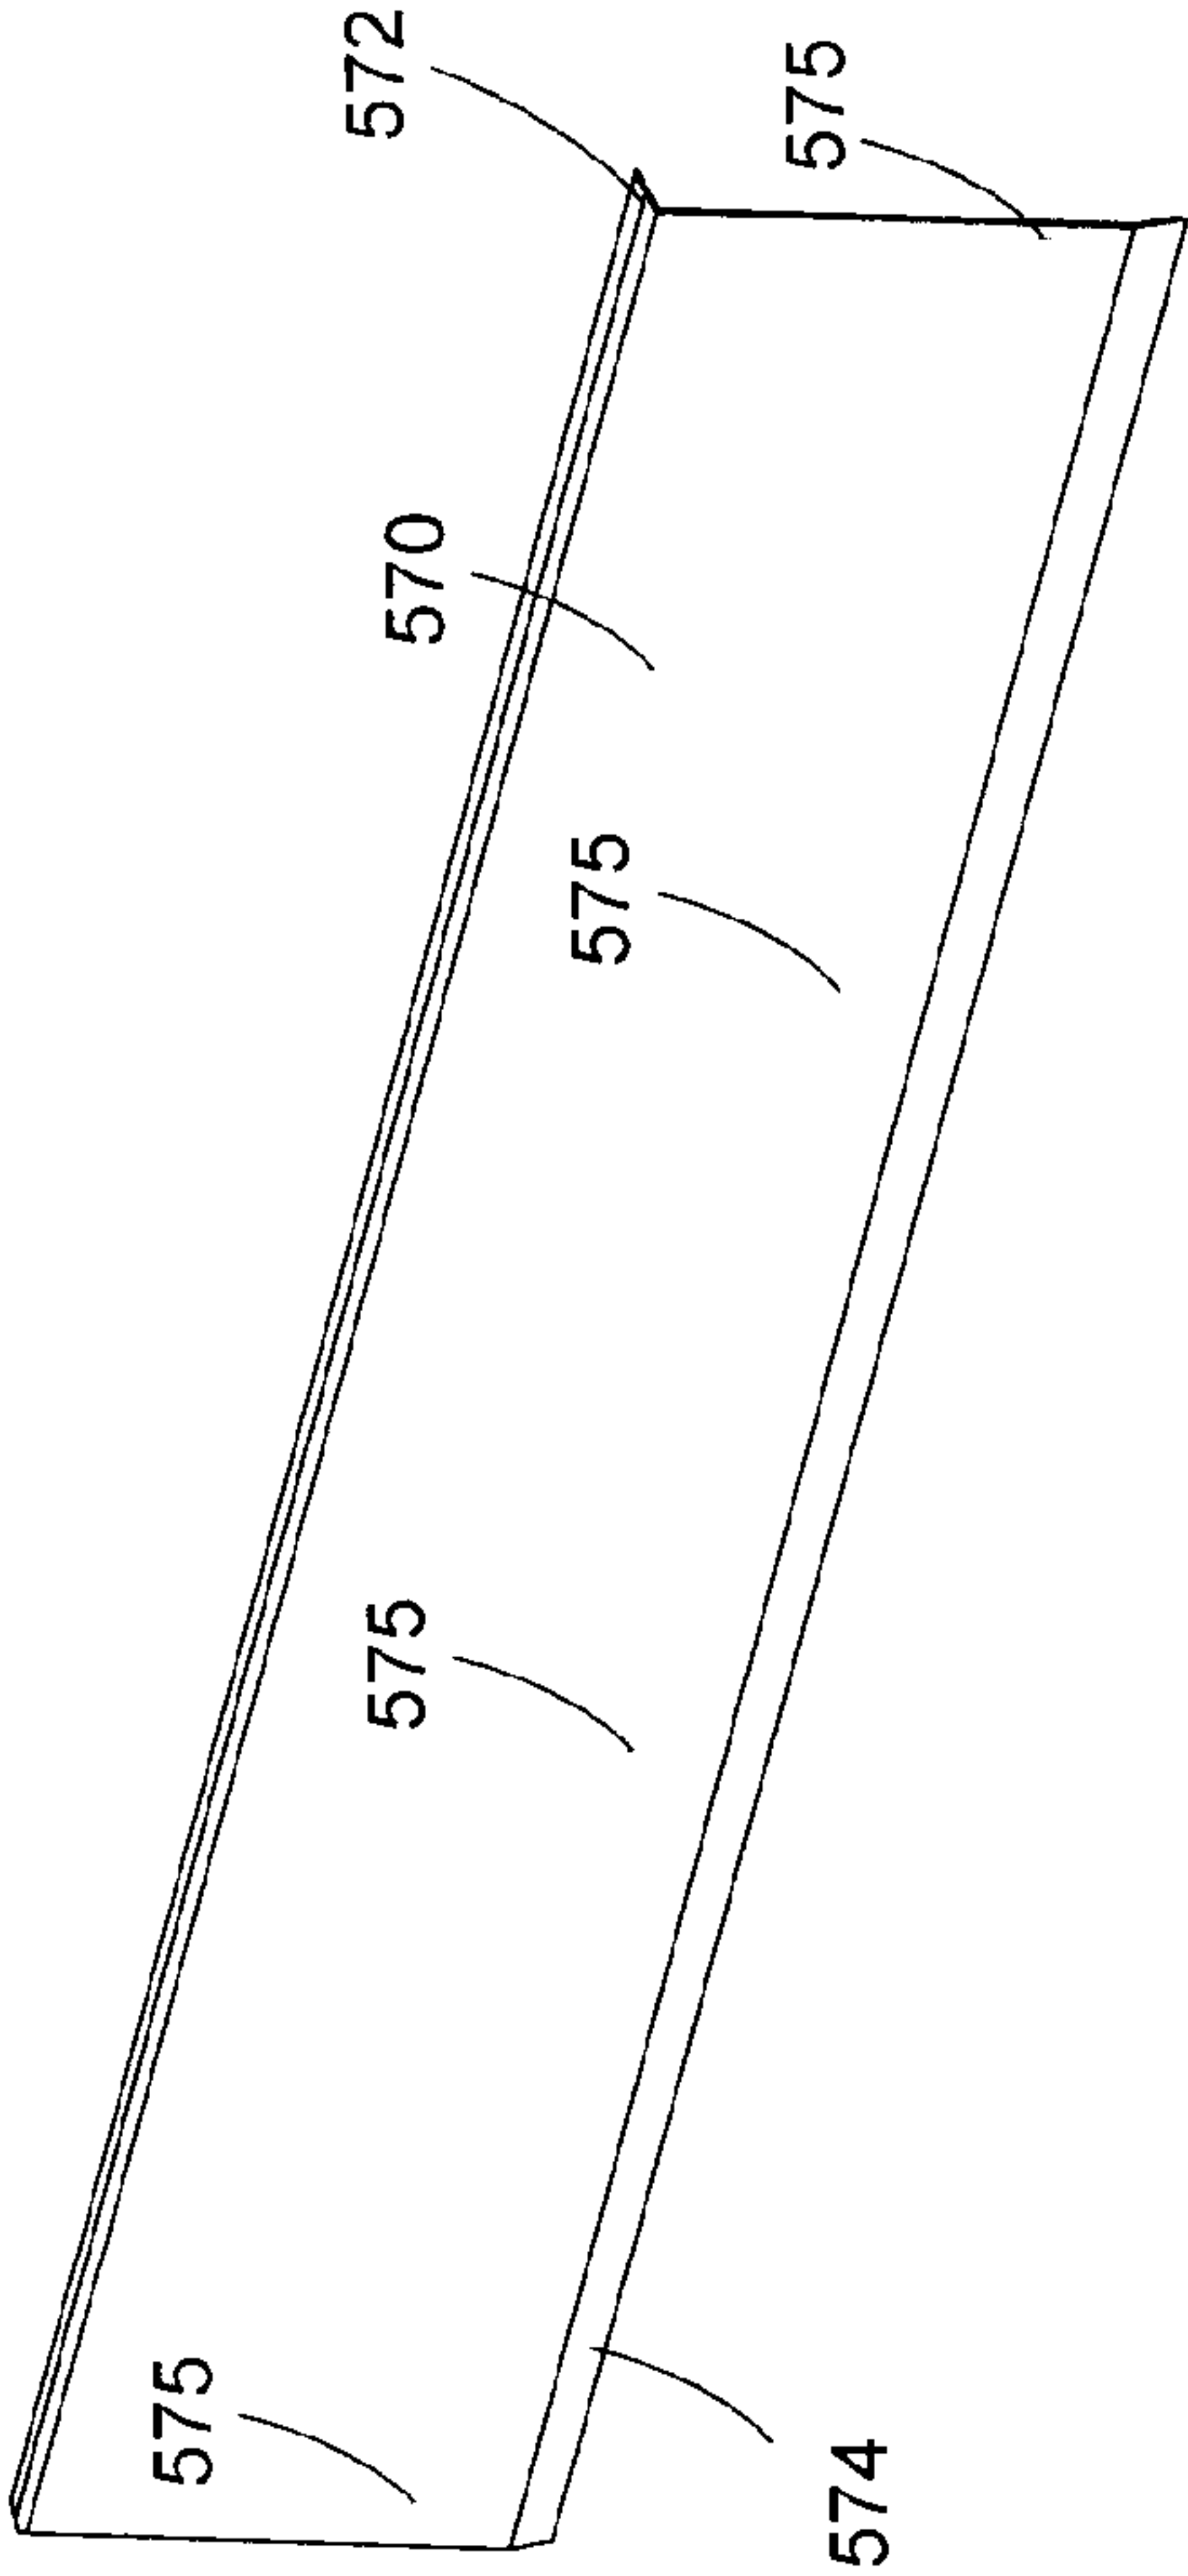


FIG. 17A

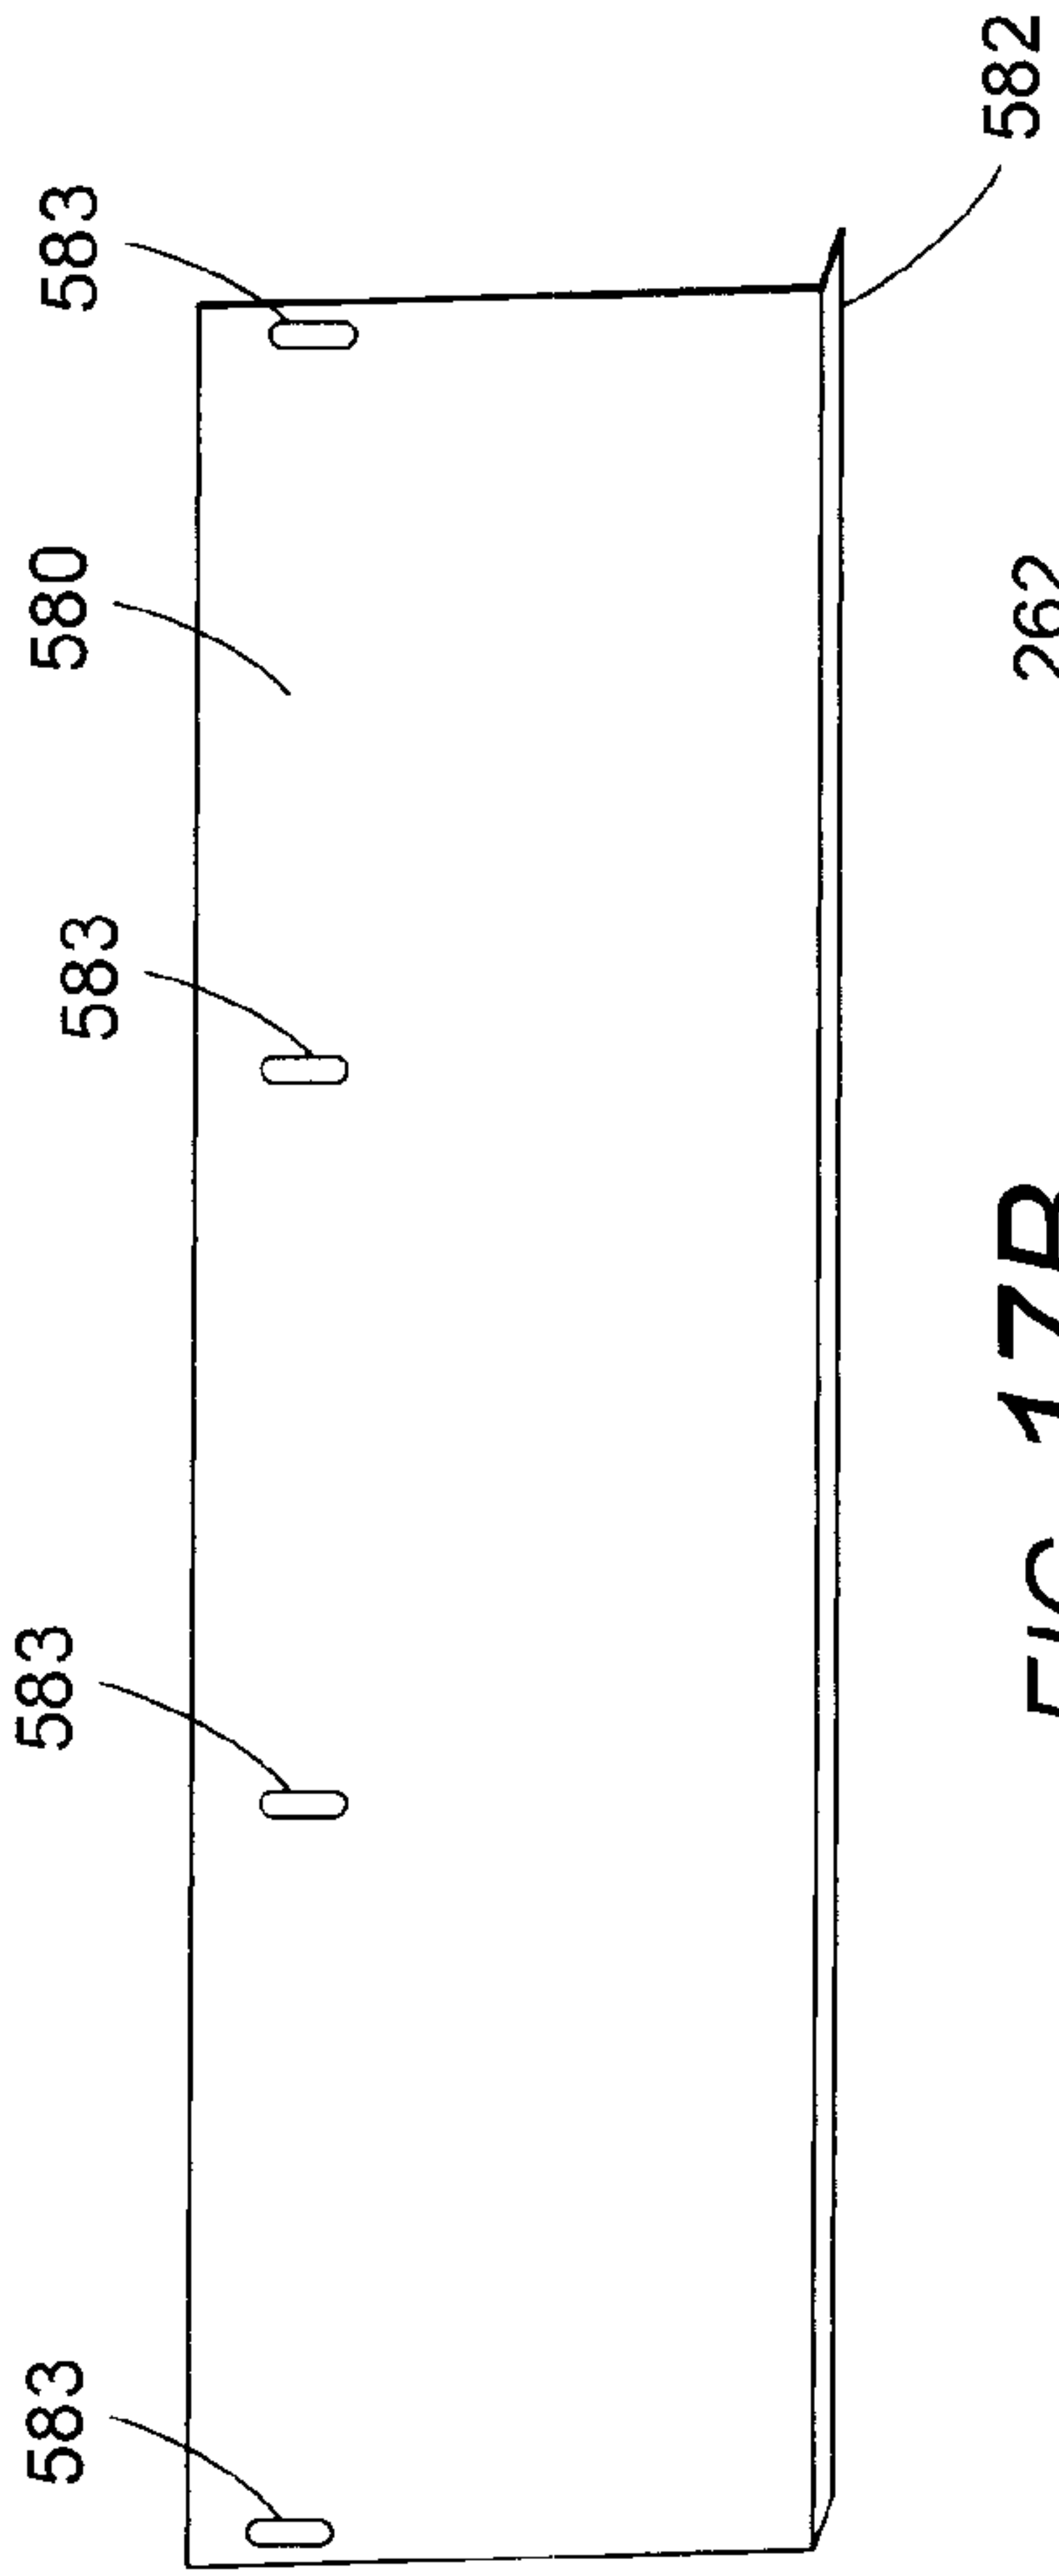


FIG. 17B

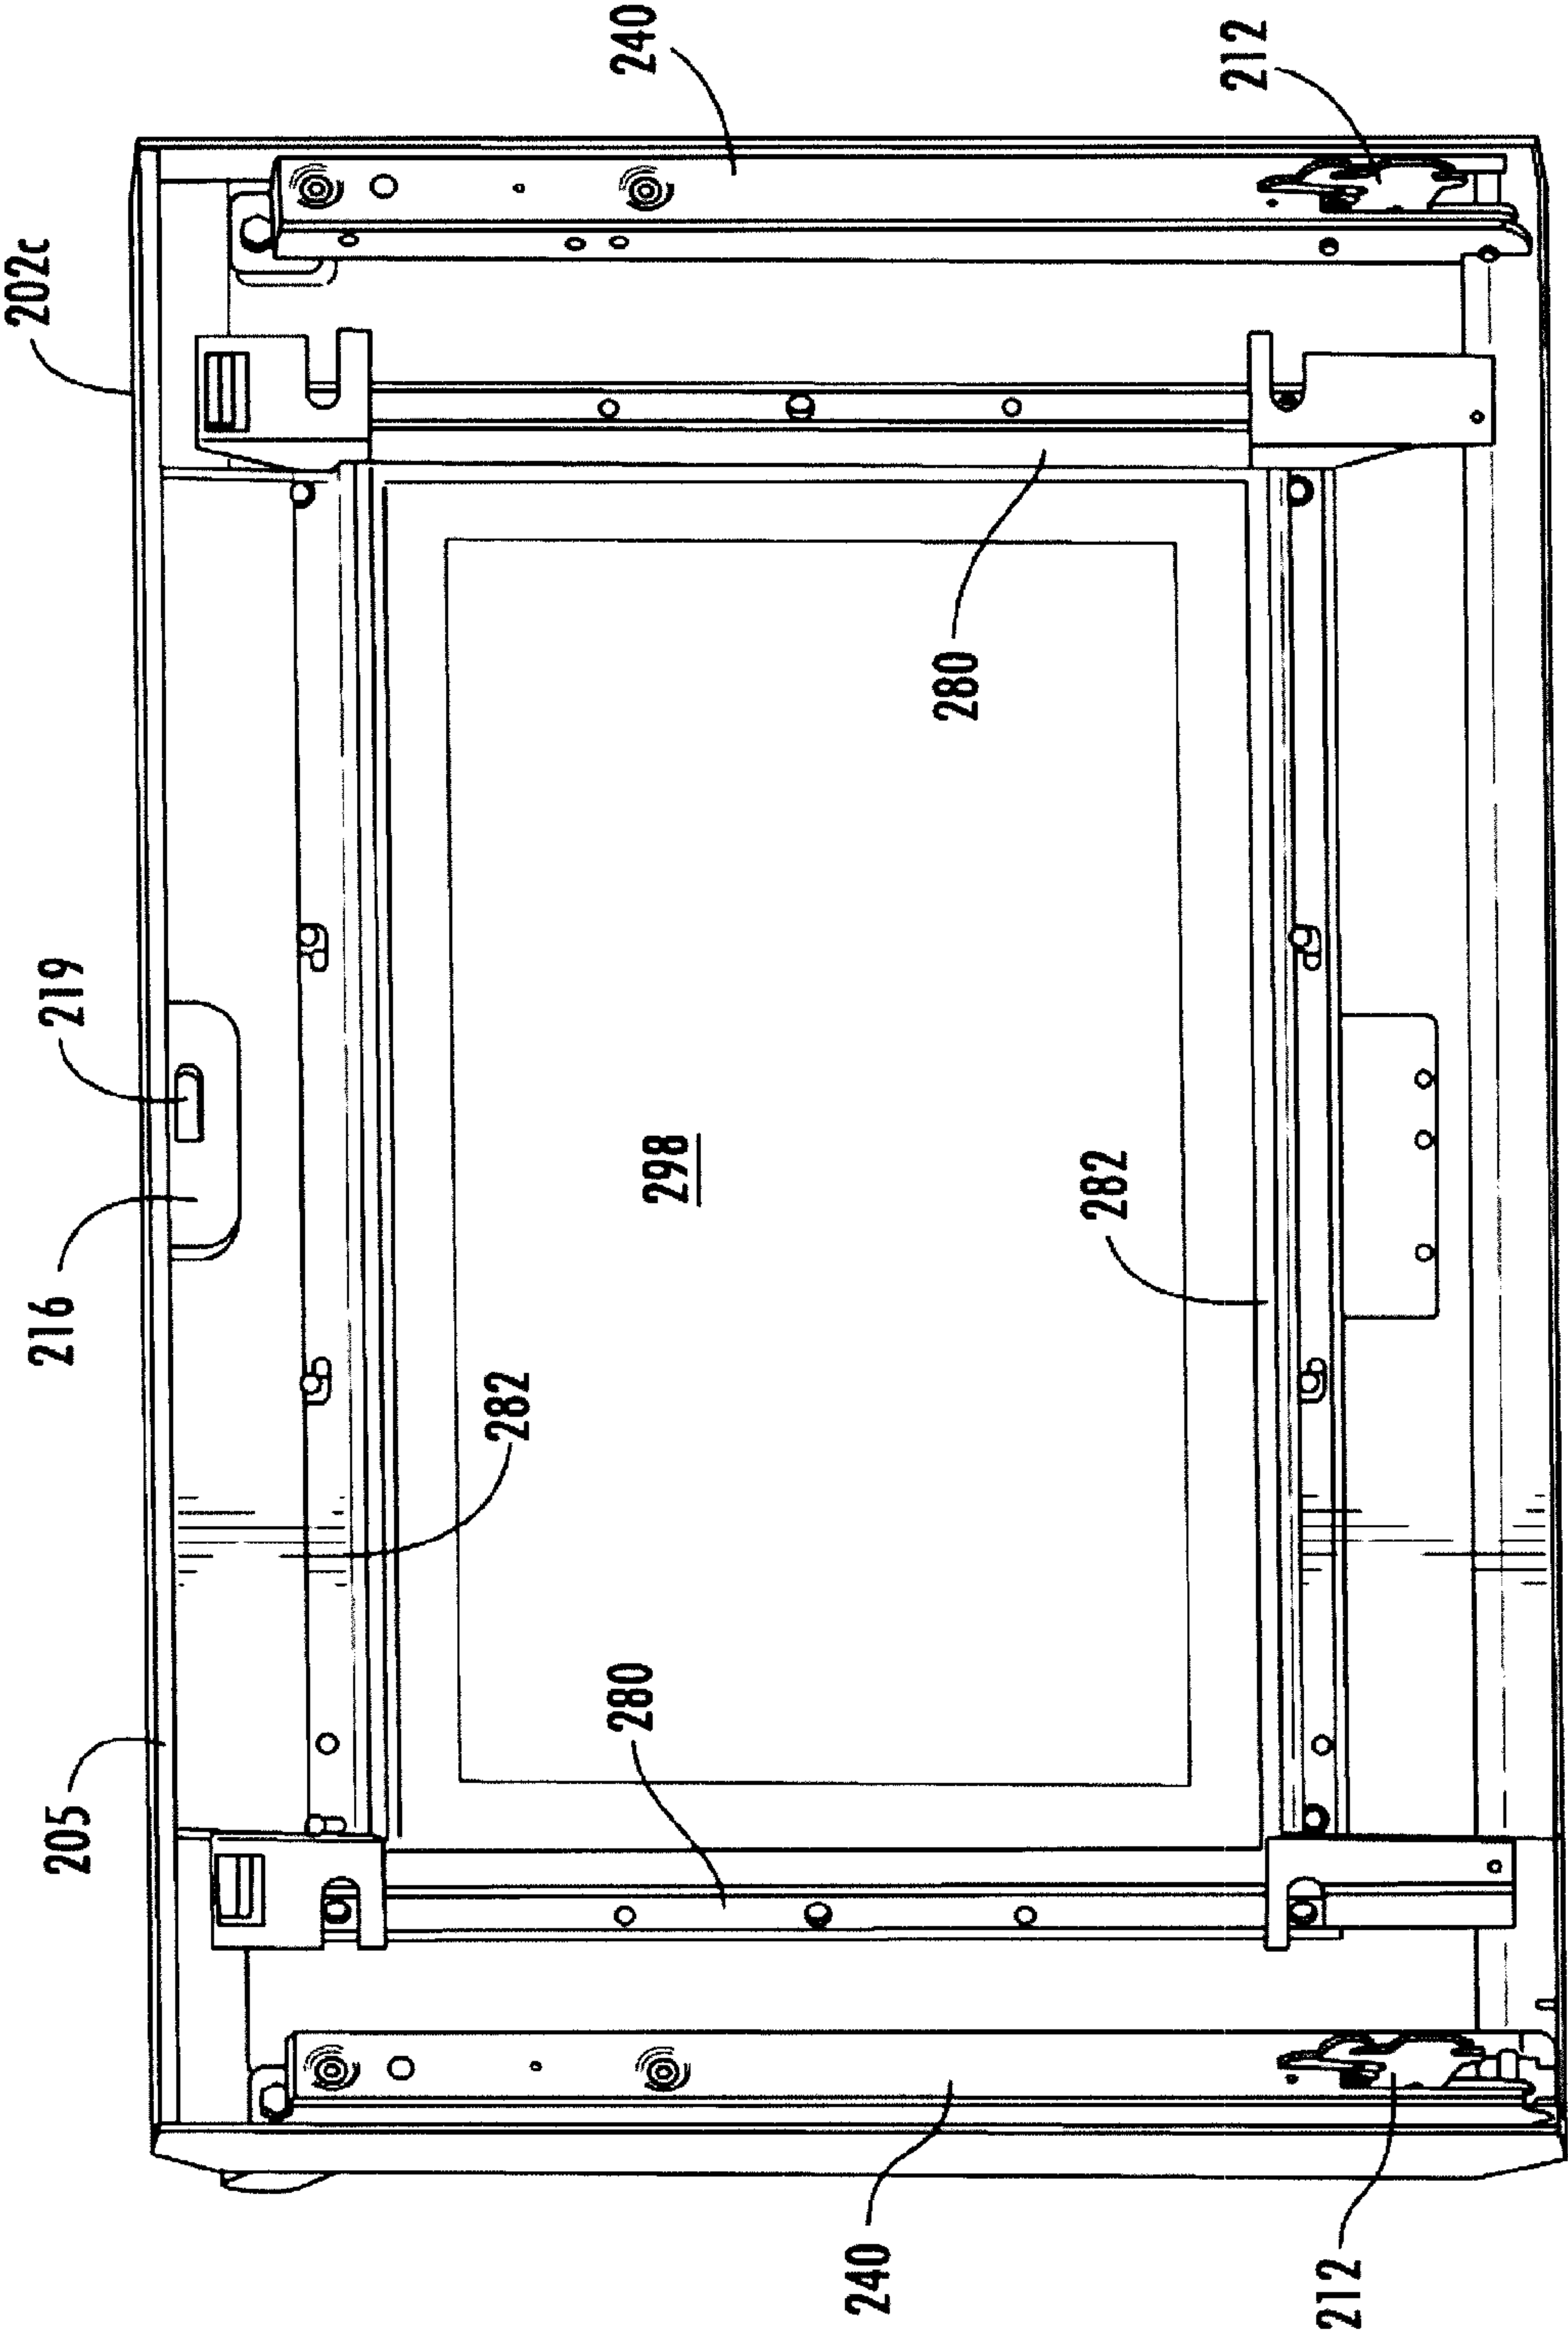


FIG. 18

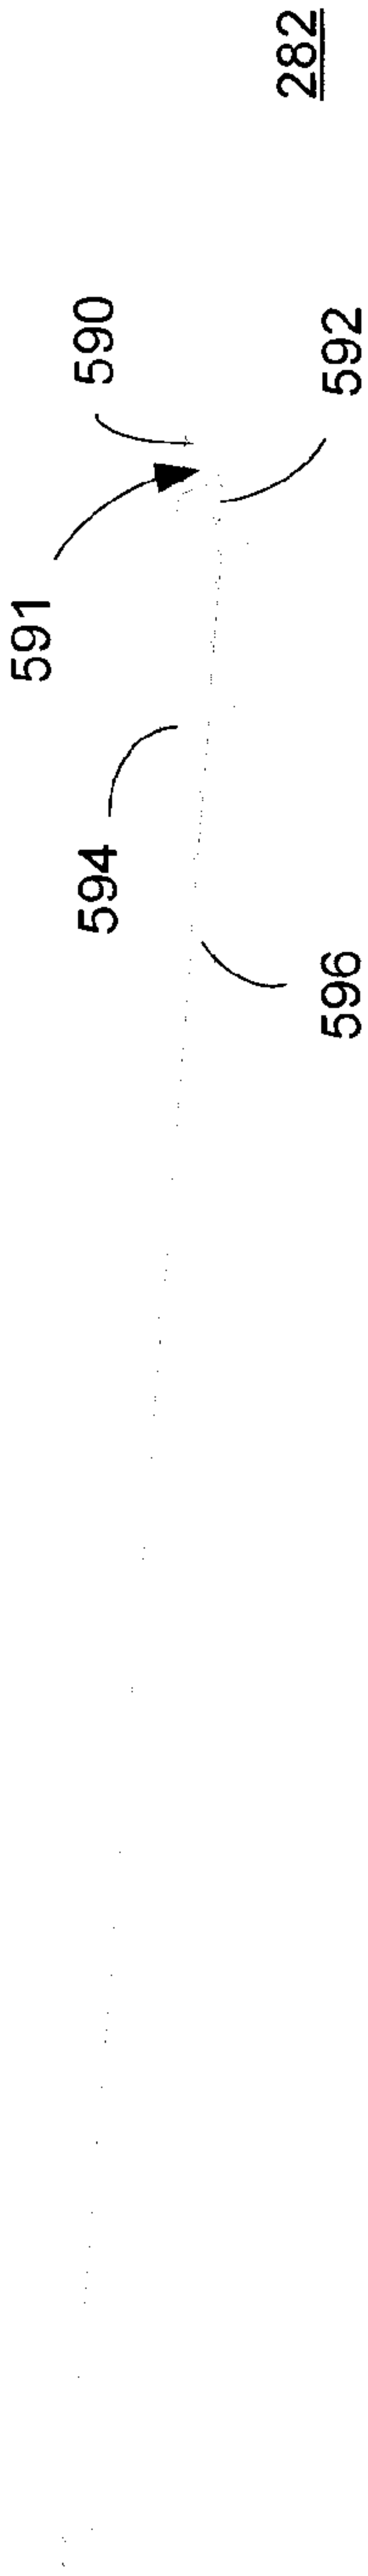


FIG. 19A

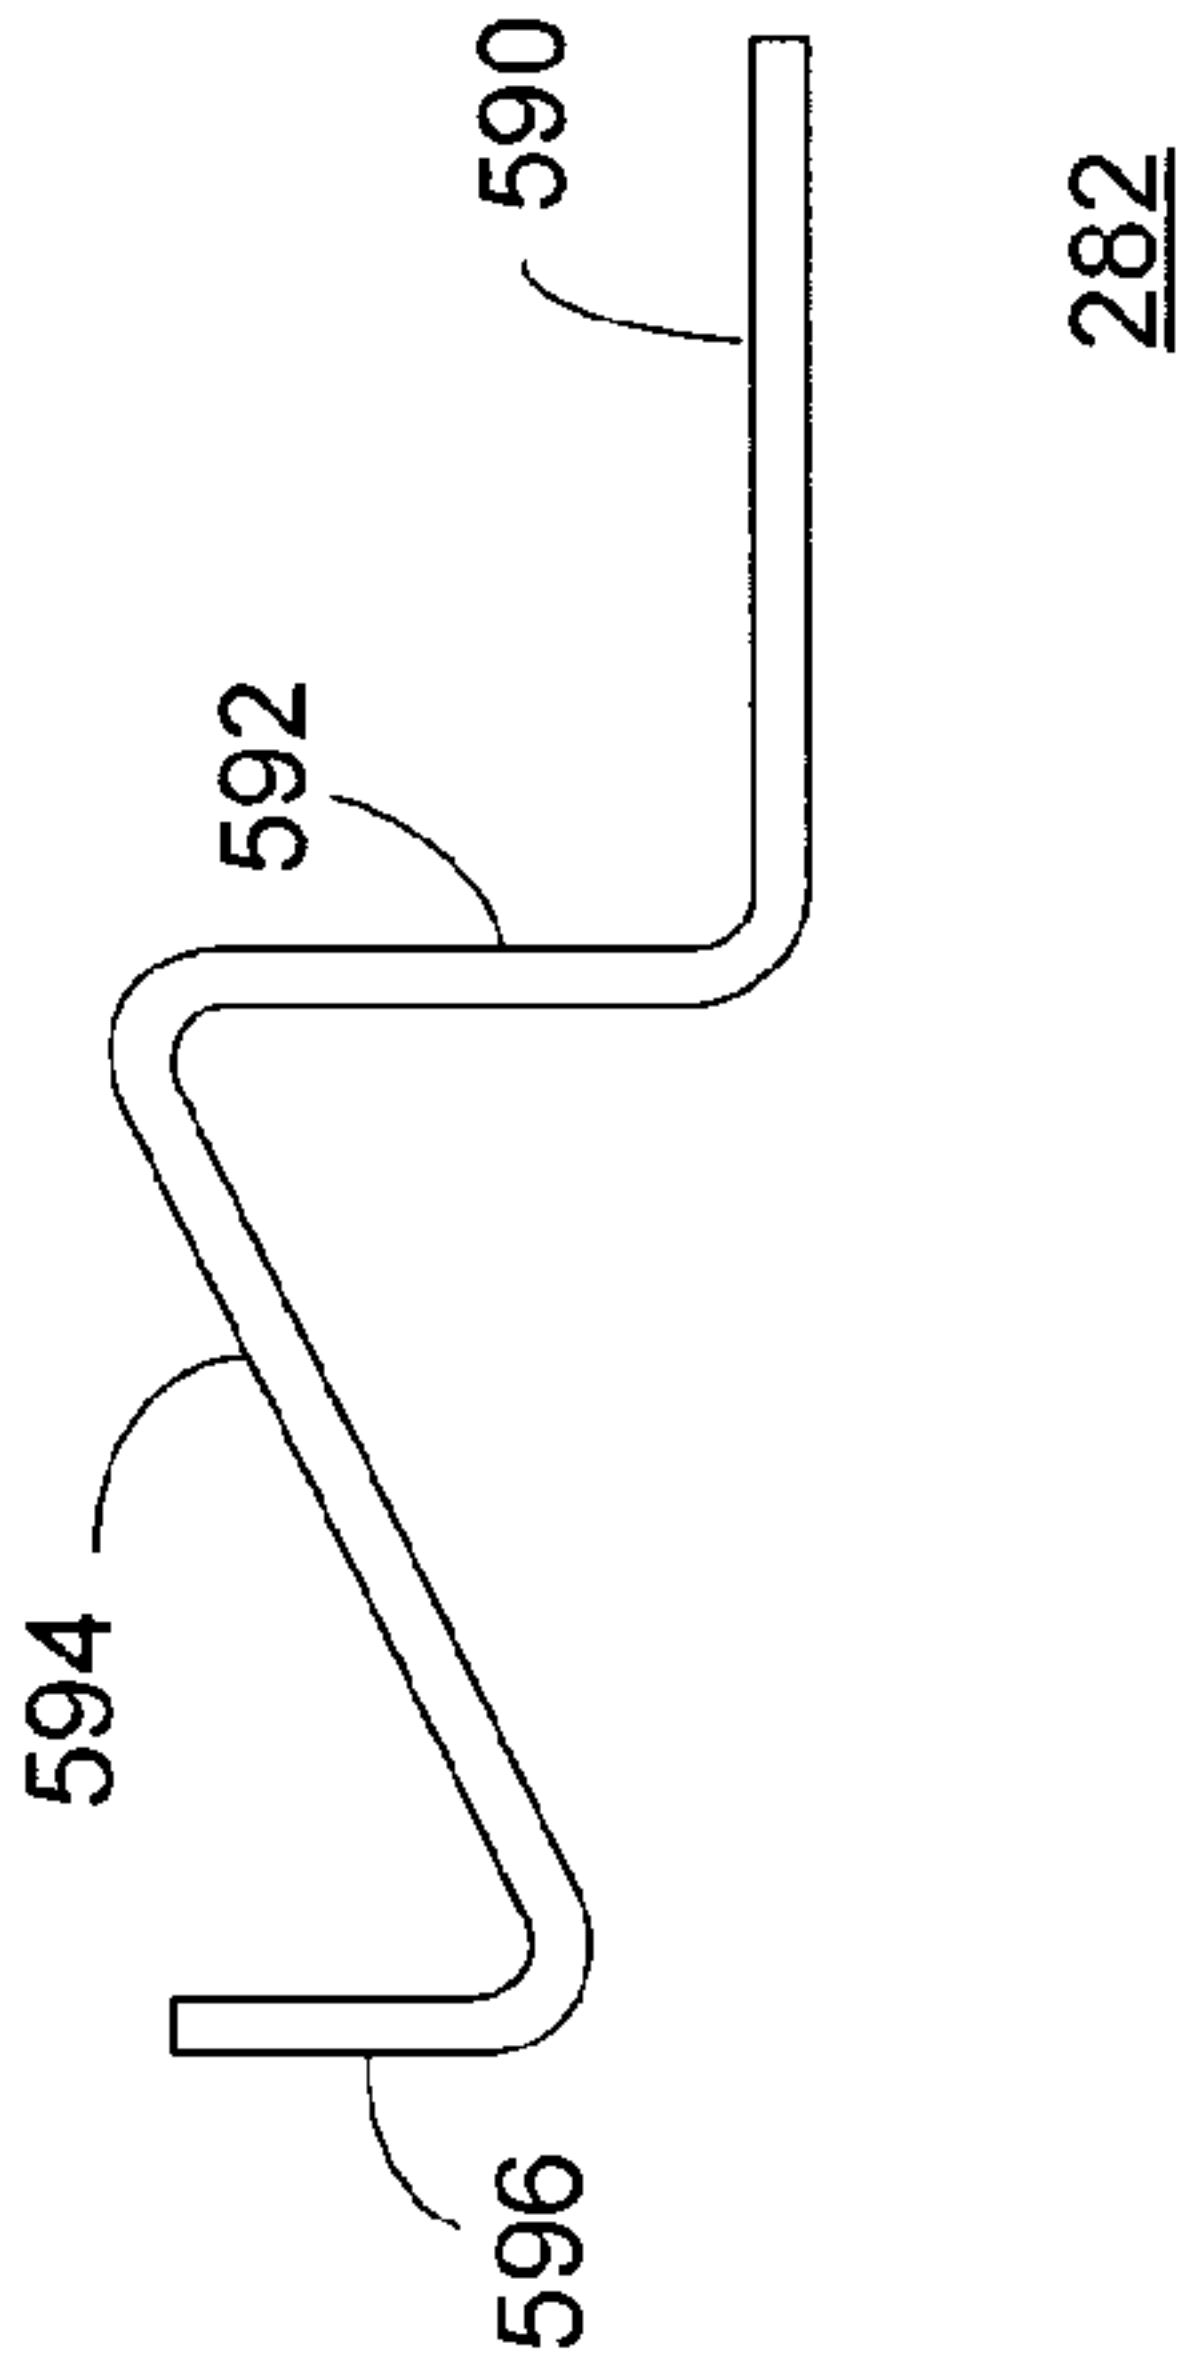


FIG. 19B

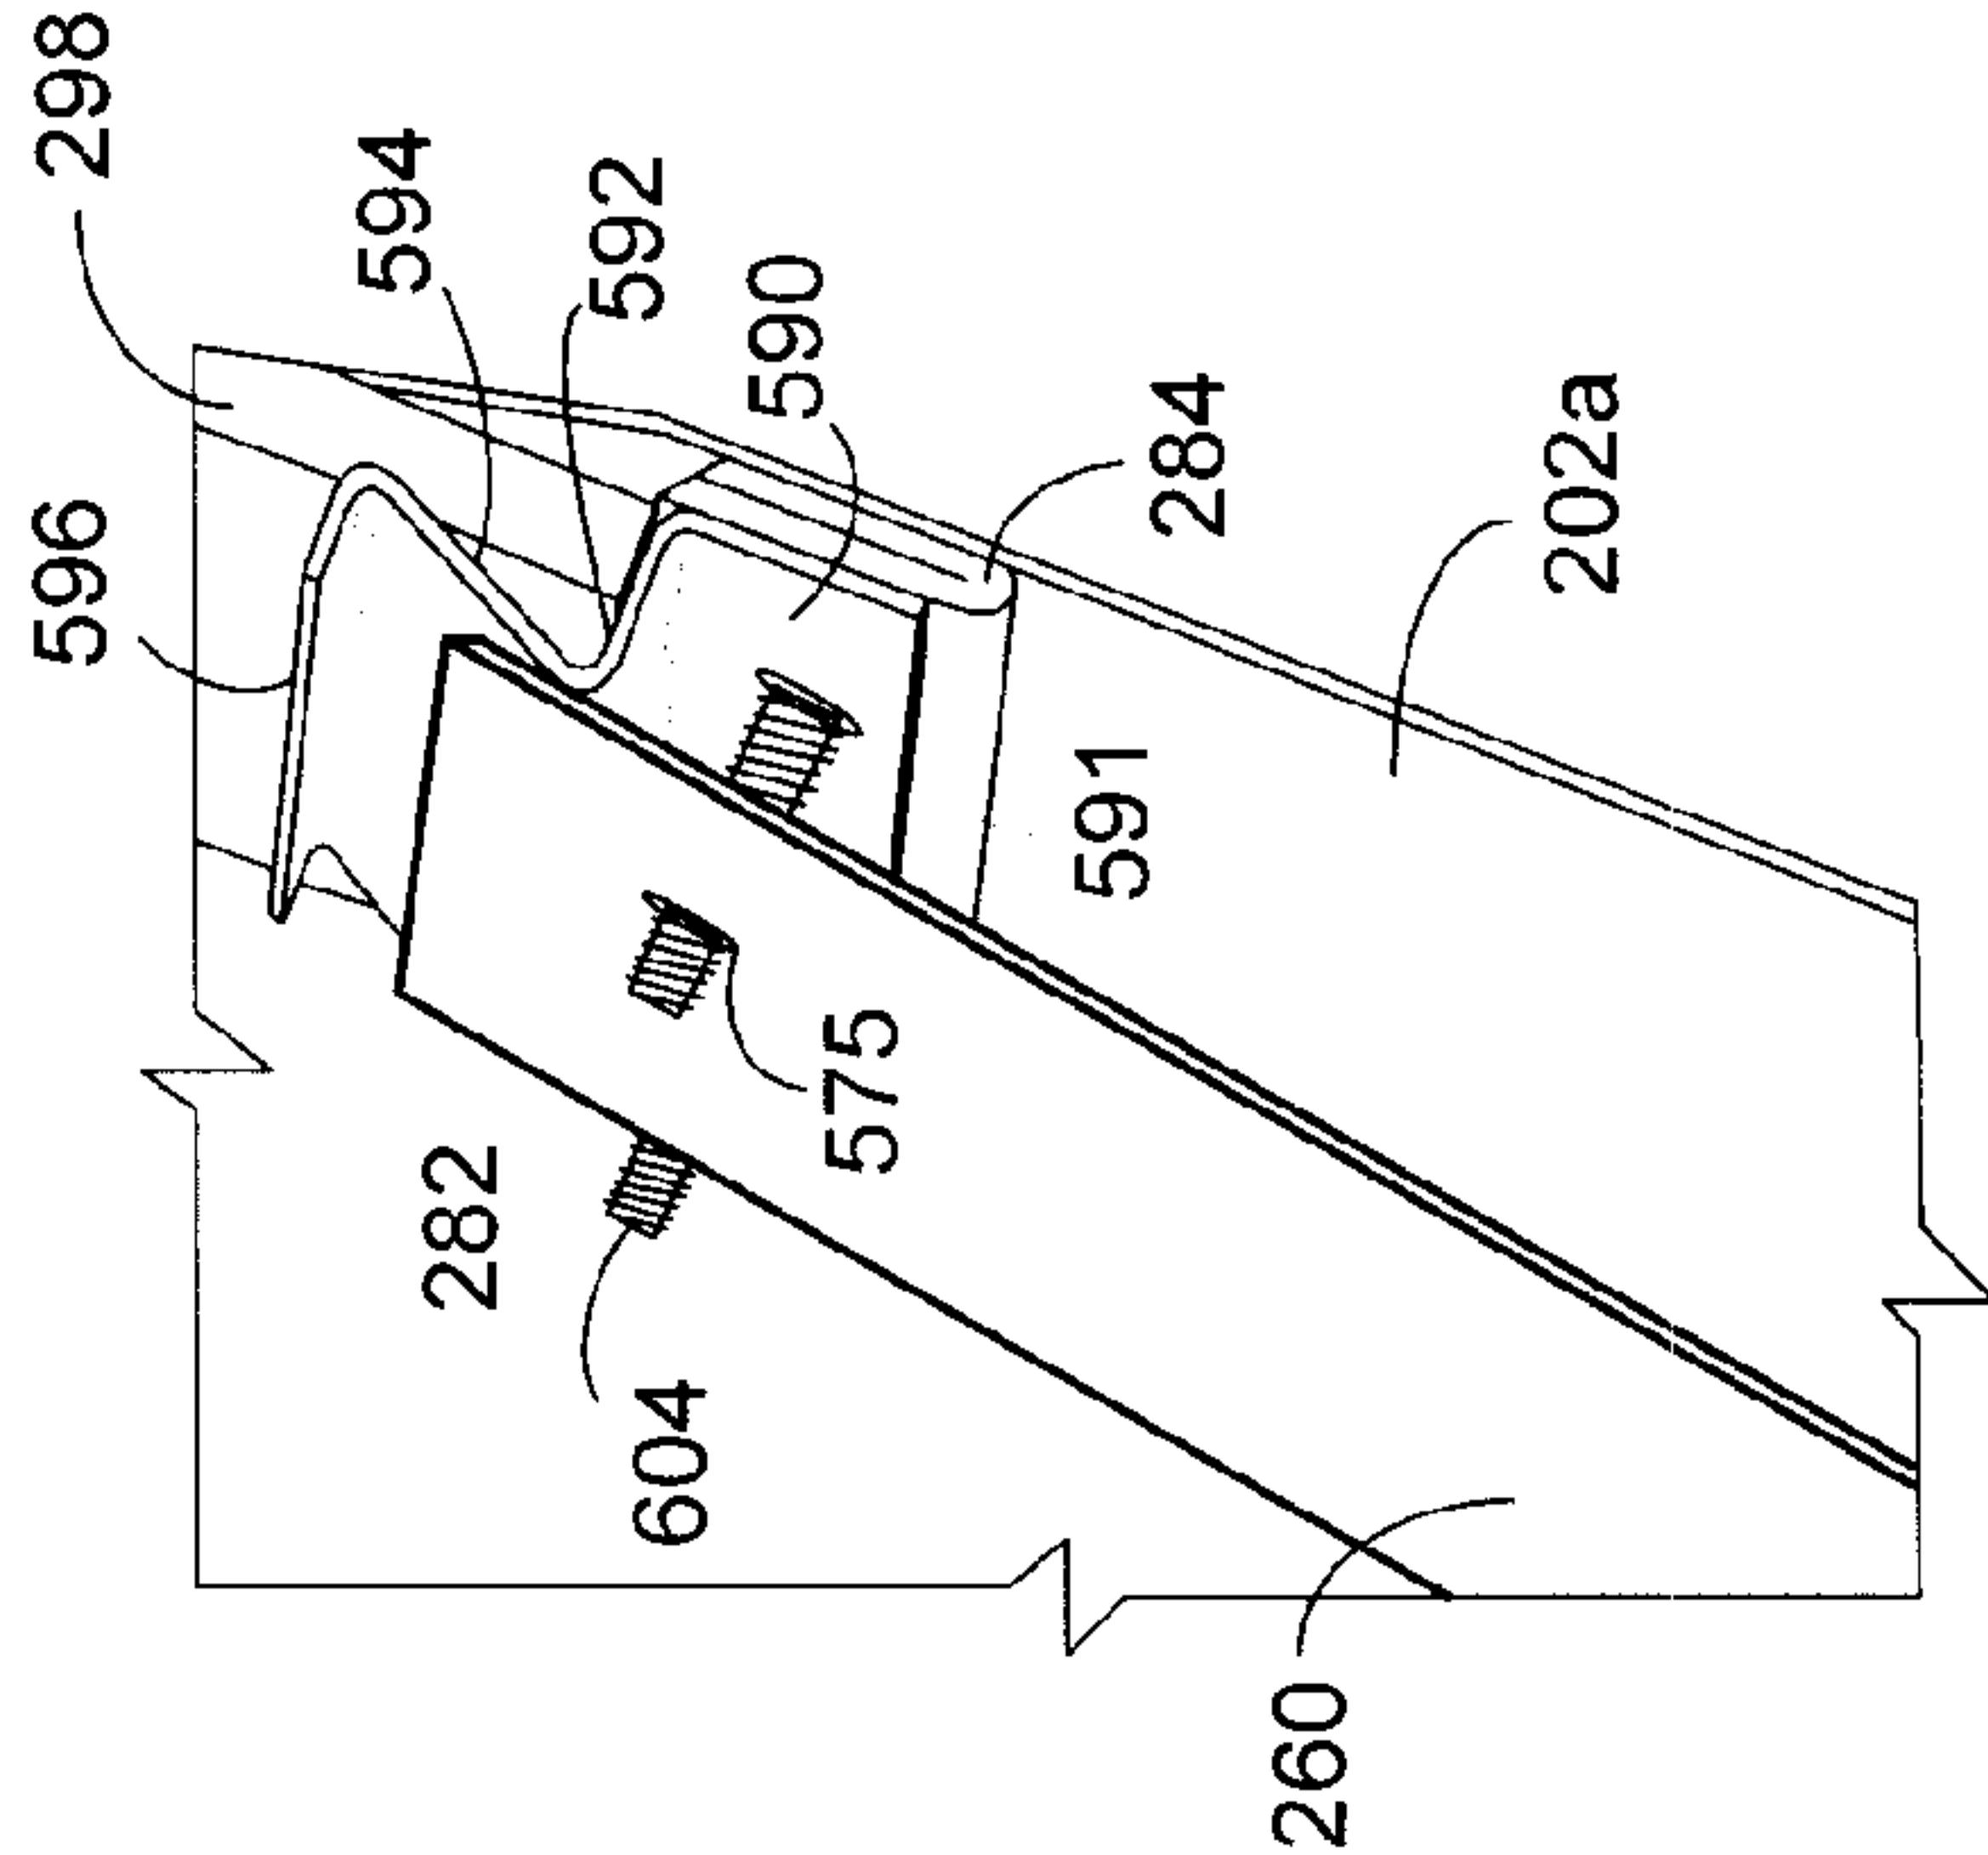


FIG. 19C

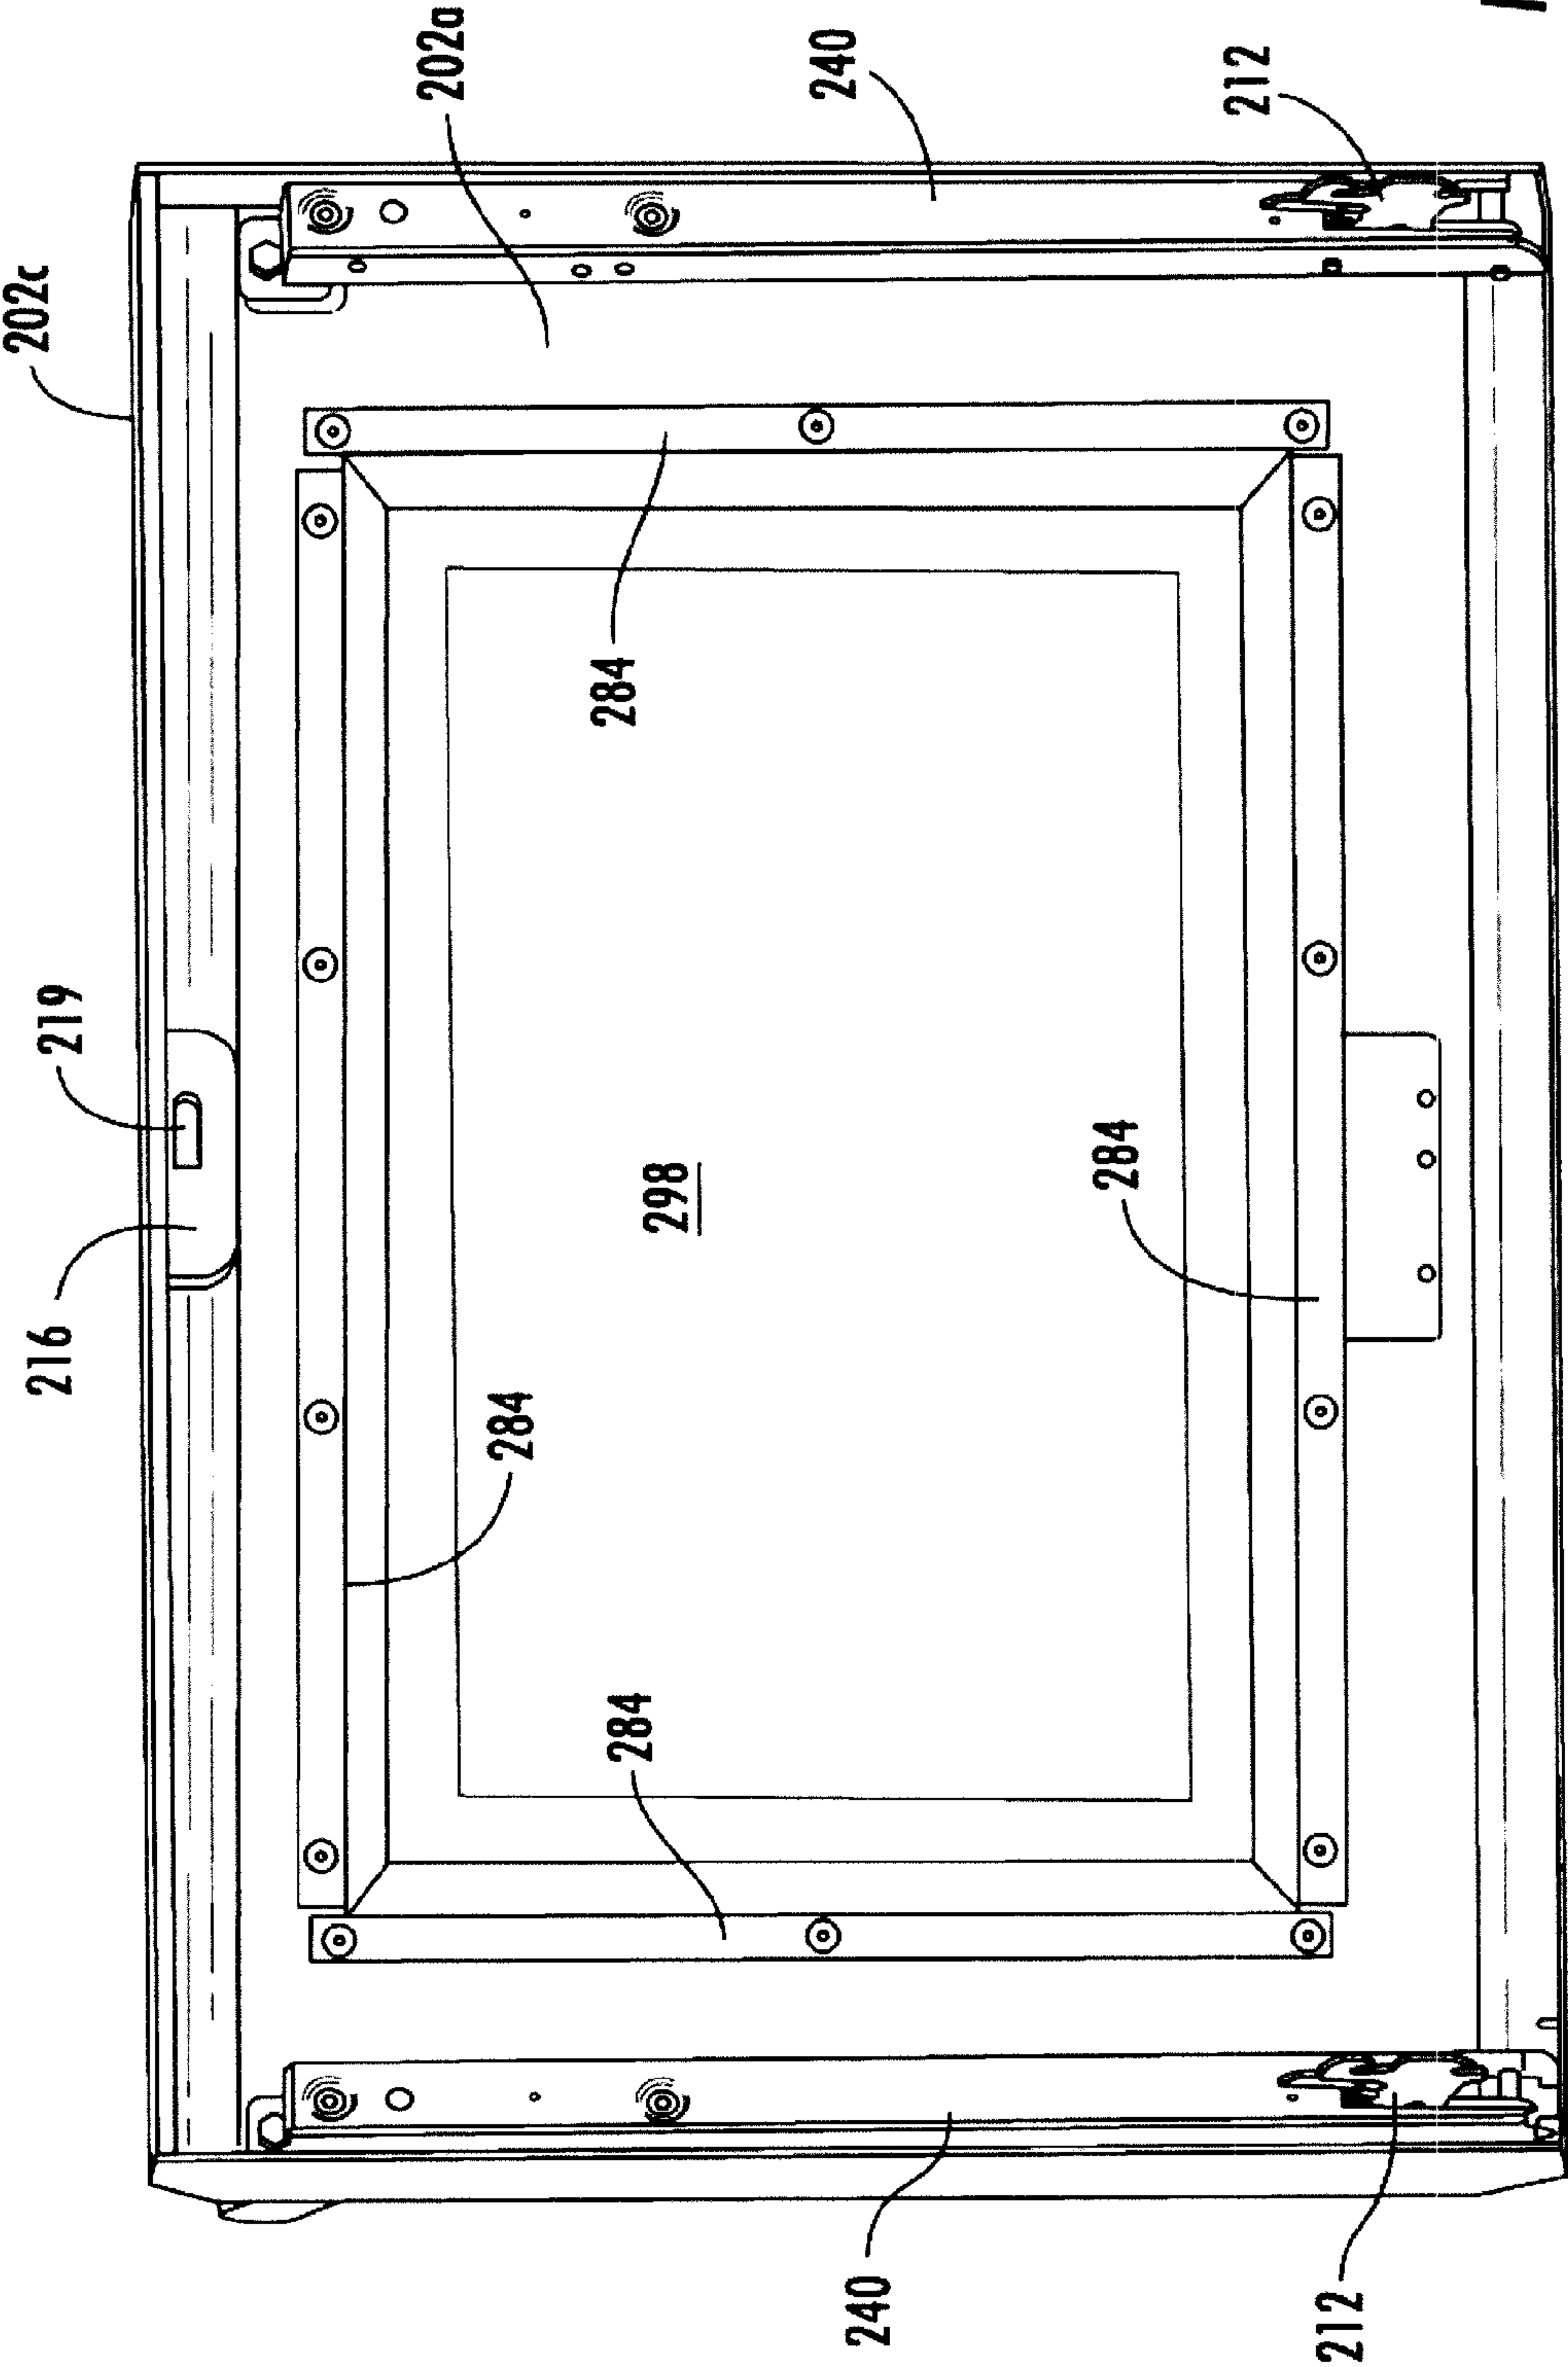
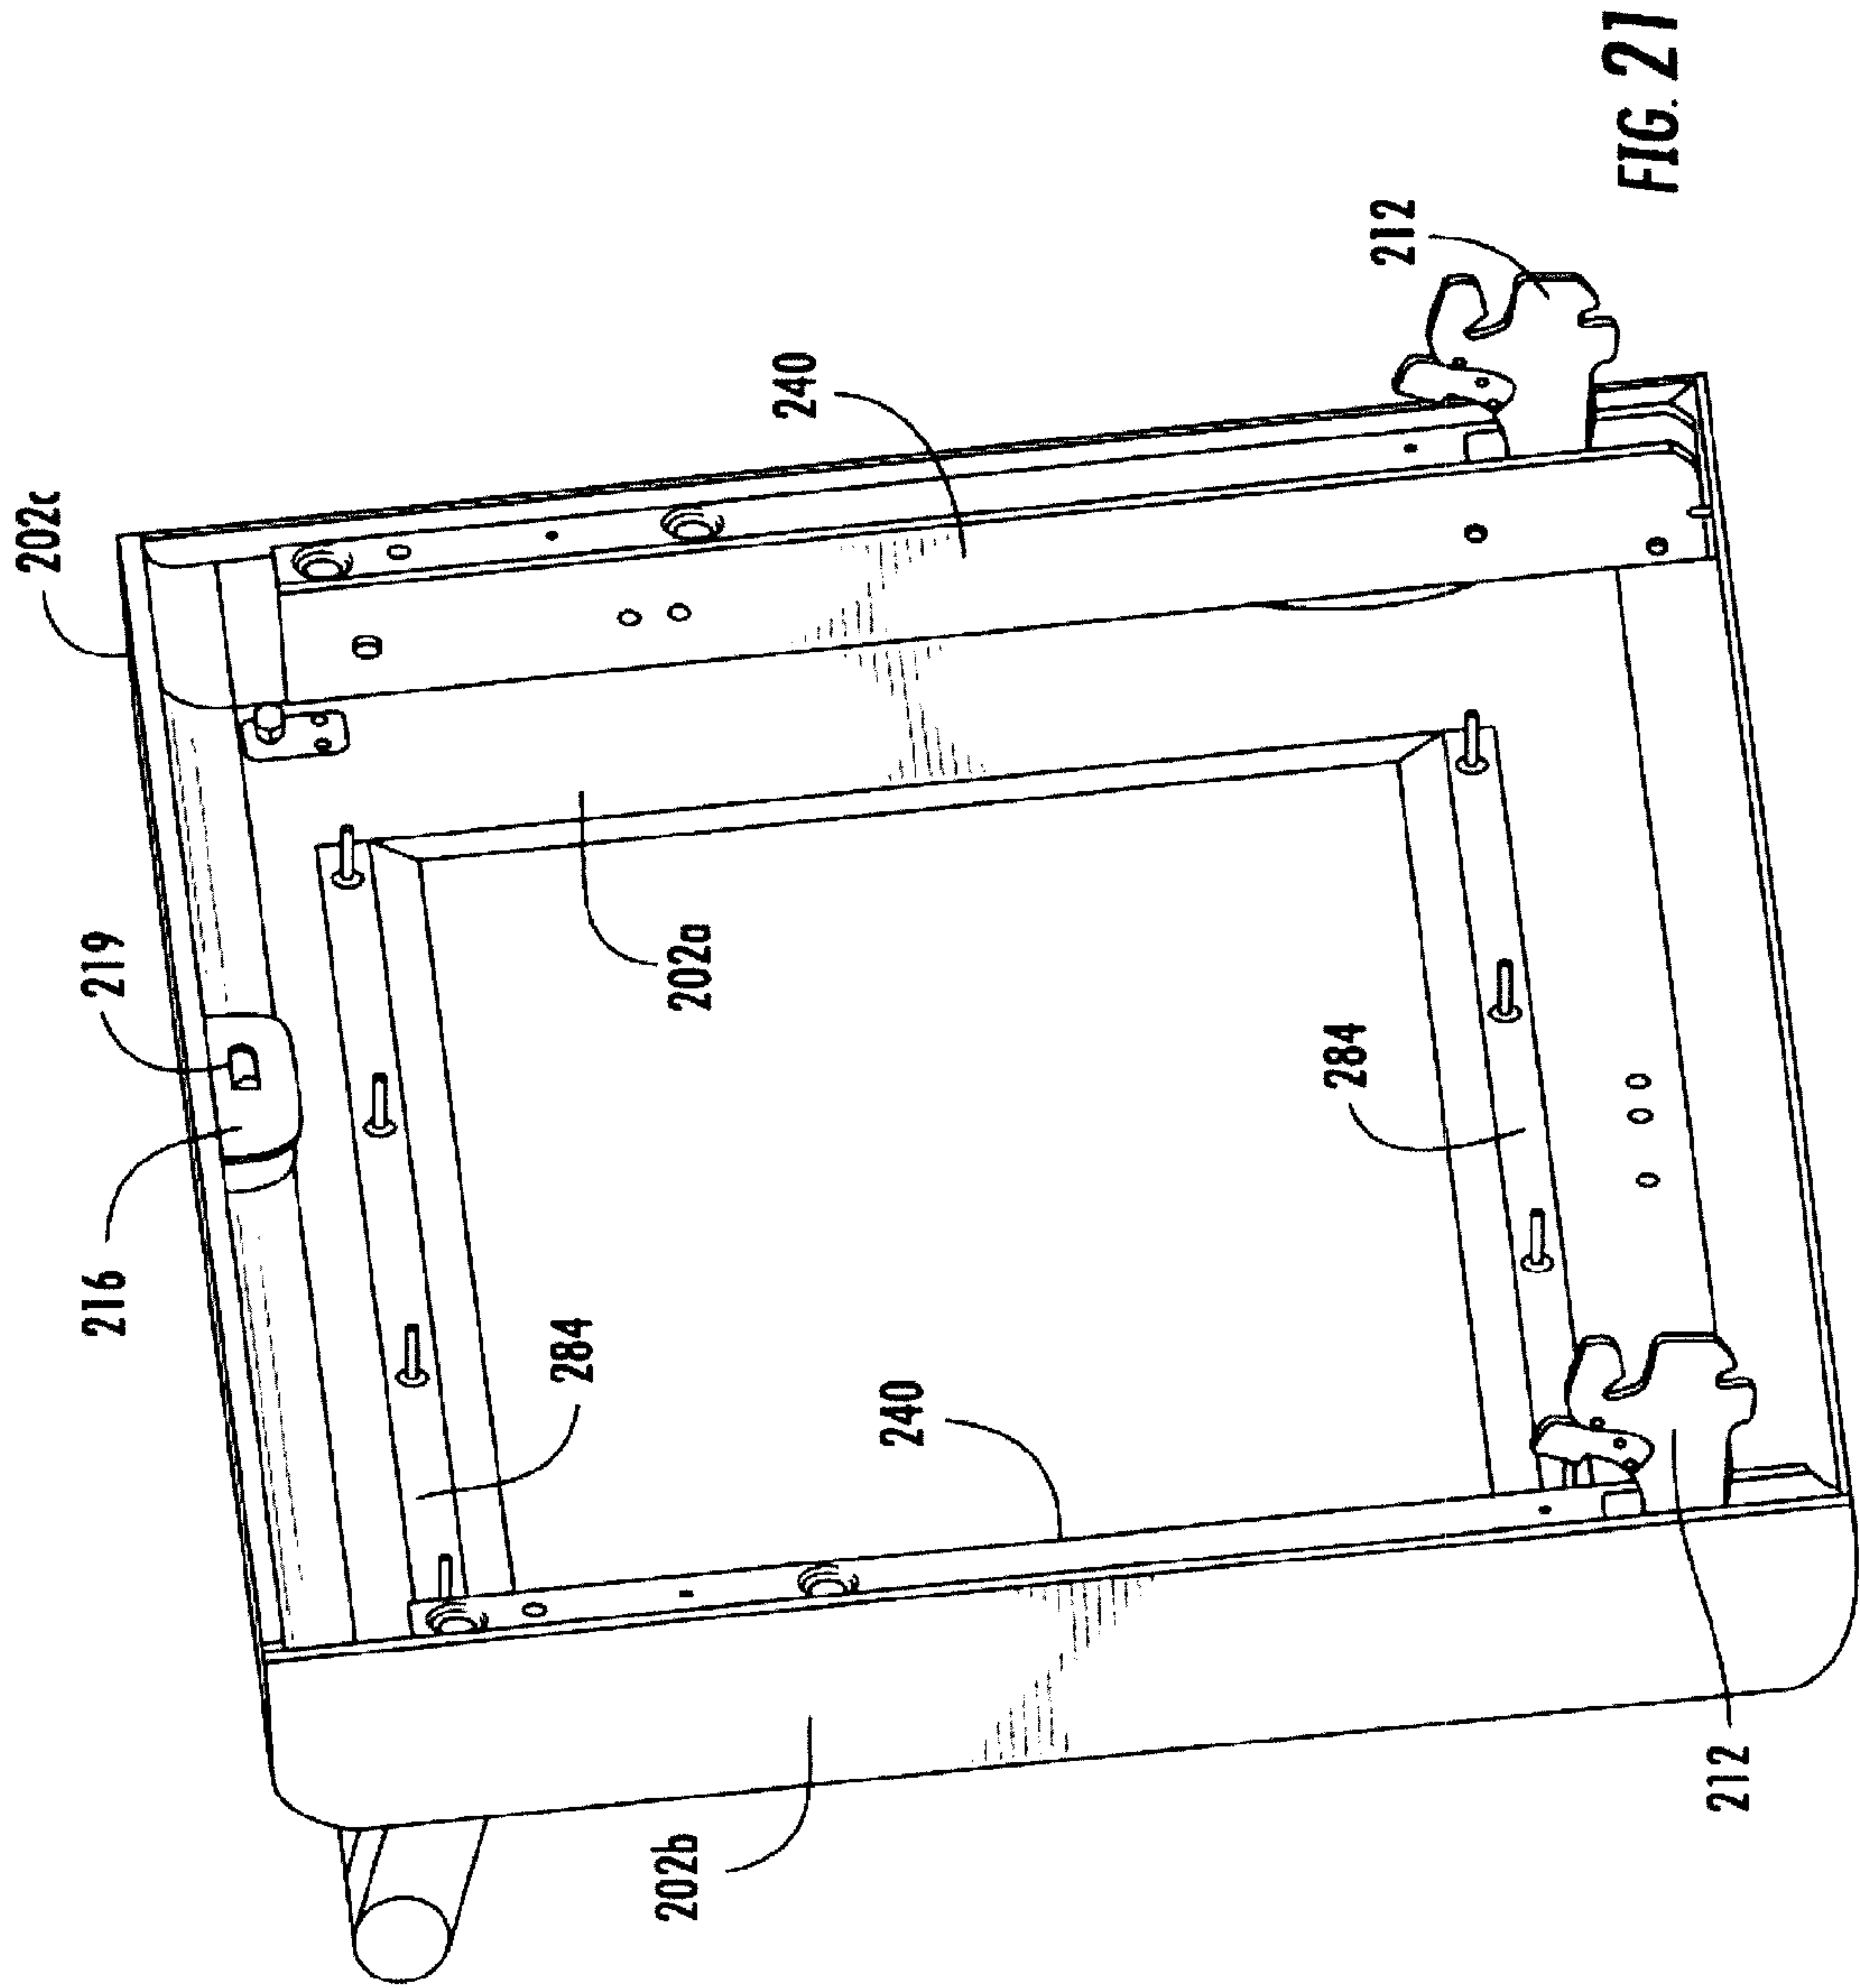


FIG. 20



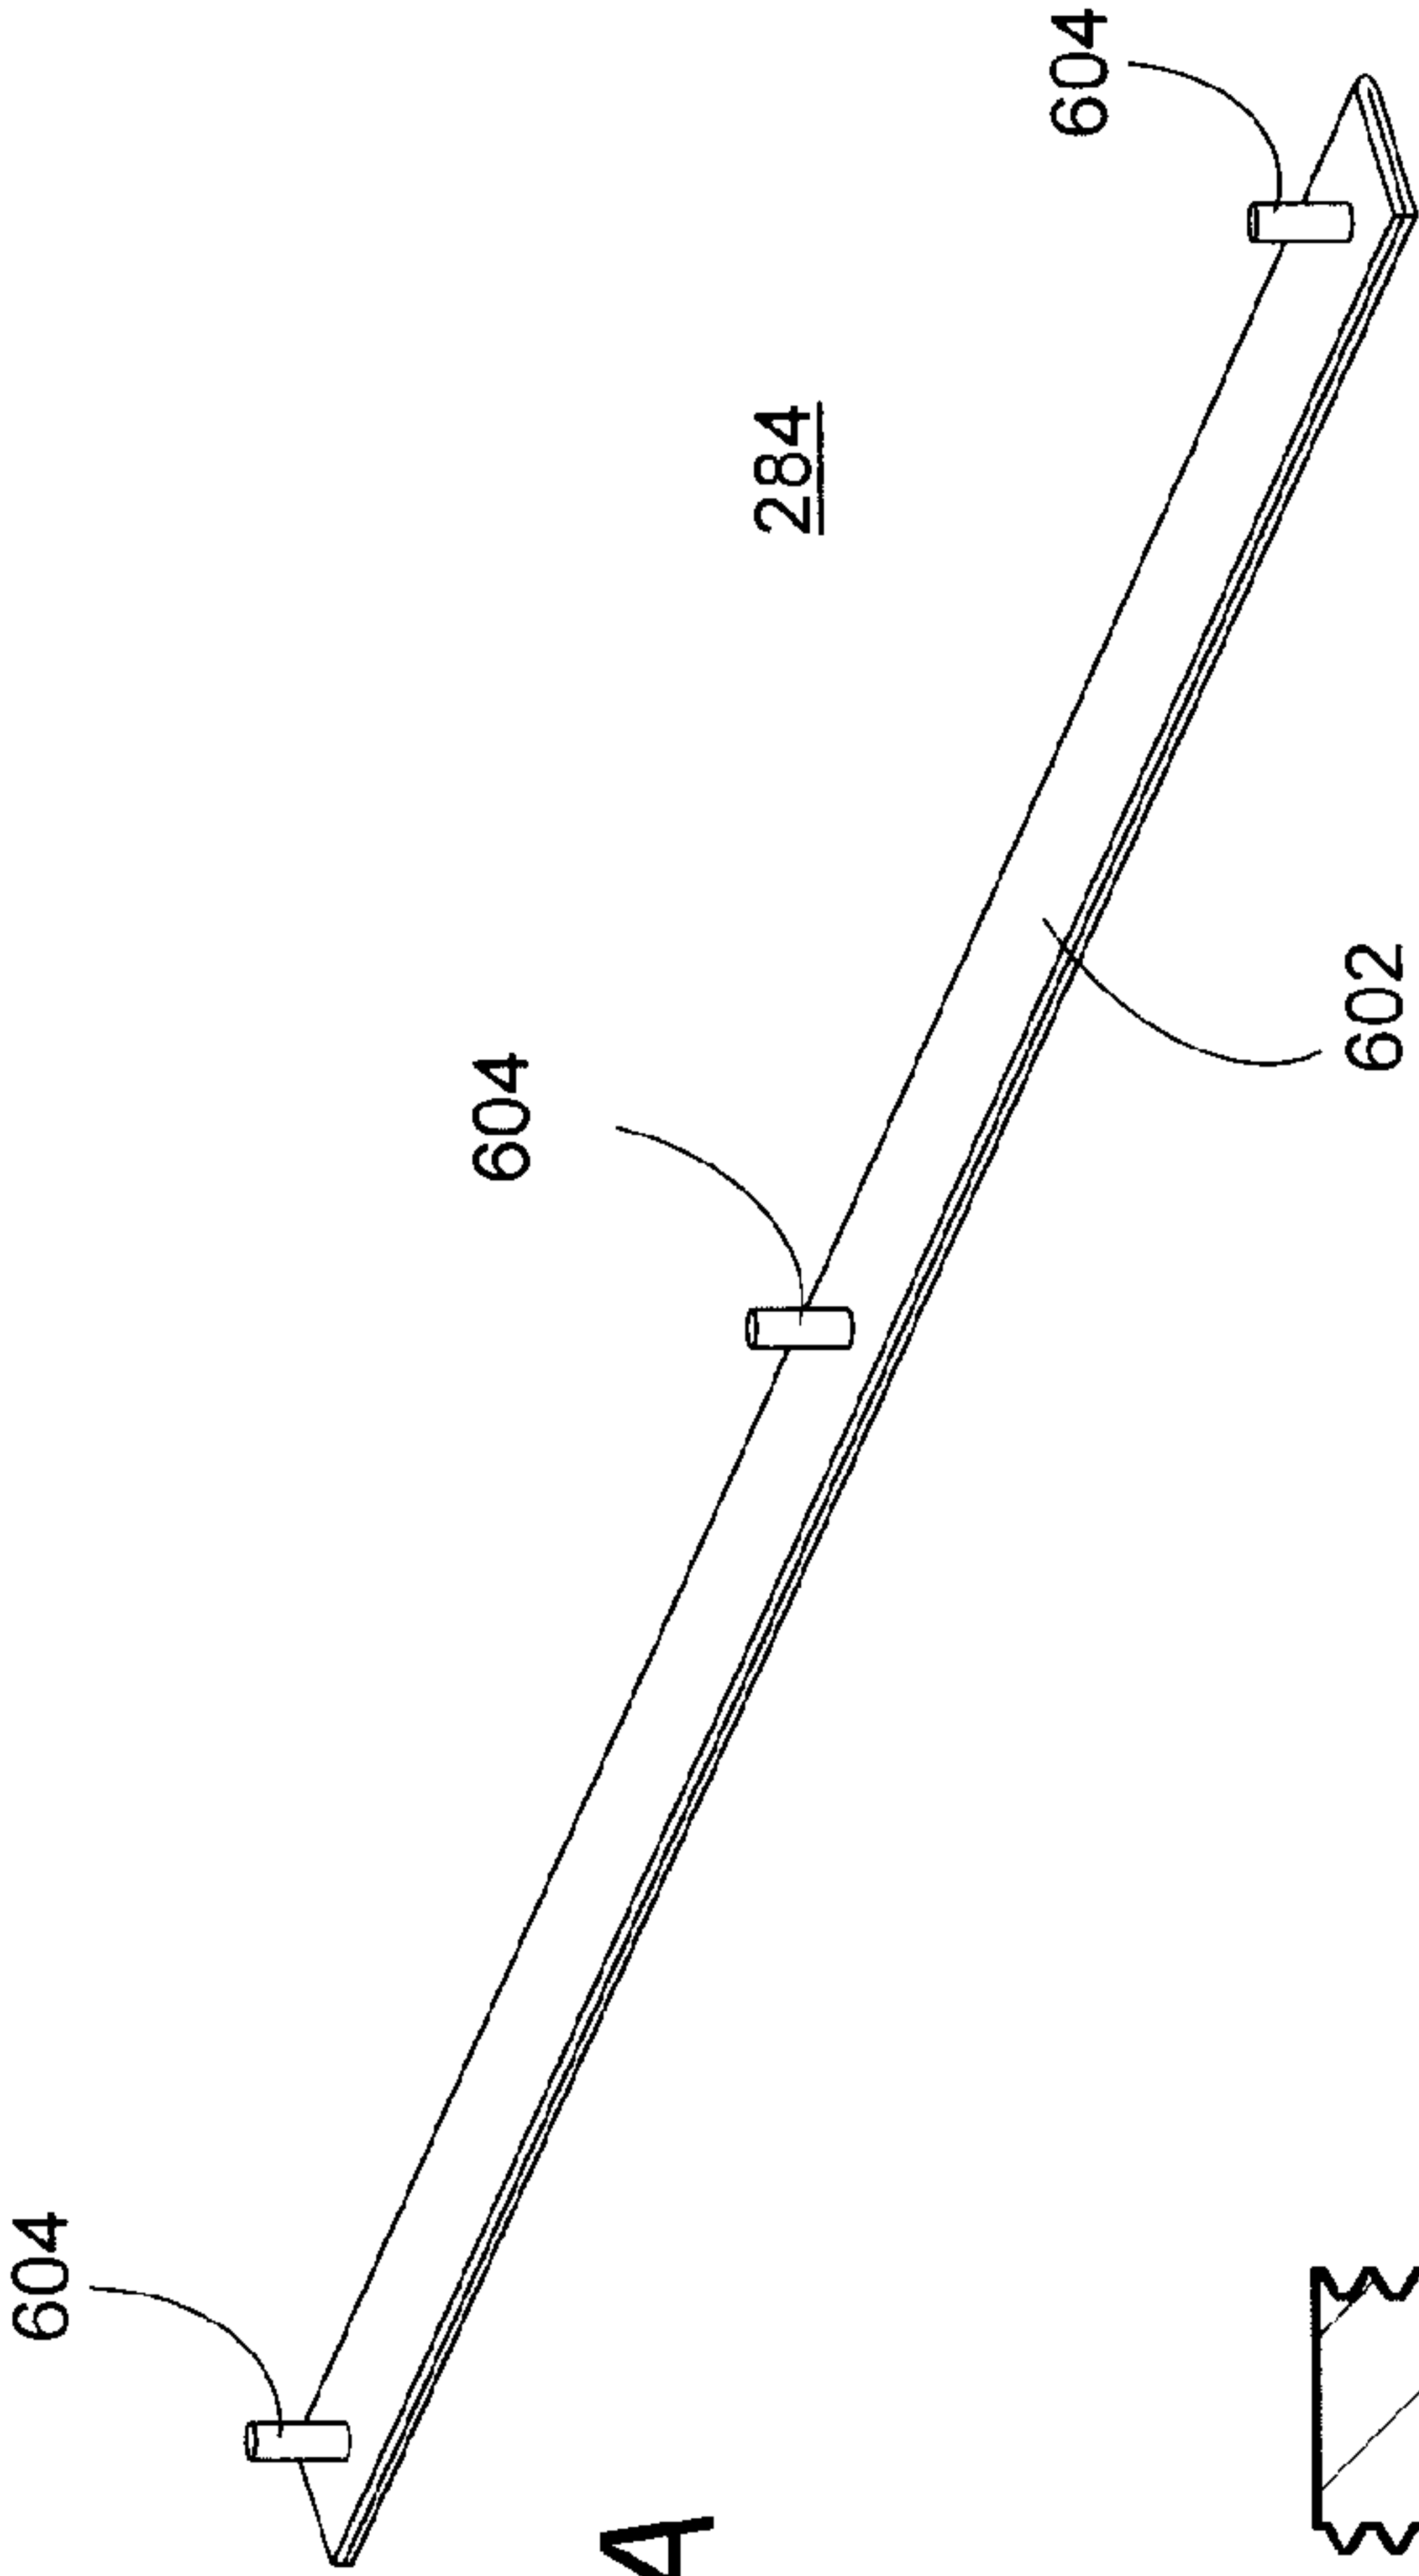


FIG. 22A

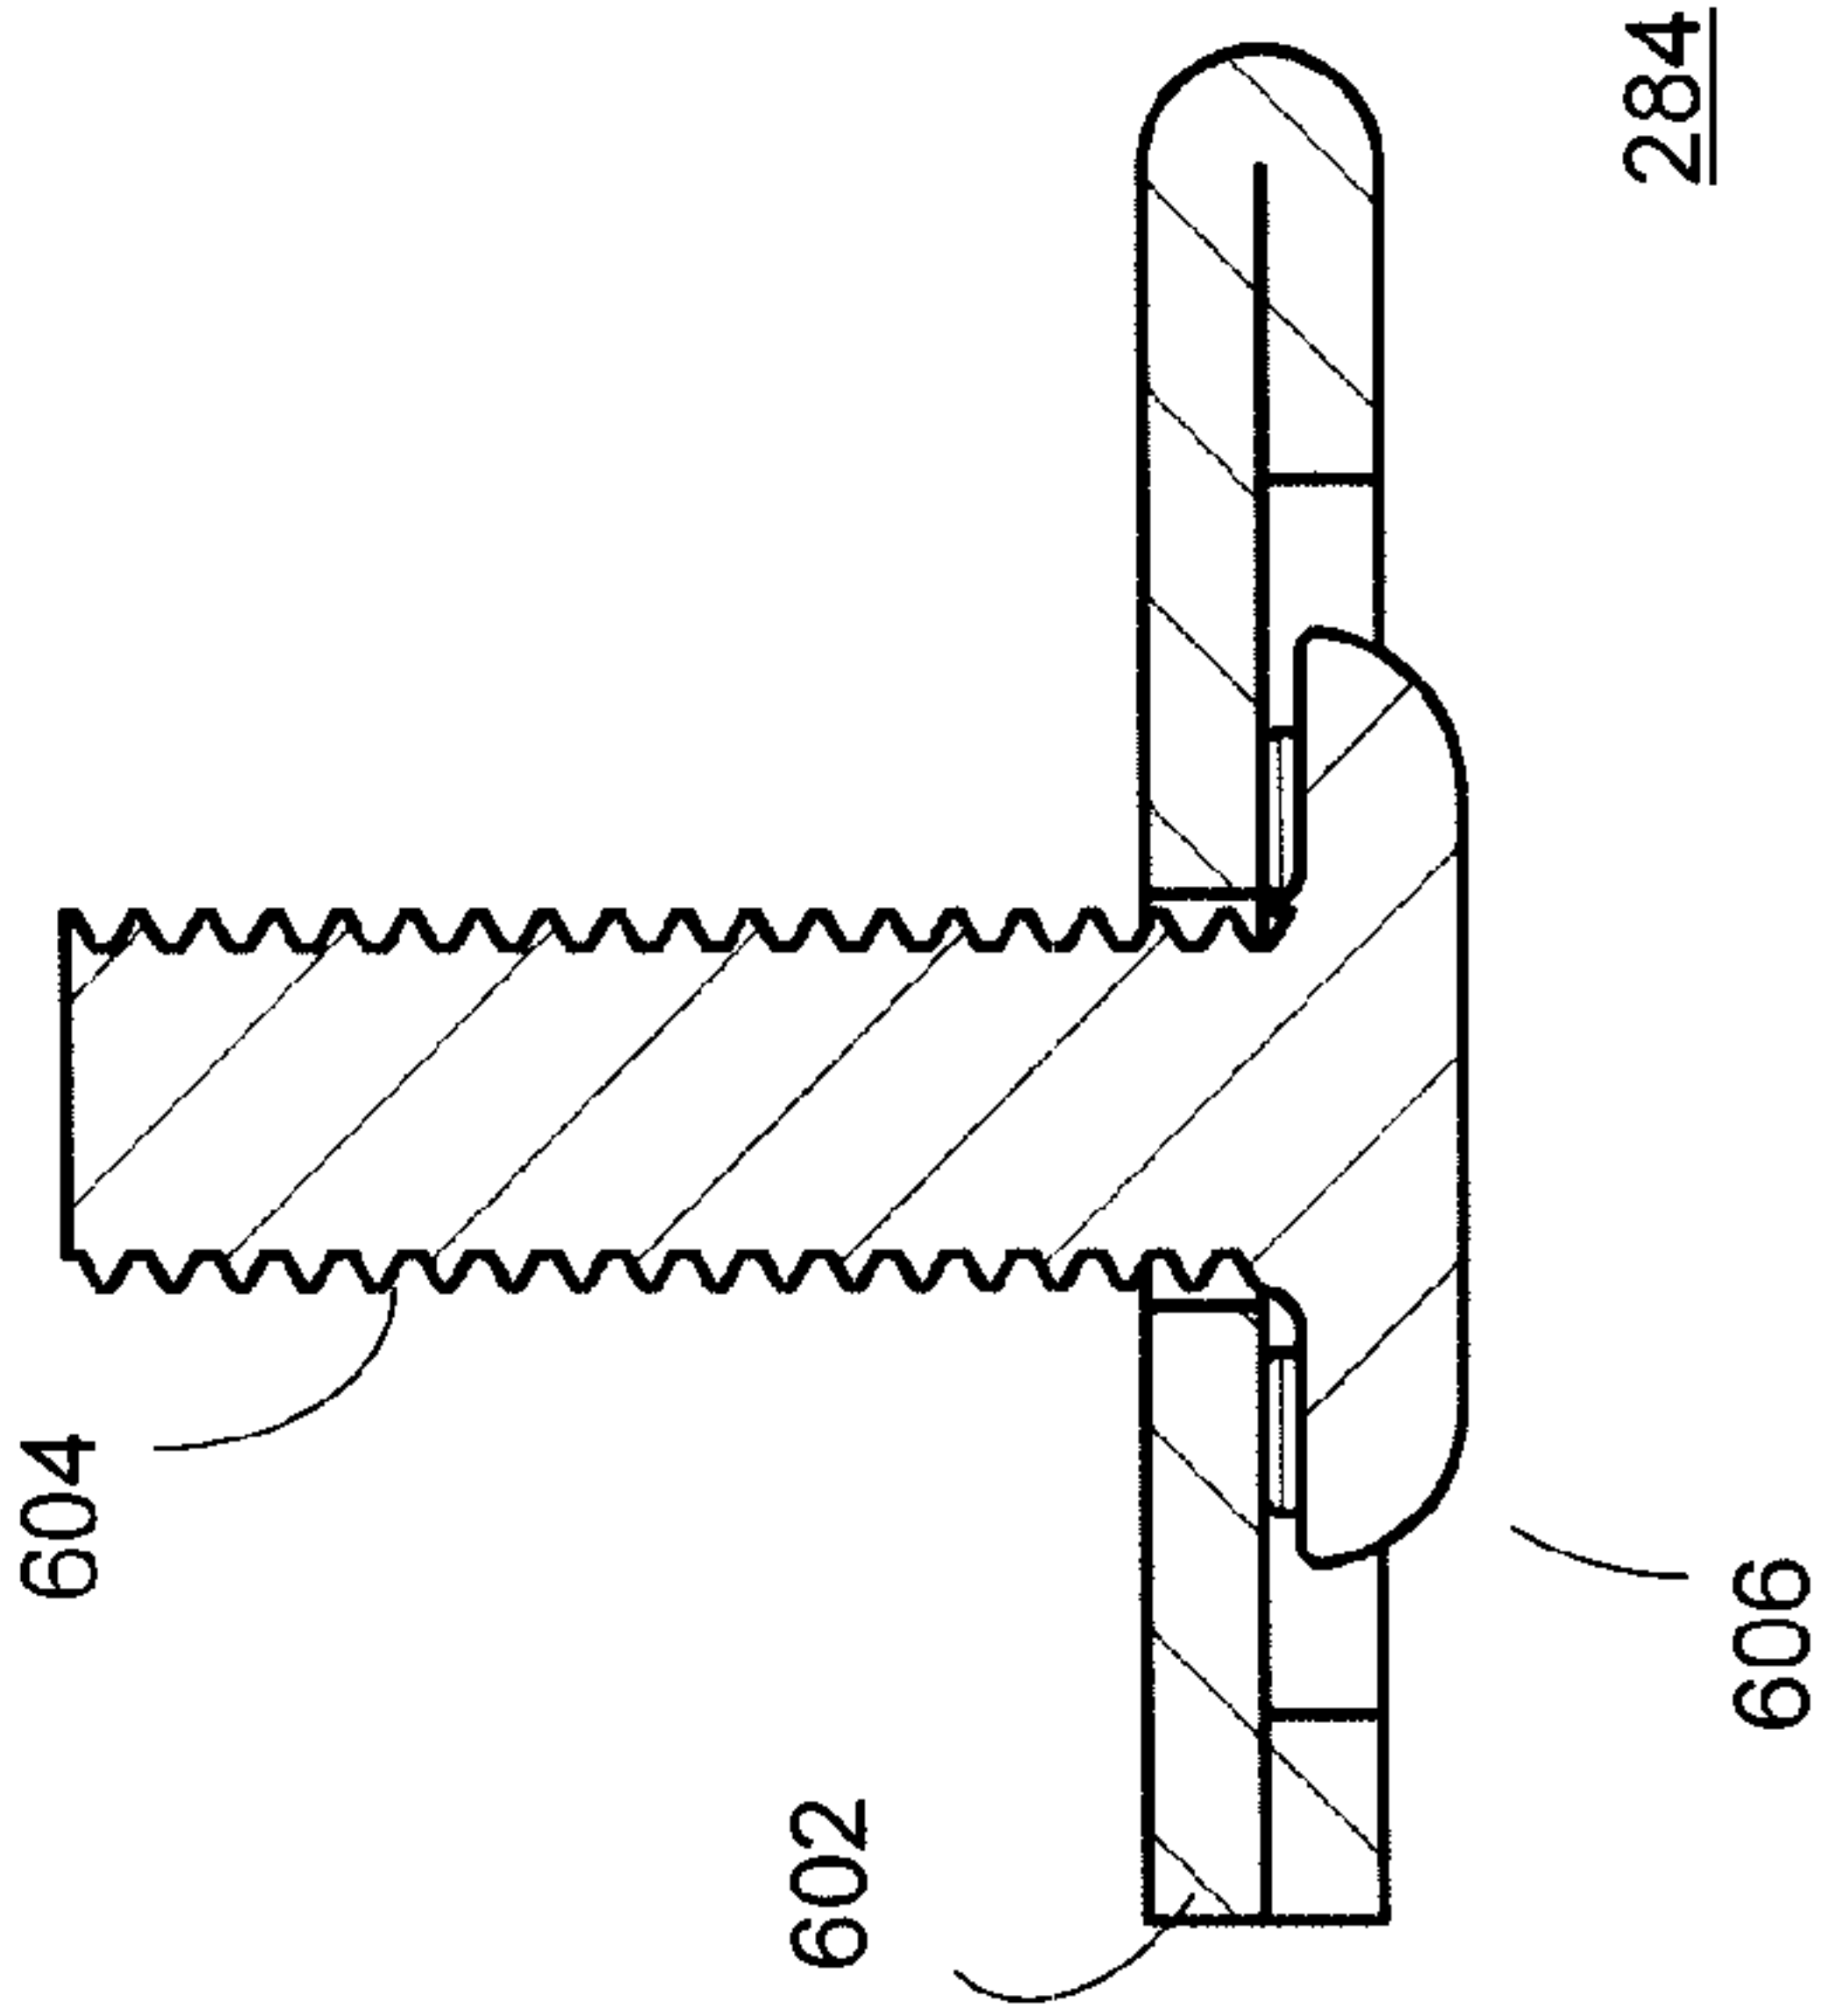


FIG. 22B

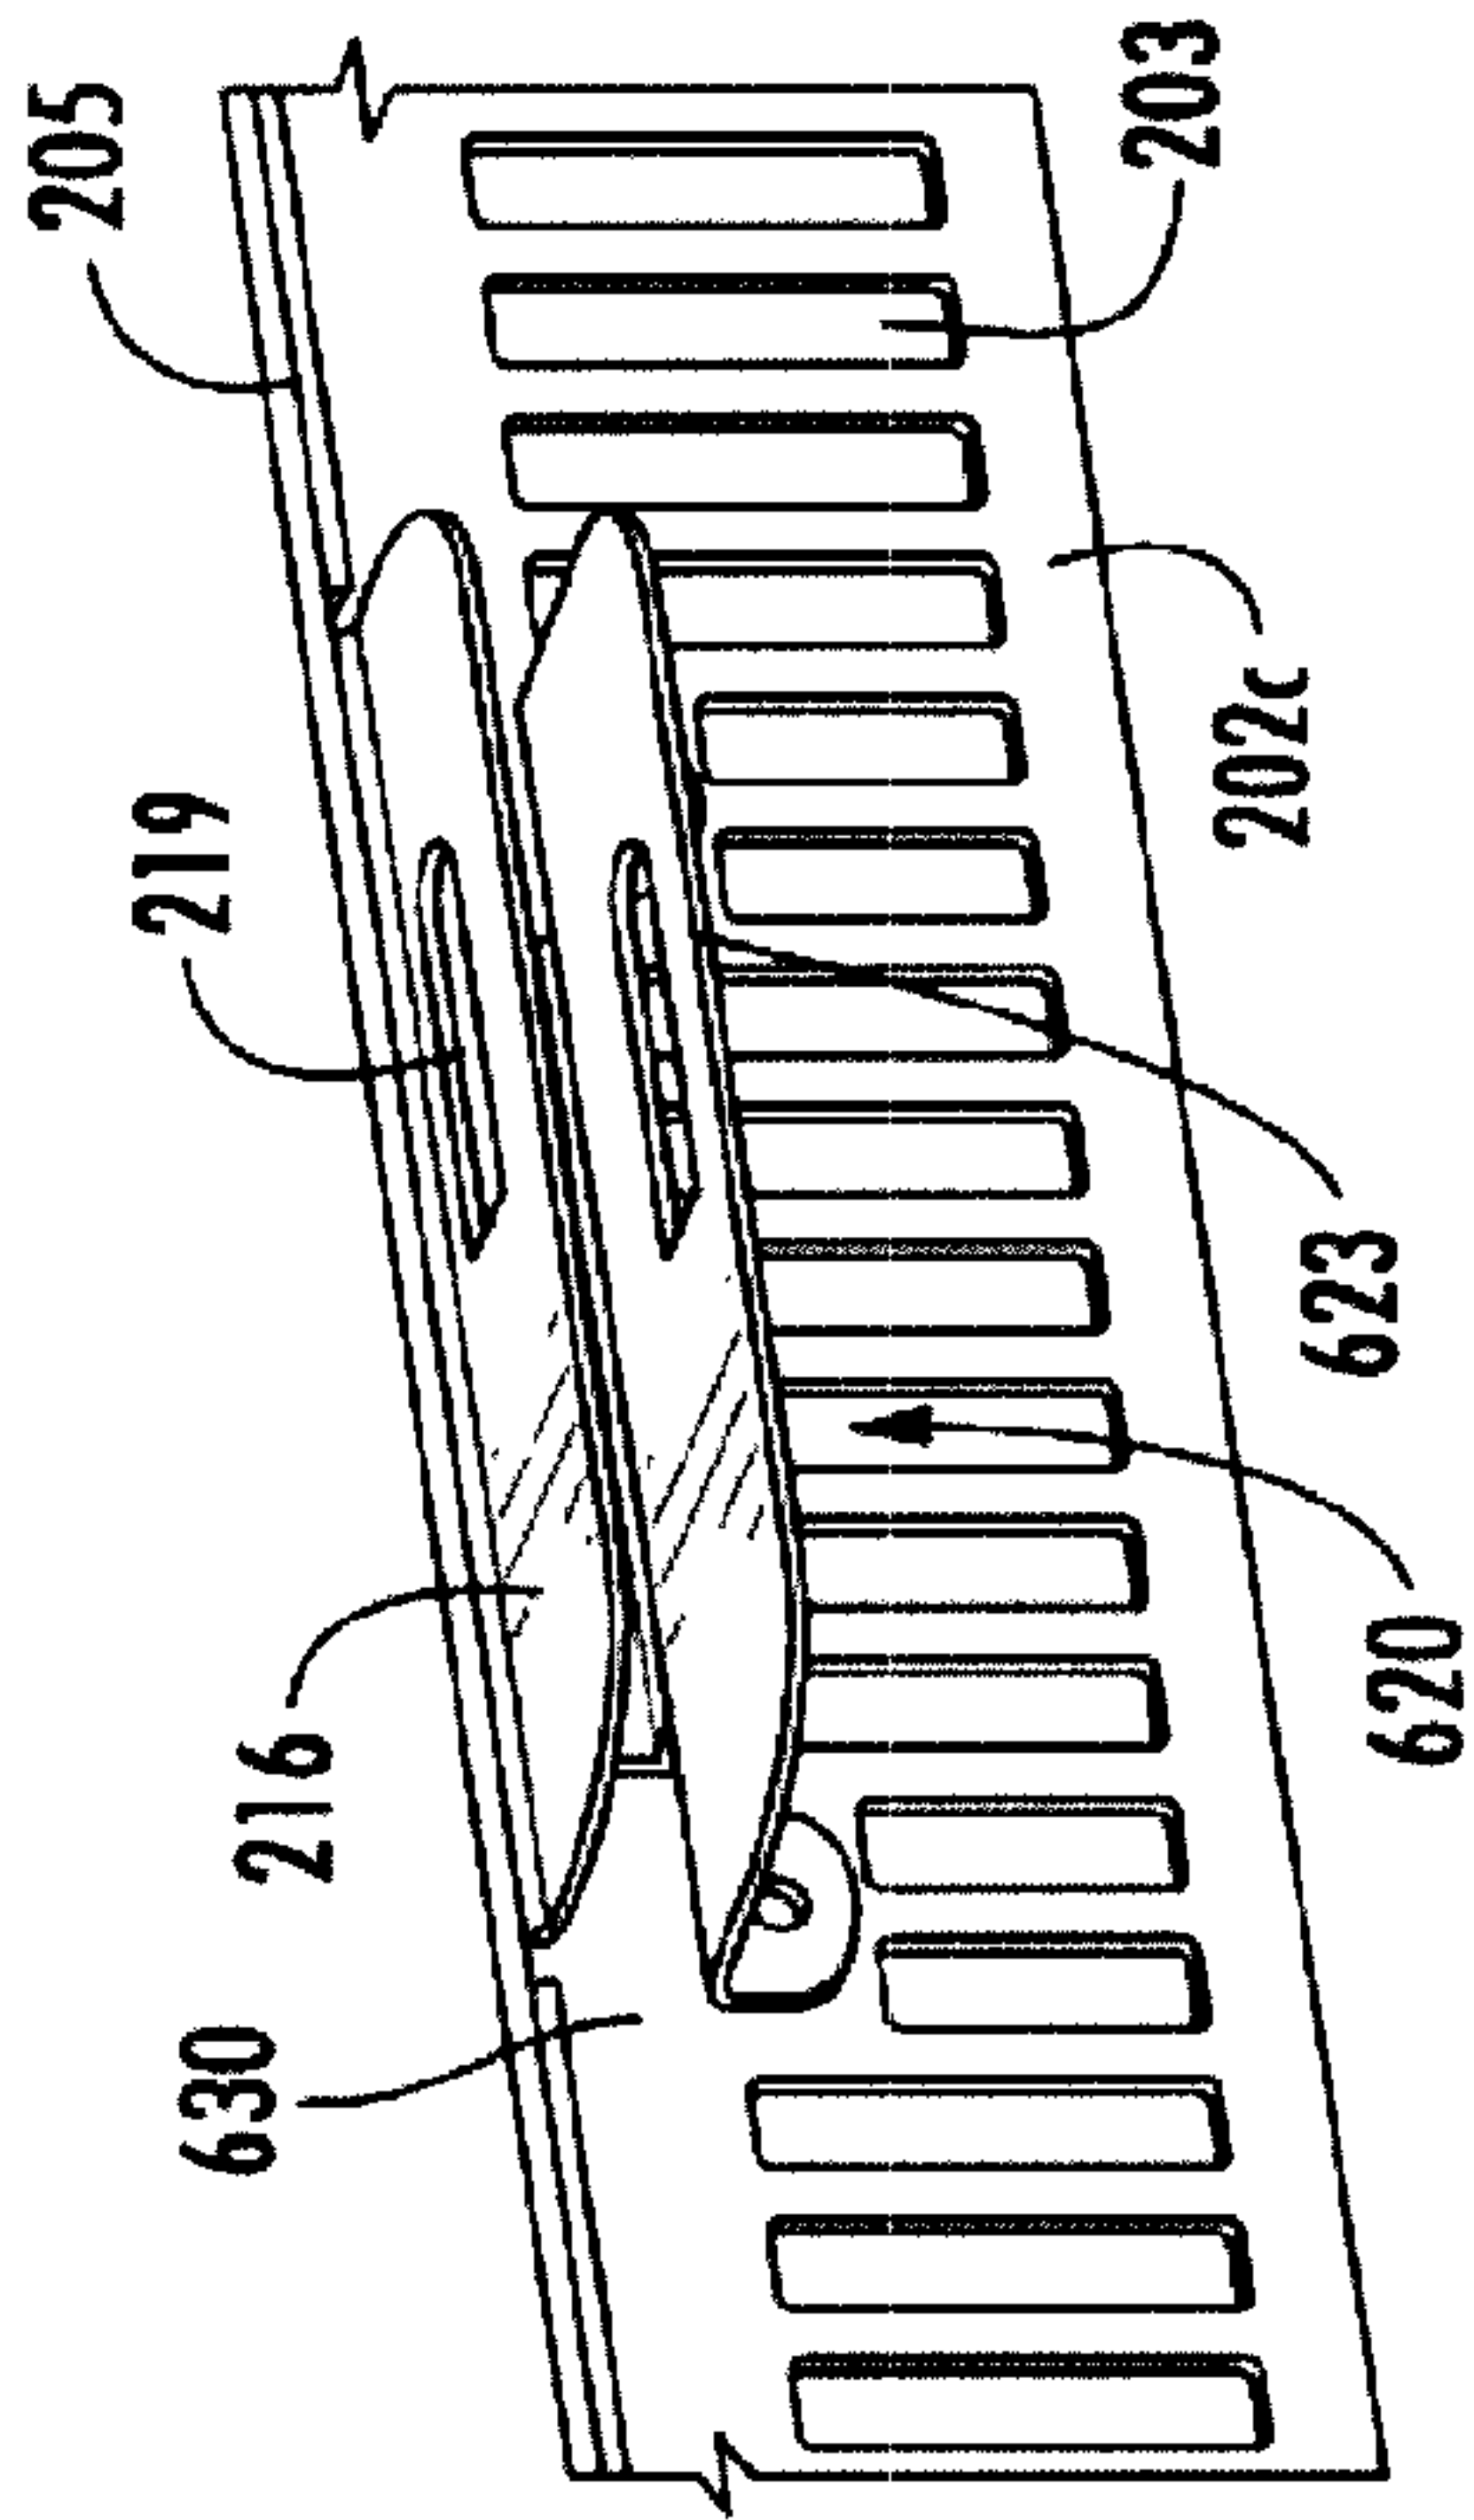
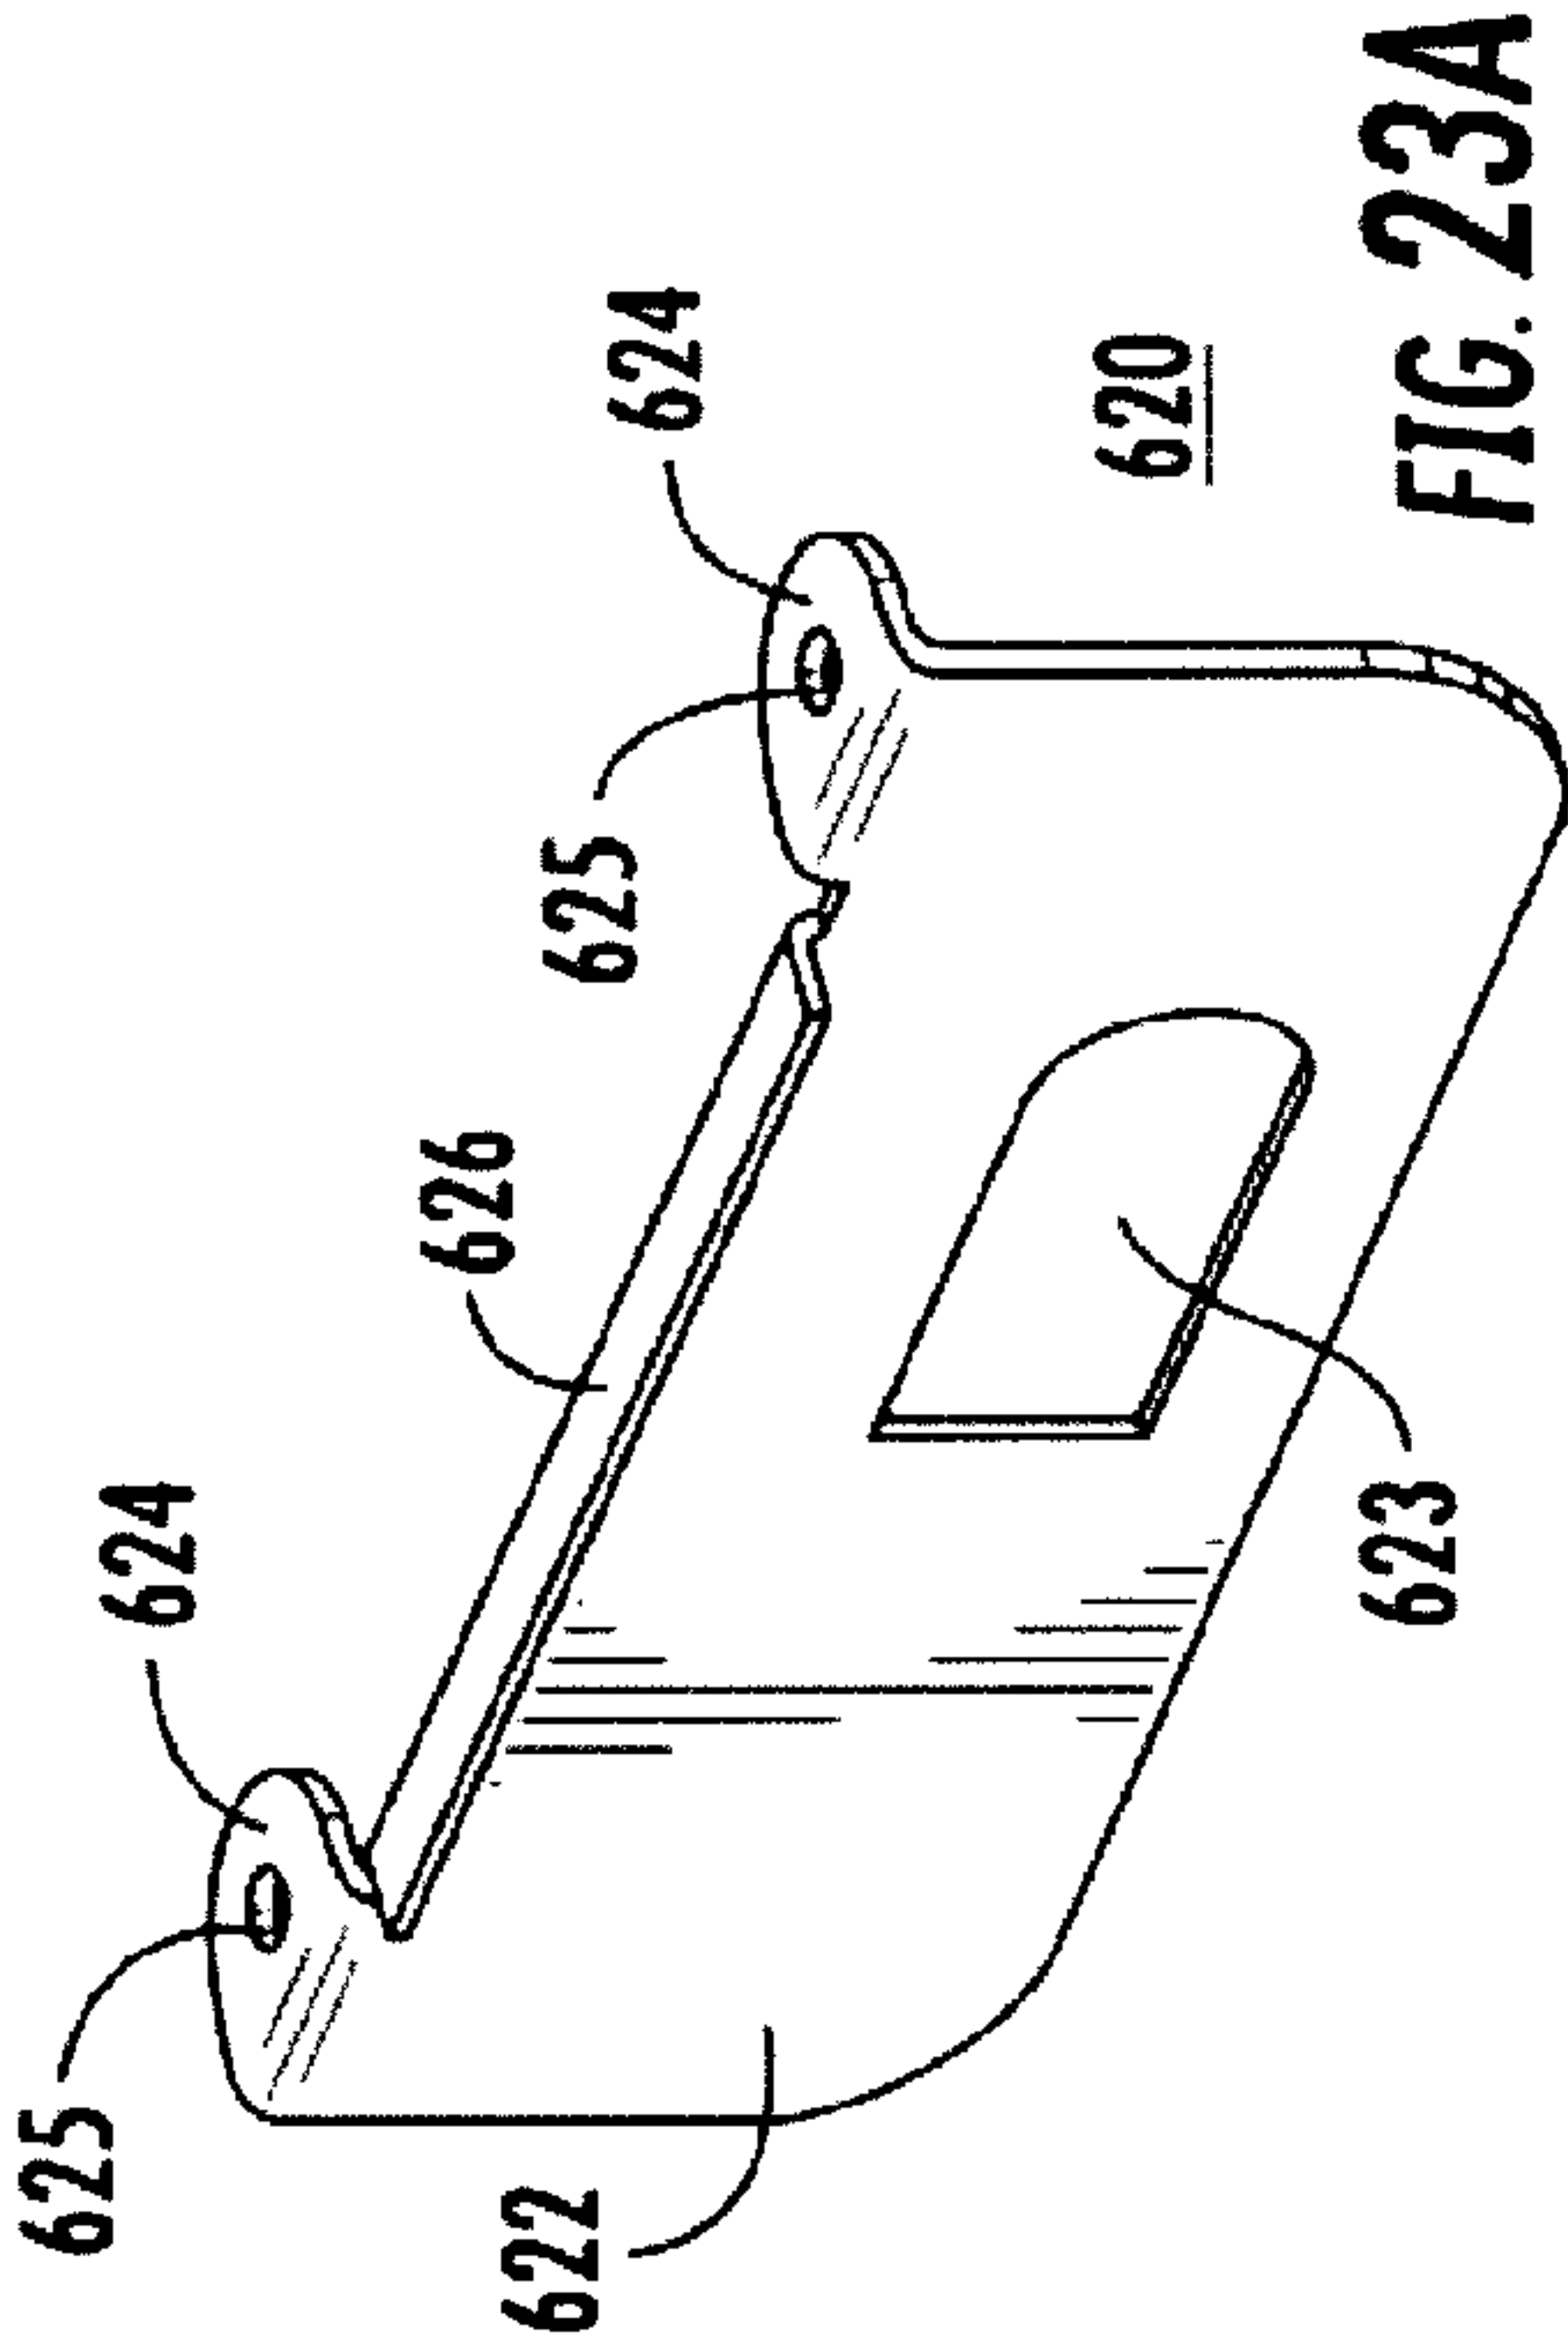


FIG. 23B

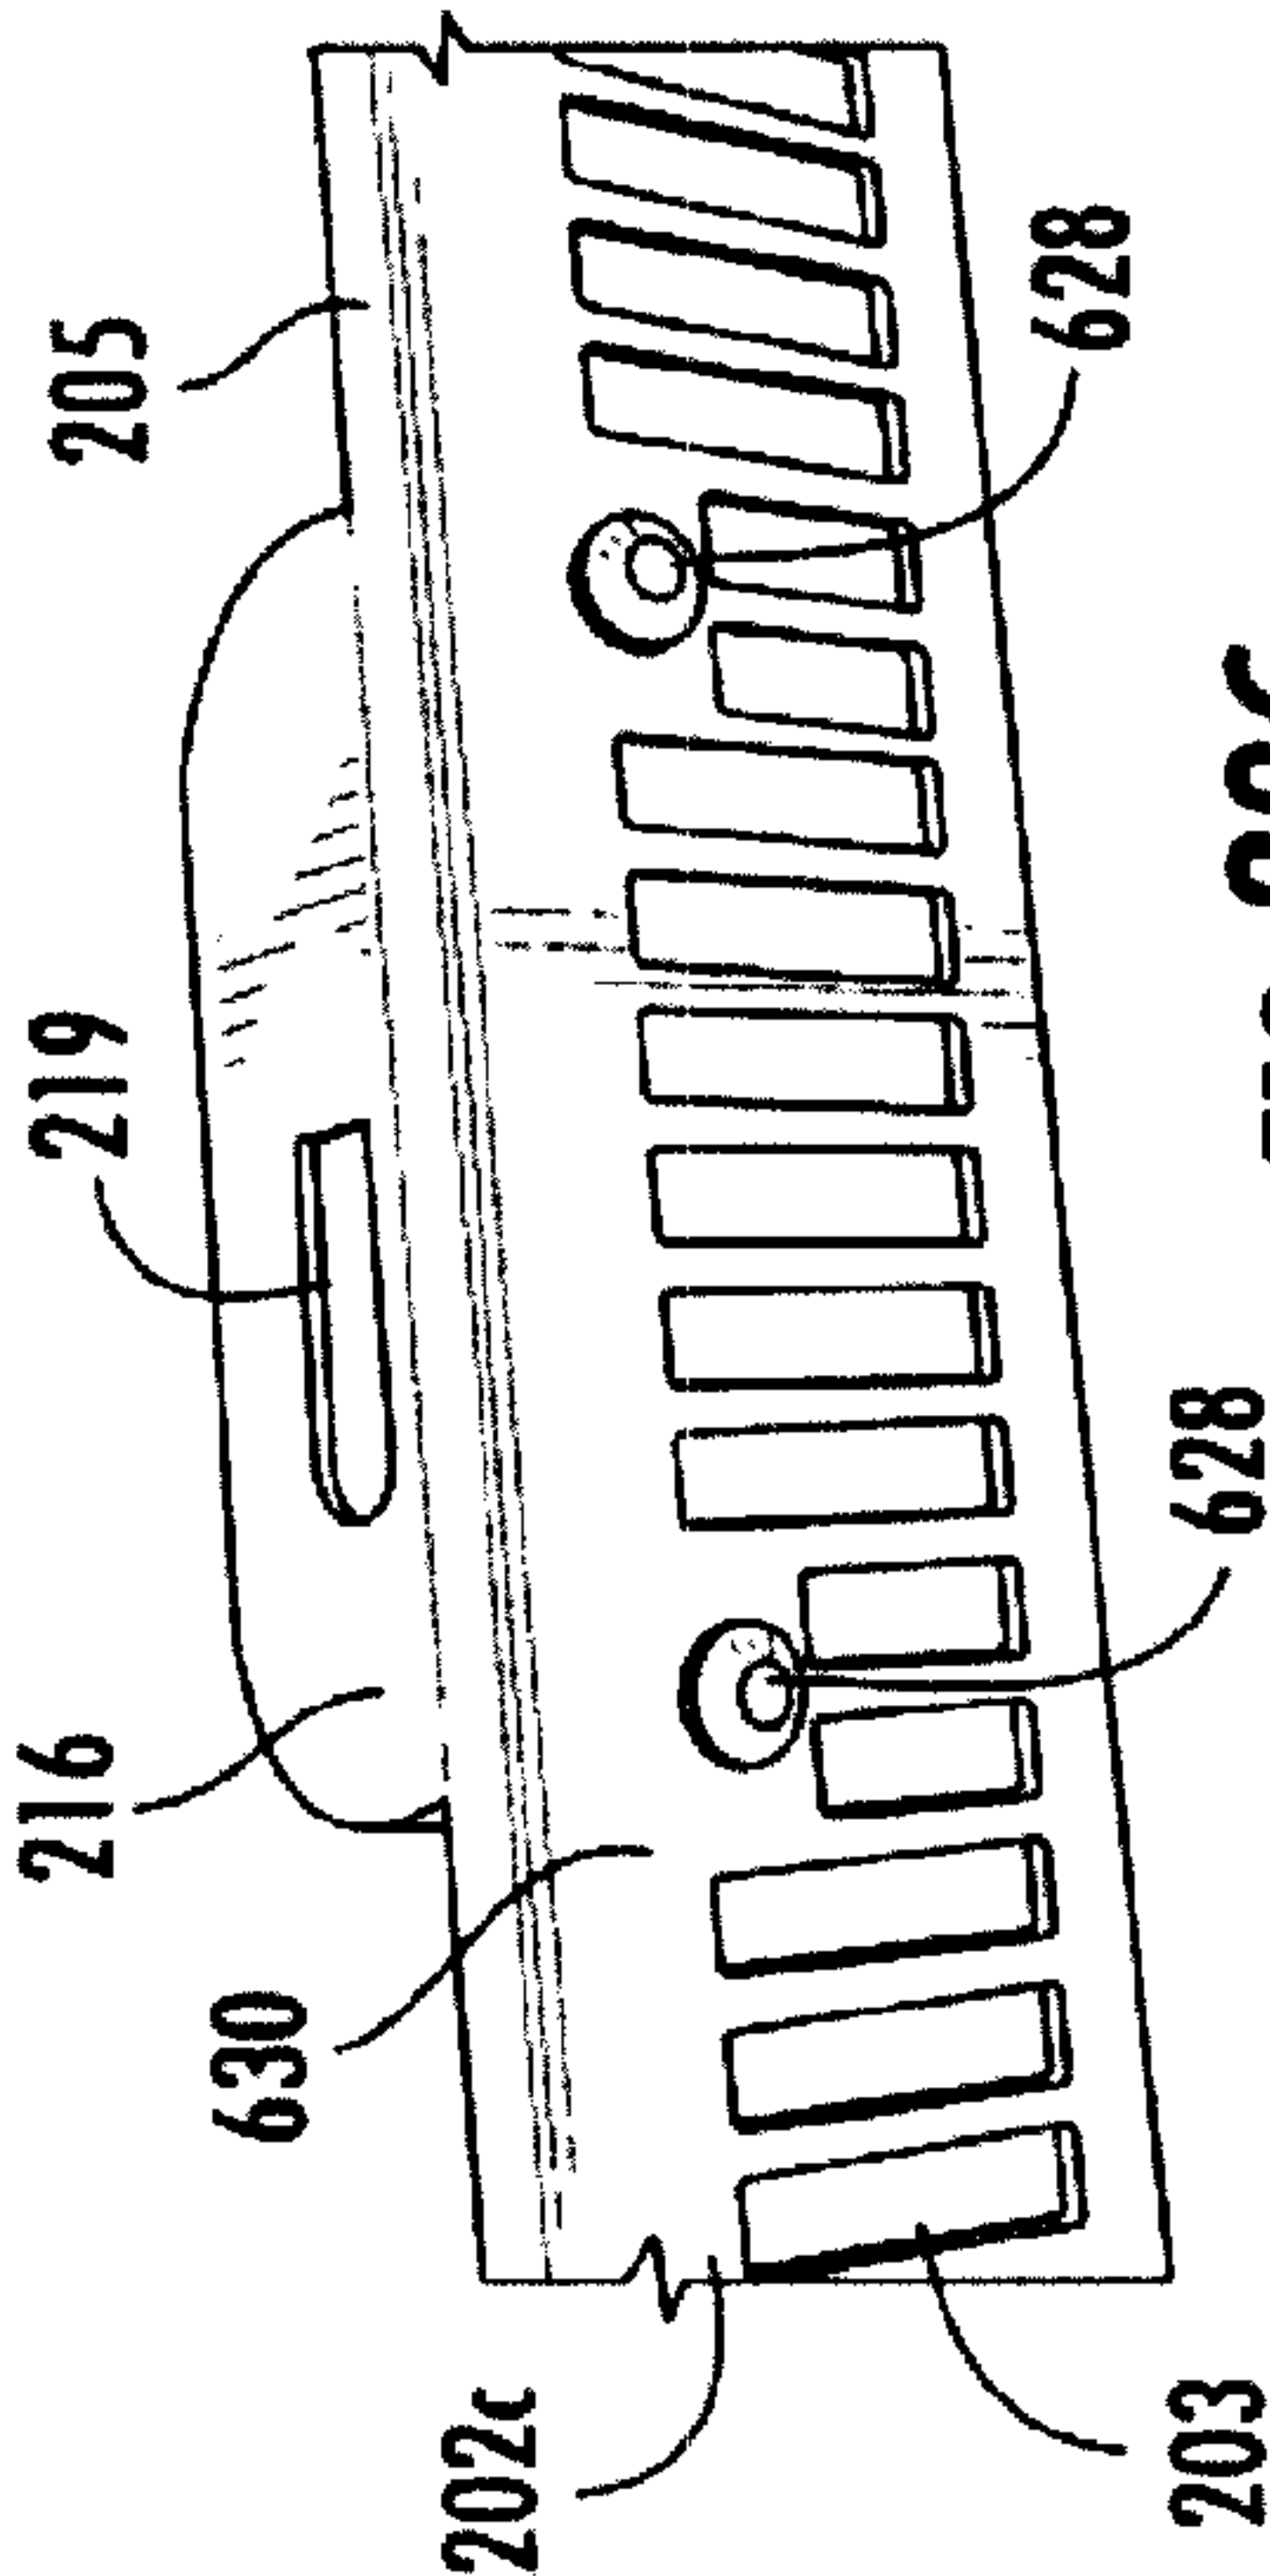
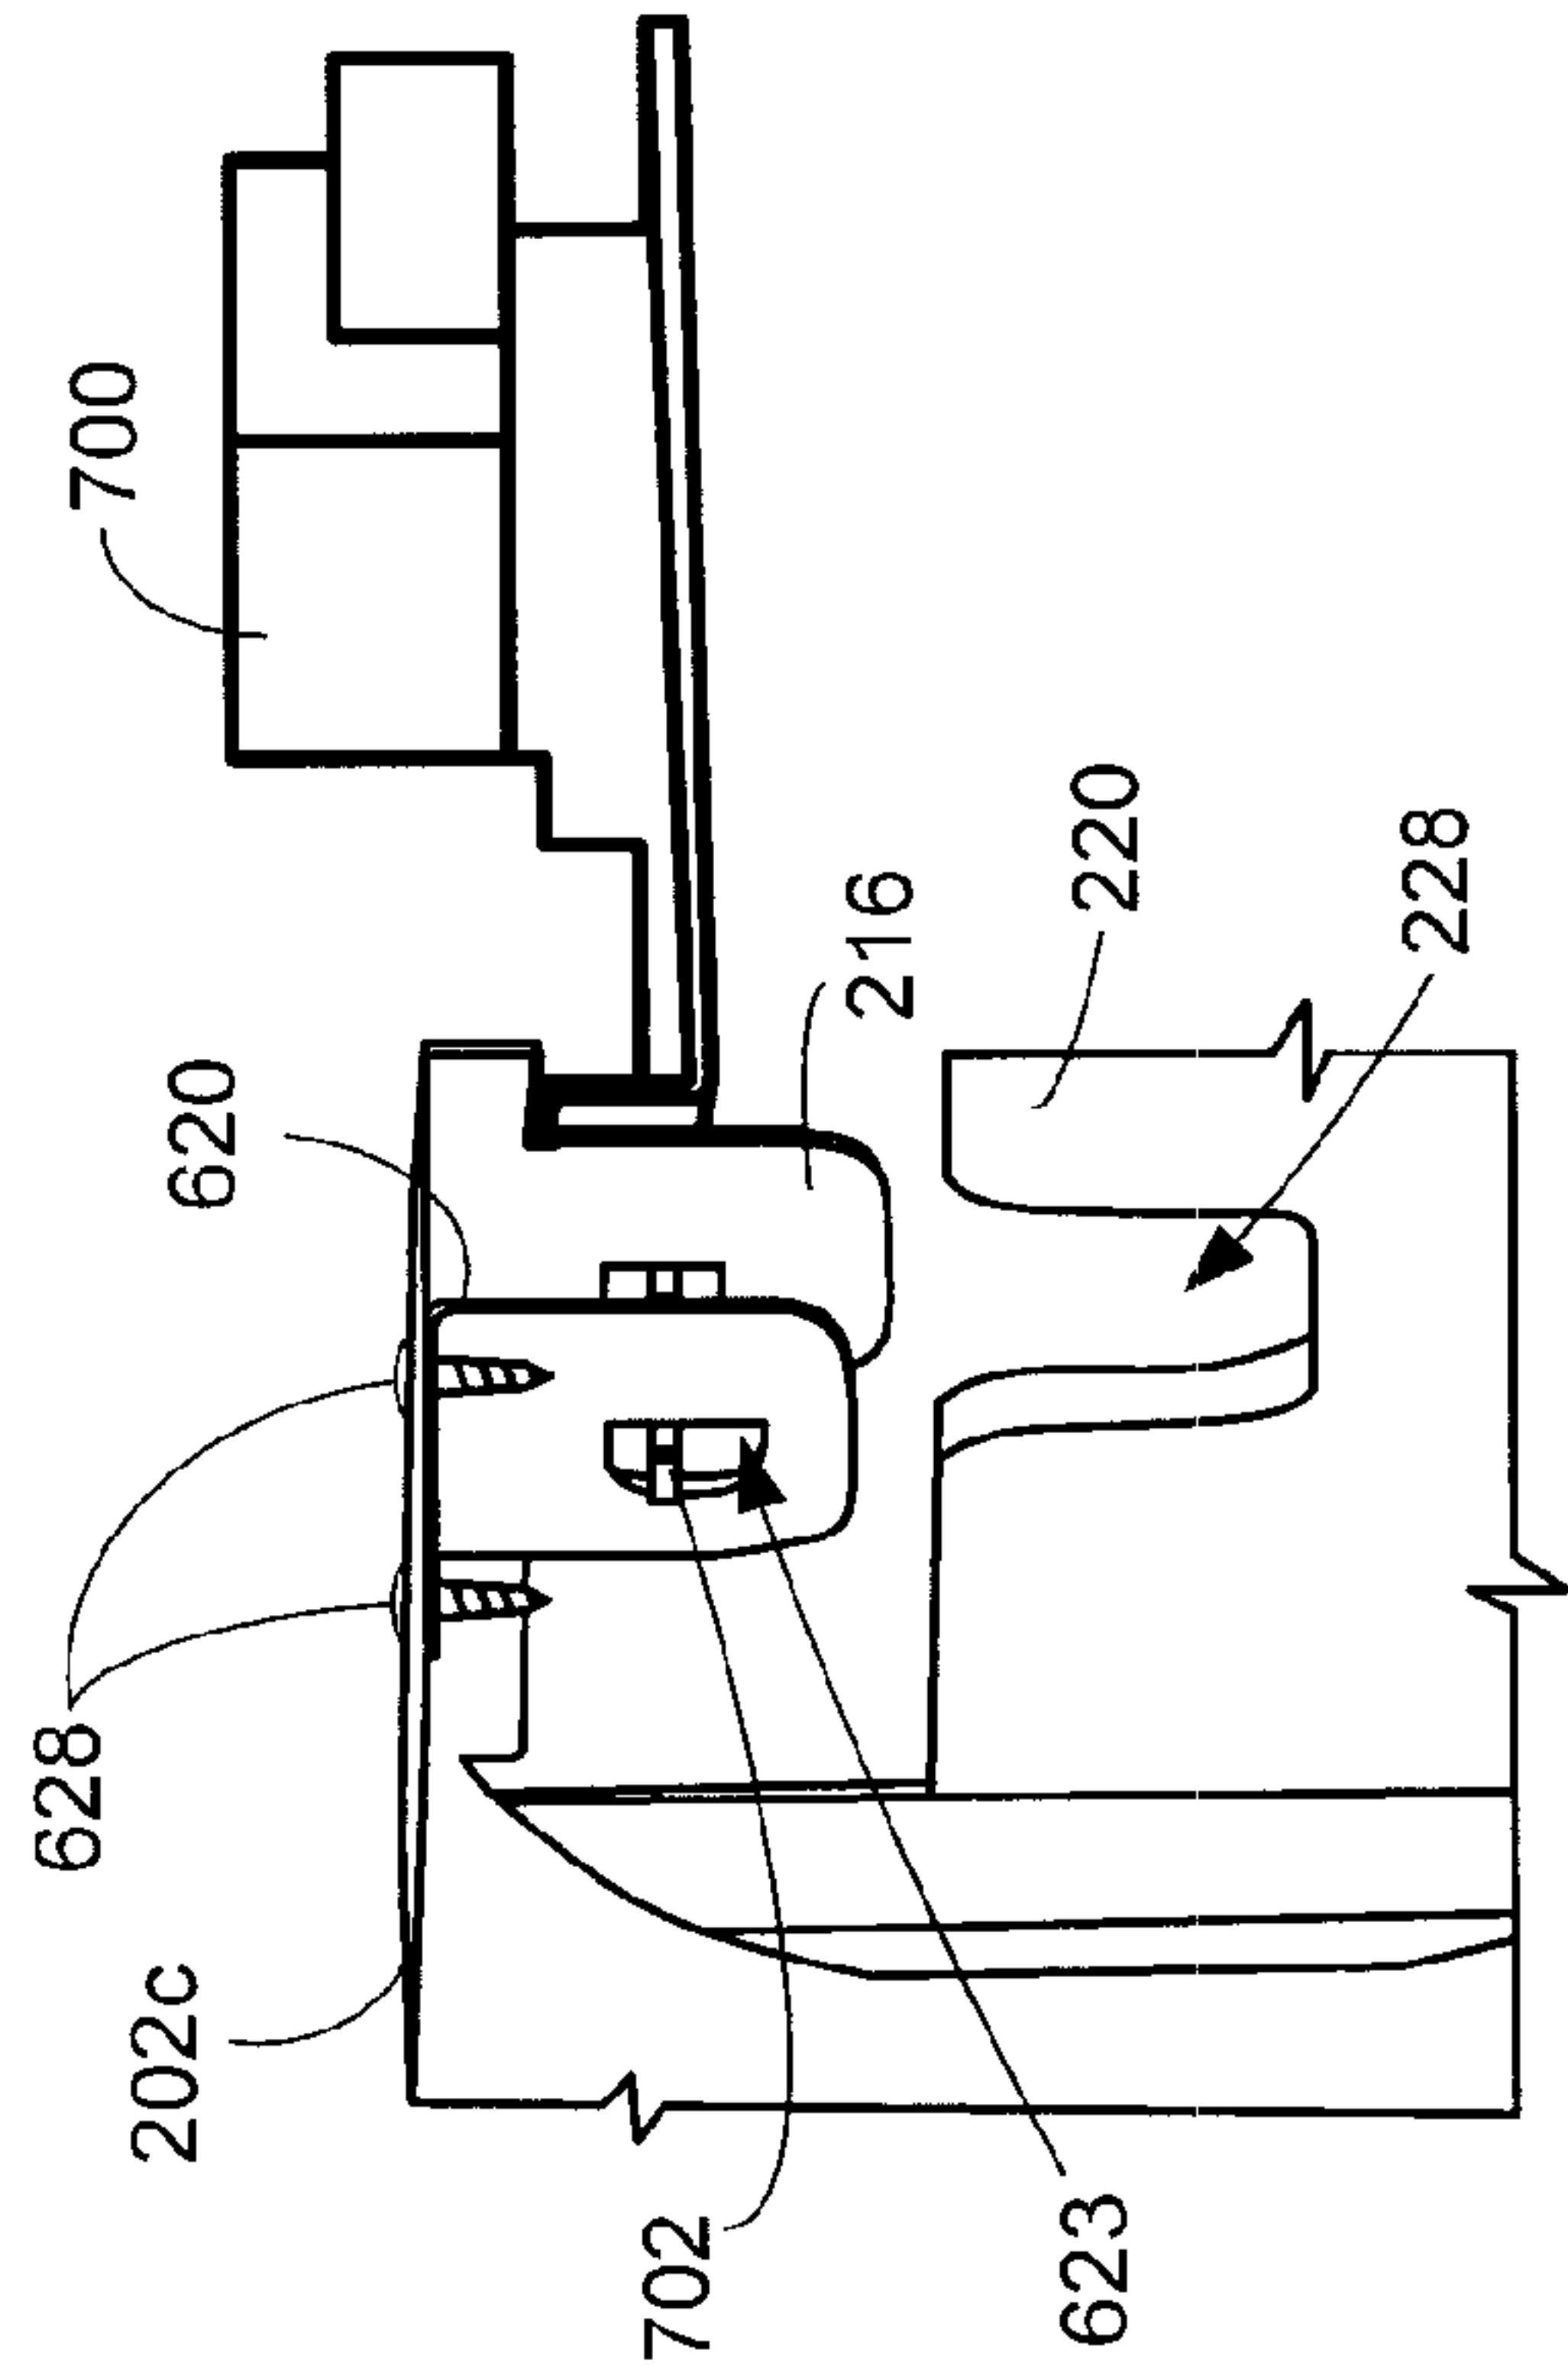
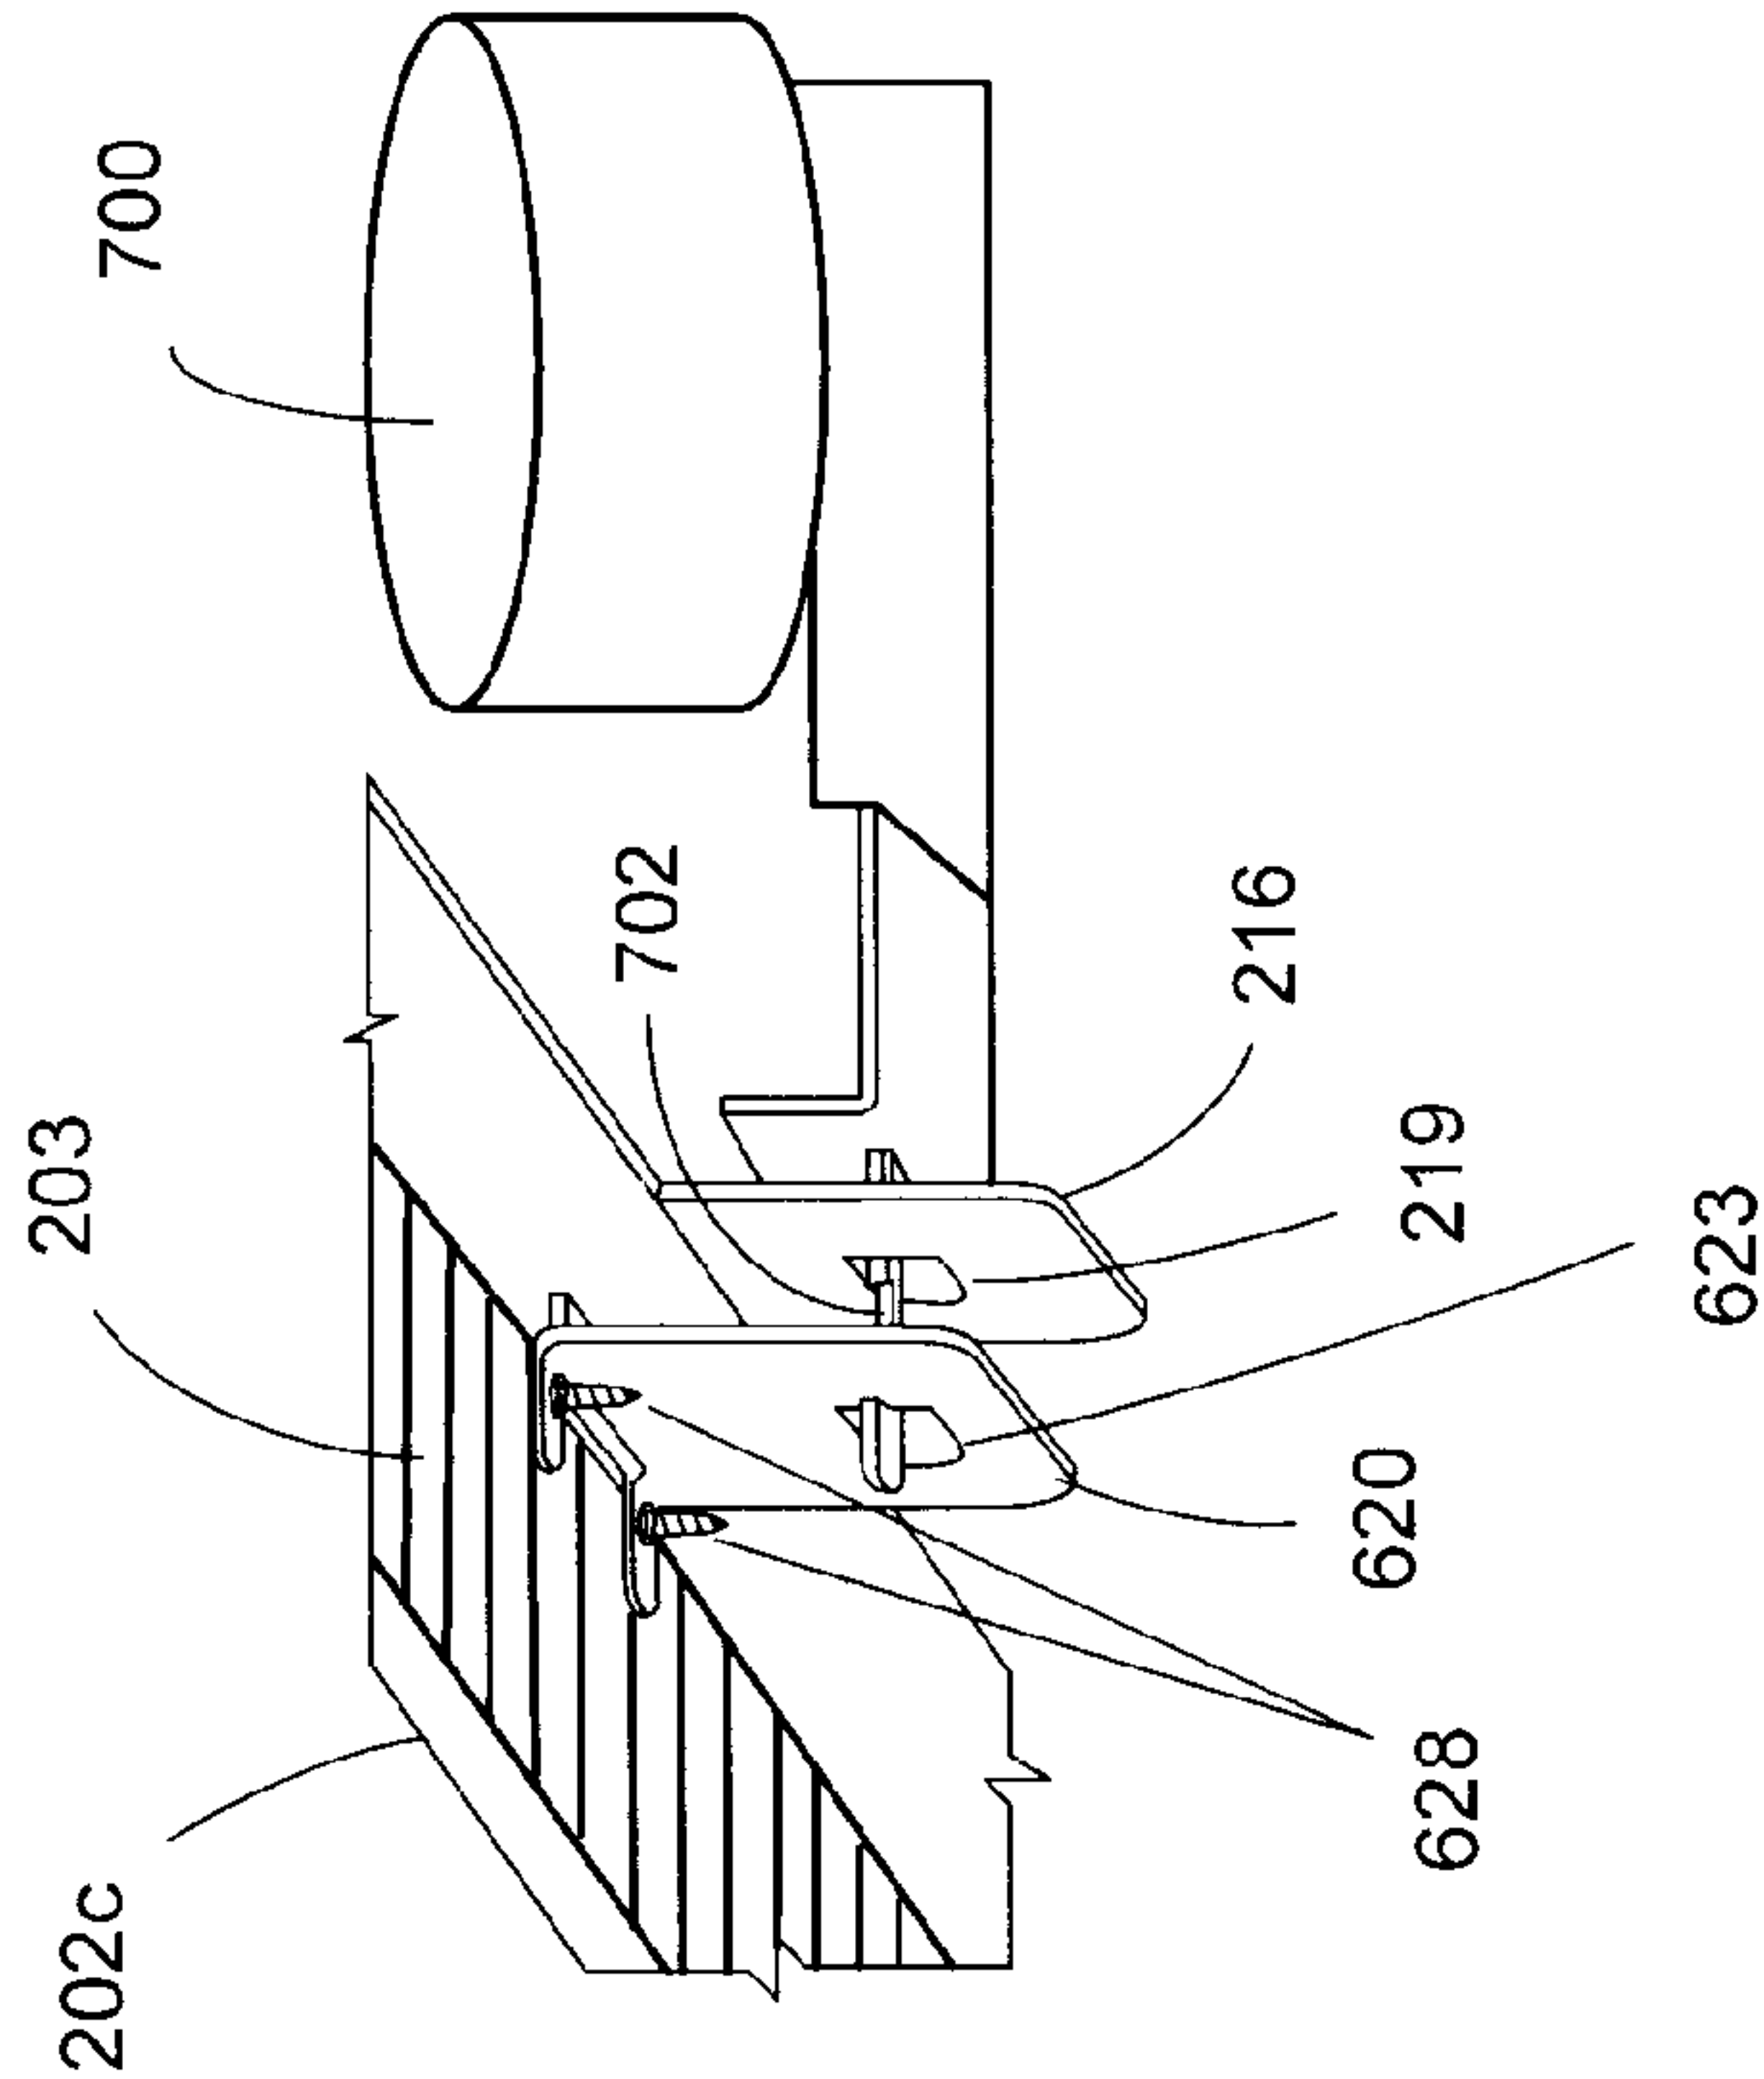
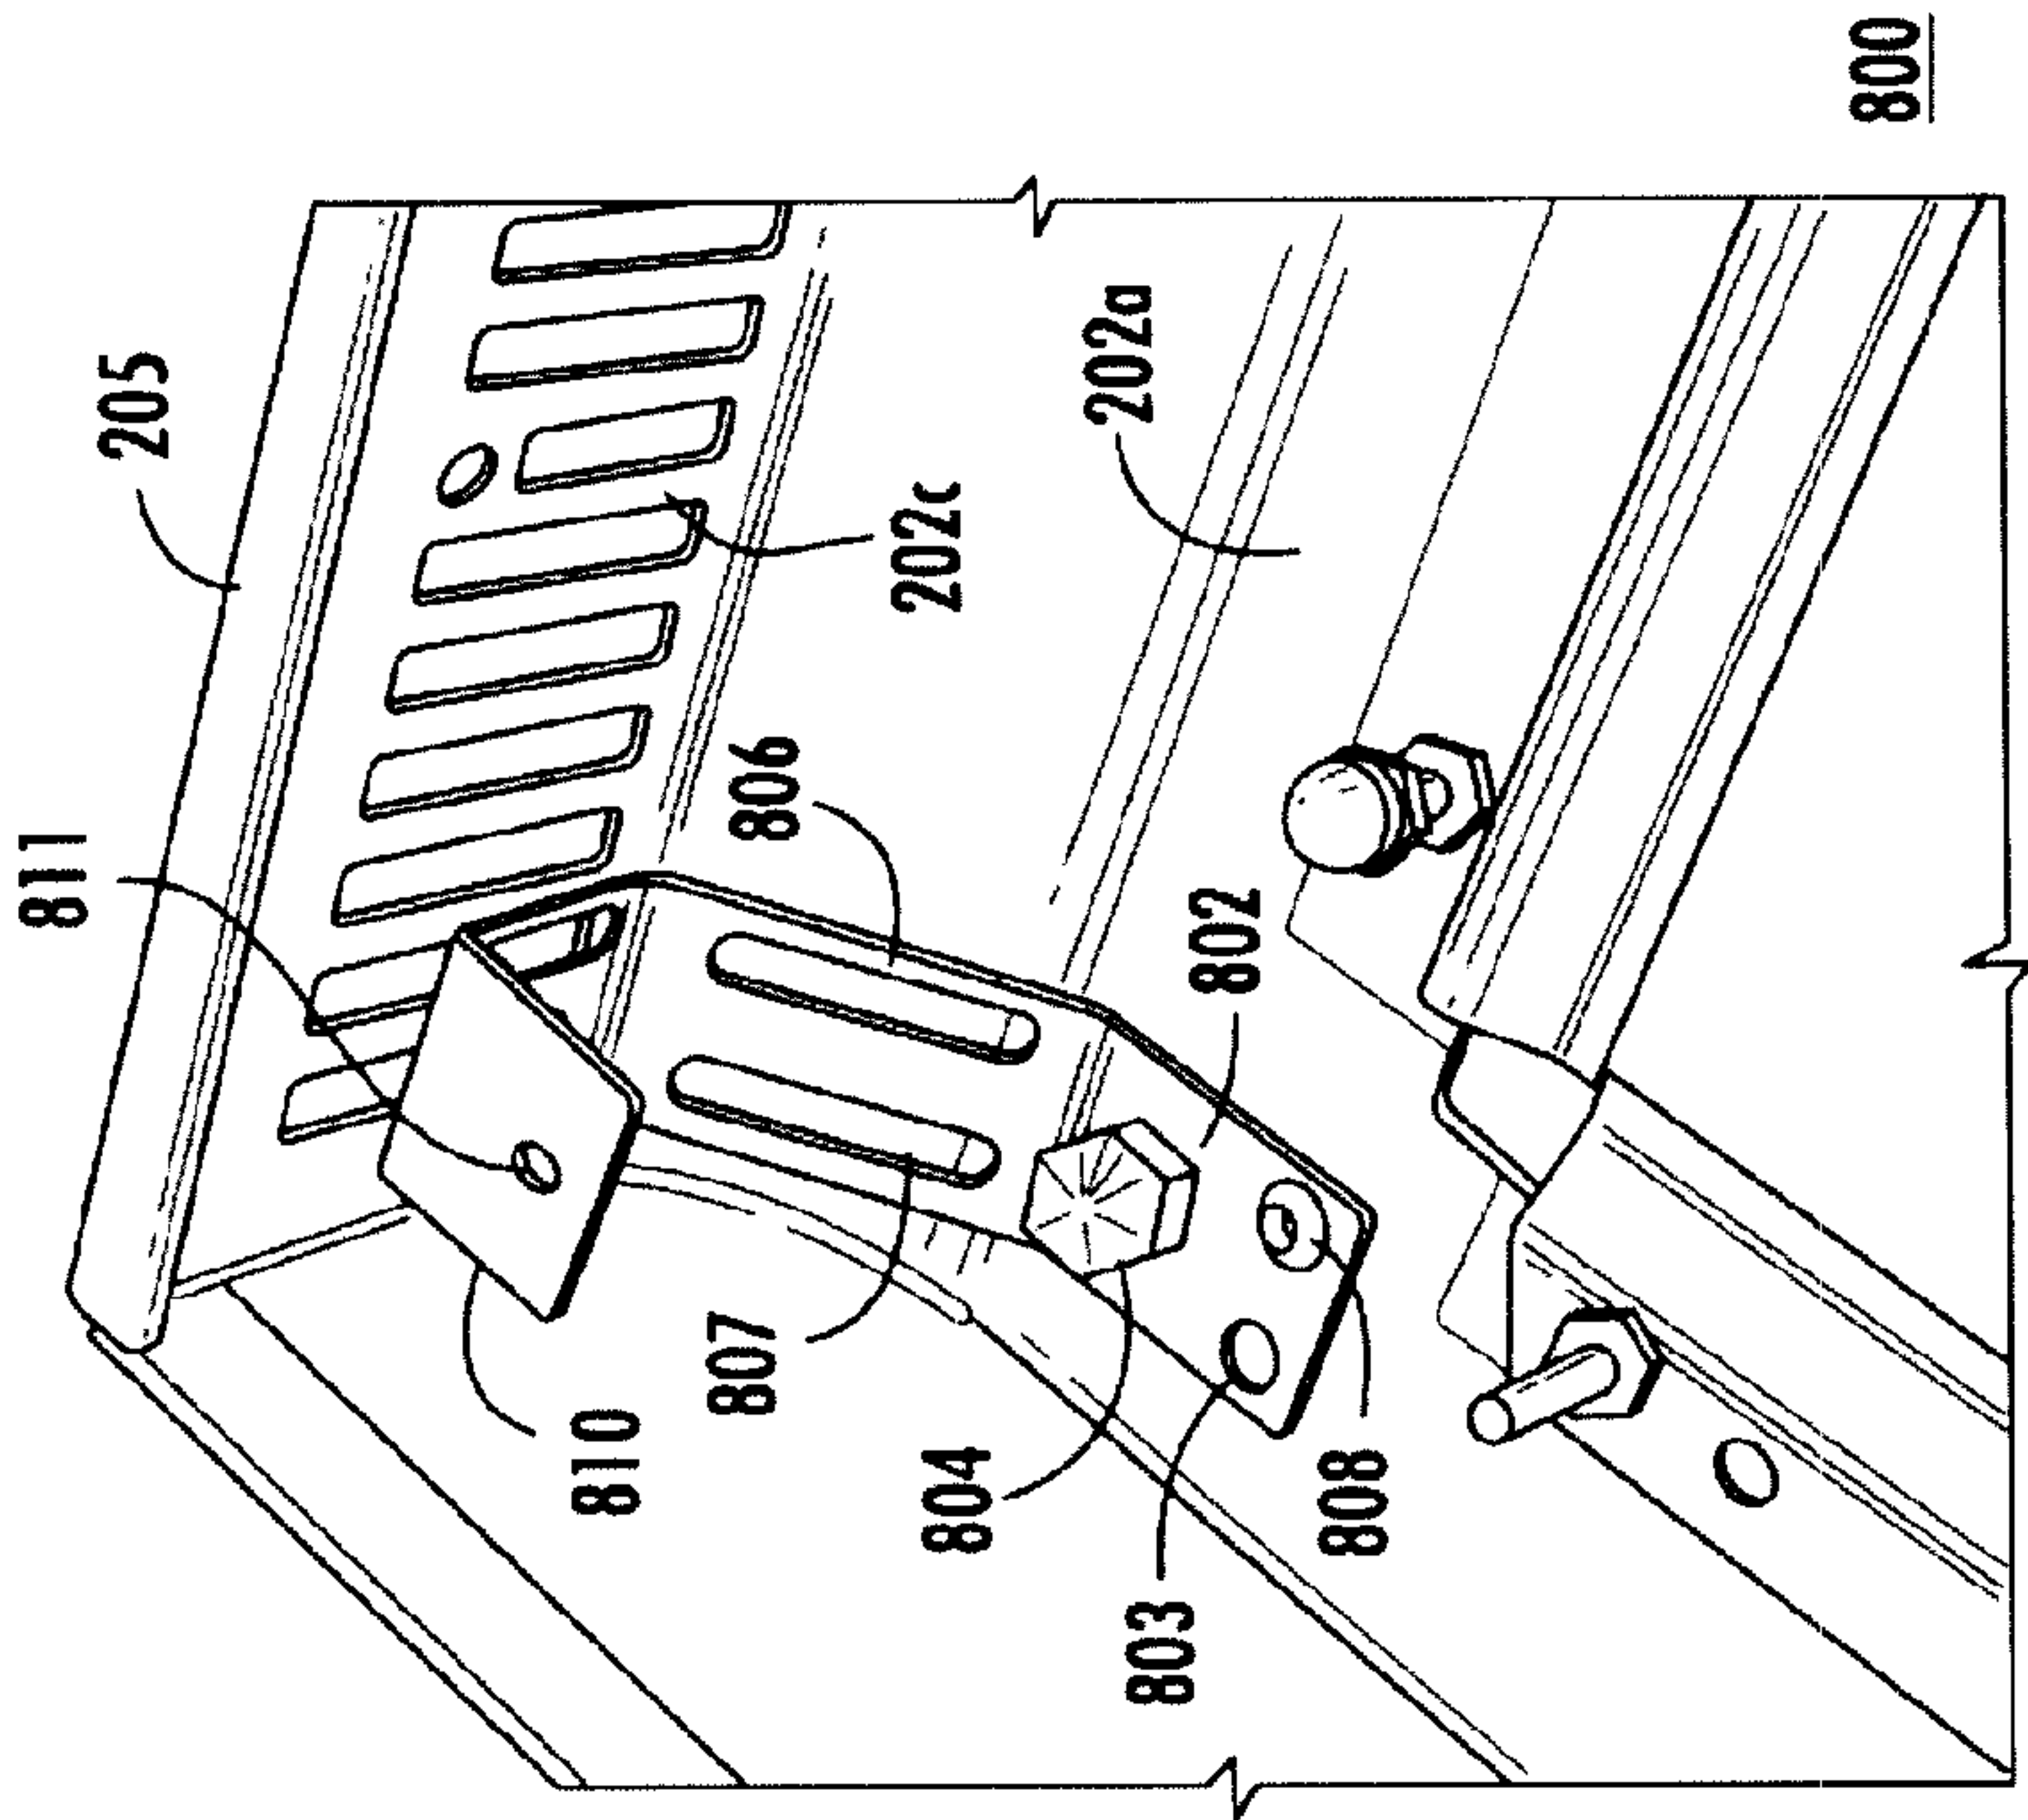
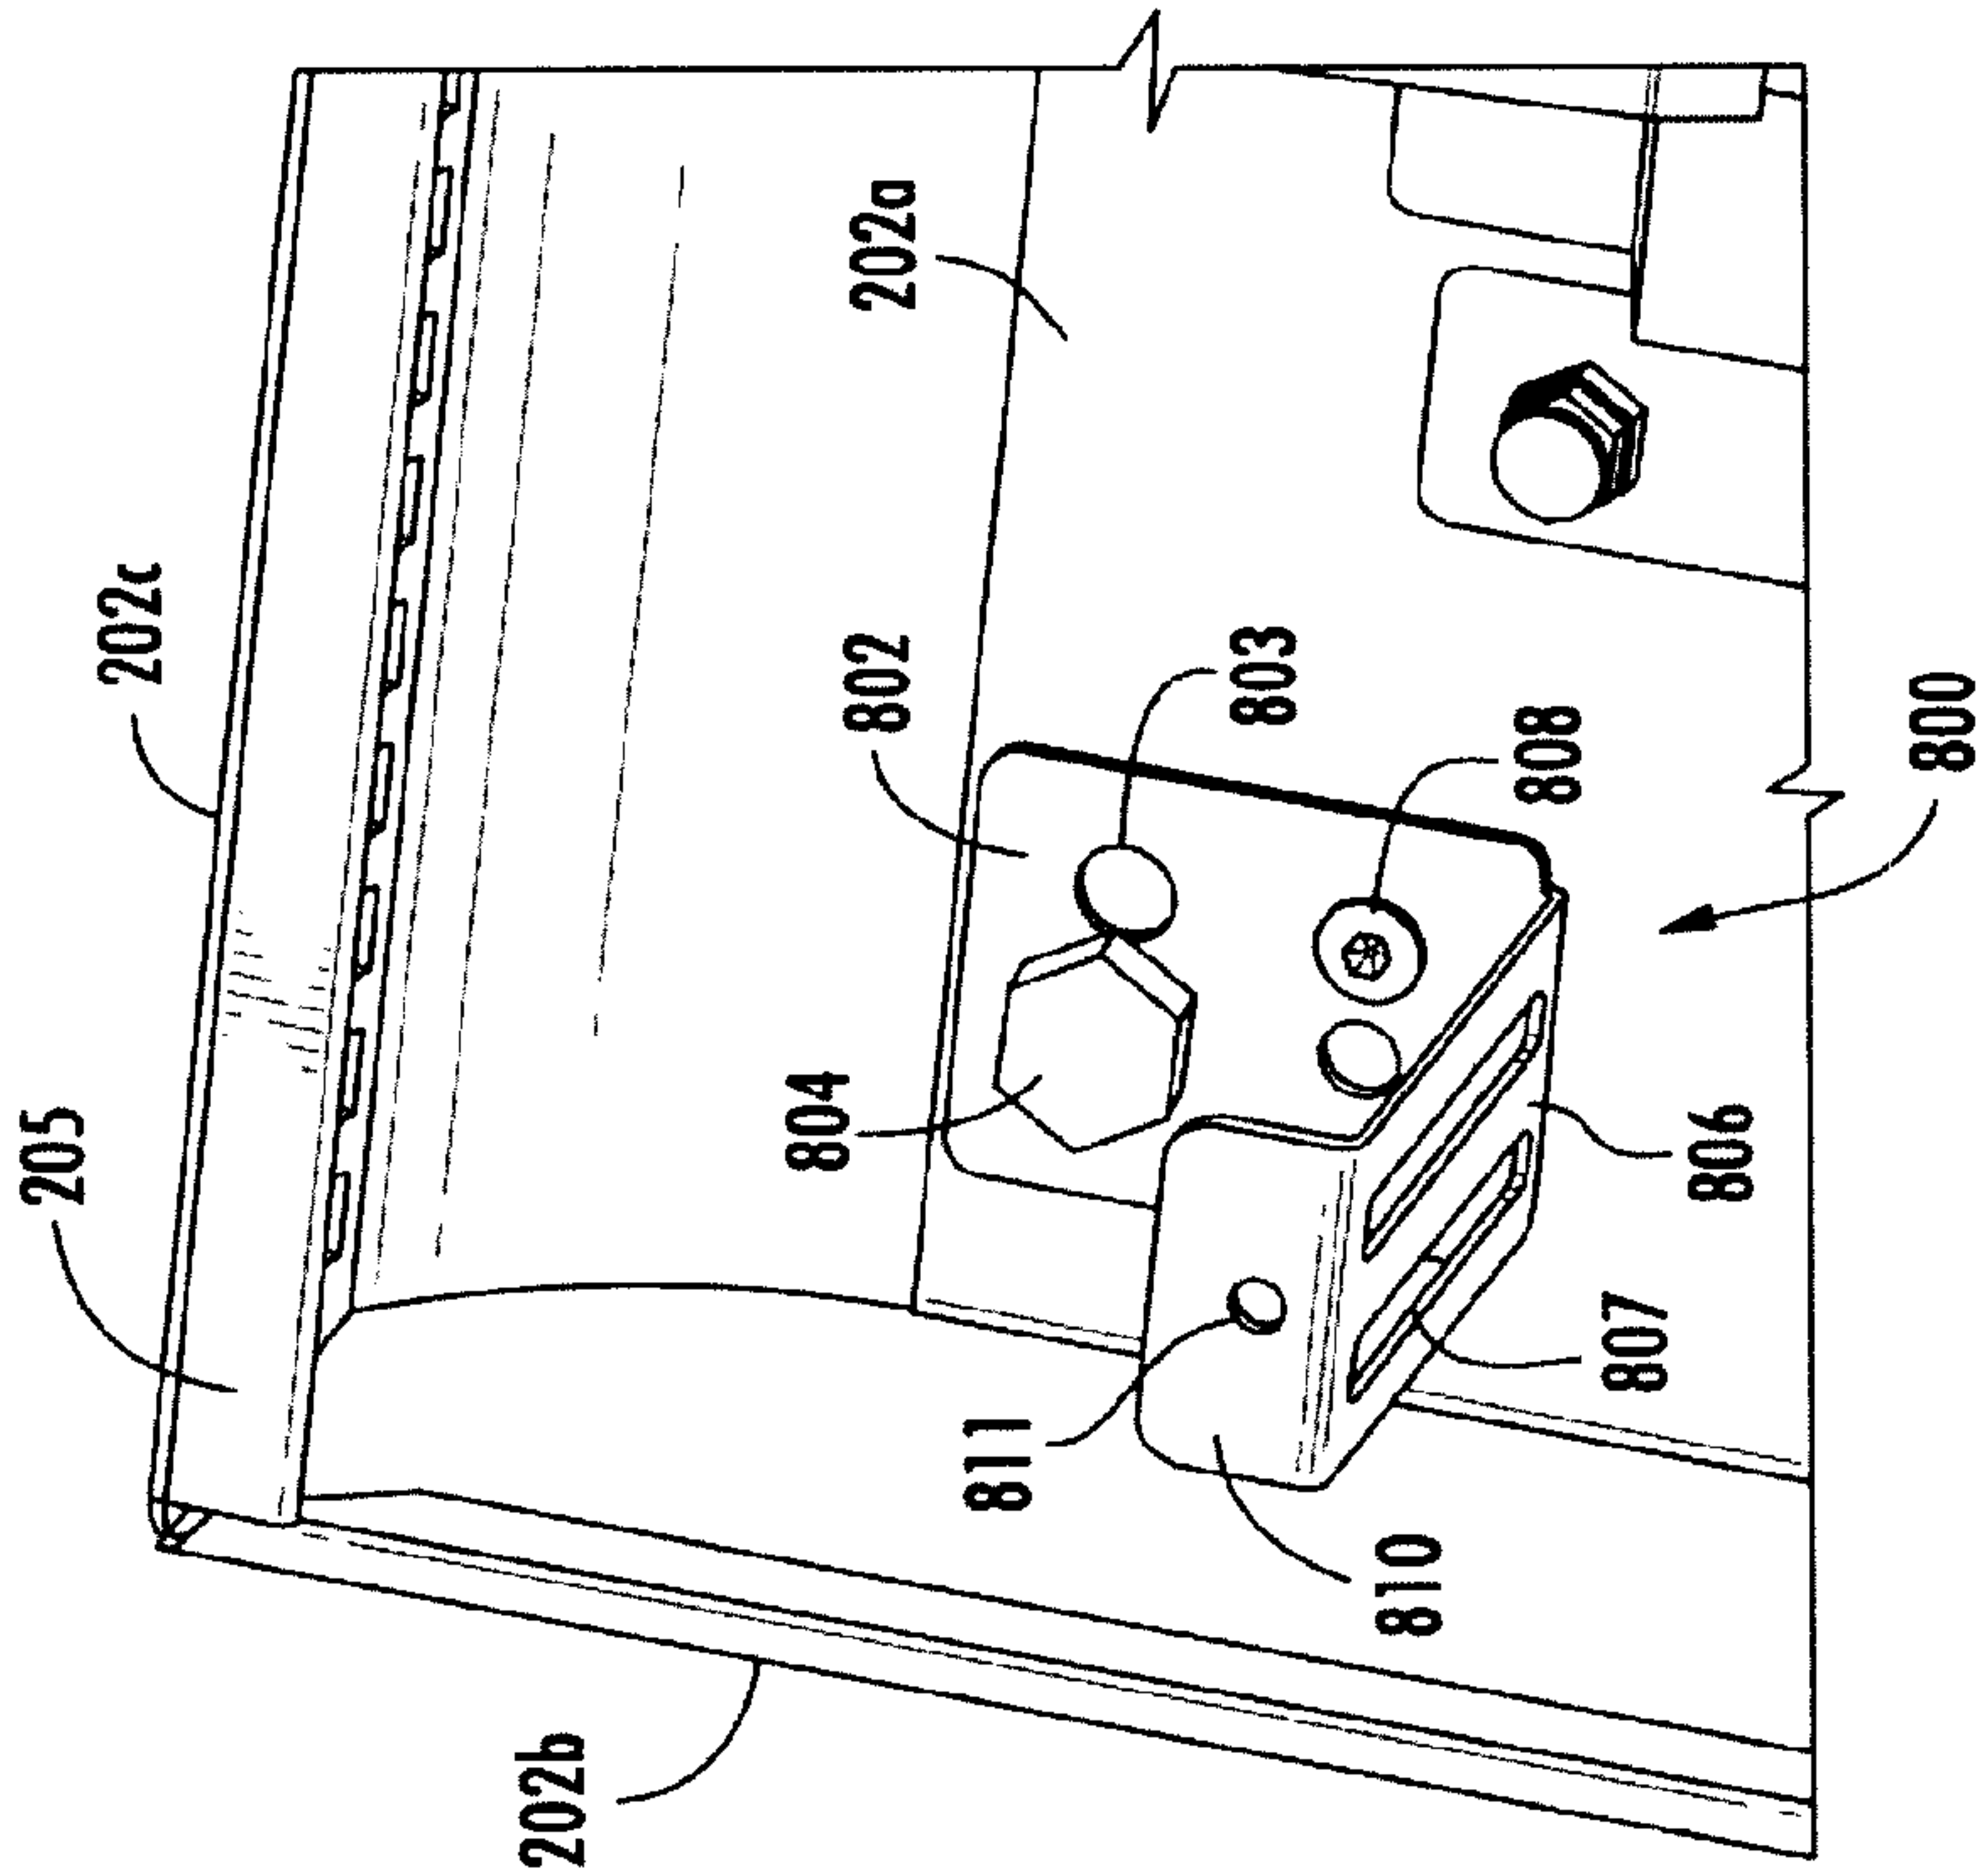


FIG. 23C





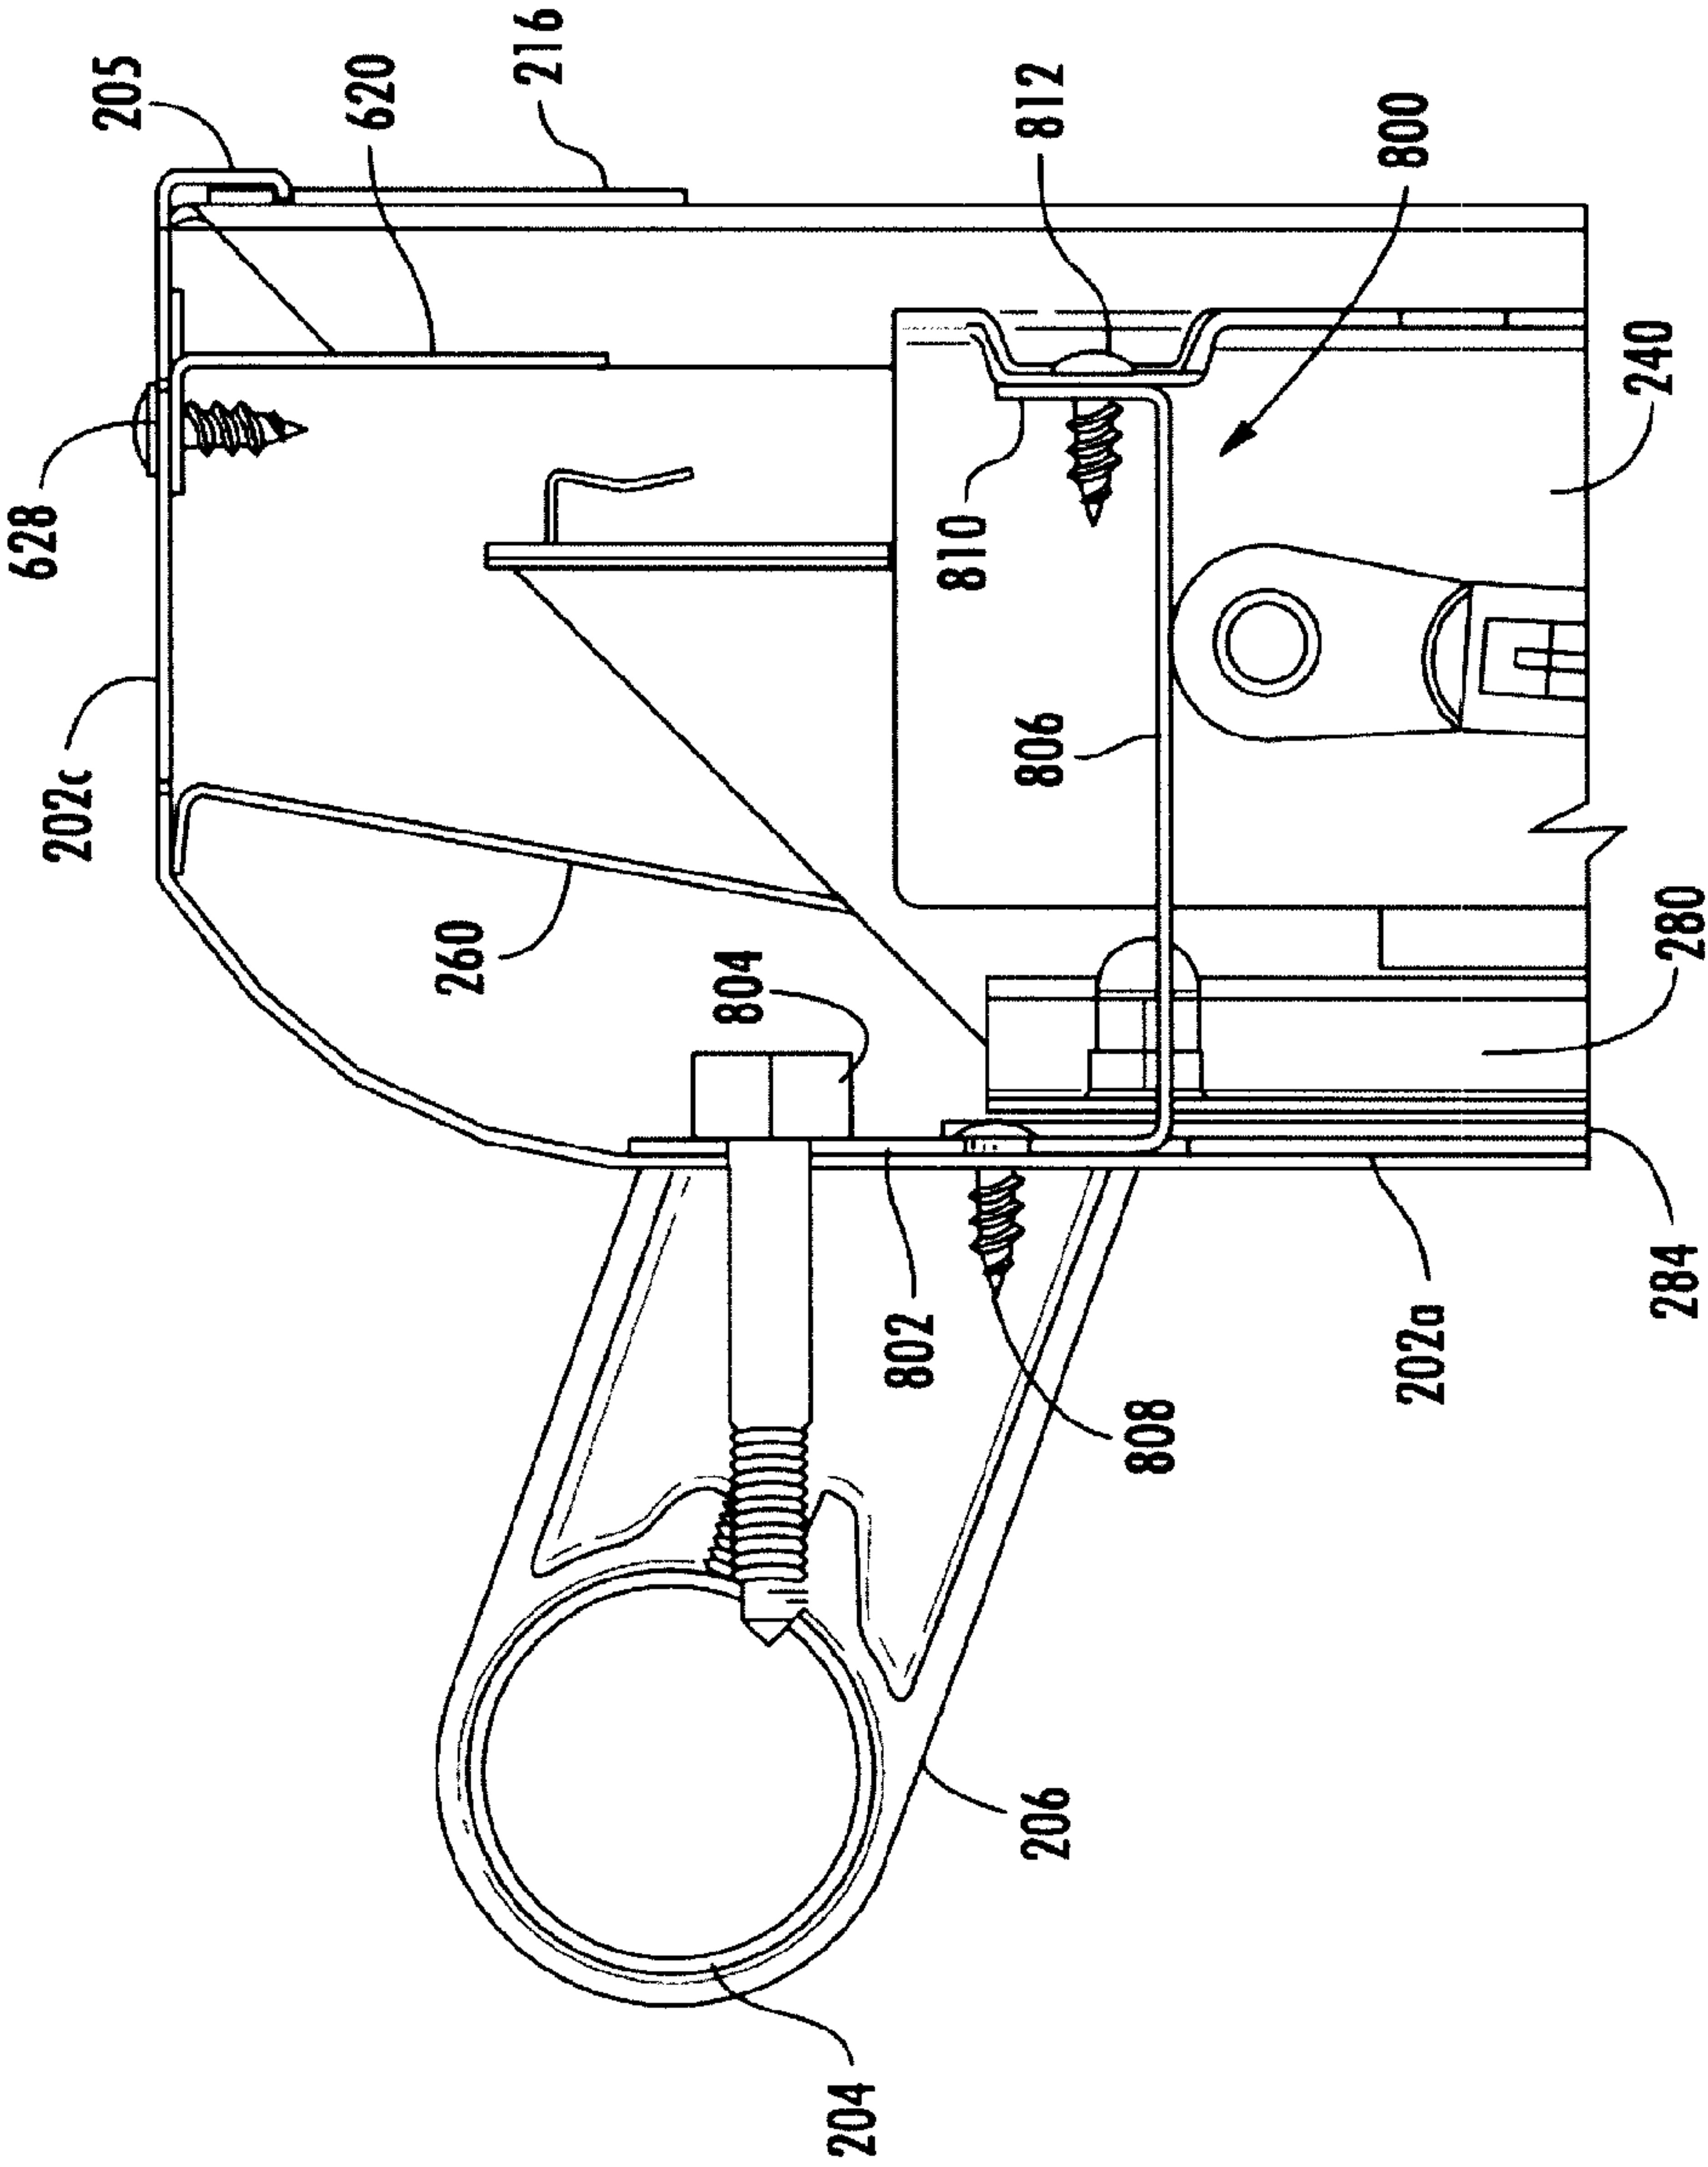


FIG. 25C