



(19) **United States**

(12) **Patent Application Publication**

Legatt et al.

(10) **Pub. No.: US 2002/0050020 A1**

(43) **Pub. Date: May 2, 2002**

(54) **RIDING FLOOR SCRUBBER**

(52) **U.S. Cl. .... 15/320; 15/353**

(76) Inventors: **Donald J. Legatt**, St. Michael, MN (US); **Paul T. Mueller**, Bloomington, MN (US); **Wolfgang C. Lehmann**, Maple Grove, MN (US)

Correspondence Address:  
**Alan D. Kamrath**  
**Rider, Bennett, Egan & Arundel, LLP**  
**Suite 2000**  
**333 South Seventh Street**  
**Minneapolis, MN 55402 (US)**

(21) Appl. No.: **10/034,475**  
(22) Filed: **Dec. 28, 2001**

**Related U.S. Application Data**


(63) Continuation of application No. PCT/US00/18238, filed on Jun. 30, 2000, which is a continuation-in-part of application No. 09/340,486, filed on Jun. 30, 1999, now abandoned.


**Publication Classification**


(51) **Int. Cl.<sup>7</sup> ..... A47L 7/00**


(57) **ABSTRACT**

A riding floor scrubber (10) is disclosed having a relatively narrow cleaning width for passing through relatively narrow passages such as conventional doorways. The riding floor scrubber (10) includes a recovery tank (16) that is vertically and laterally arranged and removably attached to the back of a clean solution tank (14). The clean solution tank (14) includes spaced parallel side portions (26, 28) and the recovery tank (16) extends between the rear ends of the side portions (26, 28). The recovery tank (16) is secured by first and second brackets (42) that extend into recesses (44) on the clean solution tank (14), with the bottom of the recovery tank (16) including a lip portion (46) resting on a metal plate (20) of a chassis (18), with a battery pack (52) being supported on the plate (20) between the side portions (26, 28) of the clean solution tank (14). The clean solution tank (14) includes a middle portion (29) and a lower portion (24) integrally extending forwardly of the middle portion (29), with the left side portion (26) extending to the same longitudinal extent as the lower portion (24). The clean solution tank (14) is molded into a complex shape to maximize capacity, with the bottom of the clean solution tank (14) being recessed to receive the chassis (18) of a tricycle type to define triangular-shaped volumes (88).

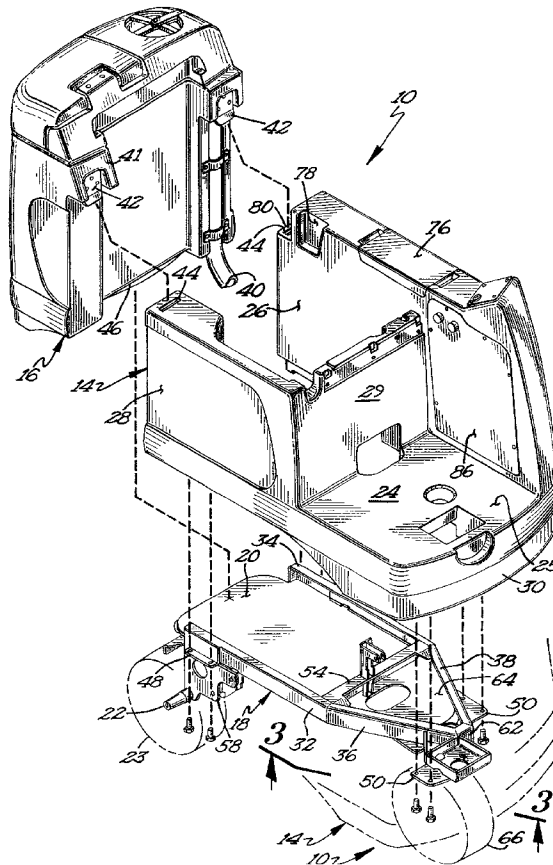


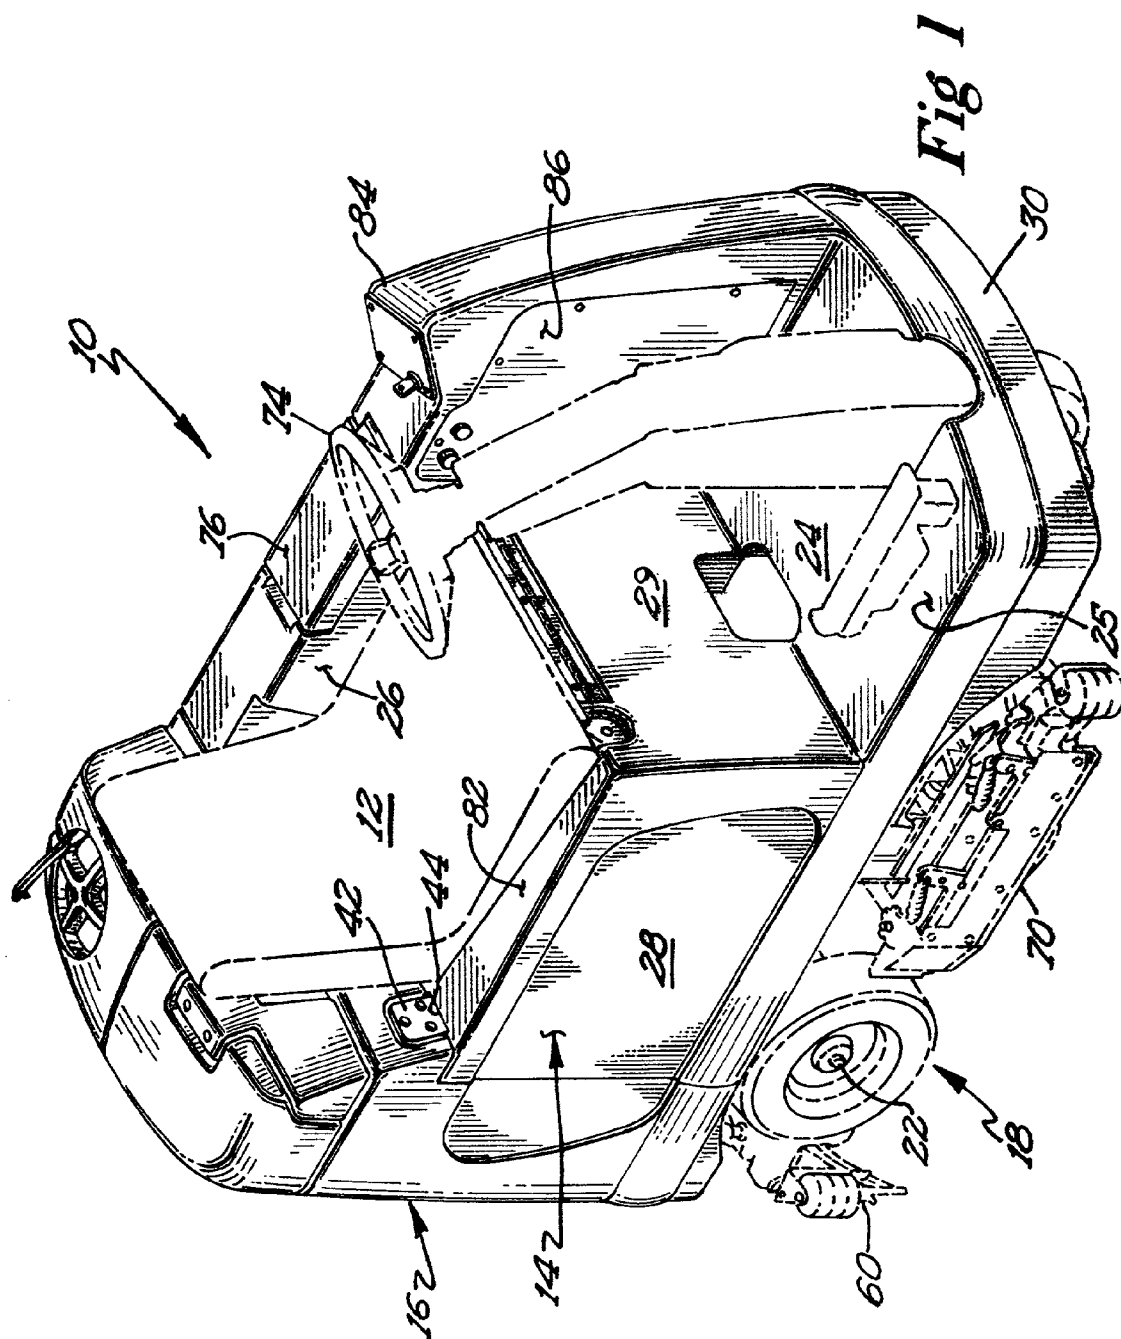

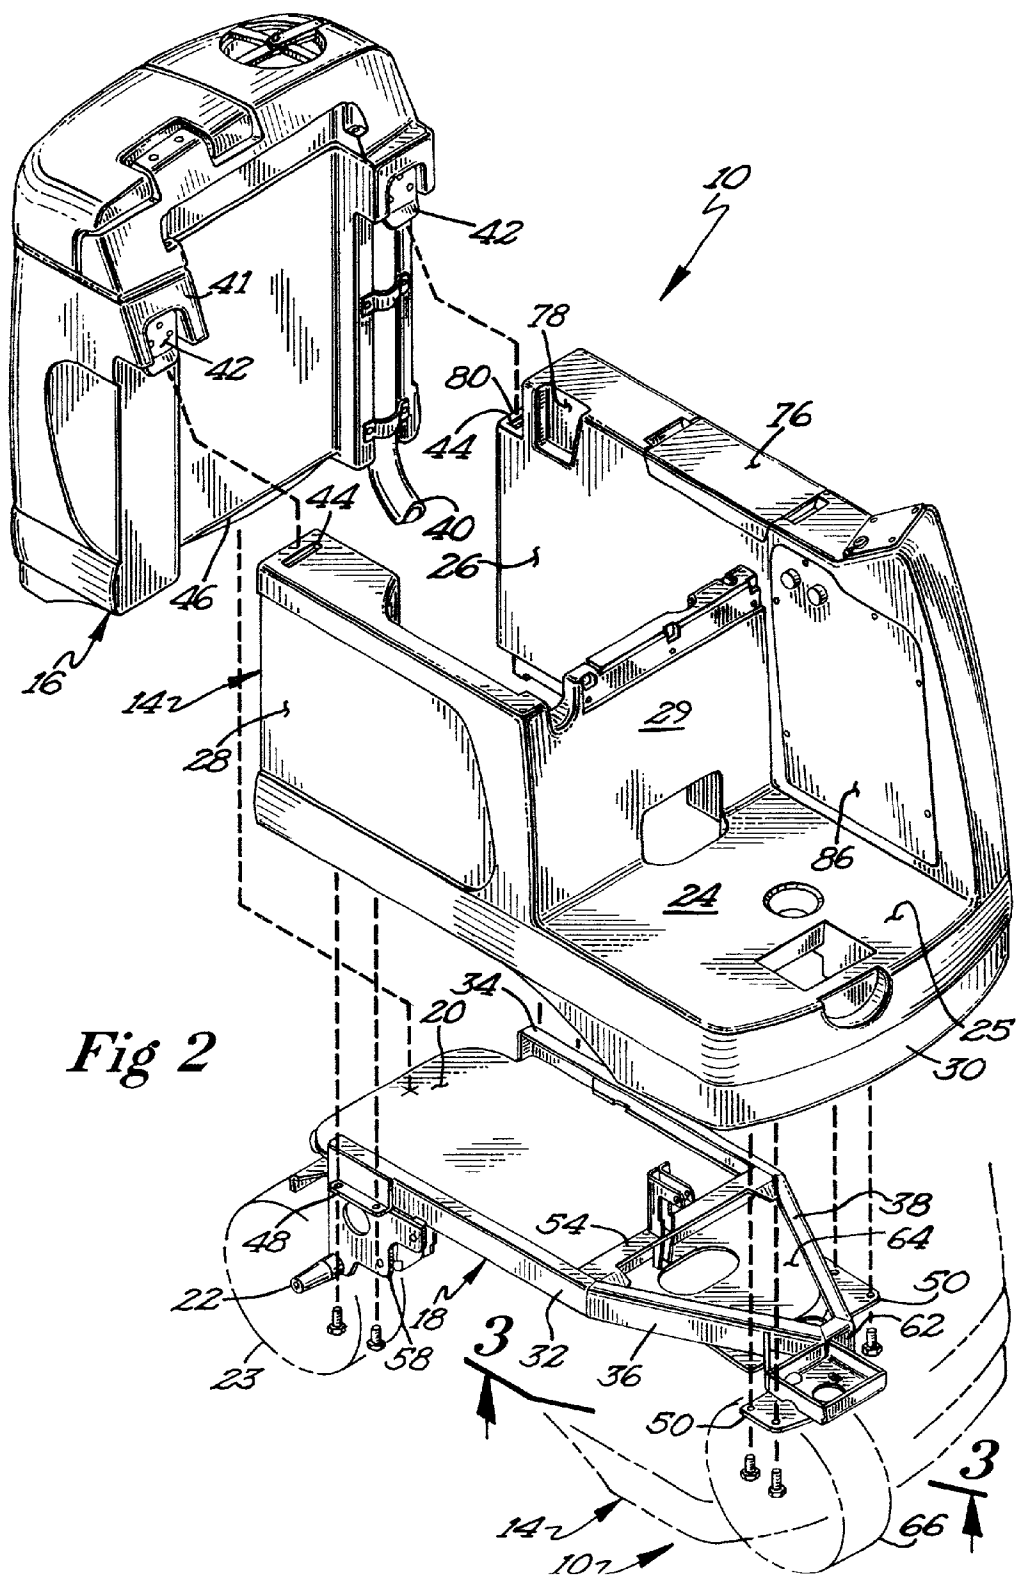

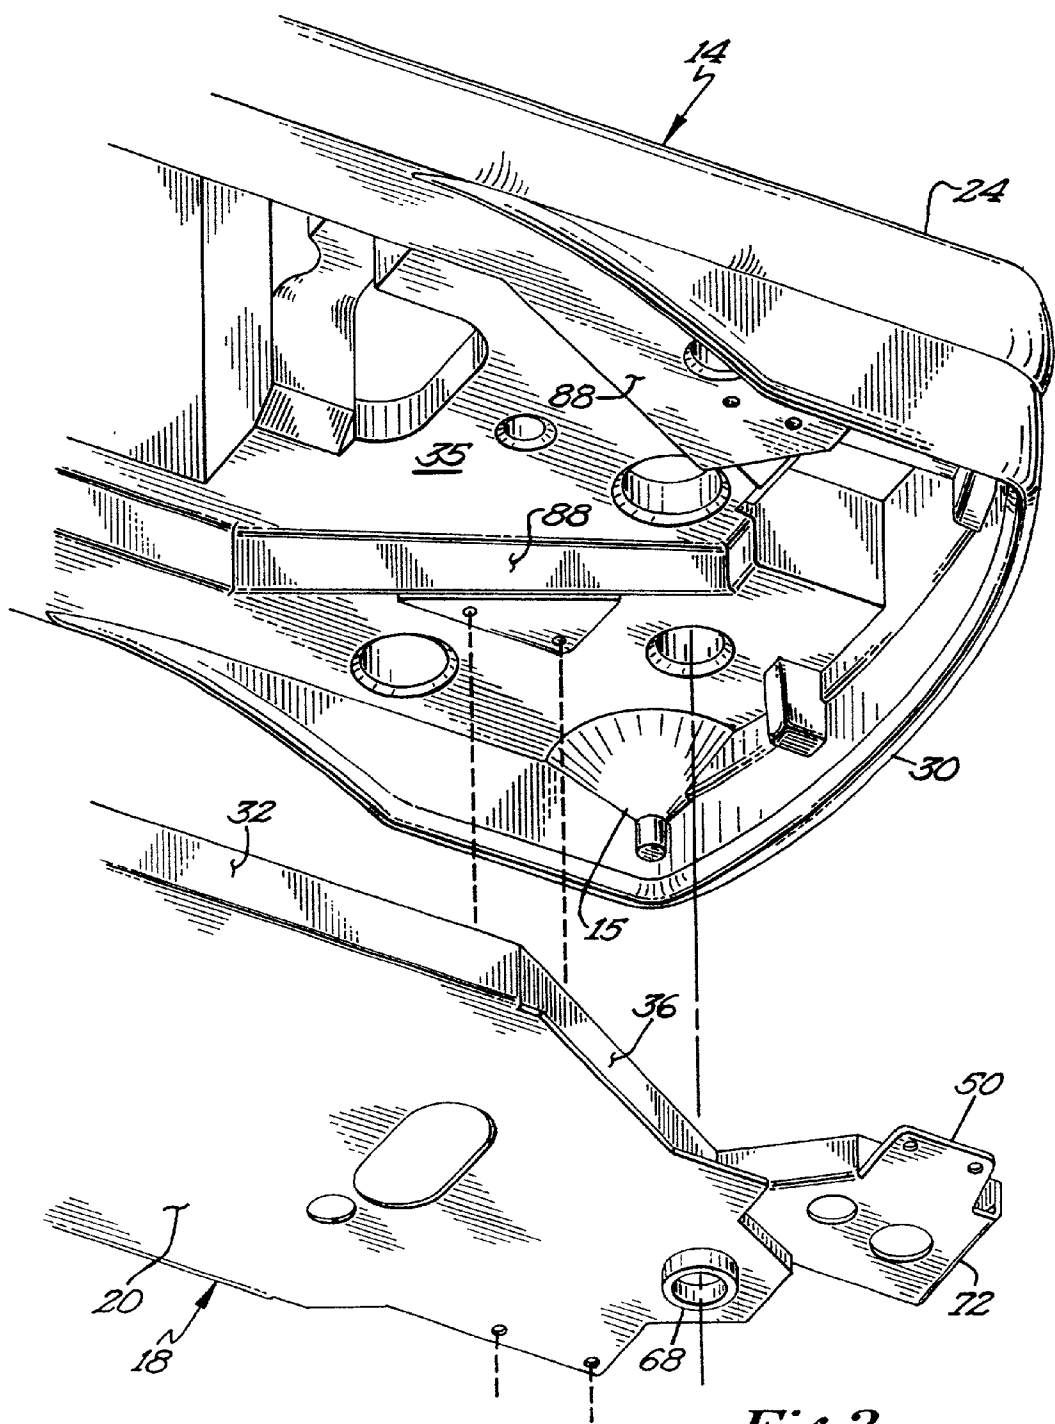

*Fig 3*

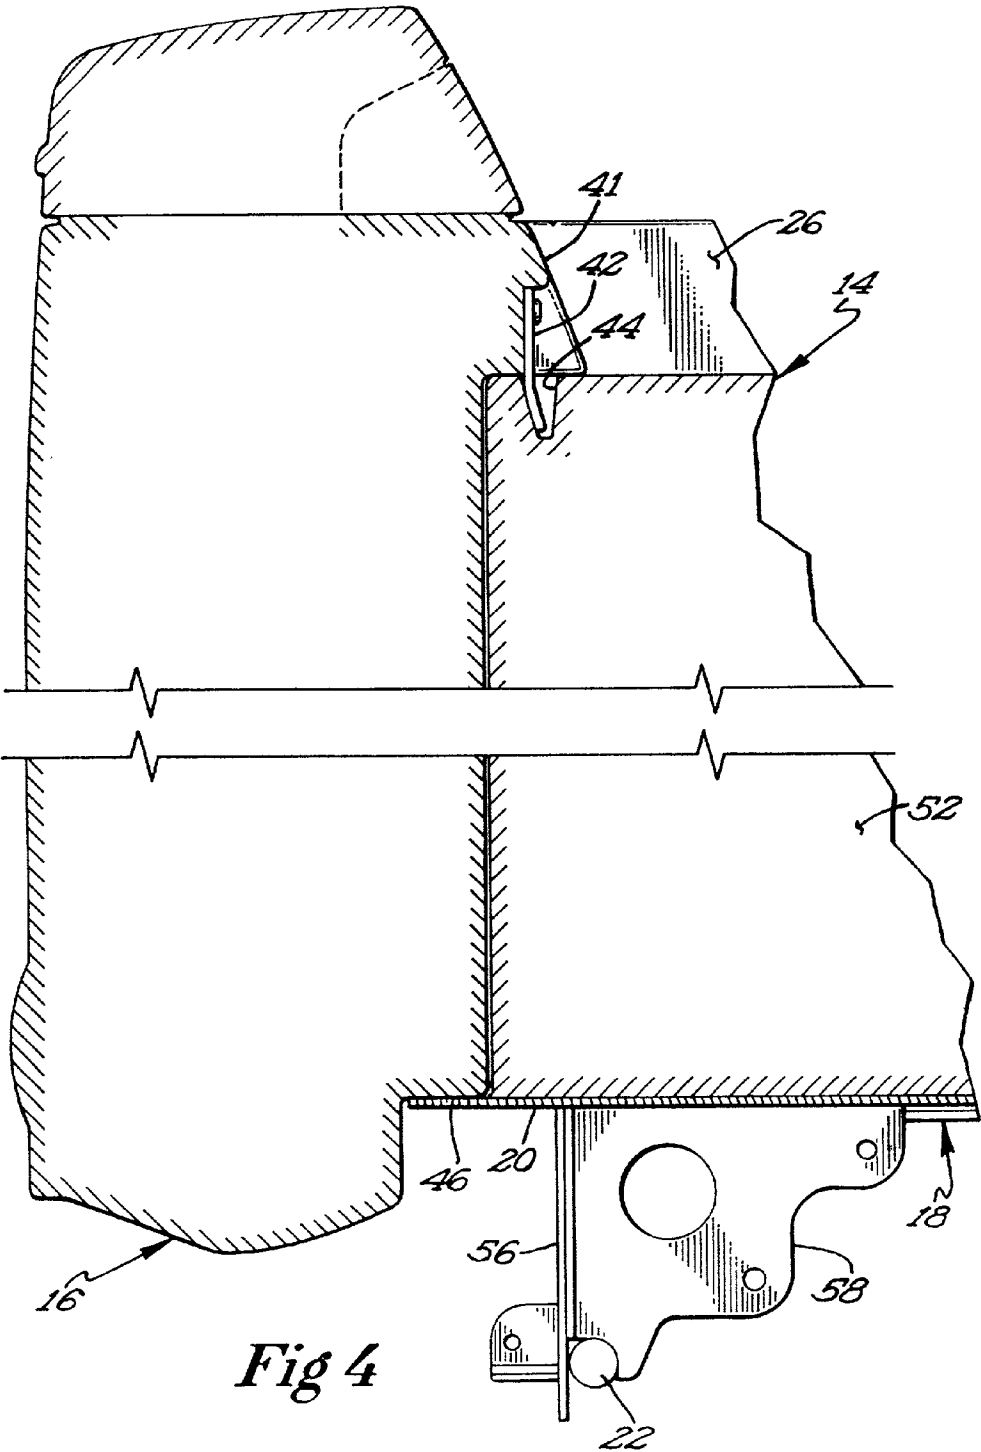

*Fig 4*

## RIDING FLOOR SCRUBBER

### BACKGROUND OF THE INVENTION

[0001] The present invention relates generally to equipment for the floor-care industry, particularly to automatic floor scrubbers, and specifically to automatic floor scrubbers including unique provisions for riding on the floor scrubber and having a narrow cleaning width that permits passing through doorways and other relatively narrow passages.

[0002] A common method of cleaning hard floors is with a scrubber/dryer. These machines consist of a clean solution tank with means to apply solution to the floor, an agitating means for cleaning the floor, a dirty solution tank, and a vacuum means to pick up the dirty solution from the floor after the agitation action. The tanks and other mechanisms are usually attached to some type of chassis, which also has provisions for the power source, wheels and motivation requirements. Scrubber/dryers can be either walk-behind units or ride-on units. The power source for mostly all the walk-behind units comes from a battery pack, while the power for ride-on units comes from a battery pack on the smaller machines or an internal combustion engine on the larger machines.

[0003] Walk-behind scrubber/dryers predated the ride-on machines in the market. The ride-on machines were developed after customers who had large applications—e.g., warehouses, etc.—recognized the benefits of having floors cleaned with solution rather than just swept. The physical size of the application demanded the added productivity of a ride-on unit. So, whereas the early walk-behind machines were of a narrower width—approximately 17" to 20"—and then wider width machines were developed—approximately 26" and 32"—the early ride-on machines were wide width machines, in the 50" to 60" range.

[0004] With the aging of the workforce, with many applications making aisle widths narrower to accommodate more usable space, and with increasing labor rates, there has, in the past five years or so, been a recognized need for ride-on machines of a narrower width. End-users who previously used walk-behind machines are now demanding the added productivity and efficiency of a ride-on unit, but in a package size that fits these smaller applications.

[0005] A number of ride-on machines have been developed to satisfy these needs. Certain of these machines include substantial metal chassis with front, rear and side channels to protect the tanks from damage in extreme environments, as many of the applications were more the likes of warehouses and factories rather than stores and supermarkets. However, a need has continued for a smaller ride-on machine, which can maximize its maneuverability for smaller, tighter applications. At the same time, it is important that the smaller ride-on machines have large tanks to be able to carry large amounts of solution, to avoid frequent stoppages for dumping and refilling.

[0006] The ride-on floor scrubber of the present invention overcomes difficulties described above and affords other features and advantages heretofore not available.

### SUMMARY OF THE INVENTION

[0007] The riding floor scrubber of the present invention has, in its preferred embodiment, a relatively narrow 28"

cleaning width. While minimizing the size of the ride-on floor scrubber, the volume of the clean solution tank is also maximized by forming the tank into a U-shape in the back under the seat, to continue to run one of the legs—preferably on the left side—to the front for the full length of the machine, and horizontally under the feet of the operator.

[0008] Further, the chassis is of the tricycle type with only a single front wheel so that the front of the chassis can be made V-shaped. This allows the solution tank to extend in first and second V-shaped areas on the opposite sides of the chassis for the full thickness of the chassis. This results in a substantial increase in the tank volume.

[0009] It is therefore an object of this invention to provide a riding floor scrubbing machine having common functionalities and operational mechanisms, but which is small enough and maneuverable enough to pass through narrower passageways, such as grocery store aisles and conventional doorways. It is a further object of this invention to provide a riding floor scrubbing machine that is sturdy, having a strong, metal chassis, and that provides sufficient protection to fluid storage tanks, even in extreme environments.

[0010] It is also an object of the present invention to provide a smaller ride-on machine having large tanks to be able to carry large amounts of solution, thus avoiding frequent stoppages for dumping and refilling.

[0011] It is a further object of the present invention to position the batteries that power the ride-on floor cleaner to that they are accessible for maintenance purposes and replacement, and that the batteries are positioned relative to the wheels and the center of gravity of the machine to provide a stable operating condition, and consistent weights on each wheel.

[0012] It is yet a further object of the present invention to position the recovery tank so that contaminants may be thoroughly cleaned and flushed out of the tank to prevent bacteria and odors from developing. Thus the recovery tank is intended to be as accessible and easy to clean as possible.

[0013] Other objects and advantages of the invention will become apparent from the following detailed description of an illustrative embodiment of this invention is described in connection with the drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The illustrative embodiment may best be described by reference to the accompanying drawings where:

[0015] **FIG. 1** is a perspective view of a riding floor scrubber according to the preferred teachings of the present invention;

[0016] **FIG. 2** is an exploded perspective view showing the main components thereof;

[0017] **FIG. 3** is a section view taken along line 3-3 of **FIG. 2**; and

[0018] **FIG. 4** is a diagrammatic partial side section view of the recovery tank showing the upper and lower attachment points thereof.

[0019] All figures are drawn for ease of explanation of the basic teachings of the present invention only; the extensions of the figures with respect to number, position, relationship

and dimensions of the parts to form the preferred embodiment will be explained or will be within the skill of the art after the following description has been read and understood. Further, the exact dimensions and dimensional proportions to conform to specific force, weight, strength, and similar requirements will likewise be within the skill of the art after the following description has been read and understood.

[0020] Where used in the various figures of the drawings, the same numerals designate the same or similar parts. Furthermore, when the terms “top,” “bottom,” “right,” “left,” “forward,” “rear,” “first,” “second,” “inside,” “outside,” and similar terms are used herein, it should be understood that these terms have reference only to the structure shown in the drawings as it would appear to a person viewing the drawings and are utilized only to facilitate describing the illustrative embodiment.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0021] A floor surface cleaning machine according to the preferred teachings of the present invention is shown in the drawings in the preferred form of a floor scrubber and generally designated 10. In the most preferred form, scrubber 10 is of the ride-on type. Generally, scrubber 10 includes a seat 12 for a machine operator, a clean solution tank 14, a recovery tank 16, and a chassis 18 moveably supported on the floor surface.

[0022] Chassis 18 generally includes a rectangular chassis plate 20 spaced from and generally parallel to the floor surface and adapted to receive a battery pack 52 which can be made up of various batteries connected together to provide the appropriate power requirements and typically provided within a battery tray. Each of the batteries in the battery pack 52 can weigh up to 125 pounds. Chassis plate 20 is supported by a frame including right and left vertical side rails 32 and 34 extending generally parallel to each other and attached to the upper surface of plate 20. A lateral, vertical rail 54 extends generally perpendicularly between the front ends of rails 32 and 34 and across the upper surface of plate 20. A lateral, vertical plate 56 extends generally perpendicularly between the back ends of rails 32 and 34, beneath plate 20, and forward of the back or rear edge of plate 20. Right and left triangular shaped axle mounts 58 extend between plate 56 and rails 32 and 34 and mount a laterally extending rear axle 22 for rotatably mounting wheels 23 on the opposite ends thereof. Plate 20 includes mounting flanges 48 extending laterally outwardly from the lower edges of rails 32 and 34 adjacent the rear ends thereof.

[0023] In the most preferred form, scrubber 10 includes a squeegee assembly 60 mounted to chassis 18 for purposes of wiping the floor surface and collecting the dirty solution for vacuum pickup. Squeegee assembly 60 can be of any conventional design and includes suitable provisions for floating on the floor surface during an operation mode as well as being raised from the floor surface during a transport mode.

[0024] Chassis 18 in the most preferred form is of the tricycle type and generally includes right and left vertical rail portions 36 and 38 extending at an acute angle inwardly from the forward ends of rails 32 and 34, respectively. The front ends of rail portions 36 and 38 terminate in a front rail

portion 62 extending generally parallel to lateral rail 54. Plate 20 includes an extension 64 generally extending below portions 36, 38 and 62, and includes mounting flanges 50 extending laterally beyond portions 36 and 38 adjacent portion 62.

[0025] In the most preferred form, scrubber 10 includes a single, steerable drive wheel 66 mounted to chassis 18 such as by suitable provisions 68 provided in extension 64 adjacent to rail portion 62. In the most preferred form, wheel 66 is a purchased component of conventional design and includes a battery powered motor for purposes of driving scrubber 10. Further, scrubber 10 includes a suitable scrubbing member 70 mounted to chassis 18 for purposes of agitating the floor surface. Scrubbing member 70 can be of any conventional design and includes suitable provisions for floating on the floor surface during an operation mode as well as being raised from the floor surface during a transport mode.

[0026] Chassis 18 in the most preferred form includes a steering assembly mount 72 extending forwardly from the front rail portion 62 and in the most preferred form is offset laterally to the right from the center line defined by provisions 68 for mounting drive wheel 66. A suitable steering assembly 74 is mounted to assembly mount 72 for purposes for rotating drive wheel 66 in provisions 68 and thereby steering drive wheel 66. Steering assembly 74 can be of any conventional design and can have the ability to tilt away from seat 12 for ease of operator entry and exit.

[0027] According to the preferred teachings of the present invention, clean solution tank 14 is integrally formed of plastic by roto-molding and generally includes first and second, vertical, longitudinally extending side portions 26 and 28 in a spaced parallel relation extending on opposite sides of chassis plate 20 and having rear ends adjacent to the rear edge of the chassis plate 20. In the most preferred form, side portion 28 (located on the right side of scrubber 10 when the operator is on seat 12) includes an expansion extending longitudinally beyond rail 32 such that side portion 26 has a longitudinal length generally corresponding to rail 32 whereas side portion 26 (located on the left side of scrubber 10 when the operator is on the seat 12) has a longitudinal length generally corresponding to chassis 18. Tank 14 further includes a laterally extending, vertical middle portion 29 extending generally perpendicularly between the forward end of side portion 28 and side portion 26 spaced from the rear ends and particularly intermediate its forward and rear ends of side portion 26. In the most preferred form, portion 29 generally corresponds to and overlays portion 54 and in the most preferred form includes a cut-out portion for receipt of and access to the drive motor and other components of scrubbing member 70. In the most preferred form, the upper surfaces of portions 28 and 29 have an equal height. In the most preferred form, side portion 26 has a vertical height slightly greater than the height of side portion 28 and includes provisions 76 for adding solution to tank 14 which is shown as including a hinged cover. Side portion 26 includes an inwardly facing recess 78 adjacent the rear end and extending from the upper surface thereof defining a shoulder at a height generally corresponding to the height of side portion 28. The upper, rear corner of side portion 26 is stepped and includes a

horizontal upper surface or ledge **80** at a height generally corresponding to the height of the upper surface of side portion **28**.

[0028] In the most preferred form, seat **12** is mounted to a plate **82** which is hingedly mounted to middle portion **29**. In its normal position, plate **82** abuts the with upper surface of side portion **28** and includes an ear which is not shown that extends into and is supported upon the shoulder of the recess **78**. Plate **82** and seat **12** can be pivoted relative to middle portion **29** until seat **12** engages with steering assembly **74**.

[0029] According to the preferred teachings of the present invention, clean solution tank **14** further includes a horizontal, lower portion **24** extending spaced from and generally parallel to the floor surface. Lower portion **24** integrally extends longitudinally forward from the lower end of middle portion **29** to a longitudinal extent generally equal to side portion **26**. Lower portion **24** also integrally extends from the lower end of side portion **26** and has an outer lateral extent generally equal to the outer lateral extent of side portion **28**. Clean solution tank **14** further includes a depending skirt portion **30** of a generally U-shape having a central member extending along the front of portion **24** and having first and second leg members extending along the outer edges of portion **24** (and portion **26**) at a longitudinal extent towards but not to the extent of lateral rail **54**.

[0030] In the most preferred form, the upper front corner of portion **26** includes an angled portion **84** which includes a recessed portion for receipt of electrical components such as but not limited to electrical switches, gauges and the like for scrubber **10**. Additionally, the inside wall of side portion **26** in front of middle portion **29** includes a recessed portion **86** covered by a removable panel for holding other operational components including but not limited to the electronic controls of scrubber **10**. These recessed portions are advantages in providing an unobstructed operator stand for both aesthetic and functional reasons.

[0031] In the most preferred form, the upper wall **25** of lower portion **24** which extends generally parallel to the floor surface and upon which the operator's feet can be supported is planar and specifically is generally free of obstruction from middle portion **29** to a front edge of lower portion **25** and from the expansion of side portion **26** to an opposite side edge. Thus, the operator sitting upon seat **12** has a relatively unobstructed view in the forward direction and is able to see the right forward corner of tank **14** and of scrubber **10** for purposes of maneuvering scrubber **10** adjacent to walls and other obstructions in operation of scrubber **10** according to the teachings of the present invention.

[0032] In the most preferred form, clean solution tank **14** has a lateral extent greater than chassis **18** and in the most preferred form to an extent generally equal to the outer extent of wheels **23** on axle **22** and of scrubbing member **70**. The bottom of clean solution tank **14** includes a recessed portion **35** for receipt of chassis **18**. In particular, recessed portion **35** includes a first portion formed in the bottom of lower portion **24** and of middle portion **29** of a shape corresponding to and for receipt of rail portions **36** and **38**, lateral rail **54** and plate extension **64**. Recessed portion **35** further includes second and third portions formed in the bottom of side portions **26** and **28** for receipt of rails **32** and **34**. Thus, the bottom of clean solution tank **14** has a lower

extent generally equal to the lower extent of plate **20** and extension **64** and extends around and outside of chassis **18**. Thus, the bottom of clean solution tank **14** includes first and second volumes **88** having generally triangular shapes in horizontal cross section having inside walls generally corresponding to portions **36** and **38** and bottom walls at a vertical height corresponding to plate extension **64** and the lower edges of portions **36** and **38**. It should then be appreciated that due to the tricycle shape of chassis **18** and recessed portion **35** of clean solution tank **14** resulting in volumes **88**, the capacity of solution tank **14** and thus the amount of clean solution which can be held therein is maximized. In the most preferred form, volumes **88** represent an increase of approximately 20% of the capacity of clean solution tank **14** which represents a significant operation advantage for scrubber **10**.

[0033] In the most preferred form, recovery tank **16** is removeably mounted to and carried by chassis **18** and clean solution tank **14** and in the most preferred form is vertically and laterally arranged. Specifically, tank **16** is removeably attached to tank **14** and extends between the rear ends of side portions **26** and **28** of tank **14** in the preferred form. Particularly, in the most preferred form, recovery tank **16** includes forwardly extending first and second projections **41** having lower edges adapted to abut with ledge **80** of side portion **26** and the upper wall of side portion **28**. Projections or brackets **42** are suitably separately or integrally formed in pockets in projections **41** and which can be removeably inserted into corresponding recesses **44** of ledge **80** and the upper wall of side portion **28**. The bottom of recovery tank **16** includes a lower lip portion **46** for abutting with and being supported on plate **20** adjacent its rear edge.

[0034] It should then be appreciated that recovery tank **16** is supported at three locations, specifically at the abutment of lip portion **46** with plate **20** and the abutment of projection **41** with side portions **26** and **28**, with the majority of the weight being carried by abutment of lip portion **46** with plate **20** and thus being carried directly by chassis **18** rather than through clean solution tank **14**. Thus, clean solution tank **14** is not subject to fatigue from carrying recovery tank **16**. The major function of brackets **42** inserted in recesses **44** is to keep recovery tank **16** in a vertical orientation and specifically to keep recovery tank **16** from tipping on plate **20** away from clean solution tank **14** and from moving laterally relative to tank **14**. Brackets **42** are not intended to engage recess **44** in a manner to support tank **16**. The three location support of recovery tank **16** is also advantageous in reducing fatigue stresses placed on tank **16**.

[0035] In the most preferred form, recovery tank **16** includes a vacuum assembly such as of the type shown and described in U.S. Pat. No. 5,829,095, which is newly incorporated herein by reference, but in an inverted arrangement for purposes of drawing air from the interior of recovery tank **16**. An inlet hose **40** in fluid communication with the squeegee assembly **60** extends from recovery tank **16** for flow of cleaning solution recovered from the floor surface by squeegee assembly **60**.

[0036] It should then be appreciated that the arrangement of recovery tank **16** and clean solution tank **14** according to the teachings of the present invention is advantageous. Specifically, recovery tank **16** can be removed from scrubber **10** (after removal of any electrical connection to the vacuum



assembly provided and disconnection of hose 40) by simply lifting recovery tank 16 to raise brackets 42 from recesses 44. This is advantageous as once removed, recovery tank 16 can be tilted or canted to swivel solution therein for remaining sediment that may have built up in the bottom of tank 16.

[0037] Further, with recovery tank 16 removed according to the preferred teachings of the present invention, rear access is available to battery pack 52 supported upon chassis plate 20. Thus, battery pack 52 can be easily slid into and out of the battery compartment defined by plate 20, side portions 26 and 28 and middle portion 29. Additionally, for increased accessibility plate 82 and seat 12 can be pivoted to provide vertical access to battery pack 52. In particular, it is not necessary to raise battery pack 52 in a vertical direction for removal. Removal of battery pack 52 is necessary for servicing and may be desirable to allow recharging of the batteries while scrubber 10 is being operated on a fresh battery pack 52. Further, battery pack 52 is supported upon plate 20 formed of metal and is not supported in any way by tanks 14 and 16. It, of course, should be realized that access is available to battery pack 52 with tank 16 attached to scrubber 10 by pivoting plate 82 and seat 12 according to the teachings of the present invention whether or not recovery tank 16 is removed.

[0038] Scrubber 10 according to the preferred teachings of the present invention is especially advantageous for applications having a relatively small cleaning width while having the operator being supported in a sitting position. Specifically, scrubber 10 in the most preferred form has a total width that is able to pass through conventional doorways without requiring disassembly and is able to maneuver in smaller, tighter applications. In particular, the particular shape and relationships of tanks 14 and 16 with each other and with battery pack 52 is advantageous in reducing the overall size of scrubber 10 to a minimum to fit through conventional doorways but to maximize the volume of tanks 14 and 16 so that refilling is not necessary for a typical battery run with scrubber 10. The intended application of scrubber 10 according to the preferred teachings of the present invention should be acceptable even if tanks 14 and 16 are more exposed to the environment.

[0039] Clean solution tank 14 includes a solution discharge port 15 to allow controlled gravitational release of solution from tank 14 to the floor surface at or in front of scrubbing member 70 in any conventional manner. It can then be appreciated that clean solution does not have the contaminants which can develop between growth and odors as does solution recovered from the floor surface, and that it is not necessary for clean solution tank 14 to be cleaned and flushed out as does recovery tank 16. Thus, clean solution tank 14, according to the teachings of the present invention, can be molded in a complex shape or form to maximize strength and to best utilize spaces in scrubber 10 to maximize solution volume. This is especially advantageous for scrubbers 10 having a relatively narrow cleaning width as the space required for tank 14 containing clean solution is one of the important factors in determining the physical size of scrubber 10. In this regard, clean solution tank 14 can be fabricated in a manner creating pockets which hold solution but which is unable to be drained, but with the pockets being necessary in the fabrication of tank 14 for strength reasons.

[0040] Those skilled in the art will further appreciate that the present invention may be embodied in other specific

forms without departing from the spirit or central attributes thereof. In that the foregoing description of the present invention discloses only exemplary embodiments thereof, it is to be understood that other variations are contemplated as being within the scope of the present invention. Accordingly, the present invention is not limited in the particular embodiments which have been described in detail therein. Rather, reference should be made to the appended claims as indicative of the scope and content of the present invention.

1. Machine for cleaning floors comprising, in combination:

a chassis movably supported on the floor surface, with the chassis including a chassis plate spaced from and generally parallel to the floor surface and having left and right sides and a rear edge;

a first solution tank carried by the chassis and including left and right side portions extending on opposite sides of the chassis plate adjacent to the left and right sides and having rear ends adjacent to the rear edge of the chassis plate;

and a second solution tank carried by the chassis and removably attached to the first solution tank and extending between the rear ends of the left and right side portions of the first solution tank.

2. The machine of claim 1 wherein the left and right side portions include upper surfaces;

and wherein the second solution tank includes first and second projections for abutting with the upper surfaces of the left and right side portions of the first solution tank.

3. The machine of claim 2 wherein one of the projections and the upper surfaces includes

recesses and the other of the projections and the upper surfaces includes brackets for slideable receipt in the recesses.

4. The machine of claim 3 wherein the second solution tank includes a lip portion for resting upon the chassis plate adjacent to the rear edge of the chassis plate.

5. The machine of claim 4 wherein the first solution tank further includes a middle portion

extending between the left and right side portions and spaced from the rear ends, with the middle portion including an upper surface; and wherein the machine includes an operator seat supported on the left and right side portions and the middle portion of the first solution tank.

6. The machine of claim 5 wherein one of the left and right side portions includes an

expansion extending longitudinally past the middle portion and the other of the left and right side portions terminates in the middle portion.

7. The machine of claim 6 wherein the first solution tank further includes a lower portion

extending from the middle portion generally parallel to the floor surface, and wherein the chassis is of a tricycle

type and includes right and left rail portions extending at an acute angle inwardly from the left and right sides of the chassis plate;

and wherein the first solution tank includes a bottom having a recessed portion formed therein for receiving the chassis defining first and second volumes having generally triangular shapes in cross sections parallel to the floor surface and having inside walls generally corresponding to the right and left rail portions.

**8.** The machine of claim 7 wherein the lower portion extends from the expansion.

**9.** The machine of claim 7 wherein the lower portion includes an upper wall generally

parallel to the floor surface and being generally free of obstruction from the middle portion to a front edge and from the expansion to an opposite side edge.

**10.** The machine of claim 6 wherein the expansion includes recesses for receipt of components.

\* \* \* \* \*