



(22) **Date de dépôt/Filing Date:** 2015/03/13

(41) **Mise à la disp. pub./Open to Public Insp.:** 2015/12/16

(45) **Date de délivrance/Issue Date:** 2017/04/18

(30) **Priorité/Priority:** 2014/06/16 (US14/305,838)

(51) **Cl.Int./Int.Cl.** *B64C 13/38* (2006.01),
B64C 13/44 (2006.01), *F16D 9/00* (2006.01)


(72) **Inventeur/Inventor:**
COFFMAN, JEFFREY C., US

(73) **Propriétaire/Owner:**
THE BOEING COMPANY, US

(74) **Agent:** SMART & BIGGAR

(54) **Titre : SYSTEMES ET PROCEDES DE FONCTIONNEMENT DE SURFACES DE COMMANDE DE VOL**

(54) **Title: SYSTEMS AND METHODS FOR OPERATING FLIGHT CONTROL SURFACES**

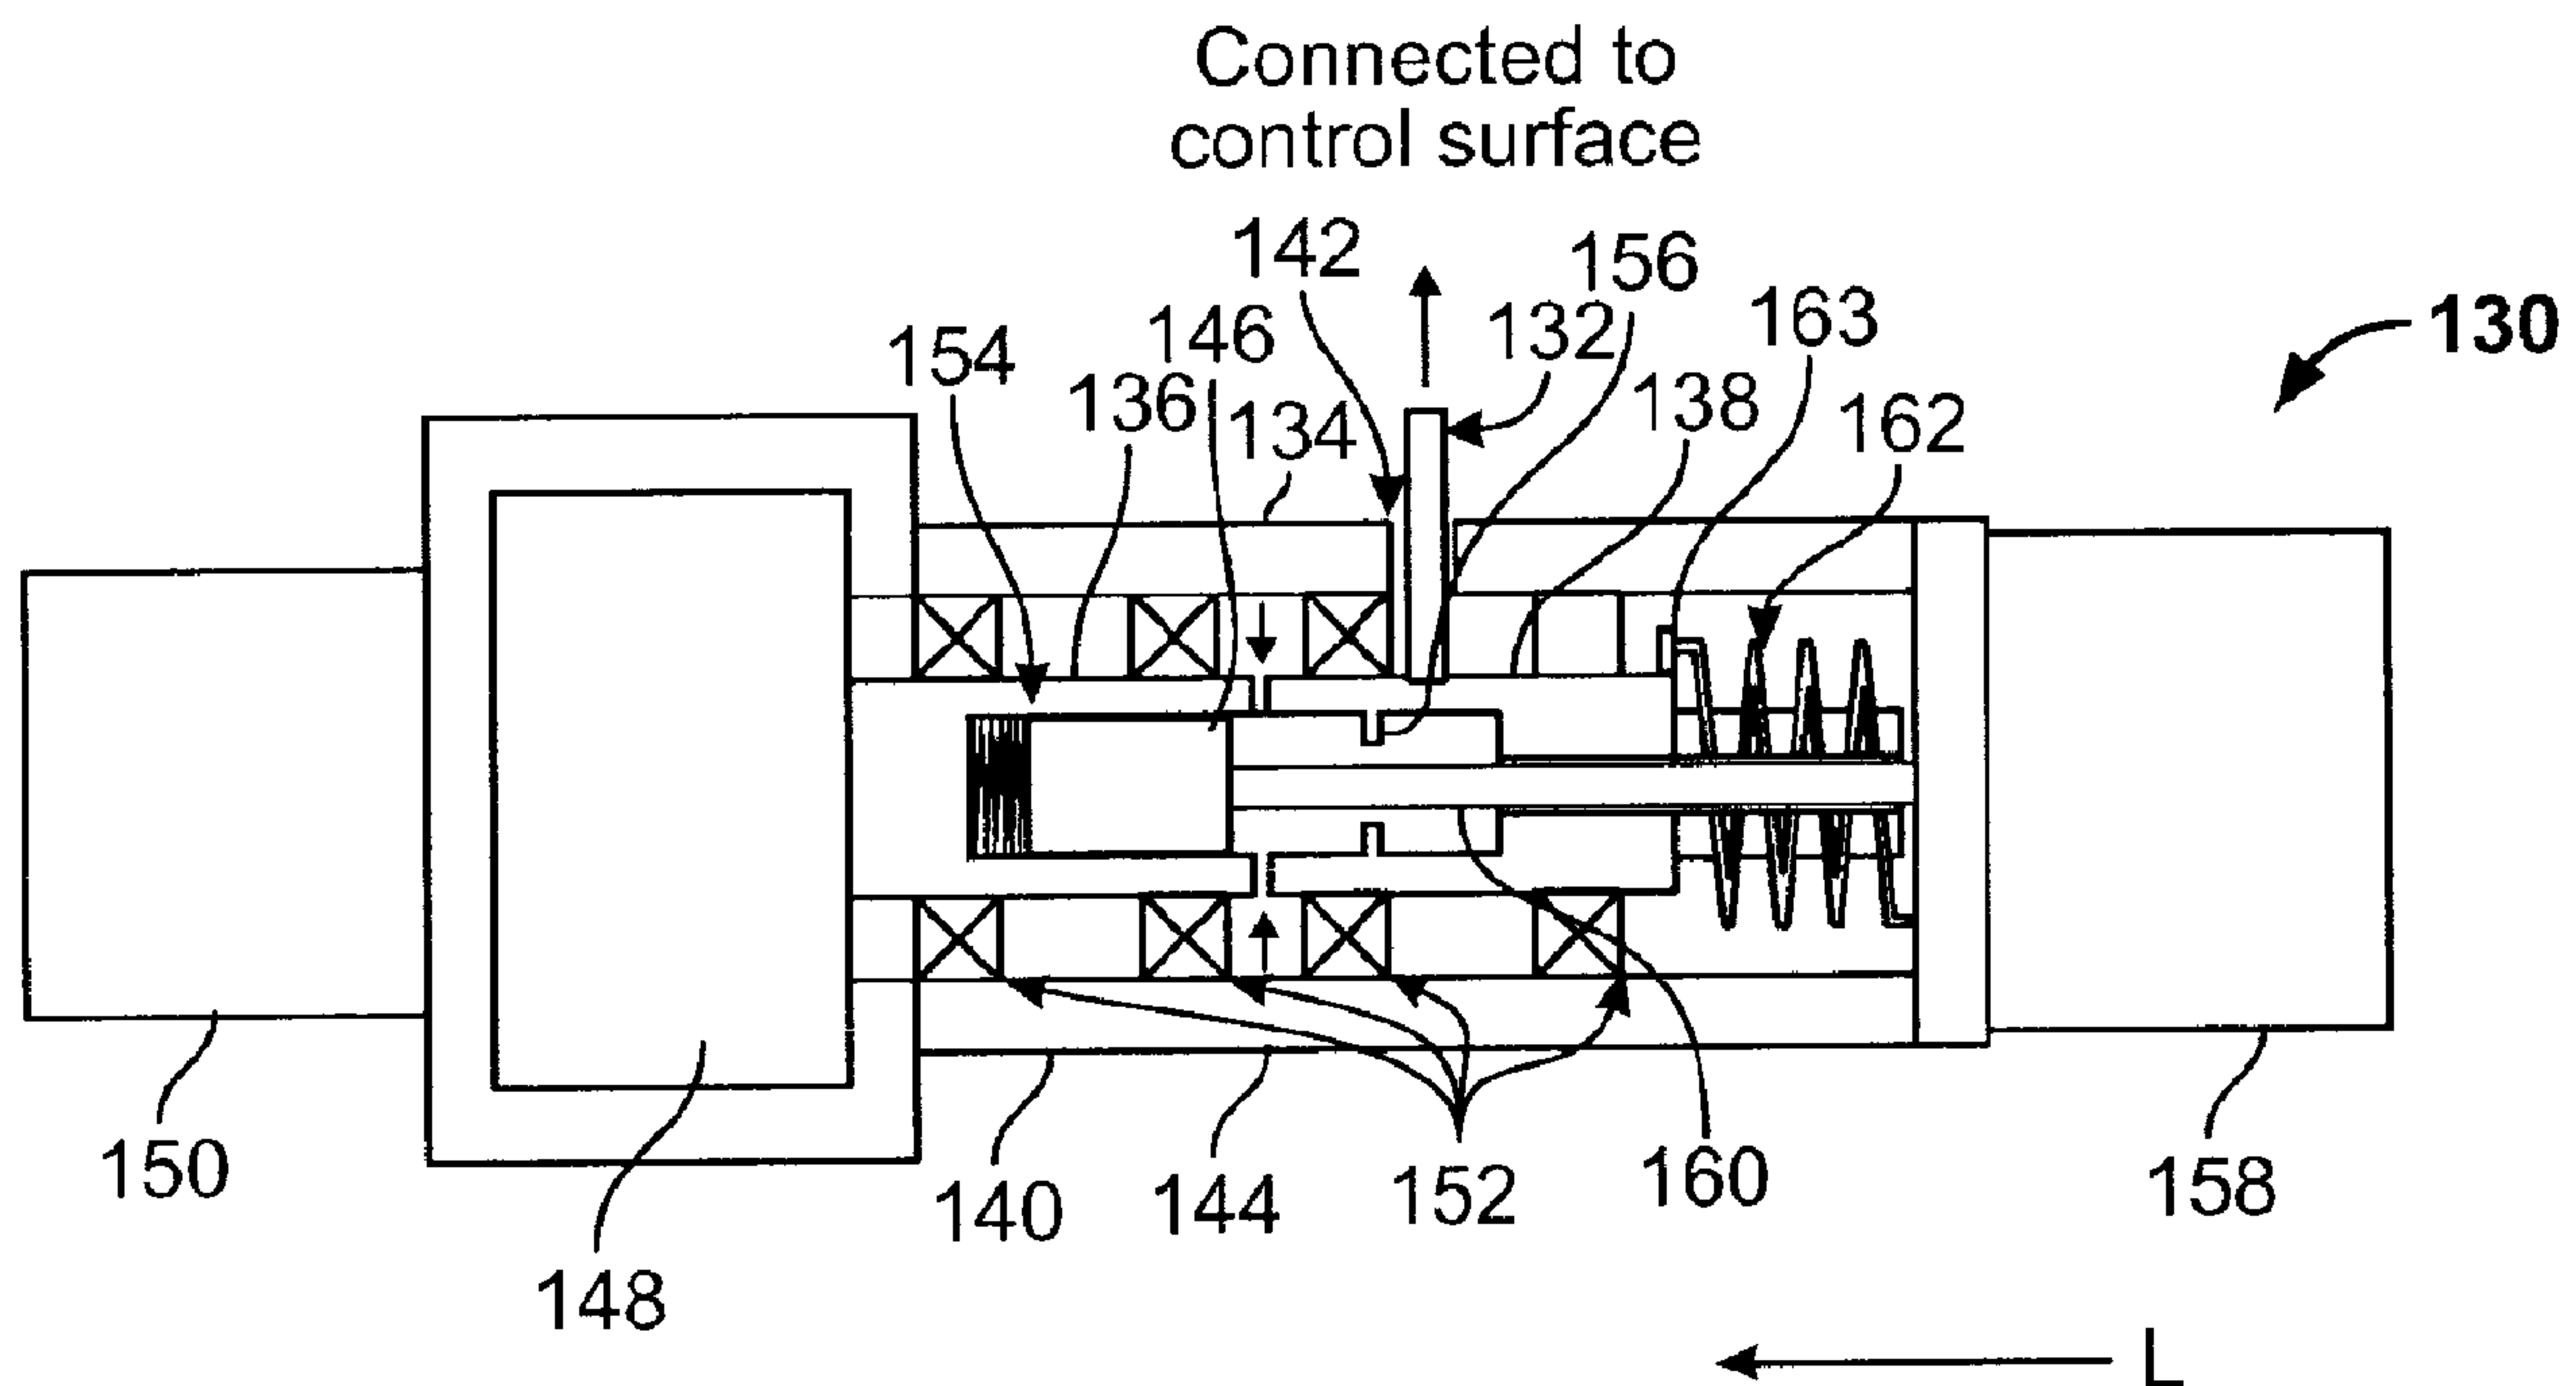

(57) **Abrégé/Abstract:**

Systems and methods for operating flight control surfaces are provided. One system includes a control device having a two piece shaft including a first shaft portion and a second shaft portion, a spline key detachably coupling the first shaft portion and the second shaft portion, and a crankshaft operatively coupling the two piece shaft and a flight control surface. The control device further includes a driving mechanism coupled to the spline key and operable to move the spline key to engage and disengage the first and second shaft portions, wherein the first and second shaft portions are disengaged when a failure to the flight control surface is detected, causing the second shaft portion to drive the flight control surface to a safe position.

ABSTRACT

Systems and methods for operating flight control surfaces are provided. One system includes a control device having a two piece shaft including a first shaft portion and a second shaft portion, a spline key detachably coupling the first shaft
5 portion and the second shaft portion, and a crankshaft operatively coupling the two piece shaft and a flight control surface. The control device further includes a driving mechanism coupled to the spline key and operable to move the spline key to engage and disengage the first and second shaft portions, wherein the first and second shaft portions are disengaged when a failure to the flight control surface is detected,
10 causing the second shaft portion to drive the flight control surface to a safe position.

SYSTEMS AND METHODS FOR OPERATING FLIGHT CONTROL SURFACES

BACKGROUND

The present disclosure relates generally to systems and methods for operating one or more flight control surfaces of an aircraft (e.g., aircraft flaps).

Aircraft may include different control surfaces, such as lift control surfaces or pitch control surfaces that facilitate controlling movement of the aircraft. Current
5 primary control surfaces are driven by hydraulic actuators that handle hardover events or failures by additional redundancy or valving internal to the actuators. For example, a hardover failure may include the erroneous switching of a system to full command (i.e. full force). When this occurs in relation to the aircraft's elevator surfaces, control is lost and the surfaces are free to move, which if unchecked, can
10 cause problems navigating the aircraft. A hardover failure of a hydraulically-powered aircraft control surface may result, for example, from a jam of the control valve spool or of the valve input arm.

Currently, for example, multiple surfaces, override valve spool sleeves and multiple single actuators may be employed to compensate for and to prevent
15 hardover failures. Such approaches either fail to protect against valve arm jams or rely on all-active systems. Further, this additional redundancy or valving adds costs and complexity, as well as bulk, to the overall control system and, thus, the aircraft. For example, configuration cost and weight may increase, resulting in an increase in both fuel and maintenance costs.

20 SUMMARY

In one embodiment, a control device includes a two piece shaft including a first shaft portion and a second shaft portion, a spline key detachably coupling the

first shaft portion and the second shaft portion, and a crankshaft operatively coupling the two piece shaft and a flight control surface. The control device further includes a driving mechanism coupled to the spline key and operable to move the spline key to engage or disengage the first and second shaft portions, wherein the control device
5 is configured to disengage the first and second shaft portions when a failure of the flight control surface is detected, causing the second shaft portion to drive the flight control surface to a safe position.

In another embodiment, an air vehicle includes a body portion, at least one flight control surface, and a control device coupled to the at least one flight control
10 surface, wherein the control device includes a two piece shaft having first and second shaft portions coupled via a spline key. The air vehicle further includes a flight control computer coupled to the control device and configured to determine a failure of the at least one flight control device, wherein the flight control computer commands the control device to move the spline key to disengage the first shaft
15 portion from the second shaft portion and the flight control surface, wherein the second shaft portion is biased to drive the flight control surface to a safe position when the second shaft portion is disengaged from the first shaft portion.

In another embodiment, a method for operating a flight control surface using a control device includes monitoring a flight control surface to detect a failure condition
20 and sending a command to the control device to drive the flight control surface to a safe position when the failure condition is detected by disengaging the shaft portions of the control device.

The features and functions discussed herein can be achieved independently in various embodiments or may be combined in yet other embodiments, further
25 details of which can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an illustration of an air vehicle having devices for driving primary flight control surfaces.

Figure 2 is a block illustration of a control environment in accordance with an embodiment.

5 Figure 3 is a schematic illustration of a control device in accordance with an embodiment in one mode of operation.

Figure 4 is a schematic illustration of a control device in accordance with an embodiment in another mode of operation.

10 Figure 5 is a block illustration of an operating environment in accordance with an embodiment.

Figure 6 is an illustration of operations for controlling flight control surfaces in accordance with an embodiment.

DETAILED DESCRIPTION

15 The following detailed description of certain embodiments will be better understood when read in conjunction with the appended drawings. It should be understood that the various embodiments are not limited to the arrangements and instrumentality shown in the drawings.

20 As used herein, an element or step recited in the singular and proceeded with the word "a" or "an" should be understood as not excluding plural of said elements or steps, unless such exclusion is explicitly stated. Furthermore, references to "one embodiment" are not intended to be interpreted as excluding the existence of additional embodiments that also incorporate the recited features. Moreover, unless explicitly stated to the contrary, embodiments "comprising" or "having" an element or

a plurality of elements having a particular property may include additional such elements not having that property.

As used herein, the terms "system," "unit," or "module" may include a hardware and/or software system that operates to perform one or more functions.

5 For example, a module, unit, or system may include a computer processor, controller, or other logic-based device that performs operations based on instructions stored on a tangible and non-transitory computer readable storage medium, such as a computer memory. Alternatively, a module, unit, or system may include a hard-wired device that performs operations based on hard-wired logic of
10 the device. The modules, systems, or units shown in the attached figures may represent the hardware that operates based on software or hardwired instructions, the software that directs hardware to perform the operations, or a combination thereof.

Various embodiments described and/or illustrated herein provide methods
15 and systems for driving one or more primary flight control surfaces of an aircraft in the event of a hardover failure. For example, in the case of a primary flight control system hardover failure, the control surface loses control and drives to the fully deflected position. With the control surface driven and stuck in the fully deflected position, the controllability of the aircraft is affected. By practicing at least one
20 embodiment, a secondary or backup method of driving the flight control surface(s) is provided to maintain the controllability of the aircraft.

For example, in some embodiments, a device is provided that allows the control surface to be driven back to the faired position (e.g., null position). As described in more detail herein, the control surface is driven back to the faired
25 position by disconnecting an actuator component, such as an actuator output shaft, from the control surface and driving the control surface to a desired position, which in some embodiments is accomplished using a return spring. This driving of the

control surface back to the faired position alleviates the hardover condition in various embodiments.

Figure 1 illustrates an aircraft **102** that includes secondary or backup devices that drive the control surface(s) back to the faired position during a hardover condition. It should be noted that the term aircraft **102** may be used interchangeably with transport aircraft, airflight, airplane, plane, and the like.

In the illustrated embodiment, the aircraft **102** includes plural control surfaces such as, but is not limited to, flaperons or ailerons **104**, an elevator **106**, and the like. The direct lift control surfaces, the flaperons or ailerons **104**, may be hinged control surfaces attached to a trailing edge of a wing of a fixed-wing aircraft. The flaperons or ailerons **104** may control a roll or bank (degree of rotation about a longitudinal axis) of the aircraft **102**. In some embodiments, the flaperons **104** on each wing are lowered together to function much the same way as a dedicated set of flaps. In other embodiments, the ailerons **104** on each wing are actuated differently, one aileron downward while the other aileron is upward to control roll of the aircraft **102**.

The elevator **106** is used to control a pitching motion of the aircraft **102**, and are known as pitch control surfaces. The elevator **106** is located at a rear of the aircraft **102** and helps control a vertical movement of the aircraft **102**. There may be two elevators **106** where each is attached to each side of a fuselage. In operation, the elevator **106** controls a position of a nose of the aircraft **102** and angle of attack of a wing.

As can be seen, a plurality of control devices **110** are provided in combination with one or more of the control surfaces, such as the flaperons **104** and the elevator **106**. However, it should be noted that additional or fewer control devices **110** may be provided with different control surfaces, for example, based on the type of aircraft **102**. The control devices **110** are configured to provide secondary operation to drive one or more of the control surfaces in the event of a hardover failure. It should be

noted that although the various embodiments, including the control devices **110**, are shown in combination with an aircraft **102**, the control devices **110** may be used in combination with different types of aircraft **102**, as well as in non-aircraft applications, such as to reduce the likelihood of a failure of an actuated component.

- 5 The control devices may be used with other components of the aircraft **102**, such as the landing gear.

In one embodiment, the control devices **110** are configured to operate as a retract mechanism wherein if the control surface moves to a maximum extent (e.g., plus or minus thirty degrees), thereby defining a hardover event, the control devices
10 **110** are operable to retract the control surface(s) from the maximum extent. For example, a determination may be made that a failure condition has occurred within the hydraulics of the control surface(s) or an improper control command or signal is being sent (e.g., electronics failure), resulting in a hardover condition. When such a hardover condition is identified, such as if an actuator **112** of the control surface fails
15 to respond or responds incorrectly to position the control surface(s), the corresponding control device **110**, in particular the control device **110** connected to the failed actuator **112**, performs a secondary or retract operation to drive the control surface(s) to a non-hardover position.

For example, as shown in Figure 2, the control device **110** is operatively
20 coupled to a control surface **120**, which may be embodied, for example, as the flaperons **104** or the elevator **106** shown in Figure 1. In the illustrated embodiment, the control device **110** includes a two-piece shaft **122** that is coupled to the control surface **120** via an output crankshaft **124**. During normal operation, a motor **126** that is coupled to the two-piece shaft **122** drives the position of the control surface **120**.
25 For example, power from the motor **126** is transmitted via the two-piece shaft **122** to the output crankshaft **124** to drive the control surface **120** to different positions. In a normal operating mode, rotational movement of the two-piece shaft **122** is converted to translational movement by the output crankshaft **124** to move the control surface **120**, such as to raise or lower the control surface **120**.

In the normal operating mode, commands or control signals from the aircraft's control system are used to control the motor **126** to drive the control surface **120** to different positions. In the illustrated embodiment, the motor **126** is coupled to a flight control computer **128** that generates the command signals to control motor operation to thereby drive movement of the control surface **120**. It should be noted that the command signals generated by the flight control computer **128** may be automatically generated, semi-automatically generated, or manually generated (e.g., based on pilot input).

In a non-normal operating mode, such as during a hardover condition, the control device **110** is configured to prevent the motor **126** from driving the control surface **120**. Additionally, in such a condition, the control device **110** is configured to drive the control surface **120** from a position of the hardover condition to a position within a normal operating mode or into a non-hardover condition or safe position. For example, in one embodiment, the two-piece shaft **122** disengages the motor **126** from the output crankshaft **124** to prevent further movement of the control surface **120**. Accordingly, any further commands to the motor **126** to move the control surface **120** do not cause movement of the control surface **120** as the power from the motor **126** can no longer be transmitted to the control surface **120**. Additionally, in the non-normal operating mode, such as during a hardover condition, the control device **110** drives the control surface **120** out of the hardover condition, such as to a faired or null position to give the aircraft better controllability and/or drag when the two-piece shaft **122** disconnects the motor **126** from the output crankshaft **124**.

One embodiment, as illustrated in Figure 3, includes a control device **130** configured to drive a control surface to a desired position to remove or alleviate a hardover condition (e.g., a control surface stuck in a fully deflected position, such as when the control surface loses control and drives to the fully deflected position). Thus, in operation, the control device **130** in various embodiments eliminates primary control surface hardover conditions. For example, the control device **130** may operate as a secondary method of driving the primary flight control surface,

such as in the event of a hardover failure. The control device **130** may be embodied, for example, as the control device **110**, shown in Figures **1** and **2**. Using the control device **110** or **130** hydraulic actuators with additional redundancy or valving internal to the actuator are not used.

5 As can be seen in Figure **3**, the control device **130** includes a two-piece shaft (which may be embodied as the two piece shaft **122** shown in Figure **2**) that allows for engaging and disengaging with an output crank (which may be embodied as the output crankshaft **124** shown in Figure **2**). For example, the control device **130** is configured for coupling to a control surface via an output crank **132** that transmits
10 power to drive the control surface. For example, the output crank **132** may be coupled to the control surface **120** (shown in Figure **2**) to drive the control surface **120** to a plurality of different positions to control flight of an aircraft. In one embodiment, the output crank **132** is rotatably operable to drive the control surface to a plurality of positions (e.g., drive the flaperons or ailerons **104**, elevator **106** to
15 different positions).

In the illustrated embodiment, the output crank **132** is coupled to a two piece shaft **134** formed from a first shaft portion **136** and a second shaft portion **138** located within a housing **140** (e.g., an actuator housing). The first and second shaft portions **136** and **138** may be axially aligned, for example, longitudinally within the
20 housing **140** and perpendicular to the output crank **132** in this embodiment. However, it should be appreciated that other alignments or configurations may be provided. Additionally, although the output crank **132** is shown as coupled at a particular location of the second shaft portion **138**, the output crank **132** may be coupled to a different location of the second shaft portion **138**. In general, the output
25 crank **132** is coupled to the second shaft portion **138** to allow the output crank **132** to extend outward from the housing **140**, such as through an opening **142**. It should be noted that the opening **142** may be differently sized and shaped, such as based on the size and shape of the output crank **132** and also may be sealed. Additionally, it

should be noted that the output crank **132** in some embodiments is formed as part of (e.g., integrally formed with) the second shaft portion **138**.

The first and second shaft portions **136** and **138** may be separated by a gap **144**, which may be sized as desired or needed. In some embodiments, the first and second shaft portions **136** and **138** are aligned in abutting relationship during normal operation. The first and second shaft portions **136** and **138** are configured to operate together as a single shaft when engaged, or to operate separately as independent shafts when disengaged. For example, in the normal operating mode, the first and second shaft portions **136** and **138** are operable together to control the movement of the output crank **132** to drive the control surface. In a non-normal operating mode, for example, in a hardover failure mode of operation, the first and second shaft portions **136** and **138** are disengaged from each other and independently operable to control the output crank **132** and drive the control surface out of the hardover condition.

In the illustrated embodiment, the first and second shaft portions **136** and **138** are detachably coupled to each other via a spline key **146**. For example, the spline key **146** in some embodiments engages with both the first and second shaft portions **136** and **138** to rotate the two piece shaft **134** during normal operation and drive the output crank **132**. In one embodiment, the spline key **146** includes a drive shaft having splines (e.g., ridges or teeth, such as a **12** point spline) thereon that are complementary with (e.g., mesh with) portions of the first and second shaft portions **136** and **138** (e.g., grooves in the first and second shaft portions **136** and **138**). In operation, rotation of the first shaft portion **136** when coupled with the second shaft portion **138** by the spline key **146** causes the rotating force or torque to be transferred from the first shaft portion **136** to the second shaft portion **138** to drive the output crank **132**. However, as described in more detail herein, when the first and second shaft portions **136** and **138** are not engaged with the spline key **146**, the first and second shaft portions **136** and **138** are capable of translating movement

within the housing **140** (e.g., left and right movement as viewed in Figure **3**), but not rotation.

A gear train **148**, which may be any type of gearing arrangement, is coupled to the first shaft portion **136** opposite the second shaft portion **138** in the illustrated embodiment. The gear train **148** may be any type of gearing arrangement, such as gears mounted on a frame so that the teeth of the gears engage each other and rotate together. The gear train **148** is located within the housing **140** in the illustrated embodiment. The gear train **148** is coupled to a motor **150** (which may be embodied as the motor **126** in Figure **2**), which is located outside the housing **140** in the illustrated embodiment. The motor **150** may be any type of motor that allows for actuation of the two piece shaft **134**. For example, in operation, the motor **150**, via the gear train **148**, drives the first shaft portion **136** by turning or rotating the first shaft portion **136** within the housing **140**. As can be seen, bearings **152** (e.g., ball bearings) are positioned within the housing **140** to facilitate rotation of the two piece shaft **134** within the housing **140**. The number, positioning, and spacing of the bearings **152** may be varied as desired or needed.

In normal operation, with the first shaft portion **136** coupled to the second shaft portion **138** with the spline key **146**, when the motor **150** operates to drive the gear train **148**, the first shaft portion **136** rotates, which causes rotation of the second shaft portion **138** via the spline key **146**. In normal operation, the spline key **146** is held in position relative to the first shaft portion **136** by a spring **154** (e.g., compression spring) coupled between the spline key **146** and the first shaft portion **136** (shown within the first shaft portion **136**). In one embodiment, the spring **154** is normally biased to hold the spline key **146** in an engaged or locked position relative to the first and second shaft portions **136**, **138**. Thus, the two piece shaft **134** is maintained in alignment and position with the first shaft portion **136** operatively engaged with the second shaft portion **138** via the spline key **146**. Thus, in this position, during normal operation, the first and second shaft portions **136** and **138** are aligned and coupled together by the spline key **146** to rotate together.

In the illustrated embodiment, the spring **154** causes the spline key **146** to engage and abut against a shoulder **156** of the second shaft portion **138** (illustrated within the second shaft portion **138**). Thus, in normal operation, the spring **154** biases the spline key **146** against the shoulder **156** of the second shaft portion **138**.
5 In this position, as discussed in more detail herein, the first and second shaft portions **136** and **138** operate together, for example, rotate together to drive the output crank **132**.

The control device **130** also includes a driving mechanism, illustrated as a solenoid **158**, that is located outside the housing **140**. The solenoid **158**
10 interconnects with the spline key **146** via a plunger **160**, illustrated as extending through the second shaft portion **138**. Additionally, a torsion spring **162** is coupled to the second shaft portion **138**, which may be positioned between an end of the housing **140** and a portion of the second shaft portion **138** (e.g., coupled to a protrusion **163**, such as a tab, extending from the second shaft portion **138**). In the
15 illustrated embodiment, the torsion spring **162** is positioned about a portion of the length of the second shaft portion **138**.

During a non-normal operation operating mode, for example, during a hardover failure condition, which may be detected as described in more detail herein, the solenoid **158** is controlled to drive the plunger **160** longitudinally within the
20 housing **140** (illustrated by the arrow L, from right to left as viewed in Figure 3) such that the spline key **146** is translated within the housing **140**. The plunger **160** is moved to translate the spline key **146** a distance D and against the biasing force of the spring **154** to move the spline key **146** away from the second shaft portion **138** to a position wherein the spline key **146** does not engage the second shaft portion **138**,
25 such as to the position shown in Figure 4. For example, the entire spline key **146** is removed from coupling engagement with the second shaft portion **138** and only engages the first shaft portion **136**. With the spline key **146** disengaged with the second shaft portion **138**, the torsion spring **162** causes rotation of the second shaft portion **138** independent of the first shaft portion **136**. In one embodiment, when in

the disengaged position, the torsion spring **162** causes rotation of the second shaft portion **138** opposite to the rotation during the normal operating mode when extending the control surface. Accordingly, the output crank **132** is driven in the opposite direction to retract the control surface, such as to a faired position as
5 described in more detail herein. In various embodiments, the torsion spring **162** in combination with the airstream returns the control surface to a position that removes the control surface from the airstream.

Once the control surface is retracted, the first and second shaft portions **136** and **138** may be maintained in a disengaged position or may be reengaged by
10 moving the plunger **160** in an opposite direction to cause the spline key **146** to reengage with the second shaft portion **138**. Thus, the first and second shaft portions **136** and **138** may be maintained in a disengaged position until, for example, maintenance is performed or proper operation of the control surface is returned.

In operation, the first and second shaft portions **136** and **138** may be engaged
15 or disengaged to facilitate normal operation of the control surface or drive the control surface from a hardover failure position. For example, the two piece shaft **134** includes the first and second shaft portions **136** and **138** detachably engaged by the spline key **146**. The spline key **146** is held in position with the spring **154** until an actuator failure occurs, for example, during a hardover failure condition. When there
20 is actuator failure, which may be mechanical or electrical (such as improper control signaling), the solenoid **158** drives the spline key **146** against the spring **154** which disconnects or disengages the first and second shaft portions **136** and **138**. Once the first and second shaft portions **136** and **138** are disconnected or disengaged, the torsion spring **162** drives the second shaft portion **138** to rotate the output crank **132**
25 and drive the control surface to a safe position. It should be noted that the amount of movement caused by the torsion spring **160** may be determined based on the maximum extent of movement of the control surface (e.g., plus or minus thirty degrees). Thus, if a failure occurs, such as internal to the actuator (e.g., the control device **130**) or if improper signals are being communicated, then a fast retract

command signal may be sent to the solenoid **158** to initiate retract operation of the control surface as described herein.

Various embodiments disengage the control surface actuation in the event of a hardover condition (or a condition where the actuator is driven to the extreme end
5 of travel and locked out from correcting). One or more embodiments provide for control of the actuator to a null or nominal position if hardover occurs.

Thus, a control surface may be driven back to a position where the control surface is no longer in the airstream by disconnecting the actuator output shaft from the control surface and driving the control surface to a desired position with a return
10 spring, alleviating hardover condition (e.g., automatic flight control system failure that results in controls being driven to the extreme end of travel). Hardover can result in reduced controllability the aircraft. In various embodiments, the torsion spring **162** determines the null or fail safe position of the device. Loads induced on the control surface from the airstream will help to push the torsion spring **162** and control
15 surface into position.

It should be noted that although various embodiments are described in connection with operation in combination with control surfaces, one or more embodiments may be implemented in connection with different applications. For example, one or more embodiments may be implemented in connection with landing
20 gear/emergency gear release systems.

The control devices described herein may be controlled by an operating environment **170** as shown in Figure **5**, which may be implemented in hardware, software, or a combination thereof. The operating environment **170** may be configured as any suitable flight control computer **172** capable of implementing and
25 providing the control commands, such as for controlling the operation of the control device **110** or **130**. In one embodiment, the flight control computer **172** includes at least one processor **174** and a memory **176**. Depending on the configuration and

type of flight control computer, the memory **176** may be volatile (such as RAM) and/or non-volatile (such as ROM, flash memory, etc.).

The memory **176** can store programs executed on the processor **174** and data generated during execution thereof. For example, the memory **176** may store
5 any number of programs, data, including an operating system, one or more application programs, other program modules, and program data.

The memory **176** may include an operating system **178**, one or more application programs **180** for implementing control surface operation **182**, as well as various other data, programs, media, and the like. In one embodiment, the memory
10 **176** includes the program for control surface operation **182**, as well as for a user interface subsystem **184**, and a data management subsystem **186**.

The user interface subsystem **184** may present the user with a graphical user interface indicative of a current position of one or more control surfaces. The data management subsystem **186** in some embodiments manages storage of
15 information, such as air data, navigation data, flight control data, control system data, control surface data, and the like, and may communicate with one or more local and/or remote databases.

The memory **176** may also include various computer-readable storage media. It should be understood that volatile memory may include media such as random
20 access memory (RAM), non-volatile memory may include read only memory (ROM) and flash portion. The computing environment **170** may also include other removable/non-removable, volatile/non-volatile computer storage media such as a hard disk drive for reading from and writing to a non-removable, non-volatile magnetic media, a magnetic disk drive for reading from and writing to a removable,
25 non-volatile magnetic disk, and an optical disk drive for reading from and/or writing to a removable, non-volatile optical disk such as a CD-ROM, DVD-ROM, or other optical media. The drives and associated computer-readable media can provide

non-volatile storage of computer readable instructions, data, program modules, and other information for the flight control computer **172**.

The flight control computer **172** may also contain communications connection(s) **188** that allow the flight control computer **172** to communicate with a database, and/or other devices on a network. Communications connection(s) **188** is an example of communication media. Communication media may embody computer readable instructions, data, program modules, or other information and includes any information delivery media. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media. The term computer readable media as used herein includes both storage media and communication media.

The flight control computer **172** may also include, but is not limited to input device(s) **190**, such as a keyboard, a mouse, a stylus-based device, a control stick, a control yoke, and the like. The flight control computer **172** may include output devices **192**, such as a display screen, speakers, and the like. All of these devices may be provided as desired or needed, such as based on the particular aircraft.

Figure **6** is a flowchart of a method **200** for operating one or more control surfaces in accordance with various embodiments. In various embodiments, the method **200**, for example, may employ structures or aspects of various embodiments (e.g., systems and/or methods) discussed herein. In various embodiments, certain steps may be omitted or added, certain steps may be combined, certain steps may be performed simultaneously, certain steps may be performed concurrently, certain steps may be split into multiple steps, certain steps may be performed in a different order, or certain steps or series of steps may be re-performed in an iterative fashion.

The method **200** includes monitoring operation of one or more control surfaces at **202**, such as primary flight control surfaces of an aircraft. In some

embodiments, the one or more control surfaces are monitored to determine a current position and operating state of each. A determination is made at **204** as to whether there is any actuator failure associated with any one or more of the control surfaces. For example, as described in more detail herein, a determination is made as to whether a mechanical or electrical failure has occurred with the control surface, such as to cause a hardover condition. If a determination is made that actuator failure does not exist, then monitoring is continued at **202**.

If a determination is made that actuator failure exists, then at **206** a command is sent to the control device as a secondary method to drive the control surface with actuator failure to a safe position (e.g., a faired position). For example, as described herein, instead of driving the primary motor of a control device, a secondary driver, such as a solenoid is actuated to cause retraction of the control surface.

Various embodiments may be used with different types of air vehicles, such as commercial aircraft. Thus, one or more embodiments may be implemented in connection with different types of aircraft.

It should be noted that the particular arrangement of components (e.g., the number, types, placement, or the like) of the illustrated embodiments may be modified in various alternate embodiments. In various embodiments, different numbers of a given module, system, or unit may be employed, a different type or types of a given module, system, or unit may be employed, a number of modules, systems, or units (or aspects thereof) may be combined, a given module, system, or unit may be divided into plural modules (or sub-modules), systems (or sub-systems) or units (or sub-units), a given module, system, or unit may be added, or a given module, system or unit may be omitted.

It also should be noted that the various embodiments may be implemented in hardware, software or a combination thereof. The various embodiments and/or components, for example, the modules, systems, or components and controllers

therein, also may be implemented as part of one or more computers or processors. The computer or processor may include a computing device, an input device, a display unit, and an interface. The computer or processor may include a microprocessor. The microprocessor may be connected to a communication bus.

5 The computer or processor may also include a memory. The memory may include Random Access Memory (RAM) and Read Only Memory (ROM). The computer or processor further may include a storage device, which may be a hard disk drive or a removable storage drive such as a solid state drive, optical drive, and the like. The storage device may also be other similar means for loading computer programs or

10 other instructions into the computer or processor.

As used herein, the term "computer," "controller," "system", and "module" may each include any processor-based or microprocessor-based system including systems using microcontrollers, reduced instruction set computers (RISC), application specific integrated circuits (ASICs), logic circuits, GPUs, FPGAs, and any

15 other circuit or processor capable of executing the functions described herein. The above examples are exemplary only, and are thus not intended to limit in any way the definition and/or meaning of the term "module", "system", or "computer."

The computer, module, system, or processor executes a set of instructions that are stored in one or more storage elements, in order to process input data. The

20 storage elements may also store data or other information as desired or needed. The storage element may be in the form of an information source or a physical memory element within a processing machine.

The set of instructions may include various commands that instruct the computer, module, system, or processor as a processing machine to perform

25 specific operations such as the methods and processes of the various embodiments described and/or illustrated herein. The set of instructions may be in the form of a software program. The software may be in various forms such as system software or application software and which may be embodied as a tangible and non-transitory

computer readable medium. Further, the software may be in the form of a collection of separate programs, systems, or modules, a program module within a larger program or a portion of a program module. The software also may include modular programming in the form of object-oriented programming. The processing of input
5 data by the processing machine may be in response to operator commands, or in response to results of previous processing, or in response to a request made by another processing machine.

As used herein, the terms "software" and "firmware" are interchangeable, and include any computer program stored in memory for execution by a computer,
10 including RAM memory, ROM memory, EPROM memory, EEPROM memory, and non-volatile RAM (NVRAM) memory. The above memory types are exemplary only, and are thus not limiting as to the types of memory usable for storage of a computer program. The individual components of the various embodiments may be virtualized and hosted by a cloud type computational environment, for example to allow for
15 dynamic allocation of computational power, without requiring the user concerning the location, configuration, and/or specific hardware of the computer system.

It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments (and/or aspects thereof) may be used in combination with each other. In addition, many
20 modifications may be made to adapt a particular situation or material to the teachings of the various embodiments without departing from the scope thereof. Dimensions, types of materials, orientations of the various components, and the number and positions of the various components described herein are intended to define parameters of certain embodiments, and are by no means limiting and are
25 merely exemplary embodiments. Many other embodiments and modifications within the spirit and scope of the claims will be apparent to those of skill in the art upon reviewing the above description. The scope of the various embodiments should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the

terms "including" and "in which" are used as the plain-English equivalents of the respective terms "comprising" and "wherein." Moreover, in the following claims, the terms "first," "second," and "third," etc. are used merely as labels, and are not intended to impose numerical requirements on their objects.

- 5 This written description uses examples to disclose the various embodiments, and also to enable a person having ordinary skill in the art to practice the various embodiments, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the various embodiments is defined by the claims, and may include other examples that occur to those skilled in
- 10 the art. Such other examples are intended to be within the scope of the claims if the examples have structural elements that do not differ from the literal language of the claims, or the examples include equivalent structural elements with insubstantial differences from the literal languages of the claims.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A control device comprising:

a two piece shaft including a first shaft portion and a second shaft portion;

5

a spline key detachably coupling the first shaft portion and the second shaft portion;

10

a crankshaft operatively coupling the two piece shaft and a flight control surface; and

15

a driving mechanism coupled to the spline key and operable to move the spline key to engage and disengage the first and second shaft portions, the control device being configured to disengage the first and second shaft portions when a failure of the flight control surface is detected, causing the second shaft portion to drive the flight control surface to a safe position.

20
2. The control device of claim 1, further comprising a torsion spring coupled to the second shaft portion to rotate the second shaft portion in a direction opposite to a direction for extending the flight control surface to retract the flight control surface.

25
3. The control device of claim 1 or claim 2, wherein the driving mechanism comprises a solenoid coupled to the spline key by a plunger, the plunger configured to disengage the spline key from the second shaft portion.

4. The control device of any one of claims 1 to 3, further comprising a compression spring coupled to the first shaft portion and arranged to bias the spline key to engage the first and second shaft portions.
- 5 5. The control device of any one of claims 1 to 4, wherein the crankshaft is coupled to the second shaft portion.
6. The control device of any one of claims 1 to 5, further comprising a motor coupled to the first shaft portion to rotate the two piece shaft when the first and second shaft portions are engaged with each other.
- 10 7. The control device of any one of claims 1 to 6, wherein the failure of the flight control surface comprises a hardover failure.
- 15 8. The control device of any one of claims 1 to 7, further comprising a motor coupled to the two piece shaft, the motor operable to rotate the two piece shaft and the driving mechanism operable to translate the spline key relative to the two piece shaft.
- 20 9. The control device of any one of claims 1 to 8, wherein the flight control surface comprises at least one of a flaperon, an aileron, or an elevator.
10. The control device of any one of claims 1 to 9, wherein the safe position comprises a faired position of the flight control surface.
- 25 11. An air vehicle, comprising:
 - a body portion;
 - at least one flight control surface;
- 30

a control device coupled to the at least one flight control surface, the control device including a two piece shaft having first and second shaft portions coupled via a spline key; and

5

a flight control computer coupled to the control device and configured to determine a failure of the at least one flight control device, the flight control computer commanding the control device to move the spline key to disengage the first shaft portion from the second shaft portion and the flight control surface, wherein the second shaft portion is biased to drive the flight control surface to a safe position when the second shaft portion is disengaged from the first shaft portion.

10

12. The air vehicle of claim **11**, wherein the first and second shaft portions rotate in a first direction to extend the at least one flight control surface and the second shaft portion when disengaged from the first shaft portion rotating in a second direction opposite to the first direction.

15

13. The air vehicle of claim **11** or claim **12**, wherein the at least one flight control surface comprises at least one of a flaperon, an aileron, or an elevator.

20

14. The air vehicle of any one of claims **11** to **13**, wherein the control device comprises an electrical actuator.

25

15. The air vehicle of any one of claims **11** to **13**, wherein the control device comprises a non-hydraulic actuator.

16. The air vehicle of claim **11**, wherein the control device comprises a torsion spring to rotate the second shaft when disengaged from the first shaft portion.

30

17. The air vehicle of any one of claims **11** to **16**, wherein the control device comprises a compression spring to bias the spline key to engage the first and second shaft portions.

5 18. The air vehicle of any one of claims **11** to **17**, further comprising a solenoid disengaging the spline key from the second shaft portion.

19. A method for operating a flight control surface using the control device of any one of claims 1 to 10, the method comprising:

10

monitoring a flight control surface to detect a failure condition; and

sending a command to the control device to drive the flight control surface to a safe position when the failure condition is detected by



15

disengaging the shaft portions of the control device.

20. The method of claim **19**, wherein monitoring the flight control surface comprises monitoring the flight control surface to detect a hardover failure as the failure condition and when detecting the hardover failure, sending the command to the control device to cause a solenoid to drive a plunger and the spline key into a compression spring and wherein a torsion spring pulls the second shaft portion to a failed position with movement of the second shaft portion turning an output crank to return the flight control surface to a failed position.

20

25

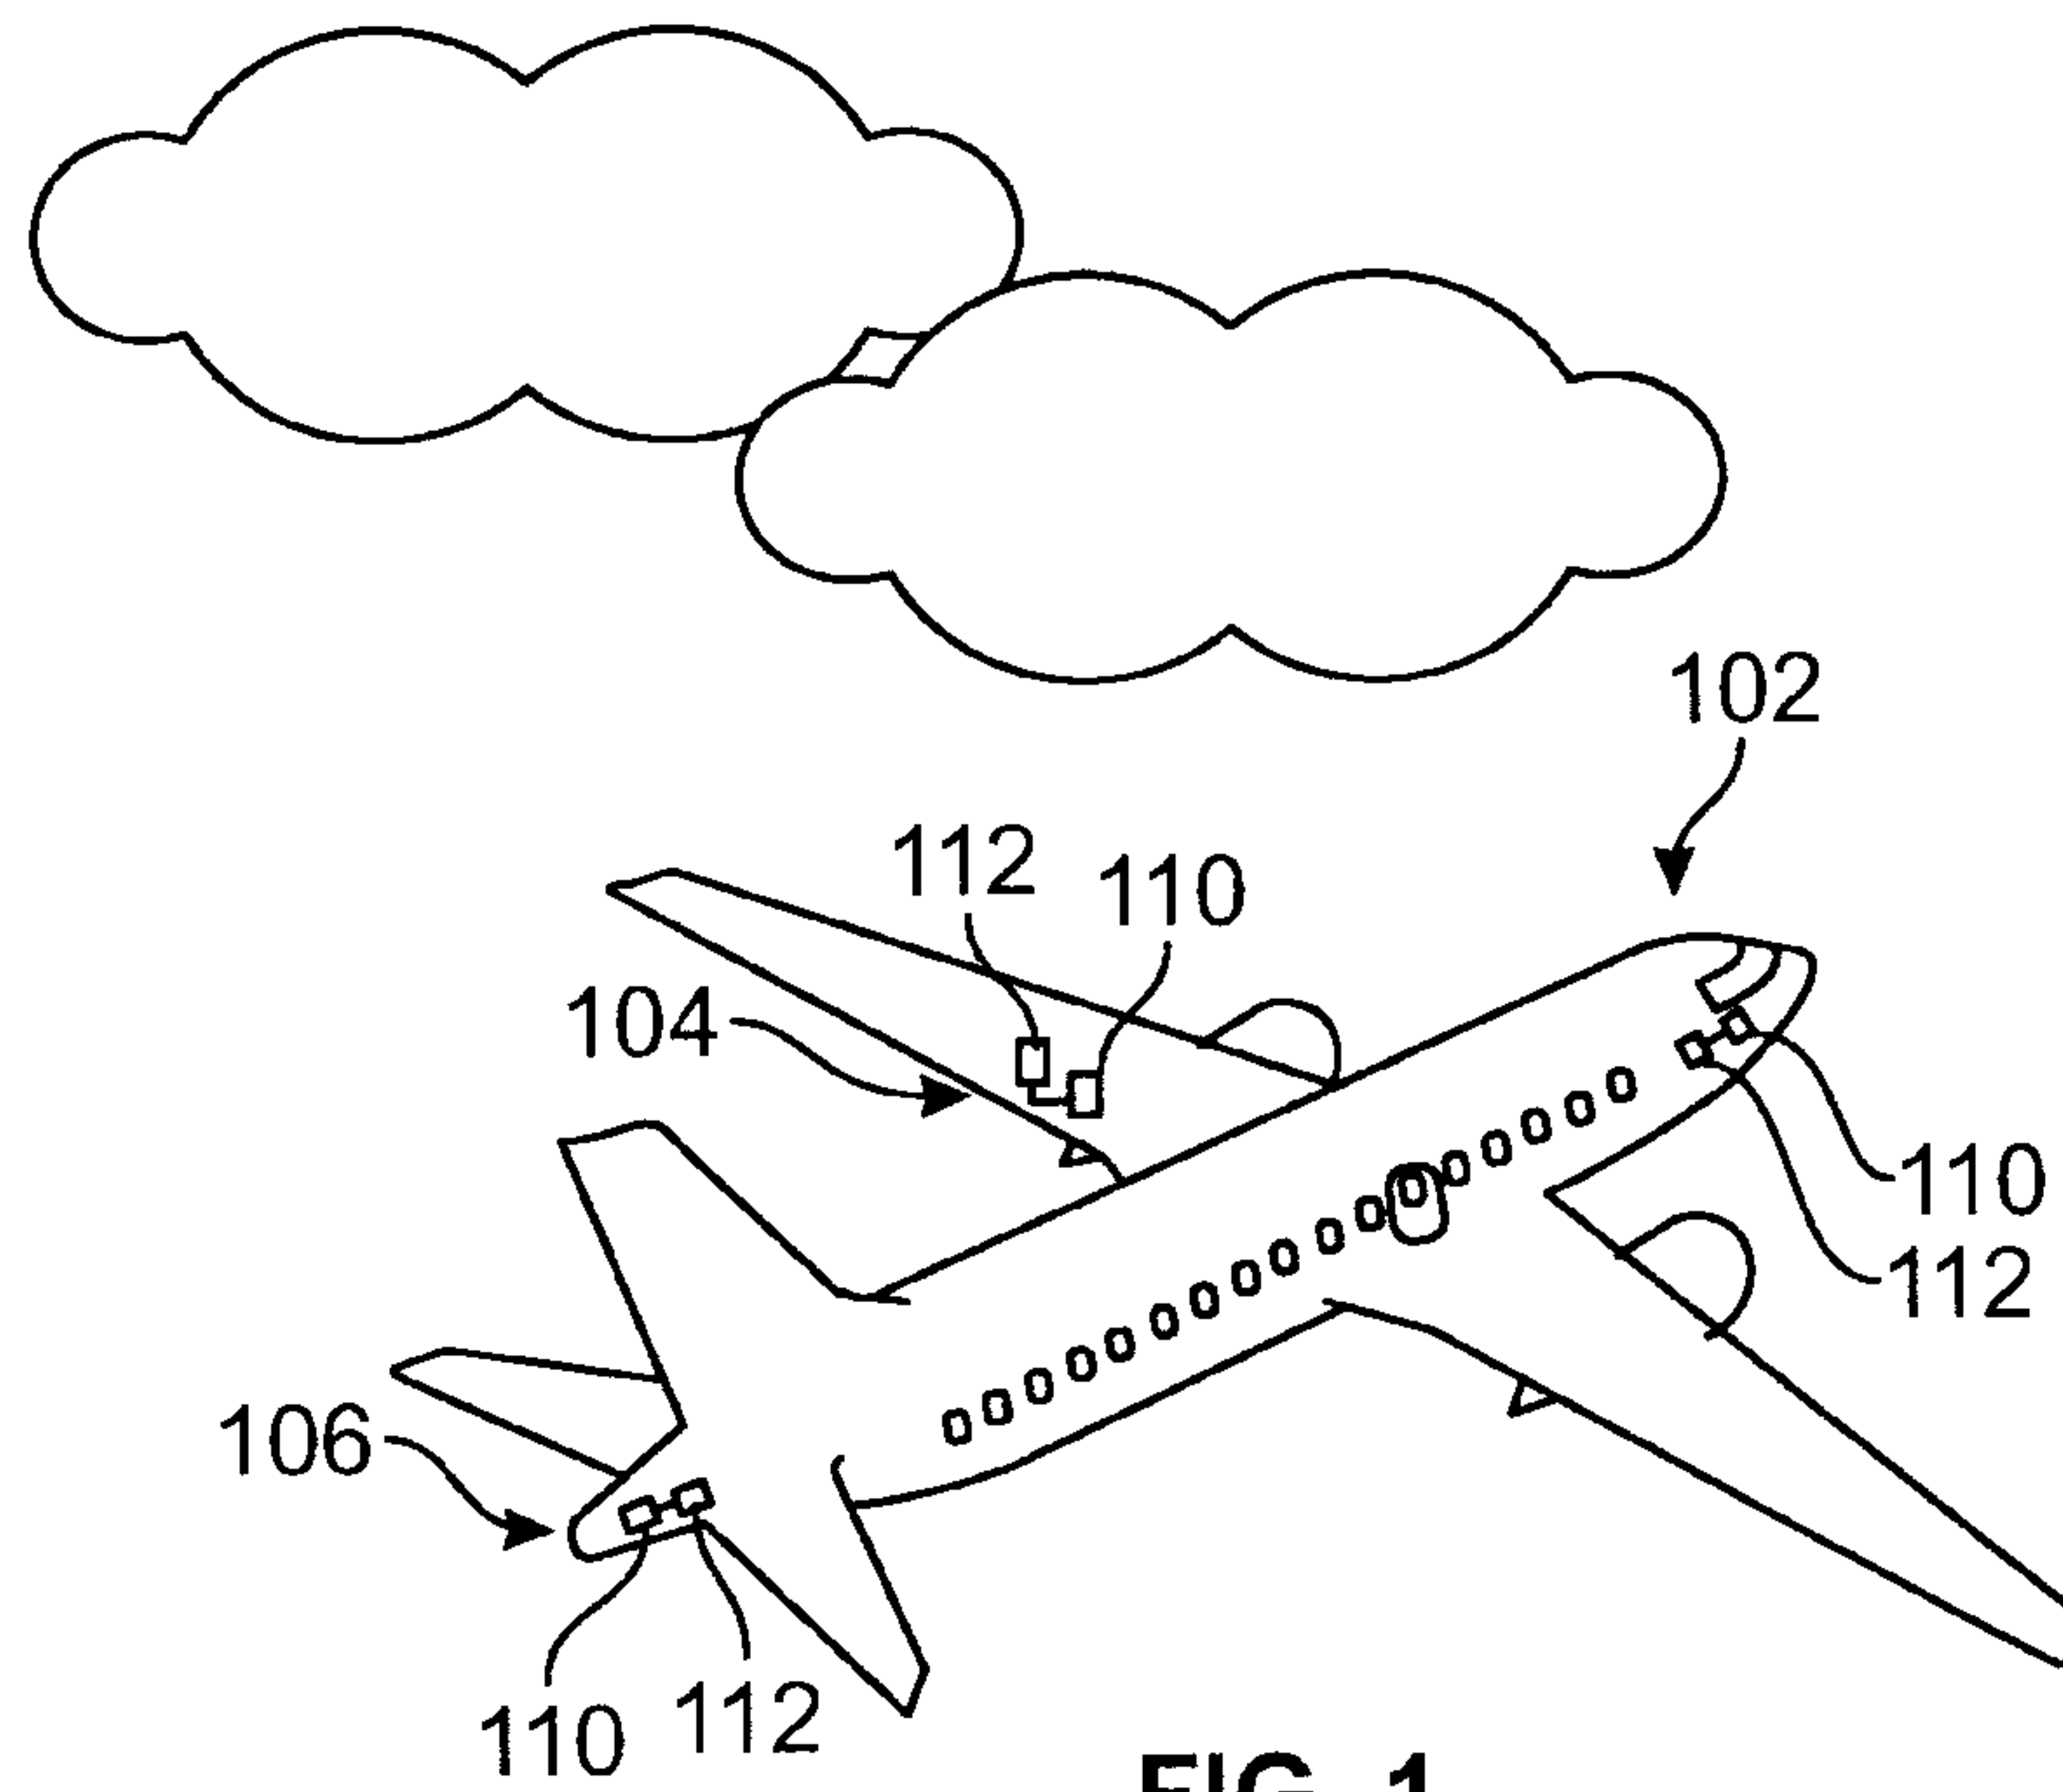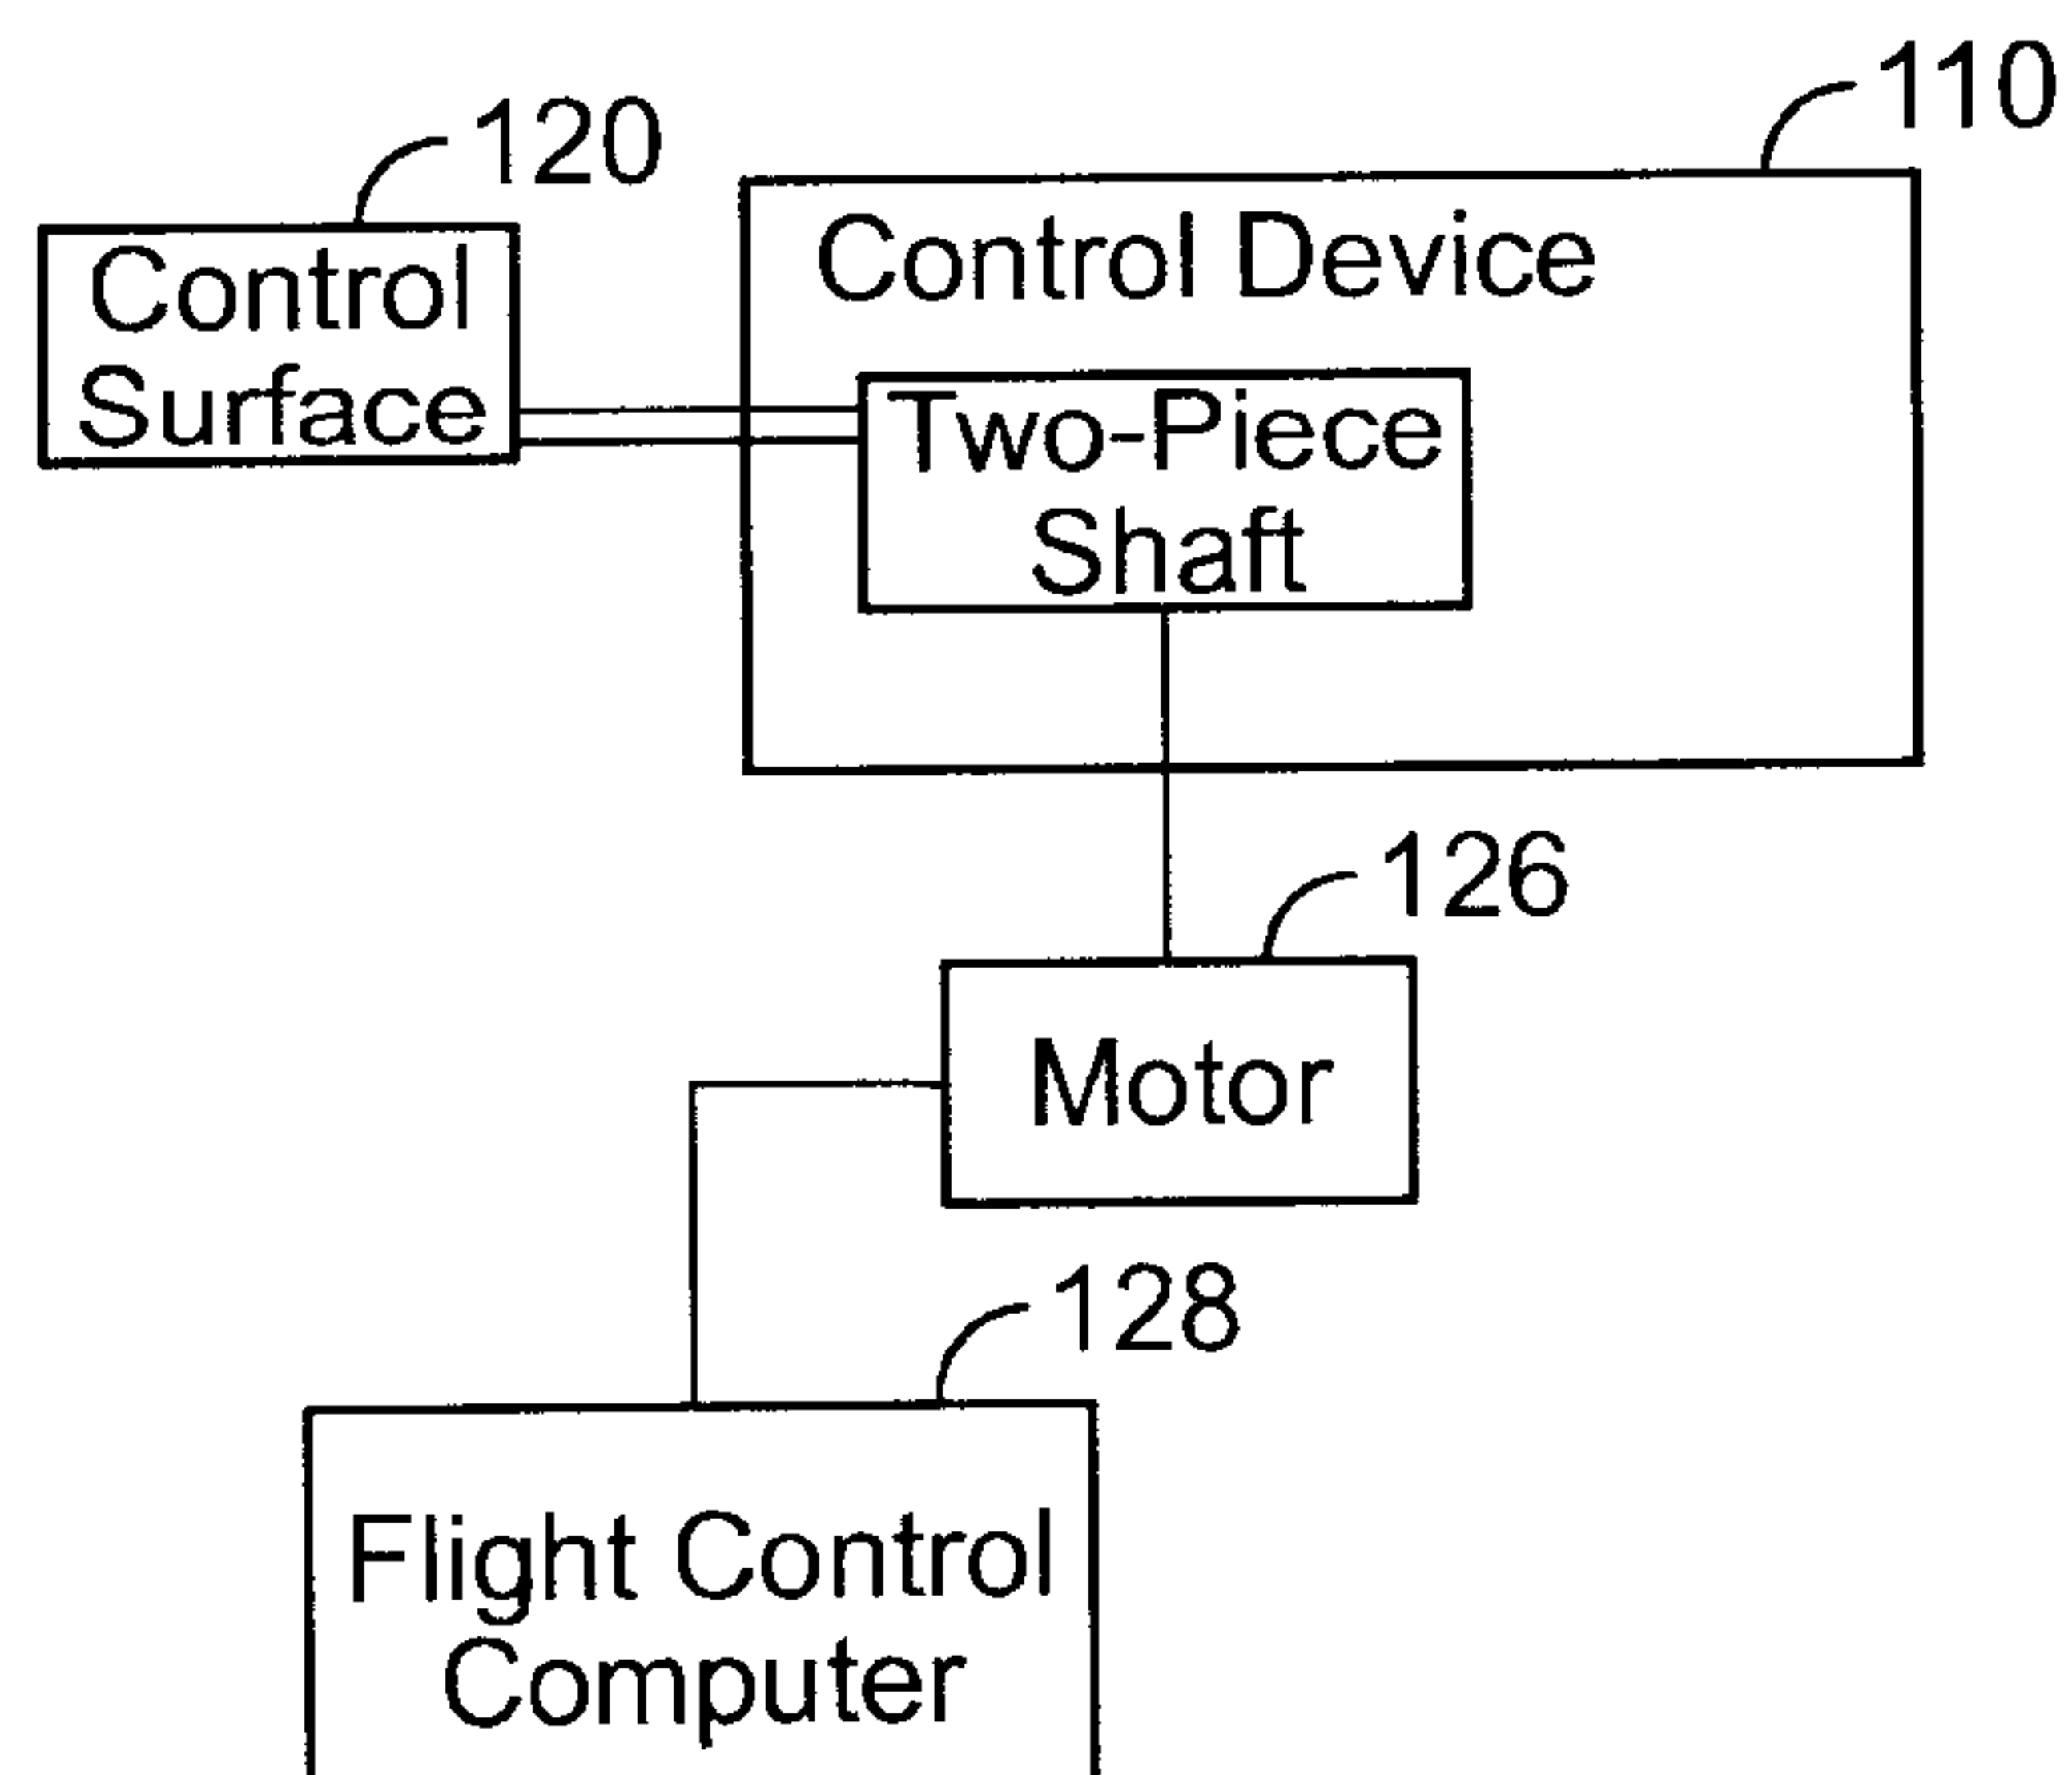**FIG. 1****FIG. 2**

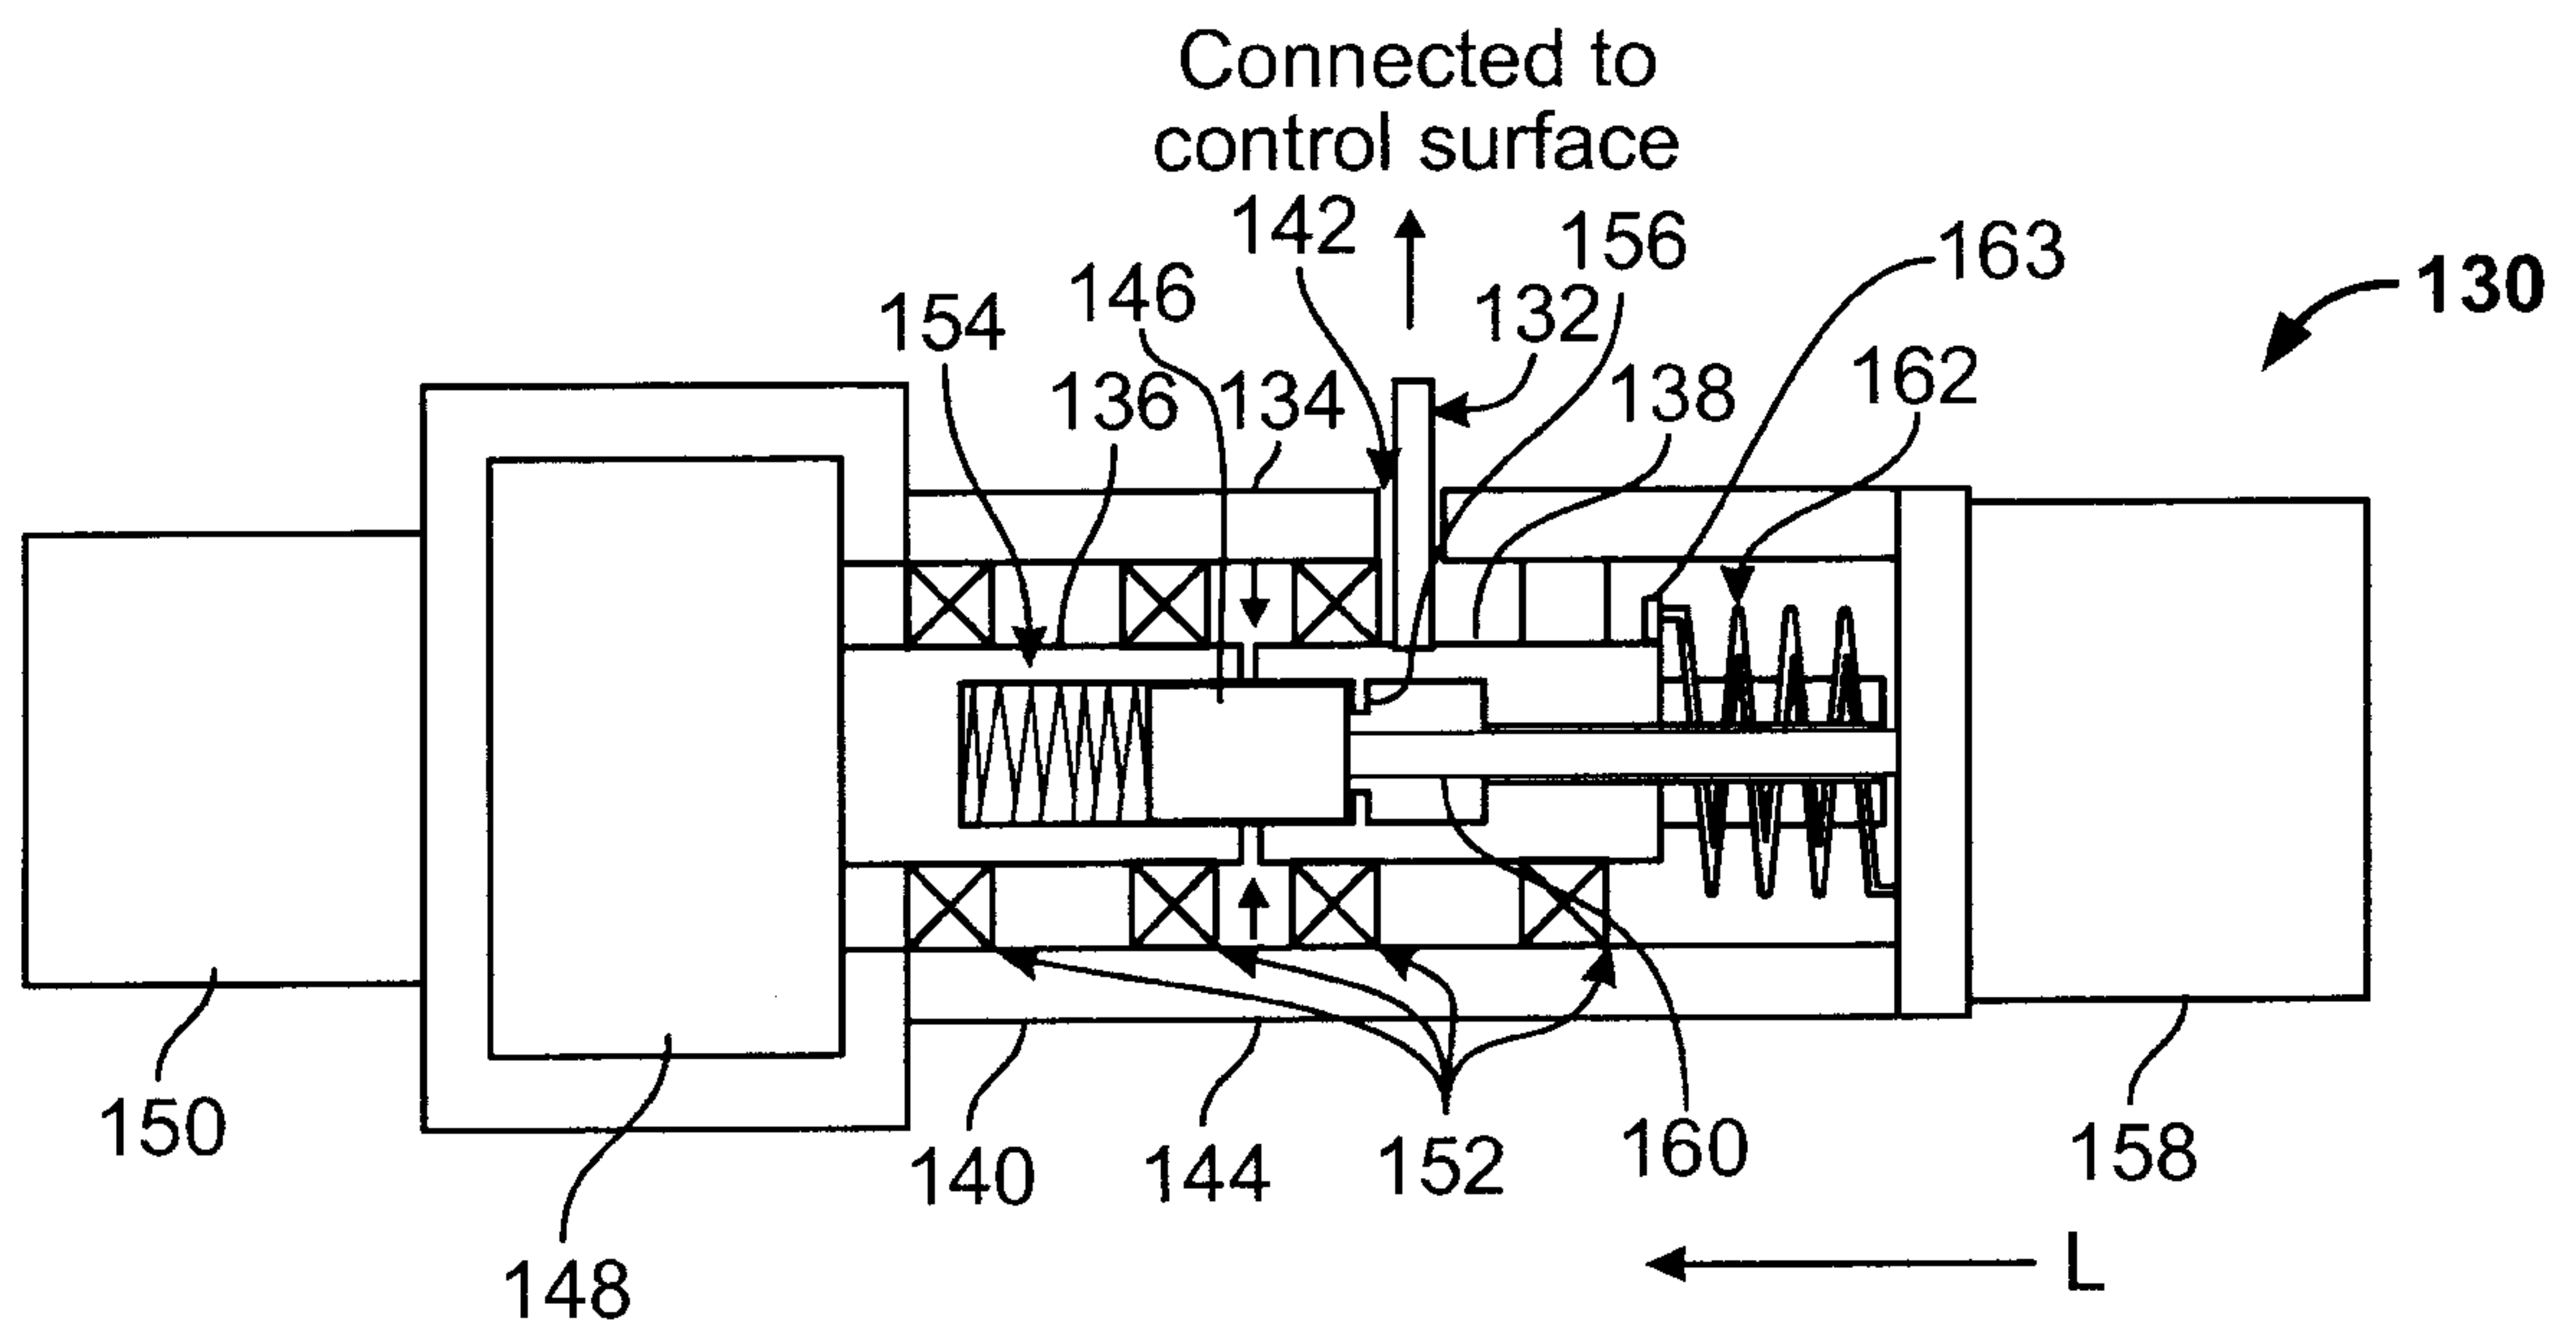


FIG. 3



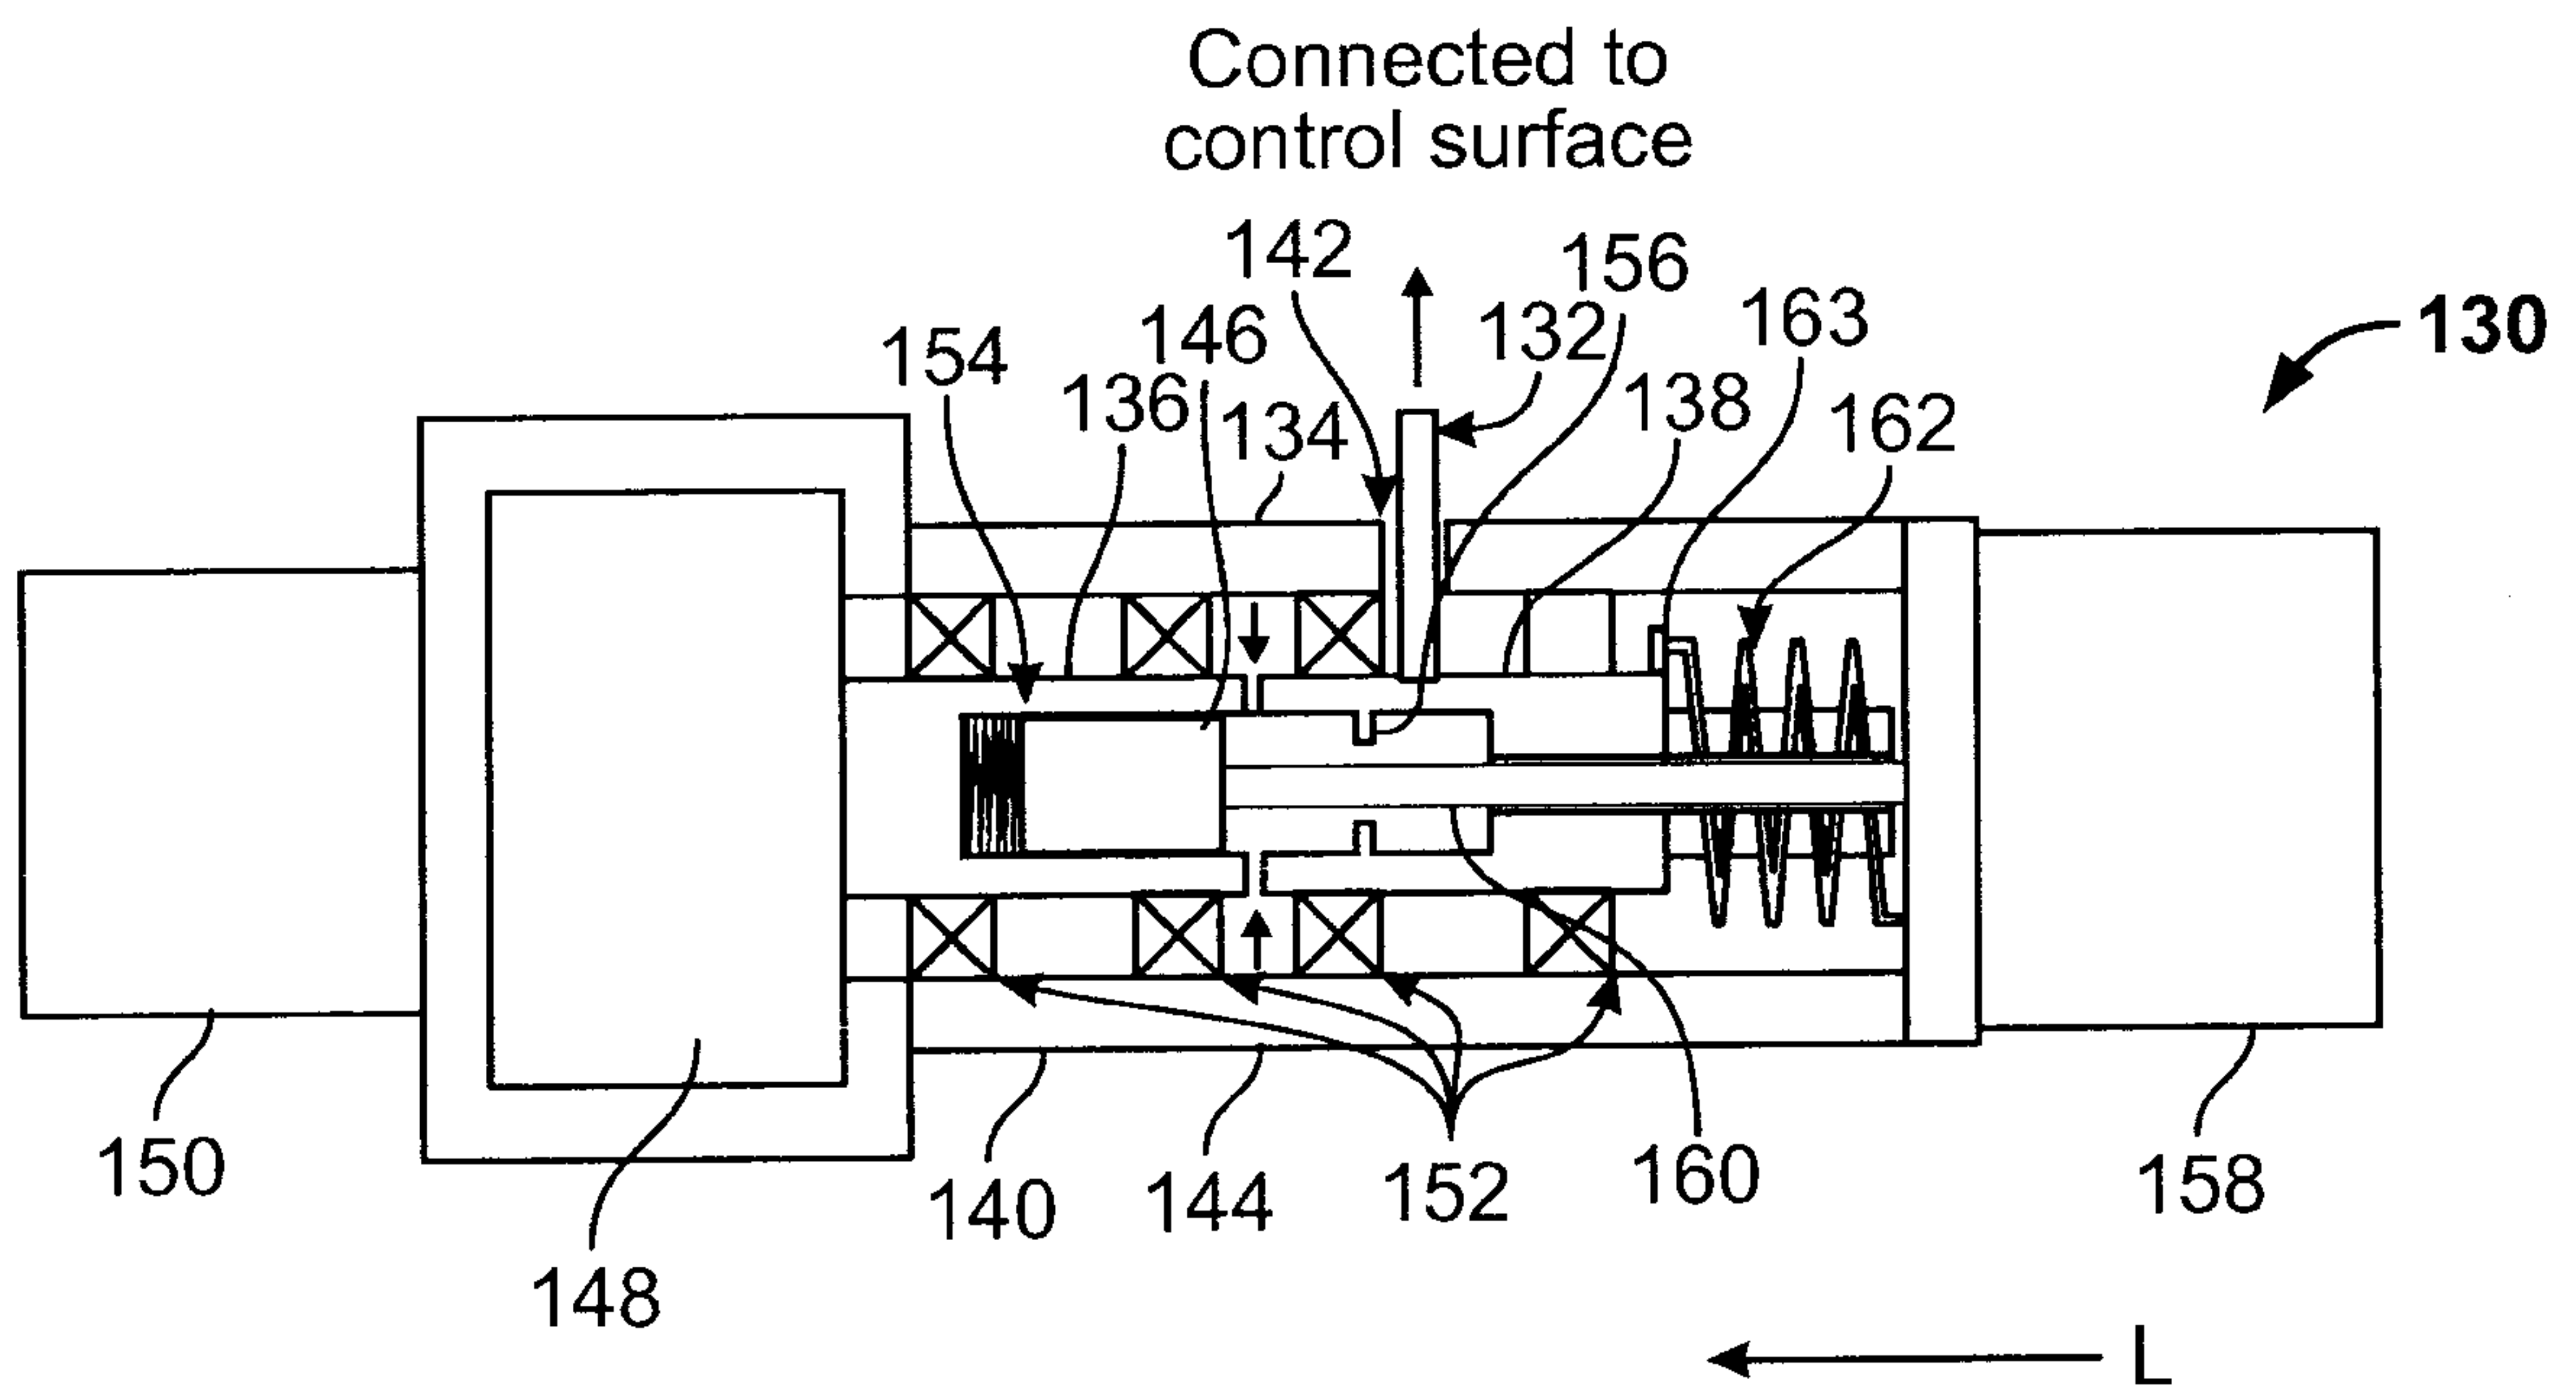


FIG. 4

**FIG. 5**

**FIG.6**

Connected to
control surface

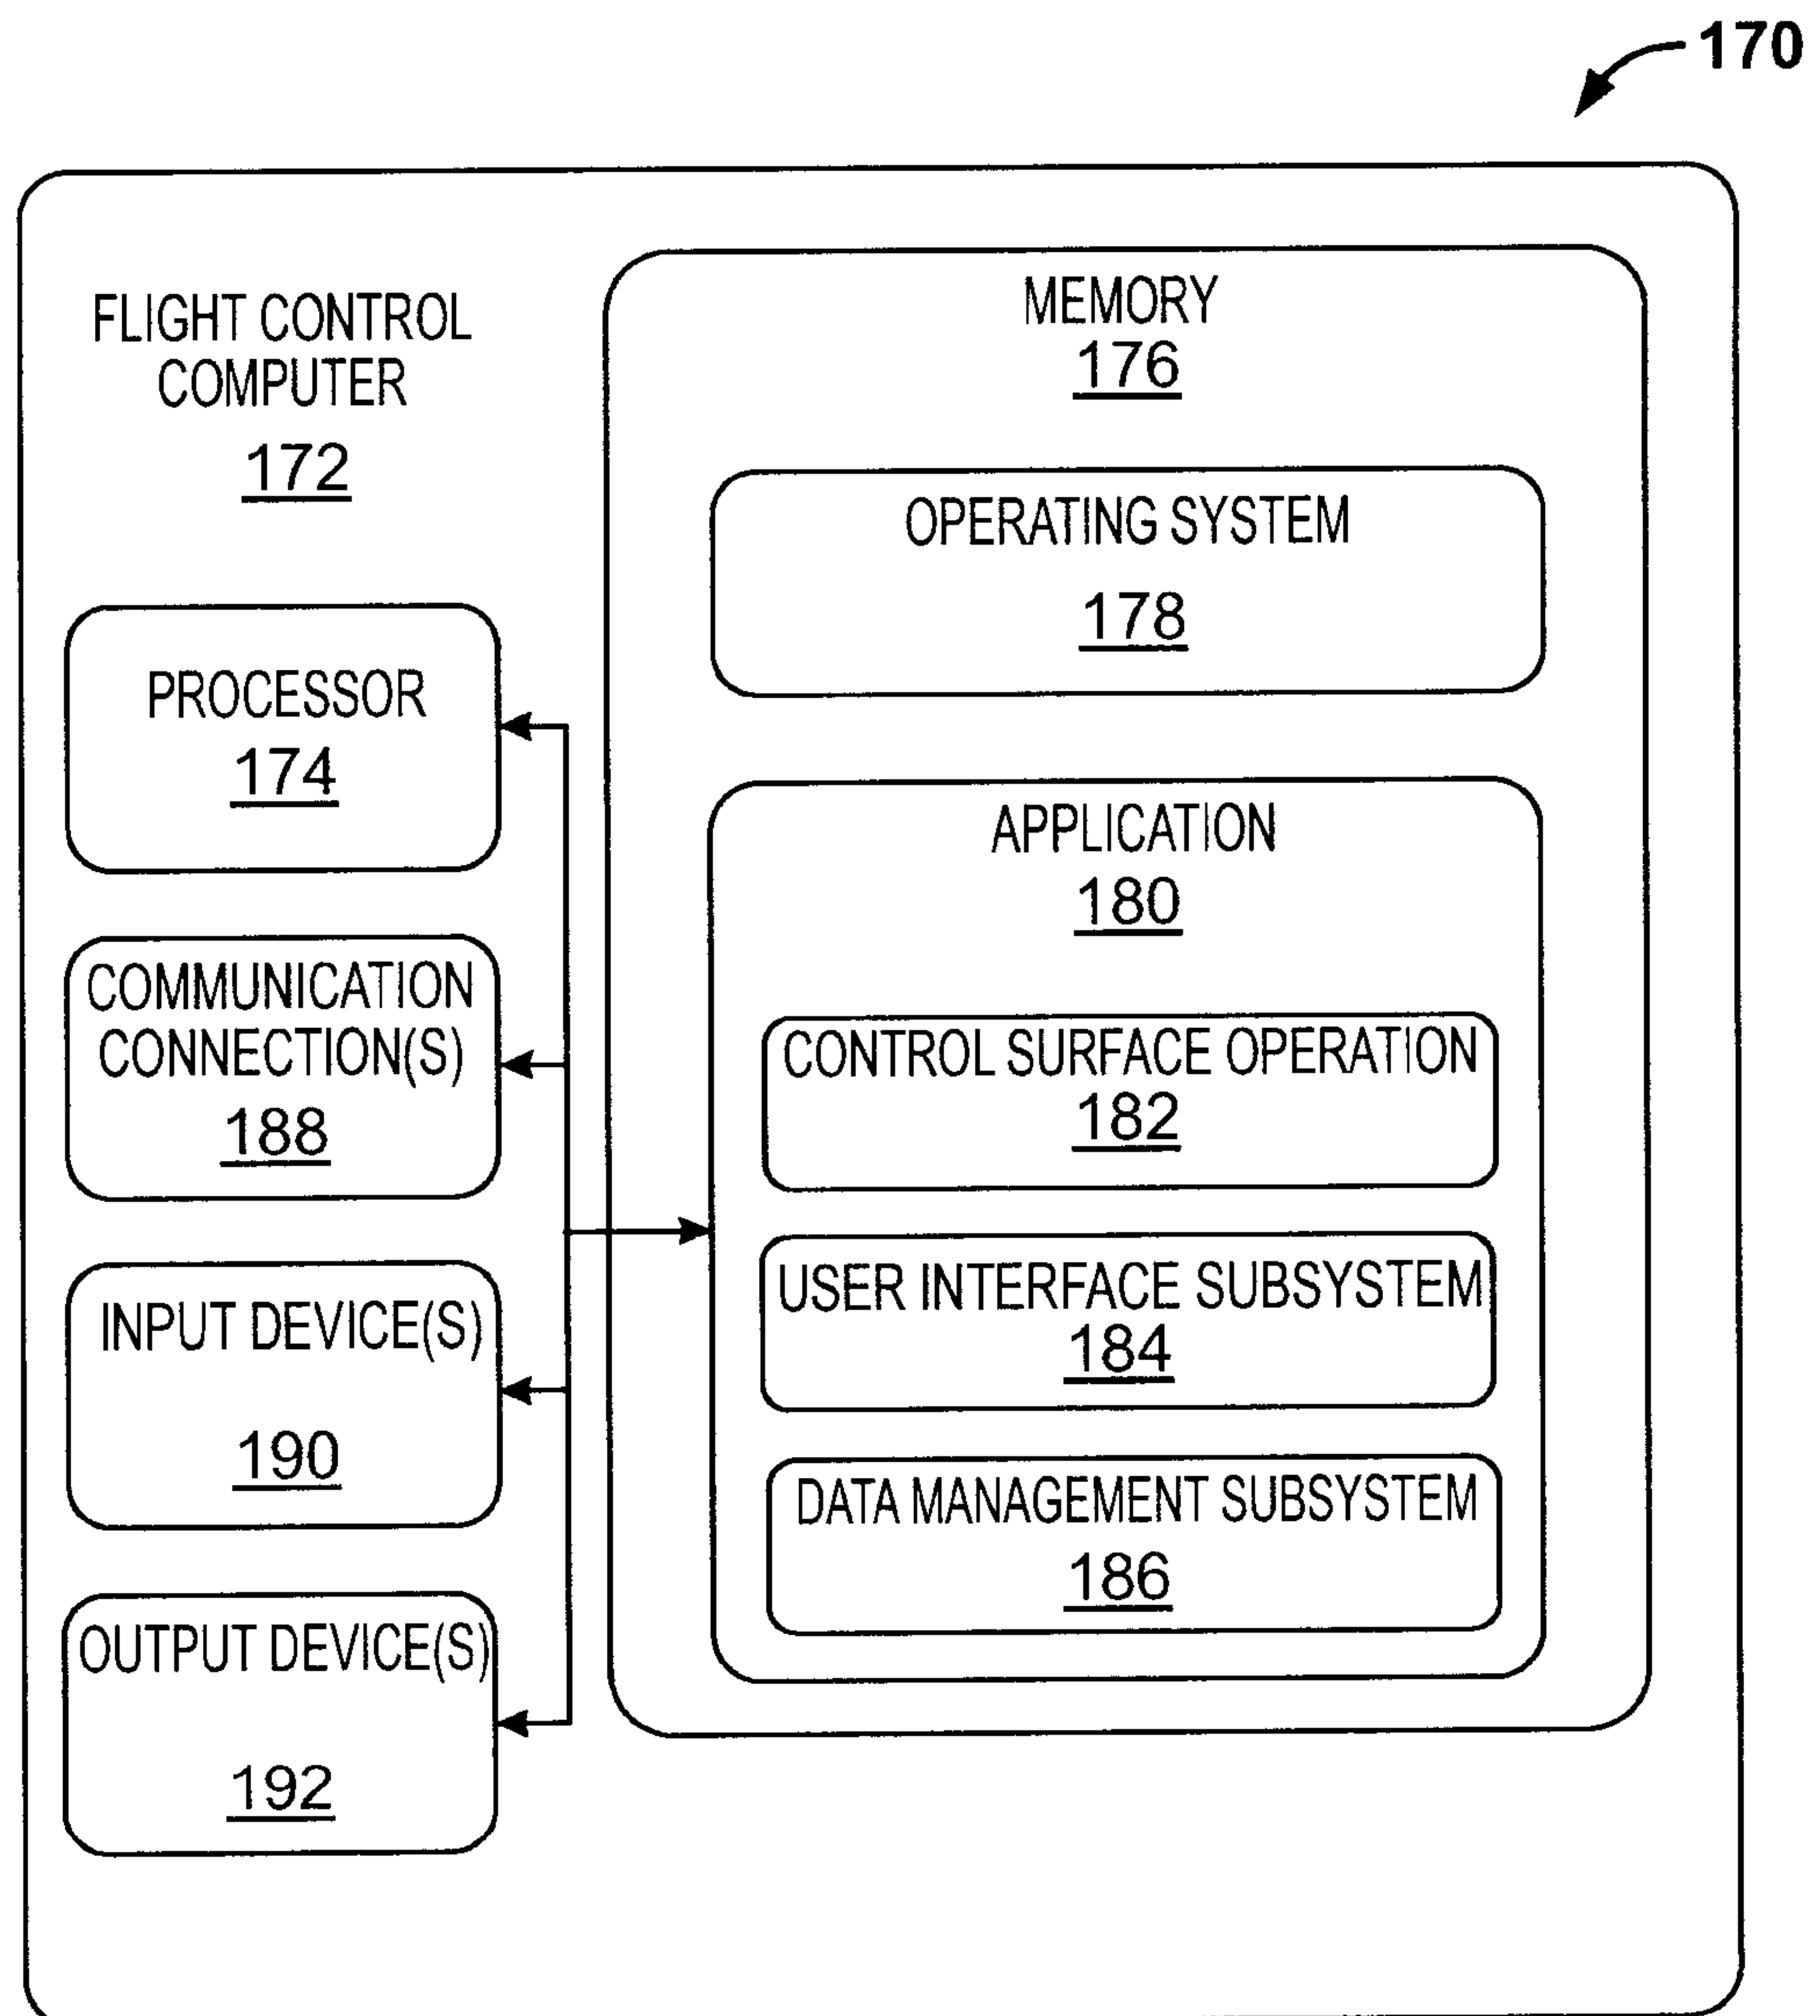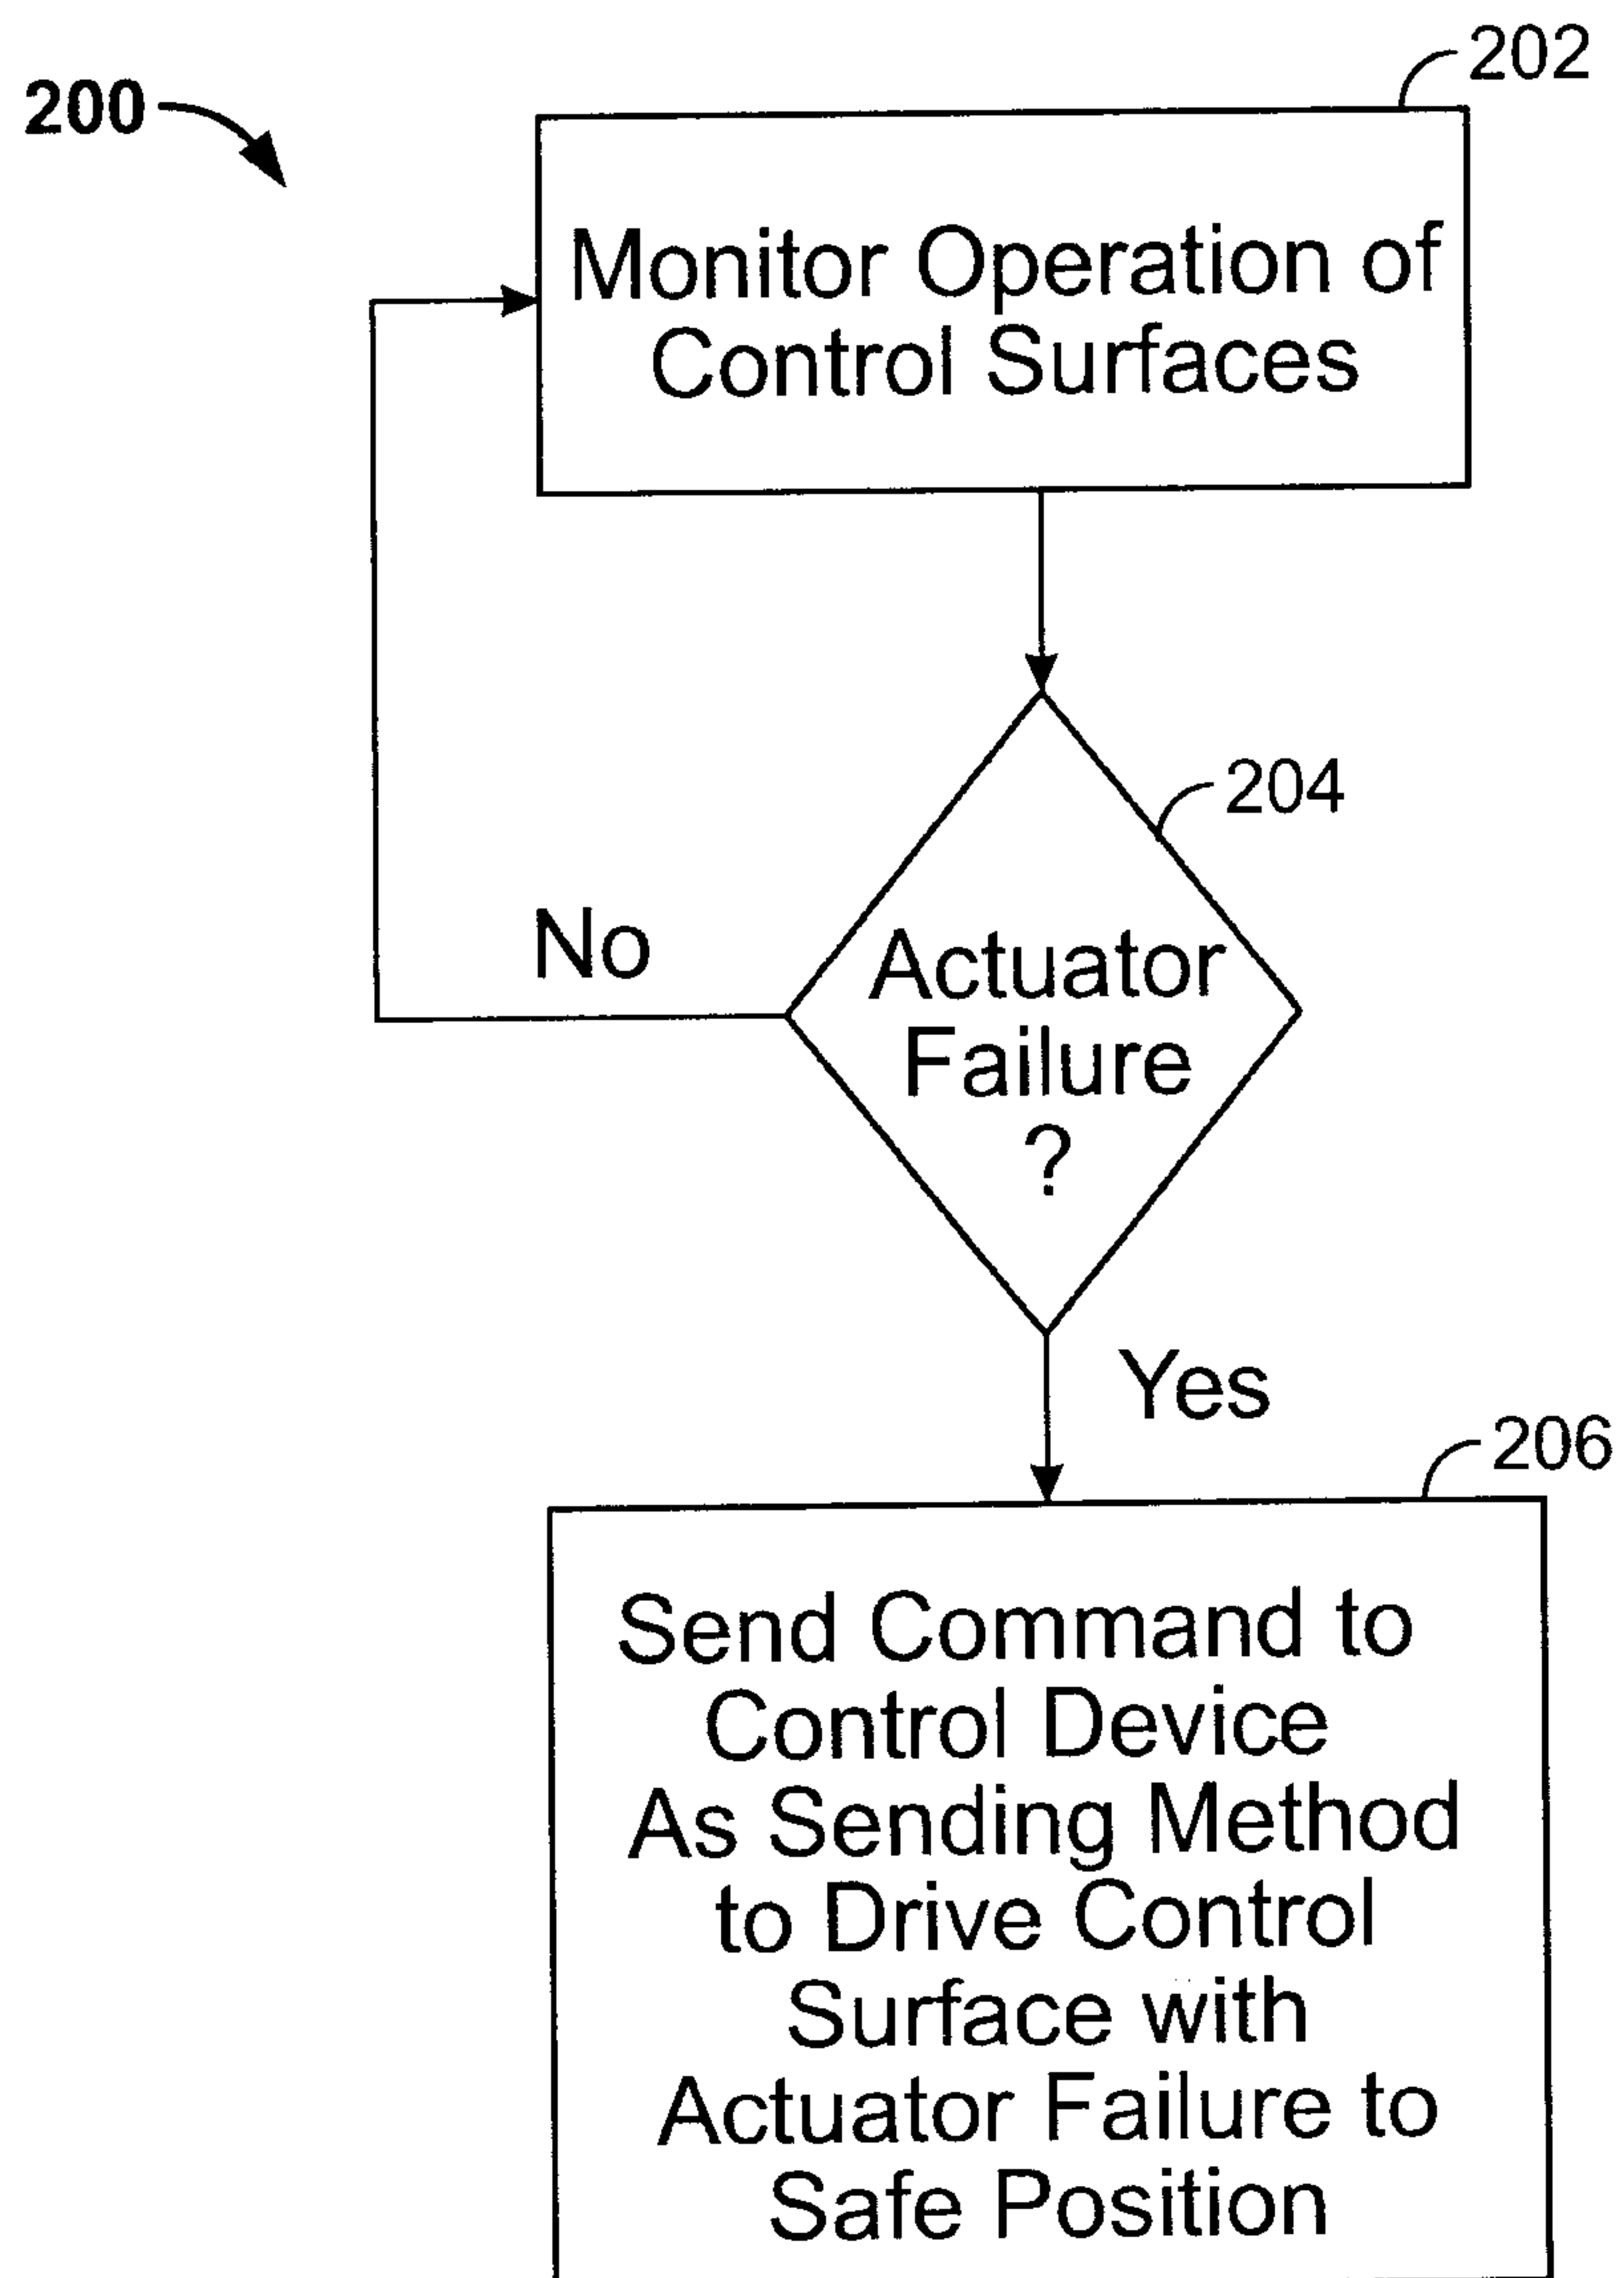