

(19)



(11)

EP 4 390 005 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

26.06.2024 Bulletin 2024/26

(51) International Patent Classification (IPC):

E04D 9/00 (2006.01)**E04D 13/16 (2006.01)**(21) Application number: **23218389.7**

(52) Cooperative Patent Classification (CPC):

E04D 9/00; E04D 13/16(22) Date of filing: **20.12.2023**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL
NO PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA

Designated Validation States:

KH MA MD TN(71) Applicant: **Bouwknegt, Arnoud****7948 LE Nijveen (NL)**(72) Inventor: **Bouwknegt, Arnoud****7948 LE Nijveen (NL)**(74) Representative: **Janssen, Paulus J. P.****Kallenkoterallee 82 A****8331 AJ Steenwijk (NL)**(30) Priority: **21.12.2022 NL 2033772**

(54) **A METHOD FOR COVERING A ROOF WITH REED, A PANEL SUITABLE TO BE USED IN SUCH A METHOD, AND A BUILDING, THE ROOF OF WHICH IS THATCHED USING THIS METHOD**

(57) The invention relates to a method for covering a pitched roof with reed, wherein the roof comprises an open roof truss, the method comprising closing the roof truss with one or more rigid panels comprising a top side that is facing the exterior of the roof, and a bottom side that is facing the interior of the roof, covering the one or more rigid panels with a reed packet, wherein the reed packet is placed on the top side of the panels, and fixing

the reed packet to the panels, wherein the vapour diffusion resistance of the one or more panels is at most 15 units higher than the vapour diffusion resistance of the reed packet. The invention also relates to a panel that is suitable to be used in such a method, as well as to a building of which the roof is thatched using such a method.

Fig. 2

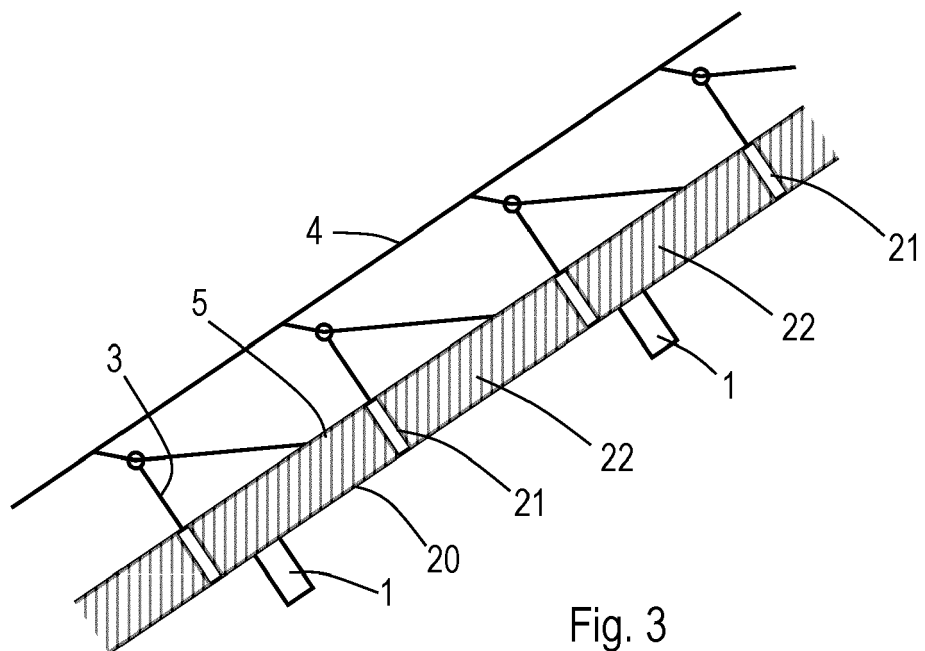


Fig. 3

EP 4 390 005 A1

Description

Technical field

[0001] The invention relates to a method for covering a pitched roof with reed, wherein the roof comprises an open roof truss, wherein the roof is covered with a reed packet. The invention also relates to a panel that is suitable to be used in such a method, and to a building of which the roof is thatched using such a method.

State-of-the-art

[0002] Archaeological research has shown that during the Mesolithic roofs were thatched. We are talking here about the period from 8000 BC to 3000 BC. However, the Romans were also aware of this method for building roofs, the myth of Romulus being proof of this. An iconic historical example can be found in the Viking era during which their longhouses were covered with thatched roofs. Nevertheless, in other regions of Europe the traditional thatched roof was also used frequently. This kind of roof could be found on royal castles as well as on the houses of the poor.

[0003] The original thatched roof is vapour permeable, which means that water vapour can diffuse from the exterior to the interior, without (strongly) condensing locally. Such a roof, largely and roughly, is being used up till the present day as the traditional thatched roof. However, because of the existing insulation norms, an open roof truss is now first closed by means of panels, after which the reed packet is fixed onto these panels, a practice that has been applied since the 50s of the previous century. In order to avoid water vapour condensing on the top side of these panels, a gap is usually maintained between the reed packet and the panels, in such a way that possible condensation water evaporates under the influence of a naturally occurring draft. By doing this, possible deterioration of the reed or of the panels can be avoided.

[0004] However, more recent fire safety requirements don't allow the use of an air gap between the reed packet and the panels, because of the thus created chimney effect. A possible solution is the use of artificial reed, a type of "reed" that doesn't rot when exposed to condensation water. Putting aside aesthetic arguments, not all councils allow the use of artificial reed. In these cases the real reed is placed directly on the top side of the panels, without an air gap, which means that one has to accept the accelerated rotting process of the reed packet. The normal life expectancy of the reed can thereby be reduced to 10 years instead of the normal 30 to 50 years.

Object of the invention

[0005] The aim of the invention is to provide a method that allows the creation of a perfectly insulated roof on a roof truss, covered or thatched with reed, a roof that is durable and complies with the current fire safety require-

ments.

Summary of the invention

[0006] In order to realise the aforementioned aim, a method for covering a pitched roof has been developed, suitable for covering a roof that has an open roof truss (open in the sense that the roof truss is such that wind/air can pass freely through the roof truss), wherein the method comprises closing the roof truss with one or more rigid panels (in such a way that the wind/air can no longer pass freely through the roof from the exterior to the interior and vice versa), wherein the one or more rigid panels have a top side that is facing the exterior of the roof, as well as a bottom side facing the interior of the roof, covering the one or more rigid panels with a reed packet, wherein the reed packet is placed on the top side of the panels (meaning directly on the top side of the panels, i.e. without a gap or any other kind of air layer, in such a way that the reed packet rests on the top side of the panels), and fixing the reed packet onto the panels, wherein the vapour diffusion resistance of the one or more panels is at most 15 units higher than the vapour diffusion resistance of the reed packet.

[0007] The applicant has found that the problem of condensation on a panel occurs to a minor degree or not at all when the vapour diffusion resistance of the one or more panels is at most 15 units higher than the vapour diffusion resistance of the reed packet. The latter is usually more or less 3, measured with the so-called dry-cup method at room temperature. It has been found that, when the vapour diffusion resistance of the panel on which the reed is foreseen is more than 15 units higher than the vapour diffusion resistance of the reed packet itself, condensation can easily occur on the top side of the panel. When the value is lower, the panel can absorb the vapour relatively easily, after which the vapour can diffuse further, with only a minor risk of condensation.

[0008] It should be noted that so-called vapour permeable panels are commercially available, for example so-called OSB panels or ESB plates (available via ELKA, Morbach, Germany), but they all have a vapour diffusion resistance of at least 40, which implies that these panels and plates are less suitable for use in the present method (i.e. a method in which a reed packet is directly fixed onto this kind of panel).

[0009] The invention also relates to a rigid panel that is suitable for use in the method described here, and it is essential that the vapour diffusion resistance (μ) of the panel is at most 20, assuming that the vapour diffusion resistance of a reed packet is at most 5 (in the case of a very thick reed packet with a high density).

[0010] The invention also relates to a building with a pitched roof, whereby the roof comprises an open roof truss and is covered with reed using a method according to the invention.

Definitions

[0011] The term "reed" refers to any type of grass with a rigid stem, suitable to be used for thatching a roof, more specifically the species *Phragmites australis*, or types of grass that can be turned into straw (dry floral stalks of cereals, such as wheat).

[0012] A *pitched* roof is a roof with a tilt angle with respect to a horizontal line of at least 30°, and more preferably at least 35°, 40°, 41°, 42°, 43°, 44°, 45°, or more.

[0013] A *roof truss* is an open support structure consisting of beams and possibly of connecting elements, serving to support the roof covering, such as tiles, bitumen, slate, or reed.

[0014] A *rigid* object is an object that is undeformable under the influence of the forces to which the corresponding object is usually exposed, i.e. in the circumstances for which the object is meant.

[0015] A *panel* is a dimensionally stable, self-supporting, and substantially two-dimensional object, i.e. an object with a length and a width that are at least 5 times larger than the thickness (i.e. the dimension of the object along the smallest dimension) of the object, more preferably at least 6, 7, 8, 9, 10, or more, whereby the object typically has a rectangular form, without the latter being absolutely necessary, and whereby the object, together with other similar objects, can form a plane to close a larger opening that needs to be covered. A panel is intrinsically dimensionally stable, but can bend marginally under sufficiently large forces.

[0016] A panel is considered to be *smooth* when the Ra value (the arithmetic mean of the peaks and valleys of the surface, including the deviation from the average line) is smaller than 2 µm, better smaller than 1.5 µm, even better smaller than 1.0, 0.9, 0.8, 0.7, 0.6, or even smaller than 0.5 µm.

[0017] The *vapour diffusion resistance* or μ value (a dimensionless unit) indicates the degree to which a material is permeable to water vapour. In other words this means that this number indicates how many more times a material resists diffusion, compared to an immobile layer of air with the same thickness. The vapour diffusion resistance (also called *water vapour resistance factor*) can be measured according to the European norm EN ISO 12572:2016. In the light of this patent application, the vapour diffusion resistance is preferably measured at room temperature and in dry conditions (also called the "dry-cup method").

Additional embodiments of the invention

[0018] In a first additional embodiment of the method according to the invention, the vapour diffusion resistance of the one or more panels is at most 14 units higher than the vapour diffusion resistance of the reed packet, preferably at most 13, 12, 11, or 10 units. It has been established that with reduced vapour diffusion resistance also the risk of condensation at the top side of the panel

is also further reduced.

[0019] In a next additional embodiment the one or more panels each contain an open skeleton, rigidifying the panel, for example a skeleton of slats, as used in Unidek® insulation panels (Unidek, Gemert), or other materials or objects that can suitably be used for producing an open skeleton, as well as openings in a skeleton that extend from the bottom side of the panel to the top side of the panel, whereby the openings are filled with a vapour permeable material which gives the aforementioned vapour diffusion resistance to the panel. The source and type of the vapour permeable material is not important, as long as the vapour diffusion resistance of the panel is according to the invention. An advantage of this embodiment is that the properties for the rigidity and the vapour permeability do not have to be present in the same material, which gives an additional degree of freedom to the design of the panel.

[0020] In a next embodiment the vapour diffusion resistance of the one or more panels is however realised by using an organic, vapour permeable material. An organic material offers the advantage that it dries more easily after having been wet, which implies that the vapour diffusion resistance will, also after having had a temporary elevated value (for example due to leakages or due to extraordinary amounts of rain), return quickly to the desired level. Preferably the material is selected from the group comprising wool, cotton, wood fibre, flax, hemp, linen, and jute. More preferably the organic, vapour permeable material is not mixed with an inorganic, vapour permeable material (for example glass fibre).

[0021] In yet another embodiment the top side of the one or more panels is smooth.

[0022] In yet another embodiment of the method according to the invention a subsequent panel is fixed onto the bottom side of the one or more panels, whereby the subsequent panel has a vapour diffusion resistance that is at most 15 units, preferably at most 14, 13, 12, 11, or 10 units higher than the vapour diffusion resistance of the panel above. By using a subsequent panel it is for example possible to make sure that the complete assembly complies better or completely with certain insulation or other requirements. By making sure that also the transition from the first panel to the lower lying panel complies with the requirements of the invention, the risk of condensation will also be small or nonexistent at the next transition. This way, a multitude of panels can be fixed against the bottom side of the packet.

[0023] It has to be mentioned that each of the above embodiments can give way to corresponding embodiments of a panel according to the invention and of a building according to the invention. More specifically one can mention the following additional embodiments of the panel according to the invention:

A rigid panel with a vapour diffusion resistance (μ) of at most 19, 18, 17, 16, 15, 14, or 13, in accordance with a typical vapour diffusion resistance of 3 for a standard reed packet.

[0024] A rigid panel comprising an open skeleton which rigidifies the panel, as well as one or more openings in the skeleton that extend from a bottom side of the panel to a top side of the panel, whereby one or more openings are filled with a vapour permeable material, thereby giving the panel the aforementioned vapour diffusion resistance.

[0025] A rigid panel in which the vapour permeable material is an organic, vapour permeable material, preferably selected from the group consisting of wool, cotton, wood fibre, flax, hemp, linen, and jute.

[0026] A rigid panel in which the organic, vapour permeable material is not mixed with an inorganic, vapour permeable material.

[0027] A rigid panel, the top side of which is smooth.

[0028] The invention will now be described in further detail, referring to the following explicit examples.

Examples

[0029]

Figure 1 shows a schematic cross-sectional view of a thatched roof according to the state of the art.

Figure 2 shows a top view of a panel according to the invention.

Figure 3 shows a schematic cross-sectional view of a thatched roof according to the invention.

[0030] The Example describes the various thatched roofs and variants according to the state of the art and according to the invention.

Figure 1

[0031] Figure 1 shows a schematic cross-sectional view of a thatched roof according to the state of the art. Visible are a number of transoms 1, part of a roof truss that, as an assembly, will not be discussed further. On top of these transoms are placed side-by-side and without leaving any gaps a number of OSB panels 2, thereby closing the roof truss. On top of these plates nails 3 are mounted with which the reed packet 4 will be attached. The reed packet rests directly on the panels 2, in order to comply with the present-day fire safety requirements. As the OSB panels have a vapour diffusion resistance μ of more or less 40, there is a high risk of condensation at the plane 5 in which the reed packet rests on top of the panels 2.

Figure 2

[0032] Figure 2 shows a top view of a panel 20 according to the invention. This panel consists of an open skeleton 21 which in turn consists of slats. This construction gives rise to a rigid panel with openings. The openings

in this panel are filled with a wool packet 22, in such a way that the vapour diffusion resistance μ of the panel at the openings/wool packet is 12.

Figure 3

[0033] Figure 3 shows a schematic cross-sectional view of a thatched roof according to the invention. A transom 1 and a panel 20 of the roof can be seen. The cross connections of the skeleton of the panel are visible, as are the wool packets 22. On each of the cross slats a spike 3 is foreseen for fixing a reed packet 4 that directly rests on top of the panel 20. As the panels have a vapour diffusion resistance of approximately 12, even under humid circumstances in the exterior of the roof, there hardly is any risk or no risk at all of the existence of condensation in the plane 5 in which the reed packet 4 rests on top of the panels 20. The humidity can simply be transported through the panel 20 (the wool packets) to the interior side of the roof. On the interior side of the roof humidity can be removed by means of known ventilation systems.

[0034] In another embodiment (not depicted) a 2nd type of panel is screwed against the bottom side of the panels 20 as a form of insulation. These insulation panels comprise a 3-layered structure made up of 3 similar sub-panels, whereby the outer layer has a vapour diffusion resistance of 18, the intermediate layer has a vapour diffusion resistance of 24, and the interior layer has a vapour diffusion resistance of 30. Humidity can thereby easily diffuse through the insulation layer without having a strong tendency toward condensation on one or more of the transition surfaces.

Example

[0035] The invention relates to a structure of an insulating, open to vapour, shell-free, compression-resistant roof panel with an integrated skeleton that is resistant to compressive and tensile forces for the thatched screwed roof. The panel is designed as a prefabricated version for newly built buildings, is self-supporting, and needs to be mechanically processed. In a version for renovation purposes in existing buildings they have to be manually processed. It is possible that in the future this panel will be part of a process for building fully factory-developed houses.

[0036] The term thatched screwed roof refers to a thatched roof that is directly screwed onto a closed supporting construction. The screwed roof was originally a nailed roof. It is possible that in the future other fixing materials will replace the screws used in such a process. The invention relates to a panel for a thatched roof. The thatched roof is fixed directly, i.e. without an intermediate gap, onto a closed supporting structure, i.e. the panel. The reason for this is the necessity for sufficient insulation and fire safety. This does not depend on the way this is executed. It is also possible to take into consideration placing another type of organic roof covering material on

the panel instead of the reeds. Such other material can for example be straw, as has generally been used in the past as a material for covering roofs. The present panel can also be used in this situation.

[0037] The invention relates to a renovation panel and to a prefabricated roof panel for the thatched screwed roof, allowing, by making use of certain types and forms of organic building materials with subsequent vapour diffusion characteristics, vapour transport through the complete construction. This is dependent on the vapour pressure, from the inside to the outside, and from the outside to the inside. This will significantly reduce the formation and presence of algae, fungi, and moss in and on the roof construction and on the thatched screwed roof. It will also not damage, or will at least damage to a much lesser extent, the construction and the roof covering material.

[0038] The invention differs from existing systems by assuming the thatched roof as the starting point for the construction, without making compromises when it comes to requirements for the technical quality of the construction, for the living comfort, and for the fire safety. The invention relates to a combination of centuries-old and modern techniques for the thatched roof, whereby for the design the quality of the reed and its durable character were prime factors for determining the final version of the roof panel.

[0039] The invention relates to a roof panel for a thatched screwed roof according to a vapour permeable building principal. This is a way of building that implies the use of materials with humidity-regulating properties. By using a vapour permeable construction, an interior climate is created with a natural humidity regulation. Building in a vapour permeable way leads to living comfort and living quality, as the climate inside the building envelope is optimal. Humidity present can be evacuated from the construction in a natural way, just as it can enter the same construction.

[0040] Water transport (water vapour transport) through the construction is met with a certain resistance that depends on the material and on the thickness of that material.

[0041] The original thatched roof is vapour permeable. This type of roof continues to be used until today, substantially and in large parts in the same form, applied as the traditional thatched roof. Other so-called vapour permeable supporting constructions or structures, panels, and products exist that are commercially available and that are supposed to be suitable for a (screwed) thatched roof. The present invention has been specifically developed for the screwed thatched roof, and thereby presents the only developed vapour permeable supporting construction for the screwed thatched roof that complies with modern technical building requirements, fire safety, and living comfort, at the same time maintaining the quality of the reed material.

[0042] The at this time available prefabricated roof panels that are being used for the traditional thatched

roof of the screwed thatched roof are generally already applied in the normal construction of houses. Such panels can, under certain circumstances, also be suitable for the traditional thatched roof and/or for the screwed thatched roof. Companies and branch organisations generally advise to make an upper structure for a thatched roof as impermeable as possible to vapour, and to position it as closely as possible to the inside of the building. A vapour impermeable layer on the inside prevents humidity from being transported from the inside to the outside. It also avoids problems with condensation in using the construction. Humidity in the building can be kept under control by using ventilation grids and mechanical ventilation systems.

[0043] A traditional thatched roof on a traditionally built building in a traditionally heated and inhabited building requires little maintenance and has a long useful lifetime. One of the disadvantages of a traditionally built building with a traditional thatched roof is it is barely insulated. Another one is that such a roof does not comply with fire safety requirements and therefore may not be built within a radius of 15 m of other buildings. Therefore, most requirements for new buildings in most of the locations where new buildings are erected won't be met.

[0044] The screwed thatched roof on the other hand offers these advantages. The screwed thatched roof has a much better insulation value than the traditionally thatched roof and complies with fire safety requirements. Newly built screwed thatched roofs are therefore not required to maintain a minimum distance of 15 m from other buildings. The screwed thatched roof is nothing more than an updated version of the traditionally thatched roof. On top of that, vapour permeable nailed and screwed roofs are also known to be used on top of modern heated and inhabited buildings that, when it comes to useful lifetime and degree of maintenance, "are doing well" or "have done well". One has to mention that this "doing well" is relative, i.e. in comparison to a traditionally thatched roof on a similar traditionally built and inhabited building.

[0045] As a result of extra insulation, reducing vapour permeability or making buildings completely impermeable to vapour, living and heating differently, new exciting and challenging architecture, different forms of algae and moss control, different types of reed from different parts of the world, and the appearance of the screwed thatched roof, the "problem roof" started to appear. The problem roof is a thatched roof that doesn't at all reach the usual useful lifetime of approximately 30 to 40 years (knowing that also 50 years used to be possible). Certain thatched roofs have completely rotted after 10 years or required or require a lot of maintenance and early renovation to achieve an acceptable useful lifetime.

[0046] Condensation in the thatched roof is a determining factor in this problem. Because of the absence of a vapour barrier against the inside of the building, vapour condenses in the construction, which leads to problems in the thatched roof. To avoid condensation in the reed

material from the inside, most companies and branch organisations advise to use a vapour inhibiting layer as closely as possible to the inside of the building. The use of additional mechanical installations for the control of humidity in the building is also part of the advice. Most people think that condensation problems in the thatched roof are thereby solved.

[0047] Branch organisations and companies also advise to have a closer look at the quality of the reed material itself. The quality of the reed has been examined by Riet ABC (De kwaliteit van riet - ISBN 9789082630206), and the conclusion was reached that a certain number of factors have an effect on the quality of the reed. Reed of a bad quality is reed that has not been treated correctly. It hasn't been mowed correctly for example (too high) or contains too much salt because it was grown on brackish soil in brackish water. Reed of a lesser quality is for example reed that has been processed and placed correctly, but has a relatively low lignin content, thereby reducing the useful lifetime in comparison to reed with a relatively high lignin content. The higher the lignin content, the better the quality. More specifically Chinese, Turkish, and Dutch reed have proven to be of superior quality.

[0048] Generally speaking, when building a screwed thatched roof, the advice is to use high quality reed and to apply a vapour barrier as closely as possible to the inside of the building in order to prevent condensation problems. However, vapour transport not only works from the inside to the outside of a building, but also in the opposite direction. Vapour will always find a way from an environment with a relatively high humidity to an environment with a lower humidity, and the aim of the phenomenon is to equalise the difference in humidity. The process is similar to what happens with temperature differences between warmer and colder areas, and works in 3 dimensions.

[0049] Condensation problems in a thatched roof will not be solved by using a vapour impervious layer on the inside. Under certain circumstances there will be a vapour transport from the environment to the inside of the building. This is similar to the condensation on the outside of double glazing under certain circumstances. On a windowpane with double glazing this is pretty harmless. However, continuous condensation in a thatched roof does pose serious problems. It will create a source for additional problems.

[0050] The quality of the reed used is always important, and hence it also has an important influence on the life expectancy of a thatched roof according to the invention. However, more than before, that is more than in a traditionally thatched roof on a traditionally built building, the quality of the reed used in a screwed thatched roof on a vapour impervious closed supporting construction is very important. After all, a vapour impervious layer or a vapour barrier underneath or close to the reed will place a greater burden or too great a burden on the reed, because of the condensation due to vapour moving from the environment to the inside of the building.

[0051] A reed packet of moderate quality that has to deal more with condensation will not reach the acceptable life expectancy it would have on a traditionally built and thatched roof, and requires more maintenance and earlier repair. A reed packet of mediocre quality cannot be used on a supporting construction with a vapour barrier or with a vapour impervious layer, simply because the reed material is incapable of dealing with the vapour problem.

[0052] The use of reed material of mediocre quality is therefore problematic, and the tendency exists to only use reed material of high quality. A number of different reasons make this undesirable. Firstly, weather conditions make the quality of the reed material inconsistent throughout the years, even when the material is grown on the same plot. Secondly, one becomes too dependent on certain suppliers of the reed material. Thirdly, high quality reed is scarcer and comes from further away. Therefore, the thatched roof becomes less durable because of the increased necessary transport. The last argument is that there are fewer price alternatives for the consumer.

[0053] In practice, the most commonly used panels for existing buildings and for renovation purposes are OS-BIII/IV panels or a waterproof wood fibre panel V313. Such panels have a μ value in dry conditions that varies between 40 ("dry-cup") and 80 ("wet-cup"). The characteristics of these materials are usually vapour or humidity repellent. With such a μ value and with these characteristics it is probable that the behaviour when it comes to vapour will be completely different than that of a wood fibre insulation panel, flax insulation, or insulation consisting of sheep's wool, with vapour diffusion resistance values between 2 and 6. Organic materials also carry a higher mass to transport humidity, dependent on the vapour pressure. Moreover, they usually contain no or at least a lot fewer additives that create a vapour barrier effect.

[0054] It should also be mentioned that in practice there is usually a vapour barrier on top or that the panel onto which the reed material will be screwed. This can be in the form of a plastic foil, sometimes in the form of a certain type of insulation material with a vapour barrier effect. This implies that an additional vapour barrier is being created underneath the thatched roof or directly underneath the panel onto which the reed material is screwed. Humidity diffusing from the outside to the inside because of the vapour pressure will form condensate on this layer. This is also the case with prefabricated (sandwiched) roof panels comprising vapour impervious insulation material and/or a vapour barrier panel material. These have to be manipulated and placed in a vapour impervious way, and will be used to screw the reed material onto the closed construction.

[0055] This is also the case, be it to a lesser extent, with a vapour permeable prefabricated roof panel with a rigid layer. Although the panel is filled with a vapour permeable insulation material, its top side consists of a rigid

layer. An insulated vapour impervious panel with a rigid layer, for example with a humidity resistant wood fibre panel or OSB panel onto which the thatched roof will be screwed, also has a vapour barrier effect, and the humidity will condense more easily.

[0056] How frequently and exactly when condensation will take place on the vapour impervious or vapour barrier layer depends on the relative humidity of the air, of the temperature in the building, and of the exterior temperature. Moreover, the inside and outside temperatures are not constant. This implies that it is difficult to predict when such condensation will occur. It is however highly probable condensation will take place from the outside to the inside early and/or late in the day, or early and/or late in the season. This means that, year in year out, vapour will condense in a construction with a vapour impervious layer with a vapour barrier layer. Condensation on these layers close to the thatched roof contributes to an accelerated degeneration of the thatched roof. It is therefore an aim of the present invention to provide an enhanced product in which all the aforementioned problems from the state of the art occur significantly less or not at all.

[0057] One should also mention that, on top of the vapour effects, the temperature in the construction also plays an important role in the development of algae, fungi, and moss in and on the screwed thatched roof. In particular fungi thrive at a temperature of about 18 °C to 30 °C, and in humid circumstances.

[0058] The temperature in a construction changes linearly. When the inside temperature of the building is for example 20 °C and the outside temperature is 10 °C, this means that halfway through this insulated construction, i.e. at the bottom of the thatched roof, the temperature is more or less 15 °C. When there is no insulation, and assuming the same inside and outside temperatures, halfway through the screwed thatched roof the temperature will already be 15 °C, and the ideal conditions for algae, fungi, and moss in and on the screwed thatched roof are present.

[0059] The degree of insulation plays a secondary role in preventing the formation of algae, and fungi, and moss in and on the thatched roof. The most important factor is the humidity. After all, under the relatively dry circumstances there will be no development of fungi, algae, and moss, even at ideal temperatures.

[0060] The invention relates to a construction of a prefabricated, insulated, vapour permeable, compressive resistant roof panel without a rigid layer, with an integrated skeleton for the screwed thatched roof, whereby the skeleton is resistant to compressive and tensile forces. The invention centres around the integrated application of a compressive and tensile resistant skeleton with a vapour permeable and compressive resistant insulation panel.

[0061] The compressive and tensile strength of the skeleton, and hence design, are different and play a more prominent role than is the case with other roof coverings, such as roof tiles. The skeleton not only serves to fix the

reed material, but also has to be resistant to the compressive and tensile forces that will be applied by the scaffolding material that will be used by the thatcher. A skeleton that presents a sufficient compressive and tensile strength in view of the forces of the scaffolding material, can also be made from wood.

[0062] It should be noted that other organic materials can also be used for the skeleton.

[0063] When building in a vapour permeable way, one has to proceed in an air impermeable manner in order to prevent unwanted air currents (drafts) in the construction. The best way to do this is to make the construction impermeable to air as closely as possible against the inside of the building. It has to be noted that air impermeable is not equal to vapour impermeable. Constructing in a vapour diffusion permeable way has basically nothing to do with air and everything to do with humidity. Air (ventilation) in a construction needs to be controlled by the use of (mechanical) ventilation systems. An air impermeable or airtight construction implies that there will be no uncontrolled and unwanted side effects in the construction and with the ventilation of the building.

[0064] The application of the material in the vapour permeable construction way and in the present invention, means that the material at the top will be more vapour permeable than the material at the bottom, i.e. the inside of a building. Also, the difference in the vapour diffusion value per material layer will not exceed 10 to 15, at most. Seen from the inside, the vapour diffusion value of the material increases in the outside direction. Such a sequence means that it is easier for vapour to exit the building than to enter it. This is beneficial to the durability of the construction, to the climate inside the building, and to the durability of the roof covering.

[0065] To avoid condensation in the construction, no use is made of vapour barrier layers or of vapour impermeable layers. No use is made of a vapour barrier or of a strongly limiting vapour foil in the construction or when finishing the construction. In order to be able to deal with the humidity, building materials are used that, dependent on the vapour pressure, can transport humidity without these materials themselves remaining humid. Suitable materials are organic materials that are rich in fibres, such as flax, sheep's wool, hemp fibres, wood, wood fibre insulation, métisse, straw, and reed.

[0066] By applying this material in the correct way, the humidity in the construction can easily evaporate into the environment, but can also be transported to the inside of the building if that should prove necessary. Vapour can therefore be dealt with without causing damage to the reed material or the construction. It is preferable to avoid use of inorganic mineral insulation materials, such as glasswool and rockwool. Although these materials are vapour permeable, they are less suitable for regulating and controlling vapour depending on the vapour pressure. Glasswool and rockwool that become too humid lose their insulating effect, as well as their form.

[0067] For existing buildings and for renovation pur-

poses the insulating, vapour permeable, compressive and tensile resistant, renovation panel for the screwed thatched roof is suitable. This panel is applied manually, horizontally onto a slatted roof or vertically onto a purlin roof. The panels are placed directly on the slats and are mutually connected (for example a wood fibre insulation panel with tongue and groove). Slots are foreseen in the panel for the slats onto which the reed material will be screwed. It is obvious that, instead of slats, other dimensions and forms (such as beams or planks) and materials can be used if and when they are suitable for the technical building conditions and for the vapour permeable building principle.

[0068] The insulation material on the top contributes to the insulating effect and creates, together with the slats, a closed and flat surface onto which the reed material can be fixed. The consequence of this is that there will be no layer of air between the supporting construction and the thatched roof, which in turn assures that its fire safety is guaranteed. The result is a closed, compressive and tensile resistant, vapour permeable combination that, when it comes to insulation values and fire safety, has the same effect as the screwed thatched roof.

[0069] The panels are fixed/anchored onto the slats or purlins in a compressive and tensile resistant way, with suitable fixing materials. This not only provides a compressive and tensile resistant structure that will support the reed material, but also a compressive and tensile resistant structure for fixing the scaffolding material of the thatcher. The joints of the panels are closed off in an airtight way from the inside or the outside, using suitable materials.

[0070] The roof panel for mechanical use can be produced with varying widths, lengths, and thicknesses. The panel is placed mechanically vertically on a purlin of a building, or horizontally on a slat structure. The panel consists of lengthwise means that carry the panel. The number and dimensions of the beams is dependent on the strength required for the construction.

[0071] On the outside of the panel one can find the slats of the skeleton, integrated into the insulation material, onto which the reed material of the roof can be fixed. Here as well, it is obvious that, whenever the term slat or slats is used, other dimensions and forms, such as beams and planks, and materials can be used on condition that they are suitable for the technical building conditions and for the vapour permeable building principle.

[0072] The slats of the skeleton and the insulation material form a closed and flat surface on which the reed material can be placed and fixed. The result is a closed, compressive and tensile resistant, vapour permeable combination that, when it comes to insulation values and fire safety, has the same effect as the screwed thatched roof.

[0073] We use the same conventional centre to centre distances for the slats for the thatched roof. Preferably, the panel is made airtight on the inside. When placing the panels, they moreover need to be finished off in an

airtight manner. Moreover, the integrated and insulated skeleton can be insulated using insulating material that is compatible with the principle and with the construction. Use can for example be made of a flax insulation panel or of an insulation panel with sheep's wool, on condition that such a panel has a higher vapour permeable diffusion value that is higher than that of the top side.

[0074] The panel can be completed with a frame or with a cavity on the bottom side. A useful space for pipes and wiring can be created this way. The finishing details for the building can be mounted on the inside framework.

[0075] In the case of an OSB or vapour resistant wood fibre panel, the complete supporting construction onto which the reed is screwed, is rigid, which means that the rigid layer is then 100% vapour impermeable. OSB panels and humidity resistant wood fibre panels, just like wood, also form a vapour barrier for the vapour diffusion value, whereas, as a material layer, they are very different when compared with the aforementioned inorganic insulation materials and with the thatched roof that is used in a vapour permeable construction method.

[0076] The difference with a construction with a rigid layer is that, in the case of a certain type of material, the skeleton broadly takes up 10 to 20% of the outer surface of a panel (dependent on the used dimensions of the wood skeleton) and 80 to 90% of it consists of strongly vapour permeable (and preferably compression resistant) insulation material. This way, just as with the traditionally thatched roof, a vapour permeable roof can be obtained, the only difference being that the latter also complies with the present-day quality requirements.

Claims

1. Method for covering a pitched roof with reed, wherein the roof comprises an open roof truss, the method comprising closing the roof truss with one or more rigid panels comprising a top side that is facing the exterior of the roof, and a bottom side that is facing the interior of the roof, covering the one or more rigid panels with a reed packet, wherein the reed packet is placed on the top side of the panels, and fixing the reed packet to the panels, **characterised in that** the vapour diffusion resistance of the one or more panels is at most 15 units higher than the vapour diffusion resistance of the reed packet.
2. Method according to claim 1, **characterised in that** the vapour diffusion resistance of the one or more panels is at most 14 units higher than the vapour diffusion resistance of the reed packet, and preferably at most 13, 12, 11, or 10 units.
3. Method according to any of the preceding claims, **characterised in that** the one or more panels each comprise an open skeleton, in such a way that the panel is rigid, as well as openings in the skeleton,




wherein the openings extend from the bottom side of the panel to the top side of the panel, and are filled with a material that is vapour permeable, in such a way that the panel is in possession of the aforementioned vapour diffusion resistance.

4. Method according to any of the preceding claims, **characterised in that** the vapour diffusion resistance of the one or more panels is obtained by using an organic material that is vapour permeable. 5
5. Method according to claim 4, **characterised in that** the organic material is selected from the group consisting of wool, cotton, wood fibre, flax, hemp, linen, and jute. 10
6. Method according to any of the claims 4 and 5, **characterised in that** the organic material that is vapour permeable is not mixed with an inorganic material that is vapour permeable. 15
7. Method according to any of the preceding claims, **characterised in that** the top side of the one or more panels is smooth. 20
8. Method according to any of the preceding claims, **characterised in that** a subsequent panel is fixed against the bottom side of the one or more panels, wherein the subsequent panel has a vapour diffusion resistance that is at most 15 units, preferably at most 14, 13, 12, 11, or 10 units higher than the vapour diffusion resistance of the panel immediately above. 25
9. Rigid panel, suitable to be used in a method according to any of the claims 1 to 8, **characterised in that** the vapour diffusion resistance (μ) of the panel is at most 20. 30
10. Rigid panel according to claim 9, **characterised in that** the vapour diffusion resistance (μ) of the panel is at most 19, 18, 17, 16, 15, 14, or 13. 35
11. Rigid panel according to claim 9 or 10, **characterised in that** the panel comprises an open skeleton, in such a way that the panel is rigid, as well as one or more openings in the skeleton, wherein the openings extend from a bottom side of the panel to a top side of the panel, and wherein the one or more openings are filled with a material that is vapour permeable, in such a way that the panel has the aforementioned vapour diffusion resistance. 40
12. Rigid panel according to any of the claims 9, 10, or 11, **characterised in that** the material that is vapour permeable is an organic material that is vapour permeable, and is preferably selected from the group consisting of wool, cotton, wood fibre, flax, hemp, linen and jute. 45

13. Rigid panel according to any of the claims 9, 10, 11, or 12, **characterised in that** the organic material that is vapour permeable is not mixed with an inorganic material that is vapour permeable. 50

14. Rigid panel according to any of the claims 9, 10, 11, 12, or 13, **characterised in that** the top side of the panel is smooth. 55

15. Building with a pitched roof, wherein the roof comprises an open roof truss, and wherein the roof is thatched using a method according to any of the claims 1 to 8.

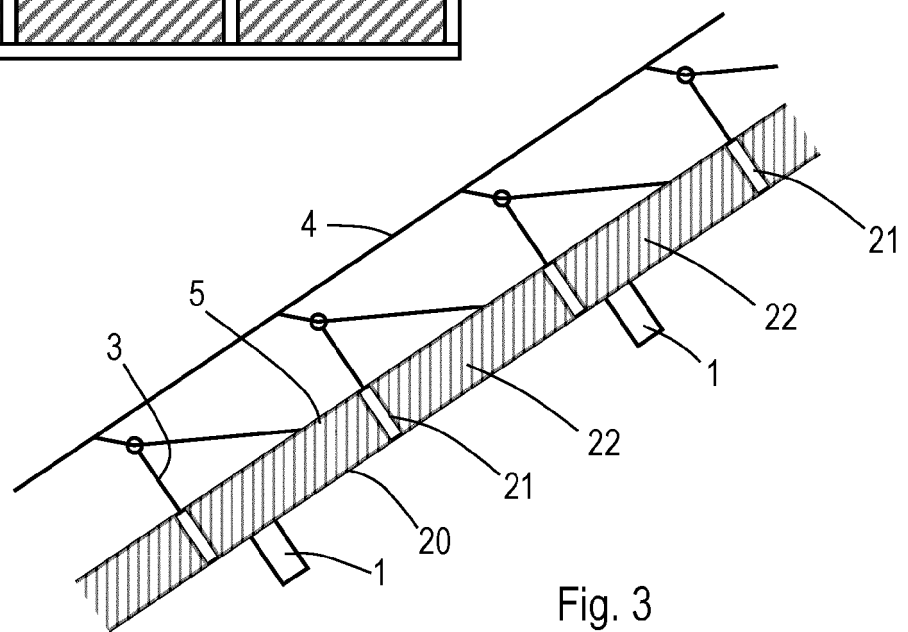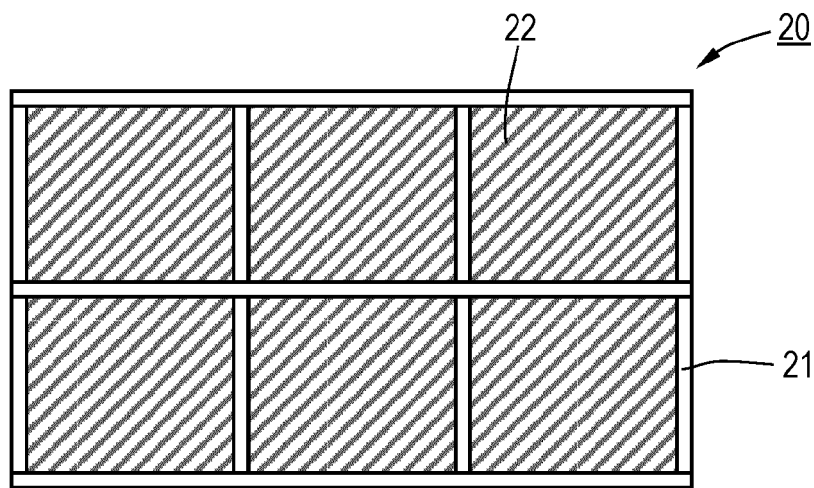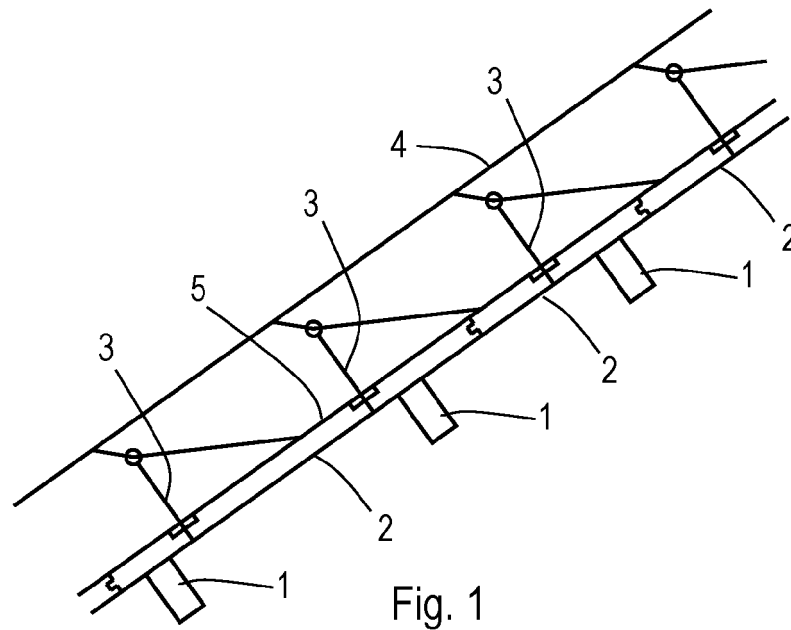



EUROPEAN SEARCH REPORT

Application Number

EP 23 21 8389

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	NL 1 043 918 B1 (RIETDEKKERSBEDRIJF ARNOUD BOUWKNEGT [NL]) 5 September 2022 (2022-09-05) * page 1, line 45 - page 2, line 73 * -----	1-8	INV. E04D9/00 E04D13/16
Y	DE 195 31 481 A1 (MAHLER MANFRED DR ING [DE]) 27 February 1997 (1997-02-27) * column 5, lines 8-29; figures 1,2 * -----	1,3-8, 11,12	
Y	DE 100 07 774 A1 (WKI ISOLIERTECHNIK GMBH BERLIN [DE]) 20 September 2001 (2001-09-20) * column 1, lines 3-5, 17-22 * -----	1,7,8	
X	EP 2 990 556 A1 (STO SE & CO KGAA [DE]) 2 March 2016 (2016-03-02)	9,10, 13-15	
Y	* paragraph [0011] * -----	1,2,6-8, 11,12	
Y	DE 10 2009 025163 A1 (STO AG [DE]) 16 December 2010 (2010-12-16) * paragraphs [0008], [0005] * -----	1,5-8,12	TECHNICAL FIELDS SEARCHED (IPC) E04D E04B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 6 March 2024	Examiner Tran, Kim Lien
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 23 21 8389

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-03-2024

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
NL 1043918 B1	05-09-2022	NONE	
DE 19531481 A1	27-02-1997	NONE	
DE 10007774 A1	20-09-2001	NONE	
EP 2990556 A1	02-03-2016	NONE	
DE 102009025163 A1	16-12-2010	DE 102009025163 A1	16-12-2010
		EP 2440716 A2	18-04-2012
		WO 2010142742 A2	16-12-2010