

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199719162 B2
(10) Patent No. 720785

(54) Title
Device for detecting the positions of pivotable parts of a point

(51)⁷ International Patent Classification(s)
B61L 005/10

(21) Application No: **199719162**

(22) Application Date: **1997.03.11**

(87) WIPO No: **WO97/33784**

(30) Priority Data

(31) Number	(32) Date	(33) Country
468/96	1996.03.12	AT

(43) Publication Date : **1997.10.01**

(43) Publication Journal Date : **1997.11.27**

(44) Accepted Journal Date : **2000.06.15**

(71) Applicant(s)
VAE Aktiengesellschaft

(72) Inventor(s)
Kurt Seidl; Josef Frauscher

(74) Agent/Attorney
MADDERNS, 1st Floor Wolf Blass House, 64 Hindmarsh Square, ADELAIDE SA 5000

(56) Related Art
DE 3511891
AT 373836



AU9719162

(51) Internationale Patentklassifikation ⁶ :

B61L 5/10

A1

(11) Internationale Veröffentlichungsnummer: WO 97/33784

(43) Internationales

Veröffentlichungsdatum:

18. September 1997 (18.09.97)

(21) Internationales Aktenzeichen: PCT/AT97/00051

(22) Internationales Anmeldedatum: 11. März 1997 (11.03.97)

(30) Prioritätsdaten:

A 468/96

12. März 1996 (12.03.96)

AT

(71) Anmelder (für alle Bestimmungsstaaten ausser US): VAE
AKTIENGESELLSCHAFT [AT/AT]; Rotenturmstrasse 5-
9, A-1010 Wien (AT).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): SEIDL, Kurt [AT/AT];
Hauptstrasse 55 B, A-8753 Fohnsdorf (AT). FRAUSCHER,
Josef [AT/DE]; Sonnenstrasse 5, D-94099 Ruhstorf (DE).

(74) Anwalt: HAFFNER, Thomas, M.; Schottengasse 3a, A-1014
Wien (AT).


(81) Bestimmungsstaaten: AL, AM, AT, AU, AZ, BA, BB, BG,
BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB,
GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT,
UA, UG, US, UZ, VN, YU, ARIPO Patent (GH, KE, LS,
MW, SD, SZ, UG), eurasisches Patent (AM, AZ, BY, KG,
KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH,
DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,
SE), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML,
MR, NE, SN, TD, TG).

Veröffentlicht

Mit internationalem Recherchenbericht.

(54) Title: DEVICE FOR DETECTING THE POSITIONS OF PIVOTABLE PARTS OF A POINT

(54) Bezeichnung: VORRICHTUNG ZUM ERFASSEN DER POSITIONEN VON SCHWENKBAREN TEILEN EINER WEICHE

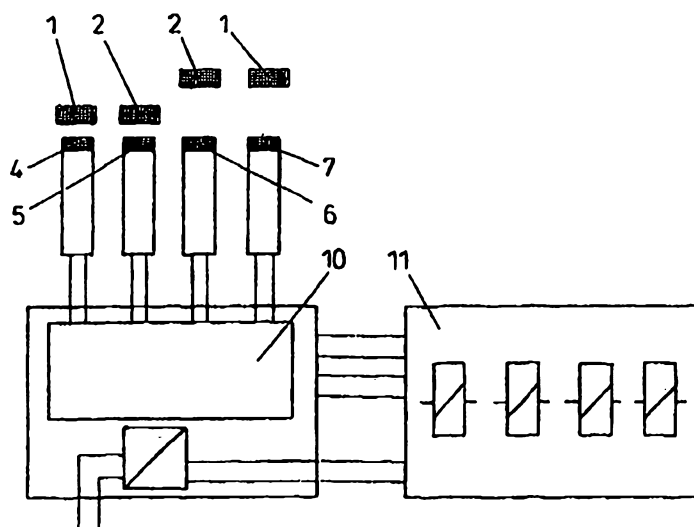

(57) Abstract

The invention relates to a device for detecting the positions of pivotable parts of a point, for example tongue rails (1, 2). Said device has at least one sensor (4, 5, 6, 7) in the form of a continuous distance sensor. The sensor output is connected to a circuit arrangement (10) for two separate evaluations. A first evaluation is in the form of a distance evaluation and a second evaluation is in the form of an operational check of the sensor. The invention also relates to a process for signal evaluation.

Device for Detecting the Positions of Pivotal Parts of a Rail Switch

The invention relates to a device for detecting the positions
5 of pivotal parts of a rail switch, such as, e.g., tongue rails by at least one sensor as well as a method for evaluating sensor signals with a view to determining the positions of pivotal parts of a rail switch.

10 Due to the ever increasing extension of high-speed lines for railways, demands on the check of rail switches are growing, in particular. In order to guarantee the safe operation of a railway, crossings of rail switches must take place at the highest degree of safety. To this end, it is absolutely
15 necessary for the switch tongues to correctly assume, and also maintain, their end positions after having been pivoted by appropriate actuation drives. So far, tongue position detectors comprising mechanical end switches have been used to check these end positions. Yet, such mechanical devices are
20 relatively complex and expensive, since they frequently are comprised of rod assemblies readily prone to damage and hence requiring frequent maintenance and readjustment. In addition to such mechanically operating position detectors, devices have become known which are comprised of inductively acting
25 non-contact approximation switches.

From DE 35 11 891 A1 a device has become known, which consists of an electromotor-driven single-rail-switch actuator, a fixable adjustment slide and optionally a likewise fixable
30 monitoring slide as well as a sensor arrangement for recognizing the end positions of the slides and their safeguarding states. By means of sensors integrated in such devices, the end positions are monitored and the locking position of the adjustment slide and optionally of the
35 monitoring slide are recognized. The checking results are then transmitted to a control and monitoring logic and/or a controlling interlocking installation while determining the



practicability of the railway switch. No measurement of the distance between the tongue rail and the stock rail is provided.

5 From DE 26 36 359 A1, a device for monitoring the end positions of pivotable rails of railway switches has become known, wherein inductive switches are provided on defined control points and scanned by ferromagnetic counterparts arranged on the pivotable rail. By the inductively induced
10 triggering of the switch, it is to be determined whether the pivotable rail has assumed its end position.


From EP 0 514 365 B1, a method for monitoring the state of rail switches and detecting premature wear in the region of
15 the tongue rails of a rail switch has already been apparent. That method substantially aims at detecting by means of a sensor premature wear in the region of the tongue rail so as to store the smallest value of the distance between tongue rail and stock rail detected during crossing, while defining
20 distance values and limit values in each case and comparing the same and triggering a maintenance signal upon exceeding of a defined limit value. Inductive or capacitive analog sensors are provided as potential approximation sensors.

25 Although such inductively acting approximation switches are very reliable and wear-free control elements, they cannot be used for continuously detecting the exact positions of the movable parts of a rail switch but are employed only for signaling whether the tongue of a rail switch has reached
30 the respective end position or not. Since inductively acting approximation switches are inserted in resonant circuits, the accuracy of any measurements is subject to the quality of the resonant circuit, which in turn strongly depends on external influences and on the accuracy of the structural components.
35 It is, therefore, necessary to take expensive measures in order to enhance the redundancy and accuracy of such measuring devices.



The present invention aims at providing a measuring device for continuously measuring the positions of the movable parts of a rail while constantly monitoring their functionability. To solve this object, the device according to the invention is realized in a manner that the sensor is a continuous distance sensor having a sensor
5 output connected to a circuit arrangement for performing two separate evaluations, the first evaluation being a distance evaluation and the second evaluation being a function control for the sensor. Due to the fact that the sensor is designed as a continuous distance sensor, all of the end positions of the switch tongue can be precisely detected over the total adjustment range as opposed to measuring sensors
10 that are merely suitable for detecting a state. A circuit arrangement is provided for evaluating signals, wherein it is feasible by means of a function control, e.g., by providing a reference signal, whether the sensor is intact and yields correct measuring results. The continuous determination of the position is carried out in the distance evaluation with a possible way of detecting the position residing in the calculation of the position. High-performance micro-controllers having high clock
15 rates are usually used for rapidly processing, by way of analog-to-digital conversion, measuring data available in the discrete form. Since the position of the tongue rail, as a rule, is not linearly dependent on the sensor signal, the distance evaluation in a particularly advantageous manner is configured so as to cooperate with a characteristic curve interrogation. By means of such a characteristic curve
20 interrogation, the exact determination of the position of the tongue rail is feasible even if the measuring signals are not based on a linear distance law.


A particularly preferred further development of the measuring device consists in that
25 the output of at least one further sensor for measuring the static signal is connected with the _____



function control. Due to the fact that a further sensor which is either specially calibrated or identical with the distance sensor proper is employed in this further development, the accuracy of the measurement of the static signal and hence the reliability of the function control are enhanced.

In order to further increase the accuracy in the determination of the positions of pivotable parts of a rail switch, a particularly suitable configuration is devised such that at least two distance sensors are each arranged at the open and closed positions of the pivotable parts on the track. By appropriately arranging several distance sensors, a further function control in the damped end position may be effected in addition to the function control in the undamped state. The use of at least two distance sensors installed on different sites, furthermore, offers the opportunity to enhance the reliability of the function control and the accuracy of the distance measurement by comparing the measured data and/or by averaging. Moreover, such a configuration serves to observe the tongue rails over the entire length of a rail switch as to changes in shape, measurements being feasible even during passage. In this manner, the overall state of the position of a rail switch may be ascertained and long-term changes may be predetermined.

In a preferred further development, the characteristic curve is designed so as to comprise the respective tolerance ranges for admissible functional ranges for the open and closed positions of the pivotable parts and that a function control is effected for the open and closed positions. By the fact that tolerance limits are provided, the function control is prevented from emitting an alarm signal already at slight deviations from the end positions thus terminating operation too early in really non-critical ranges. The configuration provided allows for the continuous control also of changes of the end positions and to carry out repair and adjustment operations coming up early at measuring data lying within the



tolerance limits. Thereby, it is possible to observe the progress of wear within the tolerance limits so as to save both material and costs.

In a particularly preferred embodiment, it is provided that the static signal
5 cooperates with the characteristic curve interrogation as a calibration quantity for the characteristic curve. By using the static signal for displacing the characteristic curves themselves so as to render the value of the static signal equal to the functional value in the open position, a family of characteristics is formed. By such a self-adjustment of the characteristic curves while forming of a family of characteristics, it becomes
10 possible to largely eliminate environmental and ageing influences on evaluation and to obtain unfalsified position data.

In order to prevent a further disturbance variable in the form of line losses, e.g., resistivity voltages drops, the sensor outputs advantageously are designed as power
15 outputs. By designing the sensor outputs as power outputs, the sensor signals are present in the form of readily processible currents.

In order to determine the tendencies of behaviour of a rail switch over an extended period of time, i.e., to recognize premature wear and to estimate the remaining
20 service life of a rail switch, the evaluation circuit preferably is connected with a memory.

In order to monitor the safe functioning of the locks and to check the narrowest passage, the distance sensors according to another advantageous configuration are
25 arranged in several measuring planes.

The method for evaluating the signals of the sensors for determining the position of pivotable parts of a rail switch using the device according to the invention essentially consists in that the sensor signals are evaluated in a characteristic curve computer, the positions are determined as a function of the signals, the signals are compared



with static signals of the sensors, functionability of the sensors is assessed and signal values located outside tolerance ranges predetermined by characteristic curves are used for error messages, and wherein a characteristic curve is adapted to a respective environmental condition by comparison with the static signals of the sensors within an admissible tolerance and short-term error messages are suppressed. By carrying out the analysis of the data detected by means of the sensors with a view to both determining the distance and checking the functionability of the sensors while simultaneously adapting the characteristic curve, falsifications affecting the measuring device by disturbance variables are largely eliminated, thereby increasing the measuring accuracy to a high degree. Since error messages are triggered only by signal data located beyond the tolerance ranges allowed in the characteristic curves, an operating range is defined within said tolerances, thereby ensuring that interruptions of operation will not be caused at already small deviations of the tongue rails from the end positions, faultless operation still being feasible without any risks. As a result, such a measuring-technique-based method, on the whole, raises the period of use of tongue rails of rail switches. If, however, a signal leaves the tolerance range, either the switch tongue has moved or the sensor has become defect. In the light of the safety guidelines provided by the railway law, the simultaneous occurrence of both of said failures may be excluded. If an actual source of error is to be detected, the sensor must be checked when idle. Due to the fact that even the time of an error message is detected by way of storage, error messages originating from possible freak values, e.g., caused by the accidental damping of a distance sensor by persons or animals, and hence being only of a short-term character may be suppressed. The operability of the rail switch in that case will not be _____



interrupted. By the arrangement and the evaluation method it is also ensured that defect sensors or failure of a sensor will cause an interruption of operation.

5 In a particularly preferred operating step, the operability of the switching actuator is monitored in addition, an even higher reliability of the switch setting device thus being obtained. By monitoring the switching actuator, it is ensured that failures going back to the switching actuator and not to
10 age-related wear or other environmental disturbances of the tongue rail will be recognized in time. Thus, it is feasible to constantly and separately monitor any principal error sources directly resulting in the shutdown and repair of a rail switch.


15

A further advantageous method step for monitoring the safe functioning of the locks and checking the narrowest passage consists in that the signals derived from different measuring planes are compared with one another.

20

In the following, the invention will be illustrated and explained in more detail by way of drawings. Fig. 1 illustrates the arrangement of the device according to the invention at a rail switch, Fig. 2 depicts the principal
25 circuit arrangement of the device for detecting the positions of pivotable parts of a railway switch, and Fig. 3 serves to describe in more detail the circuit arrangement by way of a detail of the circuit diagram of the electronics baseplate. From Fig. 4, the characteristic curves constituting the basis
30 of characteristic curve interrogation are apparent.


Fig. 1 shows two tongue rails 1 and 2 of a rail switch. By 3 a switching actuator is denoted, which places the tongues 1 and 2 in their respective positions. The continuous distance
35 sensors of a measuring plane, that are required for detecting the positions of the tongue rails are denoted by 4, 5, 6 and 7. According to the schematic illustration, one sensor 5 at



the tongue 1 in closed relationship to the stock rail 8, and one sensor 4 in the region of the tongue 2 in open relationship to the stock rail 8, are each damped in each of the rail switch positions. Two further sensors 6 and 7 are
5 undamped in that position of the rail switch. It may be provided to detect the position of the closed tongue by means of a sensor oriented towards the rail web and that of the open tongue by means of a sensor oriented towards the rail foot. Since, according to experience, the open tongue has a markedly
10 larger position tolerance as opposed to the closed tongue, a larger measuring range may be provided for measuring the position of the open tongue than with the closed tongue. The higher resolution of a sensor provided for the smaller measuring range of the closed tongue takes into account the
15 higher measuring accuracy required in that case. In addition to position detection, the switching circuit carries out the operability check of the electromechanically or electrohydraulically operating rail switching actuators.

20 Fig. 2 shows the tongue rails 1 and 2 in closed respectively open relationship to the stock rail 8 and the continuous distance sensors 4, 5 and 6, 7 respectively damped and undamped according to the position of the tongue rails. As indicated schematically, the distance sensors are configured
25 in the two-wire technique, the sensor signal being converted into a current proportional thereto and not falsified by resistivities. In a circuit and check logic 10, the signals of the sensors are further processed and the positions of the tongue rails are determined. Safety relays 11 are activated by
30 the outputs 16 of the circuit and check logic 10.


Fig. 3 again depicts the continuously measuring distance sensors 4, 5, 6 and 7, whose signals are further processed on an electronics baseplate 12. On that electronics baseplate 12,
35 the sensor signals are fed to two independently operating microcontrollers 15 and 16 with input protection lines 13 and frequency filters 14 being interposed. The two micro-



controllers are interconnected for the purpose of mutual control and checking the functionability of the sensors. Via a circuit logic, which is not explained in detail herebelow, the outputs 16 of the baseplate control the safety relays 11. The microcontrollers perform the data-technological processing proper, of the sensor signals. The characteristic diagram computers determining the distances of the tongue rails by means of the characteristic curves stored are also integrated in the same, which is not illustrated in detail.


10

Fig. 4 illustrates the dependence of the tongue rail position on the sensor signal present in the form of a current. The function illustrated is based on a principle of action, which in turn is based on a static current. Static current means that the highest current absorption takes place without damping, this corresponding to the highest coordinate value of the characteristic curves shown in Fig. 4. Characteristic curve 1 shows the dependence of the path on the current of an initial curve of a sensor. By contrast, characteristic curve 2 represents a function resulting upon ageing of the sensor and expressed by a shift in the sense of arrow 18. By taking appropriate steps in terms of measuring technique, e.g., by comparison with the independently measured static current of the sensor, the characteristic curves may be adaptively adjusted in the sense of arrow 18 as a function of the changes caused by the ageing process. Due to the fact that, in addition to the function check by detecting the static current of the sensor in the undamped state, two tolerance ranges are defined within the characteristic curve diagram for the regions about the end positions in the closed state 19 and in the open state 20, the functionabilities of the sensors may be constantly monitored both in the damped and in the undamped states. The current signals adjusting upon resetting of a rail switch for error-free operation must be within the current range. If a signal does not come to lie within these tolerance ranges, the error either is to be attributed to an inadmissible position of the switch tongue or the sensor is



defect. The occurrence of both of said failures simultaneously may be excluded in the light of the safety guidelines provided by the railway law.

- 5 Additional sensors 21 and 22 arranged in a further measuring plane are apparent from Fig. 1.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A device for detecting the positions of pivotable parts of a rail switch by at least one sensor, wherein the sensor is a continuous distance sensor having a sensor output connected to a circuit arrangement (10) for performing two separate evaluations, the first evaluation being a distance evaluation and the second
5 evaluation being a function control for the sensor.

2. A device according to claim 1, wherein the distance evaluation cooperates with a characteristic curve interrogation defining the dependence of the tongue rail position on the sensor signal.

10

3. A device according to claim 1 or 2, wherein the output of at least one further sensor measuring a static signal is connected with the circuit arrangement and cooperates with the function control.


4. A device according to claim 1, 2 or 3, wherein at least two distance sensors are each arranged at open and closed positions of the pivotable parts.

5. A device according to claim 2, wherein characteristic curves stored for the characteristic curve interrogation each comprise tolerance ranges for admissible functional ranges for open and closed positions of the pivotable parts and wherein
20 the function control is effected for the open and closed positions.

6. A device according to claim 3, wherein the static signal cooperates with a characteristic curve interrogation as a calibration quantity for a characteristic curve.

25

7. A device according to any one of claims 1 to 6, wherein the sensor output is a power output.



8. A device according to any one of claims 1 to 7, wherein the circuit arrangement (10) is connected with a memory.

9. A device according to any one of claims 1 to 8, wherein a plurality of distance
5 sensors are arranged in multiple measuring planes.

10. A method for evaluating signals of sensors for determining the position of
pivotal parts of a rail switch, wherein the sensor signals are evaluated in a
characteristic curve computer, the positions are determined as a function of the
10 signals, the signals are compared with static signals of the sensors, functionality of
the sensors is assessed and signal values located outside tolerance ranges
predetermined by characteristic curves are used for error messages, and wherein a
characteristic curve is adapted to a respective environmental condition by
comparison with the static signals of the sensors within an admissible tolerance and
15 short-term error messages are suppressed.

11. A method according to claim 10, wherein operability of a switching actuator is
also monitored.

12. A method according to claim 10 or 11, wherein the sensor signals derived
from different measuring planes are compared with one another.

13. A device according to any one of claims 1 to 9, substantially as described
herein and with reference to any one of the accompanying drawings.



14. A method according to any one of claims 10 to 12, substantially as described herein and with reference to any one of the accompanying drawings.

Dated this 5th day of April 2000.

VAE AKTIENGESELLSCHAFT

By its Patent Attorneys
MADDERNS

cm HtA



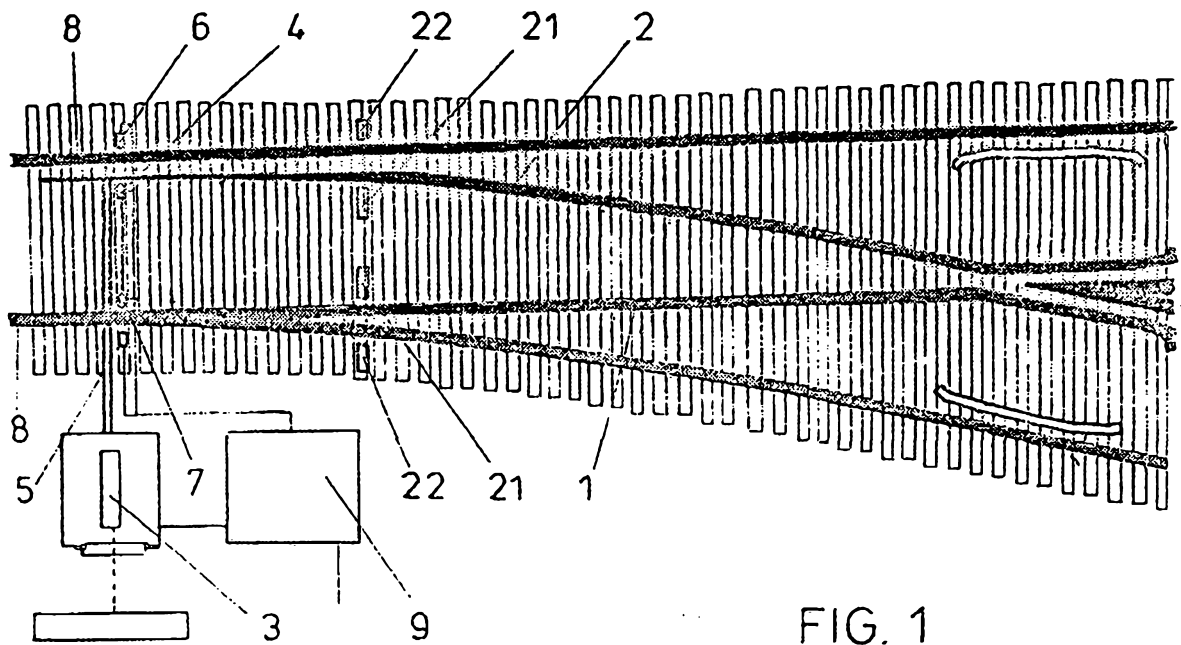


FIG. 1

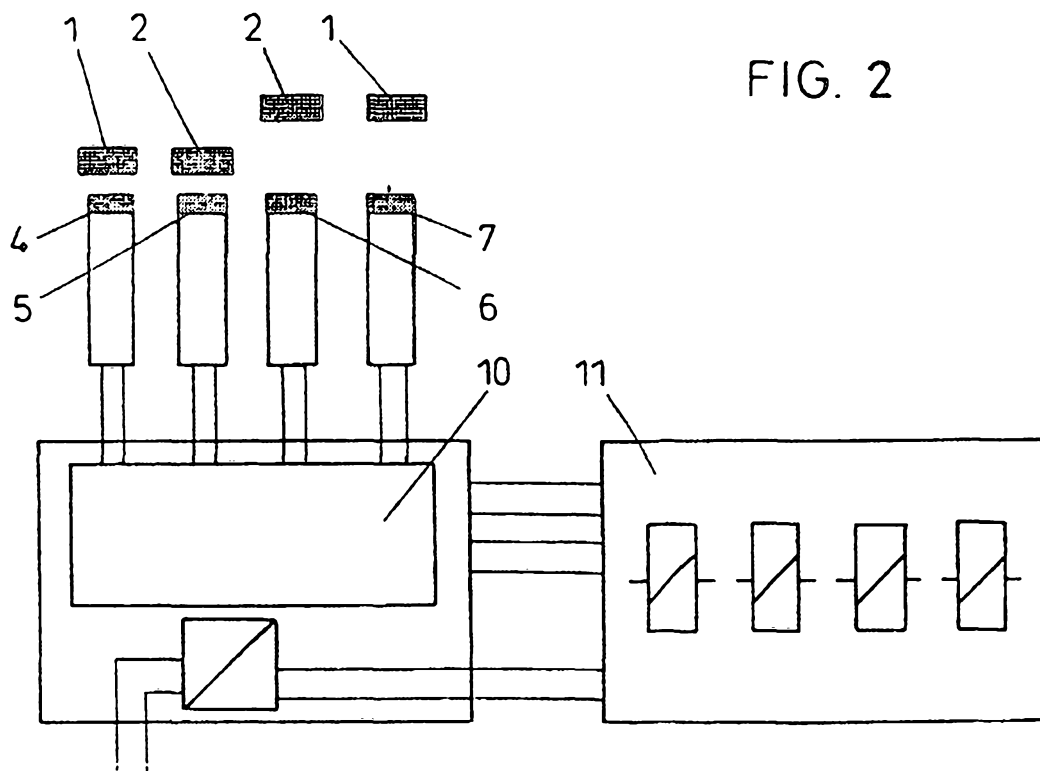


FIG. 2

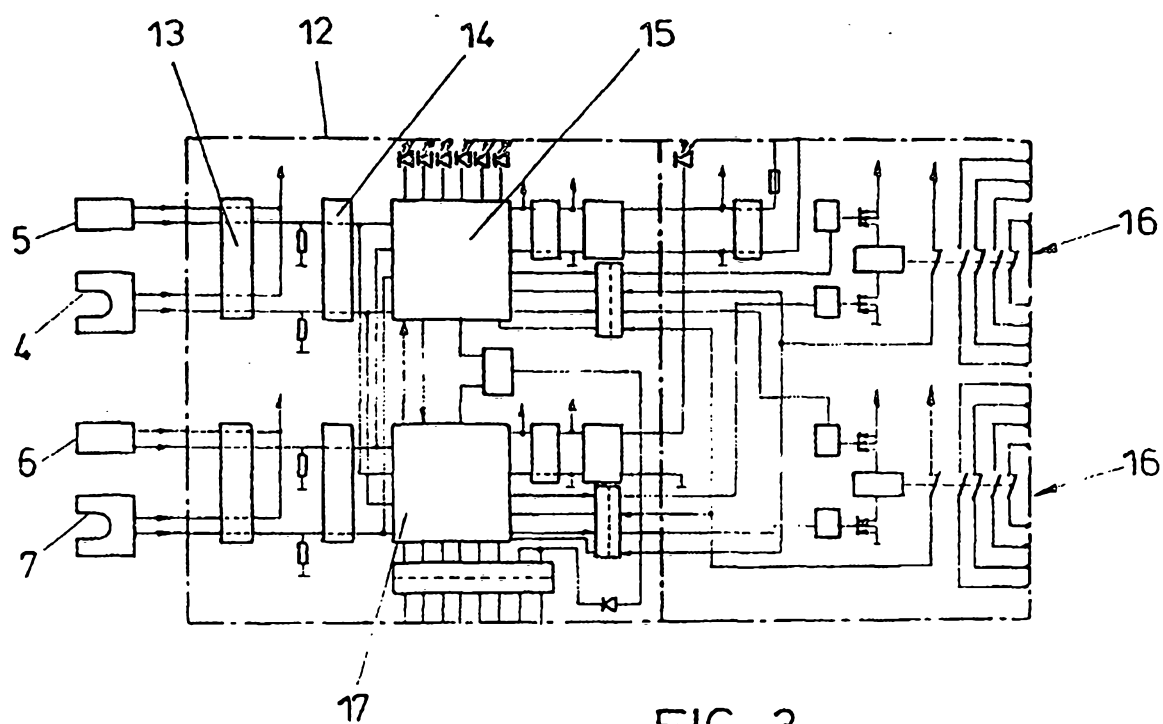


FIG. 3

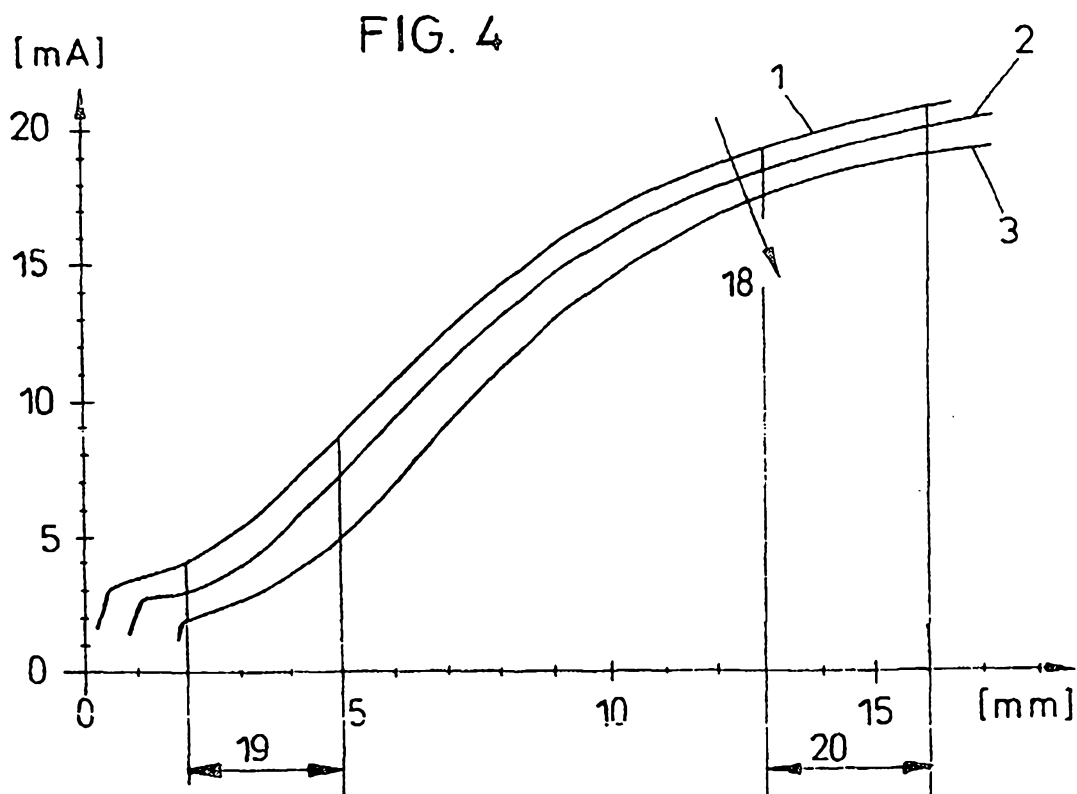


FIG. 4