

J. LEU.
HAT PIN SHIELD.
APPLICATION FILED JUNE 4, 1910.

999,171.

Patented July 25, 1911.

Fig. 1.







Fig. 4.

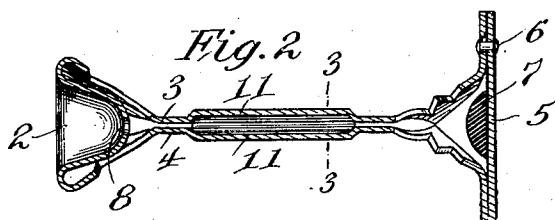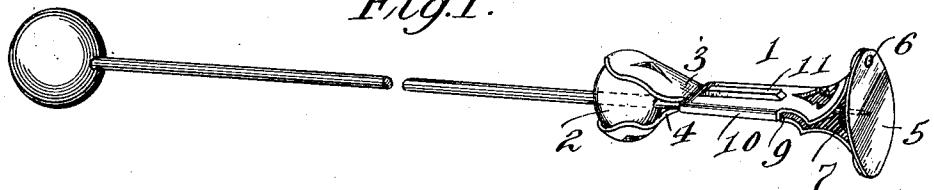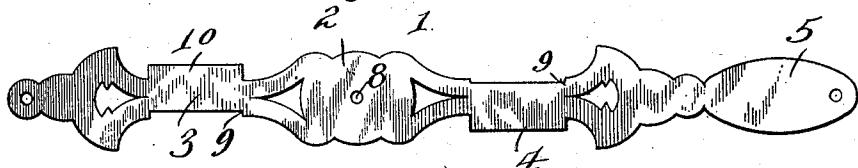

Inventor

John Leu

Witnesses

H. H. Lybrand
W. H. North

By Victor J. Evans

Attorney

UNITED STATES PATENT OFFICE

JOHN LEU, OF MONTREAL, QUEBEC, CANADA.

HAT-PIN SHIELD.

999,171.

Specification of Letters Patent. Patented July 25, 1911.

Application filed June 4, 1910. Serial No. 565,089.

To all whom it may concern:

Be it known that I, JOHN LEU, a citizen of the United States, residing at Montreal, in the Province of Quebec and Dominion of 5 Canada, have invented new and useful Improvements in Hat-Pin Shields, of which the following is a specification.

This invention relates to guards or protectors for women's hat pins, and the object 10 of the invention is to provide a device of this character which is extremely simple in construction, which can be manufactured at a low cost, which cannot be accidentally removed from the pin and which is ornamental in appearance.

With the above, and other objects in view, which will appear as the description progresses, the invention resides in the novel construction and combination of parts here- 20 inafter fully described and claimed.

In the accompanying drawings, Figure 1 is a perspective view of a guard constructed in accordance with the present invention, and showing the same in applied 25 position. Fig. 2 is an enlarged central longitudinal sectional view of the same. Fig. 3 is a transverse section taken upon the line 3—3 of Fig. 2. Fig. 4 is a view of the blank from which the device is constructed.

As is well known, pins for women's hats, as now constructed, frequently project a distance beyond the hat, and thus become a menace when the hat is worn upon a crowded thoroughfare. The pin is also dangerous when the hat is not on the head of the wearer, as for instance, in theaters, dressing rooms, etc.

In order to overcome the above objections 40 I have constructed a hat pin guard or protector designated by the numeral 1. This protector 1 may be constructed of a single piece of resilient metal and comprises a substantially bell-shaped mouth portion 2 from which project in opposite directions the 45 arms 3 and 4. The portions of the arms directly connected with the bell-shaped mouth 2 diverge toward each other and are continued in a parallel line with each other a distance and from thence bent upwardly 50 and outwardly in opposite directions. One of the upwardly projecting portions of the arm 3 may be bent upon itself to form the rear wall 5. The extension of the rear 5 may be connected with the extension of the 55 arm 3 through the medium of a rivet 6 or other analogous device. The end portion 5

of the device is preferably centrally provided with a soft yieldable stop member 7, the same being constructed preferably of rubber.

By reference to the several figures of the drawings it will be noted that the bell-shaped mouth 2 of the member is provided with a reduced entrance opening 8, the same being positioned directly between the arms 3 and 4, and it will be noted that when a pin is inserted through the said opening the same will be tightly grasped by the resilient arms and that injury to the point of the pin will be effectively prevented by the rubber member 8.

Each of the arms 3 and 4 have one of their edges cut away longitudinally as at 9 and their opposite edges provided with longitudinally extending lips or offsets 10 75 which are adapted to engage within the cut away portions 9 of the arms. By this arrangement it will be understood that the resilient arms 3 and 4 are at all times retained in proper alinement with each other, and 80 both of the arms 3 and 4 are centrally provided with a longitudinally extending depression 11 positioned upon their inner faces and arranged in alinement with the central opening of the bell-shaped front or mouth 85 2. The walls provided by these depressions may, if desired, be serrated so that the pin will be more securely retained between the compressible arms. The said depressions, it will be apparent, also serve as guideways 90 whereby the pin may be readily inserted so as to contact with the yieldable stop member 7.

From the above description, taken in connection with the accompanying drawings, 95 it will be noted that I have provided an extremely simple and thoroughly effective device for the purpose intended, and while I have illustrated and described the preferred embodiment of the improvement, as it now 100 appears to me, changes in the minor details of construction, within the scope of the following claims may be resorted to if desired.

Having thus fully described the invention, what I claim as new is:—

The herein described construction of protectors for hat pins, comprising a member formed from a single piece of resilient material, said member comprising a back which is bent at an angle to provide a centrally arranged forwardly extending arm, the said arm having one of its longitudinal edges cut

away, the opposite edge of the arm being bent to provide a lip, the said arm forward of the lip and cut away portion being bent downwardly and inwardly to provide a bell 5 shaped mouth, the said mouth being provided with an opening registering with the top wall of the arm, the end of the metal forming the mouth being bent downwardly and continued in a plane parallel with and 10 resiliently engaging the arm to provide a second arm, the meeting faces of both of the arms being formed with longitudinal depressions, the second arm having one of its edges bent to provide a lip adapted to

engage within the cut away portion of the 15 first arm, the opposite edge of the second arm being cut away to receive the lip of the first arm, and the extremity of the second arm being bent and connected to the back member diametrically opposite the junction 20 of the said back member and the first mentioned arm.

In testimony whereof I affix my signature in presence of two witnesses.

JOHN LEU.

Witnesses:

J. P. TRIPANIER,
E. S. PRIMEAU.

Copies of this patent may be obtained for five cents each, by addressing the "Commissioner of Patents,
Washington, D. C."
