




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>G02B 9/04</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 98/23988</b> (43) International Publication Date: 4 June 1998 (04.06.98)</p>
<p>(21) International Application Number: PCT/US97/20144 (22) International Filing Date: 12 November 1997 (12.11.97) (30) Priority Data: 60/033,348 29 November 1996 (29.11.96) US (71) Applicant (for all designated States except US): U.S. PRECISION LENS INCORPORATED [US/US]; 4000 McMann Road, Cincinnati, OH 45245 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): KREITZER, Melvyn, H. [US/US]; 8816 Tulipwood Court, Cincinnati, OH 45242 (US). (74) Agent: KLEE, Maurice, M.; 1951 Burr Street, Fairfield, CT 06430 (US).</p>		<p>(81) Designated States: CN, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i></p>

(54) Title: LENSES FOR ELECTRONIC IMAGING SYSTEMS

(57) Abstract

A lens system for an electronic system has two lenses. The first lens (S1/S2) has a negative power and the second lens (S4/S5 or S5/S6) has a positive power and is spaced from the first lens (S1/S2) by a distance of at least a quarter of the focal length of the lens system. In one embodiment (Fig. 3), the second lens (S4/S5) is a refractive-diffractive hybrid lens in which case both the first and the second lenses (S1/S2 and S4/S5) can be composed of acrylic and can have only spherical and conic surfaces. In other embodiments (Figs. 1, 2 and 4), the first lens (S1/S2) has a higher dispersion than the second lens (S4/S5 or S5/S6), e.g., the first lens (S1/S2) is composed of styrene and the second lens (S4/S5 or S5/S6) is composed of acrylic. In this case, the first lens (S1/S2) can have a spherical and a general aspherical surface, and the second lens (S5/S6) can have conic surfaces (Figs. 1 and 2), or both the first and second lenses (S1/S2 and S4/S5) can have a spherical surface and a conic surface (Fig. 4).

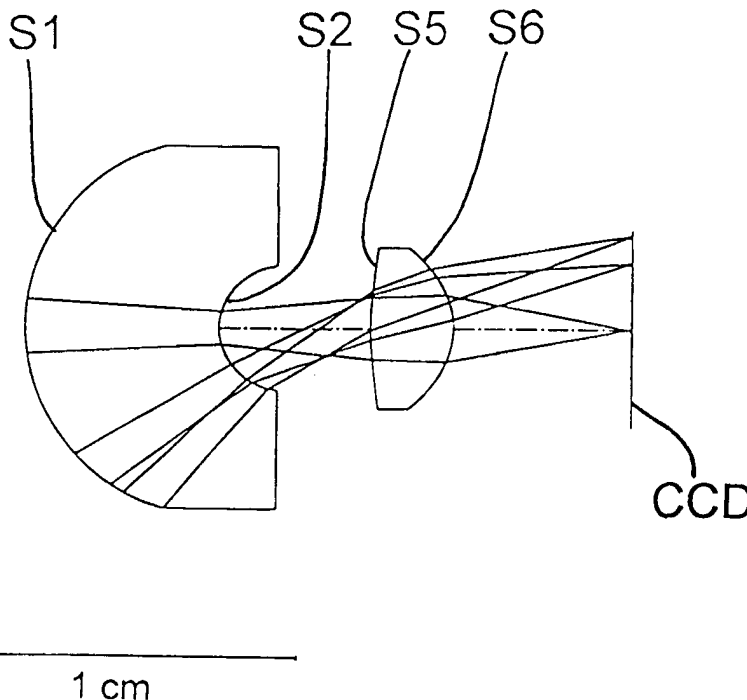

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5

LENSES FOR ELECTRONIC IMAGING SYSTEMSFIELD OF THE INVENTION

This invention relates to lenses for use with electronic imaging systems, e.g., systems employing charged coupled devices (CCDs) or similar light sensitive electronic components. Such systems are well known in the art and descriptions thereof can be found in various references, including Rose et al., "Physical Limits to the Performance of Imaging Systems," Physics Today, September 1989, pages 24-32 and the references cited therein; and Sequin et al., "Charge Transfer Devices," Advances in Electronics and Electron Physics, suppl. 8, L. Marton editor, Academic Press, New York, 1975, the relevant portions of all of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

Electronic imaging systems require lens systems which are capable of producing high quality images which have a small size, i.e., they require lens systems having short focal lengths. For example, CCDs having a diagonal of approximately 5.5 mm (known as 1/3 inch CCDs) are widely available. Within this small size, a typical CCD will have over 200,000 pixels, thus giving the device a resolution on the order of 40 cycles per millimeter at the surface of the CCD.

Short focal length lens systems typically comprise small lens elements. Such elements, if they are too small, can be difficult to handle and assemble into a finished unit. Cost is always a dominant factor for lenses for electronic imaging systems, especially where the system is to be part of a mass marketed product. Because CCDs have a high level of resolution, lenses used with such devices must be of high optical quality.

This requirement exacerbates the cost problem. In particular, the requirement puts a high premium on achieving a high level of optical performance with a minimum of lens elements.

#### SUMMARY OF THE INVENTION

5 In view of above considerations, it is an object of the present invention to provide lens systems for electronic imaging systems which: (1) use only two lens elements to minimize costs; (2) use a minimum of general aspherical surfaces, e.g., only one general aspherical surface and in some cases, no general aspherical surfaces, again to minimize costs, in this case  
10 by simplifying the manufacturing process; (3) use lens elements having relatively large diameters to facilitate handling and assembly; and (4) have a level of optical performance compatible with that of CCDs and similar electronic imaging devices.

To achieve this and other objects, the invention provides a two  
15 element lens system wherein a first element, located on the object side of the lens system, has a negative optical power and is relatively thick, and a second lens element, located on the image side of the lens system, has a positive power and is relatively widely spaced from the first lens element and/or is relatively thick. Preferably, both lens elements have a large  
20 diameter relative to the lens system's entrance pupil.

In certain embodiments, the system includes one general aspherical surface on the first lens element and two conic surfaces on the second lens element. In other embodiments, no general aspherical surfaces are used. In connection with these embodiments, one conic surface can be employed  
25 on the first lens element and two conic surfaces can be employed on the second lens element, which is preferably a refractive-diffractive hybrid element. Alternatively, a spherical surface and a conic surface can be used on both the first and second lens elements. In some embodiments, in order to achieve color correction, the first lens element is composed of styrene and  
30 the second lens element is composed of acrylic. The first and second lens

elements can both be composed of acrylic when a refractive-diffractive hybrid element is used for the second lens element.

The lens systems of the invention have focal lengths and optical performances suitable for use with conventional CCDs. For example, the lens systems can readily achieve a focal length of less than 5.0 mm, an f-number of 2.8 or faster, and a MTF at the CCD of 40 cycles/millimeter, thus making them suitable for use with 1/3 inch CCDs.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1-4 are schematic side views of lens systems constructed in accordance with the invention.

These drawings, which are incorporated in and constitute part of the specification, illustrate the preferred embodiments of the invention, and together with the description, serve to explain the principles of the invention. It is to be understood, of course, that both the drawings and the description are explanatory only and are not restrictive of the invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

As discussed above, the lens systems of the present invention consist of two lens elements.

The first lens element has a negative optical power, i.e.,  $f_1 < 0$ , and preferably has the following properties:

$$|f_1|/f_0 > 1.0;$$

$$t_1/f_0 > 0.5; \text{ and}$$

$$D_1/D_{EP} > 2.5;$$

where  $f_0$  is the focal length of the lens system,  $f_1$  is the focal length of the first lens element,  $t_1$  is the thickness of the first lens element,  $D_1$  is the diameter of the first lens element, and  $D_{EP}$  is the diameter of the entrance pupil of the lens system. The use of a thick front element provides correction for the field curvature of the system.

In certain embodiments, the lens systems of the invention satisfy the following relationships:

$$|f_1|/f_0 > 1.5; \text{ and}$$

$$t_1/f_0 > 0.7.$$

- 5 In connection with these embodiments, the  $t_1/f_0$  ratio is most preferably greater than 1.0.

As used herein and in the claims, the diameter of a lens element is the element's largest clear aperture and the diameter of the entrance pupil of a lens system is the system's equivalent singlet focal length divided by  
10 the system's infinity f-number. Based on these definitions, the lens systems of Examples 1-4 set forth below have  $D_1$  values of 9.5, 9.6, 11.9, and 5.6 mm, and  $D_{EP}$  values of 1.5, 1.5, 2.3, and 1.5 mm, so that their  $D_1/D_{EP}$  ratios are 6.3, 6.4, 5.2, and 3.7, respectively. Preferably, the  $D_1/D_{EP}$  ratio is greater than 3.0.

- 15 The second lens element has a positive optical power, i.e.,  $f_2 > 0$ , and preferably has the following properties:

$$f_2/f_0 < 2.0;$$

$$d_{12}/f_0 > 0.25;$$

$$D_2/D_{EP} > 1.3; \text{ and}$$

- 20  $t_2/f_0 > 0.5;$

where  $f_2$  is the focal length of the second lens element,  $d_{12}$  is the distance between the first and second lens elements,  $D_2$  is the diameter of the second lens element, and  $t_2$  is the thickness of the second lens element.

Based on the above definition of the diameter of a lens element, the lens  
25 systems of Examples 1-4 set forth below have  $D_2$  values of 4.0, 4.0, 4.5, and 3.9 mm, and  $D_2/D_{EP}$  ratios of 2.7, 2.7, 2.0, and 2.6, respectively.

Preferably, the  $D_2/D_{EP}$  ratio is greater than 1.5.

In certain embodiments, the lens systems of the invention satisfy the following relationships:

$$f_2/f_0 < 1.6;$$

$$d_{12}/f_0 > 0.5; \text{ and}$$

5  $D_2/D_{EP} > 1.5.$

In some embodiments, the second lens element is a refractive-diffractive hybrid element. The fabrication of such elements is well known in the art. See, for example, C. Londono, "Design and Fabrication of Surface Relief Diffractive Optical Elements, or Kinoforms, with Examples  
10 for Optical Athermalization," Ph.D. diss., Tufts University, 1992, and the references cited therein, the relevant portions of all of which are incorporated herein by reference. Diffractive surfaces have the problem of diffraction efficiency, i.e., all orders do not come to a perfect focus. This effect is often seen as "glare". For an electronic imaging system application,  
15 the diffraction efficiency problem can be addressed by digital processing of the electronic image.

When the second lens element is a refractive-diffractive hybrid, the ratio of  $f_2/f_0$ , where  $f_2$  includes the contribution of the diffractive surface, is preferably greater than 1.0, e.g., the ratio is approximately 1.5. When a  
20 hybrid is not used, the  $f_2/f_0$  ratio is preferably less than 1.0.

The use of a refractive-diffractive hybrid element for the second lens element provides color correction for the lens system and allows both the first and second lens elements to be composed of a low dispersion material such as acrylic. If such a hybrid element is not used, the first lens element  
25 should have a higher dispersion than the second lens element. For example, the first lens element can be composed of styrene and the second lens element can be composed of acrylic for such embodiments. Other plastics can, of course, be used if desired. For example, in place of styrene, polycarbonates and copolymers of polystyrene and acrylic (e.g., NAS)  
30 having flint-like dispersions can be used. See The Handbook of Plastic

Optics, U.S. Precision Lens, Inc., Cincinnati, Ohio, 1983, pages 17-29. The highest levels of color correction (both axial and lateral) are generally achieved when the second lens element is a refractive-diffractive hybrid element.

5 In certain preferred embodiments, the first lens element has a spherical surface and a conic surface and the second lens element also has a spherical surface and a conic surface. This arrangement facilitates manufacture of the lens system.

10 In other embodiments, the second lens element can have two conic surfaces, and the first lens element can have an object side surface which is spherical and an image side surface which in some embodiments is a conic and in other embodiments is a general asphere. Specifically, the image side surface of the first lens element can be a conic when the second lens element is a refractive-diffractive hybrid element. Otherwise, for these  
15 embodiments, the image side surface of the first lens element is typically a general asphere to facilitate aberration correction. Conic surfaces are preferred to general aspherical surfaces since the polynomial used to define a general aspherical surface (see below) can lead to undesired surface configurations if the diameter is extended beyond the clear aperture, while  
20 a conic surface does not suffer from this problem.

The terms "spherical", "conic", and "general asphere" are used herein and in the claims in accordance with their conventional meanings in terms of a lens surface equation of the following type:

$$z = \frac{cy^2}{1 + [1 - (1+k)c^2y^2]^{1/2}} + Dy^4 + Ey^6 + Fy^8 + Gy^{10} + Hy^{12} + Iy^{14}$$

25 where z is the surface sag at a distance y from the optical axis of the system, c is the curvature of the lens at the optical axis, and k is a conic constant

Thus, a surface is spherical if "k" and "D" through "I" are all zero, a surface is a conic if "k" is non-zero and "D" through "I" are all zero, and a  
30 surface is a general asphere if at least one of "D" through "I" is non-zero. A

surface for which "k" is non-zero and at least one of "D" through "I" is non-zero, is a general aspherical surface. Other equations besides that set forth above can of course be used to describe a surface of a lens element, and analogous considerations regarding the values of the parameters of such an equation will apply in determining whether a particular surface is a spherical surface, a conic surface, or a general aspherical surface.

Figures 1 to 4 illustrate various lens systems constructed in accordance with the invention. Corresponding prescriptions and optical properties appear in Tables 1 to 4, respectively. The Hoya designation is used for the glass plate employed in Figures 2 and 4. Equivalent glasses made by other manufacturers can be used in the practice of the invention. Industry acceptable materials are used for the plastic elements.

The aspheric coefficients set forth in the Tables 1 and 2 are for use in the equation set forth above. The abbreviations used in the tables are as follows:

	EFL	effective focal length
	FVD	front vertex distance
	f/	f-number
	ENP	entrance pupil as seen from the long conjugate
20	BRL	barrel length
	OBJ HT	object height
	MAG	magnification
	STOP	location and size of aperture stop
	IMD	image distance
25	OBD	object distance
	OVL	overall length.

The designation "c" associated with various of the surfaces in the tables represents a conic surface. The designation "a" associated with surface 2 of Tables 1 and 2 represents a general aspherical surface. Surfaces 6 and 7 in Table 3 represent a diffractive surface. The asterisks used in this table represent the index of refraction and the Abbe numbers used in the Sweatt model for a diffractive surface, e.g., a  $N_e$  value of 9999 and a  $V_e$  value of -3.4. See W.C. Sweatt, "Mathematical Equivalence

between a Holographic Optical Element and an Ultra High Index Lens,"  
Journal of the Optical Society of America, 69:486-487, 1979. Although  
shown as a separate element in Figure 3, the diffractive surface is in fact  
part of the second lens element. Surface 3 in Tables 1-4 is a vignetting  
5 surface. All dimensions given in the tables are in millimeters.

As is conventional, the figures are drawn with the long conjugate on  
the left and the short conjugate on the right. Accordingly, in the typical  
application of the invention, the object to be viewed will be on the left and  
an electronic imaging system, e.g., a system employing a CCD, will be on  
10 the right.

Although specific embodiments of the invention have been described  
and illustrated, it is to be understood that a variety of modifications which  
do not depart from the scope and spirit of the invention will be evident to  
persons of ordinary skill in the art from the foregoing disclosure. The  
15 following claims are intended to cover the specific embodiments set forth  
herein as well as such modifications, variations, and equivalents.

**TABLE 1**

Surf. No.	Type	Radius	Thickness	Glass	Clear Aperture Diameter
1		4.9397	5.08731	STYRENE	9.54
2	a	1.5323	2.89159		3.20
3		$\infty$	0.92114		1.47
4		Aperture stop	0.18423		1.68
5	c	6.0166	2.21905	ACRYLIC	4.00
6	c	-2.0489	4.67874		4.00

**Symbol Description**

- a - Polynomial asphere
- c - Conic section

**Conics**

Surface Number	Constant
2	-1.3889E-01
5	-4.7668E+01
6	-7.2577E-01

**Even Polynomial Aspheres**

Surf. No.	D	E	F	G	H	I
2	1.3599E-03	2.1563E-03	-6.1775E-03	2.4938E-03	2.6865E-05	-1.4075E-04

**SYSTEM FIRST ORDER PROPERTIES**

OBJ. HT: -310.00 f/ 2.80 MAG: -0.0080  
 STOP: 0.00 after surface 4. DIA: 1.6001  
 EFL: 4.09873 FVD: 15.9821 ENP: 10.9749  
 IMD: 4.67874 BRL: 11.3033 EXP: -2.80210  
 OBD: -503.622 OVL: 519.604

**First Order Properties of Elements**

Element Number	Surface Numbers	Power	f'
1	1 2	-0.11867	-8.4271
2	5 6	0.29369	3.4050

**TABLE 2**

Surf. No.	Type	Radius	Thickness	Glass	Clear Aperture Diameter
1		4.8906	4.90000	STYRENE	9.60
2	ac	1.5840	2.88000		3.30
3		$\infty$	0.95000		1.50
4	Aperture stop		0.19000		1.60
5	c	6.2277	2.40000	ACRYLIC	4.00
6	c	-2.0793	3.37000		4.00
7		$\infty$	0.55000	C5	6.00
8		$\infty$	1.00005		6.00

**Symbol Description**

- a - Polynomial asphere
- c - Conic section

**Conics**

Surface Number	Constant
2	-1.3889E-01
5	-4.9915E+01
6	-7.4312E-01

**Even Polynomial Aspheres**

Surf. No.	D	E	F	G	H	I
2	-4.3543E-03	9.2650E-03	-9.9861E-03	4.0803E-03	-6.4199E-04	3.4693E-06

**SYSTEM FIRST ORDER PROPERTIES**

OBJ. HT: -308.00      f/      2.82      MAG:      -0.0080  
 STOP: 0.00 after surface 4.      DIA: 1.5956  
 EFL: 4.16672      FVD: 16.2400      ENP: 10.6682  
 IMD: 1.00005      BRL: 15.2400      EXP: -6.87326  
 OBD: -512.386      OVL: 528.626

**First Order Properties of Elements**

Element Number	Surface Numbers	Power	f'
1	1 2	-0.11358	-8.8047
2	5 6	0.28651	3.4903

**TABLE 3**

Surf. No.	Type	Radius	Thickness	Glass	Clear Aperture Diameter
1		7.5616	4.34575	ACRYLIC	11.90
2	c	2.4466	7.85084		5.83
3		$\infty$	2.90000		3.75
4	c	6.4812	3.08783	ACRYLIC	4.57
5	c	-5.1558	0.00100		4.54
6		-1000.0000	0.00100	*****	4.53
7		-998.8000	7.57866		4.53

**Symbol Description**

c - Conic section

**Conics**

Surface Number	Constant
2	-3.9940E-01
4	-2.4310E+00
5	-2.2088E+00

**SYSTEM FIRST ORDER PROPERTIES**

OBJ. HT: -275.00      f/      1.84      MAG:      -0.0090  
 STOP: 2.53 after surface 4.      DIA: 4.4613  
 EFL: 4.25080      FVD: 25.7651      ENP: 11.2131  
 IMD: 7.57866      BRL: 18.1864      EXP: -.388641  
 OBD: -463.377      OVL: 489.142

**First Order Properties of Elements**

Element Number	Surface Numbers	Power	f'
1	1 2	-0.98183E-01	-10.185
2	4 5	0.15688	6.3745
3	6 7	0.12022E-01	83.183

**TABLE 4**

Surf. No.	Type	Radius	Thickness	Glass	Clear Aperture Diameter
1		3.2860	2.29000	STYRENE	5.60
2	c	1.0740	1.51000		2.30
3		$\infty$	0.00000		1.90
4		2.8130	3.10000	ACRYLIC	3.90
5	c	-1.9130	0.00000		3.90
6	Aperture stop		3.00000		1.90
7		$\infty$	0.50000	C5	4.00
8		$\infty$	1.11707		4.00

**Symbol Description**

c - Conic section

**Conics**

Surface Number	Constant
2	-3.1855E-01
5	-1.4577E+00

**SYSTEM FIRST ORDER PROPERTIES**

OBJ. HT: -225.00      f/ 2.50      MAG: -0.0080  
 STOP: 0.00 after surface 6.      DIA: 1.811  
 EFL: 3.81046      FVD: 11.5171      ENP: 5.46002  
 IMD: 1.11707      BRL: 10.4000      EXP: -3.32796  
 OBD: -474.118      OVL: 485.635

**First Order Properties of Elements**

Element Number	Surface Numbers	Power	f'
1	1 2	-0.22890	-4.3688
2	4 5	0.33962	2.9444

What is claimed is:

1. A lens system for forming an image of an object, said system having a focal length  $f_0$  and consisting in order from its object side to its image side of:

- (a) a first lens element having a focal length  $f_1$  and a thickness  $t_1$ ; and

- (b) a second lens element having a focal length  $f_2$ , said second lens element being spaced from the first lens element by a distance  $d_{12}$ ;

wherein:

$$f_1 < 0;$$

$$|f_1|/f_0 > 1.0;$$

$$t_1/f_0 > 0.5;$$

$$f_2 > 0; \text{ and}$$

$$d_{12}/f_0 > 0.25.$$

2. The lens system of Claim 1 wherein:

$$|f_1|/f_0 > 1.5;$$

$$t_1/f_0 > 0.7; \text{ and}$$

$$d_{12}/f_0 > 0.5.$$

3. The lens system of Claim 1 or 2 wherein:

$$f_2/f_0 < 2.0.$$

4. The lens system of Claim 3 wherein:

$$f_2/f_0 < 1.6.$$

5. The lens system of Claim 1 or 2 wherein the second lens element has a thickness  $t_2$  and wherein:

$$t_2/f_0 > 0.5.$$

6. The lens system of Claim 1 or 2 wherein the first lens element has a higher dispersion than the second lens element.
7. The lens system of Claim 6 wherein the first lens element is composed of styrene and the second lens element is composed of acrylic.
8. The lens system of Claim 1 or 2 wherein the second lens element is a refractive-diffractive hybrid element.
9. The lens system of Claim 8 wherein the first and second lens elements are composed of acrylic.
10. The lens system of Claim 8 wherein:
$$f_2 / f_0 > 1.0$$
11. The lens system of Claim 1 wherein:
  - (i) the first lens element has a spherical surface and a general aspherical surface; and
  - (ii) the second lens element has two conic surfaces.
12. The lens system of Claim 1 wherein:
  - (i) the first lens element has a spherical surface and a conic surface; and
  - (ii) the second lens element has two conic surfaces.
13. The lens system of Claim 12 wherein the second lens element is a refractive-diffractive hybrid element.
14. The lens system of Claim 1 wherein:
  - (i) the first lens element has a spherical surface and a conic surface; and
  - (ii) the second lens element has a spherical surface and a conic surface.
15. The lens system of Claim 14 wherein the conic surface is on the object side of each of the first and second lens elements.

16. The lens system of Claim 1 or 2 wherein the lens system has an entrance pupil whose diameter is  $D_{EP}$ , the first lens element has a diameter  $D_1$ , and the second lens element has a diameter  $D_2$ , where:

$$D_1/D_{EP} > 2.5; \text{ and}$$

$$D_2/D_{EP} > 1.3.$$

17. The lens system of Claim 16 wherein:

$$D_1/D_{EP} > 3.0; \text{ and}$$

$$D_2/D_{EP} > 1.5.$$

18. A lens system for forming an image of an object, said system consisting in order from its object side to its image side of:

(a) a negative first lens element having a spherical surface and a general aspherical surface; and

(b) a positive second lens element having two conic surfaces.

19. A lens system for forming an image of an object, said system consisting in order from its object side to its image side of:

(a) a negative first lens element having a spherical surface and a conic surface; and

(b) a positive second lens element having two conic surfaces.

20. The lens system of Claim 19 wherein the second lens element is a refractive-diffractive hybrid element.

21. A lens system for forming an image of an object, said system consisting in order from its object side to its image side of:

(a) a negative first lens element having a spherical surface and a conic surface; and

(b) a positive second lens element having a spherical surface and a conic surface.

22. A lens system for forming an image of an object, said system having an entrance pupil whose diameter is  $D_{EP}$  and consisting in order from its object side to its image side of:

- (a) a negative lens element having a diameter  $D_1$ ; and
- (b) a positive lens element having a diameter  $D_2$ ;

wherein:

$$D_1/D_{EP} > 2.5; \text{ and}$$

$$D_2/D_{EP} > 1.3.$$

23. The lens system of Claim 22 where:

$$D_1/D_{EP} > 3.0; \text{ and}$$

$$D_2/D_{EP} > 1.5.$$

24. An optical system comprising a lens system for forming an image of an object and an electronic imaging system for detecting said image, said lens system being the lens system of Claim 1 or 2.

25. The optical system of Claim 24 wherein the electronic imaging system is a charged coupled device.

26. An optical system comprising a lens system for forming an image of an object and an electronic imaging system for detecting said image, said lens system being the lens system of Claim 18.

27. The optical system of Claim 26 wherein the electronic imaging system is a charged coupled device.

28. An optical system comprising a lens system for forming an image of an object and an electronic imaging system for detecting said image, said lens system being the lens system of Claim 19.

29. The optical system of Claim 28 wherein the electronic imaging system is a charged coupled device.

30. An optical system comprising a lens system for forming an image of an object and an electronic imaging system for detecting said image, said lens system being the lens system of Claim 21.

31. The optical system of Claim 30 wherein the electronic imaging system is a charged coupled device.
32. An optical system comprising a lens system for forming an image of an object and an electronic imaging system for detecting said image, said lens system being the lens system of Claim 22 or 23.
33. The optical system of Claim 32 wherein the electronic imaging system is a charged coupled device.

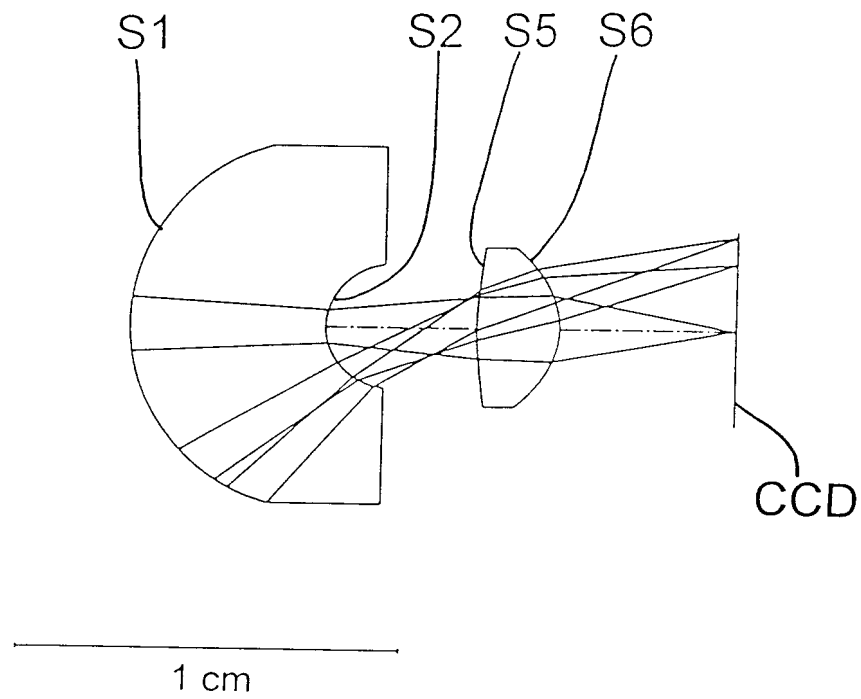


FIG. 1

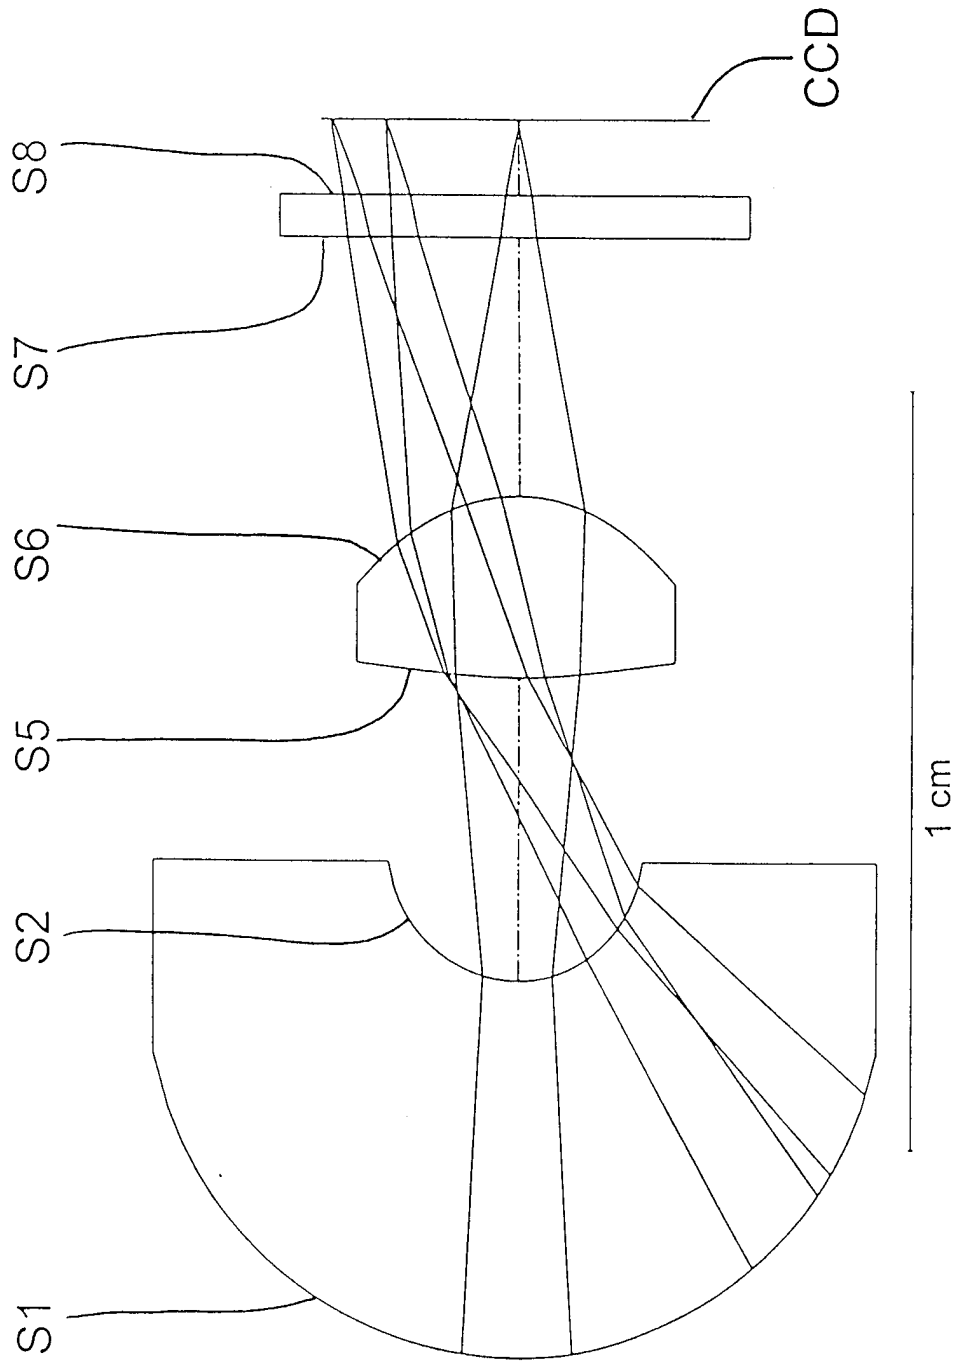


FIG. 2

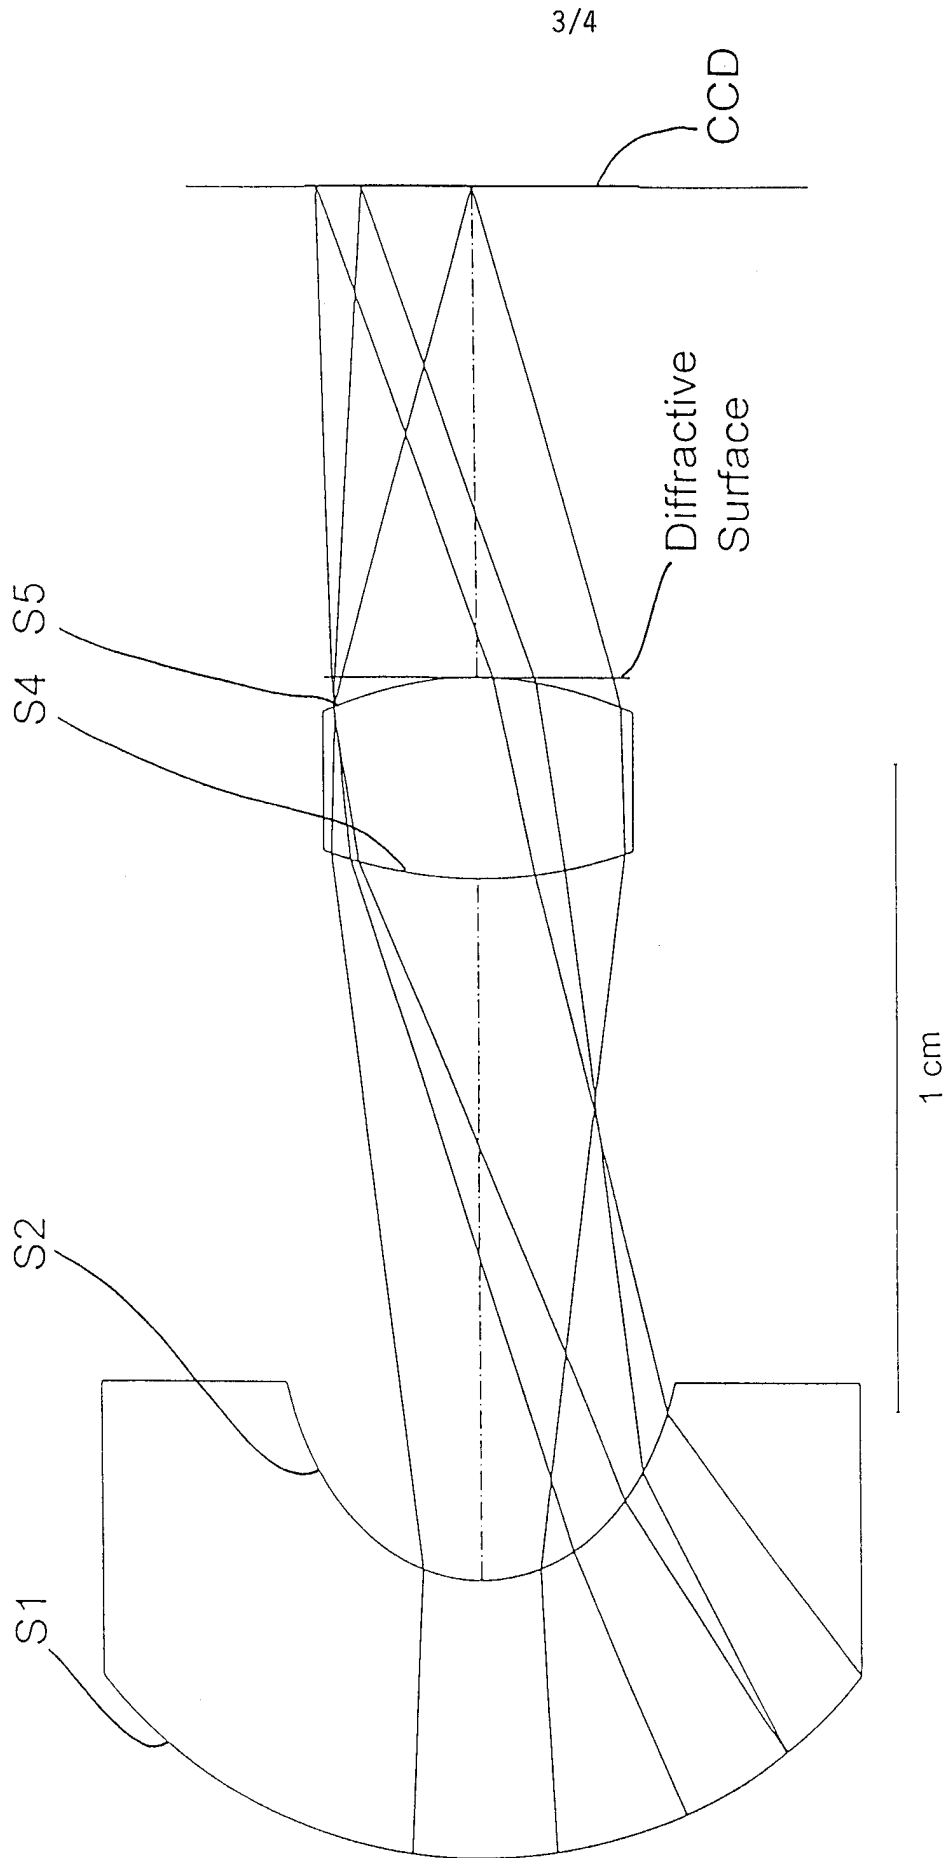


FIG. 3

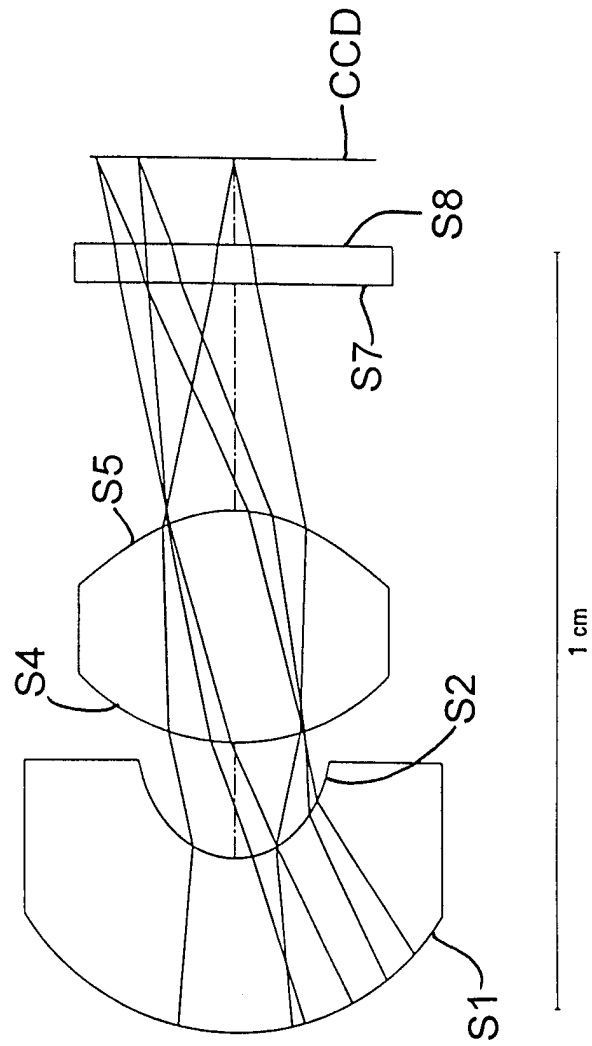


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/20144

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :GO2B 9/04  
US CL :359/793

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 359/793, 795, 709, 717, 648,649, 651; 356/300, 301

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
s negative(4a)lens and positive(4a)lens and diameter and thickness and focal(w)length and entrance(w)pupil and spherical and conic

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A , P	US 5,600,488 A(MINEFUJI, ET AL) 04 February 1997 (04/02/97), cols. 1-3 and 6-15 (all).	1-24, 26, 28, 30, 32
A , P	US 5,644,396 A (HOPKINS, II) 01 July 1997 (01/07/97), cols. 5-14 (all).	1-33

Further documents are listed in the continuation of Box C.  See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 27 JANUARY 1998	Date of mailing of the international search report 23 FEB 1998
--	---

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer ALOHA BEN <i>[Signature]</i> Telephone No. 703-308-4820
---	--