





(86) Date de dépôt PCT/PCT Filing Date: 2007/08/01
(87) Date publication PCT/PCT Publication Date: 2008/02/07
(85) Entrée phase nationale/National Entry: 2009/01/15
(86) N° demande PCT/PCT Application No.: US 2007/074980
(87) N° publication PCT/PCT Publication No.: 2008/016979
(30) Priorités/Priorities: 2006/08/02 (US60/834,919);
2007/02/08 (US60/900,182)

(51) Cl.Int./Int.Cl. *F01C 11/00* (2006.01),
F02B 53/02 (2006.01)
(71) Demandeur/Applicant:
LIQUIDPISTON, INC., US
(72) Inventeurs/Inventors:
SHKOLNIK, ALEXANDER C., US;
SHKOLNIK, NIKOLAY, US
(74) Agent: SMART & BIGGAR

(54) Titre : MOTEUR ROTATIF A CYCLE HYBRIDE
(54) Title: HYBRID CYCLE ROTARY ENGINE

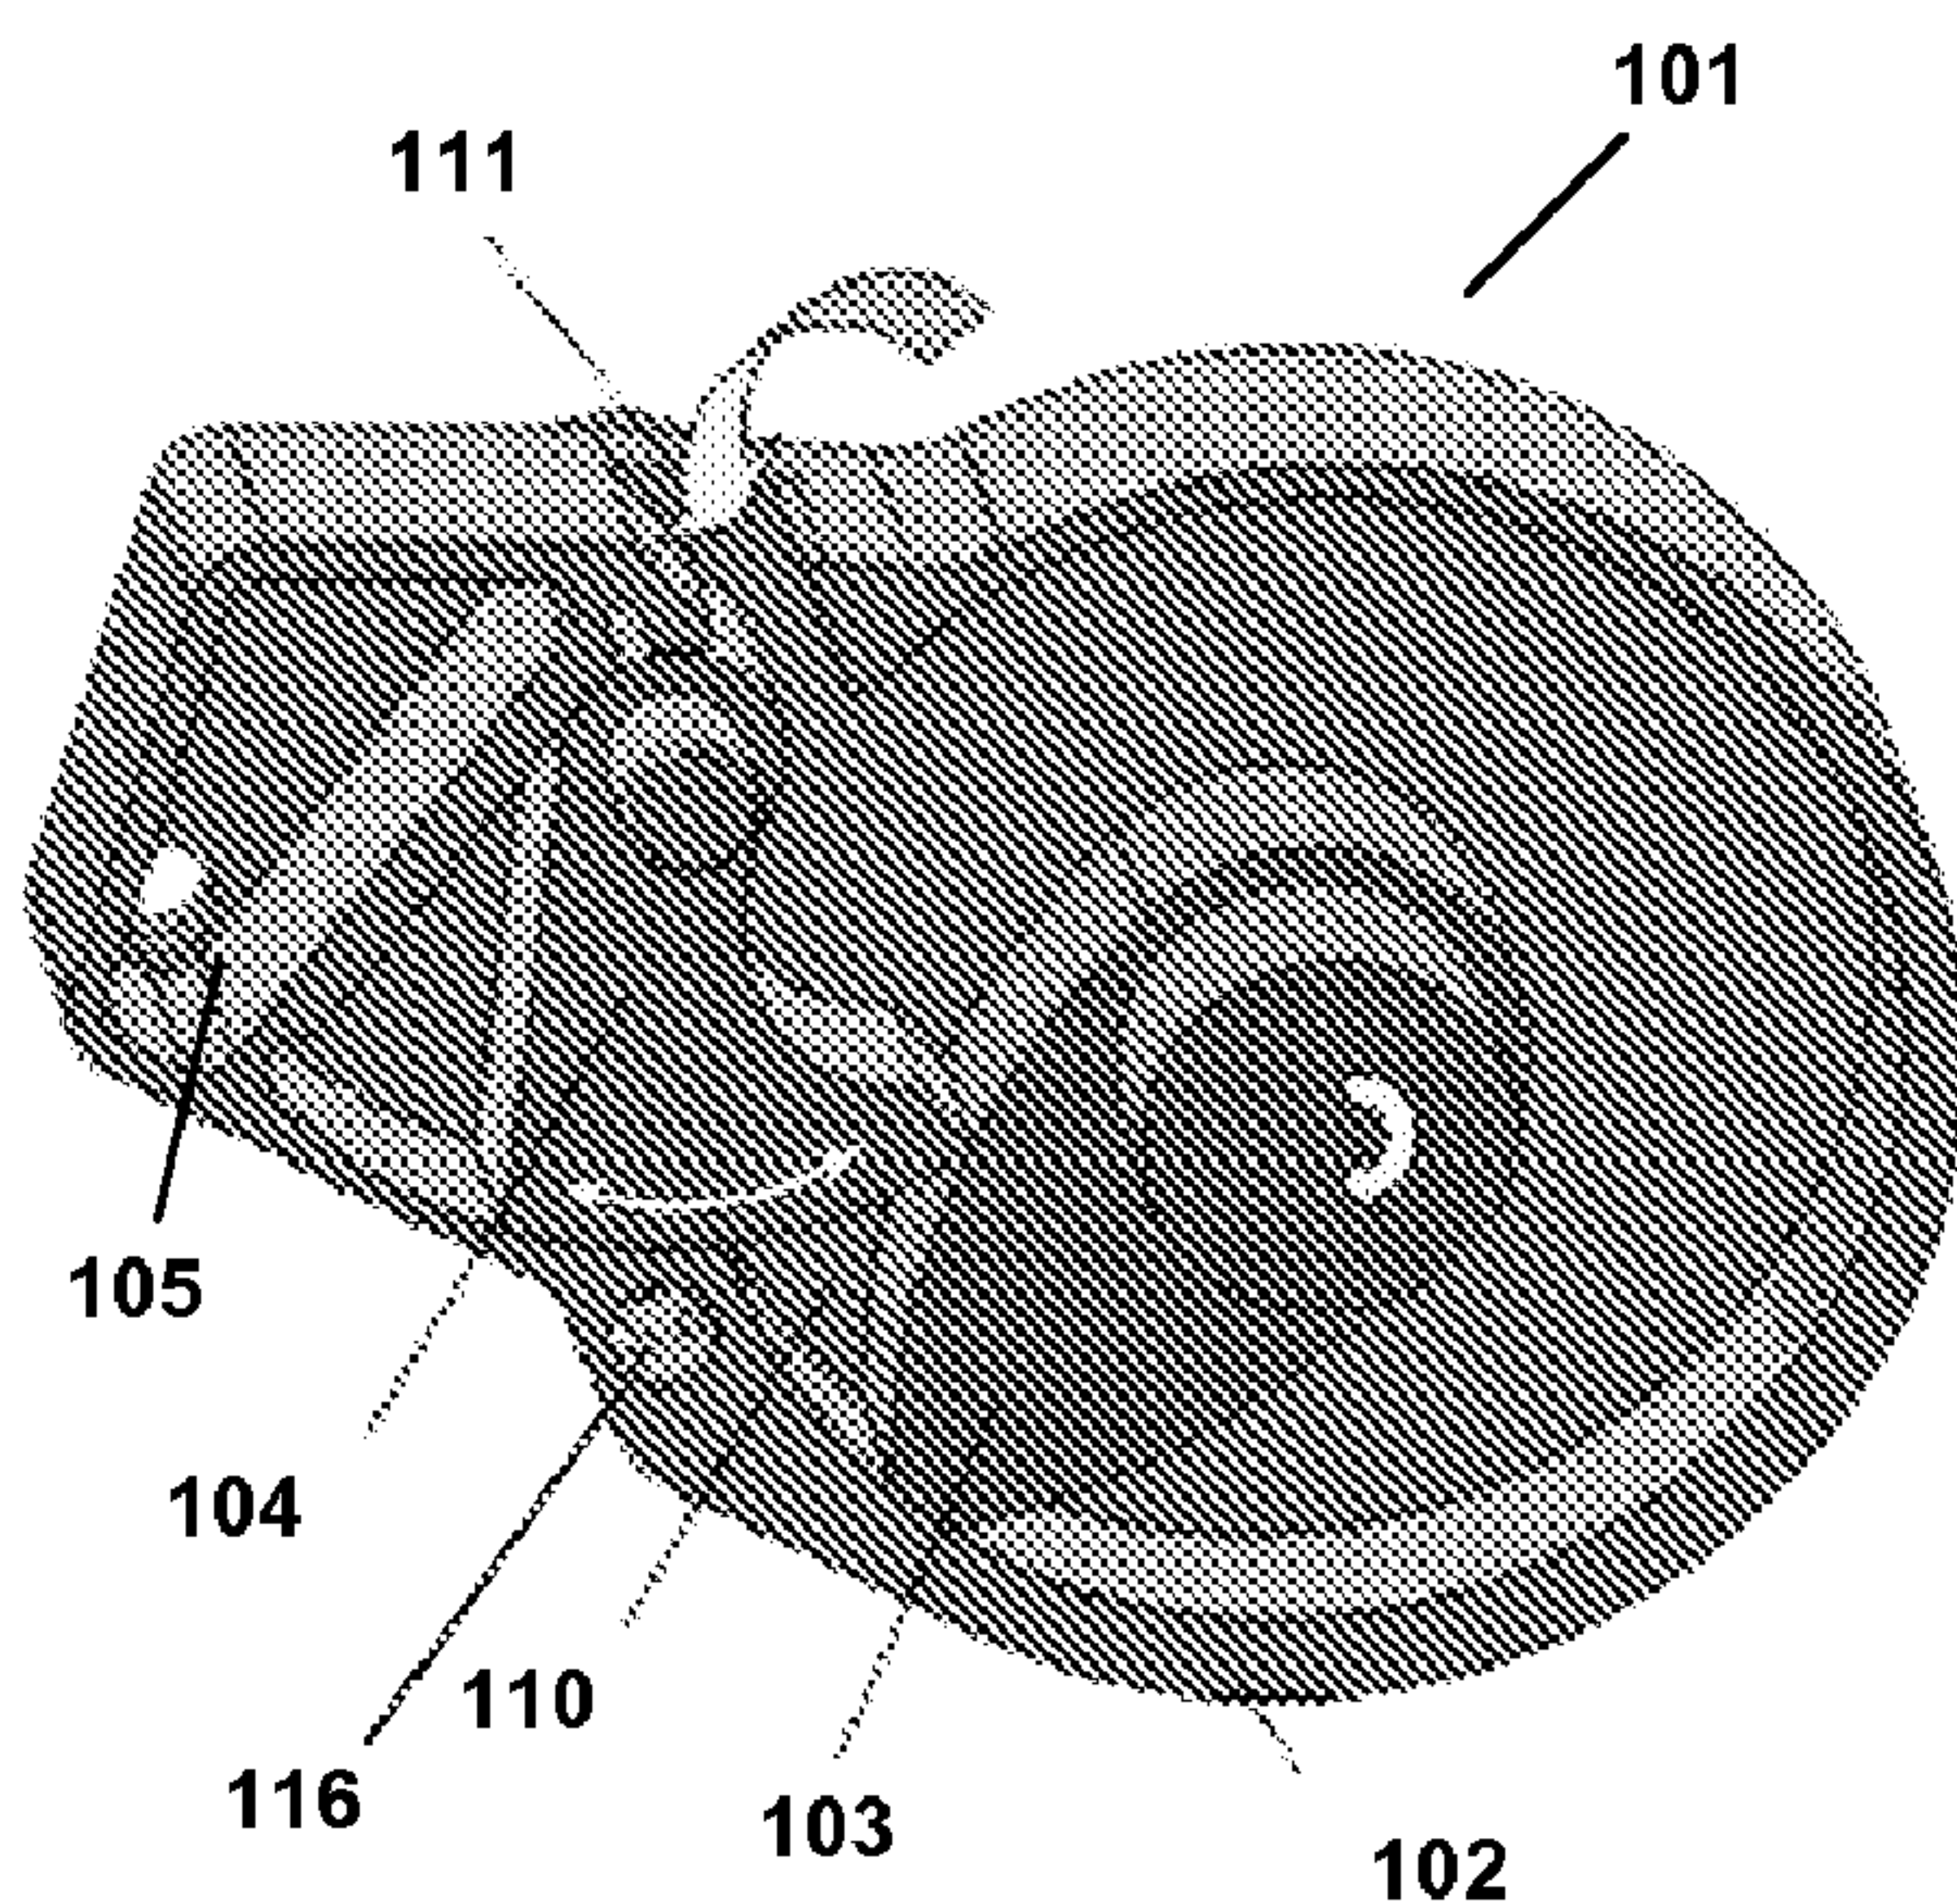

(A)

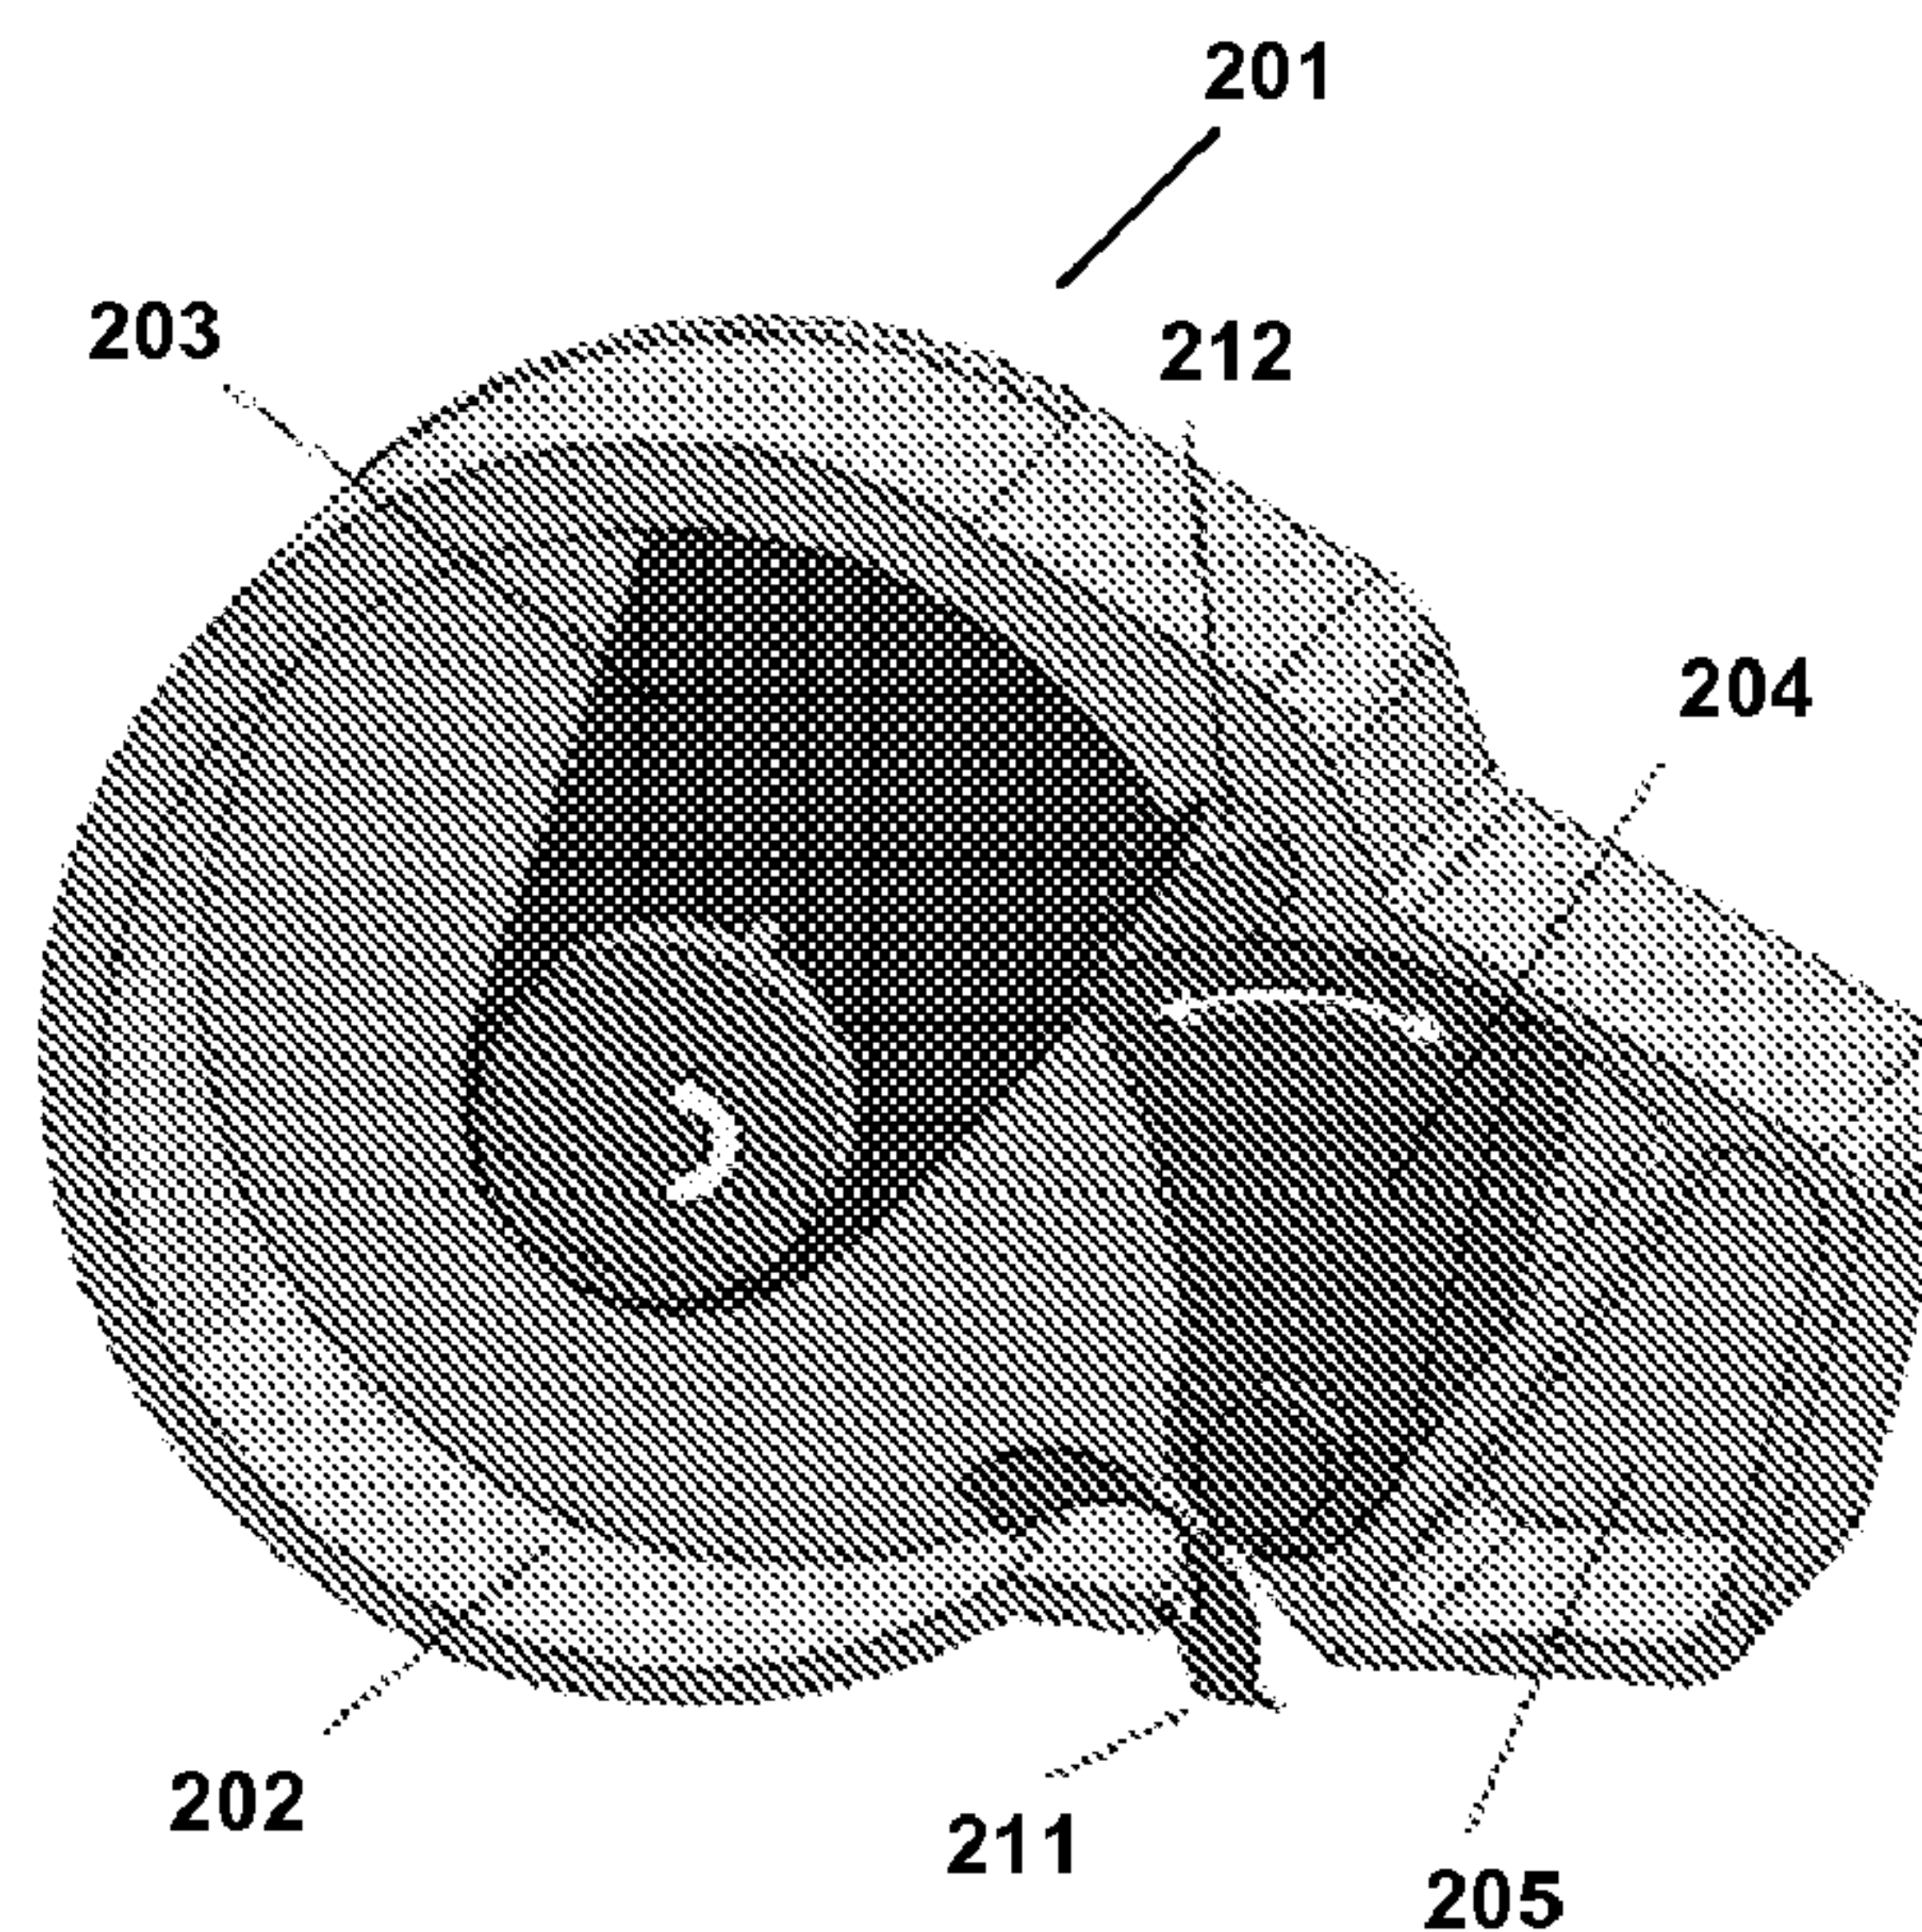

(B)

(57) **Abrégé/Abstract:**

An internal combustion engine includes in one aspect a source of a pressurized working medium and an expander. The expander has a housing and a piston, movably mounted within and with respect to the housing, to perform one of rotation and reciprocation, each complete rotation or reciprocation defining at least a part of a cycle of the engine. The expander also includes a septum, mounted within the housing and movable with respect to the housing and the piston so as to define in conjunction therewith, over first and second angular ranges of the cycle, a working chamber that is isolated from an intake port and an exhaust port. Combustion occurs at least over the first angular range of the cycle to provide heat to the working medium and so as to increase its pressure. The working chamber over a second angular range of the cycle expands in volume while the piston receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes motion of the piston relative to the housing.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 February 2008 (07.02.2008)

PCT

(10) International Publication Number
WO 2008/016979 A3

(51) International Patent Classification:

F01C 11/00 (2006.01) *F02B 53/02* (2006.01)

(21) International Application Number:

PCT/US2007/074980

(22) International Filing Date: 1 August 2007 (01.08.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/834,919 2 August 2006 (02.08.2006) US
60/900,182 8 February 2007 (08.02.2007) US

(71) Applicant (for all designated States except US): **LIQUID-PISTON, INC.** [US/US]; 77 Kirkwood Road, West Hartford, CA 06117 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHKOLNIK, Alexander, C.** [US/US]; 106r Sciarappa Street, Cambridge, MA 02141 (US). **SHKOLNIK, Nikolay** [US/US]; 77 Kirkwood Road, West Hartford, CT 06117 (US).

(74) Agents: **SUNSTEIN, Bruce, D.** et al.; Bromberg & Sunstein, LLP, 125 Summer Street, Boston, MA 02110 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

[Continued on next page]

(54) Title: HYBRID CYCLE ROTARY ENGINE

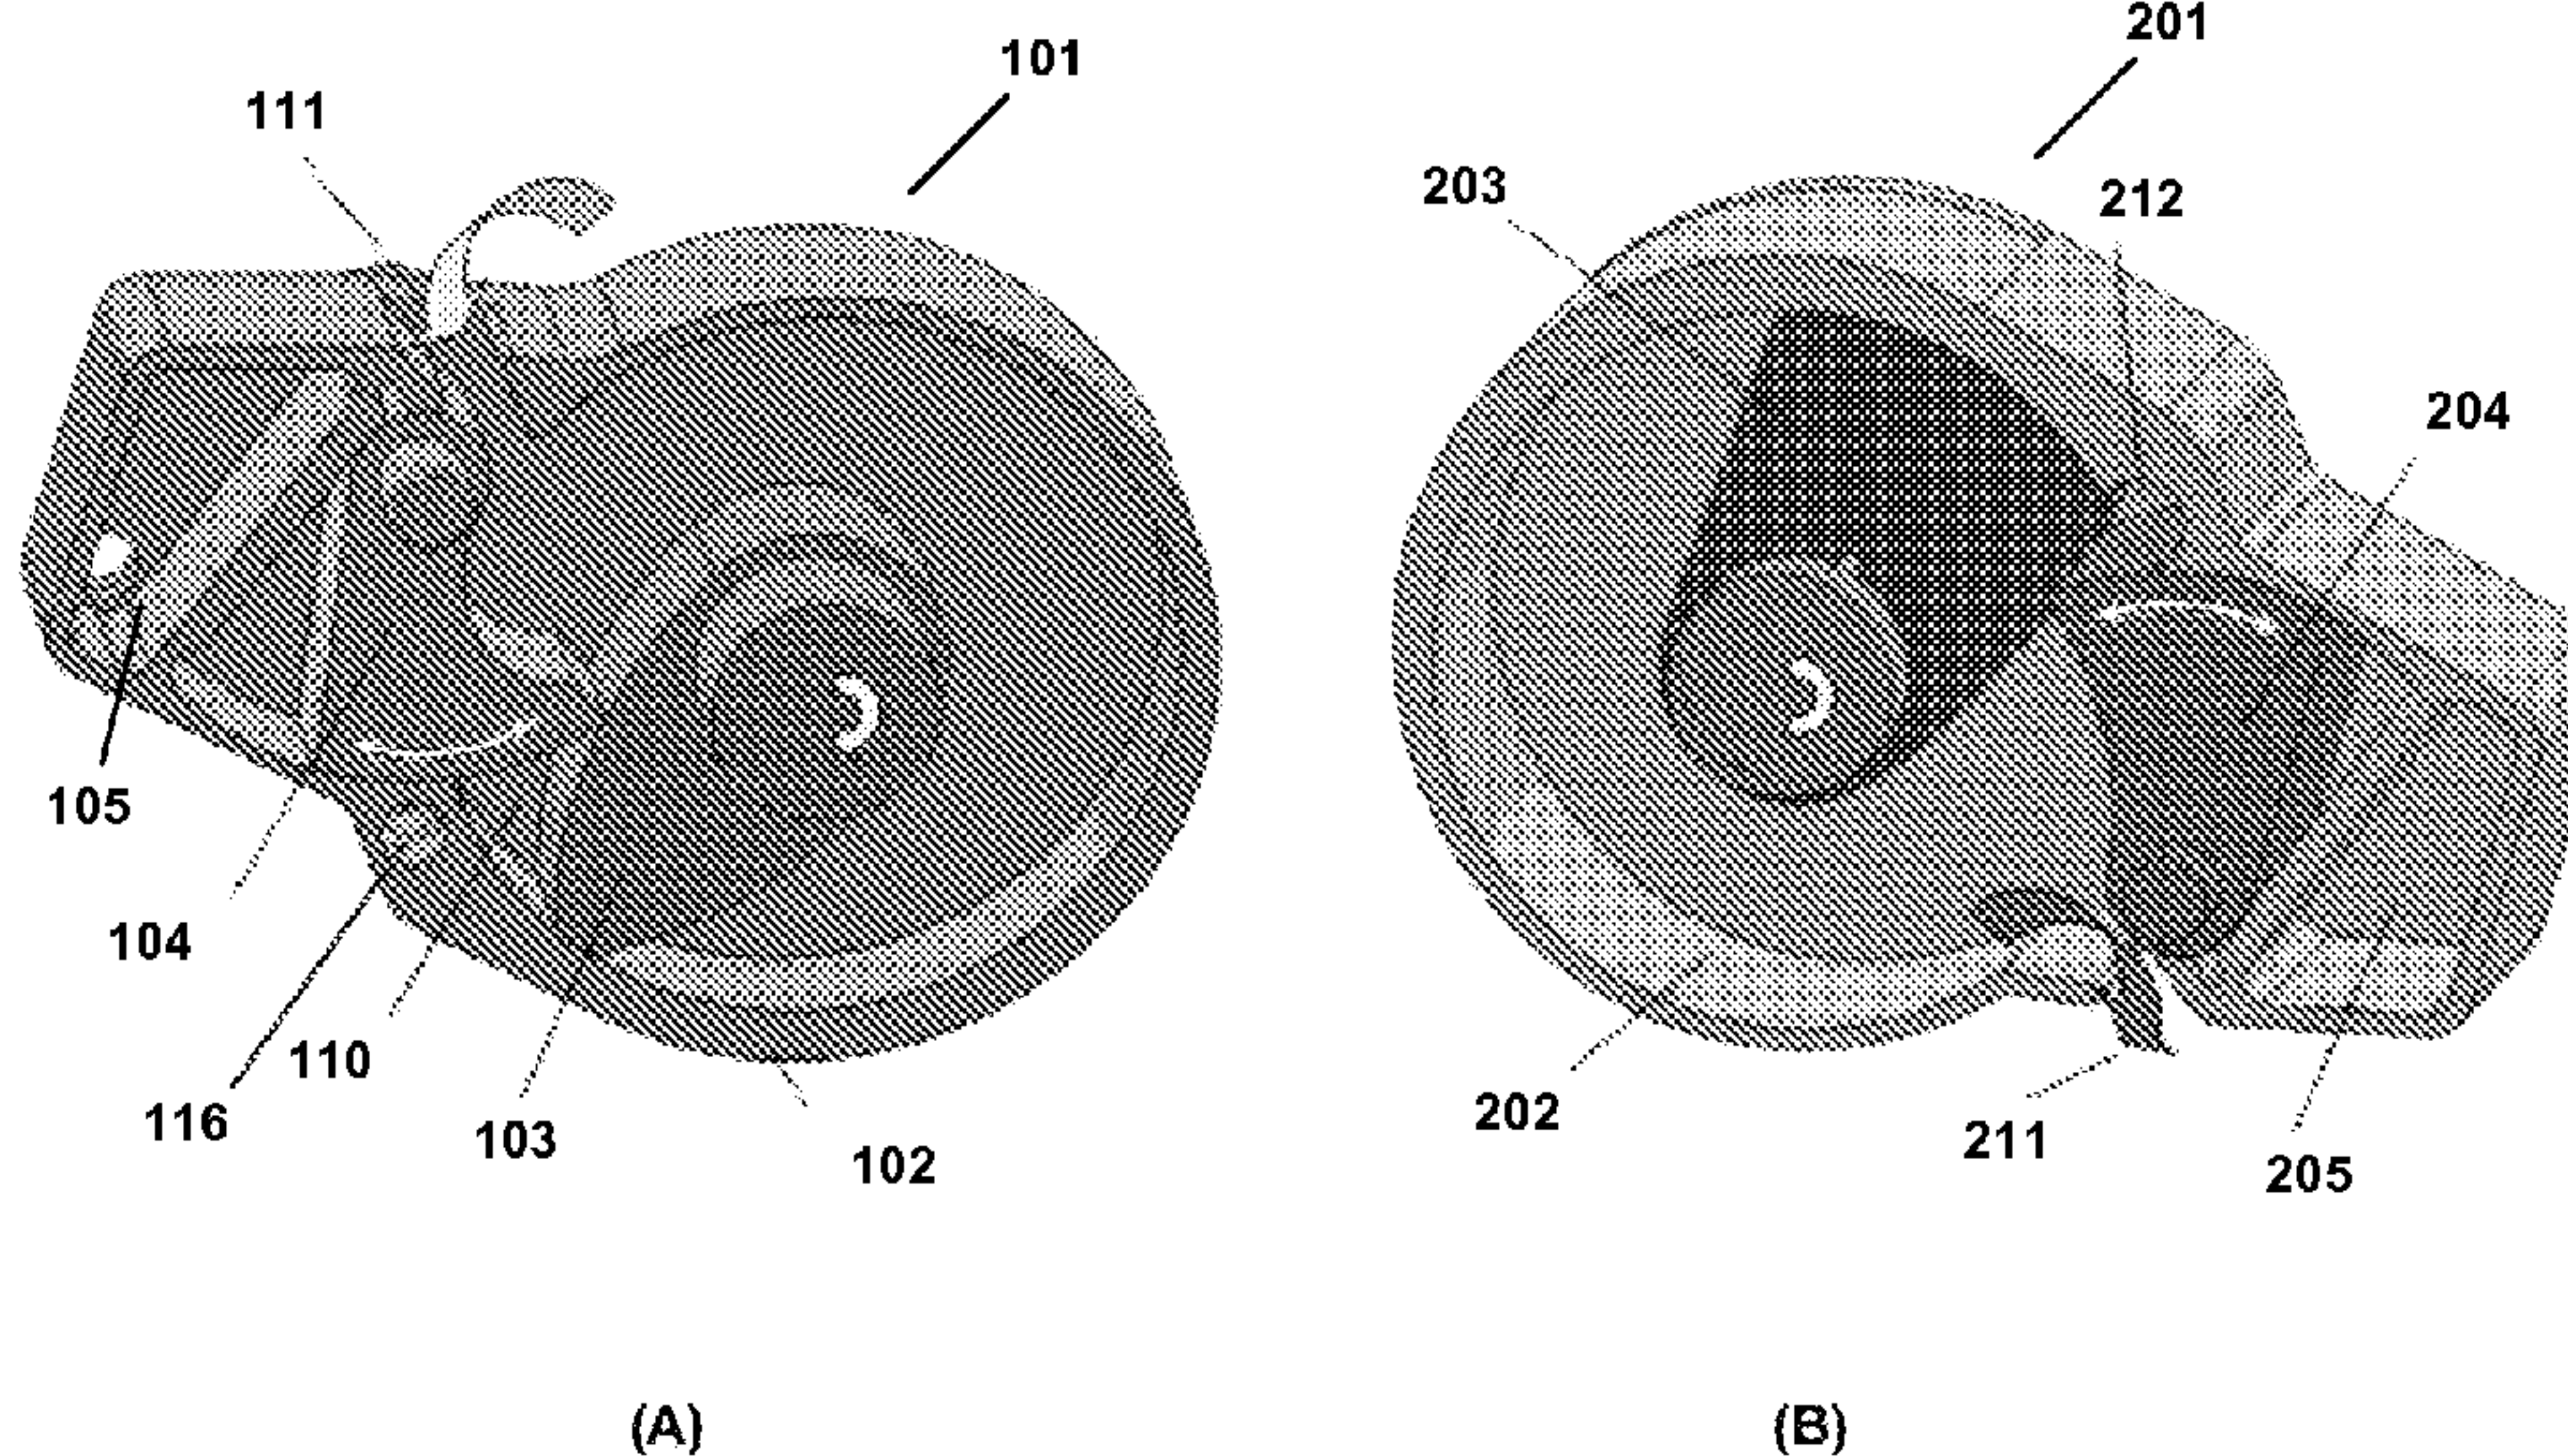

(57) Abstract: An internal combustion engine includes in one aspect a source of a pressurized working medium and an expander. The expander has a housing and a piston, movably mounted within and with respect to the housing, to perform one of rotation and reciprocation, each complete rotation or reciprocation defining at least a part of a cycle of the engine. The expander also includes a septum, mounted within the housing and movable with respect to the housing and the piston so as to define in conjunction therewith, over first and second angular ranges of the cycle, a working chamber that is isolated from an intake port and an exhaust port. Combustion occurs at least over the first angular range of the cycle to provide heat to the working medium and so as to increase its pressure. The working chamber over a second angular range of the cycle expands in volume while the piston receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes motion of the piston relative to the housing.



WO 2008/016979 A3

WO 2008/016979 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:
19 June 2008

Hybrid Cycle Rotary Engine

[0001] This application claims priority from U.S. Provisional Patent Application 60/834,919, filed August 2, 2006, and U.S. Provisional Patent Application 60/900,182, filed February 8, 2007, the contents of which are incorporated herein by reference.

Field of the Invention

[0002] The present invention relates to engines, and specifically, to hybrid cycle rotary engines.

Background Art

[0003] Excluding very large ship diesels, the typical maximum efficiency of modern internal combustion engines (ICE) is only about 30-35%. Because this efficiency is only attainable in a narrow band of loads (normally close to full load) and because most vehicles typically operate at partial load around 70% to 90% of the times, it should not be surprising that overall, or “well to wheel,” efficiency is only 12.6% for city driving and 20.2% for highway driving for typical mid-size vehicle.

[0004] There is prior art in which a Homogeneous Charge Compression Ignition (HCCI) cycle offers to improve the efficiency of internal combustion engines. While offering some advantages over existing engines, they too, however, fall short in providing high maximal efficiency. In addition, HCCI cycle engines also are polluting (particulate matter) and are difficult and costly to control because the ignition event is spontaneous and function of great many variables such as pressure, temperature, exhaust gas concentration, water vapor content, etc.

Summary of the Invention

[0005] In one embodiment, the invention provides an engine. The engine of this embodiment includes a source of a pressurized working medium and an expander. The expander includes a housing, a piston, an intake port, an exhaust port, a septum, and a heat input. The piston is movably mounted within and with respect to the housing, to perform

one of rotation and reciprocation. Each complete rotation or reciprocation defines at least a part of a cycle of the engine. The intake port is coupled between the source and the housing, to permit entry of the working medium into the housing. The exhaust port is coupled to the housing, to permit exit of expended working medium from within the housing. The septum is mounted within the housing and movable with respect to the housing and the piston so as to define in conjunction therewith, over first and second angular ranges of the cycle, a working chamber that is isolated from the intake port and the exhaust port. The heat input is coupled to the working medium at least over the first angular range of the cycle to provide heat to the working medium and so as to increase its pressure. In this embodiment the working chamber over a second angular range of the cycle expands in volume while the piston receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes motion of the piston relative to the housing.

[0006] In a further related embodiment, the piston and the septum simultaneously define, at least over the first and second angular ranges of the cycle, an exhaust chamber that is isolated from the intake port but coupled to the exhaust port. Alternatively or in addition, the source includes a pump. Alternatively or in addition, the engine also includes a fuel source coupled to the expander; in this embodiment, the working medium includes one of (i) an oxygen-containing gas to which fuel from the fuel source is added separately in the course of the cycle and (ii) an oxygen-containing-gas with which fuel from the fuel source is mixed outside the course of a cycle, and the heat input is energy release from oxidation of the fuel at least over the first angular range, so that the engine is an internal combustion engine. As a further related embodiment, the working chamber has a volume, over the first angular range, that is substantially constant. Optionally the engine also includes a turbulence-inducing geometry disposed in a fluid path between the source of pressurized working medium and the working chamber to enhance turbulence formation in the working medium. Optionally, the engine also includes a fuel valve assembly coupled between the fuel source and the expander, and a controller, coupled to the fuel valve assembly. The controller is also coupled to obtain engine cycle position information, and controller operates the fuel valve assembly to cut off flow of fuel to the expander during a portion of the cycle when fuel addition is not needed. Also optionally, the engine also

includes an air valve assembly coupled between the pressurized working medium source and the expander, and a controller, coupled to the air valve assembly. The controller is also coupled to obtain engine cycle position information, and the controller operates the valve assembly to cut off flow of the working medium to the expander during a portion of the cycle when addition of working medium is not needed. In a further related embodiment, the air valve assembly includes a check valve.

[0007] In a further related embodiment, introduction of the pressurized working medium through the intake port into the working chamber causes a temporary drop in the working medium pressure and efficient mixing of the working medium with fuel introduced into the working chamber, under conditions of continually increasing pressure of working medium in the working chamber, until temperature of the fuel-working-medium mixture reaches an ignition temperature resulting in combustion of the mixture. Optionally, such combustion causes an increase of pressure in the working medium that, in turn, causes the check valve to close automatically.

[0008] In a further related embodiment, the air valve assembly also includes a second valve coupled to the controller. Optionally, the air valve assembly also includes a latch on the check valve coupled to the controller to maintain the check valve in a closed position when directed by the controller. Optionally, the controller is configured to cause cut off of flow of fuel to the expander during some cycles of the engine so that the engine runs at less than a hundred percent duty cycle. Optionally, operation of the controller to cause cut off of fuel flow to the expander during some cycles of the engine effectuates no substantial reduction of supply of working medium to the expander, so that working medium supplied to the expander when fuel flow to the expander is cut off serves to cool the engine, and the controller is configured to operate the engine under normal conditions at less than one hundred percent duty cycle so as to provide cooling to the engine.

[0009] Also in a further related embodiment, the piston is a cam, and the septum is a cam-following rocker, engagable against the cam. Optionally, the engine includes a vessel for coupling the source to the intake port; the vessel includes a volume for storing pressurized working medium. Optionally, the vessel includes an air tank disposed in a location

external to the housing. Also optionally, the first and second angular ranges are at least partially overlapping. Alternatively, the first and second angular ranges are non-overlapping. Optionally, the working medium is an oxygen-containing gas, and the engine further includes a fuel injector disposed in a fluid path from the source to a region within the housing. Optionally, the fuel injector is disposed in the intake port.

[0010] Also in a further related embodiment, the engine is a modified axial vane rotary engine, wherein the septum is a stator ring, the piston is a vane mounted for axial reciprocation in the stator ring, and the housing is a rotary cam ring that rotates with respect to the stator ring and includes a flattened region defining a dwell period over the first angular range during which the vane is stationary with respect to stator ring.

[0011] In yet another related embodiment of an engine in accordance with the present invention,

[0012] the piston is a reciprocating blade, the septum is a hub having a circular cross section in which the piston is slidably mounted. The housing is concentrically disposed around the hub and rotates with respect to the hub and includes a first interior circular wall portion that maintains sealing contact with the hub in the course of the housing's rotation around the hub and a second wall portion contiguous with the first interior wall portion. The wall portions define, with the blade and the hub, a working chamber over the first and second angular ranges.

[0013] Another embodiment of the present invention provides a method of operating an internal combustion engine. The method of this embodiment includes using a cam, rotatably mounted in a housing, and a cam follower, mounted within the housing and movable with respect to the housing, to define, over first and second angular ranges of an engine cycle, a working chamber that is isolated from an intake port and an exhaust port. In this embodiment, the working chamber has substantially constant volume over the first angular range. The method additionally includes introducing fuel into the working chamber; introducing pressurized working medium into the working chamber over a fluid path through the intake port from a source of pressurized working medium, so as to cause a temporary drop in the working medium pressure and efficient mixing of the working

medium with fuel introduced into the working chamber, under conditions of continually increasing pressure of working medium in the working chamber. The introduction of pressurized working medium continues until temperature of the fuel-working-medium mixture reaches an ignition temperature resulting in combustion of the mixture. The combustion causes an increase in pressure in the working medium wherein the increase in pressure causes rotation of the cam. The combustion commences within the first angular range.

[0014] In a further related embodiment, the method also includes closing a valve in the fluid path between the source of pressurized working medium and the working chamber when pressure in the working chamber exceeds pressure of the source of pressurized working medium. Optionally, the method further includes operating the cam and the cam follower simultaneously at least over the first and second angular ranges of the cycle to define an exhaust chamber that is isolated from the intake port but coupled to the exhaust port.

[0015] In another embodiment, the invention provides an internal combustion engine that includes a source of a pressurized working medium and an expander. The expander includes a housing, a cam, an intake port, an exhaust port, and a cam-following rocker. The cam is rotatably mounted within and with respect to the housing. Each complete rotation of the cam defines at least a part of a cycle of the engine. The intake port is coupled between the source and the housing, to permit entry of a working medium into the housing. The exhaust port is coupled to the housing, to permit exit of expended working medium from within the housing. The cam-following rocker is mounted within the housing and movable with respect to the housing and the cam so as to define in conjunction therewith, over first and second angular ranges of the cycle, a working chamber that is isolated from the intake port and the exhaust port. The working medium includes one of (i) an oxygen-containing gas to which fuel is added in the course of the cycle and (ii) an oxygen-containing-gas-fuel mixture. At least over the first angular range, oxidation of the fuel occurs and the working chamber has a volume that is substantially constant. Such oxidation provides heat to the working medium so as to increase its pressure. The working chamber, over a second angular range of the cycle, expands in

volume while the cam receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes rotation of the cam.

[0016] In a further related embodiment, the cam and the rocker simultaneously define at least over the first and second angular ranges of the cycle an exhaust chamber that is isolated from the intake port but coupled to the exhaust port.

[0017] In another embodiment, the invention provides an internal combustion engine that includes a housing, a cam, a cam-following rocker, a combustion chamber formed in the house, an intake port, and an exhaust port. The housing has an interior region with a generally circular cross section defined by an inner surface of the housing, wherein the generally circular cross section is interrupted by a rocker mounting region. The housing also has a pair of sides. The cam is rotatably mounted in the housing, and sweeps a circular path in the interior region. The cam is in sealing contact with the sides of the housing and also, when a leading edge of the cam is not adjacent to the rocker mounting region, is in sealing contact with the inner surface of the housing. The cam-following rocker is mounted in the rocker mounting region, in sealing contact with the sides of the housing, and, at least when the leading edge of the cam is not adjacent to the rocker mounting region, is in sealing contact with the cam. The rocker has a seated position defining generally, when a leading edge of the cam is adjacent to the rocker mounting region, a continuation of the circular cross section of the housing. The rocker is pivoted at a pivot end to move at a free end generally radially with respect to the circular path of the cam, so that the free end of the pivot reciprocates between the seated position and a maximum unseated position. The rocker completes a full reciprocation cycle when the cam completes a revolution around the working region. The combustion chamber is formed in the housing proximate to the rocker mounting region adjacent to the free end of the rocker, and has an opening. The opening is occluded over a first angular range of rotation of the cam. The inlet port is coupled to the combustion chamber for providing pressurized working medium. The working medium includes one of (i) an oxygen-containing gas to which fuel is added within or before the first angular range and (ii) an oxygen-containing-gas-fuel mixture. Combustion occurs within the first angular range so as to provide substantially constant volume combustion in the combustion chamber. The

cam and the rocker are configured to provide an expansion region over a second angular range when the arcuate opening is not occluded. The exhaust port is formed in the housing proximate to the rocker mounting region adjacent to the free end of the rocker, for removing expended working medium.

[0018] In yet another embodiment, the invention provides an internal combustion engine that includes a housing, a piston, an intake port, an exhaust port, and a cam. The piston is reciprocally mounted within and with respect to the housing. Each complete reciprocation of the piston defines at least a part of a cycle of the engine, and each stroke of the piston defines its displacement in a working chamber of the housing. The intake port is coupled between the pump and the working chamber, to permit entry of the working medium into the working chamber. The working medium includes one of (i) an oxygen-containing gas to which fuel is added in the course of the cycle and (ii) an oxygen-containing-gas-fuel mixture. The exhaust port is coupled to the working chamber, to permit exit of expended working medium from within the working chamber. The cam is coupled to the piston, and defines displacement of the piston as a function of angular extent of the cycle. In this embodiment, at least over a first angular range of the cycle, oxidation of the fuel occurs and the cam has a shape that causes substantially no displacement of the piston, so that the working chamber has a volume that is substantially constant. Such oxidation provides heat to the working medium so as to increase its pressure. The working chamber, over a second angular range of the cycle, expands in volume while the piston receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes displacement of the piston.

[0019] In another embodiment, the invention provides a virtual piston assembly that includes a body including at least one fluidic diode and a member rotatably mounted within the body. The member includes at least one fluidic diode. The member is disposed in relation to the body, and the body has a correspondingly shaped interior, so as to form a virtual chamber having a volume that varies with rotation of the member.

[0020] In a further related embodiment, the member is a disk. In another related embodiment, the member is cylindrical. In yet another related embodiment, the member is

conical.

[0021] In another embodiment, the invention provides a pump that includes a housing, a cam, an intake port, an exhaust port, and a cam following rocker. The cam is rotatably mounted within and with respect to the housing. Each complete rotation of the cam defines at least a part of a pumping cycle. The intake port is coupled between the pump and the housing, to permit entry of a fluid. The exhaust port is coupled to the housing, to permit exit of pumped fluid from within the housing. The cam-following rocker is mounted within the housing and movable with respect to the housing and the cam so as to define in conjunction therewith, a working chamber that over a first angular range of the cycle is isolated from the from the intake port and from the exhaust port.

[0022] In a further related embodiment, the pump is a compressor, and the working chamber is a compression chamber. Optionally, the compression chamber over a second angular range remains isolated from the intake port but coupled to the exhaust port. Optionally, the rocker and the cam simultaneously define at least over the first angular range an intake chamber that is isolated from the exhaust port and coupled to the intake port.

[0023] In yet another embodiment, the invention provides an internal combustion engine that includes a source of a pressurized working medium, a fuel source, and an expander. The fuel source is optionally a pump. The expander includes a housing, a piston an intake port, an exhaust port, and a septum. The piston is movably mounted within and with respect to the housing, and performs one of rotation and reciprocation. Each complete rotation or reciprocation defines at least a part of a cycle of the engine. The intake port is coupled between the source and the housing, to permit entry of the working medium into the housing. Optionally, a turbulence-inducing geometry is disposed in a fluid path between the source of pressurized working medium and the working chamber to enhance turbulence formation in the working medium. The exhaust port is coupled to the housing, to permit exit of expended working medium from within the housing. The septum is mounted within the housing and movable with respect to the housing and the piston so as to define in conjunction therewith, over first and second angular ranges of the cycle, a

working chamber that is isolated from the intake port and the exhaust port. Also the working chamber has a volume, over the first angular range, that is substantially constant, and the piston and the septum simultaneously define at least over the first and second angular ranges of the cycle, an exhaust chamber that is isolated from the intake port but coupled to the exhaust port. The working medium includes one of (i) an oxygen-containing gas to which fuel from the fuel source is added separately in the course of the cycle and (ii) an oxygen-containing-gas with which fuel from the fuel source is mixed outside the course of a cycle. The fuel undergoes combustion in the working chamber at least over the first angular range. The combustion provides heat to the working medium so as to increase its pressure. The working chamber over a second angular range of the cycle expands in volume while the piston receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes motion of the piston relative to the housing. Optionally the embodiment includes a fuel valve assembly coupled between the fuel source and the expander. Also optionally, the embodiment includes an air valve assembly coupled between the pressurized working medium source and the expander. The air valve assembly optionally includes a check valve. Optionally, the embodiment includes a controller, coupled to the optional fuel valve assembly and to the optional air valve assembly. The controller is also coupled to obtain engine cycle position information, and operates the optional air valve assembly to cut off flow of the working medium to the expander during a portion of the cycle when addition of working medium is not needed and operates the optional fuel valve assembly to cut off flow of fuel to the expander during a portion of the cycle when fuel addition is not needed. Also optionally, the controller is configured to cause cut off of flow of fuel to the expander during some cycles of the engine so that the engine runs at less than a hundred percent duty cycle. Also optionally, operation of the controller to cause cut off of fuel flow to the expander during some cycles of the engine effectuates no substantial reduction of supply of working medium to the expander, so that working medium supplied to the expander when fuel flow to the expander is cut off serves to cool the engine; in such a case the controller is configured to operate the engine under normal conditions at less than one hundred percent duty cycle so as to provide cooling to the engine. Optionally the piston is a cam, and the septum is a cam-following rocker, engagable against the cam. Optionally introduction of the pressurized working medium through the intake port into the working chamber causes

a temporary drop in the working medium pressure and efficient mixing of the working medium with fuel introduced into the working chamber, under conditions of continually increasing pressure of working medium in the working chamber, until temperature of the fuel-working-medium mixture reaches an ignition temperature resulting in combustion of the mixture; such combustion causes an increase of pressure in the working medium that, in turn, causes the check valve to close automatically.

Brief Description of the Drawings

[0024] Figure 1 shows an exemplary schematic depiction of a hybrid-cycle rotary engine (HCRE).

[0025] Fig. 2 is a three dimensional representation of an HCRE, according to one specific embodiment.

[0026] Fig. 3 shows various details of the internal structure of an HCRE.

[0027] Fig. 4 shows various aspects of the internal assembly and functions of the compressor and the expander in an HCRE.

[0028] Fig. 5A-I shows the operation of a compressor over one full revolution of the cam.

[0029] Fig. 6A-I shows the operation of an expander over one full revolution of the cam.

[0030] Fig. 7 shows a cam passing across the edge of a rocker.

[0031] Fig. 8 shows a groove cam that can be used to regulate the action of a rocker in an alternate embodiment.

[0032] Fig. 9 gives the layout of a two-sided cam that can be used in an alternate embodiment.

[0033] Fig. 10 gives the layout of a dual-rocker arrangement that can be used in an

alternate embodiment.

[0034] Fig. 11 is a three dimensional representation of an HCRE, according to an alternate embodiment using a sliding blade.

[0035] Fig. 12 shows the internal structure of an expander in an HCRE, according to an alternate embodiment using a sliding blade.

[0036] Fig. 13A-C shows the functional layout of an expander in an HCRE, according to an alternate embodiment using a sliding blade.

[0037] Fig. 14A-H shows the operation of an expander in an HCRE over one full revolution of the hub, according to an alternate embodiment using a sliding blade.

[0038] Fig. 15A-E shows an expander, according to several alternate embodiments.

[0039] Fig. 16A-B shows an expander, according to an alternate embodiment with pivoting blades.

[0040] Fig. 17 shows an expander, according to an alternate embodiment based on an axial vane concept.

[0041] Fig. 18A-F shows the operation of an expander over a full cycle, according to an alternate embodiment based on the axial vane concept.

[0042] Fig. 19 shows an HCRE according to an alternate embodiment based on a concealed blade technology.

[0043] Fig. 20A-E shows several modes of sealing, as practiced in various embodiments.

[0044] Fig. 21A-F shows an implementation of water sealing, as practiced in an alternate embodiment using a sliding blade.

[0045] Fig. 22A-C shows implementations of sealing techniques, as practiced in alternate embodiments.

[0046] Fig. 23A-C shows several variations on an alternate design for a compressor.

[0047] Fig. 24 shows an alternate design for a compressor using two blades and one chamber.

[0048] Fig. 25 shows an alternate design for implementing the HCRE cycle.

[0049] Fig. 26 shows a technique for recycling heat from exhaust gases, according to an alternate embodiment.

[0050] Fig. 27A-B shows the sealing arrangement according to an alternate embodiment using a sliding blade.

[0051] Fig. 28 is a graph comparing the pressure-volume characteristics of the high-efficiency hybrid cycle to the Otto and Diesel cycles.

[0052] Fig. 29 is a graph comparing the pressure-volume characteristics of the homogenous charge stimulated ignition cycle to the Otto and Diesel cycles.

[0053] Detailed Description of Specific Embodiments

[0054] Definitions. As used in this description and the accompanying claims, the following terms shall have the meanings indicated, unless the context otherwise requires:

[0055] “Sealing contact” of two members shall mean that the members have sufficient proximity directly, or via one or more sealing components, so as to have acceptably small leakage between the two members. A sealing contact can be intermittent when the members are not always proximate to one another.

[0056] A port is “coupled” to a chamber when at least some of the time during a cycle it is in communication with the chamber.

[0057] A full “reciprocation cycle” of a rocker that reciprocates between seated position and a maximum unseated position includes 360 degrees of travel of the main shaft, wherein travel from one of such positions to the other of such positions amounts to 180 degrees of travel of the main shaft.

[0058] The “working medium” describes the various substances which may usefully injected into the working chamber. In the case of an internal combustion engine, “working medium” includes an oxygen-containing gas either by itself (in which case fuel is added in the course of a cycle) or mixed with fuel outside the course of a cycle. The oxygen-containing gas may include air or oxygen, alone or mixed, for example, with one or more of water, superheated water, and nitrogen.

[0059] The “working chamber” of an engine relates collectively to the portions thereof (i) wherein a heat input is received (being a combustion chamber in the case of an internal combustion engine) and (ii) wherein expansion caused by increased pressure on account of delivery of heat is used to drive a piston that reciprocates or rotates in the engine.

[0060] Fig. 1 is a schematic representation of a hybrid-cycle rotary engine (HCRE) **1000** according to one embodiment of the present invention. A compressed air module (CAM) **100** takes atmospheric air **303**, compresses it to relatively high pressures, (optionally) stores it in an external air tank **107**, conditions it (i.e. regulates pressure and/or temperature in a combination distributor/conditioner **109**), and sends it, via air valve assembly **118**, to a power generation module (PGM) **200**. The air valve assembly includes a one-way check valve to prevent back flow of air during combustion. Controller **319** is coupled to the air valve assembly to maintain the air supply in an off position during the portion of the cycle when air addition is not needed. The controller acts on the assembly by either a second valve or by latching the check valve in a closed position.

[0061] PGM **200** receives compressed air **305** from CAM **100** and fuel from fuel supply

304. PGM **200** combusts fuel under essentially constant volume conditions and expands the combustion products in an expander **201** (shown in Figure 2), thereby converting the thermal energy of the combustion products into mechanical power **308**. This mechanical power **308** is used first to drive CAM **100** and the remaining work **308** is used by an external load **309**. There is the option for water **306** to enter PGM **200** and cool, seal, and lubricate PGM **200**, as well as to suppress NO_x formation. An optional condensing unit **300** condenses steam contained in exhaust gas **307** and returns condensed water **306** to the water loop **317**. We show optional paths for entry of fuel from fuel supply **304**. The fuel may be injected directly into the combustion chamber in the course of a cycle, separately from compressed air **305**, in which case the left-hand dotted arrow applies to the fuel path. Alternatively, the fuel may be mixed with the compressed air **305** outside the course of a cycle before being introduced into the combustion chamber, in which case the right-hand dotted arrow applies to the fuel path. It is also possible to use both of the methods above by admitting a premixed air-fuel mixture into the combustion chamber and also injecting directly into the combustion chamber the same or different fuel.

[0062] Entry of fuel from fuel supply **304** is gated by fuel valve assembly **318**. If fuel takes the left-hand dotted path just described, then the fuel valve assembly **318** may be implemented as an injector valve. In addition, the controller **319** causes operation of the fuel valve assembly **318** to maintain the fuel supply in an off position during the portion of the cycle when fuel addition is not needed. Additionally, the controller **319** is used to keep fuel cut off during “off-cycles” described below in connection with the “digital mode of operation”. The controller **319** has a variety of engine parameter and user inputs. It obtains cycle position information from a location such as the output shaft of the engine and uses this position information to control the fuel valve assembly **318**. Furthermore, the controller obtains user input as to desired power (which in the case of the engine’s being used in an automobile corresponds to accelerator pedal position), the engine speed, the engine wall temperature, as well as other optional parameters, to decide whether or not the cycle should fire (on) or be skipped (off) and whether the fuel only should be cut off, or both fuel and air cut off. Alternatively or in addition, the controller is configured to determine the amount of fuel to be supplied in each cycle.

[0063] The controller may operate totally mechanically—control of fuel injection in early diesel engines was achieved with total mechanical control, for example—and analogous techniques may be employed in this different context in order to achieve the necessary control. Alternatively, the controller may use a microprocessor operating with a suitable program, in a manner known in the art, to provide electronic control of the valve assembly, and the valve-assembly under such circumstances may include, for example, a solenoid-operated valve that is responsive to the controller.

[0064] The structure of engine **1000** is now described with reference to Figures 2-4. CAM **100** consists of a compressor **101**, which takes atmospheric air **303** and compresses it to relatively high pressures and sends it through a 3-way valve **108** to either a small, optional, air buffer **105** or an optional external air tank **107**. If optional air buffer **105** is not used, air is sent directly to PGM **200**. The volume of air buffer **105** is typically 10 to 30 times the volume of a corresponding PGM combustion chamber **212** (described below), i.e. of sufficient volume to support supplying approximately constant pressure to the PGM combustion chamber **212**. CAM **100** and PGM **200** may or may not be physically located within the same engine housing walls. CAM **100** and/or PGM **200** could be disconnected as needed to recover braking energy or to increase the instantaneously available power.

[0065] Figure 2 shows a single body for both compressor **101** and expander **201**. Compressed air **305** exiting from external air tank **107** is optionally conditioned by a conditioner **106**, which can reduce the pressure to optimal value and increase/decrease the temperature of the compressed air **305**. This temperature increase could be accomplished by using a heat exchanger, by exchanging heat from the exhaust of PGM or by means of special heater. Compressor **101** can be of the rotary, piston, scroll or any other type as long as it is efficient and capable of supplying high compression ratios, on the order of 15 to 30 or above, preferably in a single stage. The exemplary embodiment of this engine will include compressor **101** that works on the same principle as expander **201**.

[0066] Compressor **101**, which is the main element of CAM **100**, consists of the following components, shown in Figures 3 and 4: a compressor housing **102**, a piston-type compressor cam (C-cam) **103**, a compressor rocker (C-rocker) **104** serving as a septum, a

shaft **250**, and bearings **207**. Housing **102** contains an air intake port **111** and an exhaust port **116**. Bearings **207** could be implemented as “fluid film” (hydrostatic, hydrodynamic or air) bearings, or as permanently lubricated ceramic bearings or conventional bearings. The spaces between housing **102**, a separating plate **301** (Figures 3-4), C-cam **103** and C-rocker **104** define compressor chambers.

[0067] There are two types of chambers in compressor **101**, which are now described with reference to Figure 5. Intake chamber **112** is defined between C-rocker **104**, C-cam **103**, and intake port **111** (see Figure 5A). Compression chamber **110** is defined between C-rocker **104**, C-cam **103**, and exhaust port **116** (see Figure 5A). PGM **200** in this case is simply expander **201**, consisting of: an expander housing **202**, an expander cam (E-cam) **203**, an expander rocker (E-rocker) **204**, a shaft **250**, bearings **207**, and valves (not shown) admitting air from compressor **101**, air buffer **105**, or external air tank **107**.

[0068] The spaces between housing **202**, separating plate **301** (Figures 3-4), E-cam **203** and E-rocker **204** define various expander chambers. (In embodiments described below, the E-rocker is a cam follower, and is pivotally mounted. Alternatively the rocker may be slidably mounted.) There are three types of chambers in engine **1000**, which are now described with reference to Figure 6. Combustion chamber (CbC) **212** is defined as an enclosed, minimal and constant volume chamber space (see Figures 6A-B). Expansion chamber **210** is defined as an enclosed expanding volume chamber space. The minimal expansion volume is equal to combustion chamber volume, while maximum expansion volume occurs at the moment when pressure within expansion chamber **210** drops to approximately ambient (atmospheric) pressure (Figure 6H). Exhaust chamber **213** is defined as open to ambient air, and is a contracting volume chamber space.

[0069] The operation of compressor **101** is now described with reference to Figures 4 and 5. At the beginning of the cycle, compression chamber **110** is formed between C-cam **103** and C-rocker **104** (and housing **102** and separating plate **301**, Fig. 3) (Figure 5A). (In embodiments described below, the C-rocker is a cam follower, and is pivotally mounted. Alternatively the rocker may be slidably mounted.) C-cam **103** rotates within housing **102** such that the size of compression chamber **110** decreases (Figures 5B-C). Once the air in

compression chamber **110** has reached a certain level of compression, the air starts to transfer through exhaust port **116** into air buffer **105**, external air tank **107**, or expander **201** (Fig. 5D). As C-cam **103** continues to rotate, it passes exhaust port **116**, and the transfer of air completes (Figure 5E). From this point, no air is left in compression chamber **110** until the cycle completes and a new compression chamber **110** is formed (Figures 5G-I). Also note that simultaneously with compression, intake occurs in intake chamber **112**. This helps to make engine **1000** very compact.

[0070] The operation of expander **201** is now described with reference to Figure 6. Combustion chamber **212** is formed between E-cam **203** and housing **202** (and separating plate **301**). Rotating E-cam **203** continues to define combustion chamber **212** at essentially constant volume (Figures 6A-B). The working medium, e.g., compressed air **305** and fuel from fuel supply **304**, is injected into combustion chamber **212**, spontaneous ignition occurs, combustion starts and continues during the existence of combustion chamber **212** until substantially complete. In some embodiments, some amount of combustion may continue during the expansion phase, albeit at some loss of efficiency. The shaft RPM and the length of large diameter circular segment on E-cam **203** define how long combustion chamber **212** exists. At the moment shown in Figure 6B, combustion chamber **212** transforms into expansion chamber **210**. As E-cam **203** rotates in response to the force exerted by the combusted gases, expansion chamber **210** expands, cooling the gases and reducing pressure in expansion chamber **210** (Figures 6C-H). Once E-cam **203** passes the opening of exhaust port **211**, expansion ends, and exhaust begins for the combustion gases combusted in this cycle. Note that simultaneously with the expansion stroke, the combusted gases from the previous expansion stroke are in an exhaust chamber **213** coupled to exhaust port **211** to permit exhaust of the combusted gases. As with the similar nature of compressor **101**, again, this contributes to compactness of engine **1000**.

[0071] When air **305** is injected into combustion chamber **212** from air buffer **105**, it is initially decompressed (and cooled) and then recompressed (and re-heated) when pressure in the combustion chamber **212** reaches the pressure in air buffer **105**. Due to the large pressure difference between the air buffer **005** and compression chamber **212** (which is

initially at ambient pressure), the air **305** entering the combustion chamber **212** forms a supersonic swirl which rotates at high rpm. Turbulence formation may be enhanced by use of suitable structures built into the combustion chamber. Description of a Hilsch vortex tube used in carburetor design appears in US patent 2650582, which is hereby incorporated herein by reference. For example, vortex tubes having approximately the same geometry as the combustion chamber **212** have been known to support vortices as high as 1,000,000 rpm, and the input pressure into a vortex tube is only 100 psi as compared to 800-900 psi for an HCRE. Vortex formulation increases turbulence and enhances mixing. The fuel from fuel supply **304** injected simultaneously with the compressed air **305** into a low pressure environment will be dragged into compression chamber **212** by the air swirl, mix very well with the air and evaporate very quickly. When temperature and pressure reaches the auto-ignition point, fuel **304** will ignite within the whole volume (similar to an HCCI engine). At this point, intake of the working medium of compressed air **305** and fuel from fuel supply **304** stops.

[0072] As explained above, various chambers are formed between the housings **102**, **202**, separating plate **301**, cams, **103**, **203** and rockers **104**, **204**. It is advantageous for efficient operation of engine **1000** to have tight seals between all these components. Wankel-type face and apex seals **310**, as shown in operation in Figure 7, could be used on the cams **103**, **203** and rockers **104**, **204**, while fluidic-type and liquid seals are also feasible. It should be noted that the net force on the surface of the rockers **104**, **204** when exposed to high pressure gases passes through the center of rotation of the rockers **104**, **204** and, therefore, does not influence the motion of the rockers **104**, **204**. Therefore, the rockers **104**, **204** should be constantly pressed against the cams **103**, **203** to eliminate leakage of gases from the chambers. The simplest way to apply pressure against the rockers **104**, **204** is by a suitable torsion or constant force spring. Or if Wankel-type apex seals are used, the rockers **104**, **204** should be kept relatively small—on the order of 0.001” to 0.003” separation with the cams **103**, **203**. Alternatively, controlled air pressure on the opposite side of the rockers **104**, **204**, or controlled motion of the rockers **104**, **204** by a separate electric solenoid or motor or external cam could be used as well. This may present an opportunity to have the rockers **104**, **204** exert very little pressure on the cams **103**, **203**, thus reducing or eliminating wear.

[0073] Engine **1000** may be cooled by conventional means, i.e., passing water **306** through stationary components in a water jacket and air cooling housing walls **102**, **202**. Alternatively, engine **1000** can be cooled by passing water **306** through the channels formed between various components of engine **1000**, which see lots of heat. Finally cooling may be achieved in whole or in part by running at less than 100 percent duty cycle, as explained below in connection with the “digital mode of operation”.

[0074] An HCRE engine as in embodiments of the present invention differs in significant ways from a conventional HCCI cycle engine. For example, modern HCCI engines experience problems achieving dynamic operation of the engine. The control system must change the conditions that induce combustion. At present, very complicated, expensive and not always reliable controls are used to effect marginal variation of engine performance in response to varying load conditions. The variables under control to induce combustion include the compression ratio, the inducted gas temperature, the inducted gas pressure, and the quantity of retained or re-inducted exhaust.

[0075] In HCRE, additional control means exist that do not require complicated control mechanisms, referred to as combustion stimulation means (CSM). CSM are the measures taken to stimulate or induce the combustion of a conditioned working medium of air and fuel within combustion chamber **212**, including, but not limited to, one or more of the following: the pressure of the conditioned working medium, the temperature of the conditioned working medium, the concentration of exhaust gas recirculation (EGR) within the conditioned working medium, the concentration of water vapors within the conditioned working medium, catalytic surfaces within combustion chamber **212** (i.e. walls covered with a catalyst or a catalyst placed within combustion chamber **212**), a catalytic burner placed within combustion chamber **212** (such as nickel mesh, or ceramic foam), high combustion chamber wall temperature, a tungsten wire heater inside combustion chamber **212**, re-inducted exhaust **307** (which alone or in mixture with water vapor might induce a water shift reaction within fuel from fuel supply **304** as a thermo-chemical recuperator), and additional fuel injected or introduced into combustion chamber **212**. This additional fuel may be, but does not have to be, the same as fuel from fuel

supply **304**, i.e. fuel produced by dissociation of water (steam) molecules in the presence of a catalyst and possibly assisted by an electric spark discharge into hydrogen and oxygen. This can be produced by electrolysis of water (or steam) within the confines of combustion chamber **212** itself utilizing the heat of engine **1000**. The heat generated during the air/fuel mixture compression may supply a significant part of the energy needed for such dissociation. Hydrogen generated in the process of dissociation is used during combustion. Thus, the net effect of this process is partial recovery of the heat of compression.

[0076] As mentioned above, engines running under HCCI cycles are notoriously difficult to control, especially under part-load. While standard means of control, such as regulating fuel amount, pressure, temperature, amount of EGR, etc. are still available, a more elegant way to control HCRE (which will be referred to as “digital mode of operation”) is available: to run every cycle at full load, but sometimes skip cycles. For example, skipping three out of each eight cycles will enable running under 5/8th of full power, skipping six out of each eight cycles will enable running under 1/4 of full power, and so on.

[0077] To operate in the digital mode, and in particular to skip one or more cycles, it is possible to cut off both the compressed air **305** and the fuel supply **304** or to cut off only the fuel supply **304**. As described previously in connection with Figure 1, fuel from the fuel supply **304** is gated by fuel valve assembly **318**, which is controlled by controller **319**, so as to cause cut off of the fuel supply. Similarly, air from the compressed air module **100** is gated air valve assembly **118**, which is also controlled by controller **319**. The controller may additionally be coupled to receive an engine load signal. Such a signal may be derived by a variety of methods; under one method, engine speed is monitored in relation to fuel consumption or in relation to an engine speed directive (such as accelerator pedal position in an automobile). Under light load conditions, evidenced by the engine load signal, the controller may be configured to run the engine at a duty cycle less than 100%, so that the engine skips the combustion portion of the cycle after a regular number of cycles. Thus the engine load signal to the controller causes the controller to cut of fuel to the expander after a regular number of cycles. As an example, in one mode, the engine

may operate with fuel to the expander cut off every fourth cycle, for approximately a 25% reduction in power and in fuel consumption. In another mode, the engine may operate with fuel to the expander cut off every other cycle, for approximately a 50% reduction in power and in fuel consumption. In the case when fuel is cut off from the expander, the compressed air **305** furnished by compressor **101** will then expand in expander **201** without much loss in energy, since compressed air **305** will be heated by the combustion chamber walls during the idle time in combustion chamber **212**. Cycles of the engine operating under the latter case, when fuel supply **304** is cut off, will be referred to as “off-cycles,” as opposed to “on-cycles” when both air and fuel are delivered and combustion events occur. An additional effect of this operation is that it will cool the walls of combustion chamber **212** and the whole engine **1000**. Since it is common for an engine to operate at peak loads for only a small fraction of its operating life, this feature would make it possible to operate such an engine without cooling at all, i.e. cooling would naturally occur during these “off-cycles”. To operate such an engine at maximum power (when the “off-cycles” reduce towards zero, the engine **1000** can initially be oversized and not allowed to operate normally at more than some maximum preset power level, e.g., 80% (i.e., 80% duty cycle). The remaining 20% of power-duty cycle is used for cooling. This approach would somewhat increase the size of the expander **201**, but elimination of bulky cooling system components can lead to overall reduction in engine size. With such an approach, in a further embodiment, the controller may receive an engine temperature signal and use such a signal to place a limit on the maximum duty cycle; using temperature to limit maximum duty cycle may permit momentary uses of a larger duty cycle under conditions of a temporarily high demand for peak engine power. If air is cut off during the off cycles, it will typically be necessary to vent the working chamber through a vent valve or other suitable arrangement.

[0078] In a related embodiment, a plurality of expanders may be employed. In such a case, a separate valve assembly **318** for each expander may be employed, although the valve assemblies may be controlled by a common controller **319**. The expanders may be mounted on a common shaft at differing angular orientations, so that they operate out of phase with one another in order to smooth out power generation over the course of a shaft rotation. Alternatively, for example, a pair of expanders may be mounted at a common

angular orientation but operated with alternate off cycles, any given time one expander is generating power while the other expander has an off cycle, and in this way, the overall engine will exhibit a generally balanced mode of operation. A flywheel may also be used to smooth out engine operation.

[0079] If engine **1000** is equipped with external tank **107** and clutches **261** (see Figure 11), compressor **101** may be disconnected for a short while, thus allowing about a 25% power boost, since engine **1000** will not spend this amount of energy for the compression of air **303**. Alternatively, braking energy could be partially recovered by disconnecting engine **1000** and applying the momentum of a vehicle to turn wheels, which in turn will turn compressor **101**, which in turn will compress air **303** and push it into external air tank **107** through the valve. Moreover, due to small size of both compressor **101** and expander **201**, it would be possible to locate them in part or even entirely within the wheel well. So, the front wheel wells could contain expanders, and the rear wheel wells could contain compressors. In such embodiments, there would not need to be a shaft connecting expanders and compressors, this function would be executed by the road. This could create very compact and flexible arrangements for vehicle design as well as allow certain degree of redundancy.

[0080] External tank **107** can also start engine **1000** instead of or in addition to an electrical starter, or expander **201** can serve as an air motor running on compressed air **305** or liquid nitrogen.

[0081] From the first law of thermodynamics it follows that the less heat is rejected to the environment, the more heat can be converted into useful work. Heat is rejected from an internal combustion engine into the environment via two mechanisms. One is thermodynamic losses due to hot exhaust gases, and the other is engineering losses, due to the need to cool engine components. Low heat rejection (LHR) engines use high temperature components to address the second of these.

[0082] Theoretically, LHR engines should exhibit higher thermodynamic efficiencies. In practice, however, the results are inconclusive at best and opposite to what is expected at

worst. This is because incomplete combustion due to higher engine temperature forces premature ignition before the fuel has time to mix with the air. Also, higher combustion temperatures result in higher exhaust temperatures. Thus, decreased engineering loss is accomplished at the cost of increased thermodynamic loss.

[0083] The design of engine **1000** may present us with an opportunity to address both components of loss at once. The approach includes but is not limited to some or all of the following measures.

[0084] One option is thermally insulating the engine from the environment by using ceramic components, various coatings, or other insulation materials. Another option is suppressing the temperature increase of components (housing **102**, **202**, bearings **207**, cover **216** and blade **214**) by removing extra heat from these components. Unlike conventional engines which remove heat from the walls and transfer it to the environment through coolant and a heat exchanger (radiator), engine **1000** could be cooled by injecting water **306** between the components. For an example of how water **306**, shown in Figure 1, could be injected to form a water seal, see Figure 20B, where the water seal is shown as item **311**. Water **306** supplied to these components at very high pressure will turn into steam, which will escape into expansion chamber **210** and aid combustion products in the expansion process, thus increasing the efficiency of engine **1000**. Thus we accomplish partial recovery of thermal cooling losses, while simultaneously lowering the temperature of exhaust gases **307**. The water vapors could be recovered through conventional condenser **300**, shown in Figure 1. However, this may require large space and associated costs (e.g. because it has to be corrosion resistant). Alternatively, condensing may be accomplished via a centrifugal condenser. Another option is extending the expansion process further until atmospheric pressure is reached, as shown in Figures 28-29. We lower the temperature of the exhaust gases **307** further, thus reducing the thermodynamic component of the losses. The net result is that we expect engine **1000** to exhibit much higher efficiencies than conventional engines.

[0085] Many variations on the design of the exemplary embodiment are possible and apparent to those skilled in the art. Examples of various embodiments of the present

invention are described below.

[0086] Cams **103**, **203** may be implemented according to several alternatives. Cams **103**, **203** may be implemented in various shapes, the cylindrical surface could be replaced with conical, semi-spherical, or curved surfaces. The functions of cams **103**, **203** can be fulfilled by using variations such as groove-cams **114**, shown in Figure 8, in which a cam-follower **113** tracks a path through a groove in a groove-cam **114**, and the action of a shaft is regulated thereby. Also, the single-cam design could be replaced by a dual-cam design, such as the one shown in Figure 9. The design variation shown in Figure 9 employs a two-sided cam **115** and a single rocker **104**. Variations on this setup are possible including multiple rockers, as well.

[0087] It is possible to build a combination compressor/expander **302** (see Figure 10), according to the principles of operation used in an exemplary embodiment such that both functions exist in a single body rather than two separate bodies. One such possible design variation is shown in Figure 10 using a single rotating cam **203** and two rockers **204**. Other designs could include three rockers, multiple cams, or a combination of these variations.

[0088] It can be shown that, unlike compressor **101**, the efficiency of engine **1000** is increased if air **303** is heated during the compression process, rather than cooled. So to increase the efficiency, some of the heat from the exhaust gases **307** could be transferred to air **303** being compressed. It has to be done intermittently from the point in time when cam **103** closes intake port **111** to the point in space when temperature due to compression reaches the maximum temperature of exhaust gases **307** (minus $\sim 20^{\circ}\text{C}$) (see Figure 26). In addition, exhaust gases **307** (at $\sim 800^{\circ}\text{K}$) could be used to cool combustion chamber **212**, where temperature during combustion could be higher than 2600°K (which is why ceramic walls or coating should be used in combustion chamber **212**). This temperature has to be reduced to enable long engine operation. This could be accomplished by a conventional water shroud, by water injection into combustion chamber **212** and/or expansion chamber **210**, or by gas cooling, utilizing exhaust gases **307** as a cooling medium. Exhaust gases **307** would increase the temperature to $\sim 1200^{\circ}\text{K}$ - 1300°K . This

would make utilization of exhaust gas heat to heat air **303** during the compression stroke much more attractive. Alternatively, or in addition to the above, cooling could also be accomplished by utilizing the “off-cycle” WM expansion as discussed above. The additional effect of cooling utilizing the digital mode of operation is that engineering heat losses (i.e. due to the need to cool components for structural purposes) will be reduced by utilization of this heat during the “off-cycle”.

[0089] Given the extreme heat felt by combustion chamber **212**, greater cooling efforts could be undertaken near combustion chamber **212** and lesser cooling at the end of expansion. Similarly, as much higher pressures exist in the vicinity of combustion chamber **212**, that is the place where the walls should be the thickest. Other possible variations also include a sliding rocker with an eccentric disk cam, and a fixed and stationary combustion chamber. Still another variation is to locate the combustion chambers within the separating plate or the rocker, or some combination of thereof.

[0090] One variation of the basic engine design showing the variety of ways the design ideas can be implemented is a design using a sliding blade **214** (see Figure 14) in place of the standard rotating cam. Figure 11 shows what such a design might look like fully assembled. In this configuration, compressor **101** is driven by a belt drive **251**, via optional clutch **261**. Alternatively, it can be driven by gears, chain drive or any other suitable means, including directly by PGM **200**. If clutch **261** is used, compressor **101** can be turned on and off as needed. For example, if engine **1000** is being used in a vehicle, then to recover the braking energy of the vehicle, one can turn off PGM **200** through clutch **261**, and run compressor **101** only from the rotating wheels of the vehicle or the flywheel. Air **303** compressed by compressor **101** will be directed to external tank **107**, via 3-way valve **108**. Alternatively, when a car employing an embodiment herein requires more power, compressor **101** is deactivated completely via clutch **261**, and compressed air **305**, stored in external tank **107**, is used for operation of PGM **200**. This will afford maximum flexibility and power management to the vehicle.

[0091] The implementation of a PGM **200** according to a sliding blade embodiment is now described with reference to Figures 12 and 13. In the implementation shown the

housing walls **221** of an expander **222** rotate around a stationary, internal hub **220**. Alternatively, other configurations may employ a rotating hub and stationary housing. PGM **200** includes housing **221**, a cover **216**, hub **220** (consisting of two semi-cylindrical guides **215**, and two bearings **207**), a sliding blade assembly **214**, an air inlet port **217** (serving as an inlet port), a water inlet fitting **218**, and a water outlet fitting **219**.

[0092] The spaces between hub **220**, housing walls **221**, sliding blade assembly **214**, bearings **207**, and cover **216** define engine chambers. There are three types of chambers, as shown in Figure 13. As in the exemplary embodiment, these chambers are combustion chamber **206**, expansion chamber **208**, and exhaust chamber **209**. (An exhaust port, not shown, is coupled to the exhaust chamber **209**.) It can be seen in this figure that the housing includes a first interior circular wall portion, marked as item **131**—the portion lies generally between the two locations identified by the reference lines associated with reference number **131**; this portion maintains sealing contact with the hub in the course of the housing's rotation around the hub. The housing also includes a second interior portion contiguous with the first interior wall portion. The portions define, in combination with the blade and the hub, a working chamber (namely a combustion chamber **206** and an expansion chamber **208**) that is isolated from the air inlet port and an exhaust port at relevant portions of the engine cycle, as indicated in Figures 13(A) and 13(B) and Figure 14.

[0093] The operation of expander **222** in this embodiment is now described with reference to Figure 14. The cycle begins in Figure 14A, when an enclosure is being formed by rotating housing walls **221** to form combustion chamber **206**. In Figures 14B-D combustion chamber **206** is already formed. Combustion chamber **206** exists during the timeframe when sliding blade assembly **214**, which runs simultaneously on two constant radius segments within housing walls **221**, remains stationary with respect to semi-cylindrical guides **215**, which together with the cylindrical segment of housing walls **221** and bearings **207**, define the volume of combustion chamber **206**. Referring to Figure 12, when left hand side of sliding blade assembly **214** exits constant radius segment, expansion chamber **208** is formed. In Figures 14E-G expansion stroke starts in expansion chamber **208** and, simultaneously, exhaust stroke starts in exhaust chamber **209**.

[0094] A working medium (WM), such as air **305**, is admitted to combustion chamber **206** through an electronically controlled valve (not shown but corresponding to a portion of air valve assembly **118**), located within bearing **207**. Alternatively, or in addition to electronically controlled valve, WM gets to combustion chamber **206** through a one way valve (not shown but corresponding to a portion of air valve assembly **118**) located within bearing **207**. When combustion starts and pressure increases rapidly, the one way valve closes, trapping air **305** inside combustion chamber **206**.

[0095] If conditioned air is used, fuel from fuel supply **304** is injected by fuel injectors located within bearing **207**. If conditioned air or air/fuel mixture is used, the combustion occurs spontaneously within combustion chamber **206** triggered by a combustion stimulation means. If a conditioned air/fuel mixture is used, since the air/fuel mixture is lean as with any homogenous charge compression ignition (HCCI) cycle, the amount of fuel from fuel supply **304** can, to a certain degree, control the power level of engine **1000**. However, such a control is unreliable and very complex. All modern engines running the HCCI cycle suffer from this problem. In a further embodiment, in addition or instead of the above control scheme, to run engine **1000** at full power during each cycle, i.e. run under a constant air/fuel mix. The power level of engine **1000** will be controlled, however, by skipping some of the cycles, e.g., executing the digital mode of operation.

[0096] Depending on the temperature of housing walls **221**, water vapor content and the amount of exhaust gases **207** remaining within combustion chamber **206** from the previous cycle, etc., the combustion event may occur at different positions of sliding blade assembly **214** with respect to housing walls **221**, but always will start within combustion chamber **206**. Due to the fact that combustion event is very rapid, because fuel from fuel supply **304** is well premixed within combustion chamber **206** and combustion starts simultaneously at all points of combustion chamber **206**, the event is very rapid and combustion occurs within constant volume before the gas begins to expand.

[0097] Engines in most, if not all, embodiments of the invention described herein can run using various cycles including HEHC, modified HEHC (when combustion occurs at

isochoric conditions first and isobaric condition second, and/or Homogeneous Charge Stimulated Ignition (HCSI), described below. Moreover, if high pressure fuel injectors are used, it is possible to switch between these cycles on the “fly” during the operation of the engine.

[0098] Thus in a further embodiment of the present invention, Engine **1000** is configured to execute the HEHC, described in our published patent application WO 2005/071230, which is hereby incorporated herein by reference. The compressed working medium, which may be stored in an intermediary buffer at ~50 to 70 bar pressure or above, is admitted to a completely enclosed constant volume working chamber, formed during first angular range of the cycle, and containing exhaust gases from the previous cycle at ambient pressure. Working medium, which may be air, for example, is admitted into this combustion chamber through air valve assembly, **118** of Fig. 1, containing a check-valve and a second valve or a latching check valve. After that, the high pressure fuel injectors may inject fuel into the combustion chamber, and combustion proceeds in a manner similar to conventional Diesel engines, except that combustion occurs in a constant volume space. When ignition occurs, the supply of air is brought to a halt by virtue of air valve assembly **118**, which may contain a check valve and electronically controlled valve or latching check valve, so that flow into the intermediary buffer is prevented. Performance characteristics for this cycle are shown in Figure 28.

[0099] The fuel injection may continue through the second angular range (expansion stage), i.e. within expansion chamber **208**. In this phase, the engine will demonstrate diesel-like performance with the exception of a higher expansion ratio (Atkinson cycle) – for that reason, we call this cycle a modified HEHC.

[0100] In addition to HEHC or modified HEHC cycles, most, if not all, embodiments of the invention described herein can run, what we call a Homogeneous Charge Stimulated Ignition (HCSI), which is a variation of known Homogeneous Charge Compression Ignition (HCCI).

[0101] In HCCI engines a lean fuel/air mix is compressed to high compression ratio (~18

to 20) within the cylinder of the engine. Since the fuel is already well pre-mixed within the combustion chamber in HCCI engines, it forms a homogeneous charge, which then ignites due to an increase in temperature due to compression – hence the name HCCI. Unlike the Otto engine, one can compress to such a high ratio here due to the use of a very lean fuel/air mix. On the other hand, unlike a Diesel engine, the combustion is very rapid, almost instantaneous, and thus occurs at nearly constant volumes. These engines have high efficiencies and may run on any fuel. An essential requirement for these engines, as is true for any reciprocating piston engines is that ignition has to occur at or near the Top Dead Center (TDC), a criterion that creates a very difficult problem in controlling the exact moment of ignition, as it depends on a great many parameters such as fuel to air ratio, compression ratio, air temperature and humidity, EGR rate, cylinder wall temperature, etc., etc. For this reason, engines of this design are not commercialized. Also, due to the lean mixture, the power density is low. (One is not using all the air in the mix, so for the same power one needs a bigger cylinder volume.)

[0102] In contrast, engines in accordance with embodiments of the invention herein described can be considered to work on a variation of the HCCI principle, but use of the distinctive engine geometry makes the time of ignition much less critical, as will be explained below. When compressed working medium (air) is injected into the combustion chamber from the intermediary buffer, it is initially decompressed (and cooled) and then recompressed (and re-heated) when pressure in the combustion chamber reaches the pressure of the intermediary buffer. Due to the very large pressure difference between the intermediary buffer and the combustion chamber, which is initially at ambient pressure, a supersonic swirl or vortex of rotating air, which rotates at very large rate (1,000,000 RPM or above), is formed by the air entering the combustion chamber. The fuel, injected simultaneously with air into a low pressure environment, will be dragged into the chamber by the air swirl, mix very well with the air and evaporate very quickly, if it is a liquid fuel. The fuel supply is then cut off by the fuel valve assembly **318** from the signal generated by controller **319**, while air continues to fill the combustion chamber and keeps increasing the pressure. Therefore, unlike a conventional reciprocating piston engine, which compresses the air by moving a piston, HCRE engine compresses the air/fuel mixture by the air itself. When temperature and pressure reach the auto-ignition point, the fuel is going to ignite

within the whole volume, in a manner similar to HCCI engines. At this point of time, pressure buildup in the combustion chamber causes the check-valve of the air valve assembly **118** to close, followed by closing of a secondary air valve as a result of actuation by controller **319**. Thus the energy losses associated with decompression and recompression of air entering the combustion chamber, which, incidentally, constitute only about 0.5%, per our calculations, are converted into a high efficiency fuel/air mixer. This circumstance makes it possible to run an HCRE operating under an HCSI cycle at a high rpm rates, a performance not achievable by Diesel engines.

[0103] It is furthermore possible to accelerate the ignition event by utilizing all the same means that are used in HCCI engines such as fuel to air ratio, compression ratio, air temperature and humidity, EGR rate, cylinder wall temperature, etc, and also by adding additional control means such as relative timing of air and fuel injections, presence of catalyst within the combustion chamber, etc.

[0104] Moreover, it can be seen from this description that the check valve automatically causes the air supply to be cut off at precisely the moment when pressure in the combustion chamber exceeds pressure in the compressed air supply. This circumstance, coupled with an engine geometry that dispenses with the need (in a conventional piston engine) for critical synchronization of combustion with top dead center of the piston, eliminates the need for complex calculation of the point of combustion. Furthermore, in embodiments of the present invention, the fuel/air mixture is formed during the admission of air into the working chamber and is at temperatures below auto-ignition. Thus unlike HCCI engines, in which timing of combustion depends critically on position of the piston in the cylinder, in embodiments of the present invention, engine geometry matters little, so combustion can occur at or near the point of air and fuel injections, which are always at our control, at a point in the cycle when other conditions have been optimized.

[0105] Performance characteristics of the cycle are shown in Figure 29. The difference between this cycle and the HEHC above is that instead of conditioned air, the system uses a conditioned air/fuel mixture, such that the fuel-to-air ratio is on the lean side and ignition occurs not due to fuel injection as above but is triggered by combustion stimulating means.

It is similar to the HCCI cycle, which is currently under development by numerous groups of scientists and engineers, but, unlike the HCCI cycle, the HCSI engine does not require complicated computer controls, due to the fact that the combustion event may occur at any moment during the times combustion chamber **206** exists (90 to 180 degrees of revolution of the hub **220**), by having a one way valve that will separate combustion chamber **206** from the air/fuel supply at the moment of the combustion event and forward until either pressure in combustion chamber **206** exceeds the pressure in the air/fuel supply or alternative mechanical or electromechanical valves shut off the fuel supply.

[0106] Several other possible variations on the design of PGM **200** are now described with reference to Figure 15. Figure 15A shows how PGM **200** could be configured with two collinear blades **255**. These blades **255** would work similarly to sliding blade assembly **214** described above, but in this configuration hub **220** can provide a central hole, allowing, e.g., fuel from supply **304** and air **305** to travel through. In this design, housing walls **221** remain stationary, while hub **220** and blades **255** rotate around a fixed axis going through the center of hub **220** and the hole.

[0107] In another variation, two blades **256** could be used that are parallel but not collinear, as shown in Figures 15B-C. In this configuration, longer blades **256** may be used than in the case of parallel blades **255**, meaning the expansion area will be larger than in the collinear case, giving a boost to power. In Figure 15B this is implemented using rollers **224** on the tips of blades **256** to reduce friction. Figure 15C shows a configuration where friction is reduced without rollers, but rather using any number of alternatives such as those discussed below in the section about sealing and lubrication issues.

[0108] A variation (not shown) uses standalone combustion chambers **225**, similar to those used in our published application WO 2005/071230, incorporated herein by reference. A potential advantage of this approach is that combustion time could be extended by utilizing two, three or more combustion cavities **225**. One of these combustion cavities **225** is shown on a cutout view incorporated within the lower chamber.

[0109] Figure 15E and Figure 16 show a variation using a pivoting blade **226** instead of a sliding blade. Blade **226** is connected to a rotating hub **227** at a pivot point. A combustion chamber **228** is located within hub **227** and is sealed with blade **226** while blade **226** is within a fixed (idling) position with respect to hub **227**. During this blade idling, the conditioned air/fuel mixture enters combustion chamber **228** through one way valve (not shown) from air buffer **205** (the valve, which allows the conditioned air fuel mixture to enter combustion chamber **228** is also not shown) and gets ignited during a CSM event. The central hole within hub **227** may serve as an air buffer. Blade **226** may have optional roller **224** running on the walls of housing **221** and providing the seal. Alternatively, it can use the Wankel-type apex seal instead of roller or no seal at all if it is made with wear resistant material as well as housing.

[0110] An altogether different variation of engine **1000** is shown in Figures 17-18. It is based on the axial vane rotary engine (AVRE) configuration, which was considered in U.S. Patent 4,401,070, which is incorporated herein by reference, and in earlier prior art. This configuration could be implemented to run under HEHC.

[0111] The expander **235** configuration of HEHC-AVRE is shown in Figures 17-18. While shown in a plane, it should be realized that we are actually looking at unwrapped cylindrical bodies. While resembling the prior art in construction, the operation of engine **1000** is very different. Air **303** is compressed by a separate compressor. As is true for any other configuration of the HEHC engines, the compressor part could be of substantially same design or of any other designs mentioned in this invention or available commercially, as long as it is capable of compressing air **303** to high compression ratios (15-40). Also, the intake volume of the compressor should be about half of that of the expansion chamber of expander **235** to take advantage of the Atkinson part of the cycle.

[0112] Expander **235** consists of: a stator ring **236**, and holding vanes **237**, which slides in the axial direction. It may have rollers **238** that inhibit friction between the blades and ring **236**. Stator ring **236** also houses combustion chambers **240**, discussed below. In addition, stator ring **236** houses exhaust ports **239**, which exhaust already expanded combustion gases. These gases are pushed out by the motion and the shape of a rotary

cam ring (RCR) **241**, described below (see Figure 17).

[0113] RCR **241**, driven by expanding combustion gases, rotates around the axis and drives the output shaft (and possibly the compressor). It also imparts the intermittent reciprocating axial motion to vanes **237**. The key feature of RCR **241** is that it provides a dwell period to vanes **237** during which vanes **237** are stationary with respect to stator ring **236**, thus forming a constant volume combustion chamber **240**. During this stationary period, compressed air **305** is admitted through appropriately controlled valves (not shown) into combustion chamber **240**, which is at ambient pressure at that moment. Either simultaneously with air **305** or with some delay, fuel from fuel supply **304** is injected into combustion chamber **240**. Due to very turbulent swirling, fuel from fuel supply **304** is well intermixed with air **305**. The mixture spontaneously ignites and combusts until completion, all while still under the dwell period or under conditions of constant volume combustion.

[0114] Vanes **237** slide inside stator ring **236**. The only function of vanes **237** is to stop combustion gases from escaping the expansion chamber. Vanes **237** should have some sealing mechanism to enable this function. of the sealing mechanism may utilize Wankel-style apex and face seals or some other sealing approaches discussed in this document and in previous patent applications by these authors.

[0115] It should be noted that a number of variations of the above configuration are possible and apparent to those skilled in the art. For example, stator ring **236** may be rotary, while cam ring **241** may be stationary. Combustion chamber **240** may be formed by a cutout within vane **237**, rather than within ring **236**. Exhaust port **239** may be located within cam ring **241**. Vanes **237** in the drawings are represented as a single body, but could consist of two or more sliding parts, supported by springs, sliding blade seals, etc.

[0116] Another variation, radically different from all of the above, is the concealed blade technology (CBT) engine. The idea behind CBT, shown as item 249 in Figure 19, is to replace some or all of the blades and/or pistons in previous configurations with a virtual chamber, which is implemented with fluidic diodes **242** or radially located slots, which

resist flow in one direction and permit it in the other. The fluidic diode is disclosed in our US patent 7,191,738, which is hereby incorporated herein by reference, as a check valve. See col. 8, lines 45-50, and Fig. 3(a) thereof. It is also disclosed in our published application WO 2005/071230, which is hereby incorporated herein by reference, as a sealing mechanism. (See page 46, paragraph 157 through page 47, paragraph 163, and accompanying figures.) A fluidic diode, invented by Nikola Tesla, is a physical structure that permits ready flow in a first direction, but in the case of flow in the opposite, the use of one or more angled slots in which is placed a suitable structure creates one or more vortices that impede flow. See also Tesla's US patent 1,329,559, which is hereby incorporated herein by reference. In the embodiments herein, each diode may be implemented with as few as one angled slot, as in Fig. 3(a) of our US patent 7,191,738, and Figs. 43(a), (b), (c) and (d) of our WO 2005/071230, even though Tesla's patent shows a large number of angled slots used simultaneously. In particular, we use here one or more fluidic diodes disposed radially in a disk that rotates with respect to a body that also includes one or more fluidic diodes. The diodes are configured in relation to one another so that rotation of the disk relative to the body traps air between the two diodes as they approach one another. The air is trapped in what we call a "virtual chamber" formed between the body, the disk and the two fluidic diodes. The arrangement therefore establishes a virtual piston, which can be used to establish a compressor. Alternatively, the virtual piston can be used to establish an expander for harnessing pressure from combustion. As we mention, although a disk in this example is the member rotating with respect to the body, other shapes may be used. For example, the rotating member may be a cylinder or it may be conical, and in each case the interior of the body conforms to the shape of the rotating member.

[0117] Still referring to Figure 19, the combustion chamber cavity is behind fluidic diode **242** (concealed blade) of rotating rotor or in front of stationary rotor. This embodiment may be considered as an improvement on the tesla disk or tesla turbine, but here transformed into an internal combustion engine. Figure 19 thus illustrates a turbine by mechanical design and a piston engine by thermodynamic cycle and definition of volume expansion engines. The engine utilizes a rotating disk, item **257**, that is rotatably mounted in the body **247**. Both the disk and the body are fitted with fluidic diodes **242**. The

trapping effect is thus compression and is used in a radial band associated with a compressor region of the engine. The working medium (which may include air or other oxygen-containing gas) from the compressor region is then fed, past a valve assembly that also incorporates one-way check valve, from a compressor exhaust port **245** into a buffer region disposed in the body **247**. The working medium is then moved from the buffer region into a substantially fixed volume combustion chamber formed in body **247** and covered by a region of the rotating disk. At this point in the cycle, if it has not been previously a part of the working medium, fuel is introduced, and ignition and combustion occur, generating heat and therefore increased pressure of the working medium. Following this part of the cycle further rotation of the disk permits the working medium at increased pressure to enter an expander chamber associated with a distinct radial band of the engine and causing rotation of the disk relative to the body of the engine. Yet further in the cycle, the working medium, now expended, is permitted to leave the engine via an exhaust port, that is in accessible to the working medium while it is in the expander chamber. Shown in Figure 19 in addition to the fluidic diodes **242** are the compressor segment **243**, the expander segment **244**, the intake port **246**, the exhaust port **245**, the body **247**, the cover **248**, and the external shaft **250**. From the foregoing description, it is apparent that fluidic diodes used in members rotatably mounted with respect to one another can be employed to provide a compressor or an expander. Indeed, the configurations for a compressor or an expander using fluidic diodes are similar. Possible variations to this configuration include adding external standalone cylindrical combustion chambers, using a standalone compressor and standalone expander (i.e. a two-disk configuration), a two sided configuration where compressor is on one side and expander is on the other, using multiple stacked discs, disk versa cylinder versa cone configurations (“pipe-in-a-pipe”) with fluidic diodes on ID of external “pipe” and OD of internal “pipe,” “pipe-in-a-pipe-in-a-pipe” configuration, and combination of the disk configuration with the pipe-in-a-pipe configuration (conical or straight).

[0118] In an HCRE engine, in accordance with various embodiments of the invention described here, blade(s) move with respect to the housing walls, the bearings, the cover, and the hub. And the hub with bearings moves with respect to the housing walls and the cover. To allow for low cost manufacturing, the design of an HCRE should accommodate

tolerance gaps between the various moving components on the order of 0.001"– 0.003", after thermal expansion is taken into account to allow blow-by of the engine gases. This might be acceptable if the amount of blow-by is small, as it will provide gas lubrication and some cooling to the engine blade(s), the housing and the. However, for better performance of the engine, it might be desirable for the combustion chamber and expansion chamber to be as leak free as possible while still providing lubrication and cooling. Since the moving elements within the engine have a generally rectangular cross section, special attention needs to be paid to the sealing and tribology of the engine components.

[0119] There are number of ways to seal the combustion chamber and the expansion chamber. These include abradable thermal spray coatings, apex and face sealing, water sealing, fluidic diode sealing, and strip sealing. A practical solution will be found with one or more sealing arrangements discussed below. Abradable thermal spray coatings represent the same technology used for sealing turbine blades. These coatings withstand temperatures up to 1200 °C, and can be applied to a thickness of 2 mm. The blade/hub motion would chisel out a path within the coating inside the housing or the blade or the hub. The result is that the 0.001"-0.003" manufacturing gap between the components can be reduced to almost zero, thereby reducing the leakage from the combustion chamber and the expansion chamber.

[0120] Another approach to minimizing the leakage, shown in Figure 20A and Figures 20C-D, is to use an apex seal **310**. This might be located on the edge of sliding blade **214** and/or used as face seals. Apex seal **310** utilizes a spring loaded sliding vane, which closes the small gap (~ 0.001" – 0.003") between blade **214** and housing walls **221**. The spring is not shown in the figure. The sliding vane is normally made out of high wear material such as ceramics, boron nitride, etc. It is also possible to install seals made out of various forms of carbon or graphite materials, such as monolithic, expanded graphite sheets or "ropes" (yarns), implemented as a packing seal. The apex seal concept is applicable to blade **214** with or without rollers **224**, shown in Figure 20D.

[0121] Still another alternative sealing arrangement could be accomplished by utilization

of the water seal concept described in our published application WO 2005/071230, and elaborated herein in the context of HCRE **1000**, with reference to Figure 20B, Figure 20E, and Figure 21. According to the water seal concept, high pressure water **311** enters the channel in a moving part shown in Figure 20B and fills a very small gap (on the order of 0.001" to 0.003") between parts. Water **311** is dragged by the moving part and spread as a thin film occupying the gap and resisting the gases in front of this thin layer to penetrate this gap. The surface on the moving part near the channel delivering water is serrated to form barriers for smooth flow of water film within the gap. In engine **1000**, the parts are very hot and some water will evaporate, forming hydraulic lock and preventing water **311** from blowing out of the gap. Evaporative cooling provides a very efficient way to cool engine components as a relatively small amount of water is required to be evaporated as compared to regular water flow cooling. This is due to the fact that the heat of water evaporation is significantly higher than the corresponding heat capacity of the flowing water. However, it should be stated that this evaporative cooling does not preclude us from using conventional water flow cooling means, if such will prove to be useful and necessary.

[0122] Water seal **311** could be applied to pivoting blade assembly **226** with or without rollers or to housing **221**, in which case it can be applied directly between housing **221** and hub **227**, or between housing **221** and roller **224** within housing **221**, as shown in Figure 20E. Roller **224** will then seal the gap with housing.

[0123] In expander **222** from Figure 12, water **306** (see Figure 1) enters through water inlet fitting **218**, passes through the strategically located water channels within bearing **207**, two semi-cylindrical guides **215**, and sliding blade assembly **214**, and exits through water outlet fitting **219**. This water **306** also enters the bearing surfaces of bearings **207** providing for fluid film hydrostatic/hydrodynamic bearings, eliminating the need for conventional bearings. But conventional bearings still could be used in this application.

[0124] Figure 21 gives more details of the application of the water sealing concept to engine **1000**. Figures 21A-C show water passages inside the channels formed within the various elements of the expander. These channels also are shown within bearing **207** in

Figure 21D, sliding blade **214** in Figure 21E, and bearing **207** in Figure 21F. Arrows in Figure 21C indicate the direction of inflow and outflow.

[0125] Therefore, water in engine **1000** has sealing, cooling, lubricating and NO_x reduction (as it lowers combustion chamber temperatures) functions. In addition, as was explained above, water will increase efficiency of engine **1000** since some of the energy, normally lost due to cooling losses, is returned back into the system in the form of superheated, high pressure steam.

[0126] One interesting possibility is to replace the water in the above concept with diesel or diesel-like fuels, which have better lubricity, are non-corrosive, and do not require a condensing unit. Since gaps to be closed are very small, the consumption should be insignificant. Moreover the consumption during expansion phase is useful, since vaporized fuel will be burned in combustion chamber and expansion chamber. Still another alternative is to add methanol to the water mix, which will prevent the water from freezing. The methanol will burn when it gets into combustion chamber.

[0127] We can also use a liquid in conjunction with a liquid-conduit. Water, oil, liquid fuel, etc., could be used for a liquid, while a small diameter (2-5 mm) carbon/graphite or metal mesh, made in the form of a pipe or a rope and placed within channels similar to the ones shown on Figures 21A-C could be used as liquid-conduits. High pressure liquid will be pumped through these conduits, which do not even have to be water tight, as water leaking through it will evaporate and aid in cooling, sealing and lubrication.

[0128] Another sealing concept that could be applicable is the fluidic diode seal. This concept was discussed at length in our published patent application WO 2005/071230, and is incorporated herein by reference.

[0129] A strip seal **316** can be used on both hub and/or blade. As shown in Figures 22A-C, it consists of a strip of metal and is designed, similarly to a blade apex seal, in such a way that the net force due to the pressure on strip **316** is small and directed toward housing walls **221**. Having a small net force will insure that the wear on both strip **316** and walls

221 will be insignificant. The direction of the force will insure that strip **316** is in constant contact with walls **221**, while maintaining leak-free contact with hub **220** or blade **256**.

[0130] The arrows in Figure 22C represent pressure due to combustion products. Blade **256** is designed in such a way that the net force due to the pressure on blade **256**, whether rollers are used or not, is small and directed toward housing walls **221**. Having small net force will insure that the wear on both blade **256** and walls **221** will be insignificant. The direction of the force will insure that blade **256** is in constant contact with walls **221**, thus ensuring leak-free operation, at least in this specific interface.

[0131] The basic concepts underlying the design of engine **1000** can be applied to other engine configurations as well. Figure 23 shows several alternative designs for compressor **101**. In Figure 23A a blade-piston **214** is situated in a central hub **220**, and either hub **220** or housing **221** rotating relative to the other will produce compression in two strokes per cycle. In Figure 23B this design is modified by putting a second blade-piston **214** into hub **220**, parallel to the first. Also, for illustrative purposes, we see that design implemented using rollers **224** on the tips of blades **224**. This configuration will lead to two compression strokes per cycle for each blade, for a total of four, if configured with one stage, or two compression pulses per cycle if using a two-stage configuration. And in Figure 23C we see the design modified again to have four blades **214**, consisting of two sets of parallel blades that are positioned on perpendicular axes relative to each other. This configuration will lead to either four or eight compression pulses per cycle, again depending on whether the compressor is configured for one-stage or two-stage operation.

[0132] In Figure 24 we see an example of a rotary vane expander **252** with a piston-type compressor **253** in a single unit. The entry of piston **214** into hub **220** causes compression, while the movement of blade **214** through the expansion area defines the expansion chamber.

[0133] Conventional pistons can also be adapted to implement the HEHC thermodynamic cycle in a rotary engine, as shown in Figure 25. As hub **220** and/or housing **221** rotate relative to each other, pistons **254** travel a cycle into and out of hub **220**. In operation

without a crankshaft, the engine is driven by a cam ring (not shown) and the cam profile corresponds to the Atkinson cycle.

[0134] Although various exemplary embodiments of the invention have been disclosed, it should be apparent to those skilled in the art that various changes and modifications can be made which will achieve some of the advantages of the invention without departing from the true scope of the invention.

1. rising:
surized working medium;
an expander including:
a housing;
a piston, movably mounted within and with respect to the housing, to perform one of rotation and reciprocation, each complete rotation or reciprocation defining at least a part of a cycle of the engine;
an intake port, coupled between the source and the housing, to permit entry of the working medium into the housing,
an exhaust port, coupled to the housing, to permit exit of expended working medium from within the housing;
a septum, mounted within the housing and movable with respect to the housing and the piston so as to define in conjunction therewith, over first and second angular ranges of the cycle, a working chamber that is isolated from the intake port and the exhaust port; and
a heat input coupled to the working medium at least over the first angular range of the cycle to provide heat to the working medium and so as to increase its pressure;
wherein the working chamber over a second angular range of the cycle expands in volume while the piston receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes motion of the piston relative to the housing.
2. An engine according to claim 1, wherein the piston and the septum simultaneously define at least over the first and second angular ranges of the cycle, an exhaust chamber that is isolated from the intake port but coupled to the exhaust port.
3. An engine according to claim 1, wherein the source includes a pump.
4. An engine according to claim 1, further comprising a fuel source coupled to the expander, and wherein:
the working medium includes one of (i) an oxygen-containing gas to which fuel from the fuel source is added separately in the course of the cycle and (ii) an oxygen-containing-gas with which fuel from the fuel source is mixed outside the course of a cycle,

and

energy release from oxidation of the fuel at least over the first

angle

so that the engine is an internal combustion engine.

5. An engine according to claim 4, wherein the working chamber has a volume, over the first angular range, that is substantially constant.

6. An engine according to claim 5, further comprising a turbulence-inducing geometry disposed in a fluid path between the source of pressurized working medium and the working chamber to enhance turbulence formation in the working medium.

7. An engine according to claim 5, further comprising:
a fuel valve assembly coupled between the fuel source and the expander;
a controller, coupled to the fuel valve assembly, such controller also coupled to obtain engine cycle position information, the controller operating the fuel valve assembly to cut off flow of fuel to the expander during a portion of the cycle when fuel addition is not needed.

8. An engine according to claim 5, further comprising:
an air valve assembly coupled between the pressurized working medium source and the expander;
a controller, coupled to the air valve assembly, such controller also coupled to obtain engine cycle position information, the controller operating the valve assembly to cut off flow of the working medium to the expander during a portion of the cycle when addition of working medium is not needed.

9. An engine according to claim 8, wherein the air valve assembly includes a check valve.

10. An engine according to claim 4, wherein introduction of the pressurized working medium through the intake port into the working chamber causes a temporary drop in the working medium pressure and efficient mixing of the working medium with fuel introduced into the working chamber, under conditions of continually increasing pressure of working medium in the working chamber, until temperature of the fuel-working-medium mixture reaches an ignition temperature resulting in combustion of the mixture.

11. An engine according to claim 9, wherein introduction of the pressurized working medium through the intake port into the working chamber causes a temporary drop in the

working medium pressure and efficient mixing of the working medium with fuel
into the working chamber, under conditions of continually increasing pressure
of the working chamber, until temperature of the fuel-working-
medium mixture reaches an ignition temperature resulting in combustion of the mixture,
such combustion causing an increase of pressure in the working medium that, in turn,
causes the check valve to close automatically.

12. An engine according to claim 9, wherein the air valve assembly also includes a second valve coupled to the controller.
13. An engine according to claim 9, wherein the air valve assembly also includes a latch on the check valve coupled to the controller to maintain the check valve in a closed position when directed by the controller.
14. An engine according to claim 7, wherein the controller is configured to cause cut off of flow of fuel to the expander during some cycles of the engine so that the engine runs at less than a hundred percent duty cycle.
15. An engine according to claim 14, wherein operation of the controller to cause cut off of fuel flow to the expander during some cycles of the engine effectuates no substantial reduction of supply of working medium to the expander, so that working medium supplied to the expander when fuel flow to the expander is cut off serves to cool the engine, and the controller is configured to operate the engine under normal conditions at less than one hundred percent duty cycle so as to provide cooling to the engine.
16. An engine according to claim 5, wherein the piston is a cam, and the septum is a cam-following rocker, engagable against the cam.
17. An engine according to claim 4, further comprising a vessel for coupling the source to the intake port, such vessel including a volume for storing pressurized working medium.
18. An engine according to claim 17, wherein the vessel includes an air tank disposed in a location external to the housing.
19. An engine according to claim 4, wherein the first and second angular ranges are at least partially overlapping.
20. An engine according to claim 4, wherein the first and second angular ranges are non-overlapping.
21. An engine according to claim 4, wherein the working medium is an oxygen-

containing gas, the engine further comprising a fuel injector disposed in a fluid path from the within the housing.

22. ing to claim 21, wherein the fuel injector is disposed in the intake port.

23. An engine according to claim 5, such engine being a modified axial vane rotary engine, wherein:

the septum is a stator ring,

the piston is a vane mounted for axial reciprocation in the stator ring, and

the housing is a rotary cam ring that rotates with respect to the stator ring and includes a flattened region defining a dwell period over the first angular range during which the vane is stationary with respect to stator ring.

24. An engine according to claim 5, wherein:

the piston is a reciprocating blade,

the septum is a hub having a circular cross section in which the piston is slidably mounted, and

the housing is concentrically disposed around the hub and rotates with respect to the hub and includes a first interior circular wall portion that maintains sealing contact with the hub in the course of the housing's rotation around the hub and a second wall portion contiguous with the first interior wall portion, the wall portions defining, with the blade and the hub, a working chamber over the first and second angular ranges.

25. A method of operating an internal combustion engine, the method comprising:

using a cam, rotatably mounted in a housing, and a cam follower, mounted within the housing and movable with respect to the housing, to define, over first and second angular ranges of an engine cycle, a working chamber that is isolated from an intake port and an exhaust port, the working chamber having substantially constant volume over the first angular range;

introducing fuel into the working chamber;

introducing pressurized working medium into the working chamber over a fluid path through the intake port from a source of pressurized working medium, so as to cause a temporary drop in the working medium pressure and efficient mixing of the working medium with fuel introduced into the working chamber, under conditions of continually increasing pressure of working medium in the working chamber, until temperature of the

fuel-working-medium mixture reaches an ignition temperature resulting in combustion of the mixture causing an increase in pressure in the working medium which increase in pressure causes rotation of the cam, such combustion commencing within the first angular range.

26. A method according to claim 25, the method further comprising:

closing a valve in the fluid path between the source of pressurized working medium and the working chamber when pressure in the working chamber exceeds pressure of the source of pressurized working medium.

27. A method according to claim 25, further comprising:

operating the cam and the cam follower simultaneously at least over the first and second angular ranges of the cycle to define an exhaust chamber that is isolated from the intake port but coupled to the exhaust port.

28. An internal combustion engine comprising:

a source of a pressurized working medium;

an expander including

a housing;

a cam, rotatably mounted within and with respect to the housing, each complete rotation of the cam defining at least a part of a cycle of the engine;

an intake port, coupled between the source and the housing, to permit entry of a working medium into the housing,

an exhaust port, coupled to the housing, to permit exit of expended working medium from within the housing;

a cam-following rocker, mounted within the housing and movable with respect to the housing and the cam so as to define in conjunction therewith, over first and second angular ranges of the cycle, a working chamber that is isolated from the intake port and the exhaust port;

wherein:

the working medium includes one of (i) an oxygen-containing gas to which fuel is added in the course of the cycle and (ii) an oxygen-containing-gas-fuel mixture, and,

at least over the first angular range, oxidation of the fuel occurs and the working chamber has a volume that is substantially constant; such oxidation providing

heat to the working medium so as to increase its pressure; and

the working chamber, over a second angular range of the cycle, exert a force on the cam receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes rotation of the cam.

29. An engine according to claim 28, wherein the cam and the rocker simultaneously define at least over the first and second angular ranges of the cycle an exhaust chamber that is isolated from the intake port but coupled to the exhaust port.

30. An internal combustion engine, comprising:

a housing having an interior region with a generally circular cross section defined by an inner surface of the housing, wherein the generally circular cross section is interrupted by a rocker mounting region, the housing also having a pair of sides;

a cam, rotatably mounted in the housing, that sweeps a circular path in the interior region, the cam in sealing contact with the sides of the housing and also, when a leading edge of the cam is not adjacent to the rocker mounting region, in sealing contact with the inner surface of the housing;

a cam-following rocker, mounted in the rocker mounting region, in sealing contact with the sides of the housing, and, at least when the leading edge of the cam is not adjacent to the rocker mounting region, in sealing contact with the cam, the rocker having a seated position defining generally, when a leading edge of the cam is adjacent to the rocker mounting region, a continuation of the circular cross section of the housing, the rocker pivoted at a pivot end to move at a free end generally radially with respect to the circular path of the cam, so that the free end of the pivot reciprocates between the seated position and a maximum unseated position, completing a full reciprocation cycle when the cam completes a revolution around the working region;

a combustion chamber, formed in the housing proximate to the rocker mounting region adjacent to the free end of the rocker, and having an opening, such opening being occluded over a first angular range of rotation of the cam;

an intake port coupled to the combustion chamber for providing pressurized working medium, the working medium including one of (i) an oxygen-containing gas to which fuel is added within or before the first angular range and (ii) an oxygen-containing-gas-fuel mixture;

wherein combustion occurs within the first angular range so as to provide

substantially constant volume combustion in the combustion chamber;

rocker being configured to provide an expansion region over a
sec when the arcuate opening is not occluded; and

an exhaust port, formed in the housing proximate to the rocker mounting region
adjacent to the free end of the rocker, for removing expended working medium.

31. An internal combustion engine comprising:

a housing;

a piston, reciprocally mounted within and with respect to the housing, each
complete reciprocation defining at least a part of a cycle of the engine, each stroke of the
piston defining its displacement in a working chamber of the housing;

an intake port, coupled between the pump and the working chamber, to permit
entry of the working medium into the working chamber, the working medium including
one of (i) an oxygen-containing gas to which fuel is added in the course of the cycle and
(ii) an oxygen-containing-gas-fuel mixture;

an exhaust port, coupled to the working chamber, to permit exit of expended
working medium from within the working chamber;

a cam coupled to the piston, such cam defining displacement of the piston as a
function of angular extent of the cycle

wherein:

at least over a first angular range of the cycle, oxidation of the fuel occurs
and the cam has a shape that causes substantially no displacement of the piston, so that the
working chamber has a volume that is substantially constant; such oxidation providing
heat to the working medium so as to increase its pressure; and

the working chamber, over a second angular range of the cycle, expands in
volume while the piston receives, from the working medium as a result of its increased
pressure, a force relative to the housing that causes displacement of the piston.

32. A virtual piston assembly, the assembly comprising:

a body including at least one fluidic diode;

a member rotatably mounted within the body, such member including at least one
fluidic diode;

wherein the member is disposed in relation to the body, and the body has a
correspondingly shaped interior, so as to form a virtual chamber having a volume that

varies with rotation of the member.

33. assembly according to claim 32, wherein the member is a disk.

34. assembly according to claim 32, wherein the member is cylindrical.

35. A virtual piston assembly according to claim 32, wherein the member is conical.

36. A pump comprising:

a housing;

a cam, rotatably mounted within and with respect to the housing, each complete rotation of the cam defining at least a part of a pumping cycle;

an intake port, coupled between the pump and the housing, to permit entry of a fluid,

an exhaust port, coupled to the housing, to permit exit of pumped fluid from within the housing; and

a cam-following rocker, mounted within the housing and movable with respect to the housing and the cam so as to define in conjunction therewith, a working chamber that over a first angular range of the cycle is isolated from the intake port and from the exhaust port.

37. A pump according to claim 36, the pump being a compressor, wherein the working chamber is a compression chamber.

38. A pump according to claim 37, wherein the compression chamber over a second angular range remains isolated from the intake port but coupled to the exhaust port.

39. A pump according to claim 36, wherein the rocker and the cam simultaneously define at least over the first angular range an intake chamber that is isolated from the exhaust port and coupled to the intake port.

40. An internal combustion engine comprising:

a source of a pressurized working medium, such source being optionally a pump;

a fuel source;

an expander including:

a housing;

a piston, movably mounted within and with respect to the housing, to perform one of rotation and reciprocation, each complete rotation or reciprocation defining at least a part of a cycle of the engine;

an intake port, coupled between the source and the housing, to permit entry of into the housing;

y, a turbulence-inducing geometry disposed in a fluid path between the source of pressurized working medium and the working chamber to enhance turbulence formation in the working medium;

an exhaust port, coupled to the housing, to permit exit of expended working medium from within the housing;

a septum, mounted within the housing and movable with respect to the housing and the piston so as to define in conjunction therewith, over first and second angular ranges of the cycle, a working chamber that is isolated from the intake port and the exhaust port, and the working chamber has a volume, over the first angular range, that is substantially constant, and wherein the piston and the septum simultaneously define at least over the first and second angular ranges of the cycle, an exhaust chamber that is isolated from the intake port but coupled to the exhaust port;

wherein the working medium includes one of (i) an oxygen-containing gas to which fuel from the fuel source is added separately in the course of the cycle and (ii) an oxygen-containing-gas with which fuel from the fuel source is mixed outside the course of a cycle, and the fuel undergoes combustion in the working chamber at least over the first angular range, such combustion providing heat to the working medium so as to increase its pressure;

wherein the working chamber over a second angular range of the cycle expands in volume while the piston receives, from the working medium as a result of its increased pressure, a force relative to the housing that causes motion of the piston relative to the housing;

an optional fuel valve assembly coupled between the fuel source and the expander;

an optional air valve assembly coupled between the pressurized working medium source and the expander, such assembly optionally including a check valve;

an optional controller, coupled to the optional fuel valve assembly and to the optional air valve assembly, such controller also coupled to obtain engine cycle position information, the controller operating the optional air valve assembly to cut off flow of the working medium to the expander during a portion of the cycle when addition of working medium is not needed and operating the optional fuel valve assembly to cut off flow of

fuel to the expander during a portion of the cycle when fuel addition is not needed;
controller being configured to cause cut off of flow of fuel to the
expander during some cycles of the engine so that the engine runs at less than a hundred
percent duty cycle; also optionally, operation of the controller to cause cut off of fuel flow
to the expander during some cycles of the engine effectuating no substantial reduction of
supply of working medium to the expander, so that working medium supplied to the
expander when fuel flow to the expander is cut off serves to cool the engine, and the
controller is configured to operate the engine under normal conditions at less than one
hundred percent duty cycle so as to provide cooling to the engine;

optionally wherein the piston is a cam, and the septum is a cam-following rocker,
engagable against the cam; and

optionally wherein introduction of the pressurized working medium through the
intake port into the working chamber causes a temporary drop in the working medium
pressure and efficient mixing of the working medium with fuel introduced into the
working chamber, under conditions of continually increasing pressure of working medium
in the working chamber, until temperature of the fuel-working-medium mixture reaches an
ignition temperature resulting in combustion of the mixture, such combustion causing an
increase of pressure in the working medium that, in turn, causes the check valve to close
automatically.

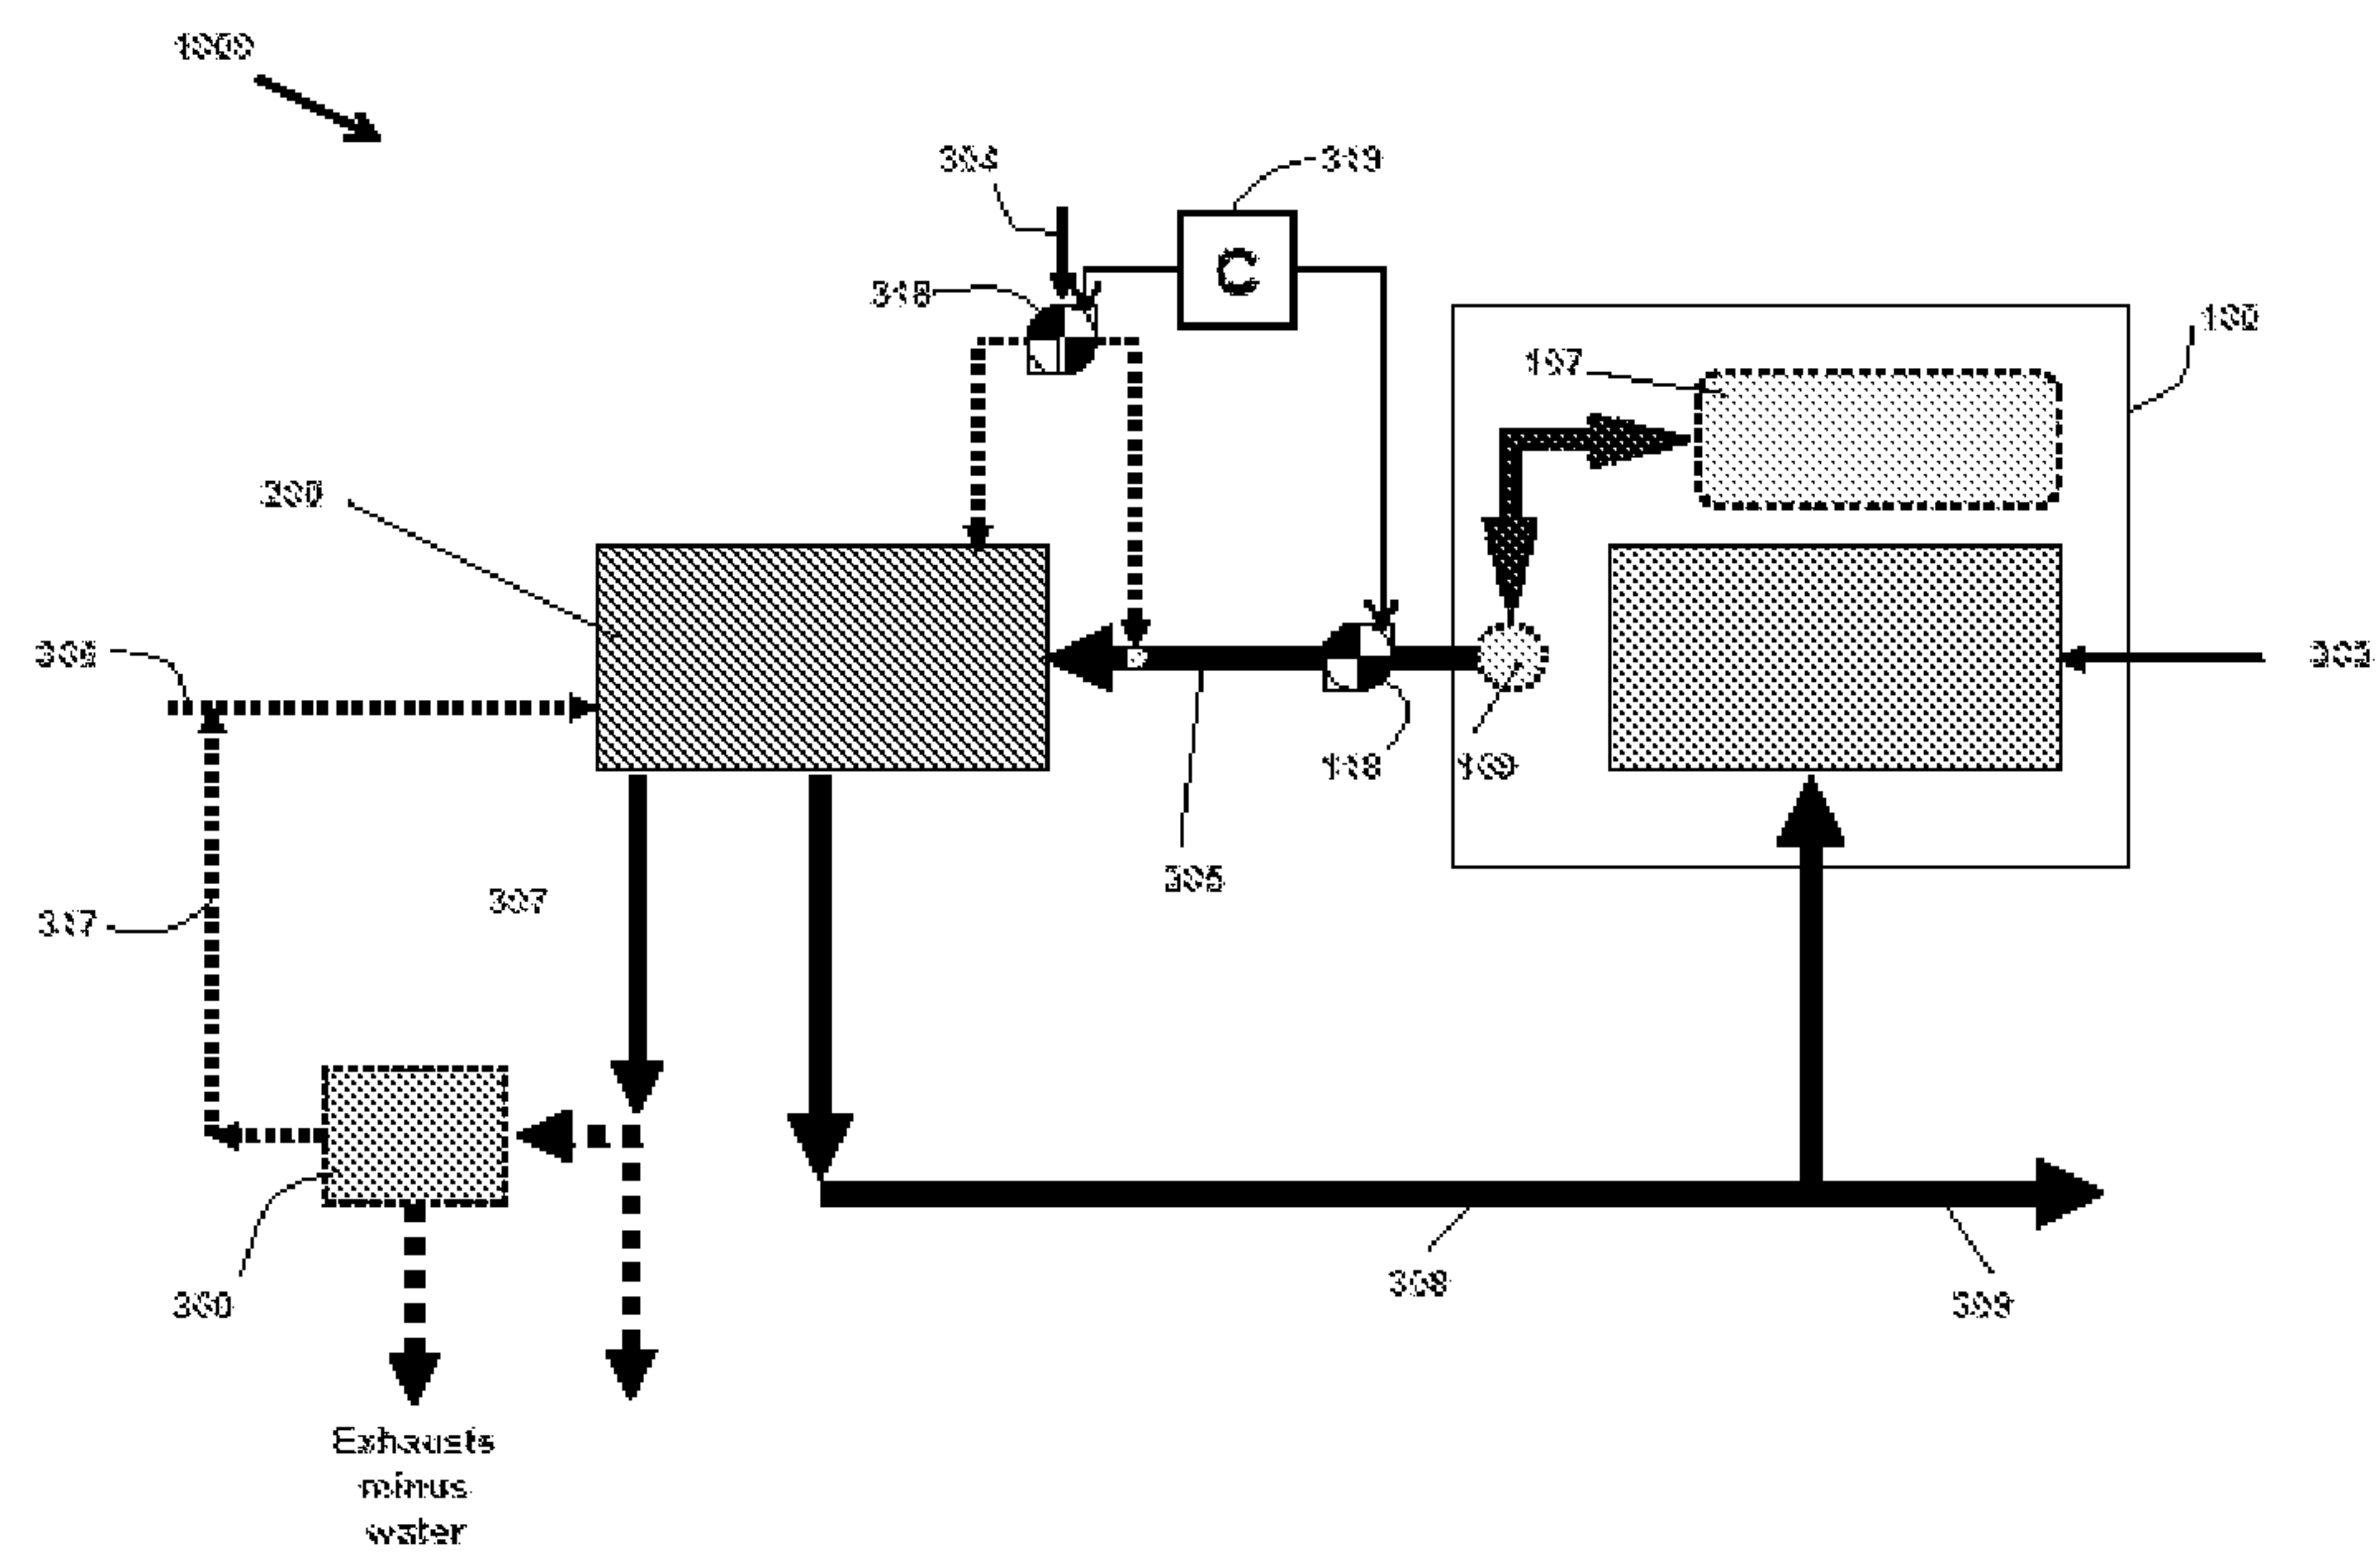


Fig. 1

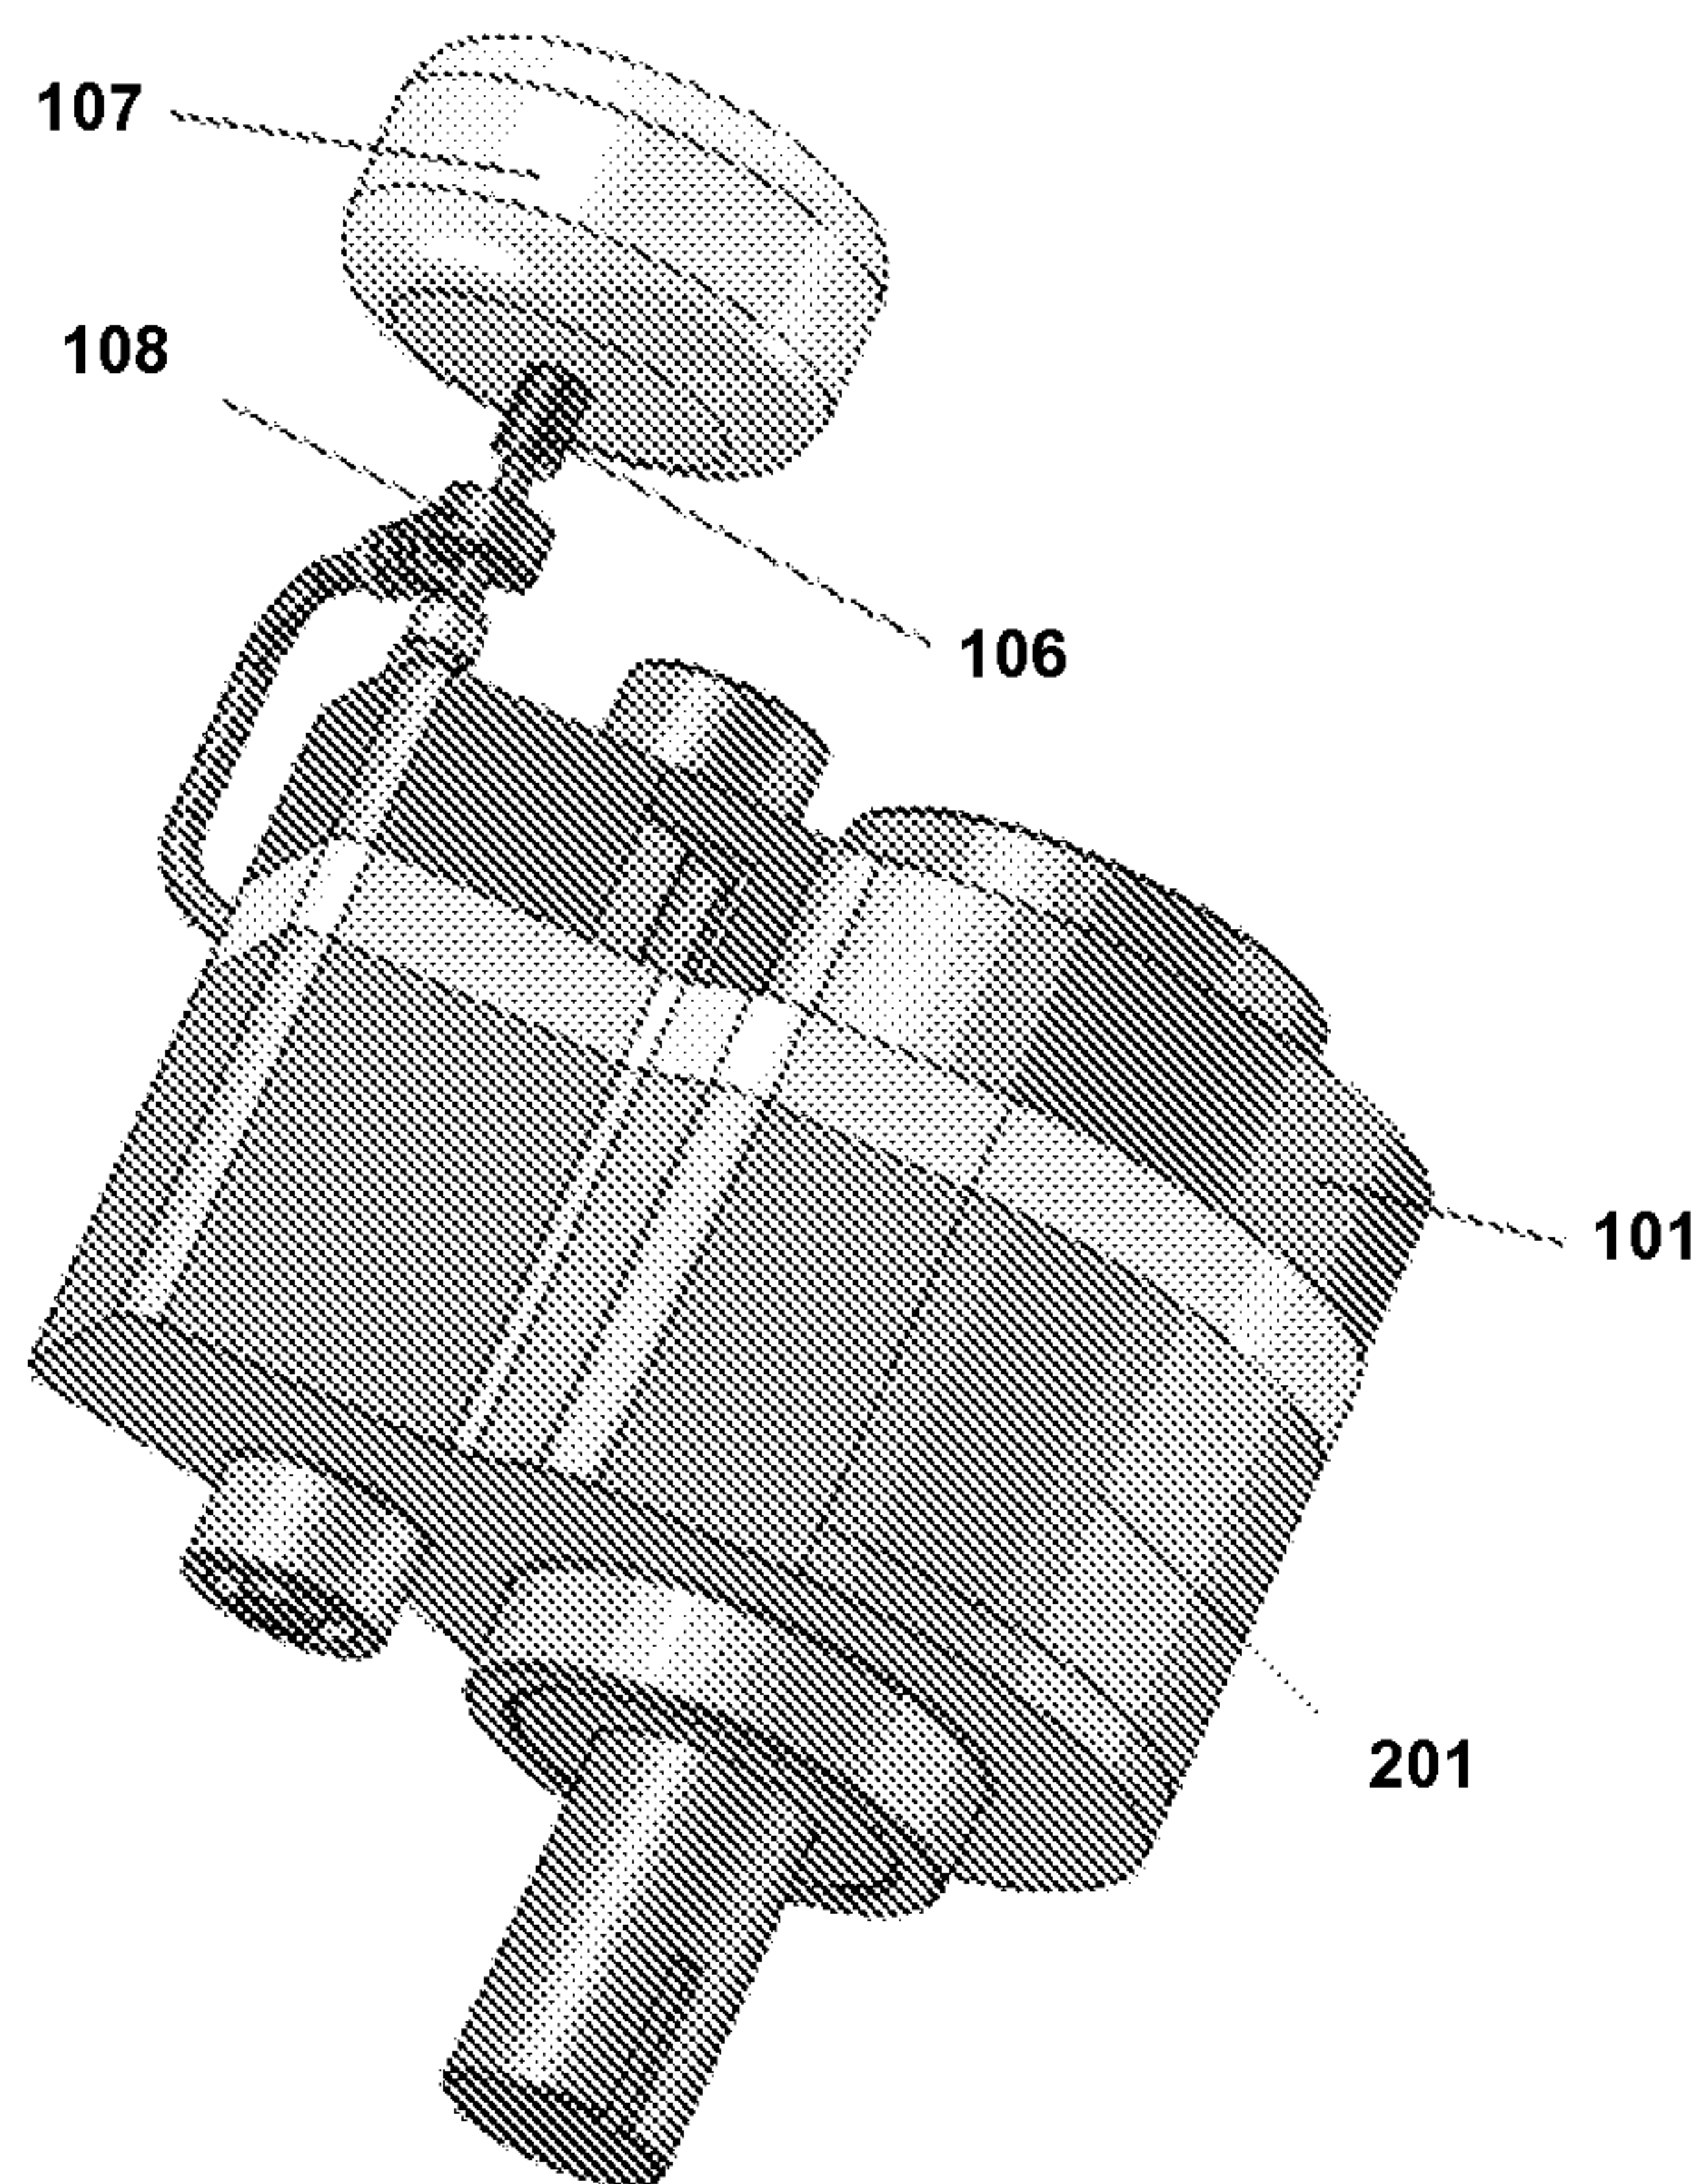
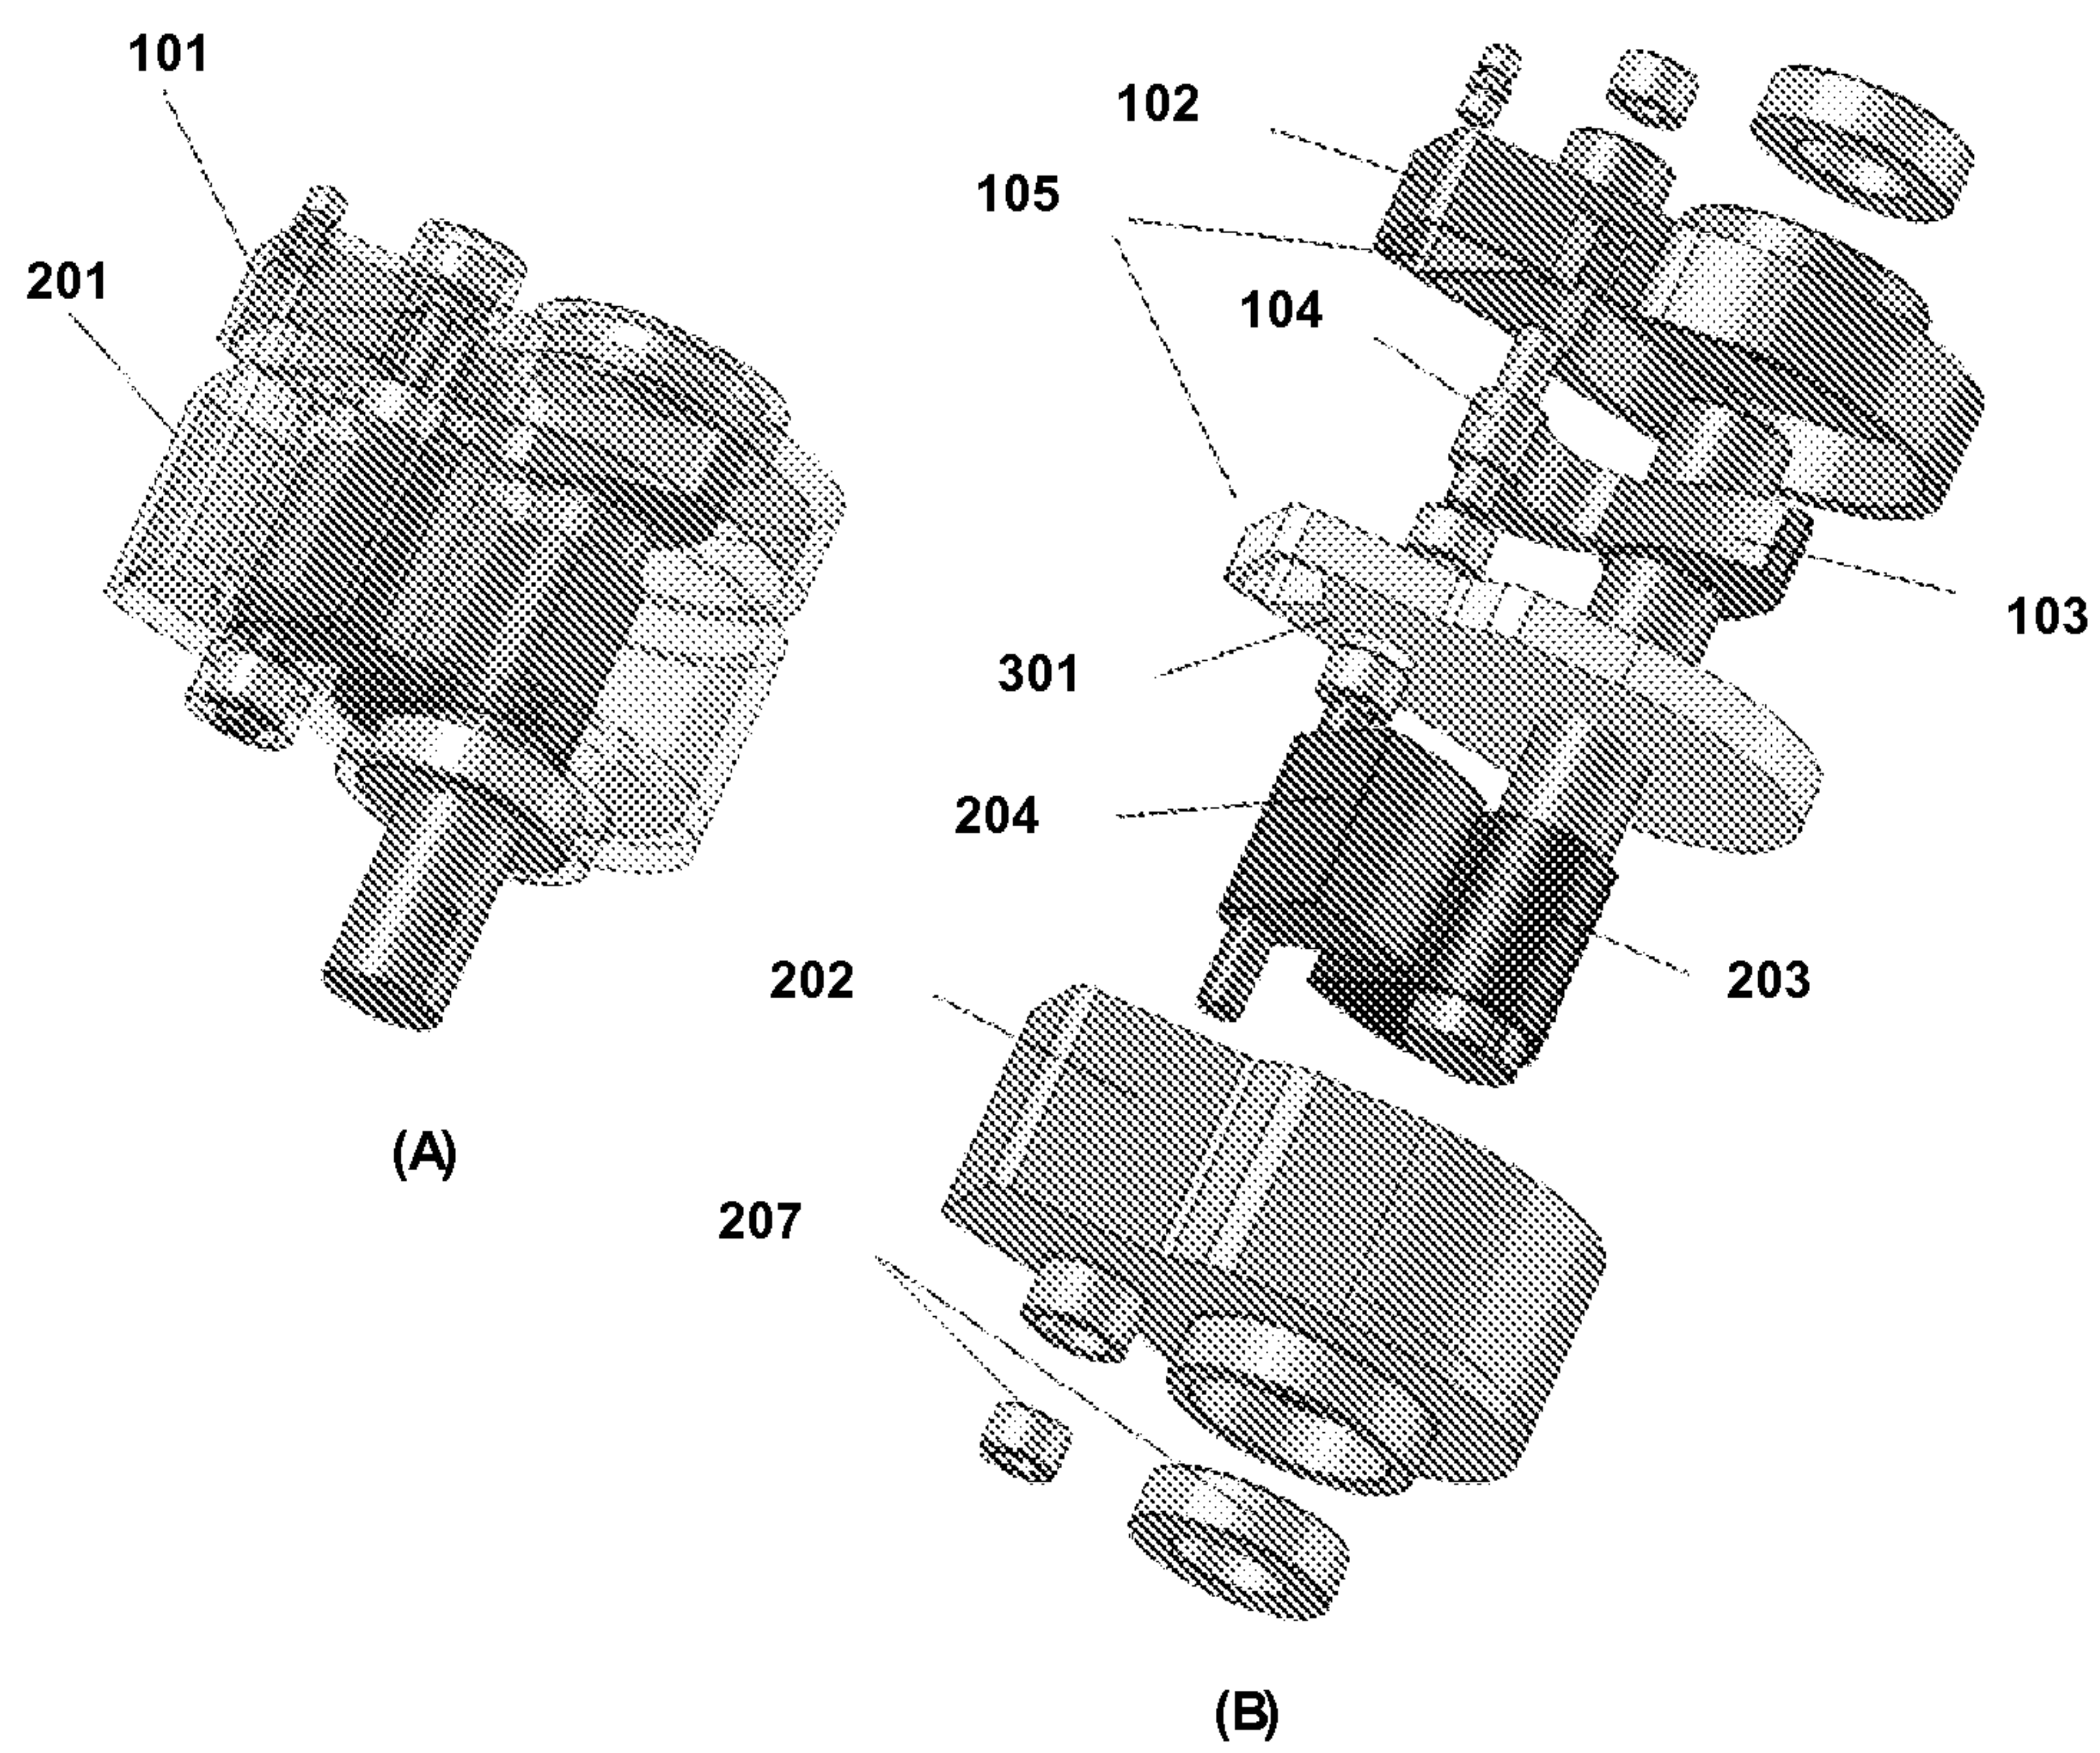


Fig. 2

**Fig. 3**

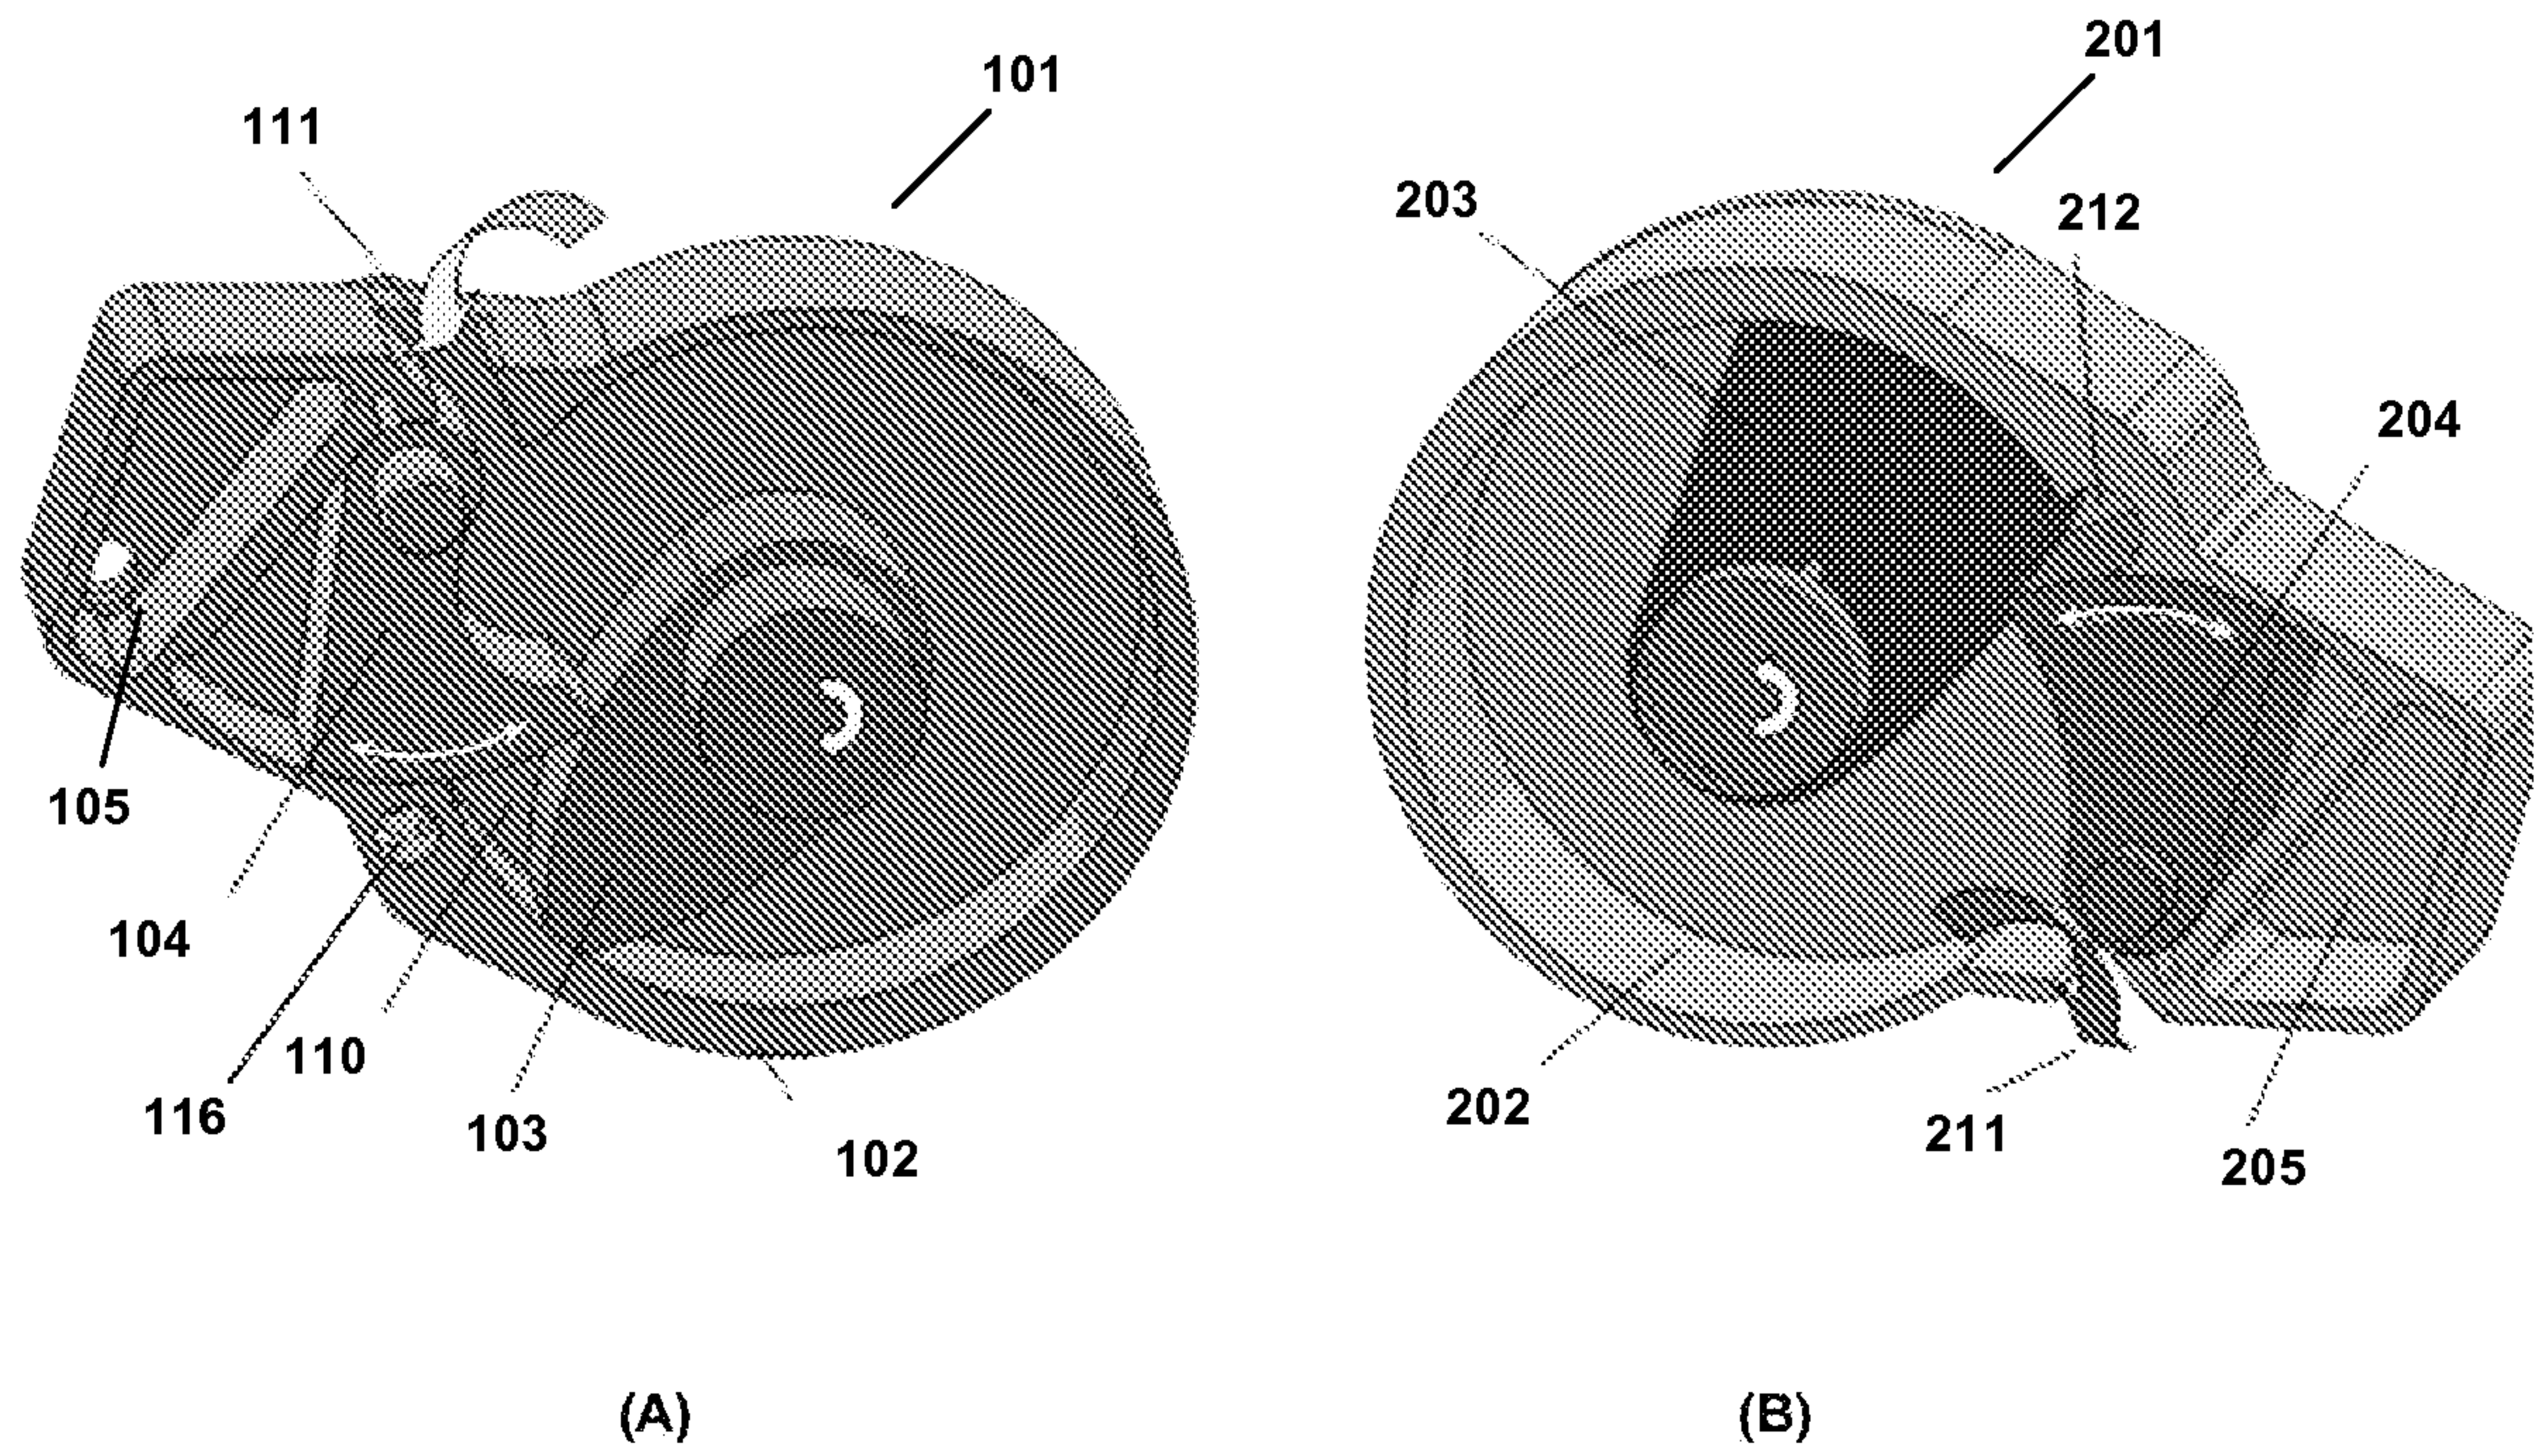


Fig. 4

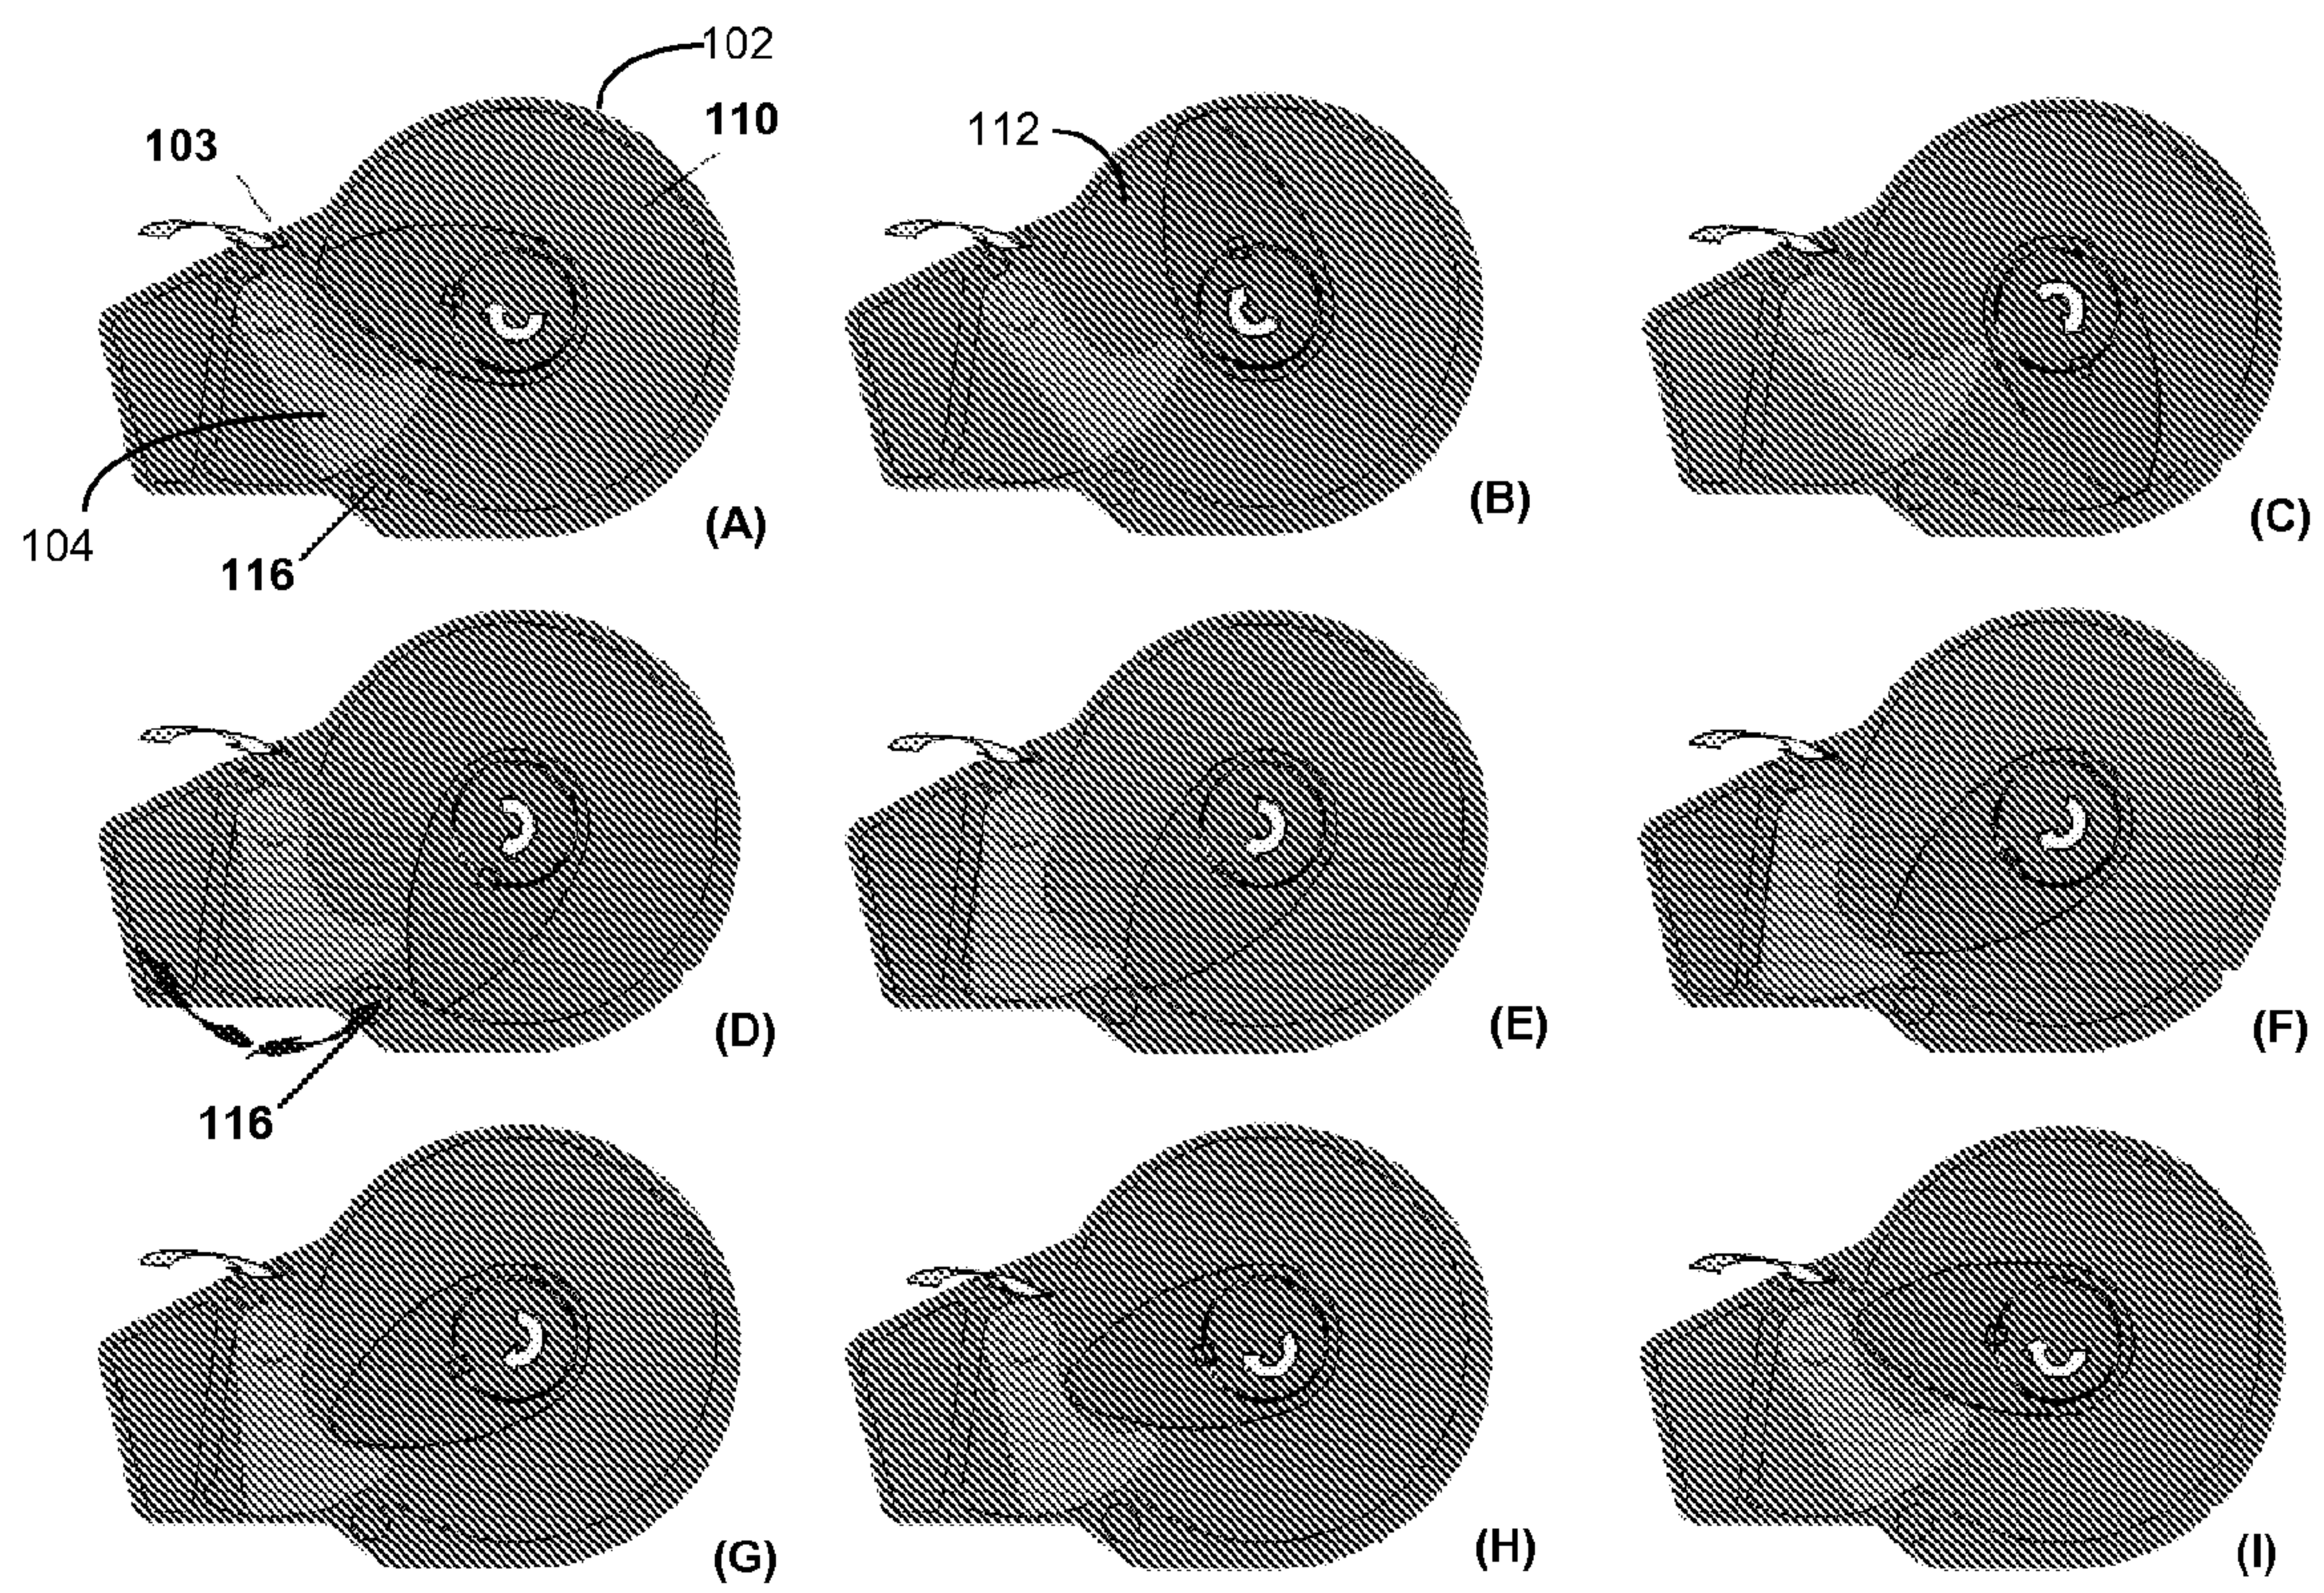


Fig. 5

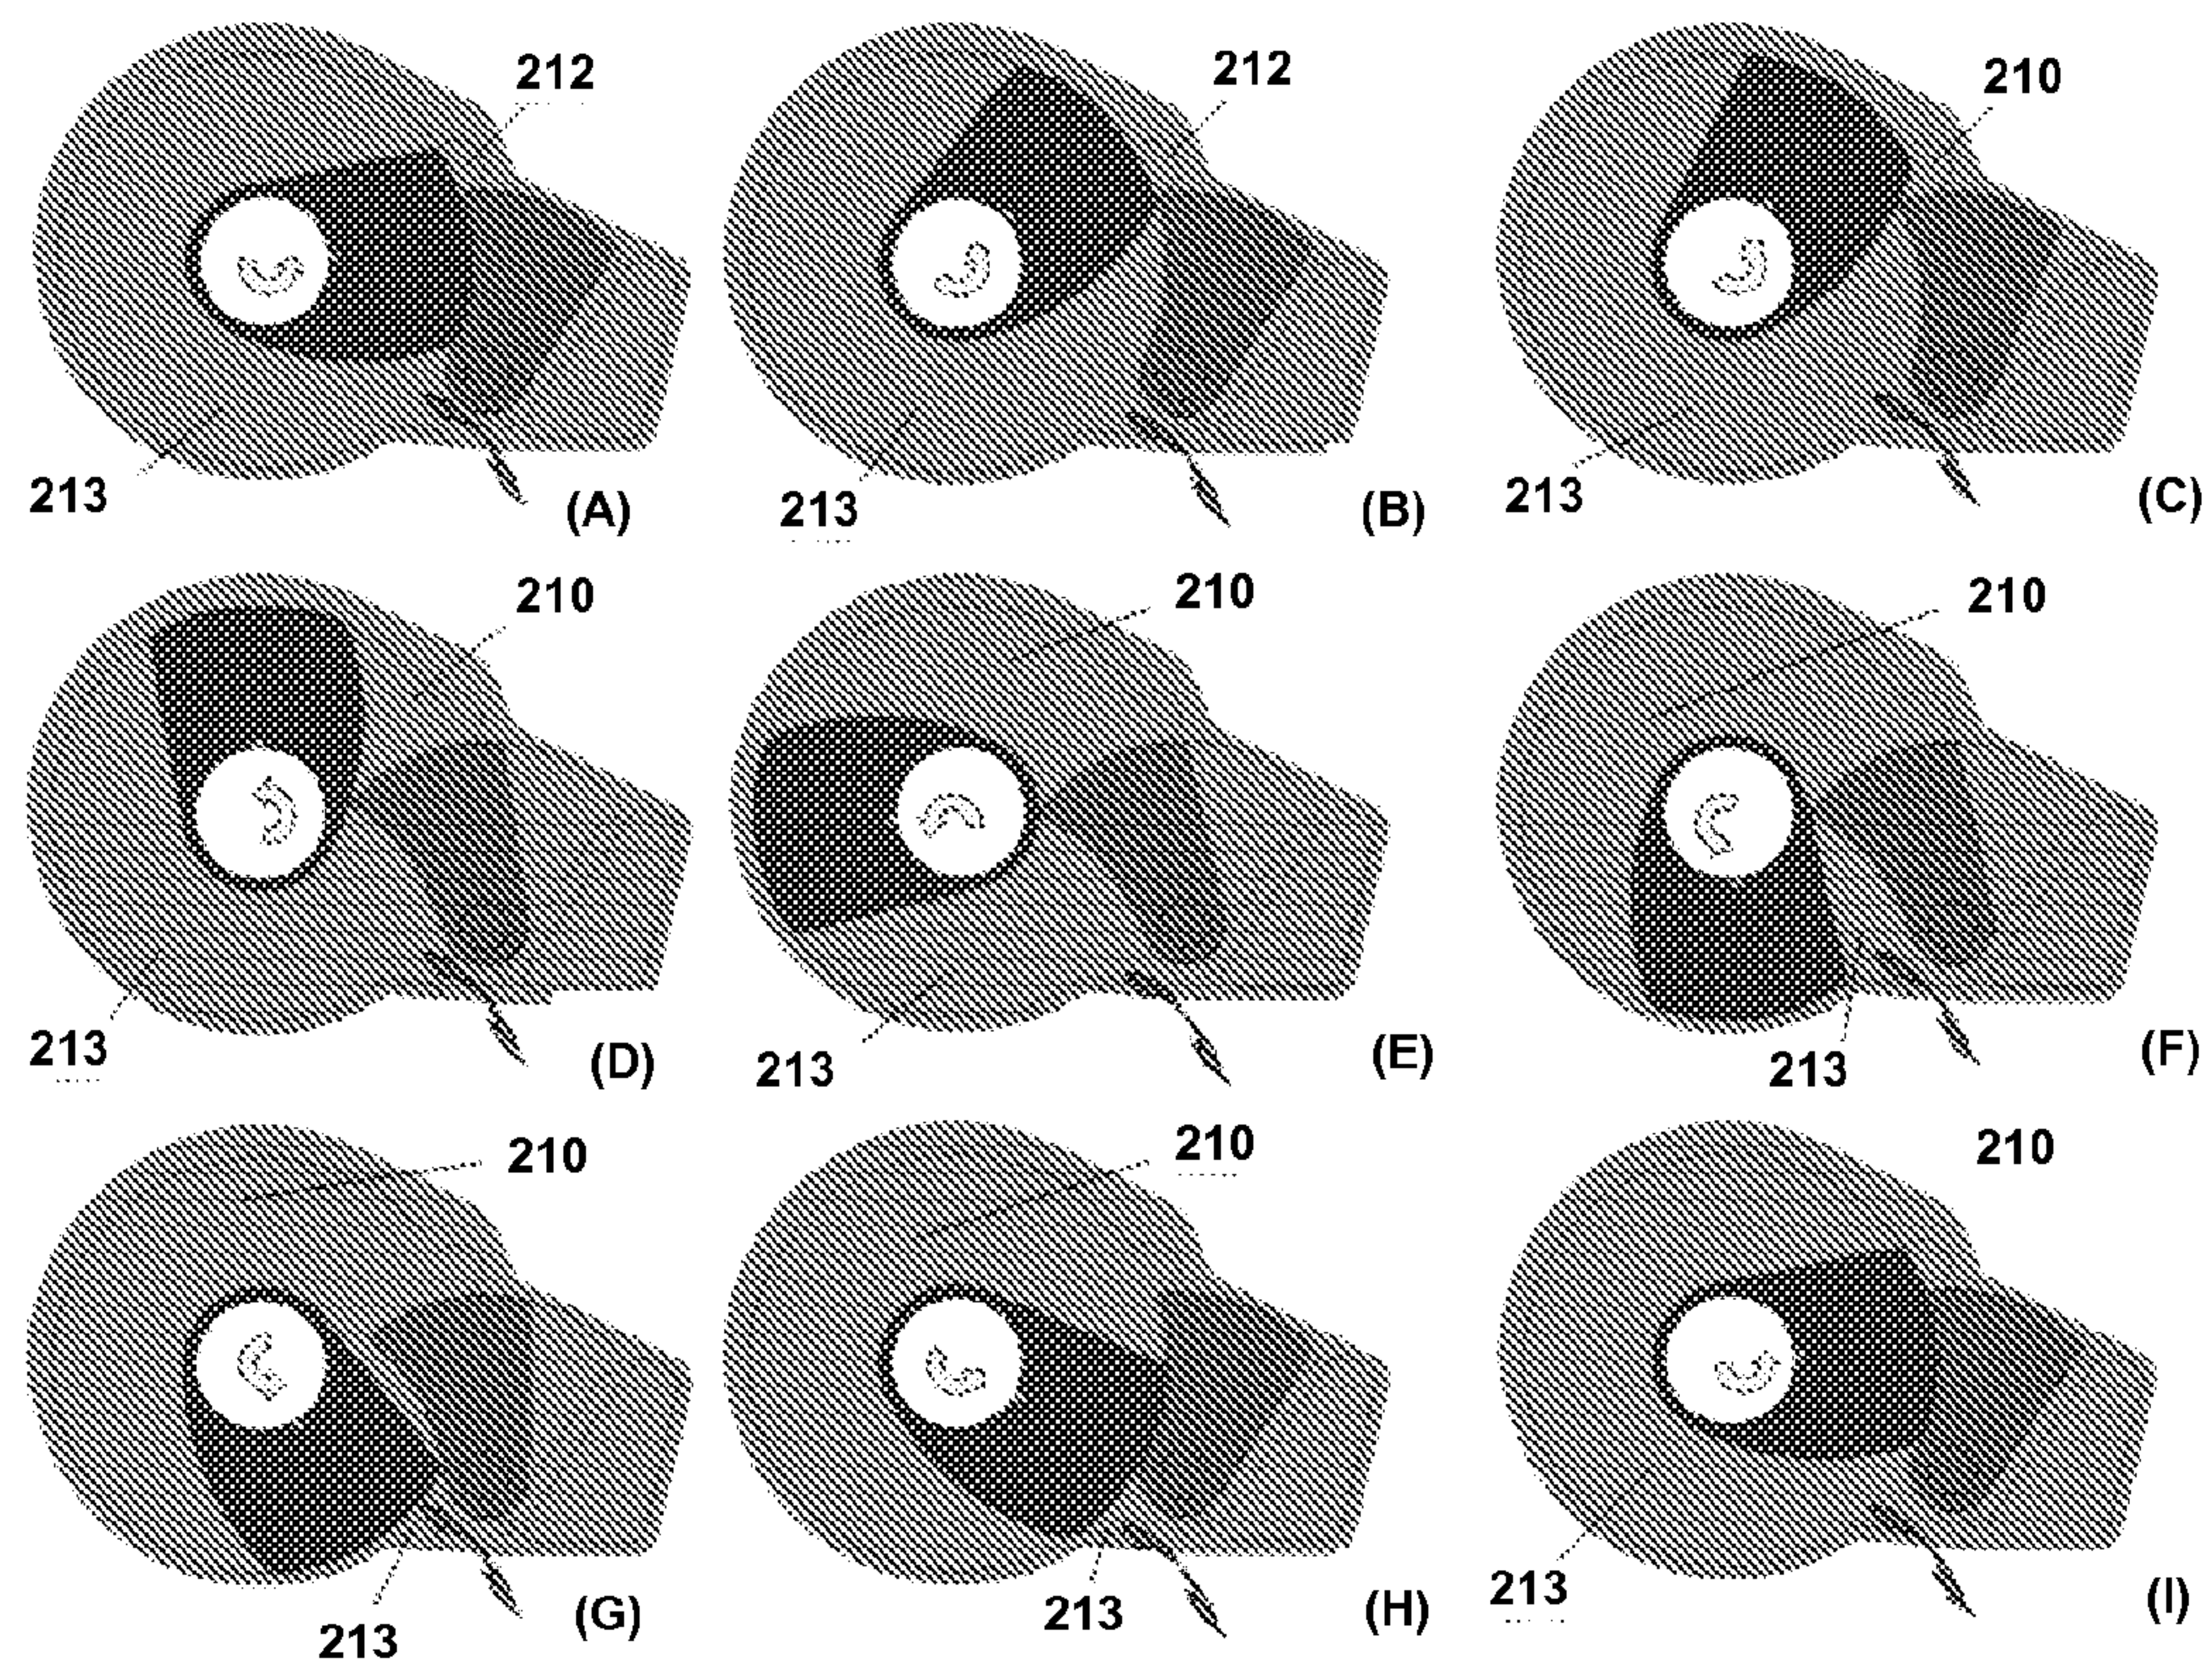


Fig. 6

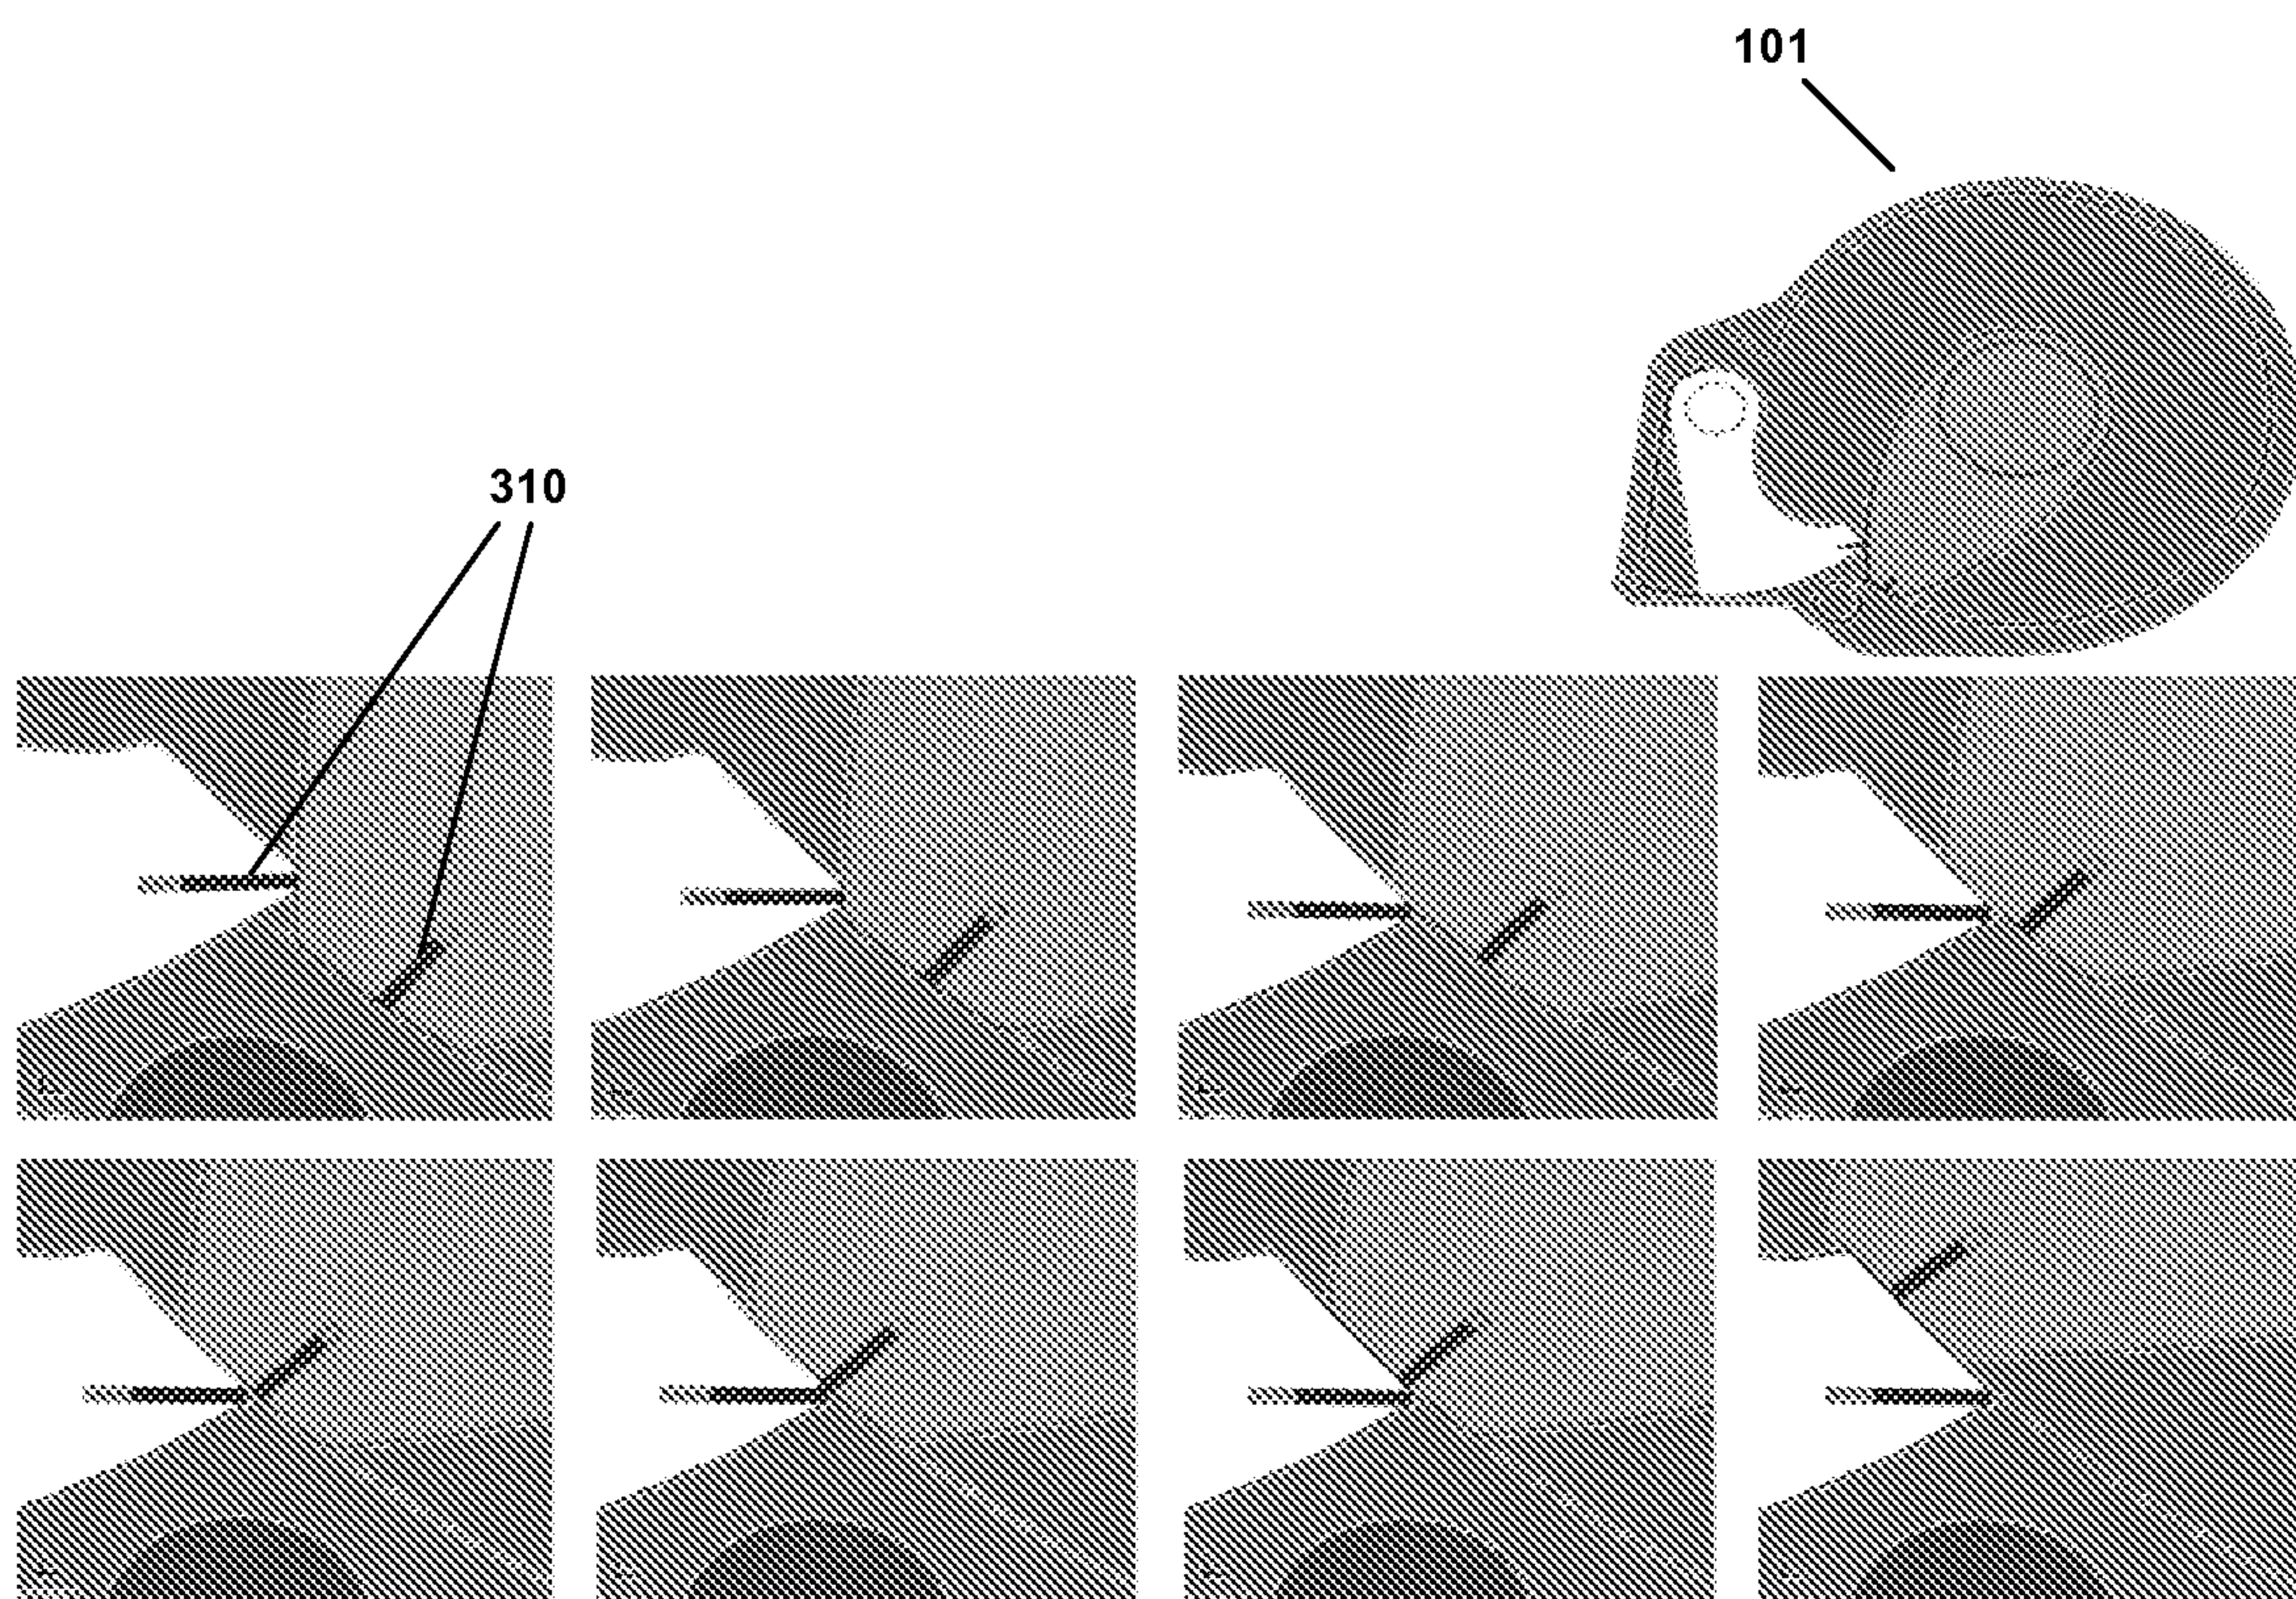


Fig. 7

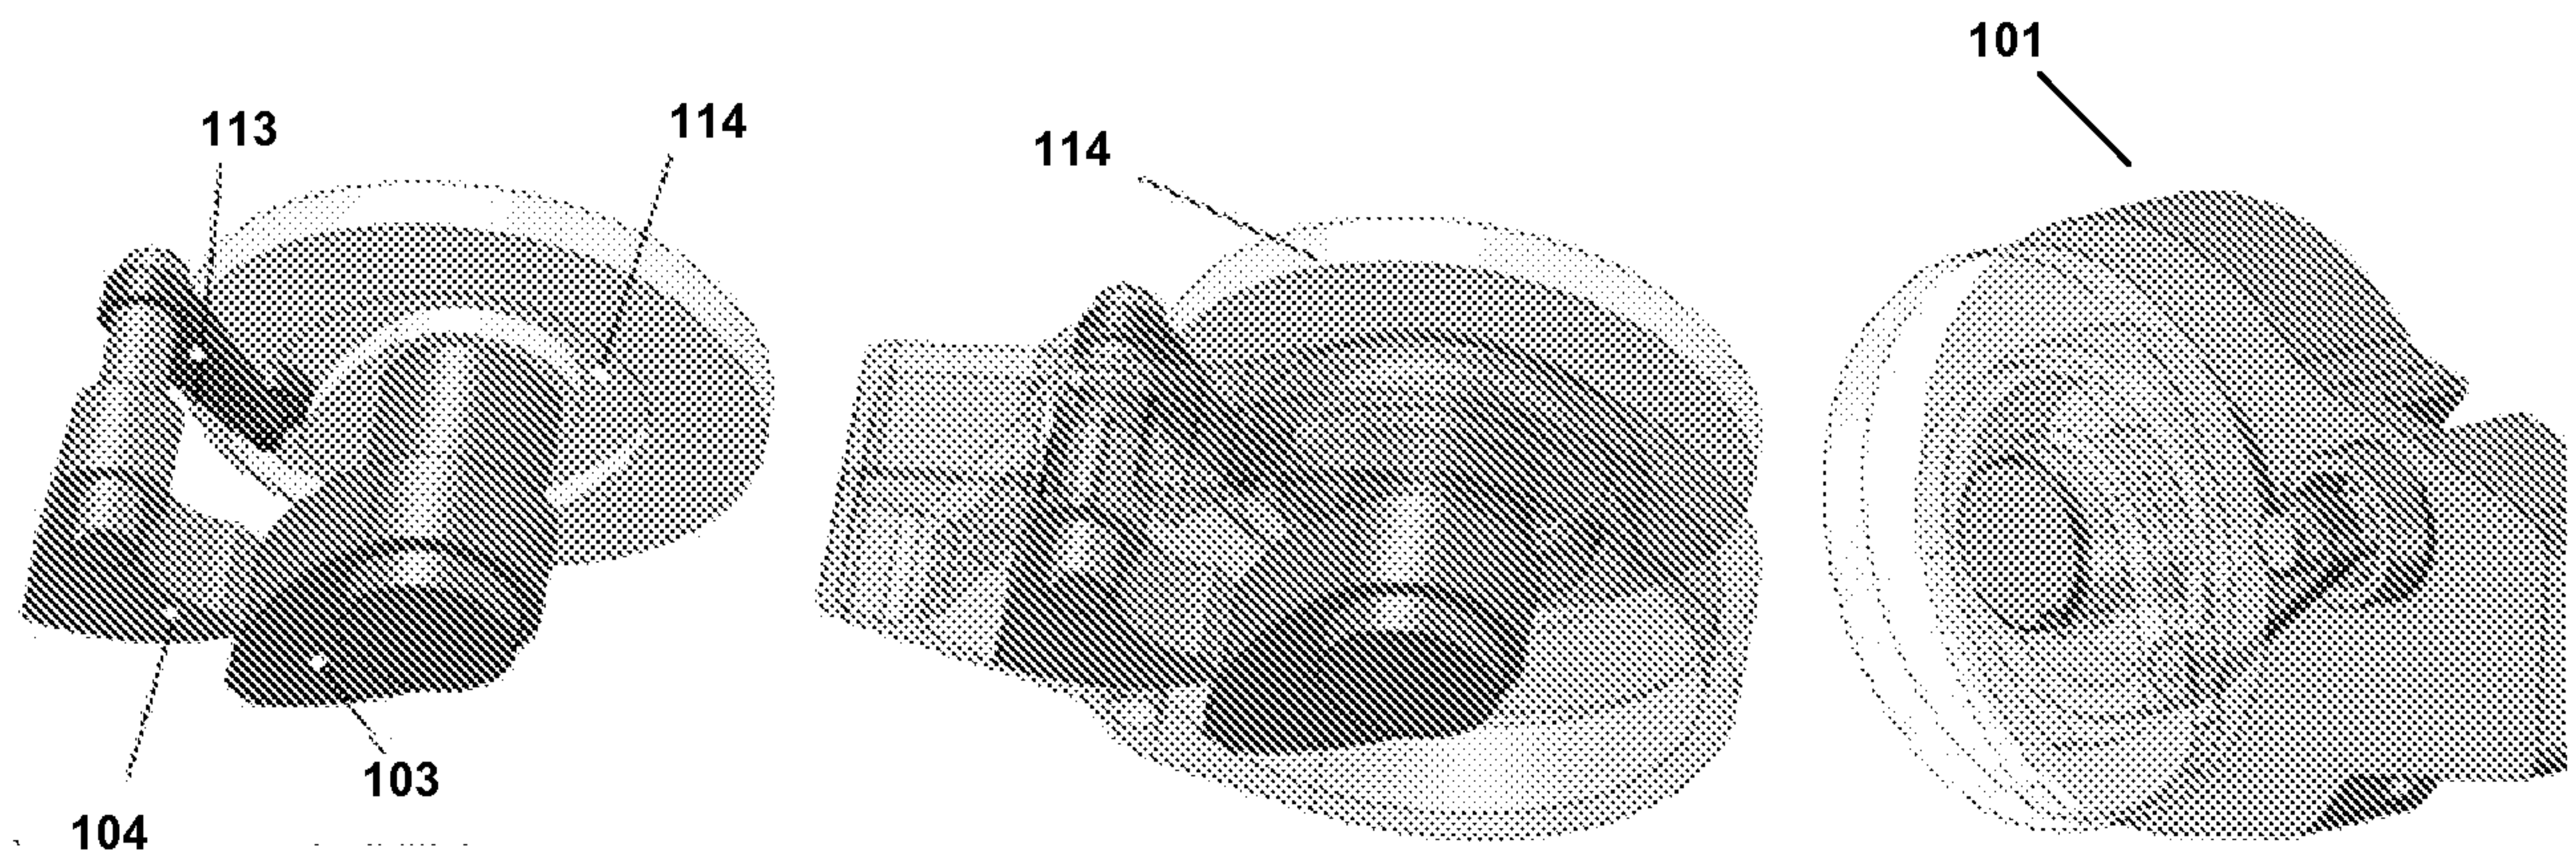


Fig. 8

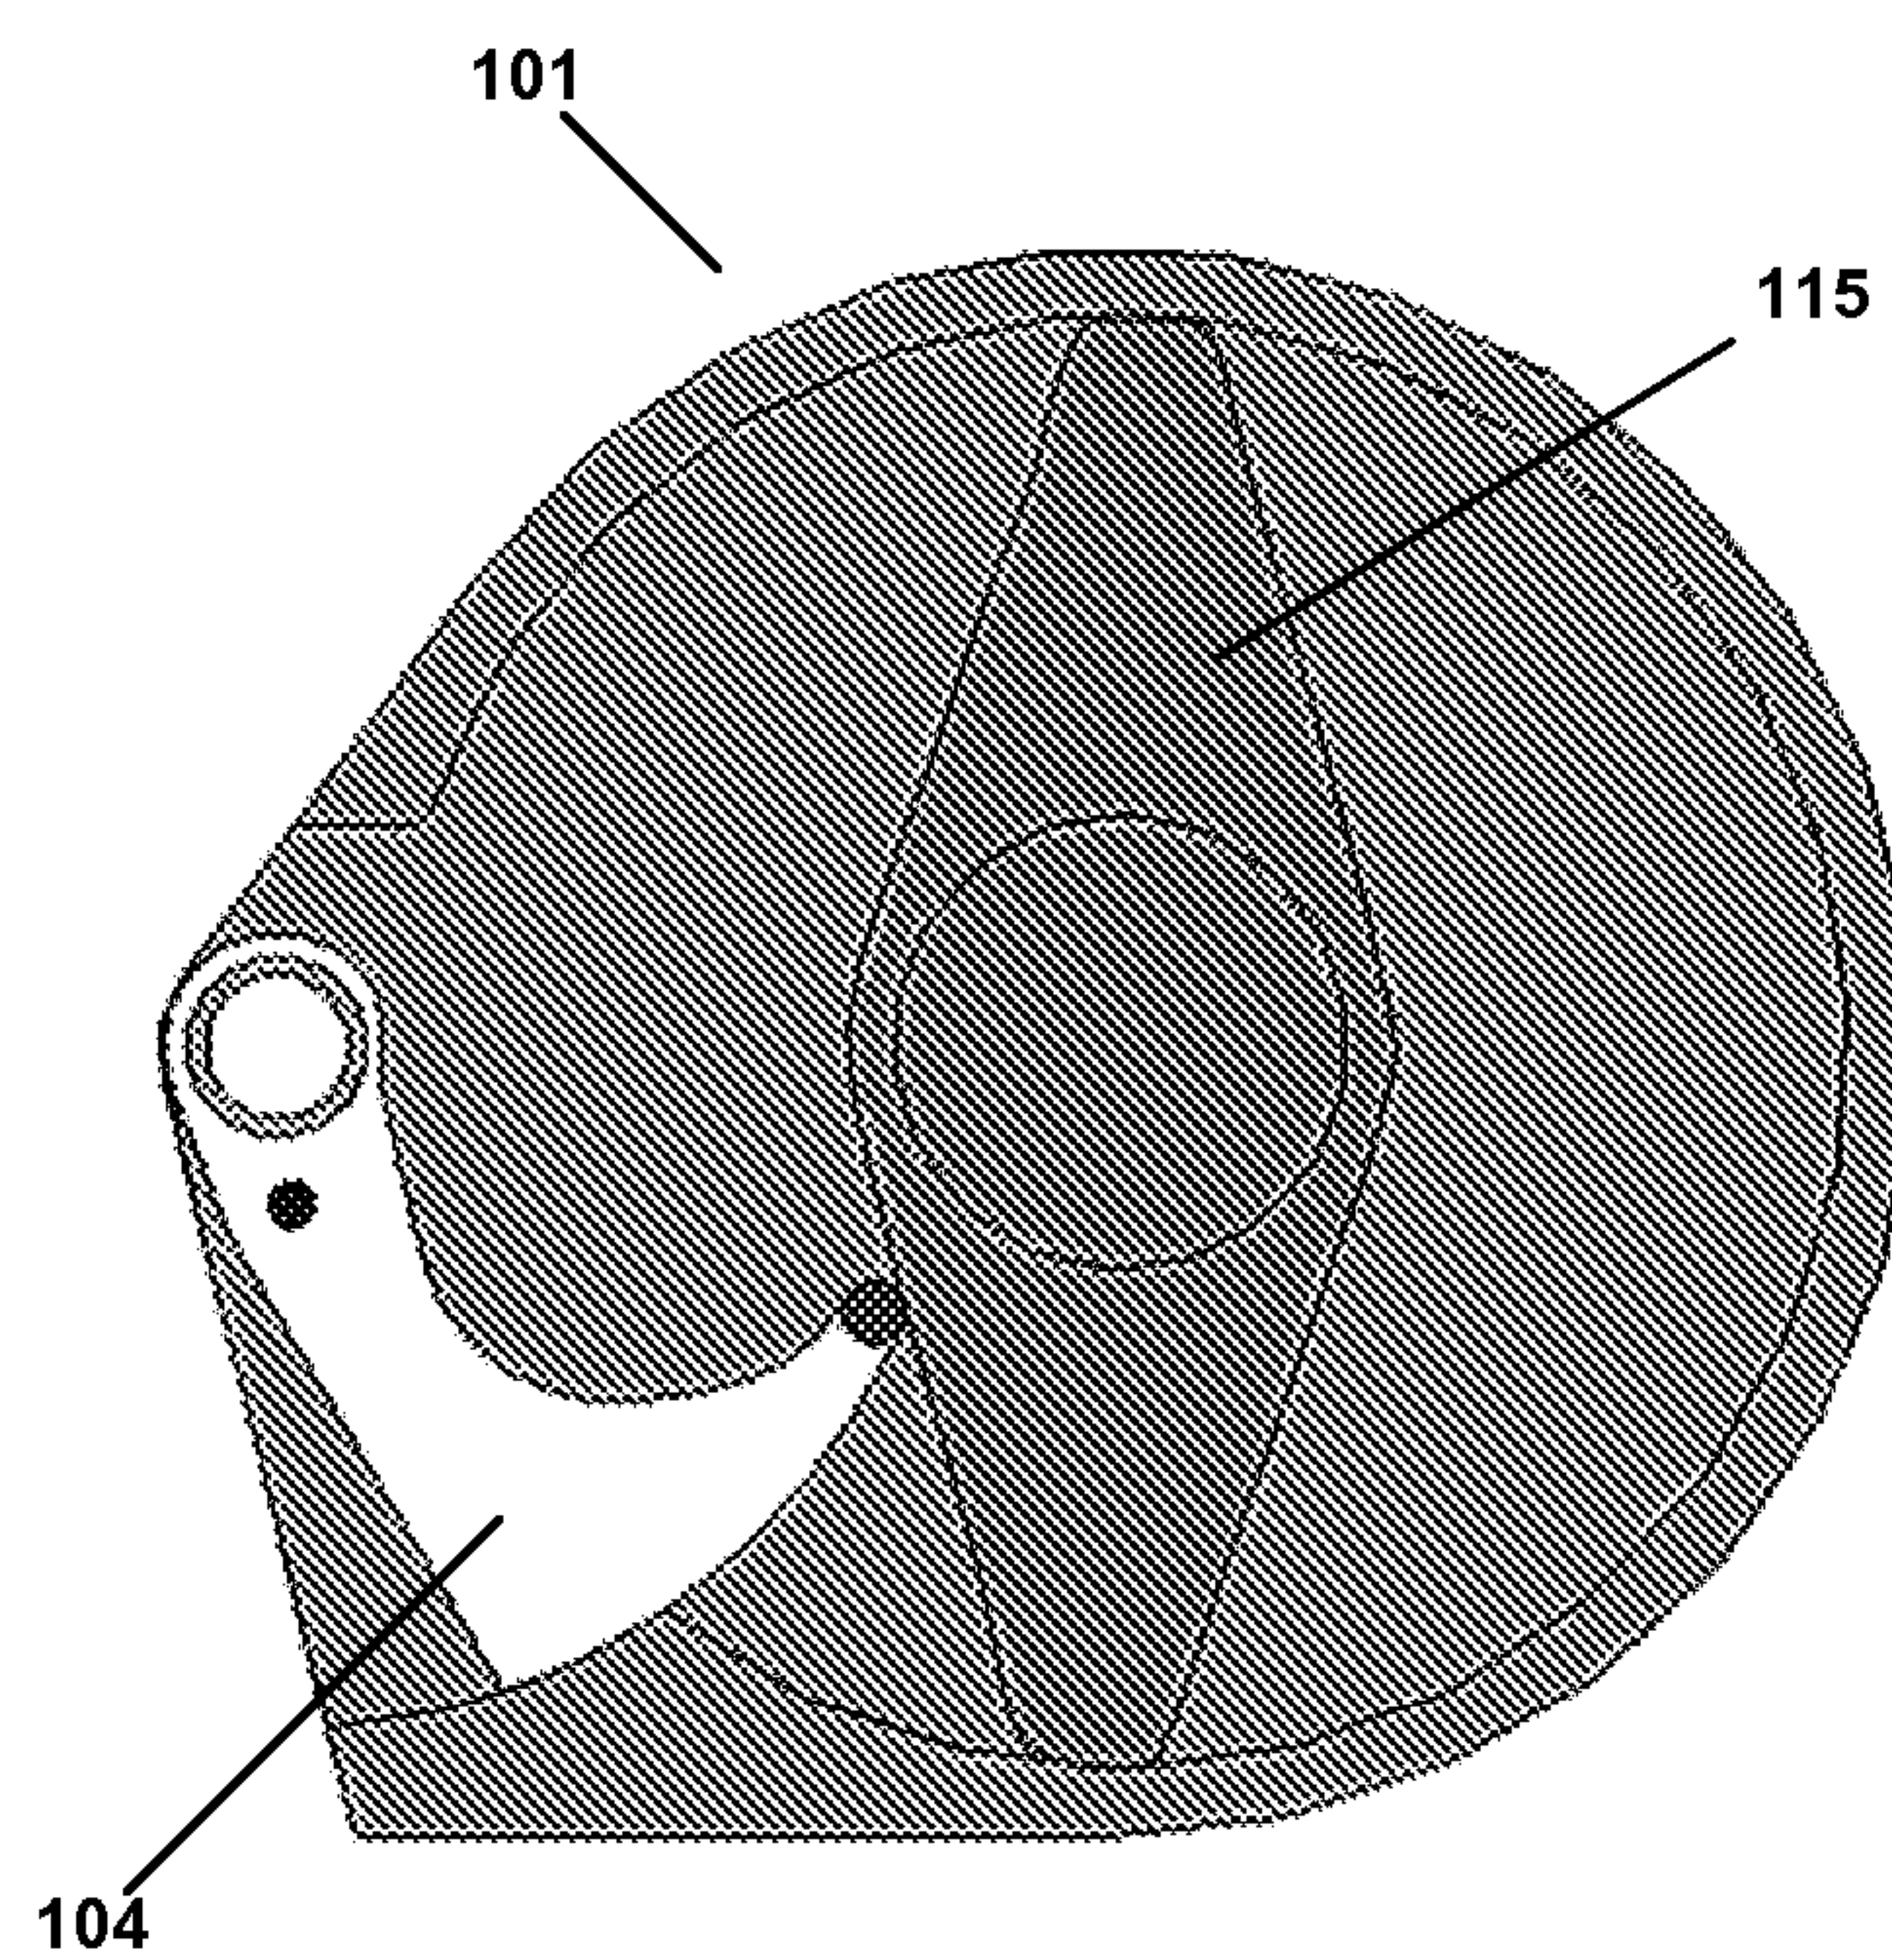


Fig. 9

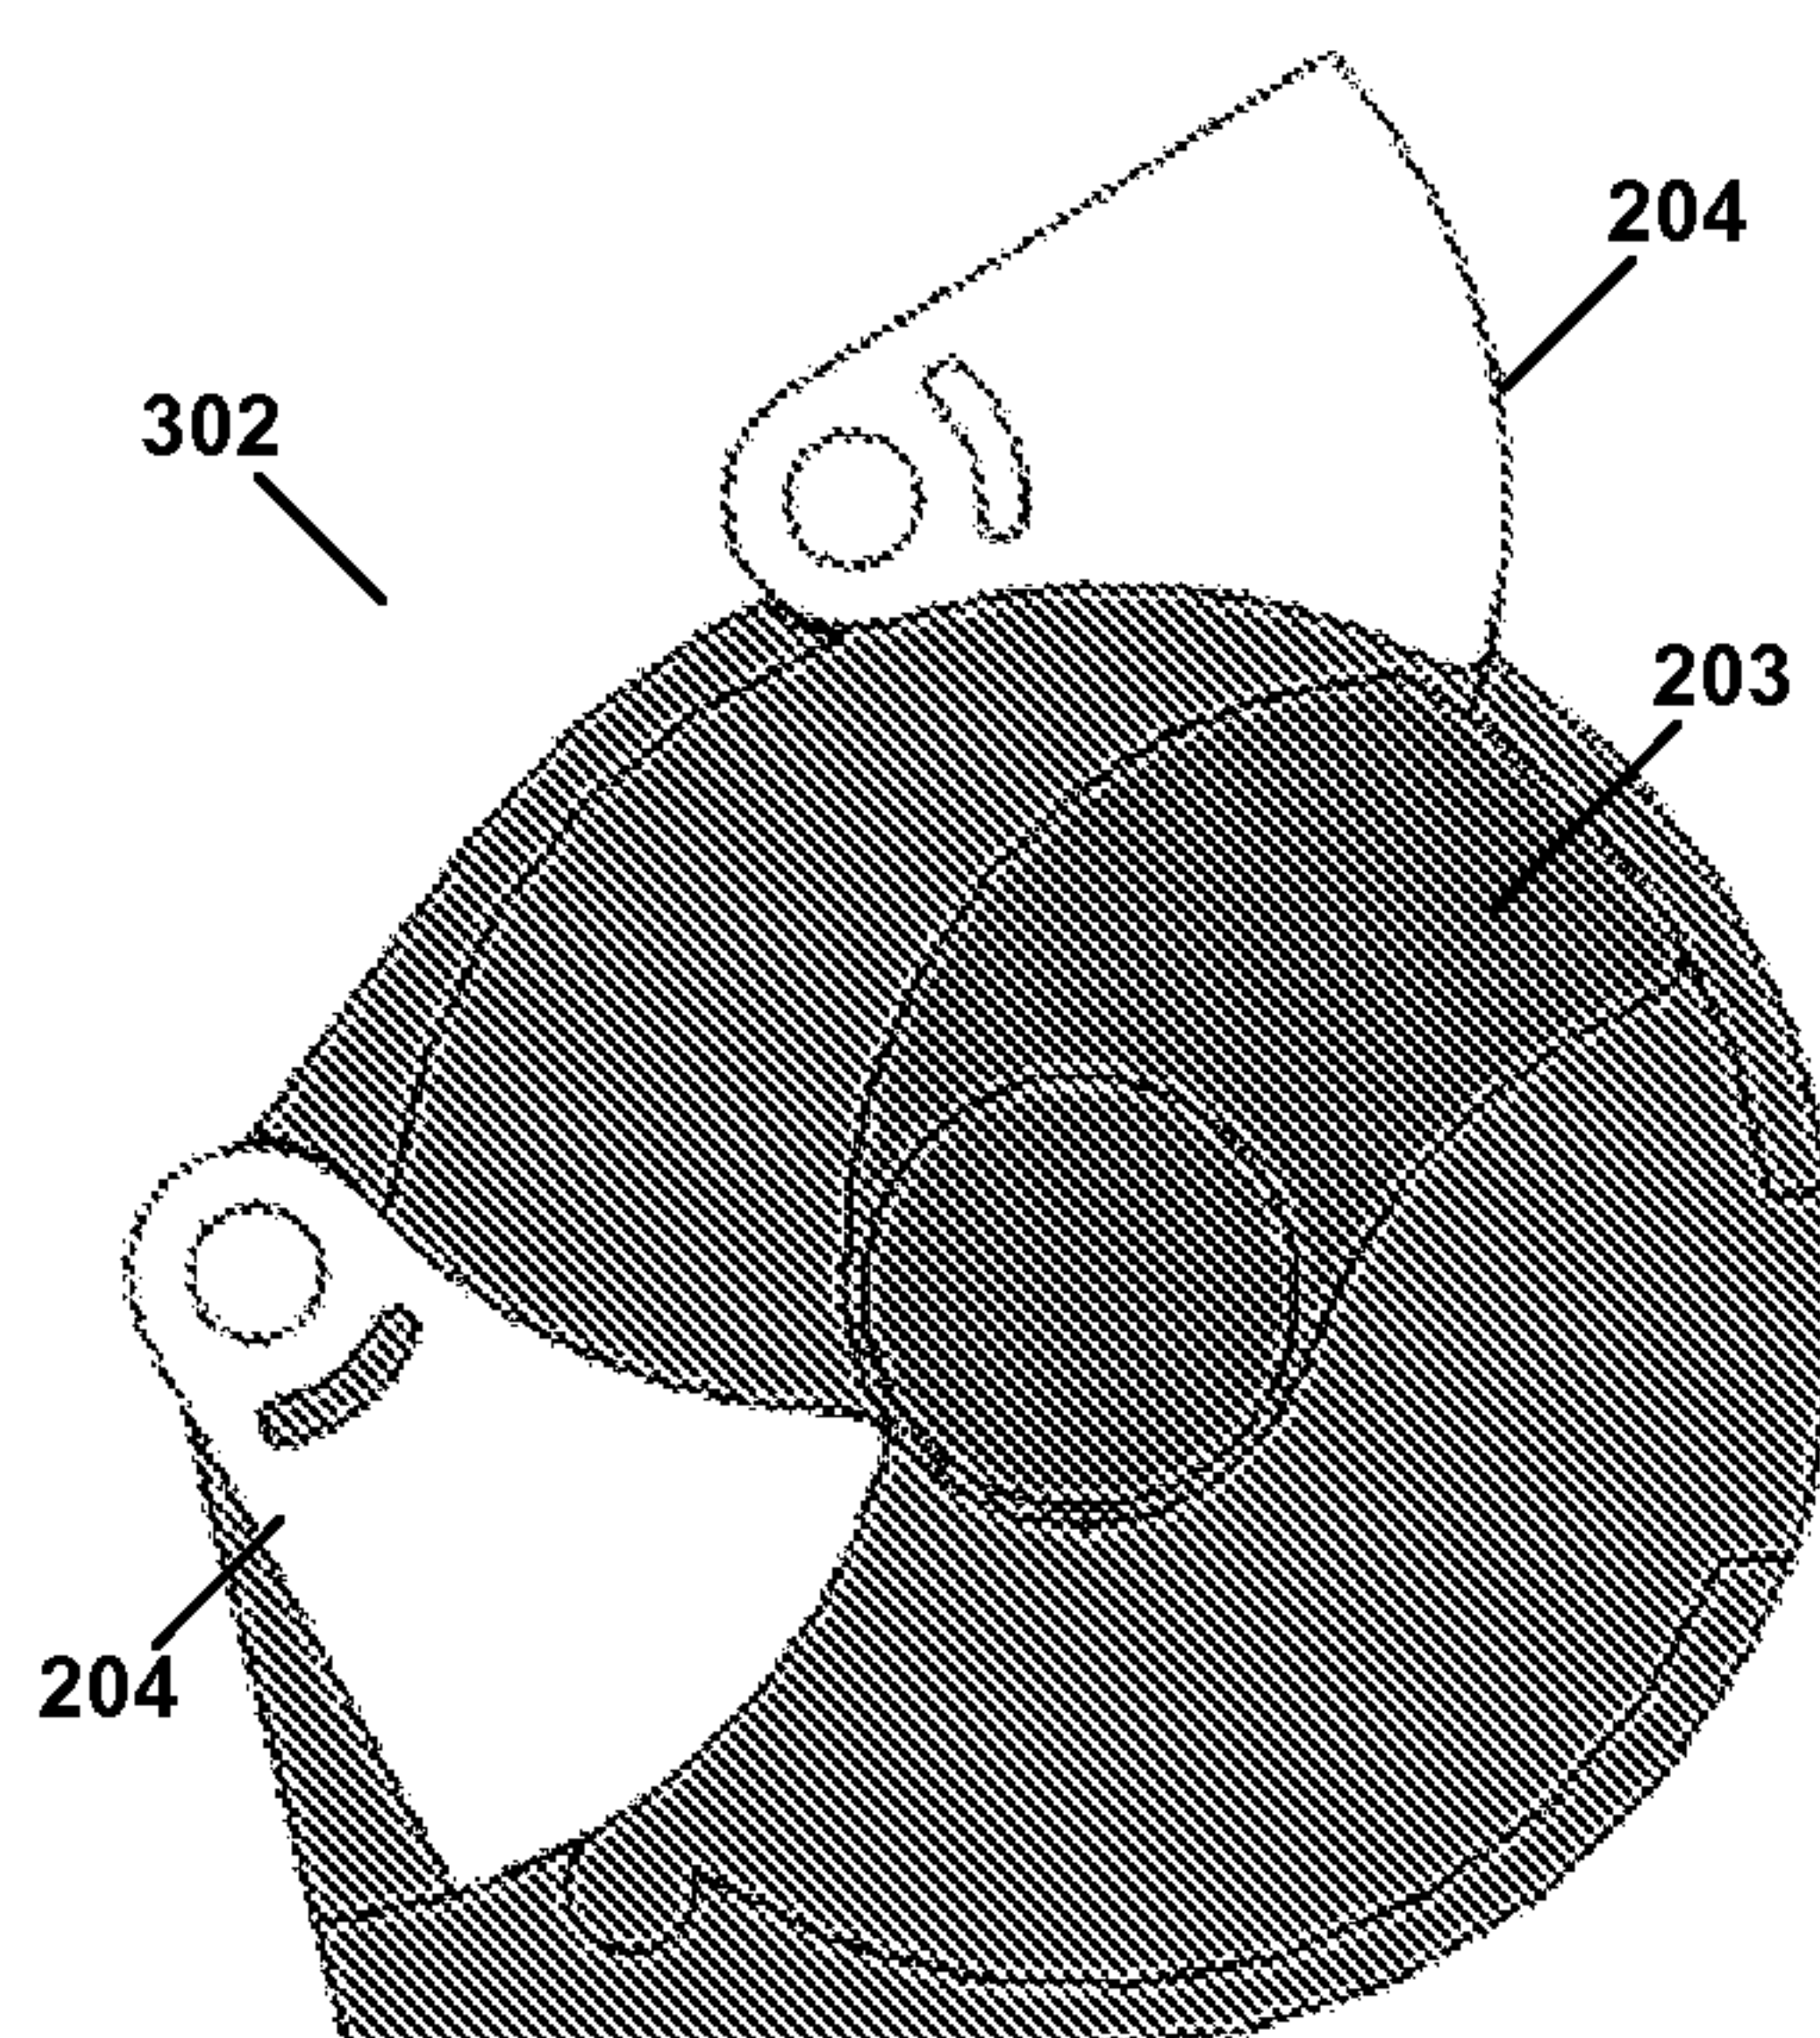


Fig. 10

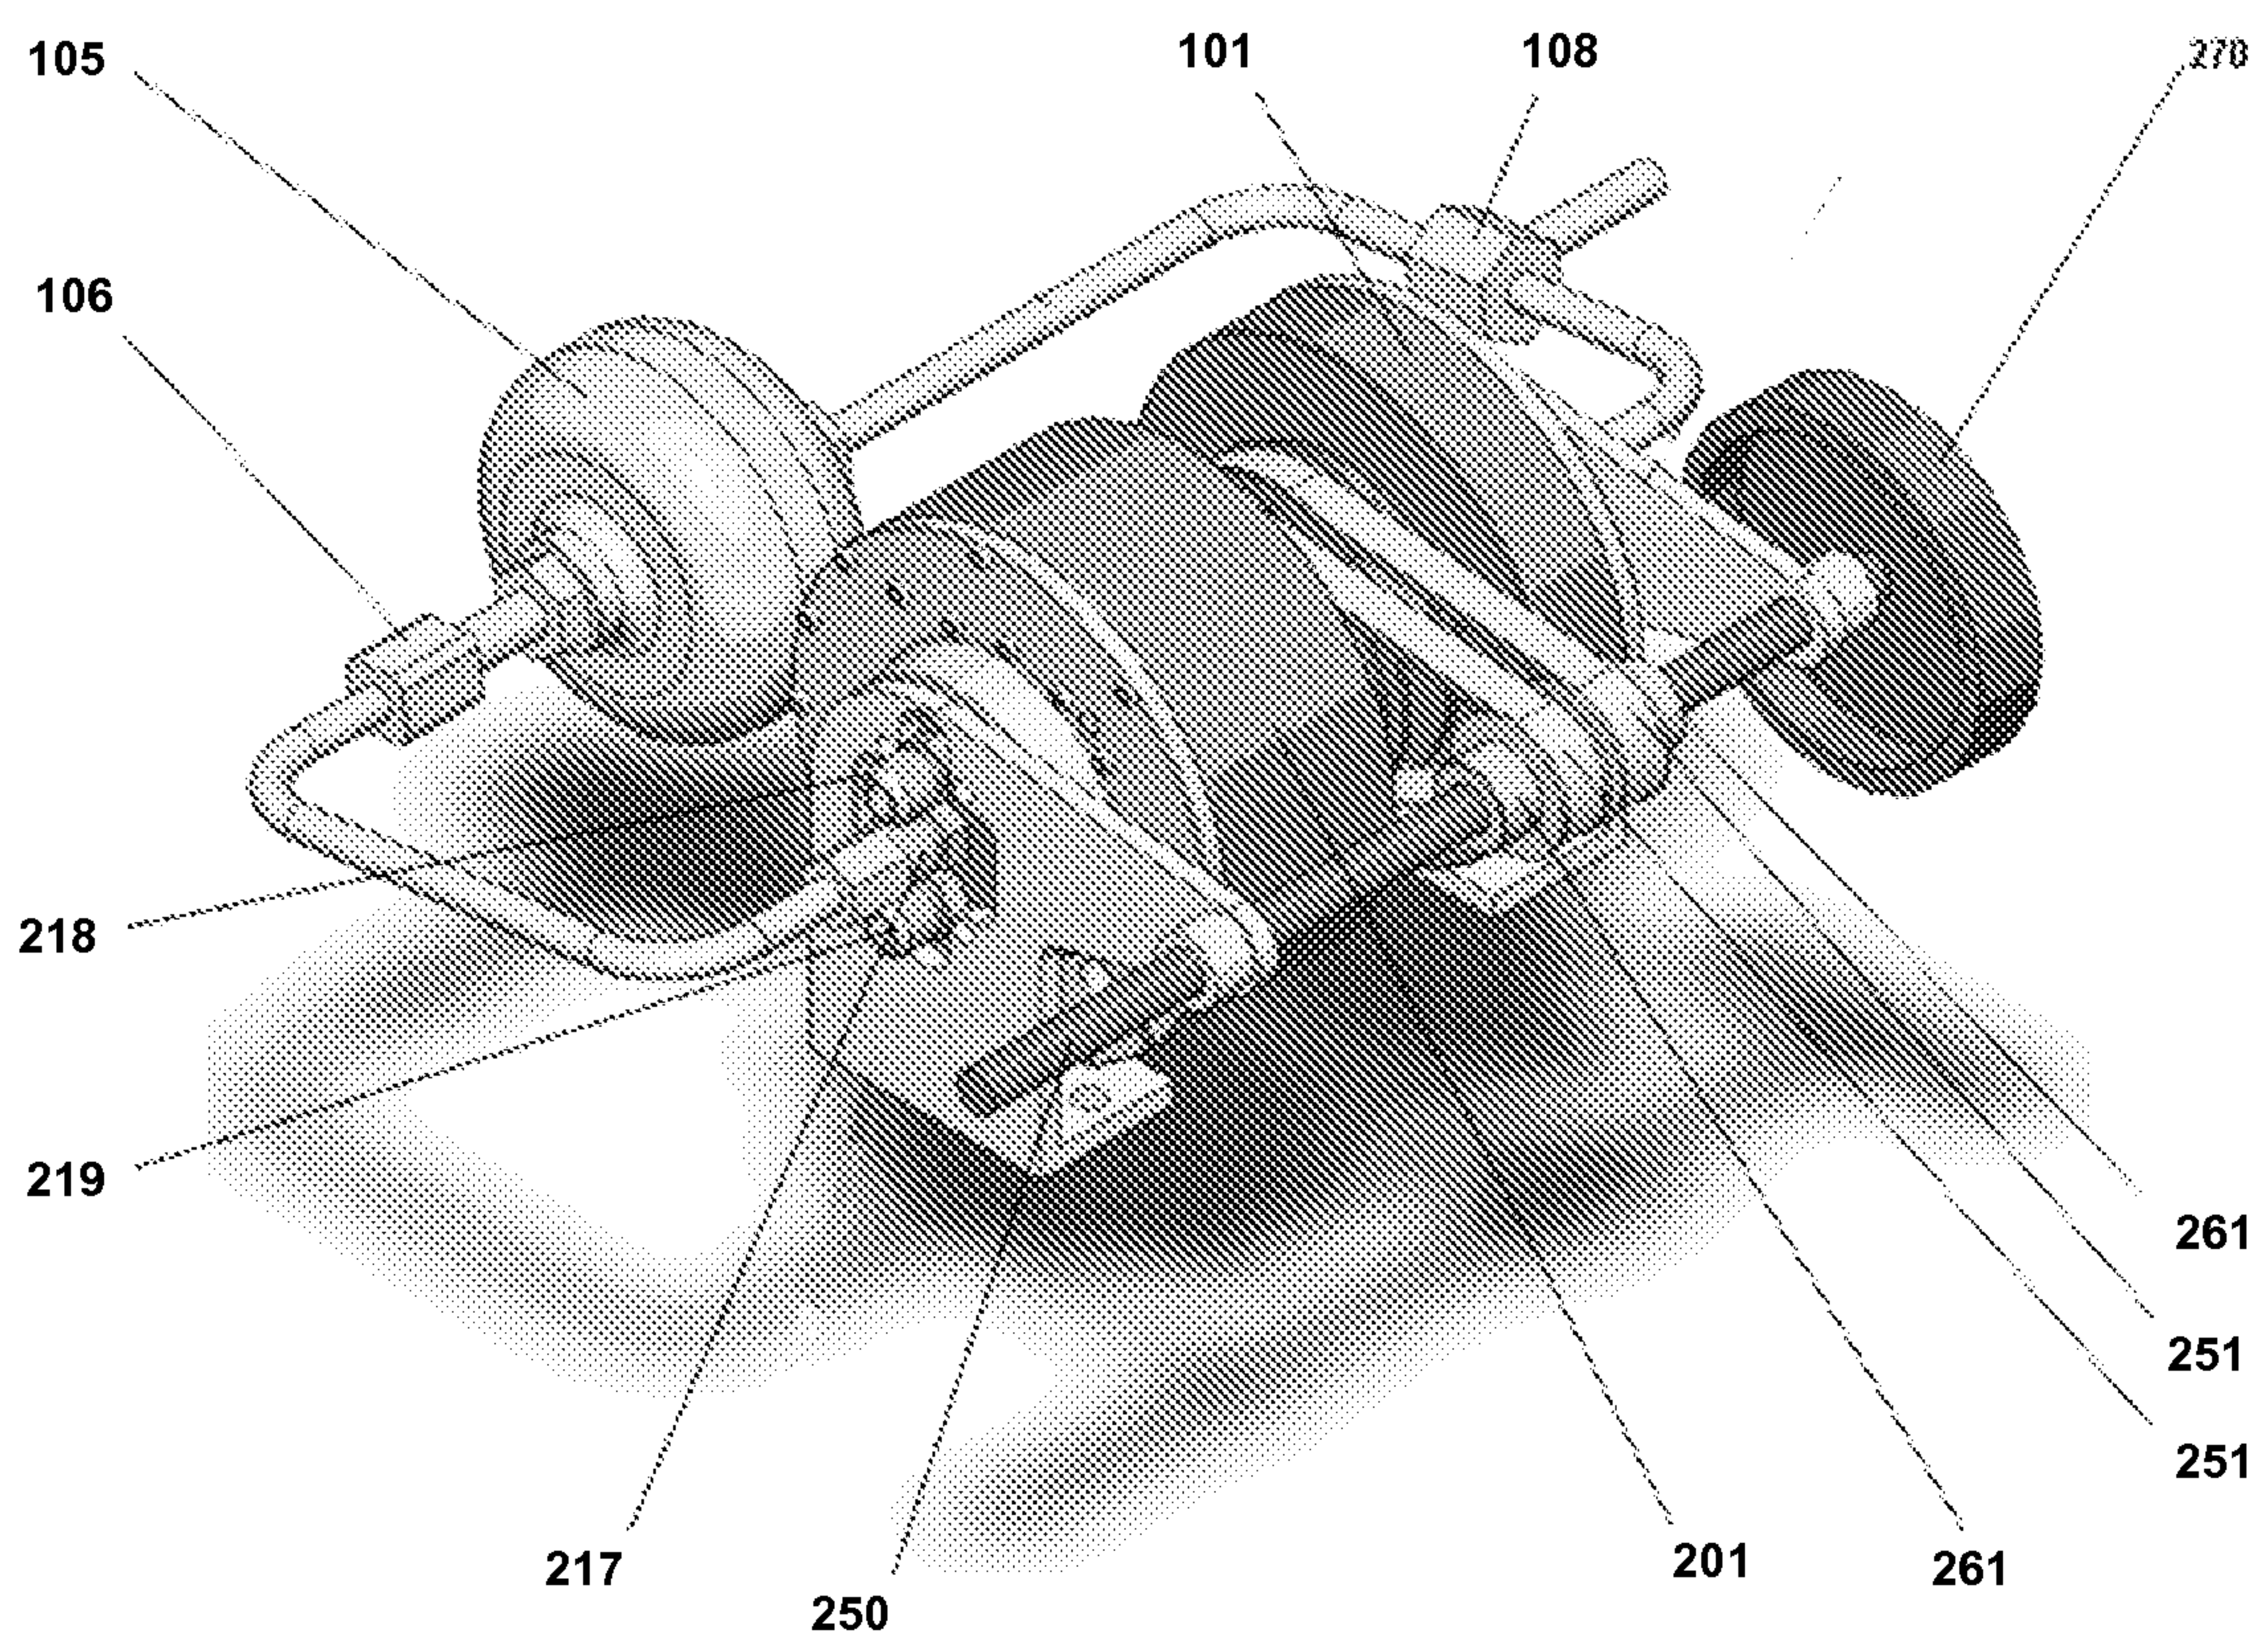
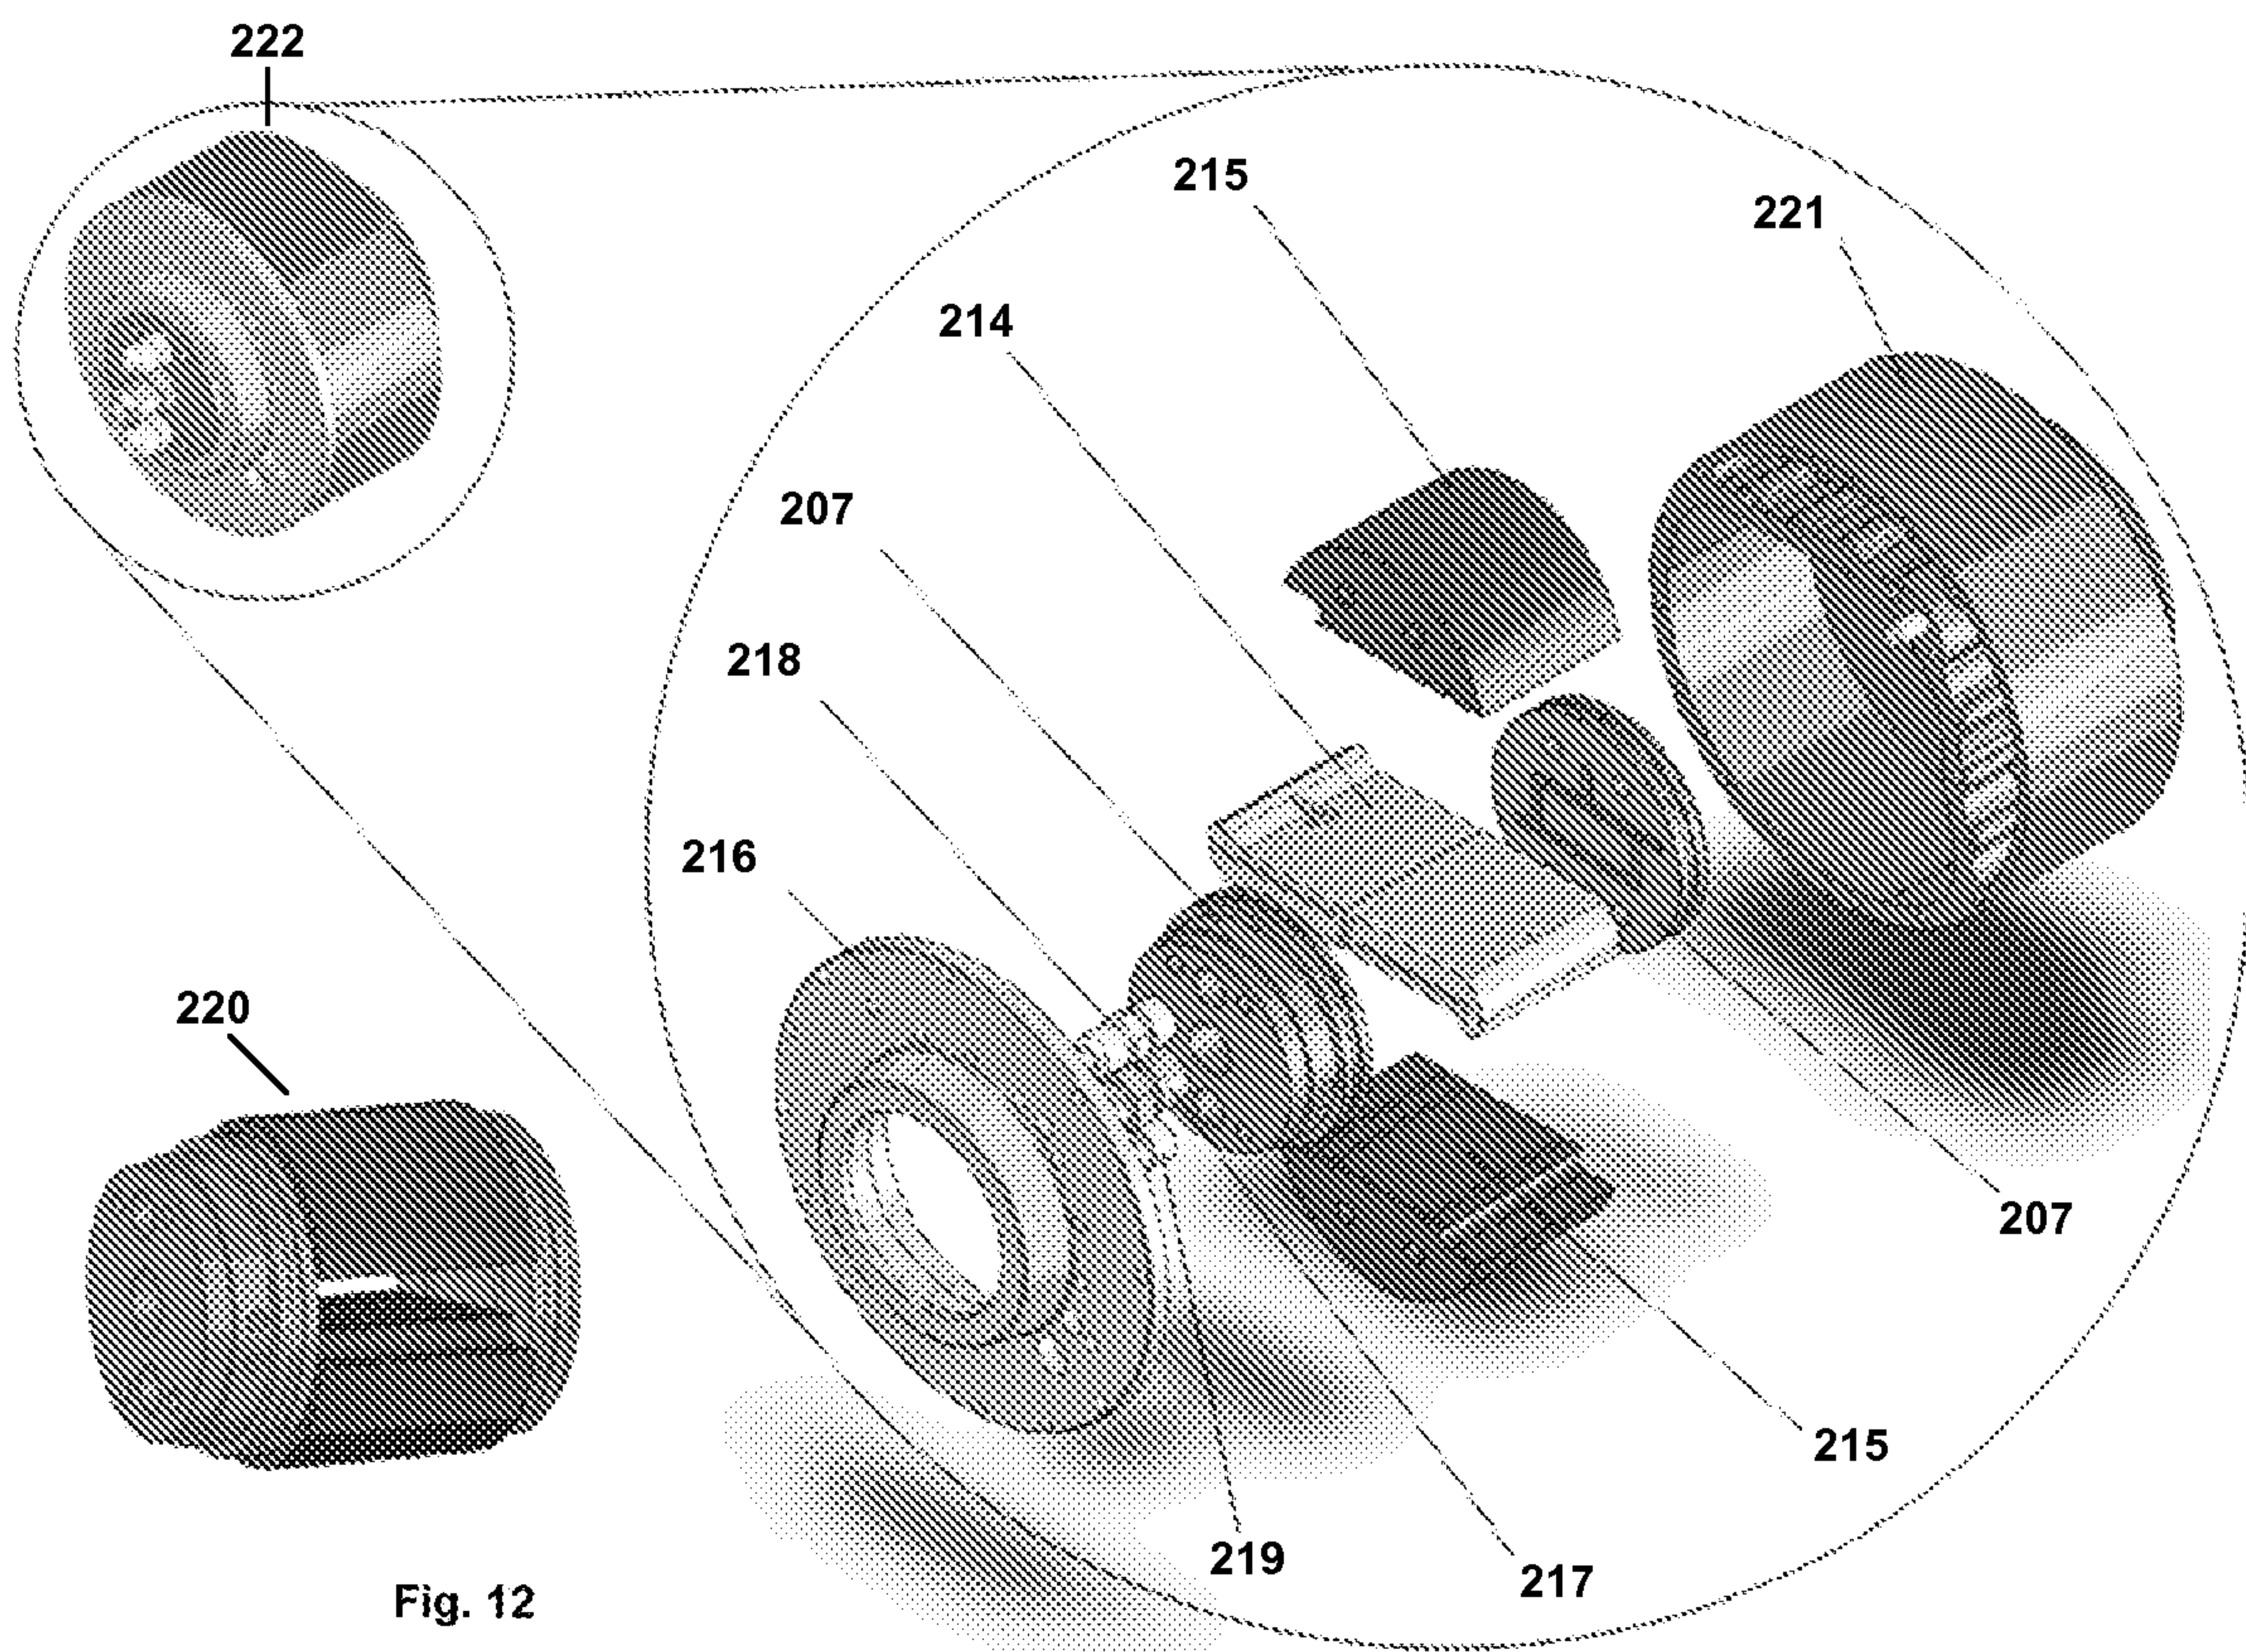
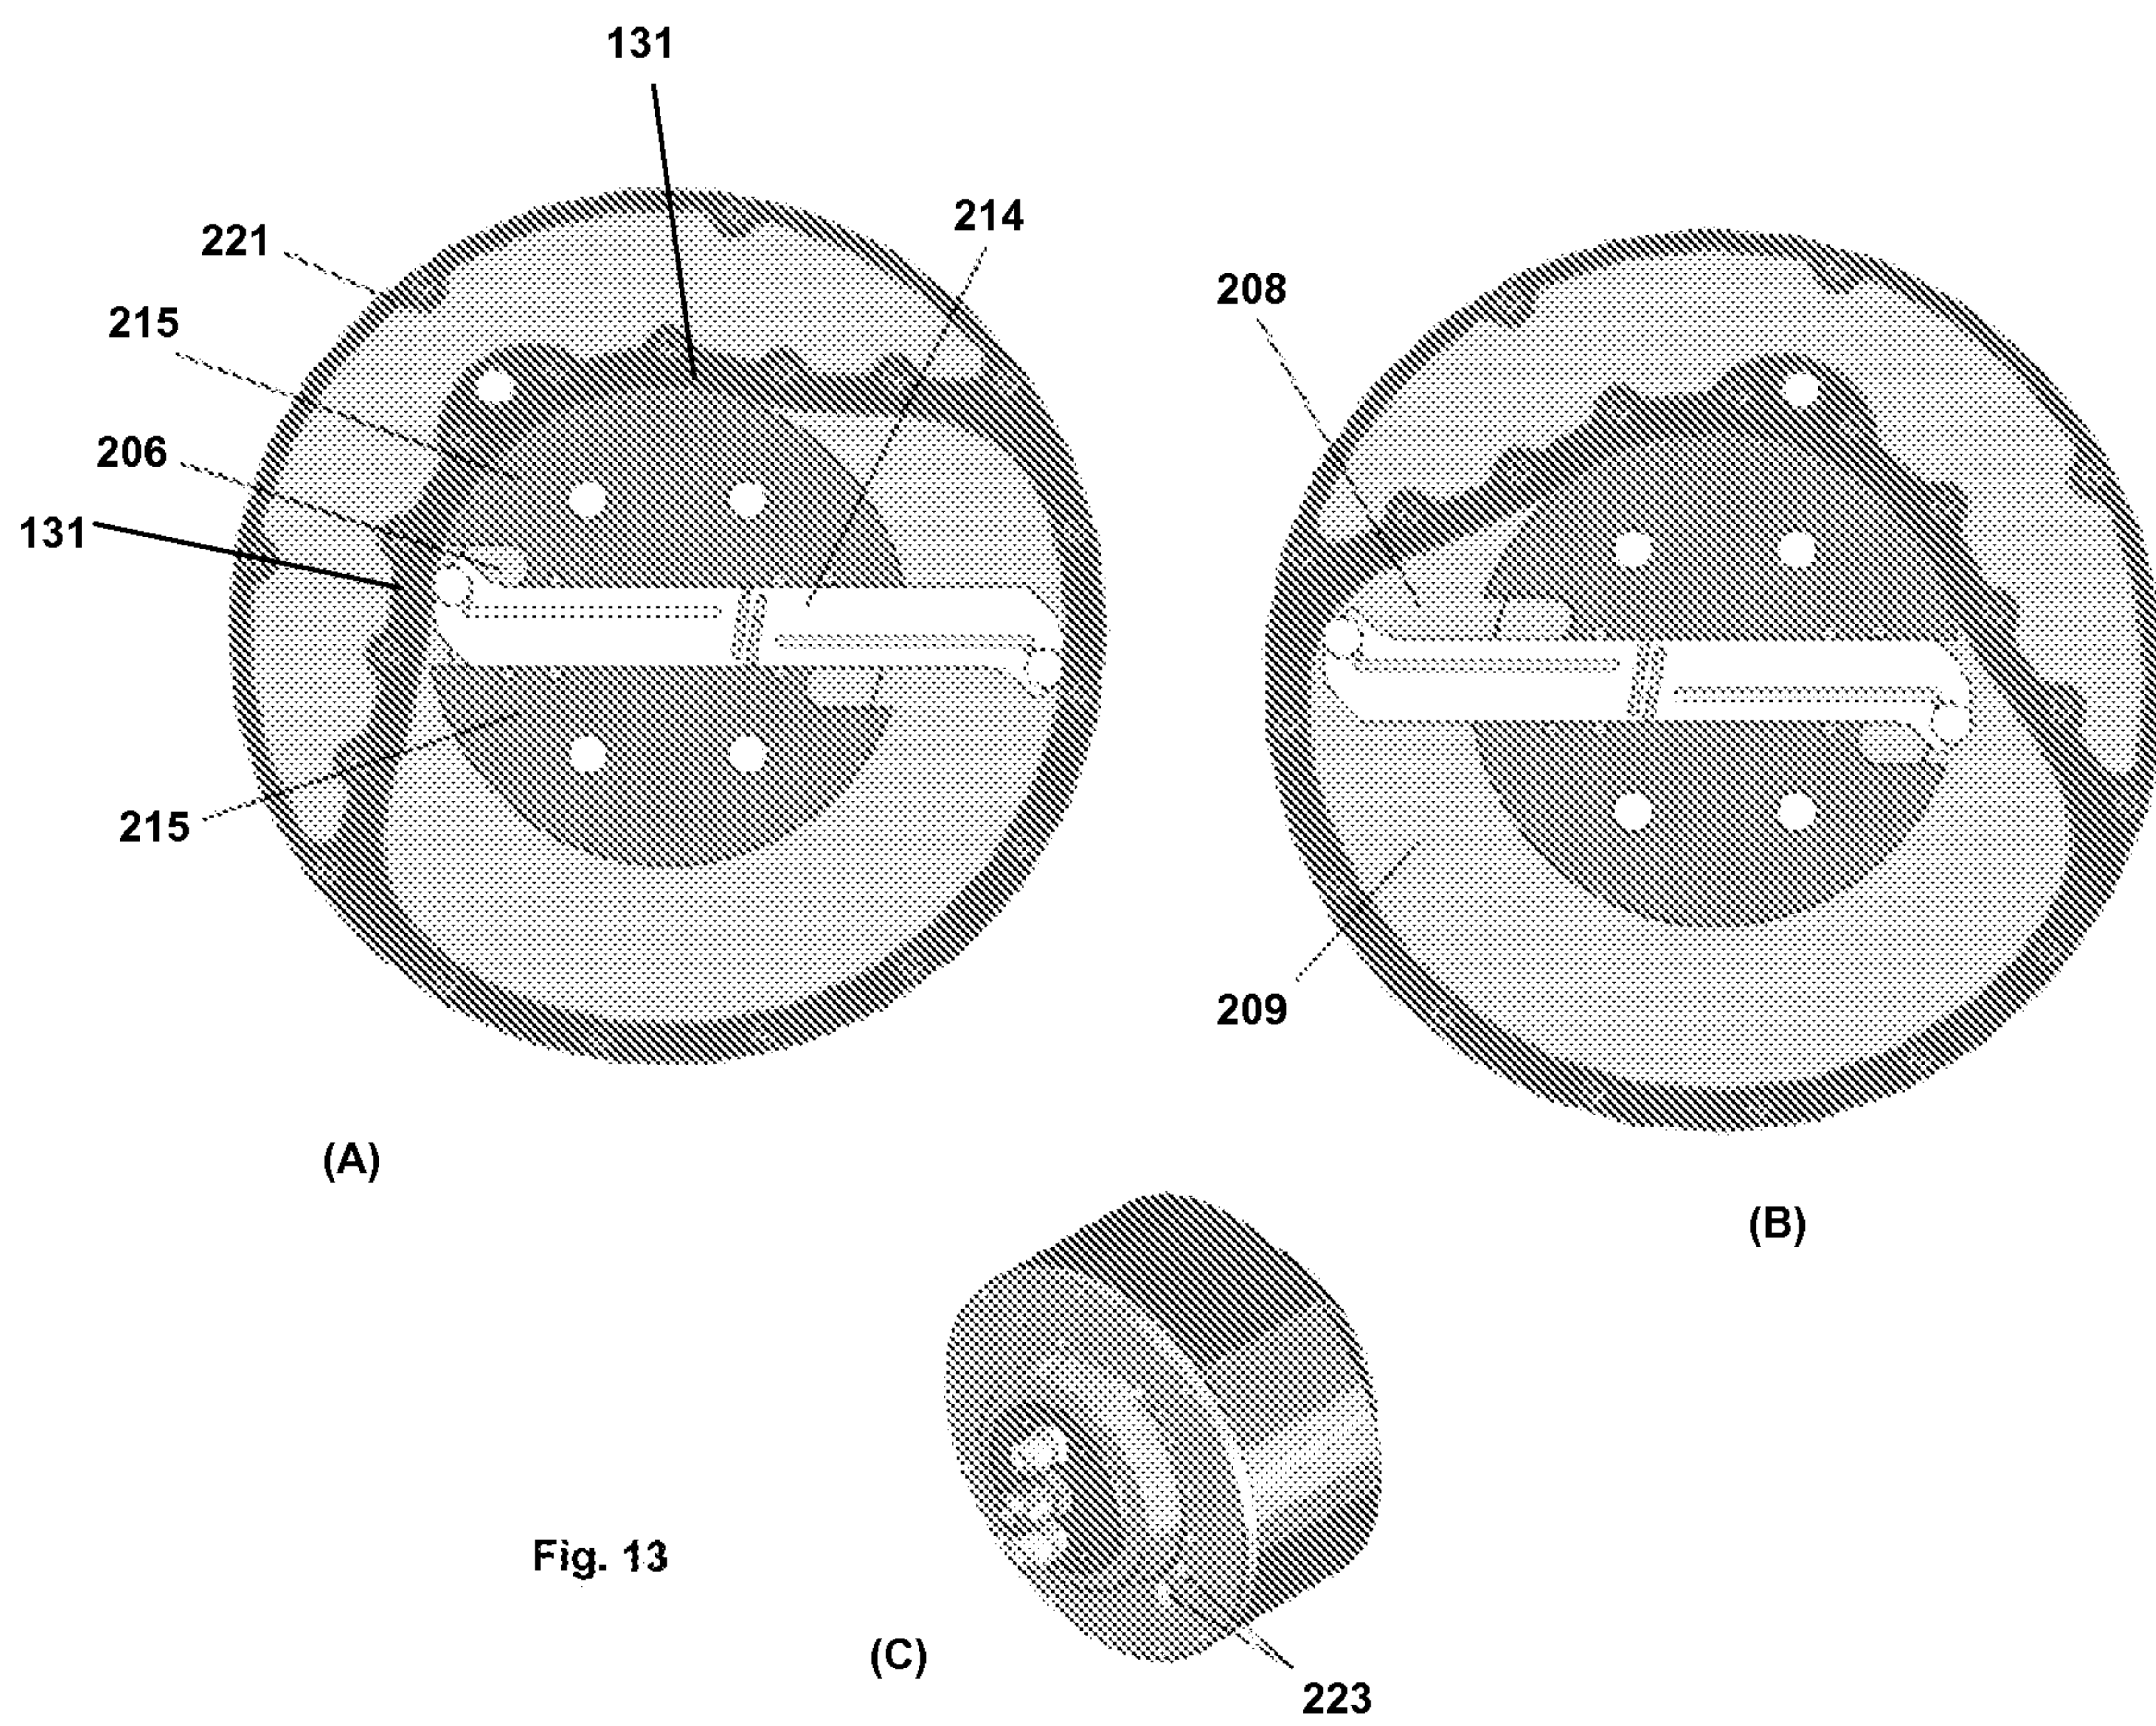


Fig. 11





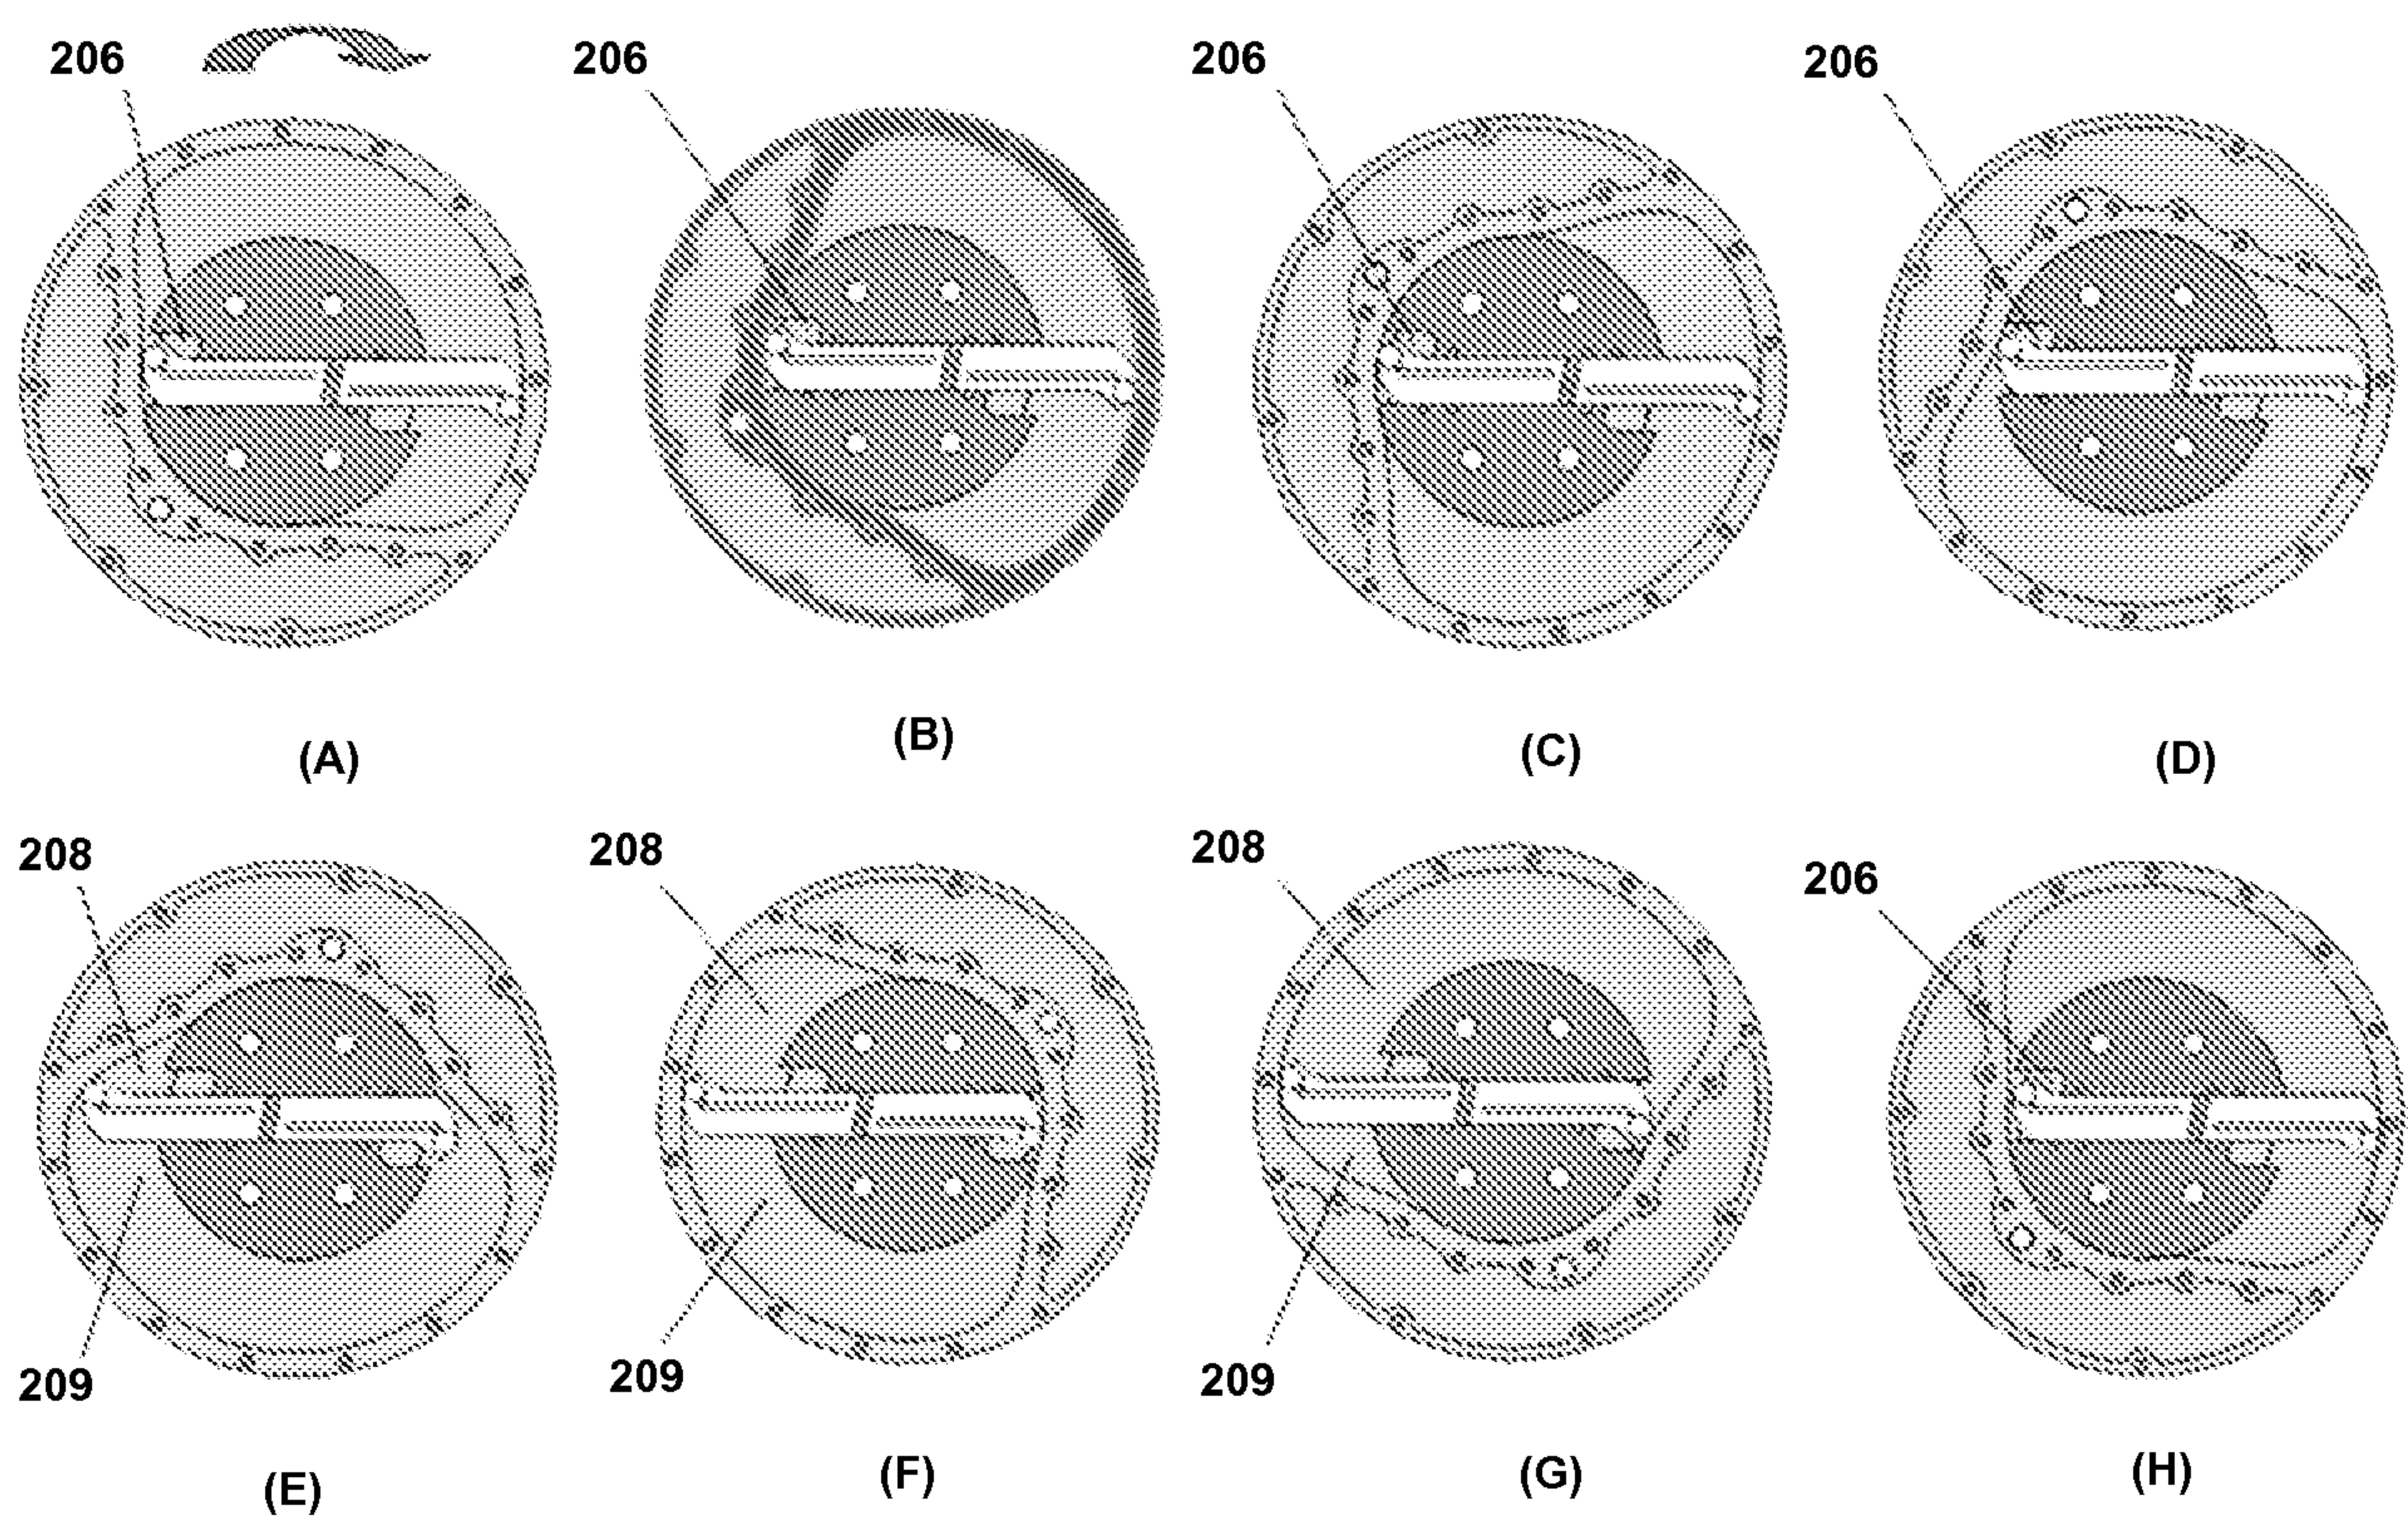


Fig. 14

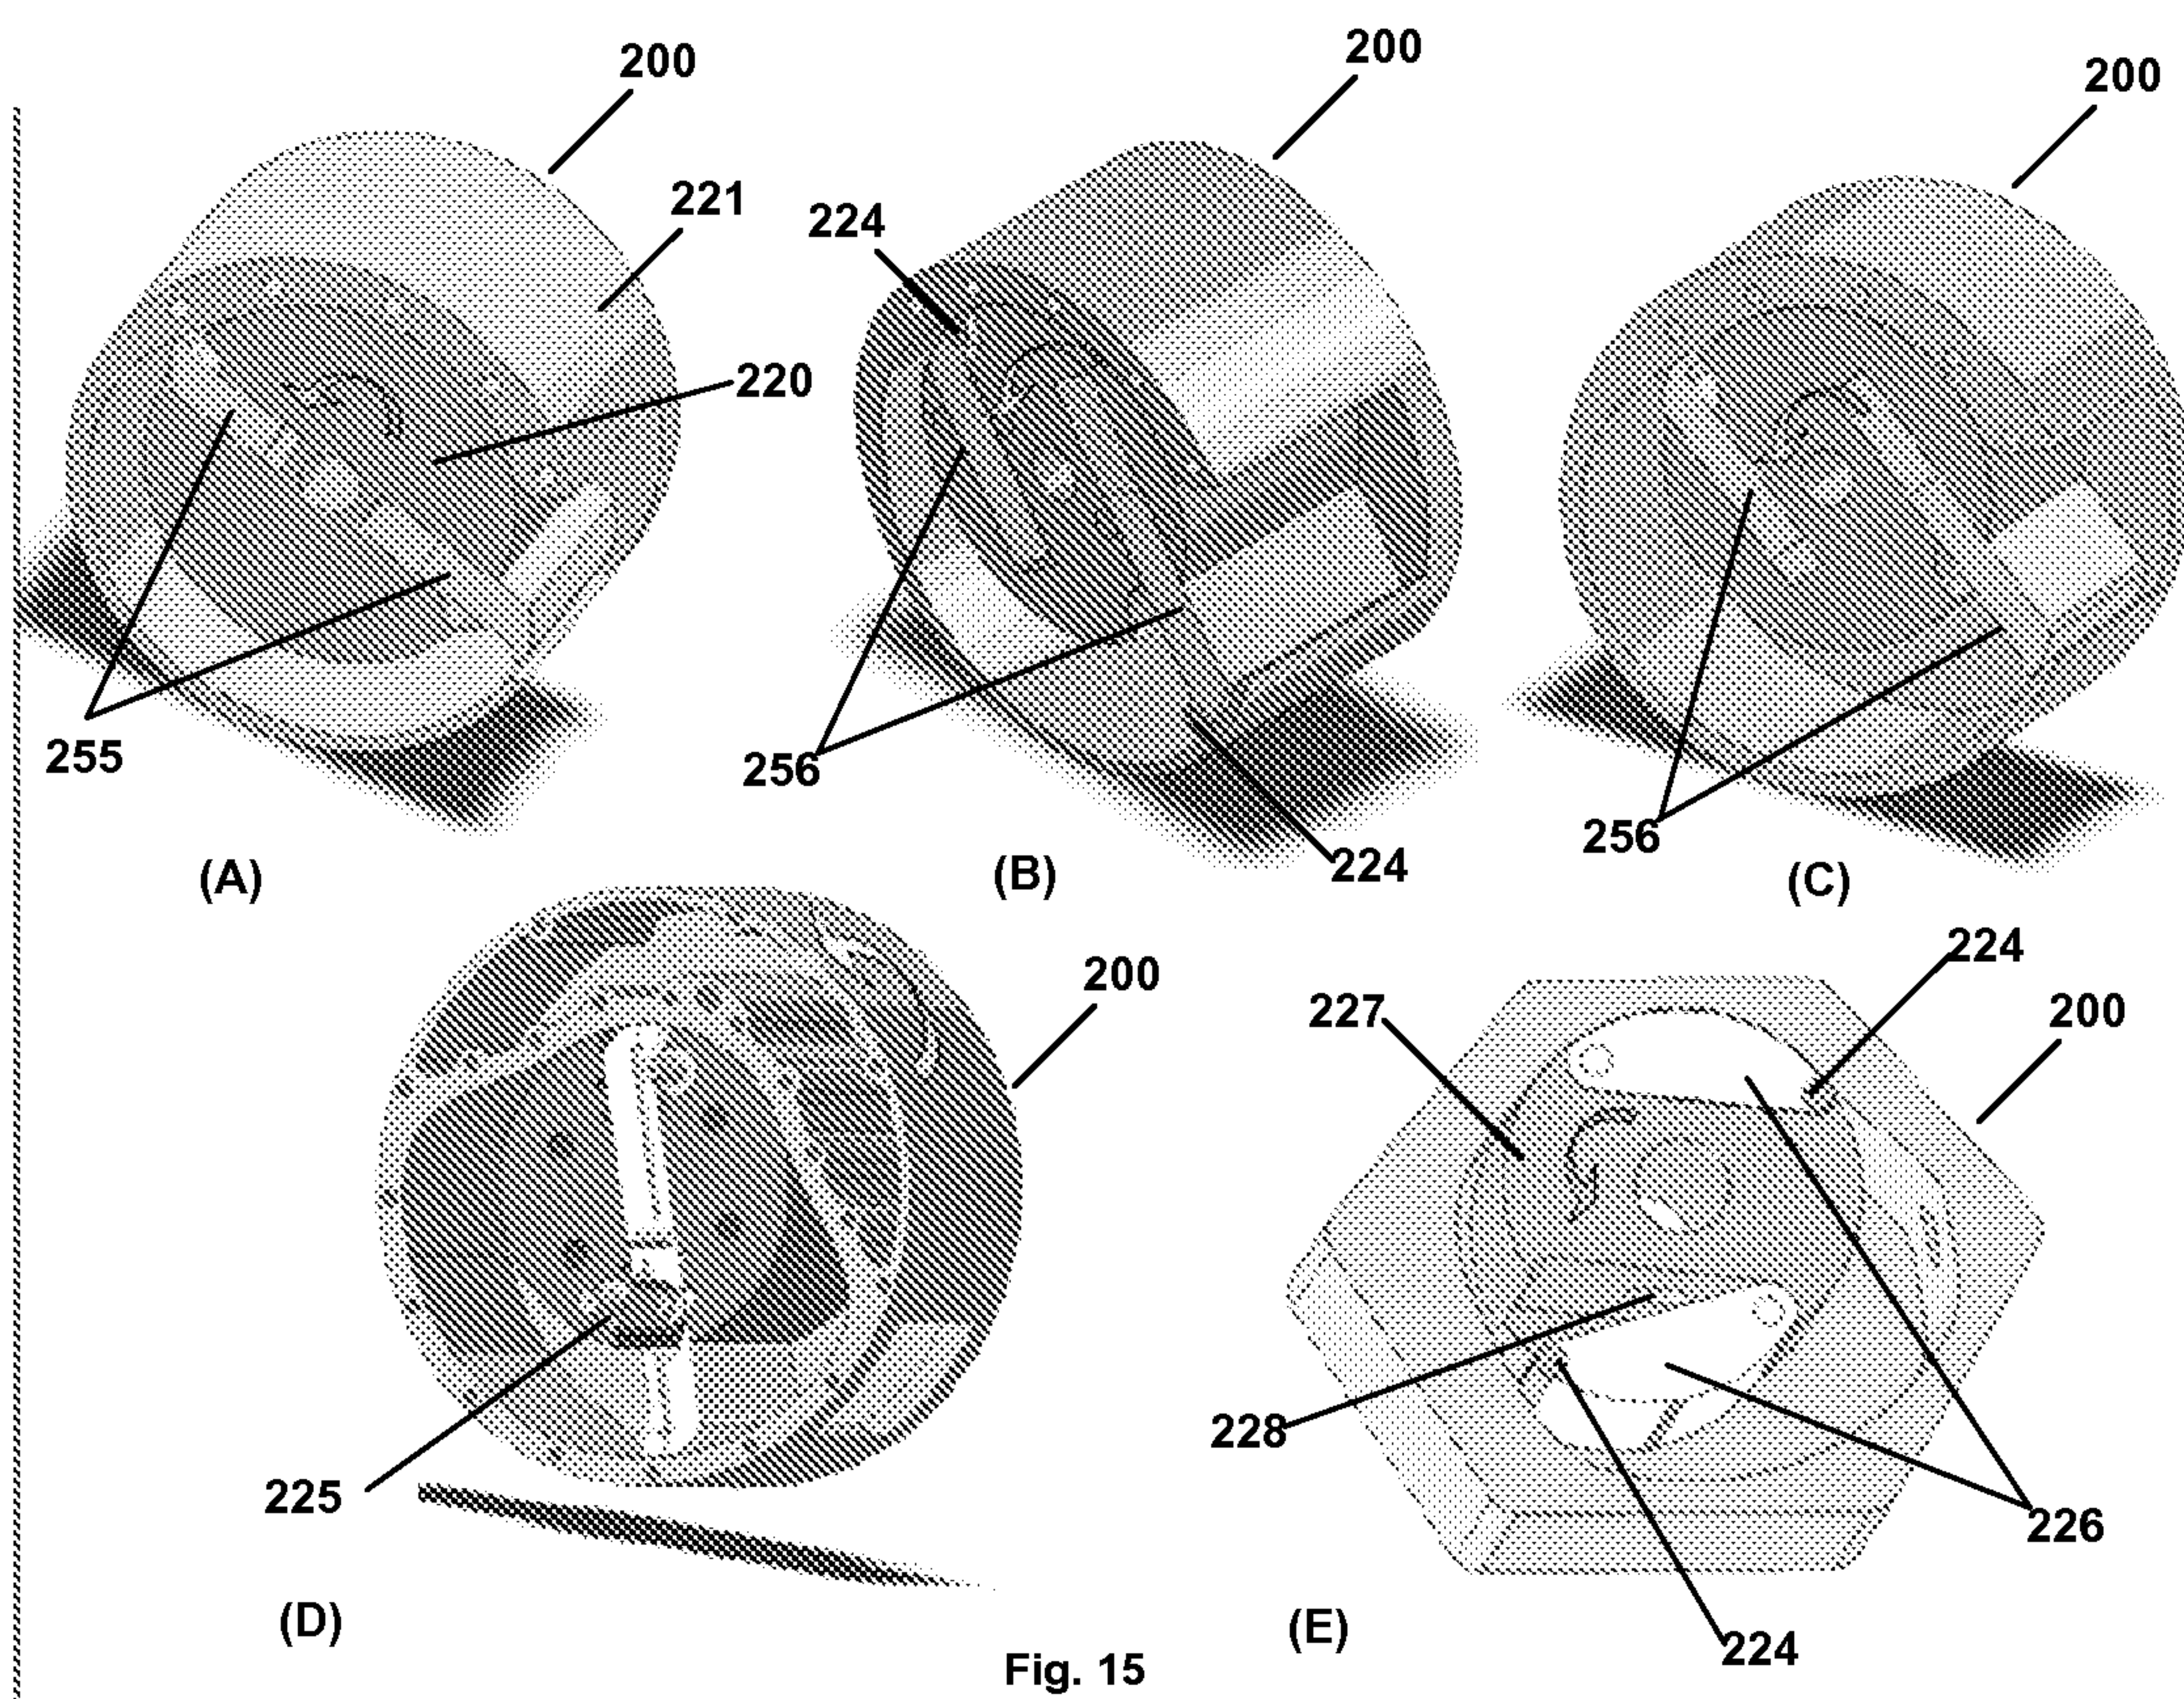


Fig. 15

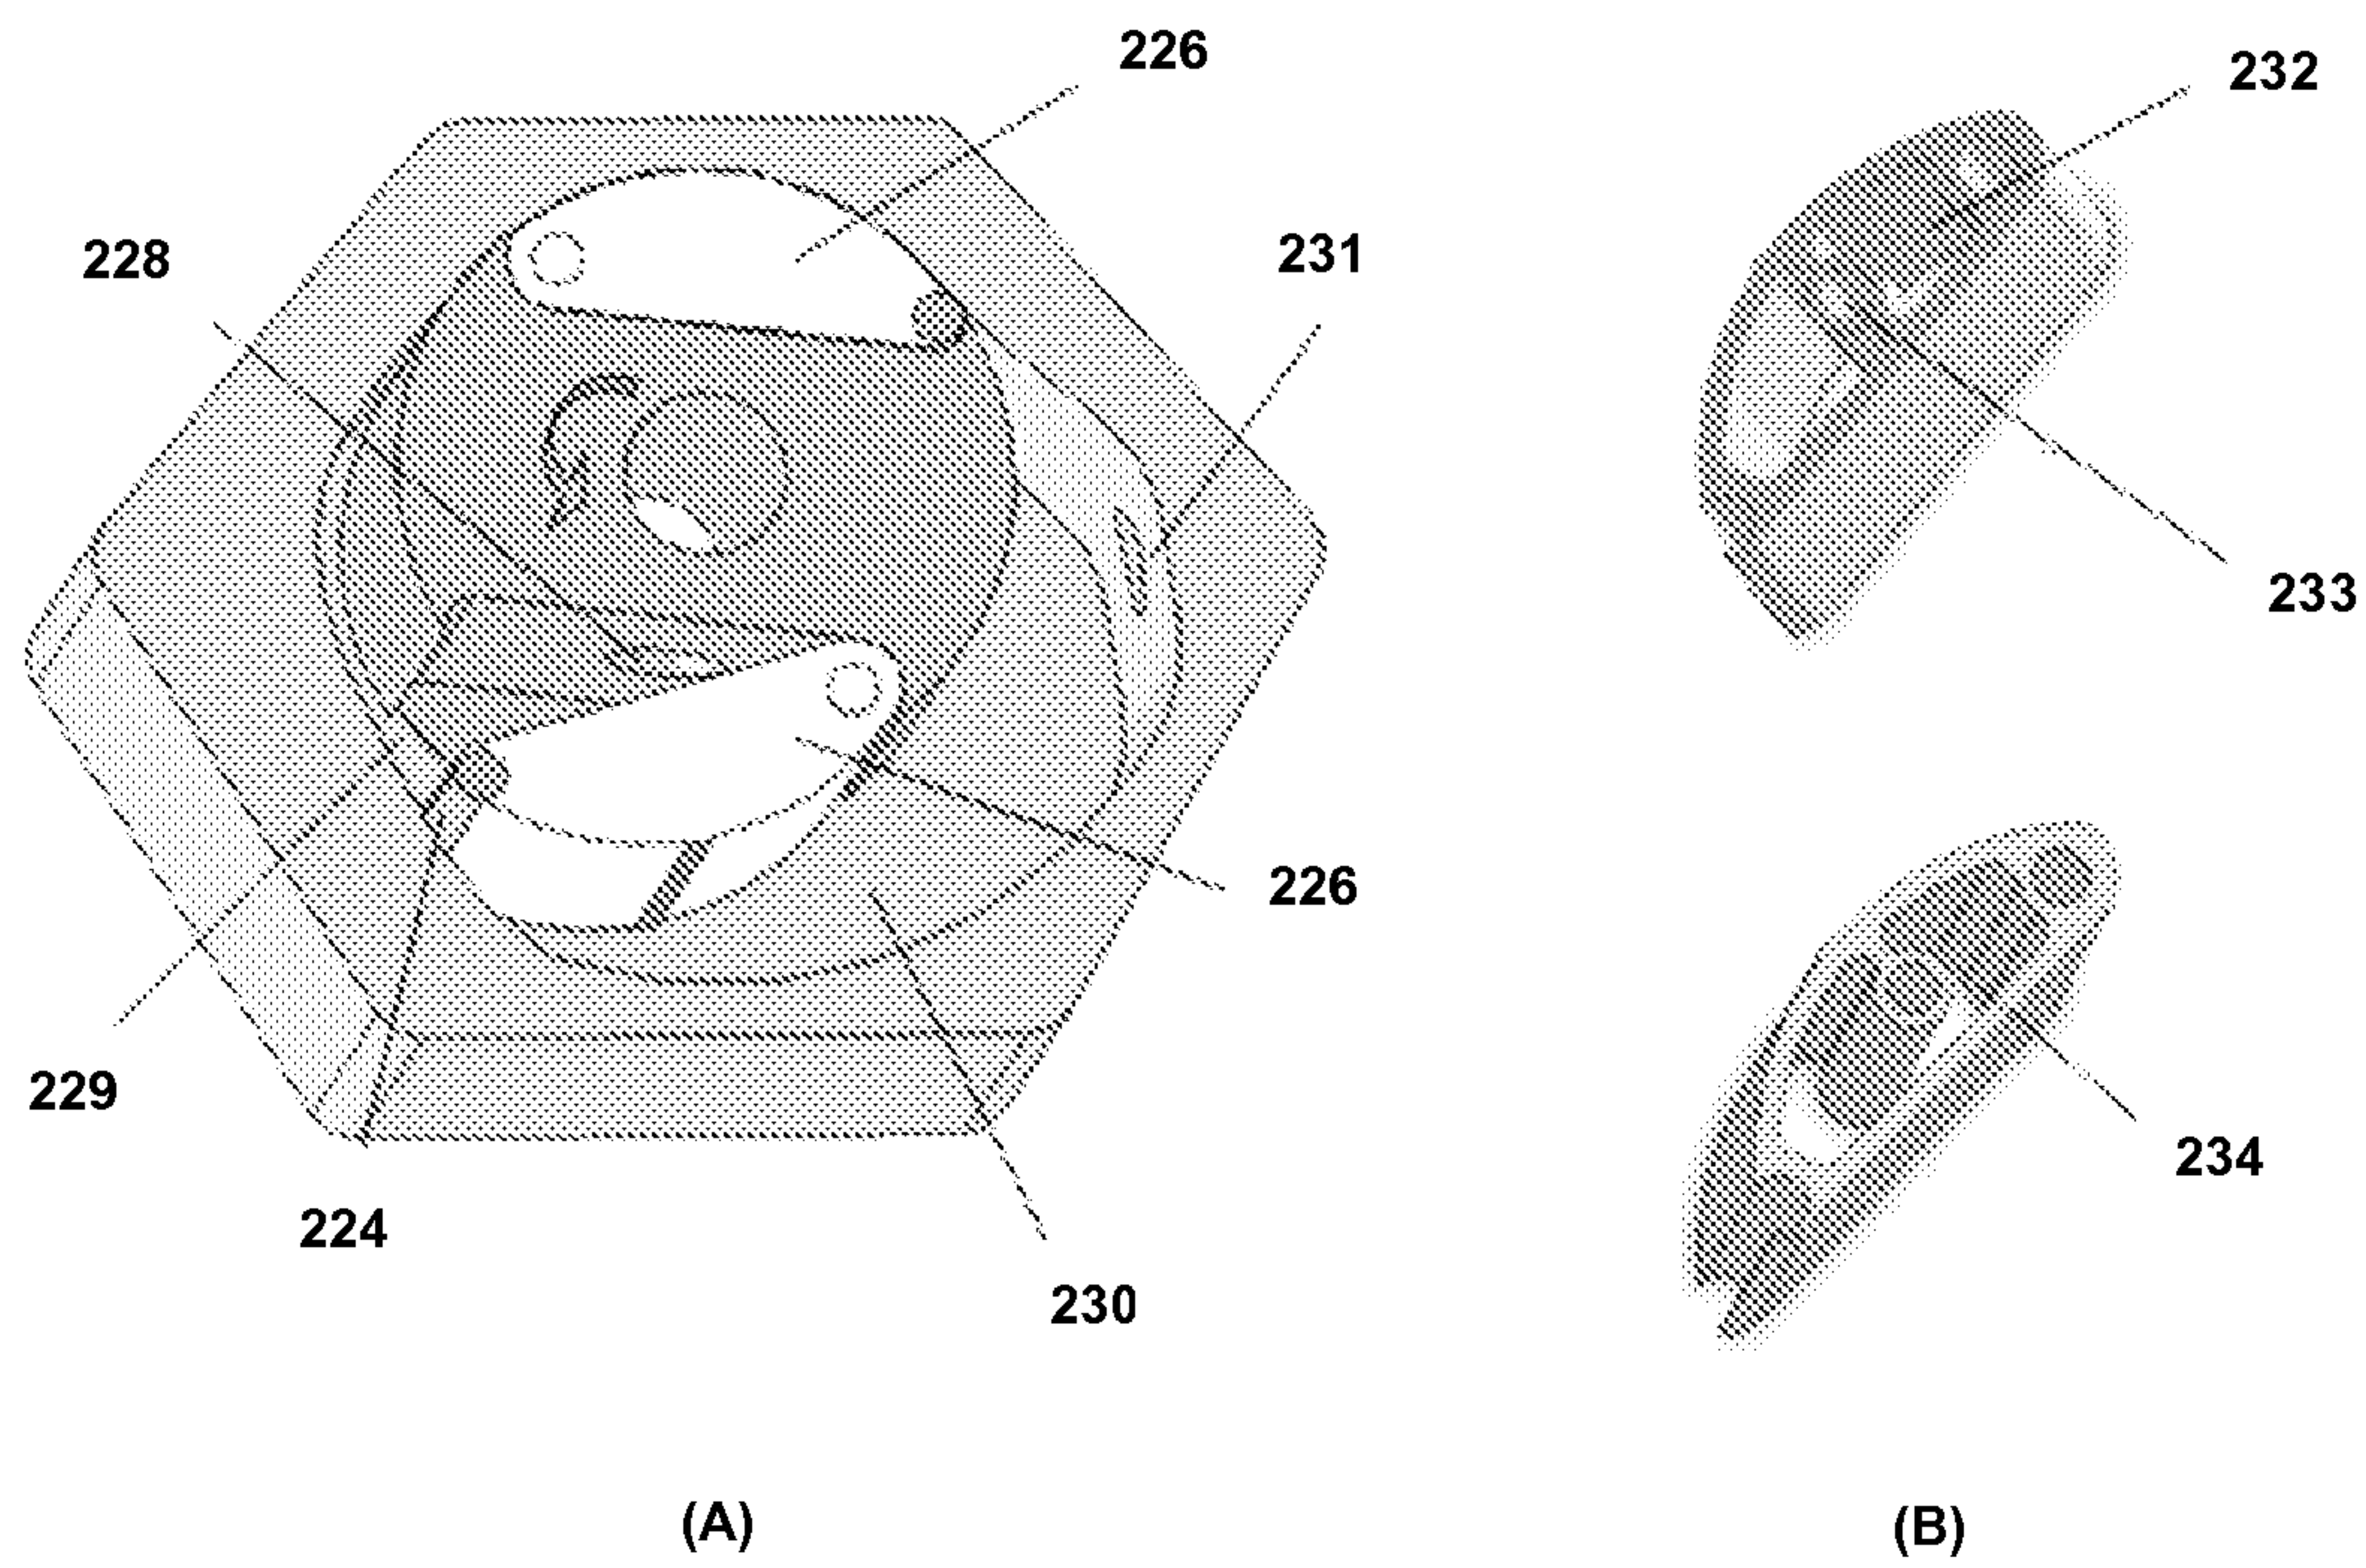


Fig. 16

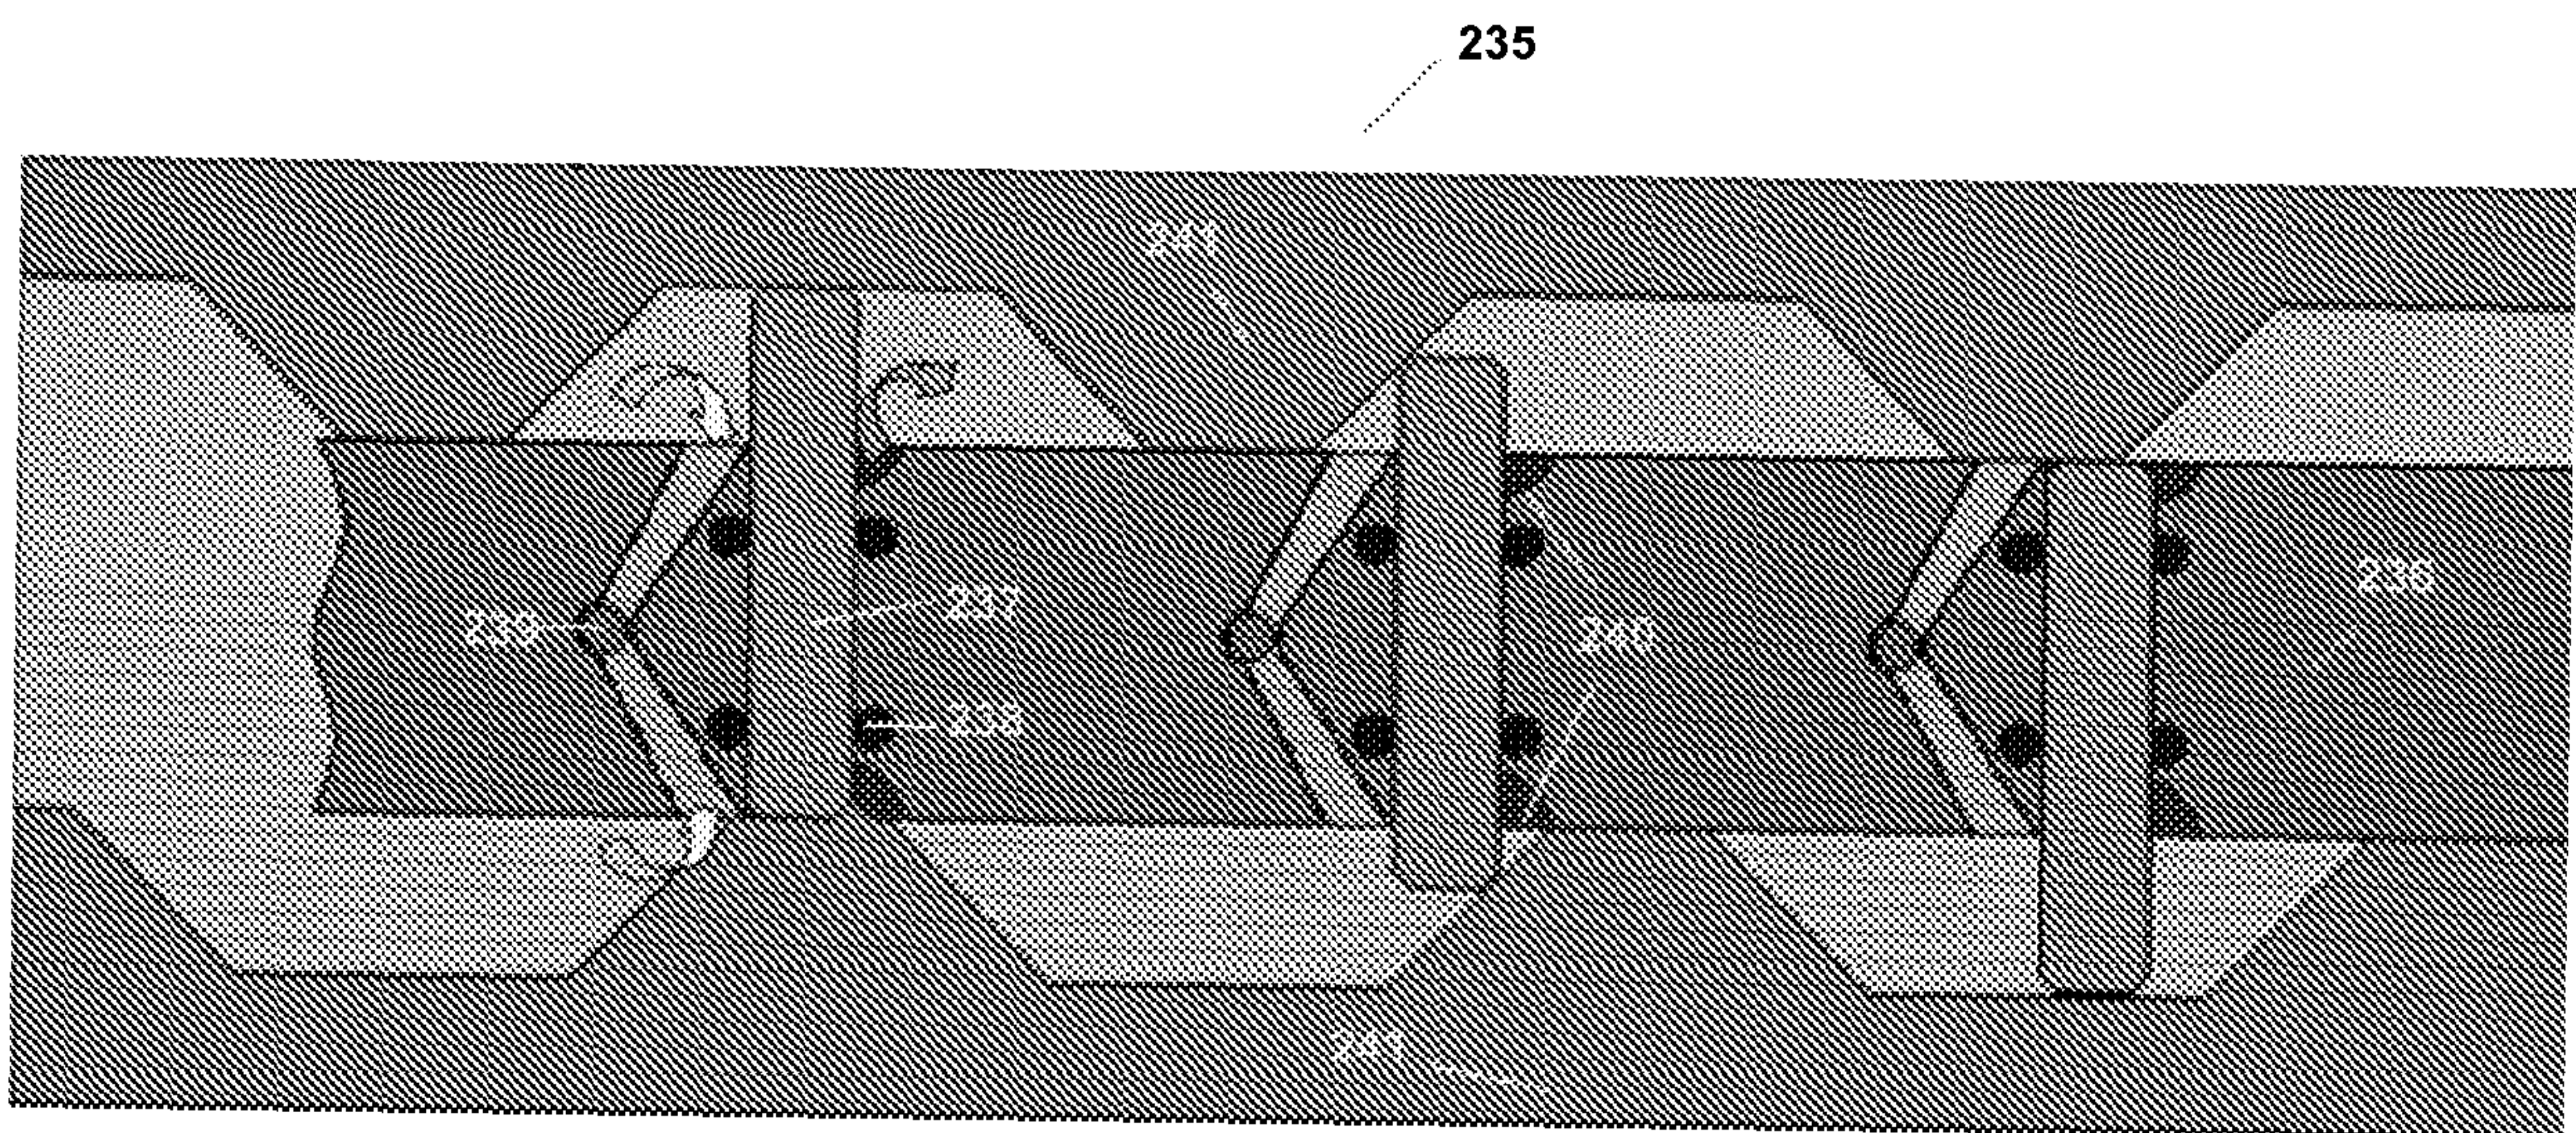


Fig. 17

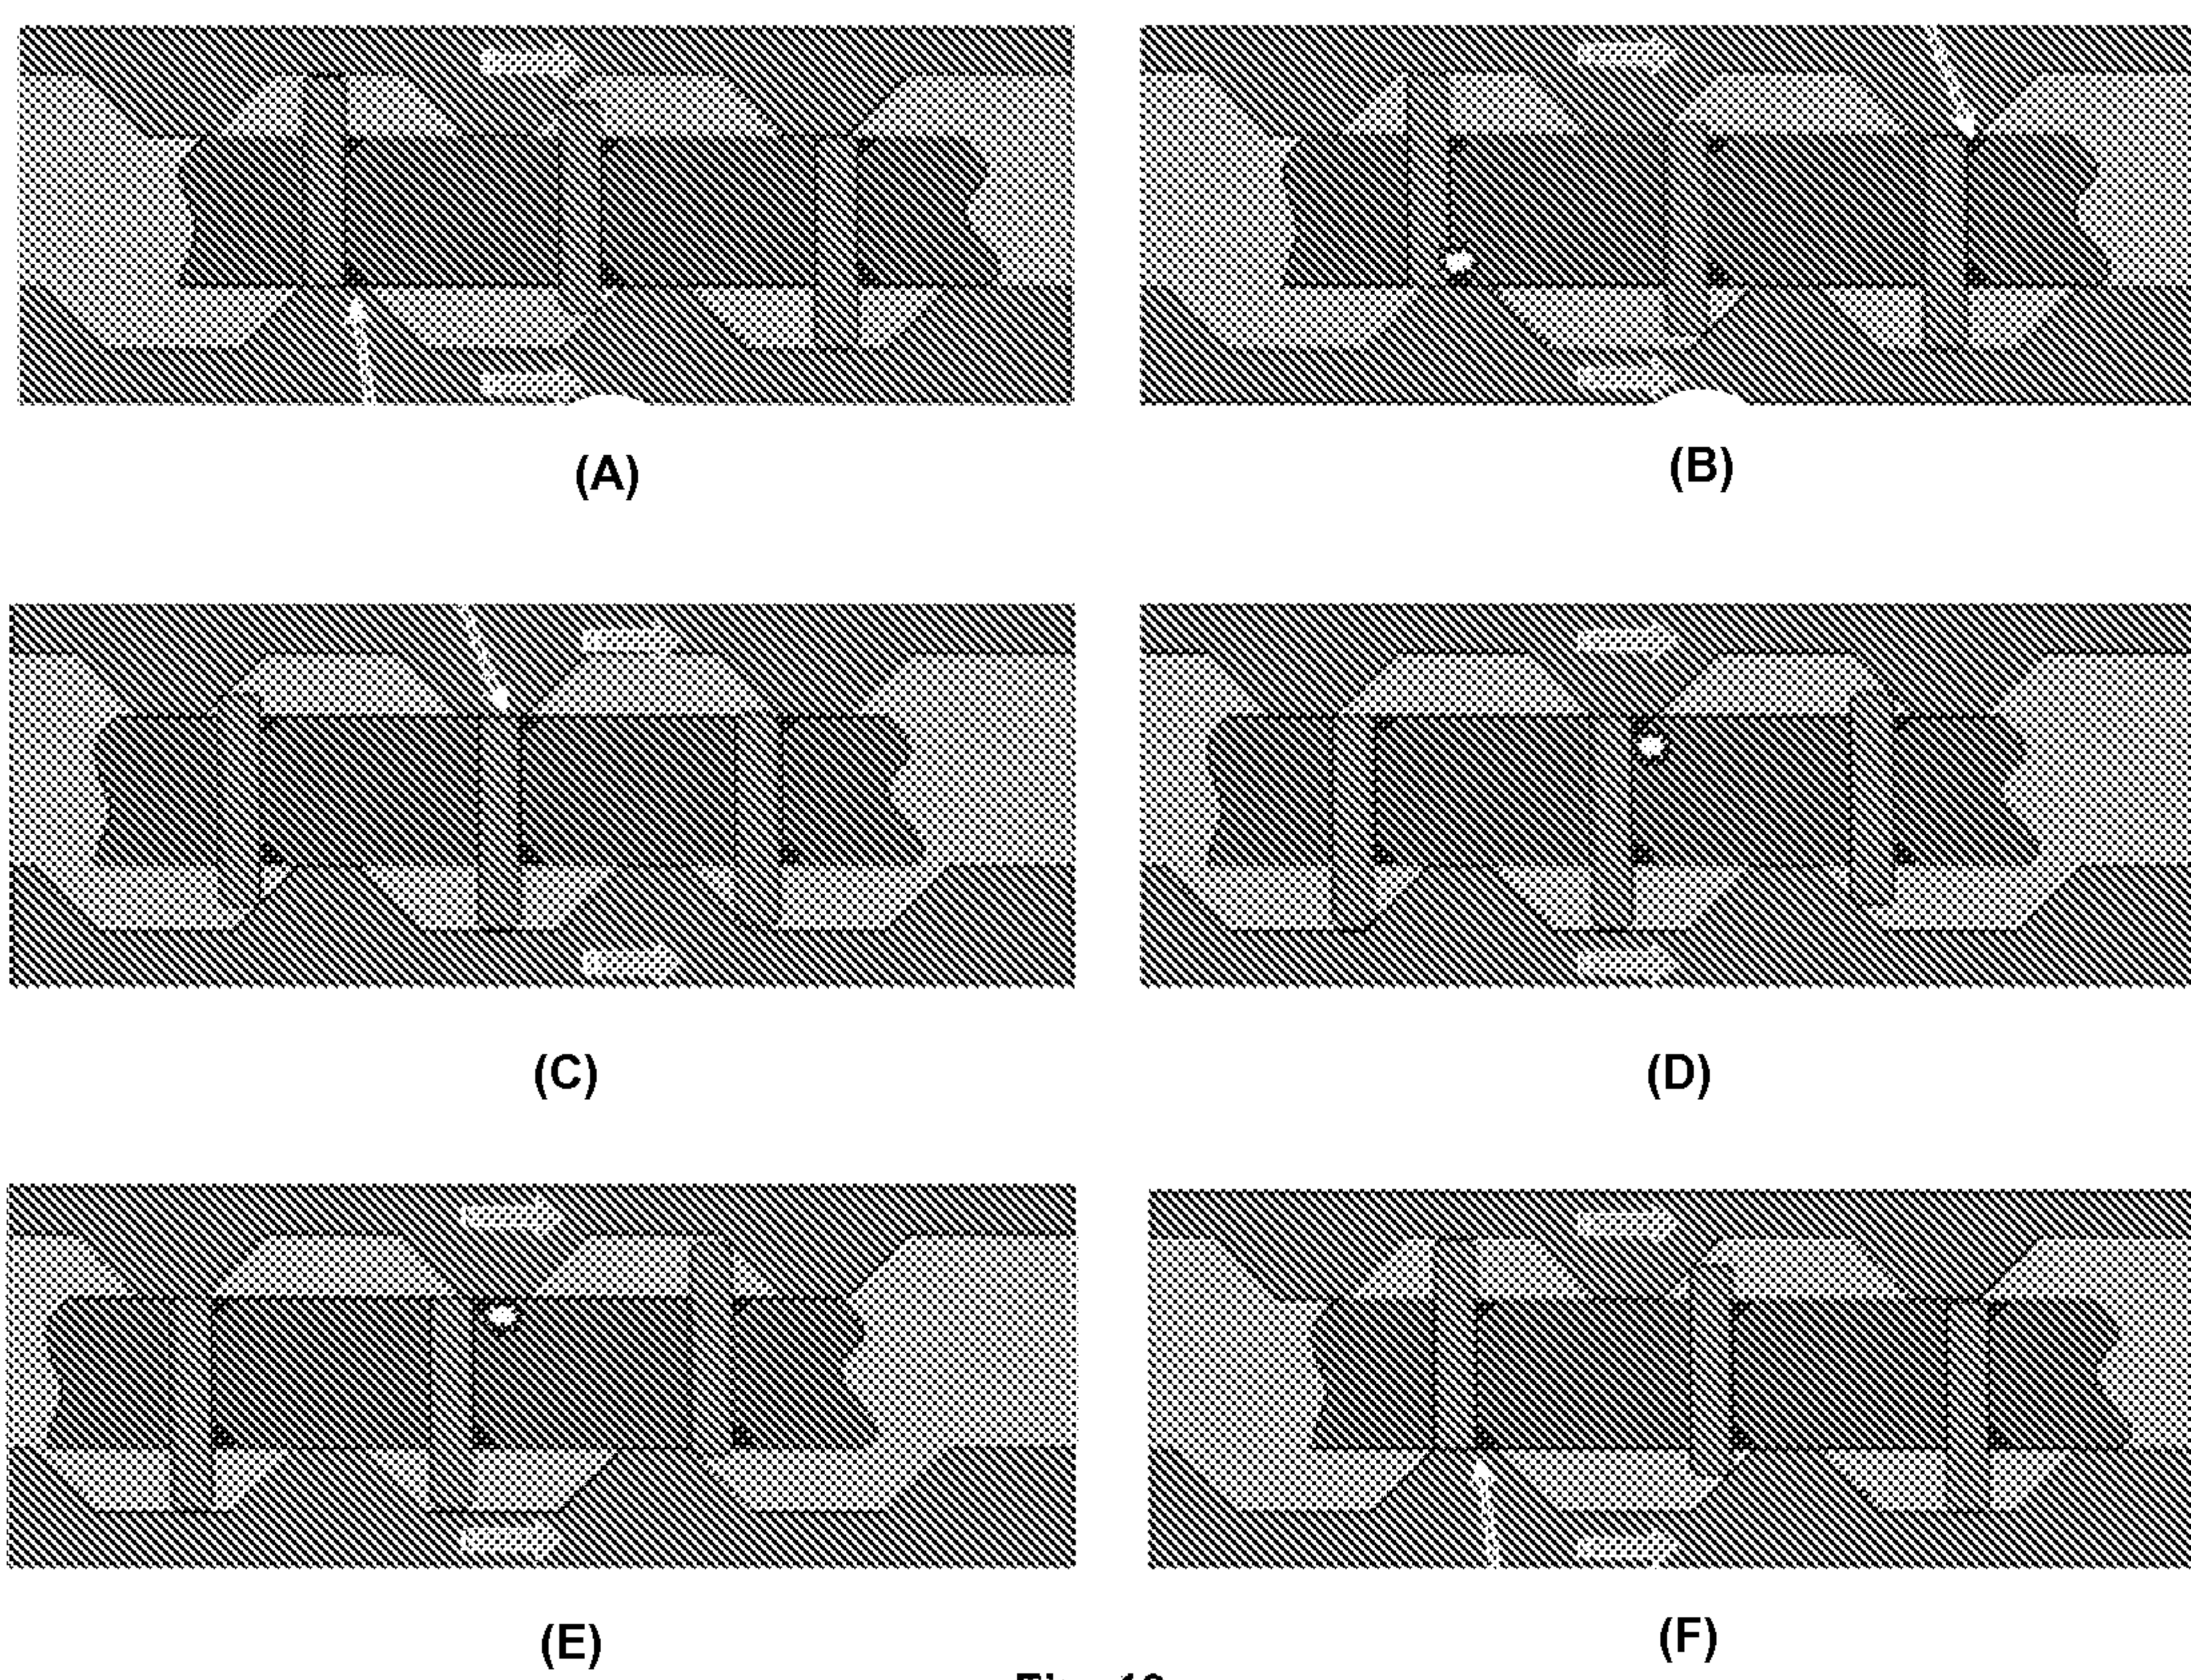


Fig. 18

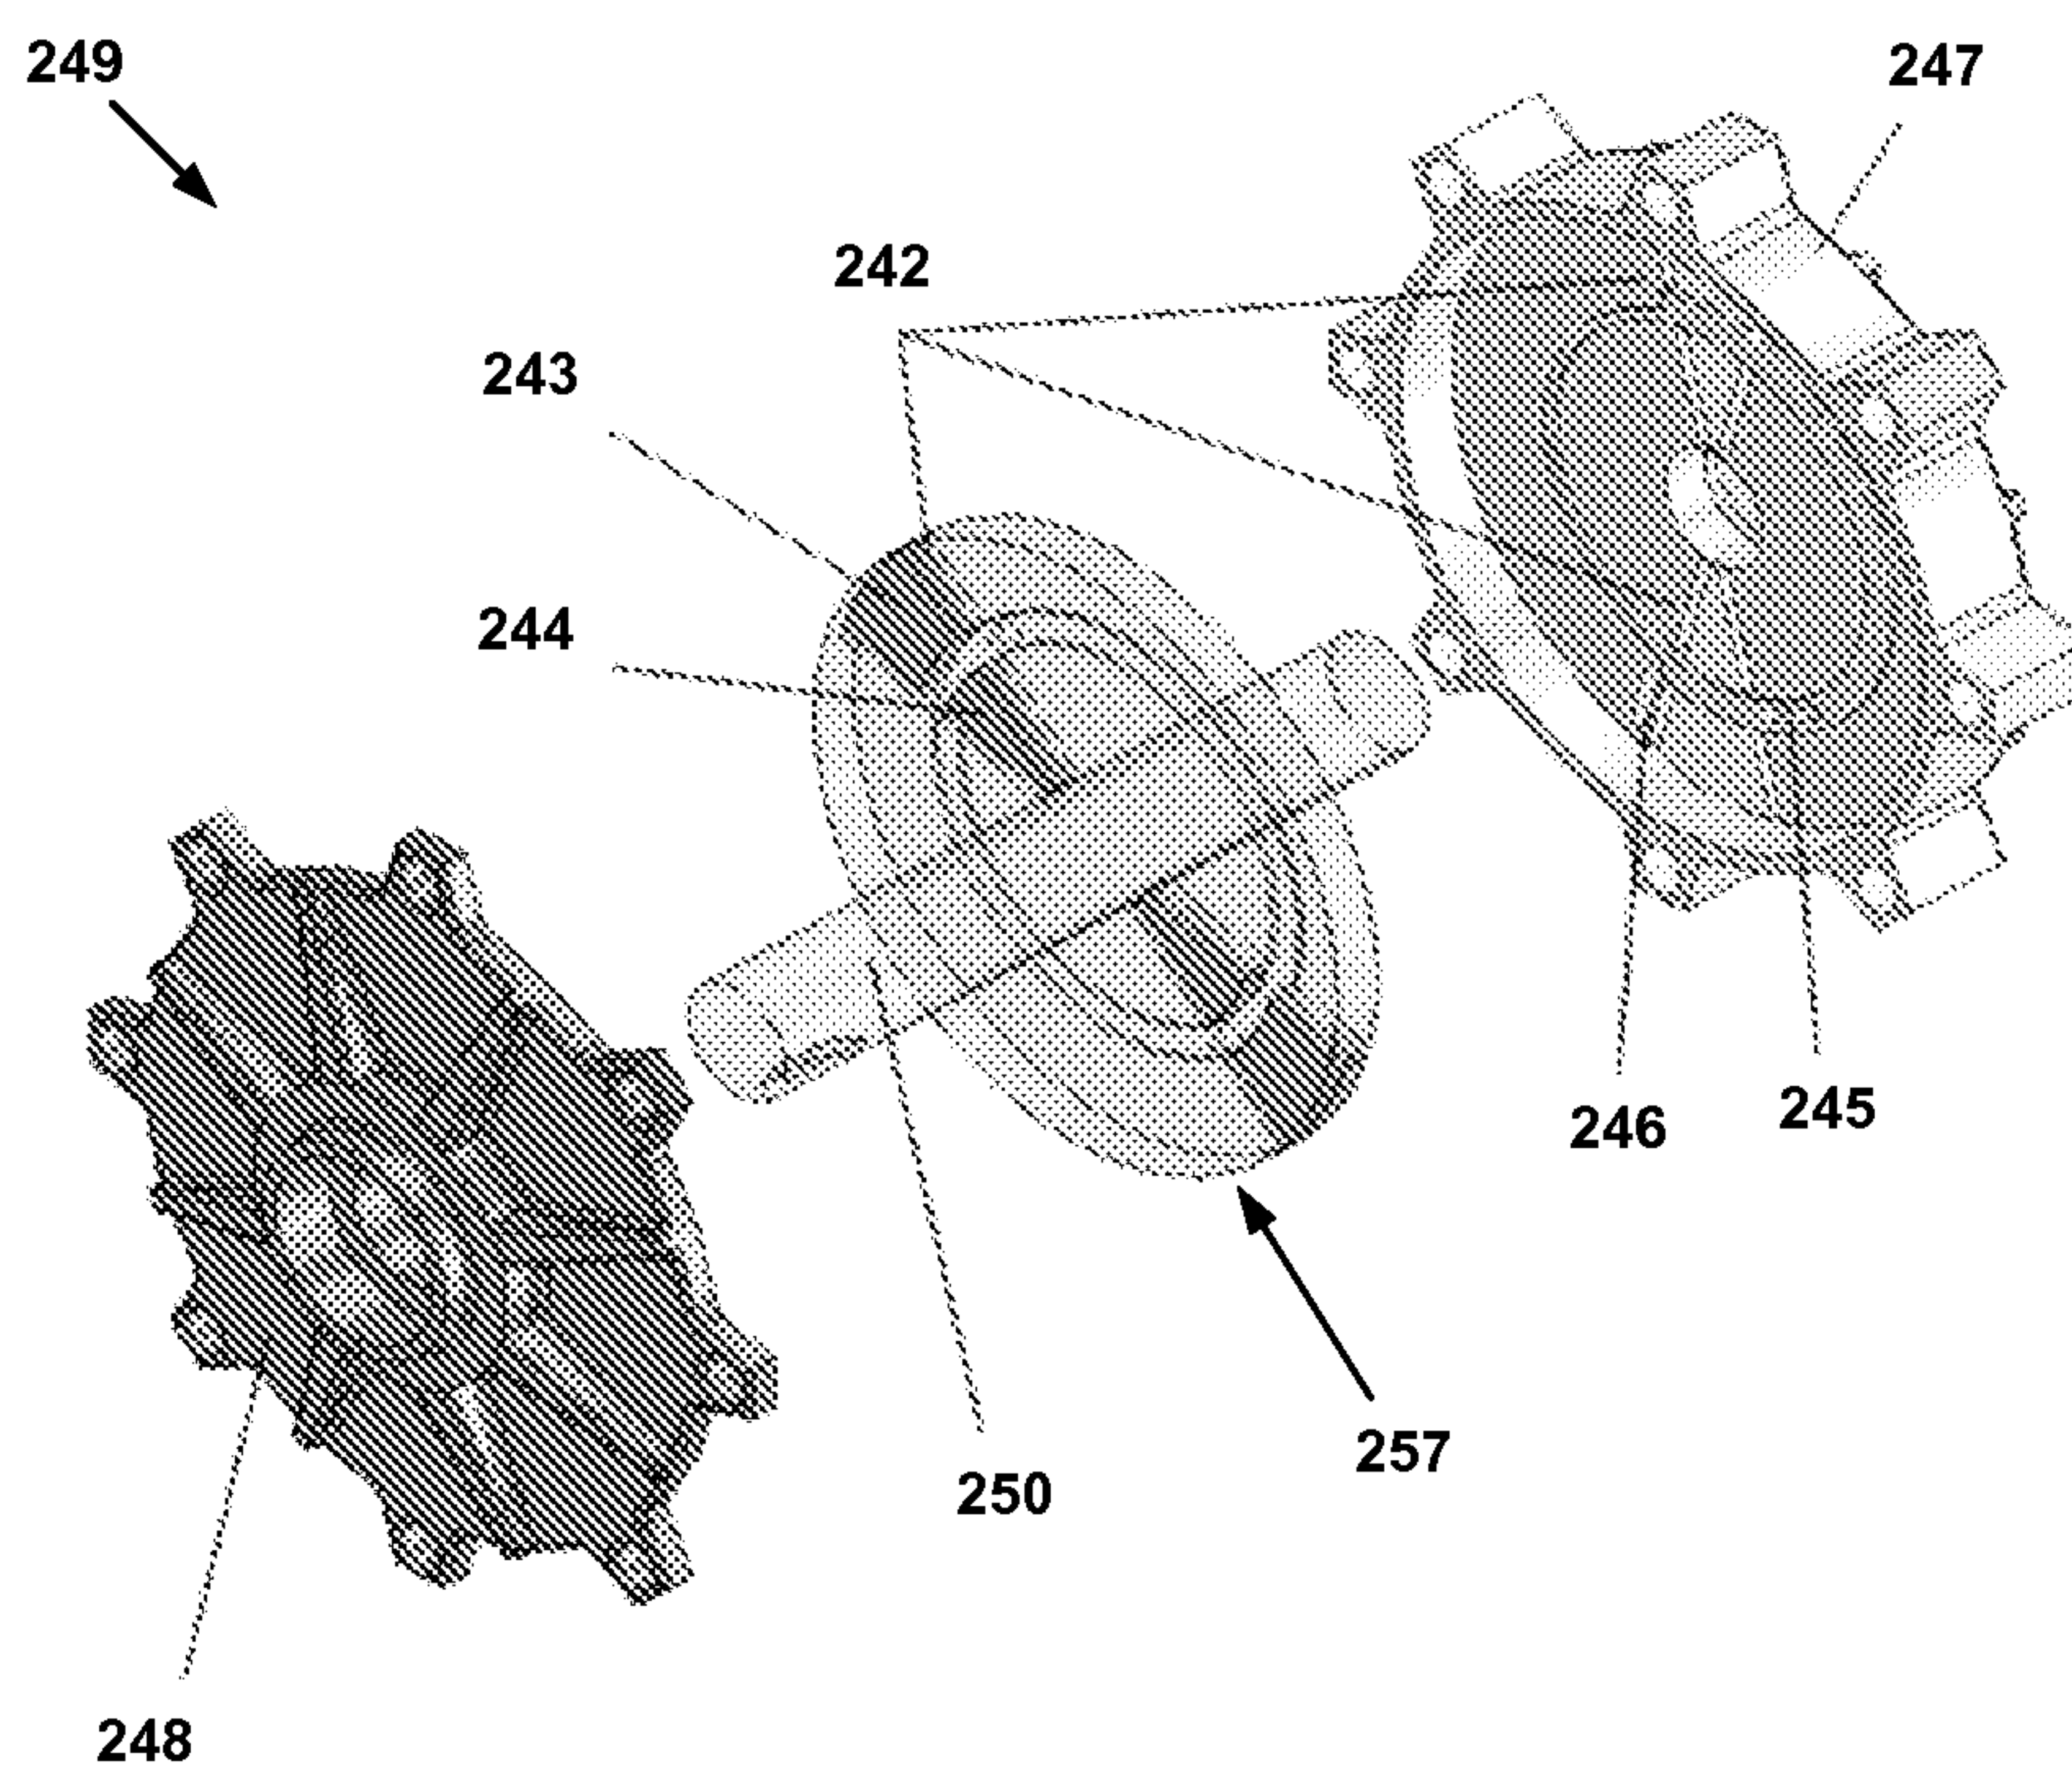
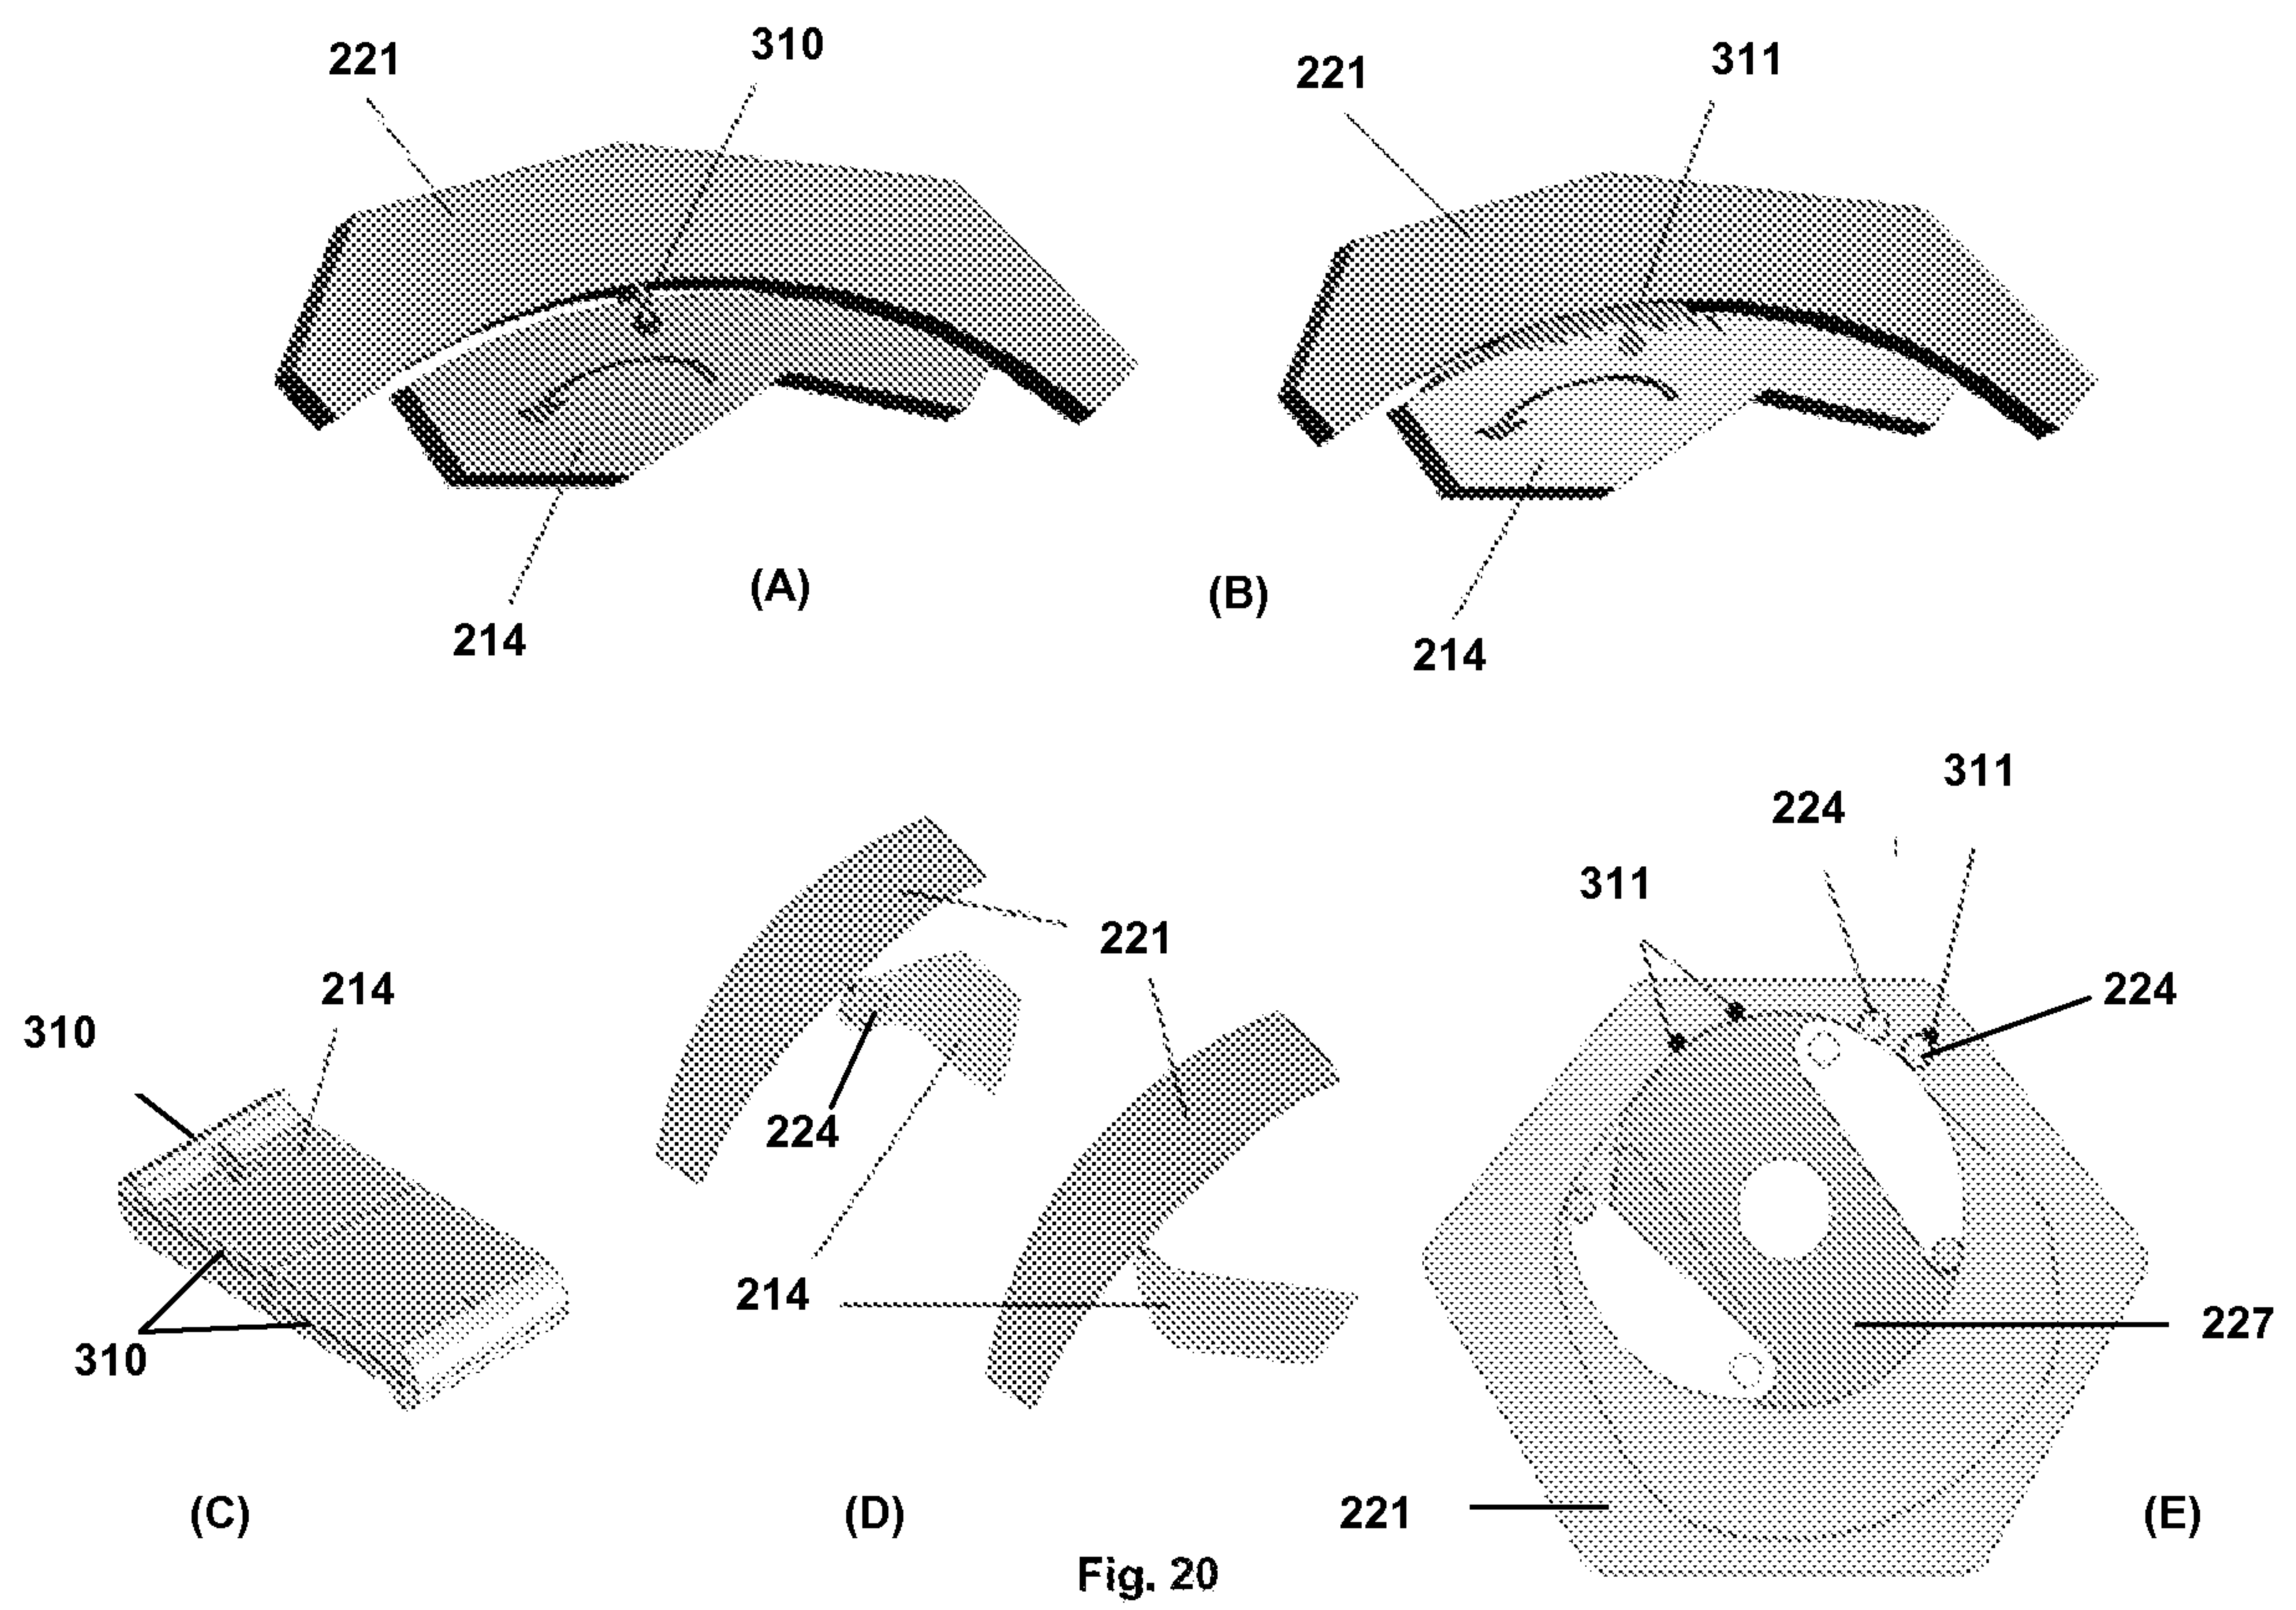


Fig. 19



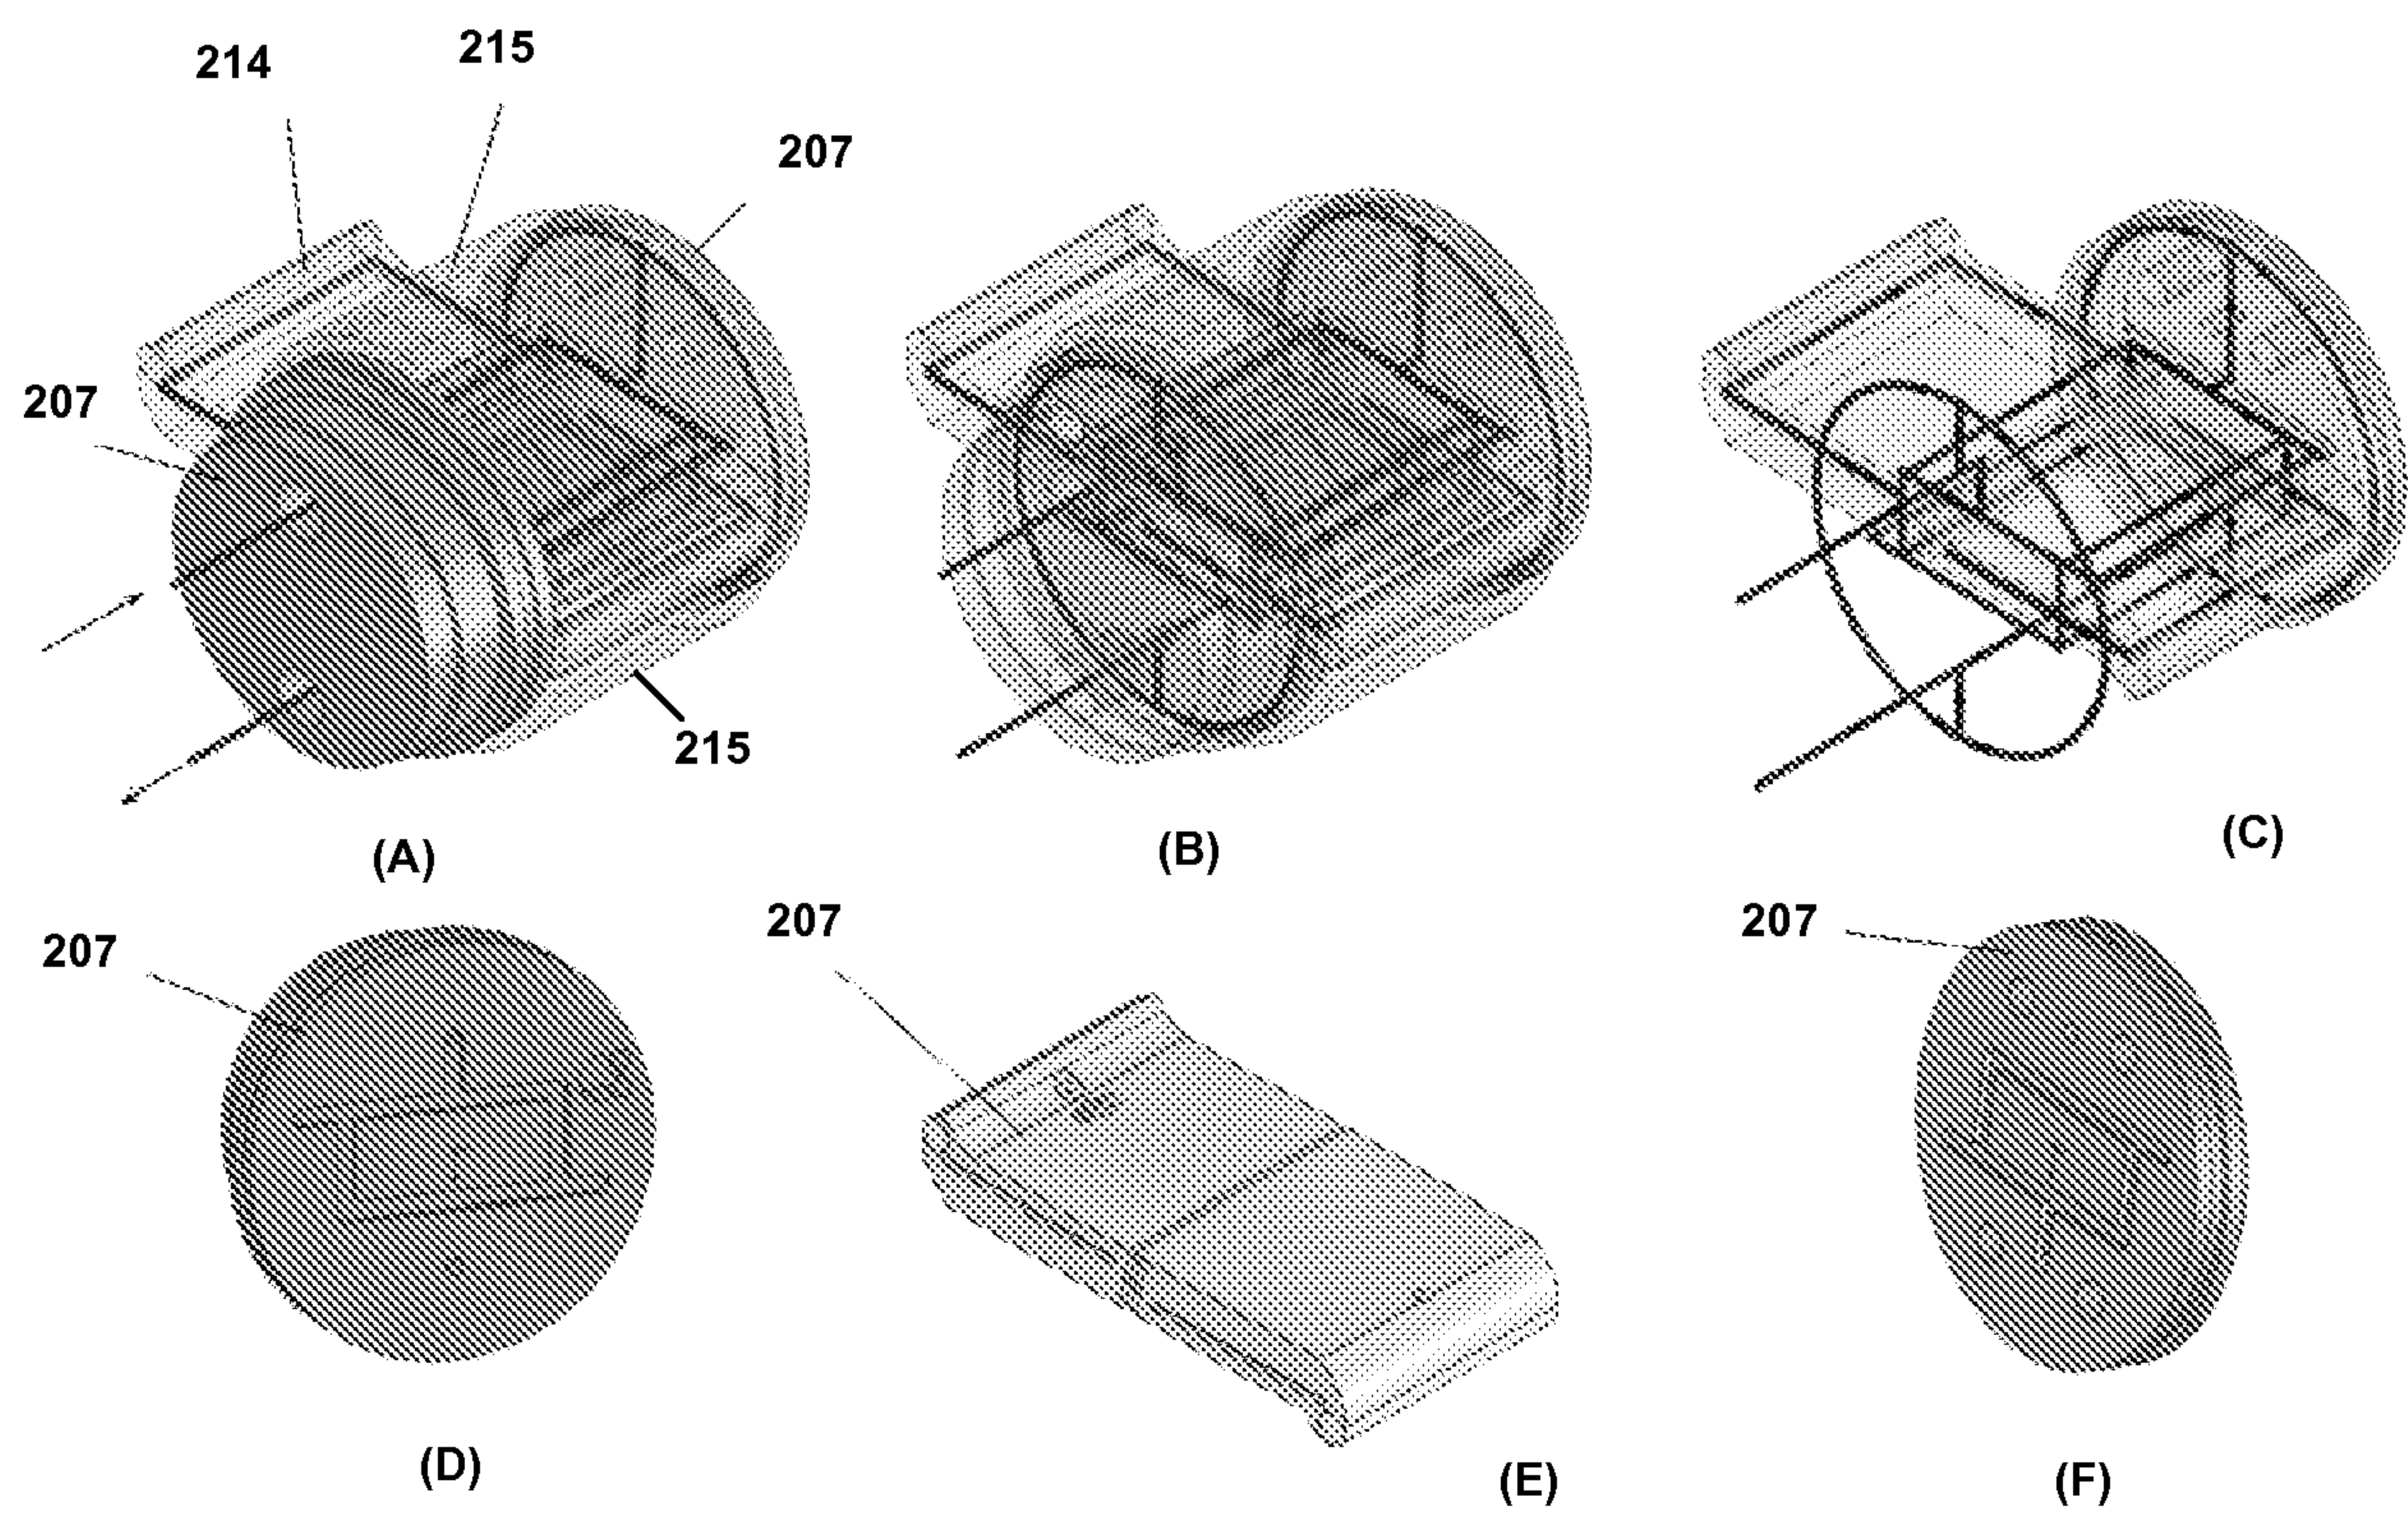
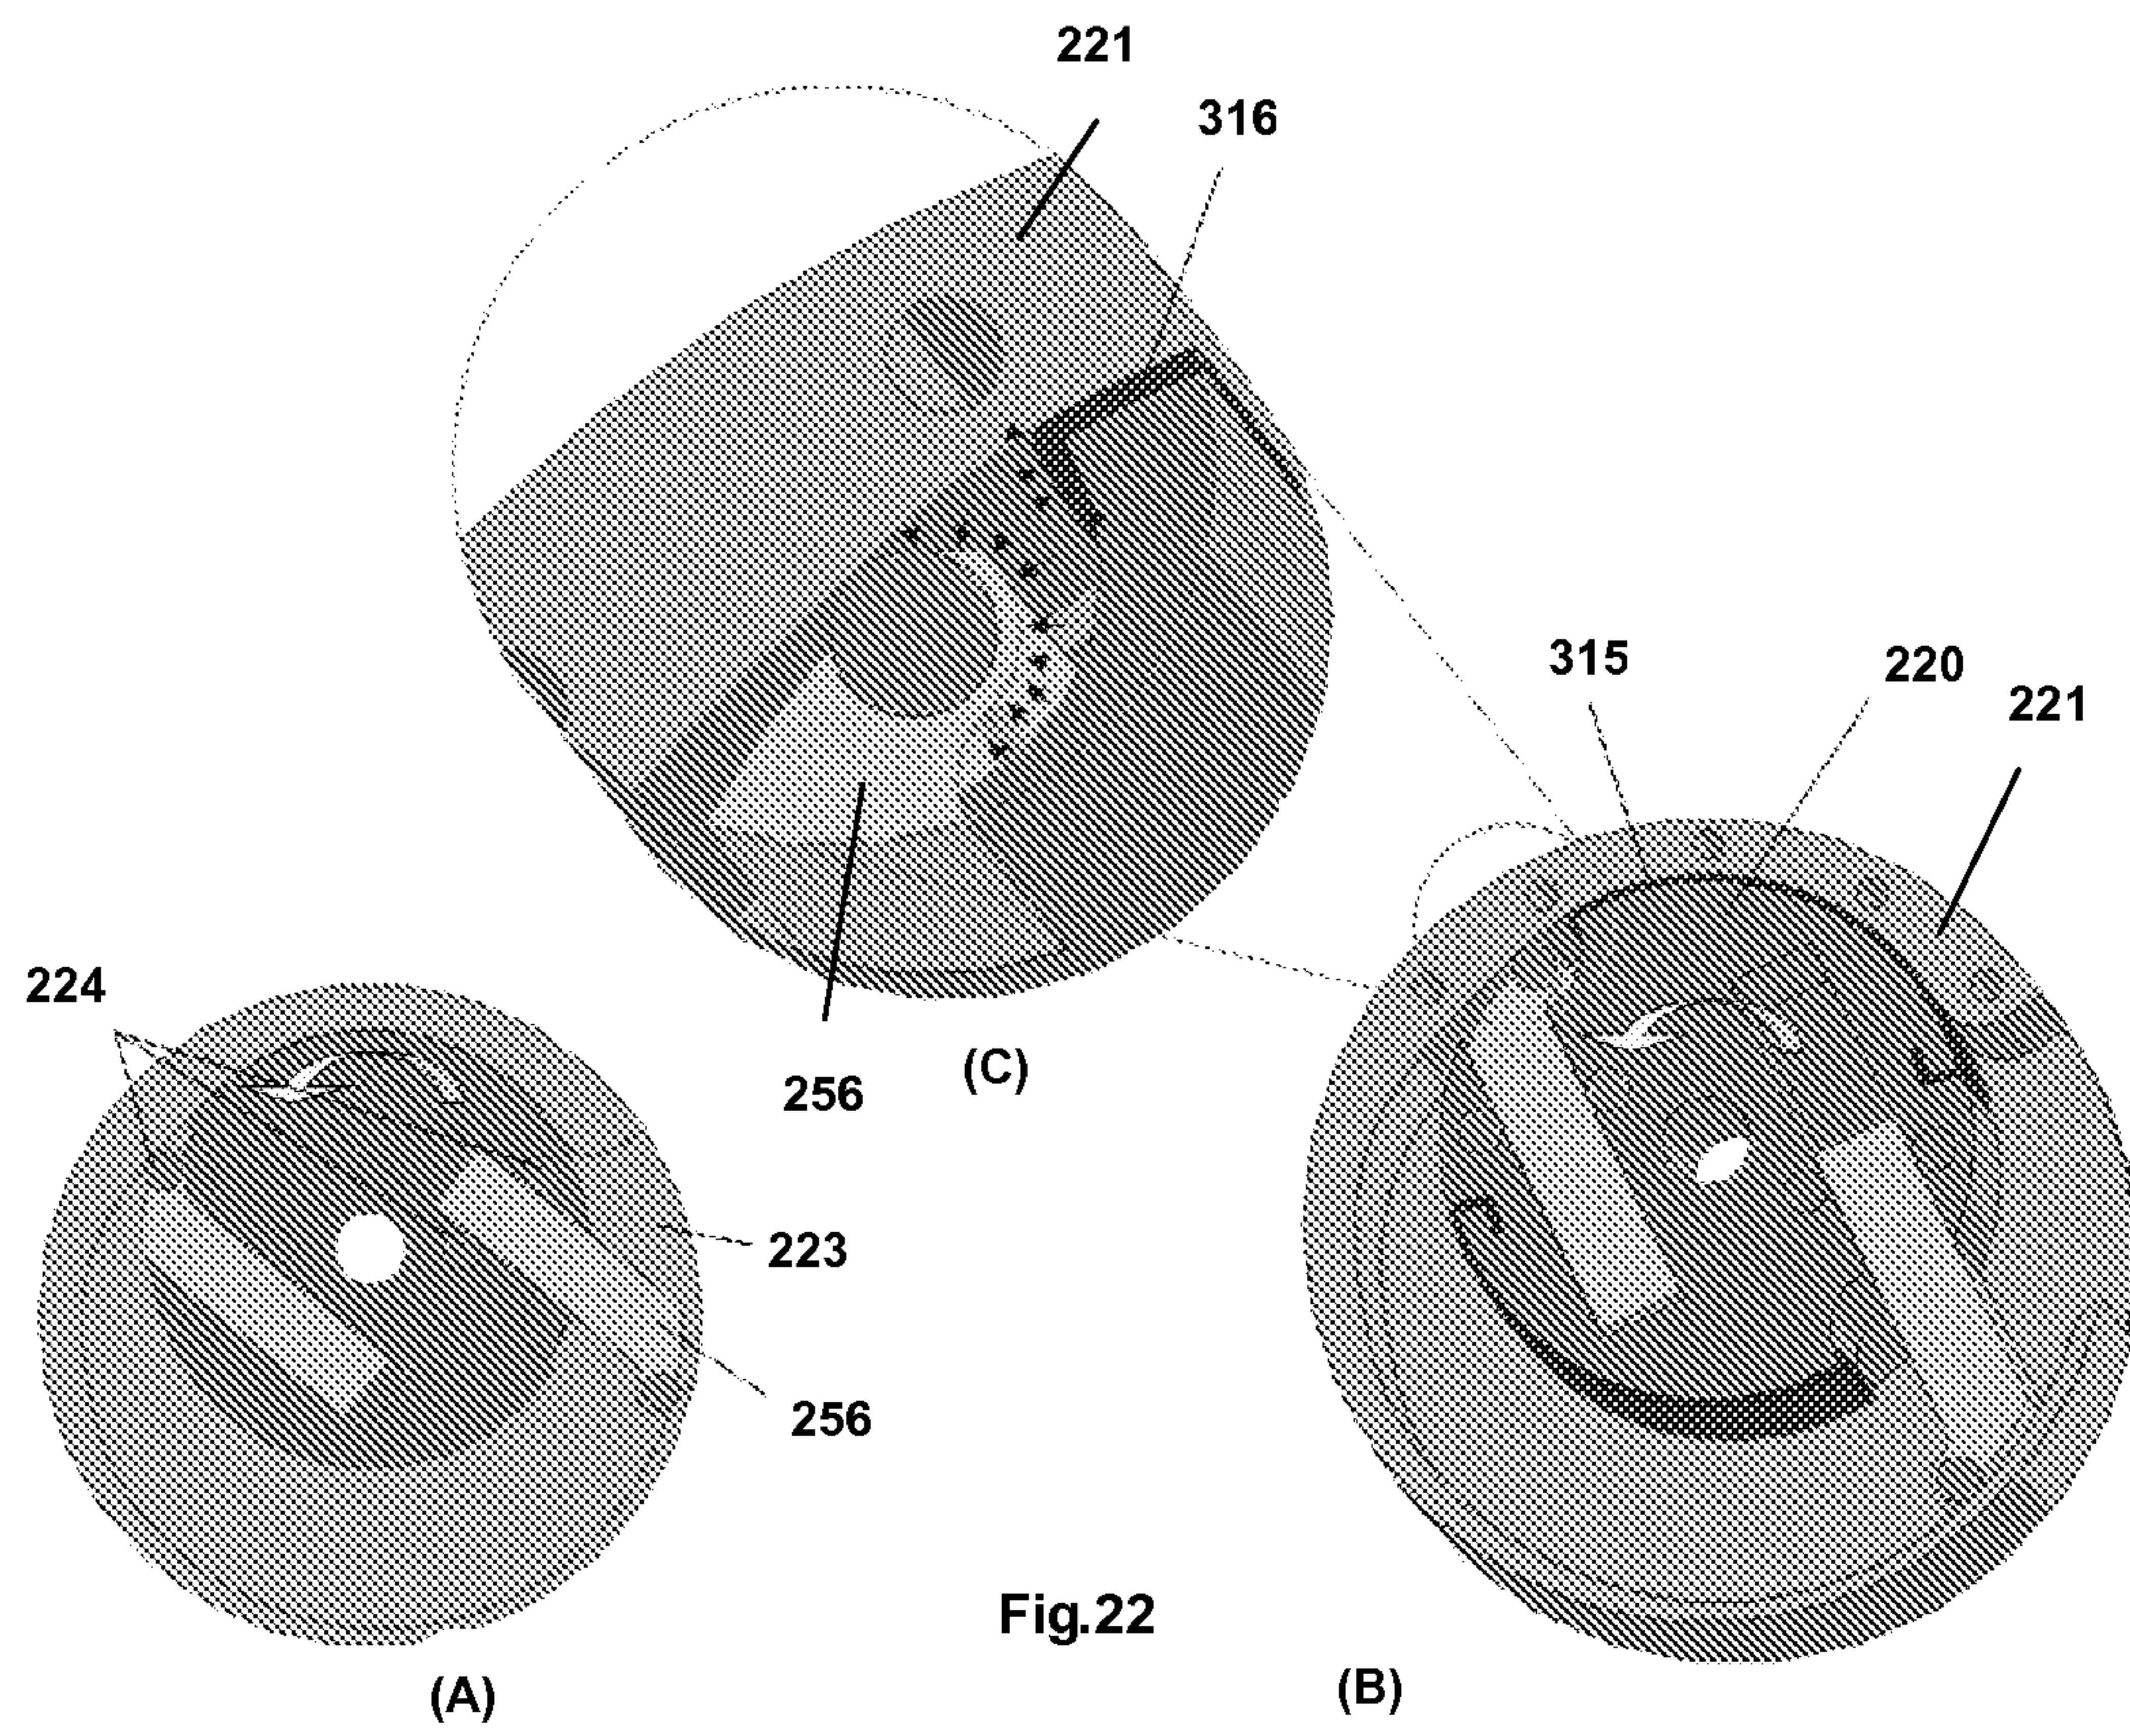


Fig. 21



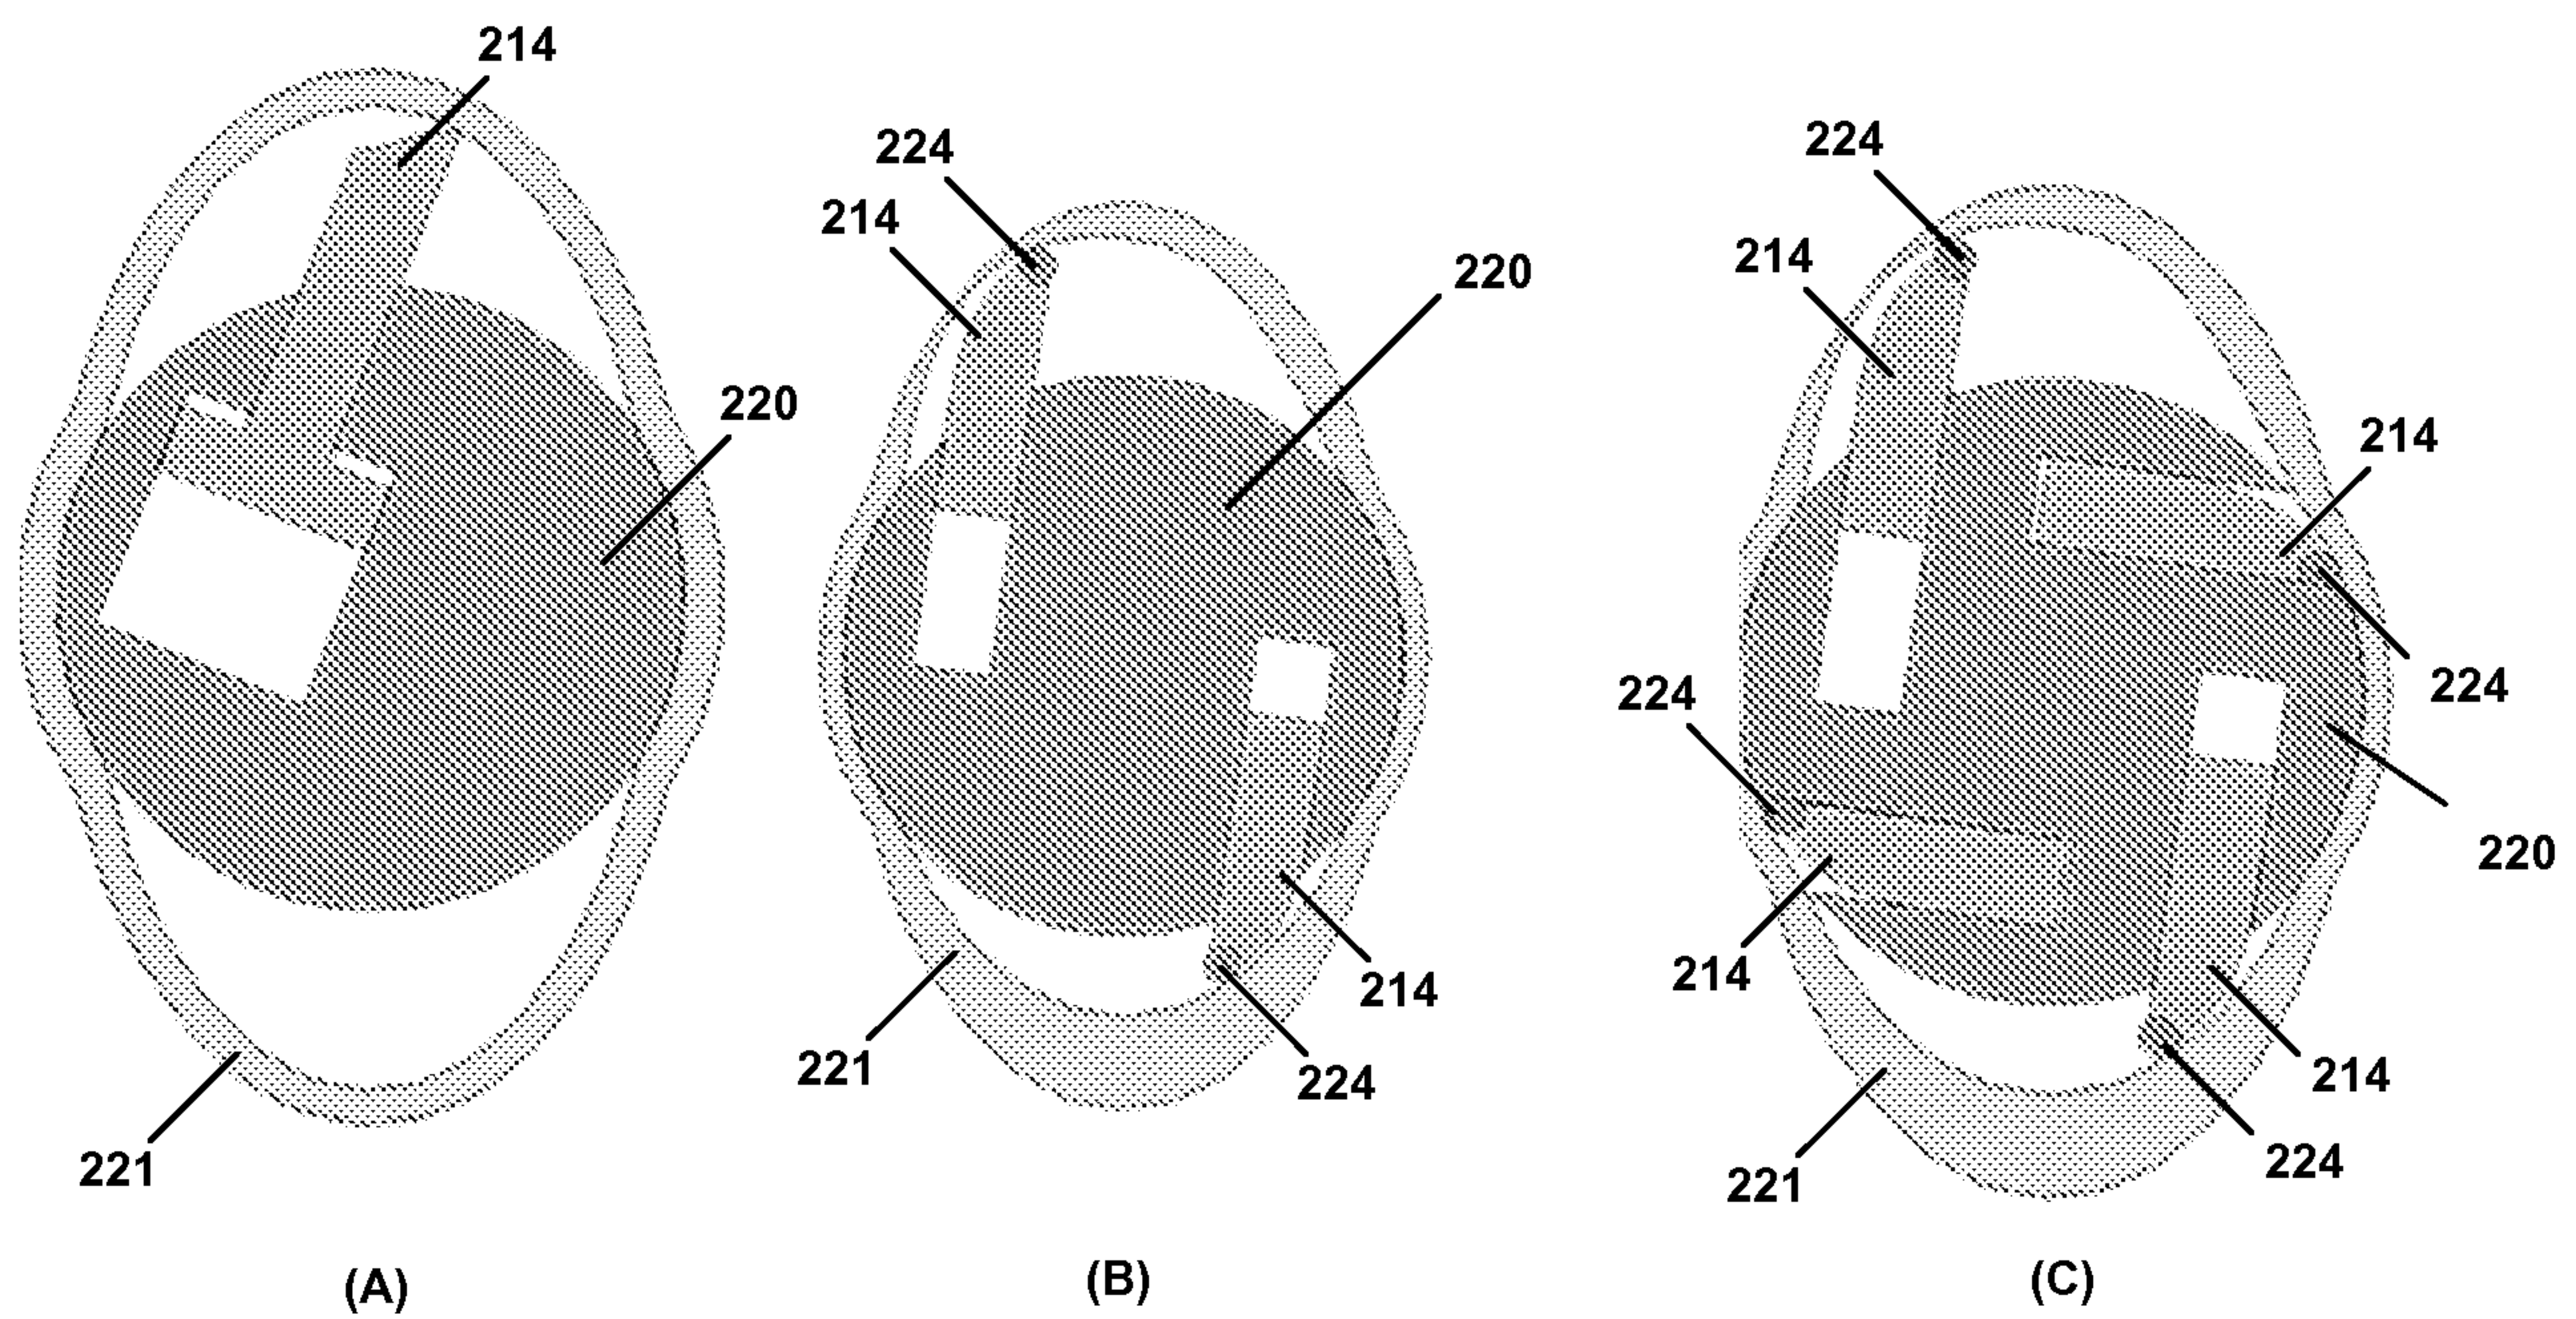


Fig. 23

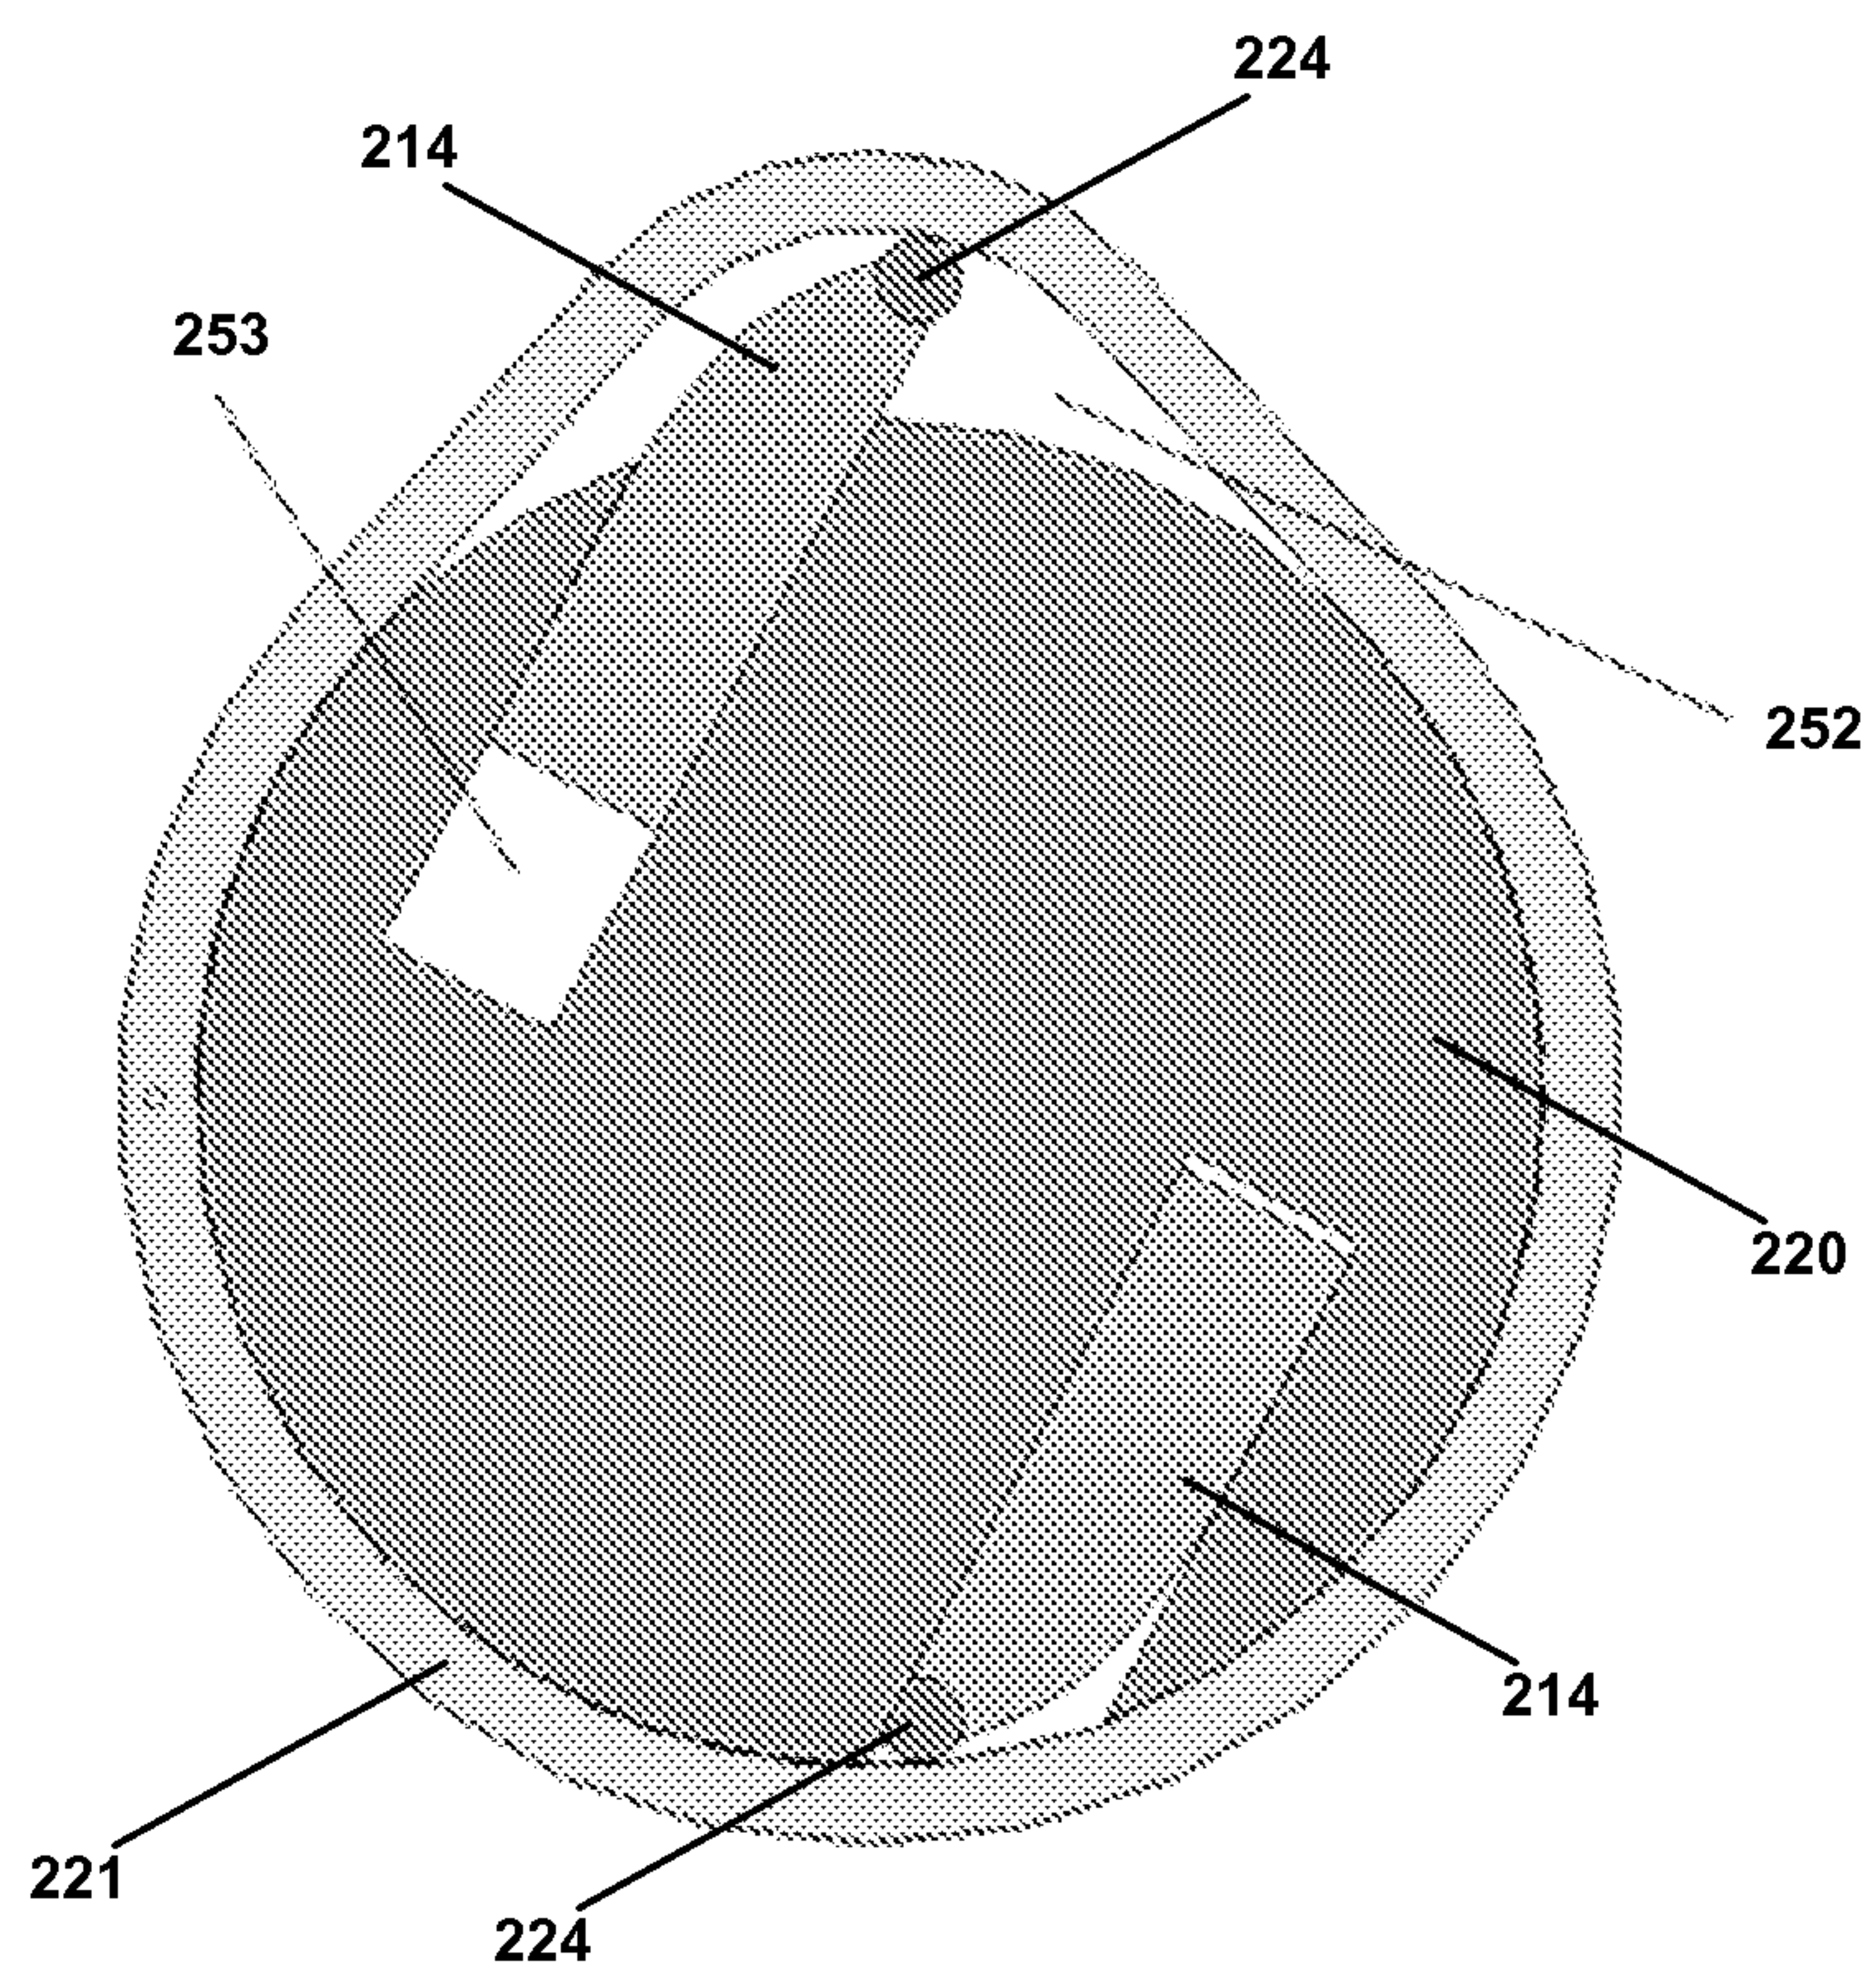


Fig. 24

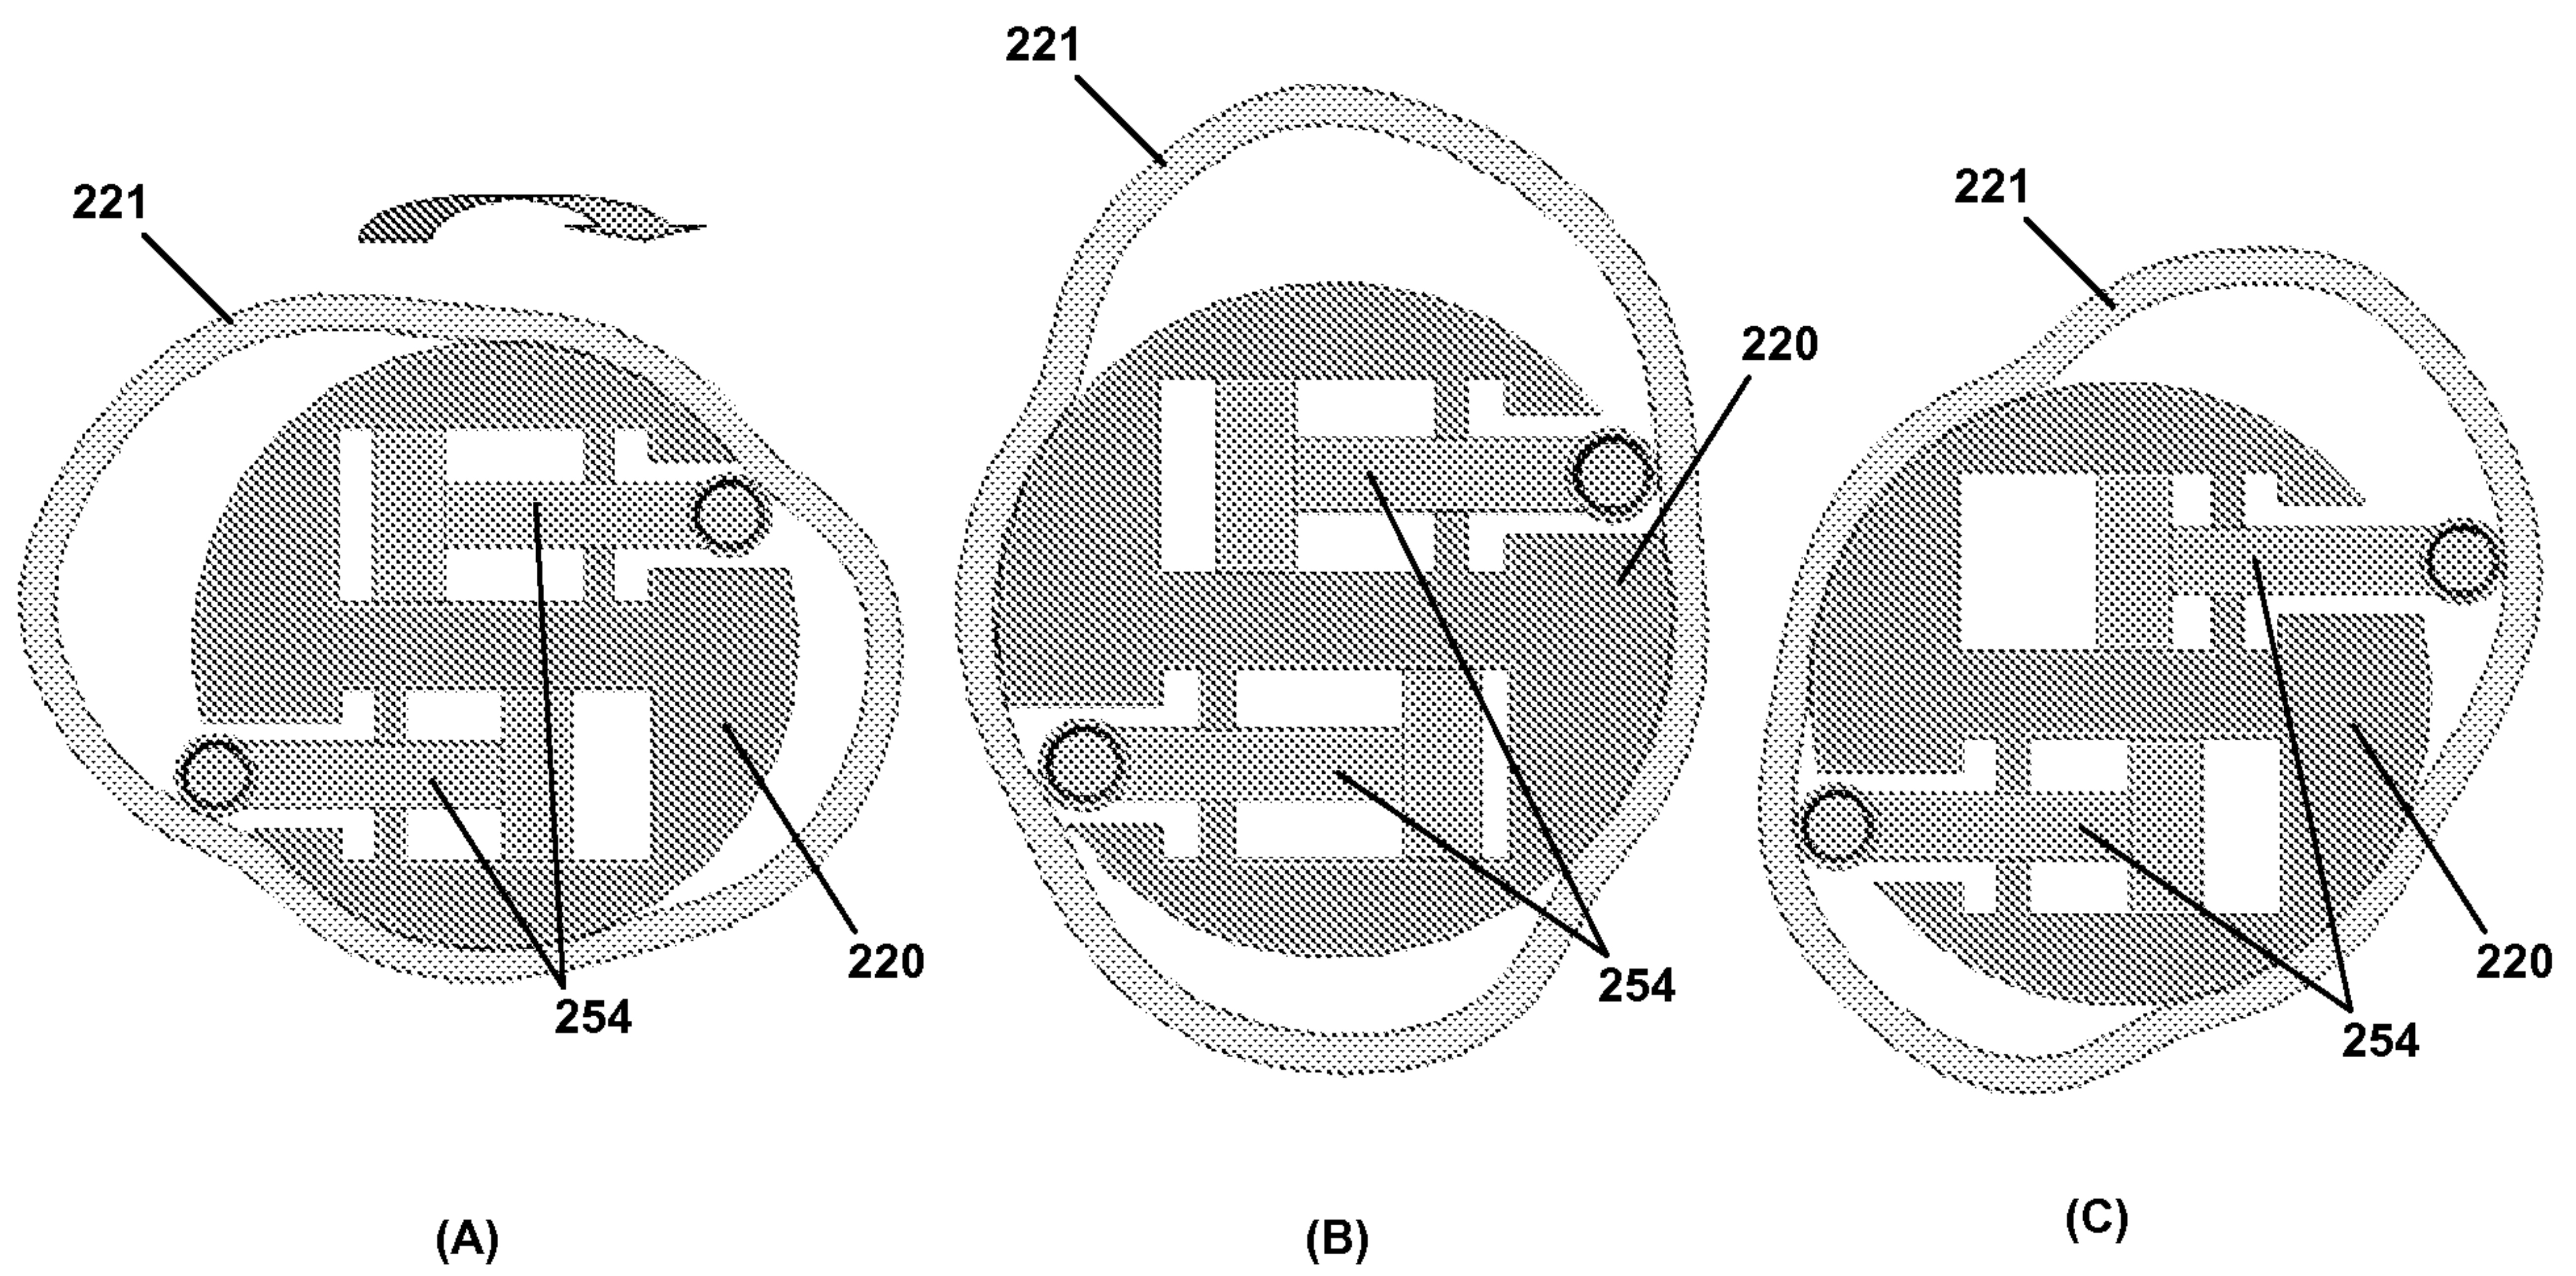


Fig.25

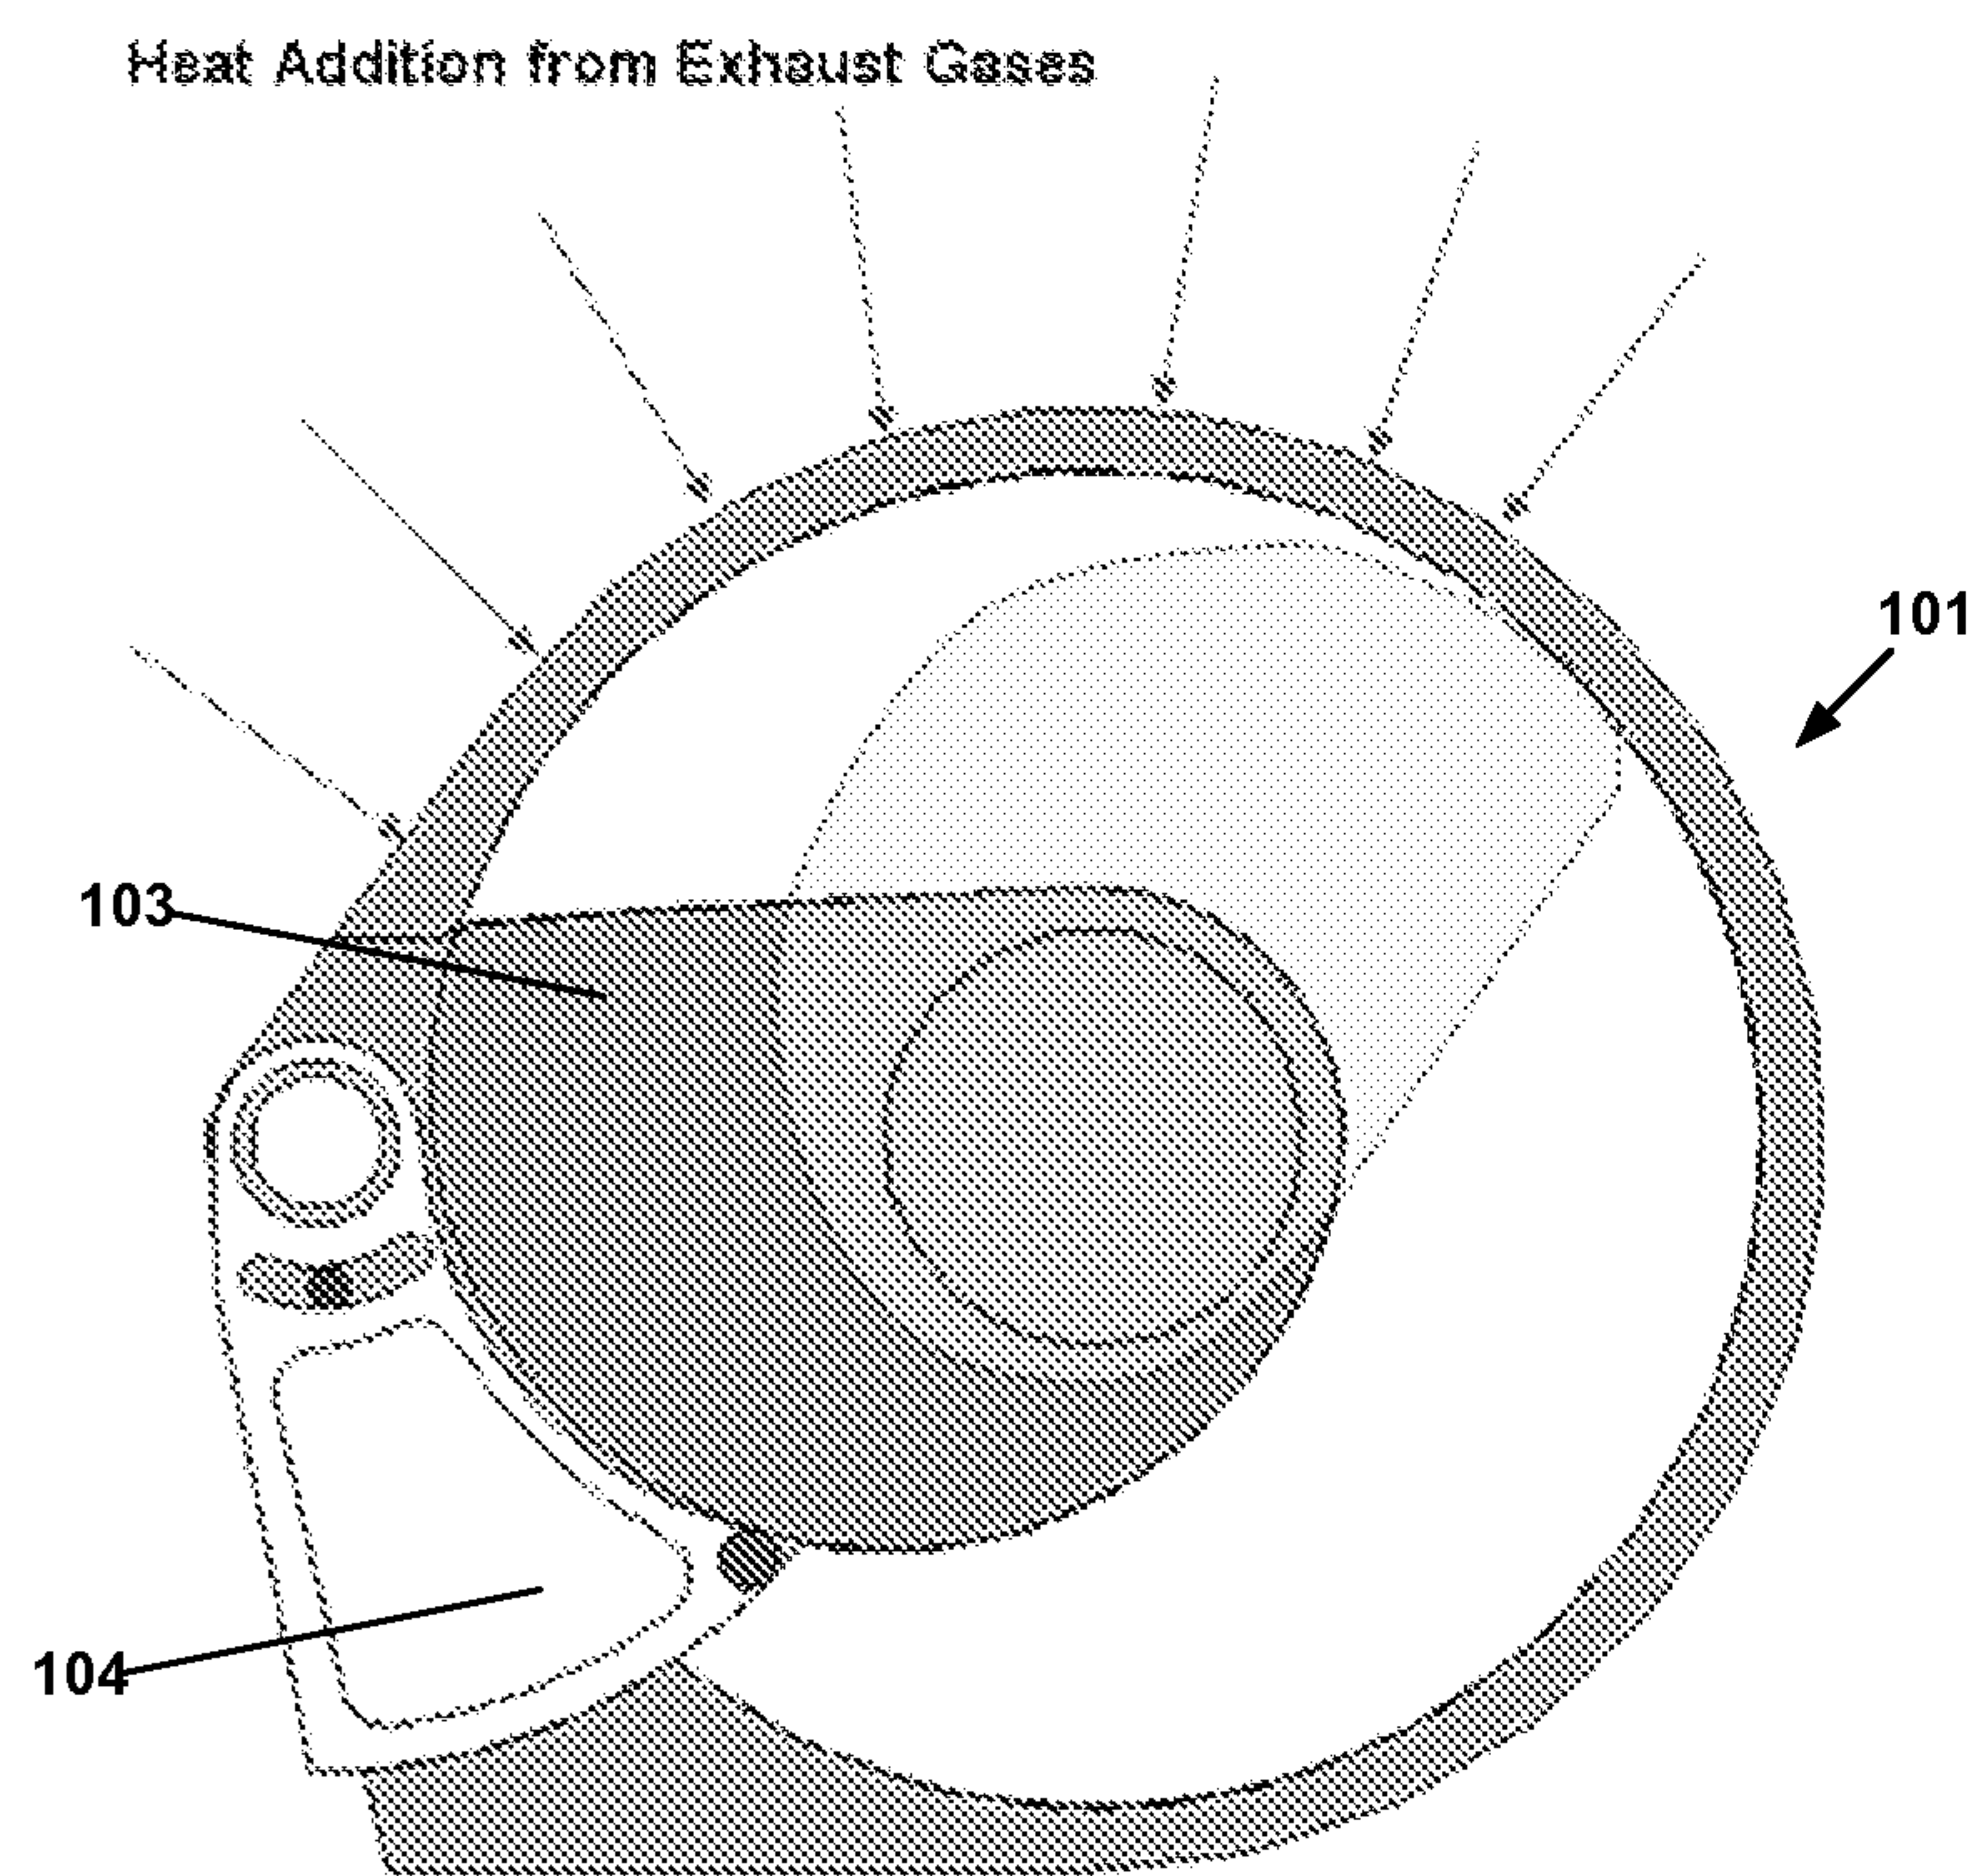


Fig. 26

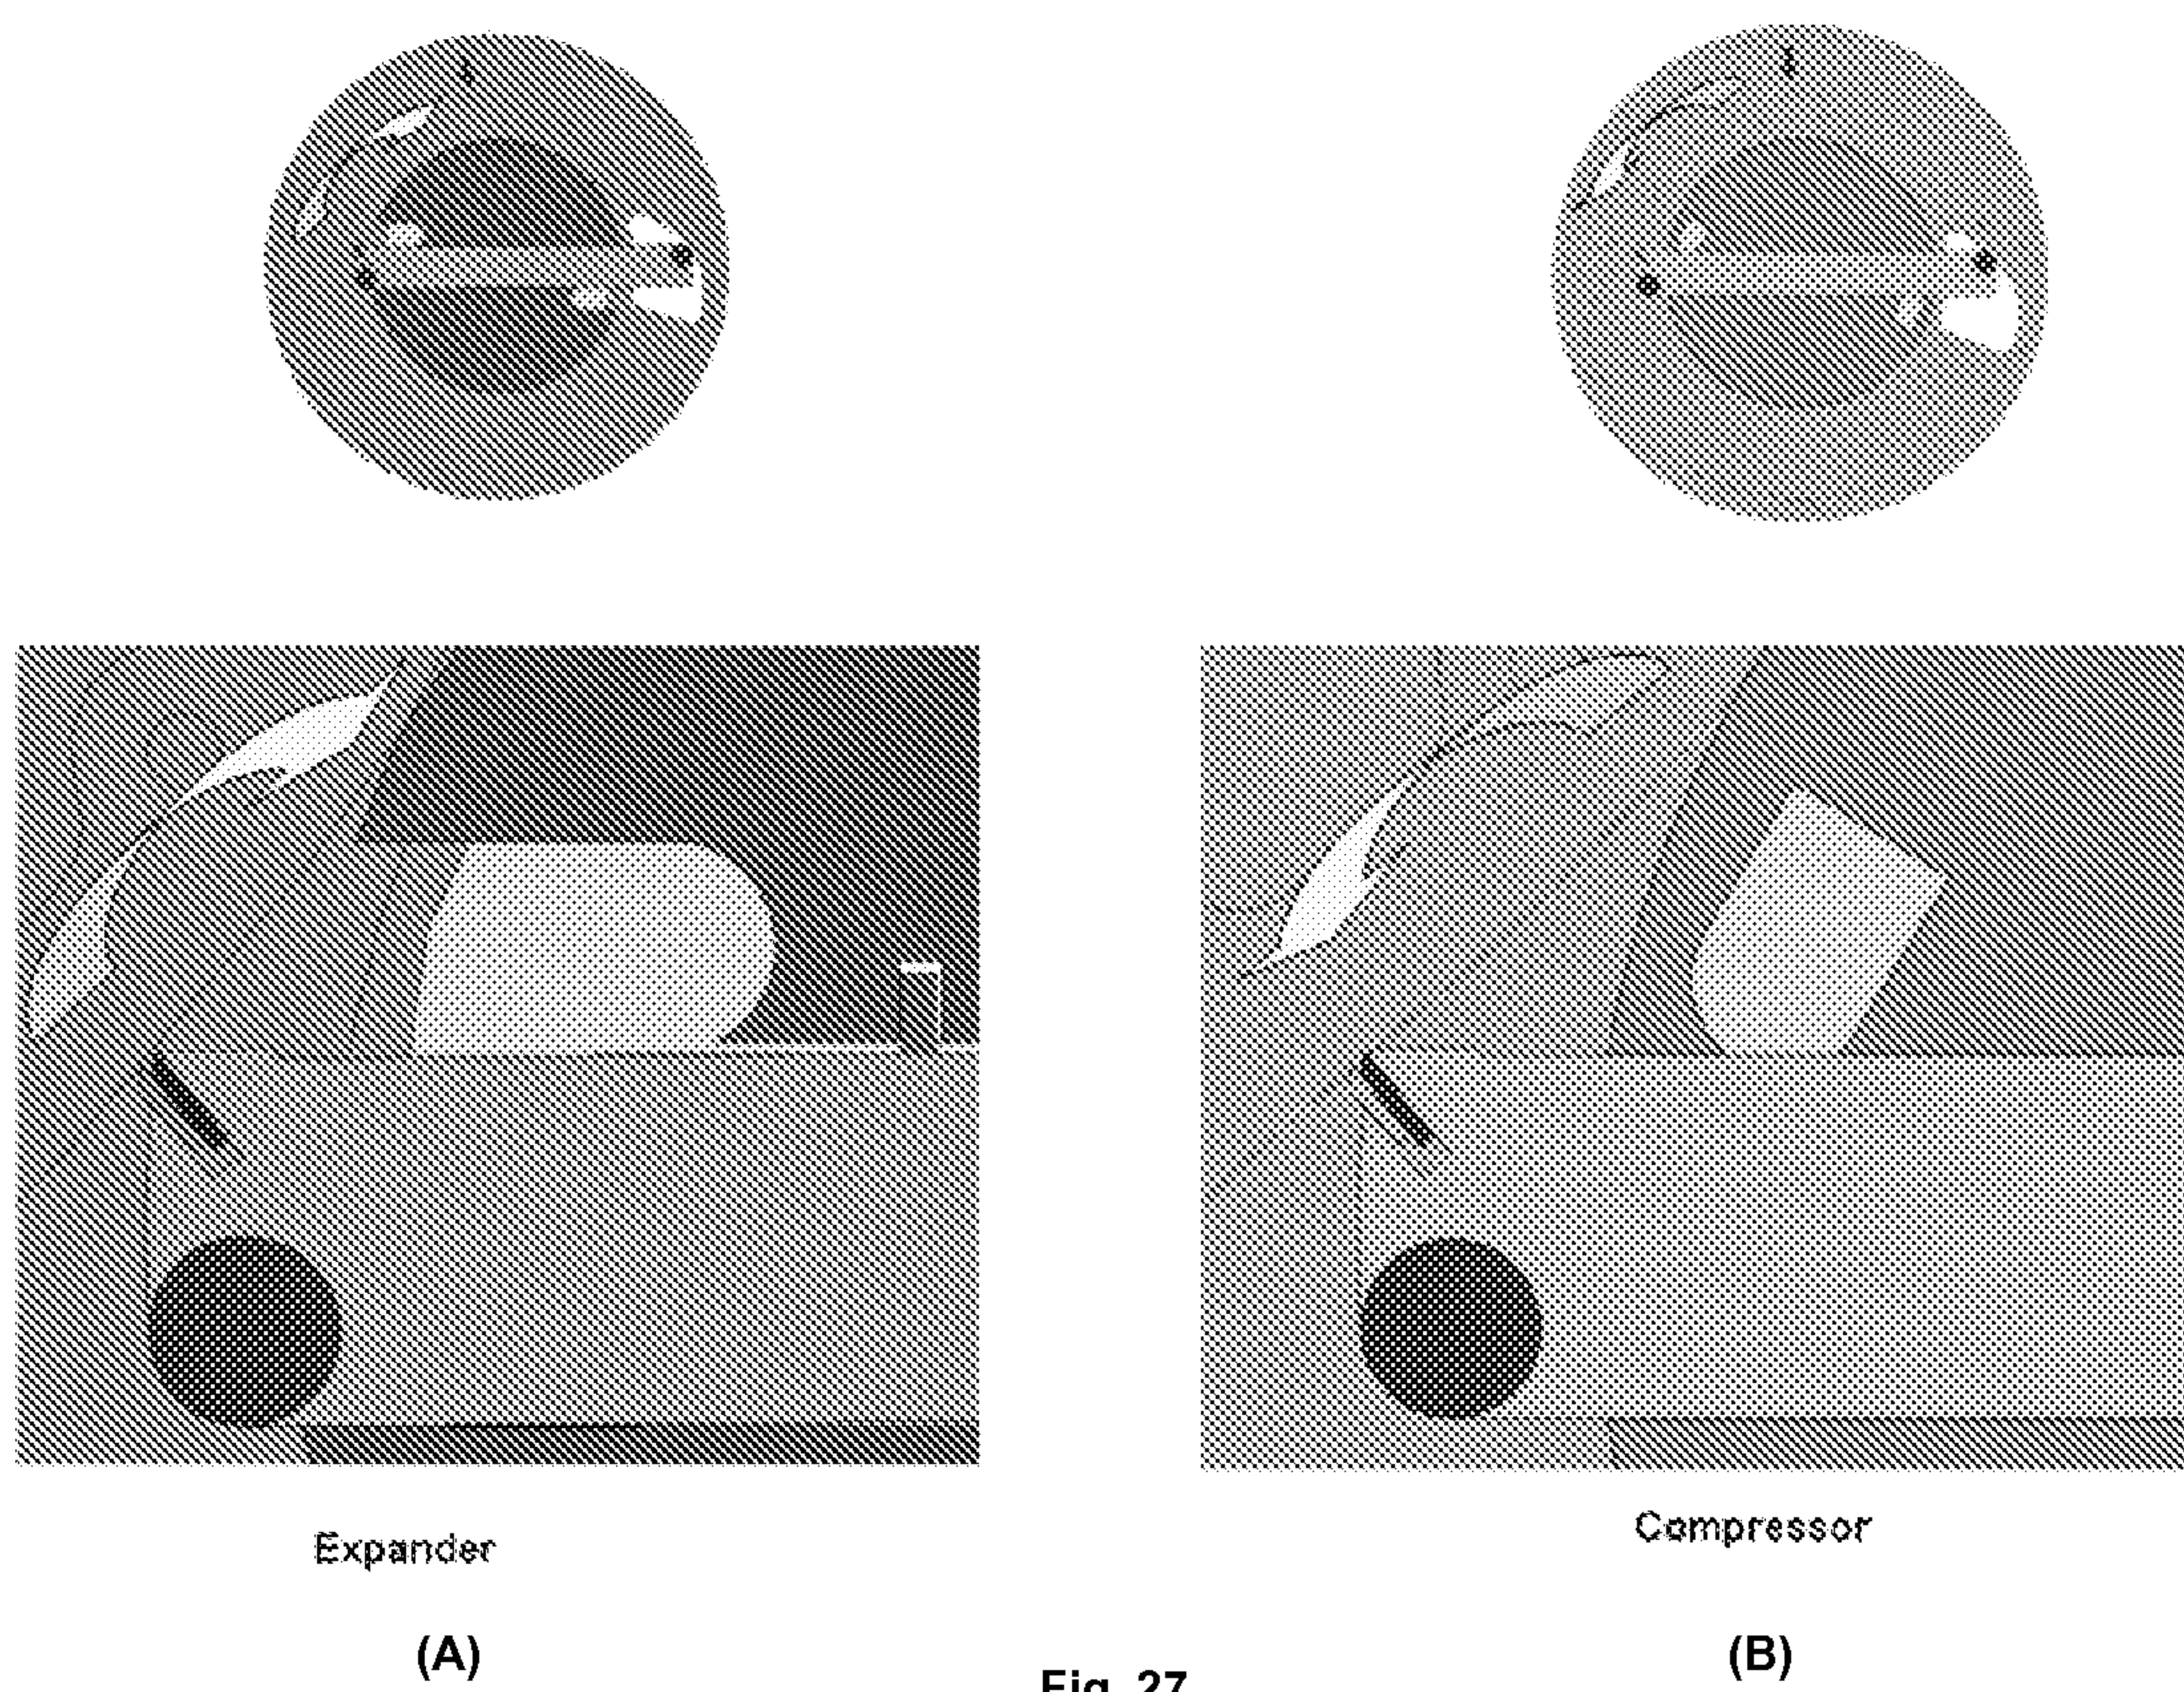


Fig. 27

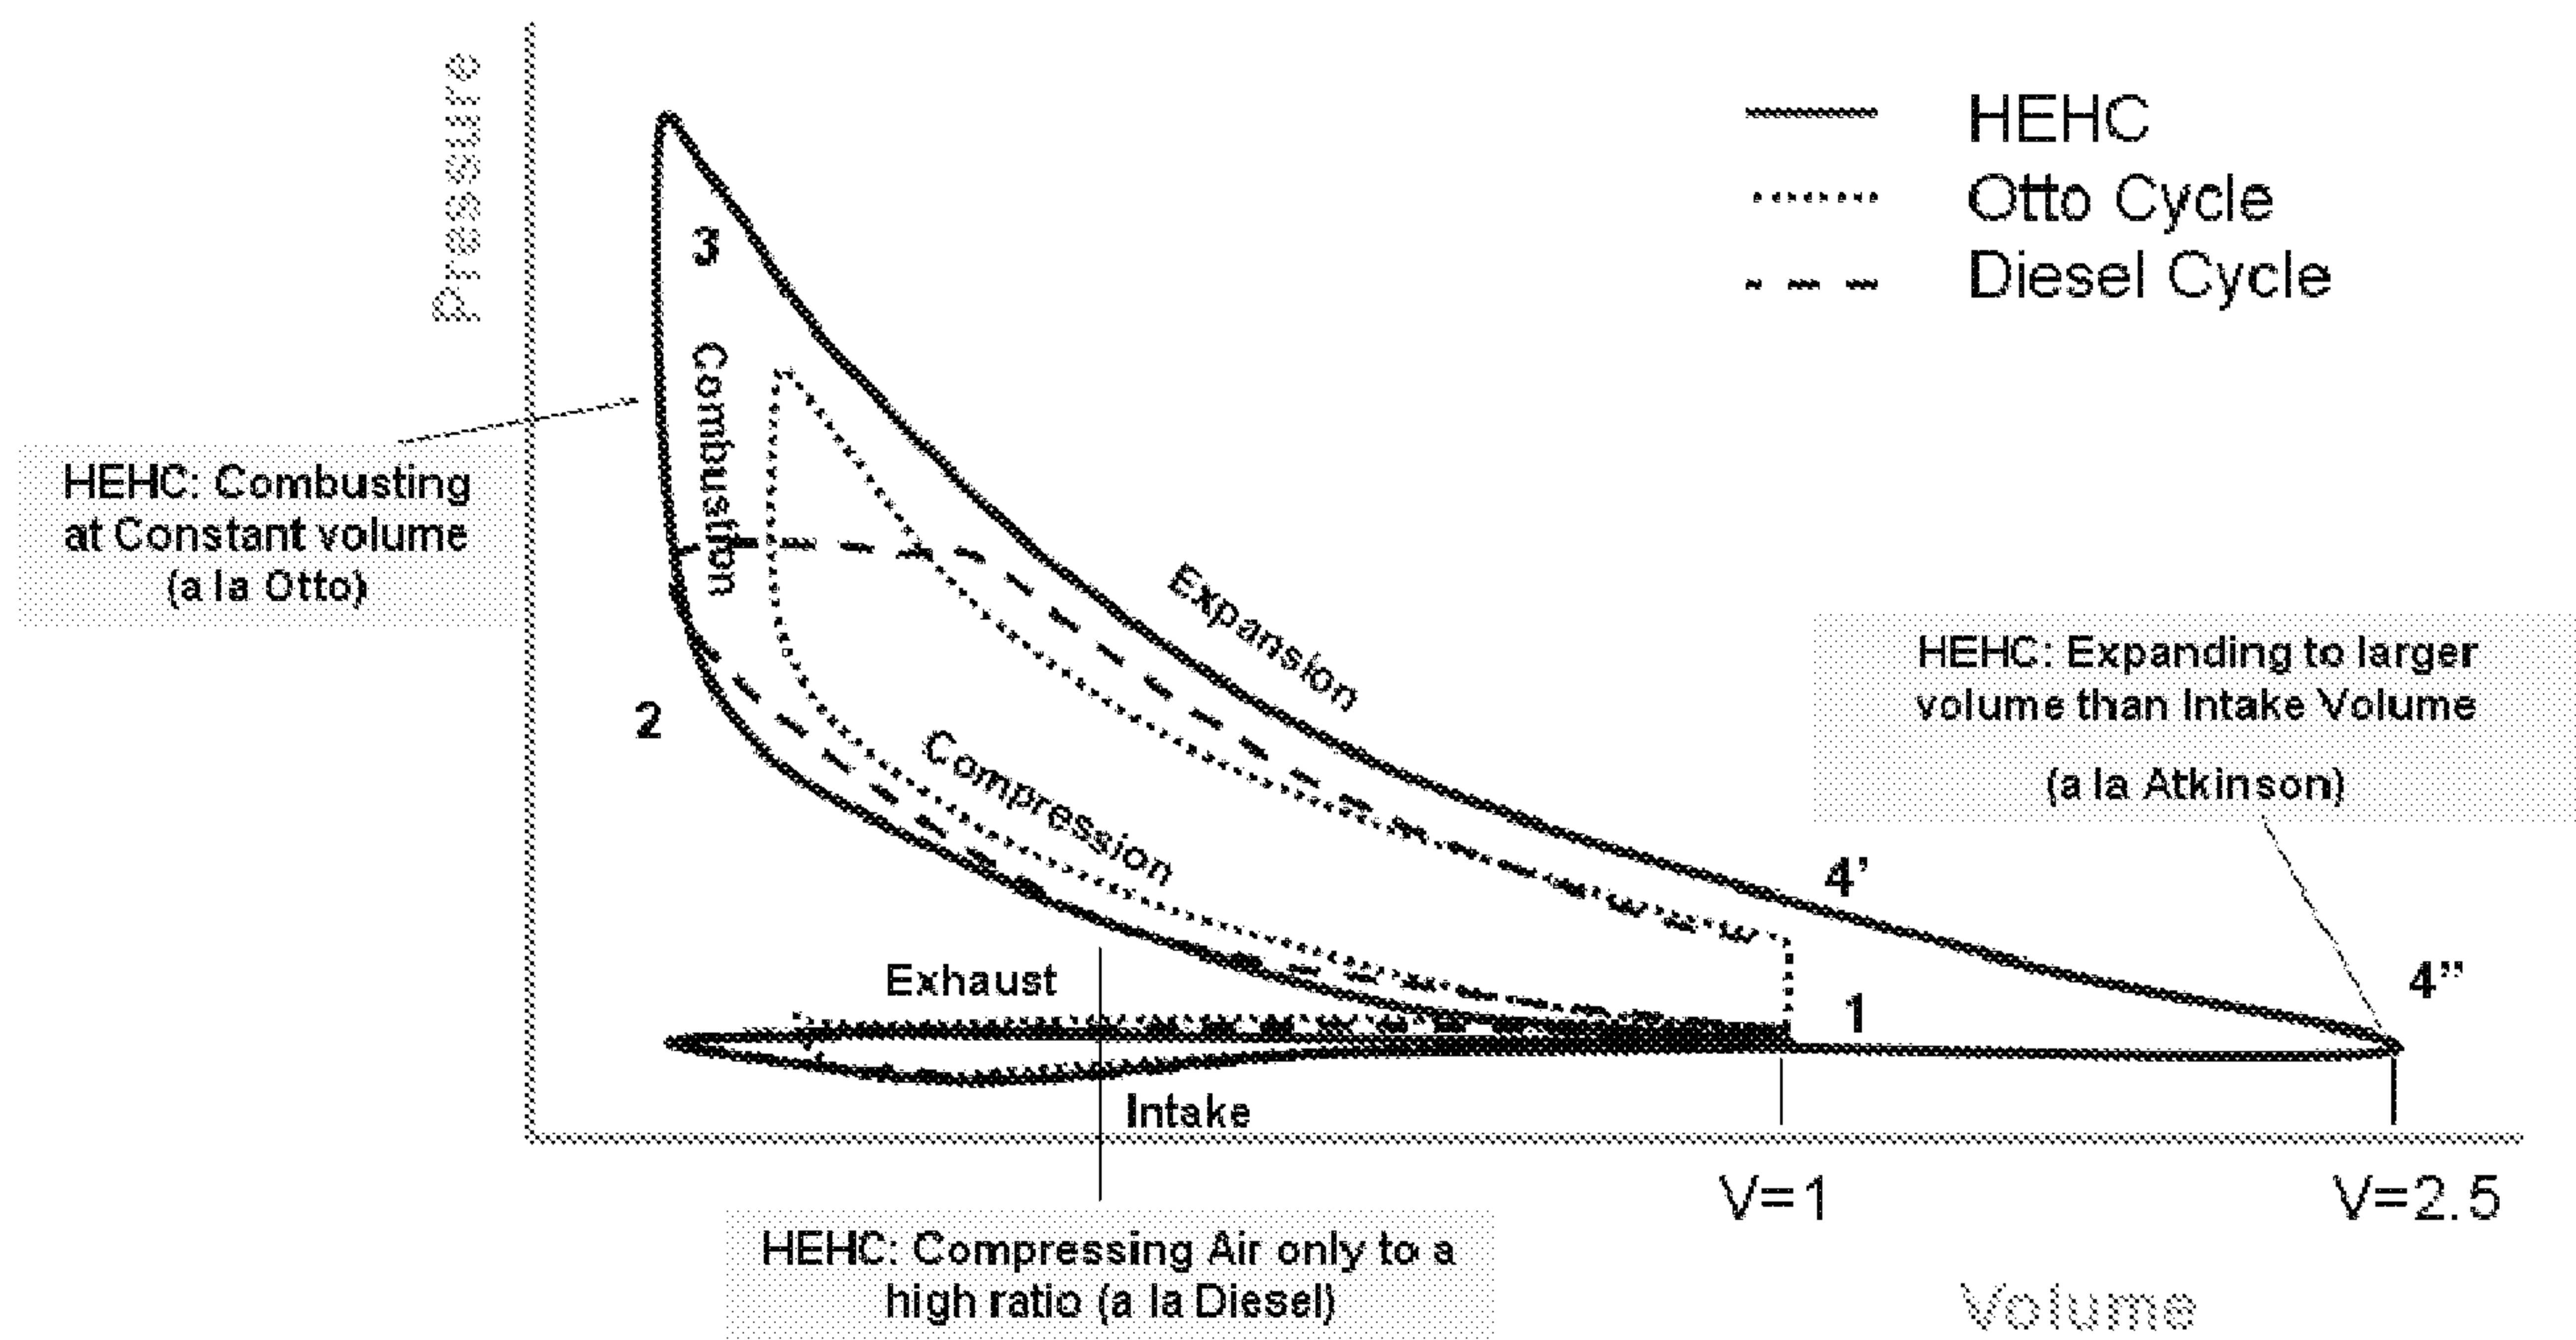


Fig. 28



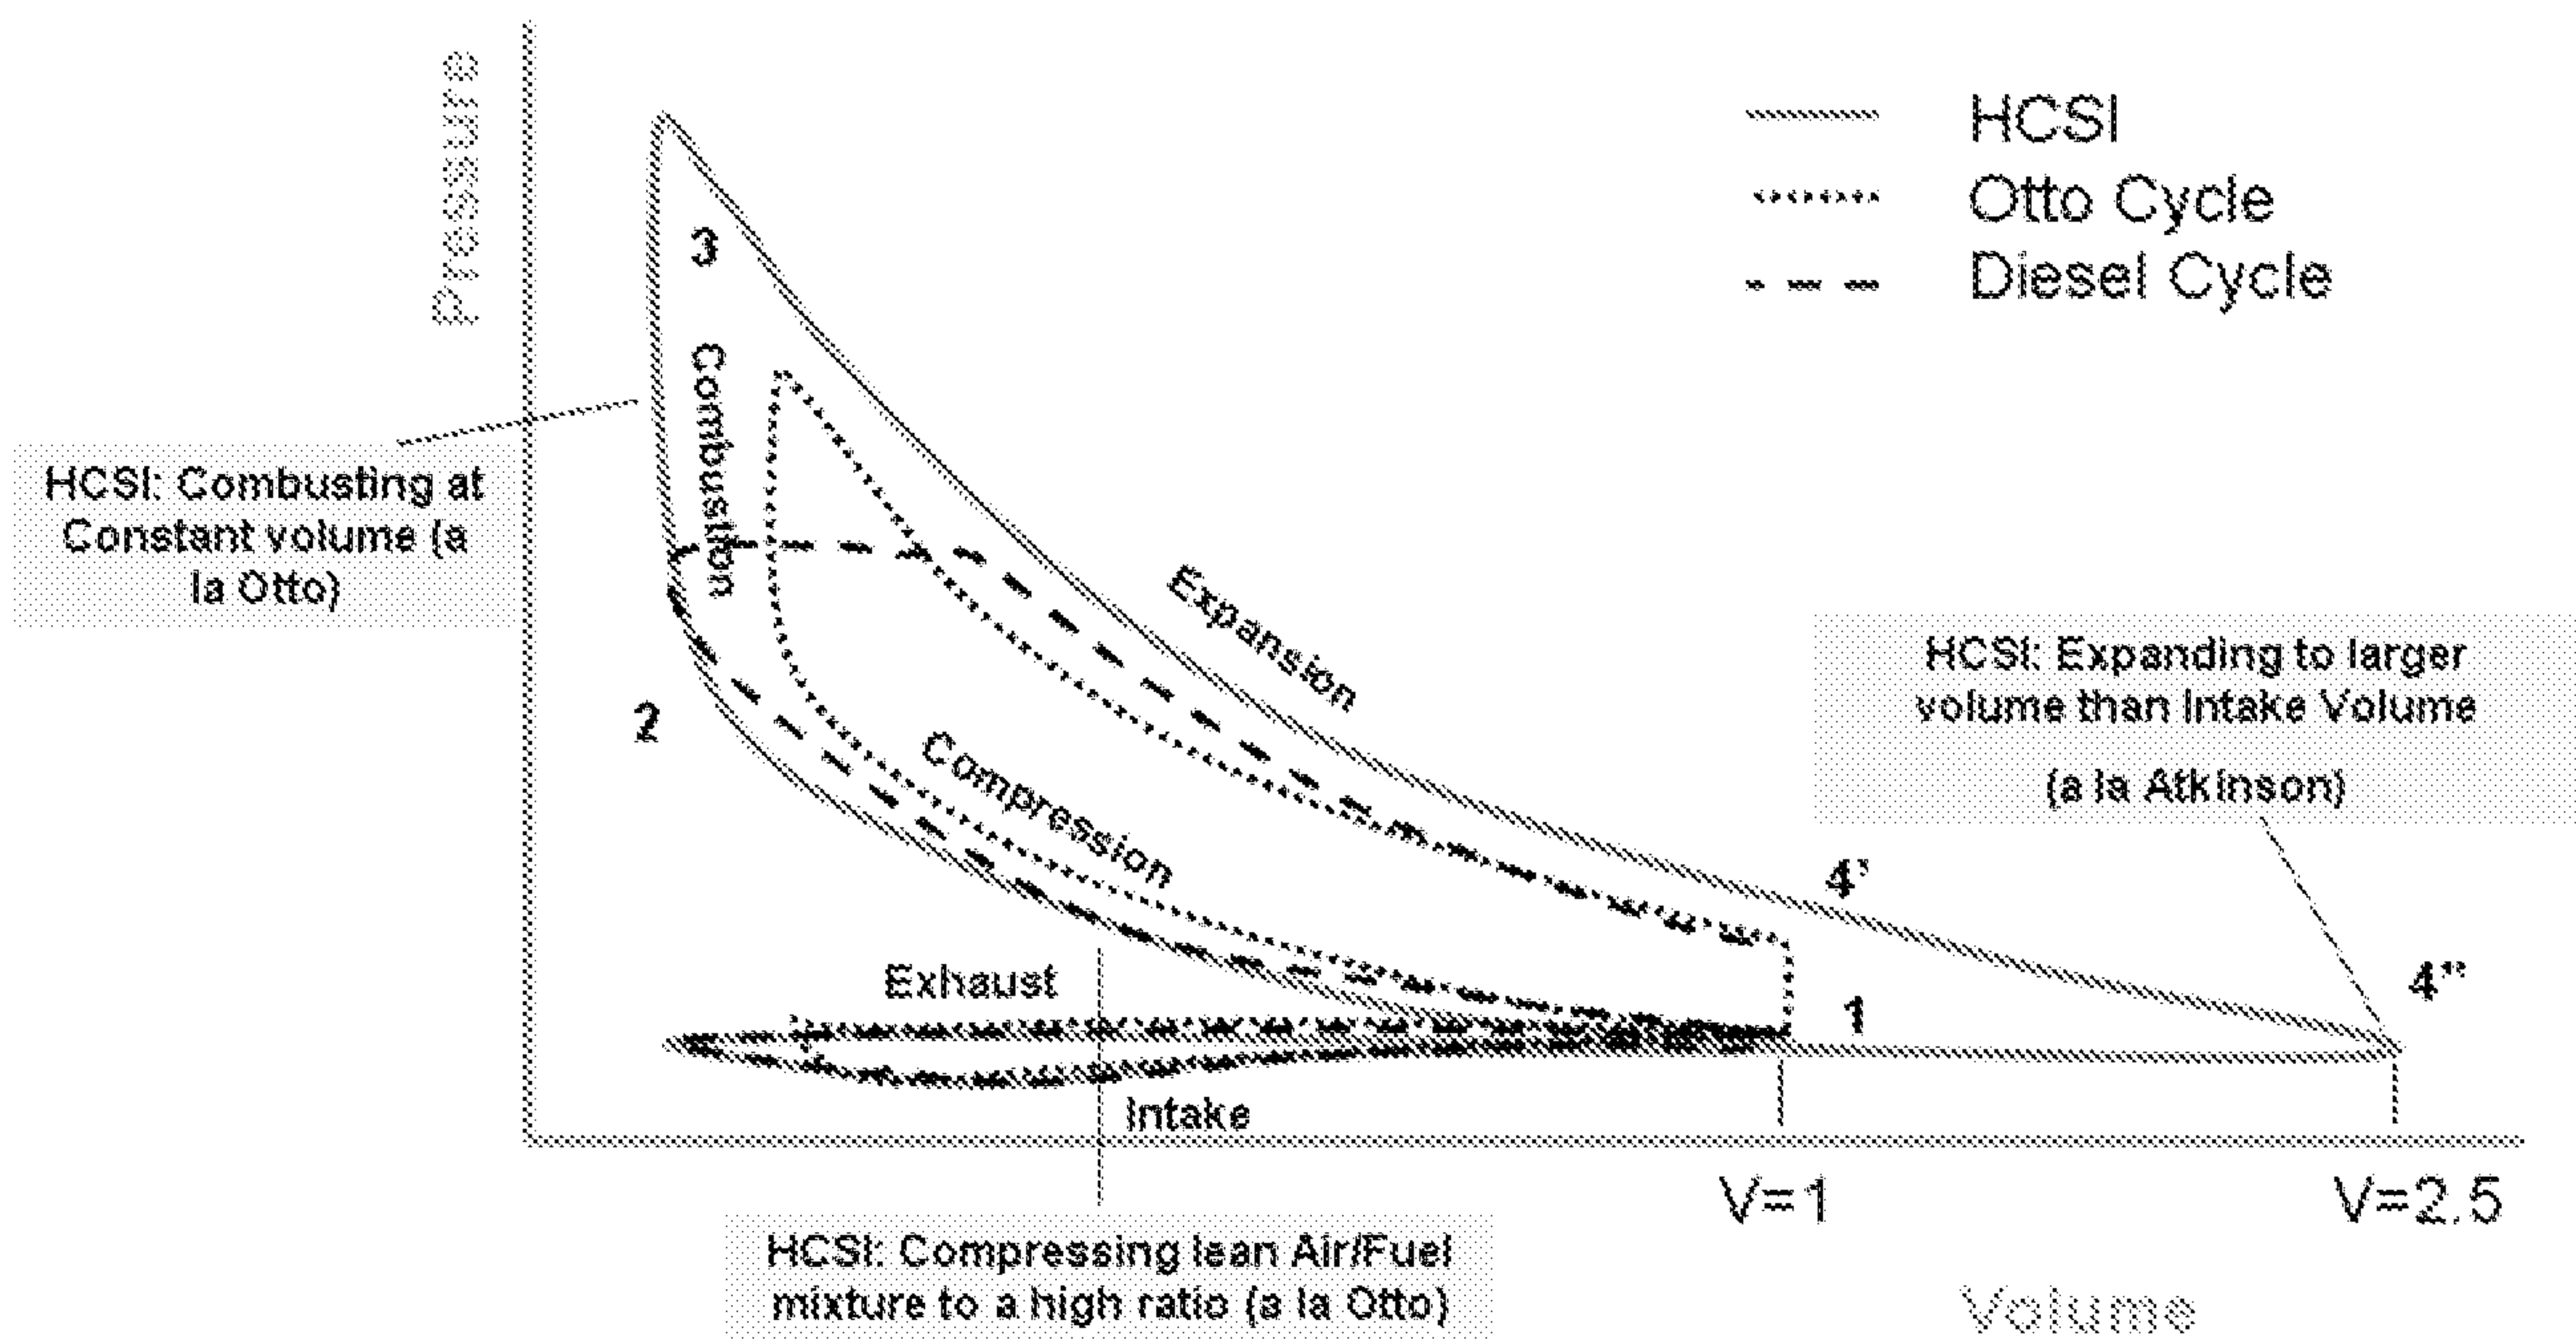


Fig. 29

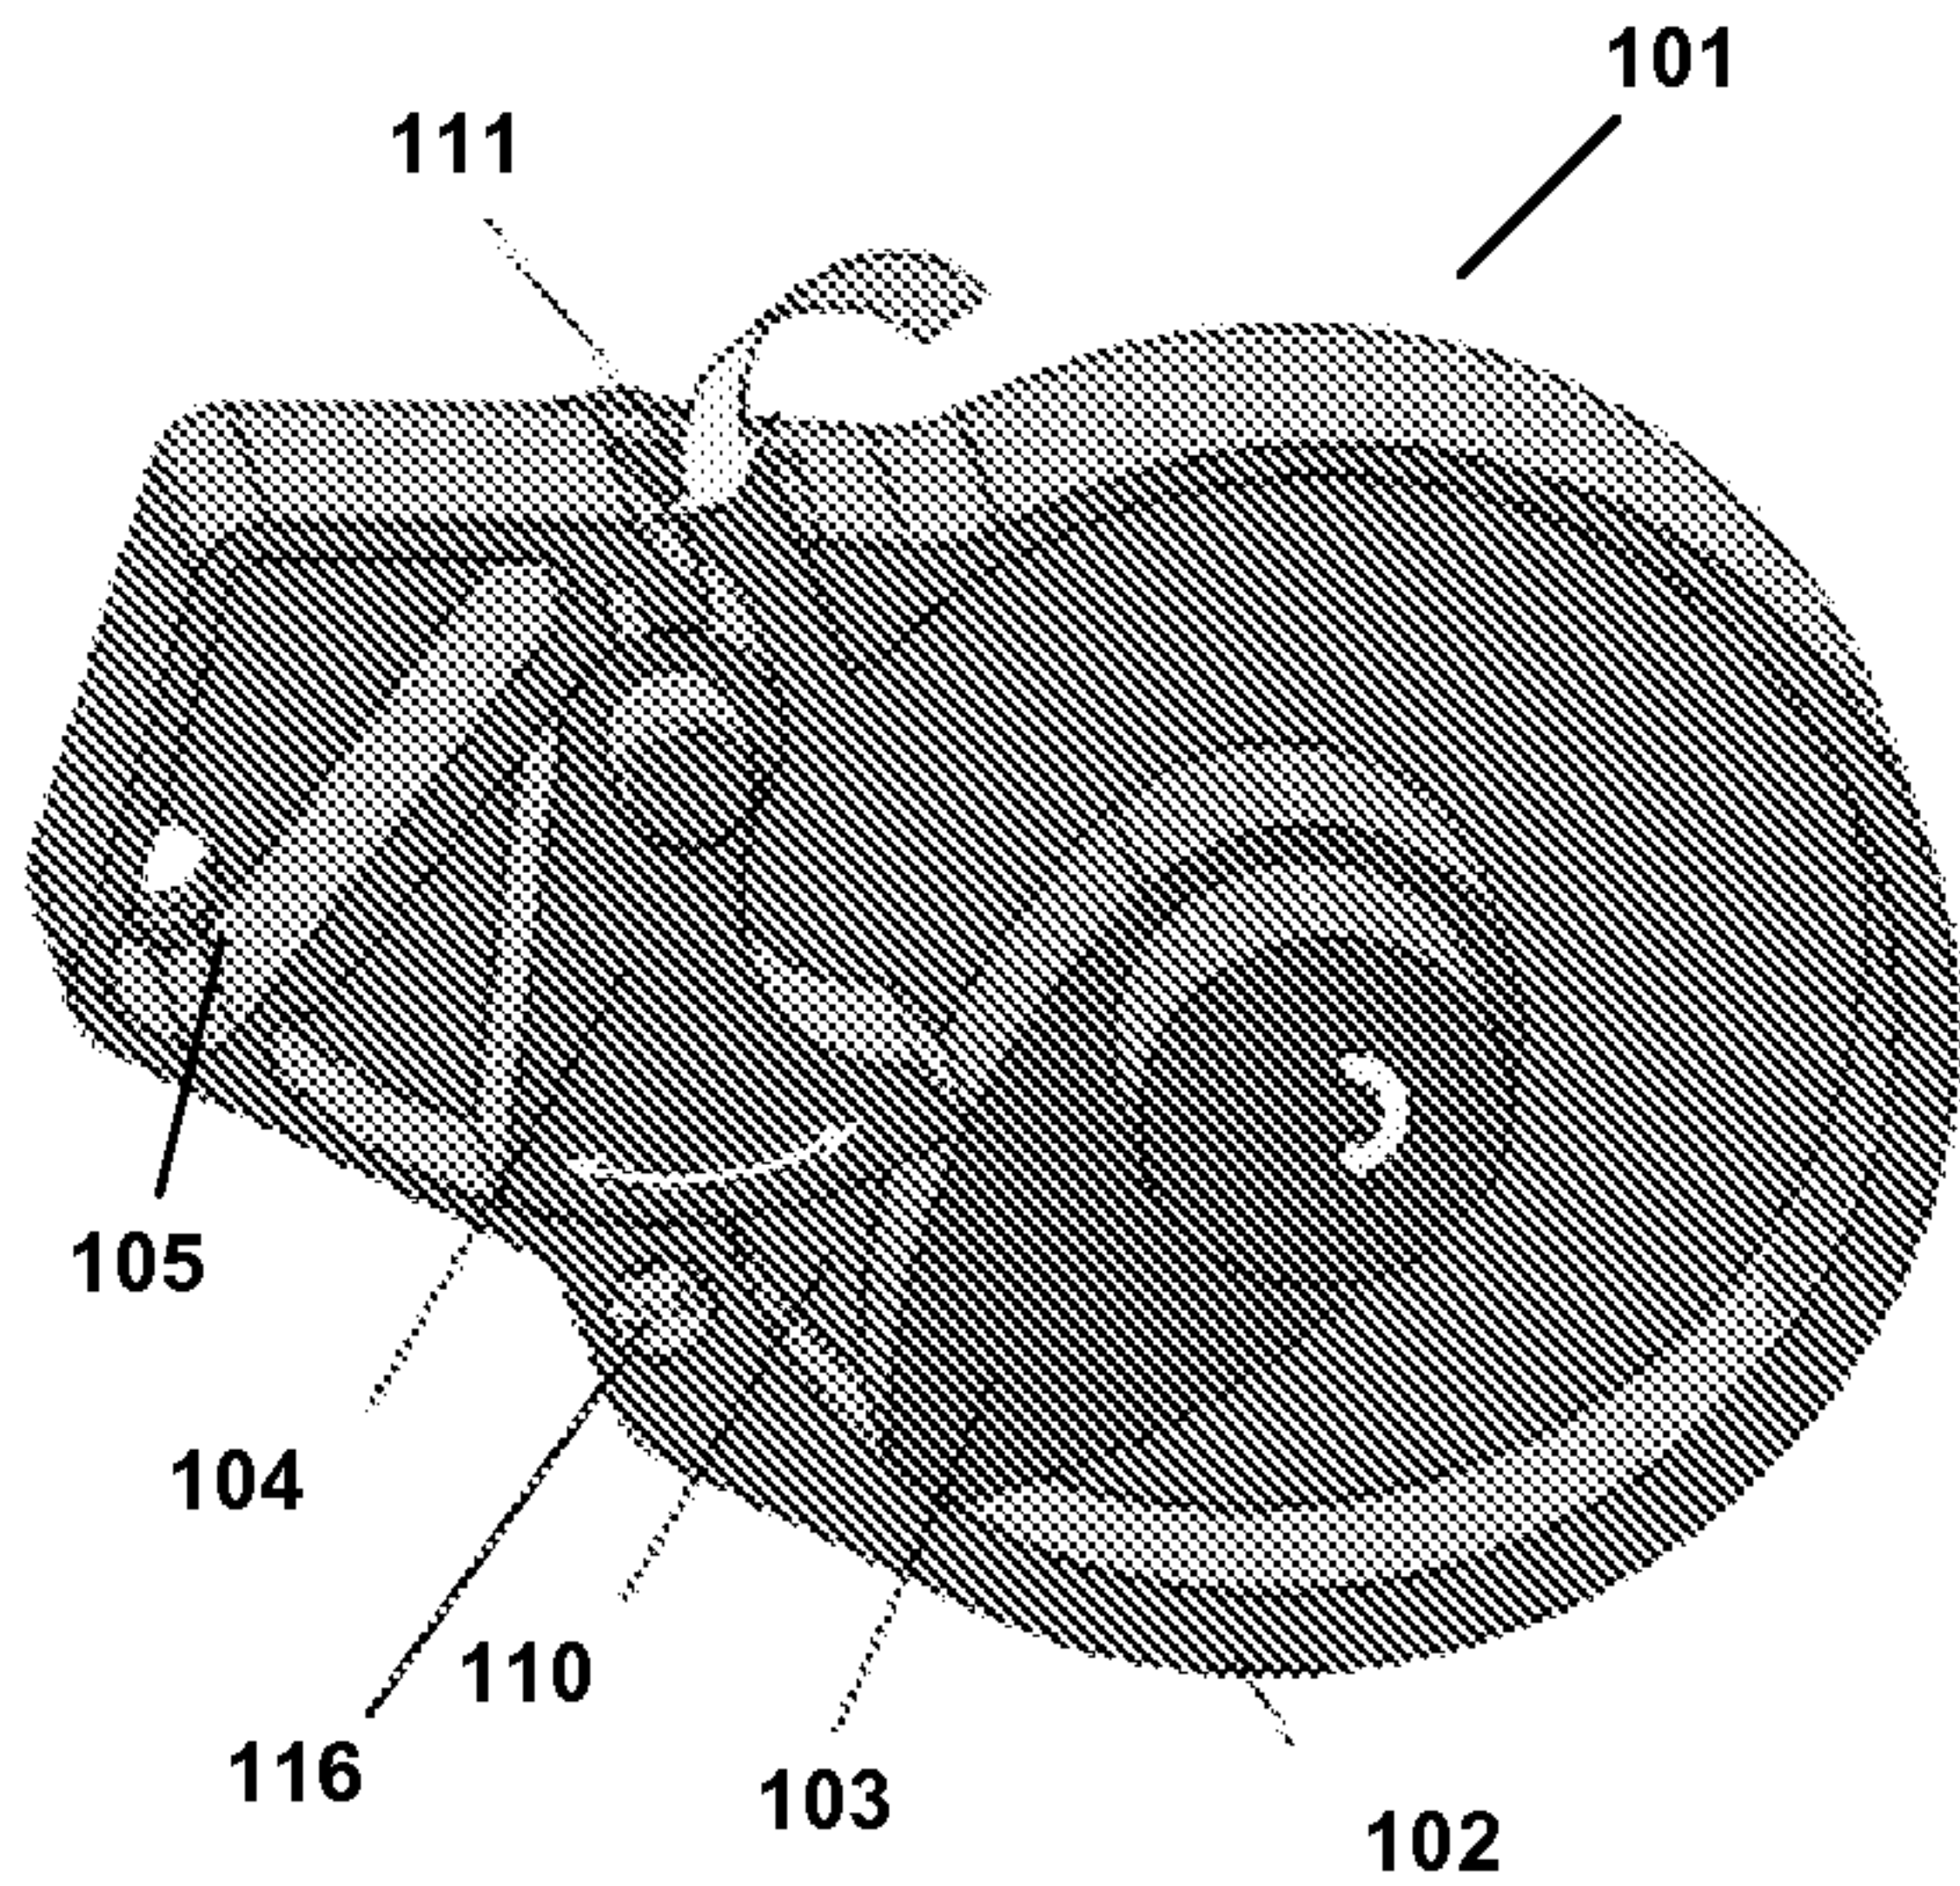

(A)

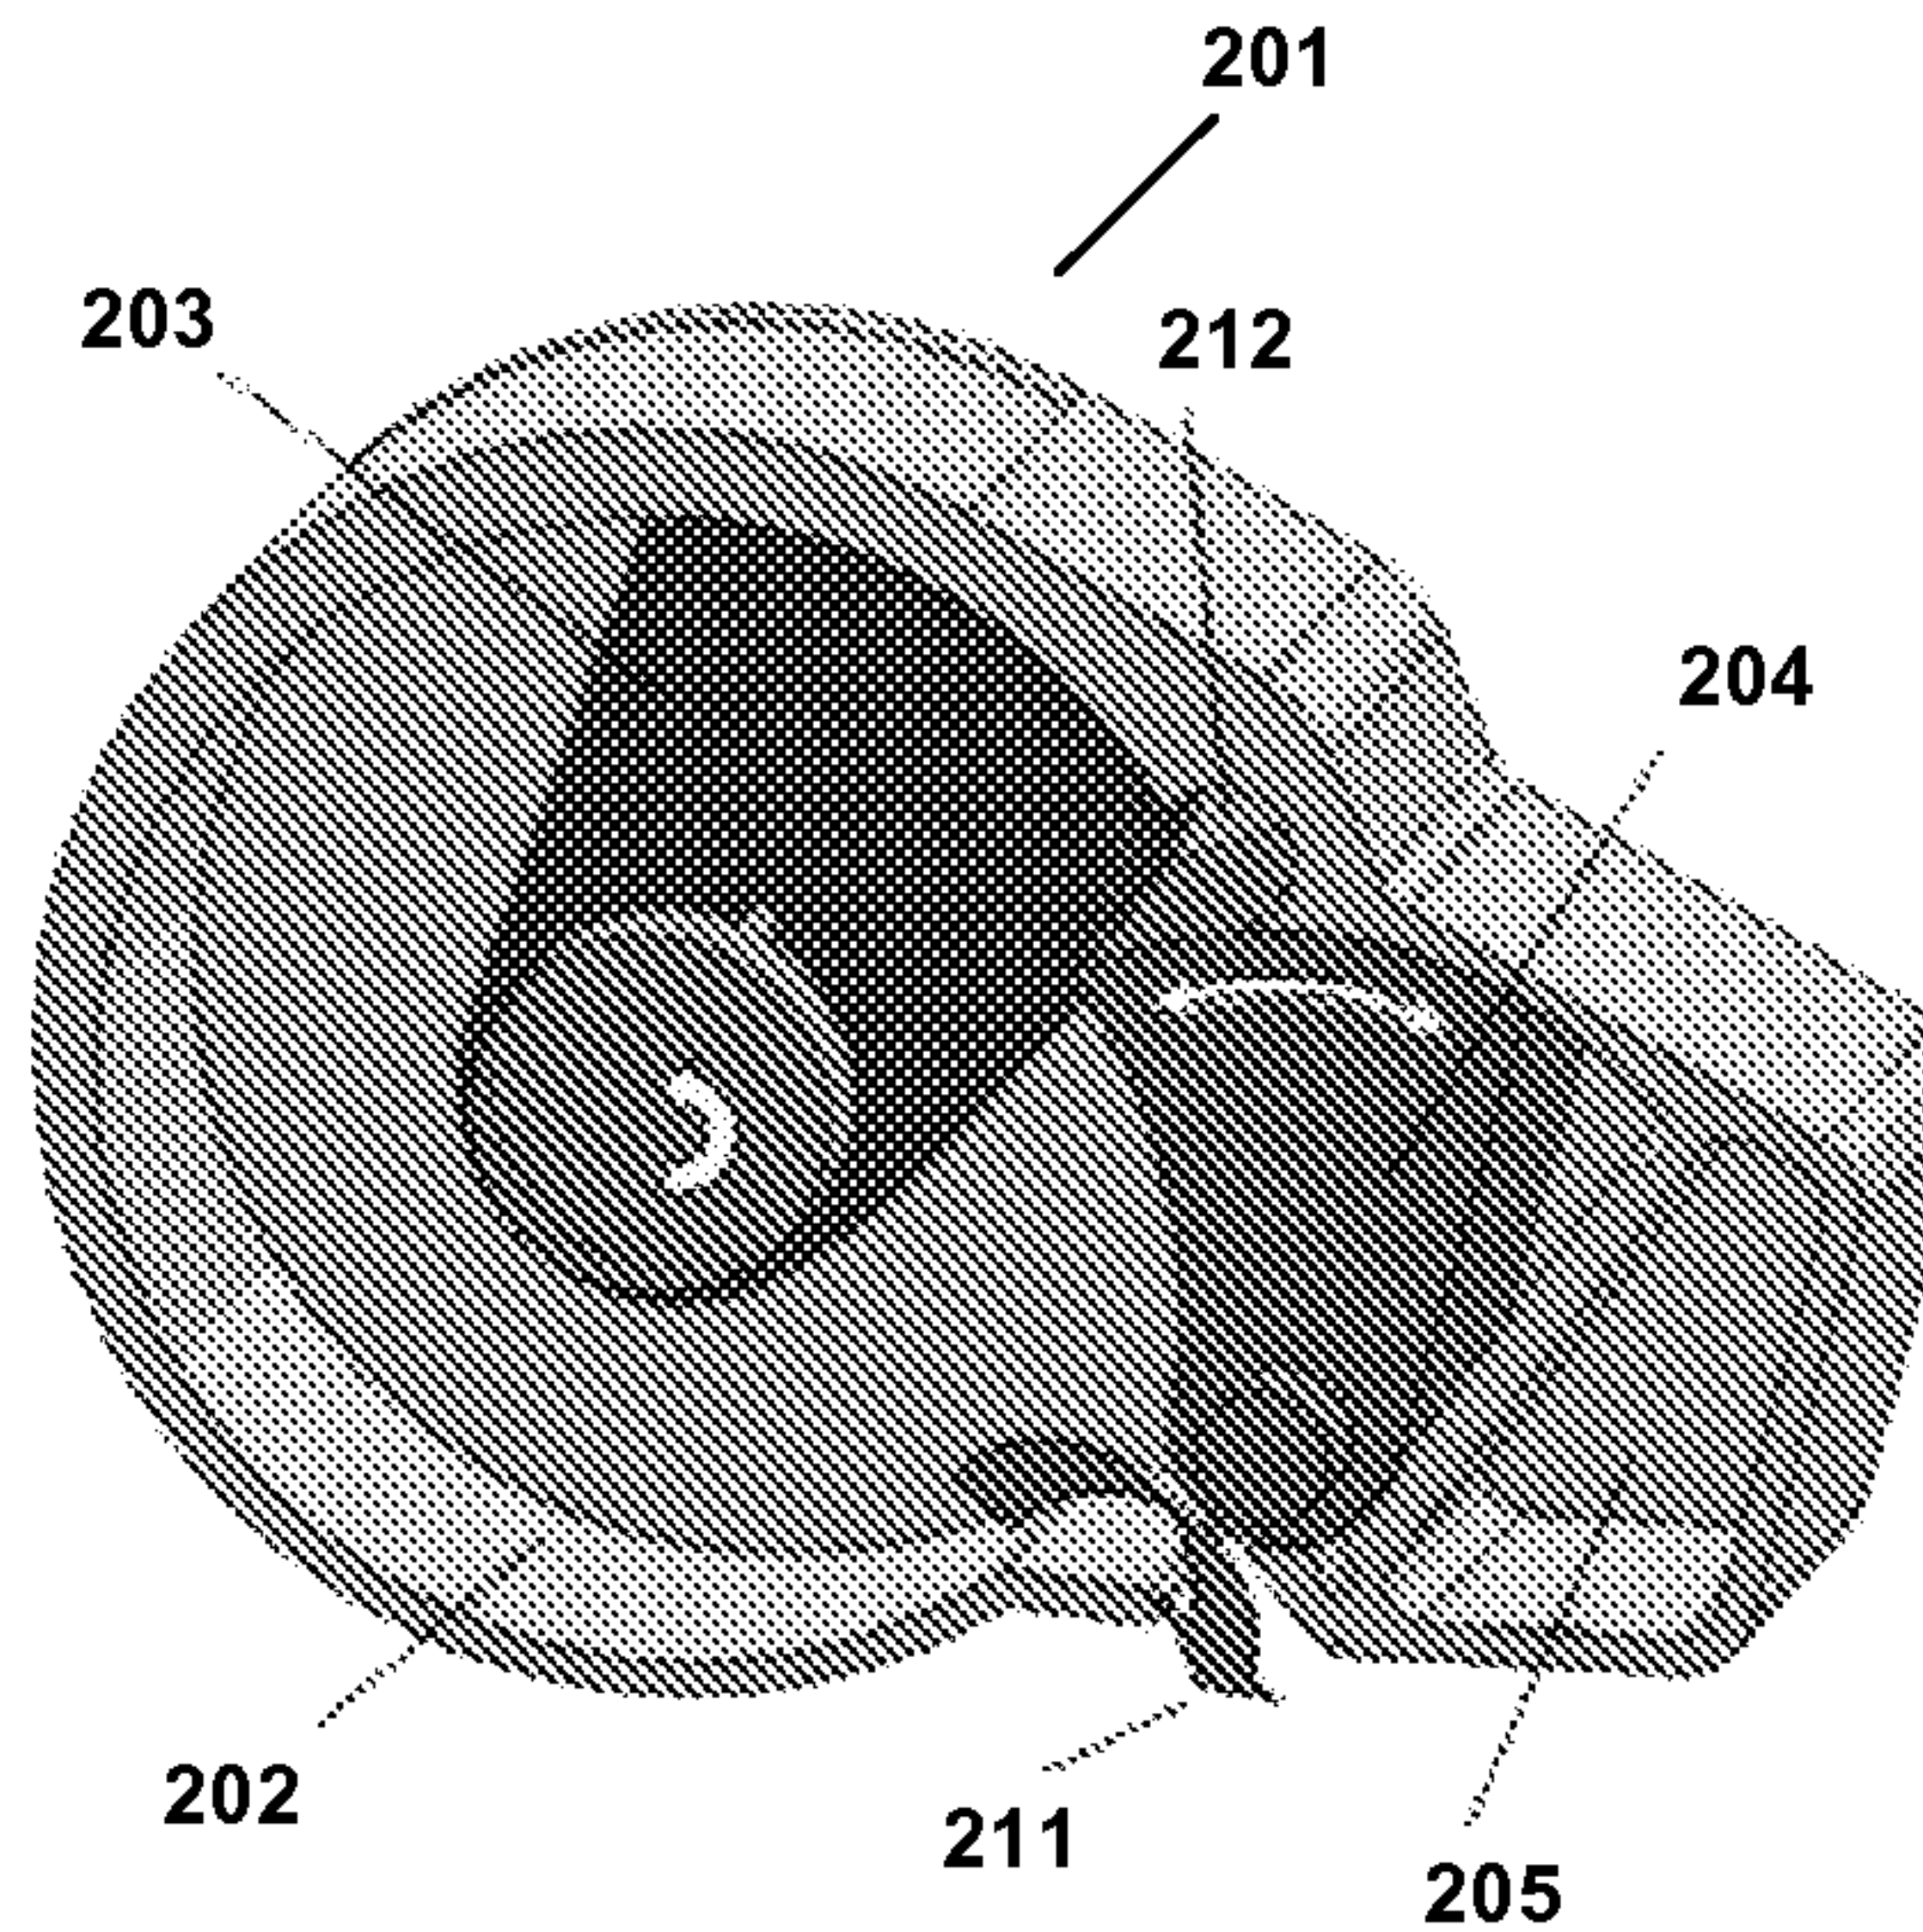

(B)