



US 20180168115A1

(19) **United States**(12) **Patent Application Publication**  
**WEINBERG et al.**(10) **Pub. No.: US 2018/0168115 A1**(43) **Pub. Date: Jun. 21, 2018**(54) **STUMP CUTTER DISC WITH RECESSED  
TOOTH POCKETS**(52) **U.S. Cl.**CPC ..... **A01G 23/067** (2013.01)(71) Applicant: **VERMEER MANUFACTURING  
COMPANY, PELLA, IA (US)**

(57)

**ABSTRACT**(72) Inventors: **CLINT WEINBERG, PELLA, IA  
(US); LOUIS C. HARTKE, OTLEY,  
IA (US)**

One stump cutter cutting wheel disclosed herein includes a wheel structure having left and right sides and being rotatable about a central axis extending between the left and right sides. The left and right sides define receptacles having depths measured in an orientation extending along the axis. Cutter assemblies are mounted to the wheel structure and include cutters mounted to cutter holders. The cutter holders include base portions that fit within the receptacles, and the base portions each define at least one fastener opening. The base portions further define base thicknesses measured in the orientation extending along the axis. The receptacle depths are at least 0.25 times as large as the base thicknesses such that no more than 75 percent of the base thicknesses extend laterally outside the receptacles. Fasteners secure the cutter holders to the wheel structure and extend through the fastener openings defined by the base portions.


(21) Appl. No.: **15/895,592**(22) Filed: **Feb. 13, 2018****Related U.S. Application Data**


(63) Continuation of application No. 14/147,277, filed on Jan. 3, 2014, now Pat. No. 9,894,848.

(60) Provisional application No. 61/751,705, filed on Jan. 11, 2013.

**Publication Classification**(51) **Int. Cl.****A01G 23/06**

(2006.01)

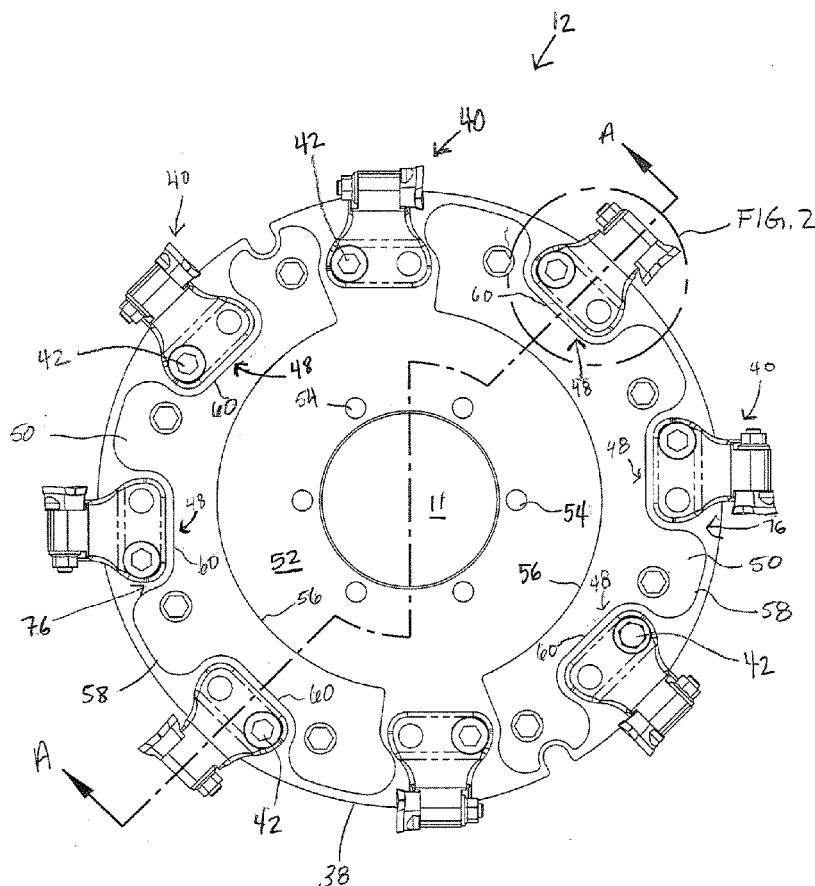

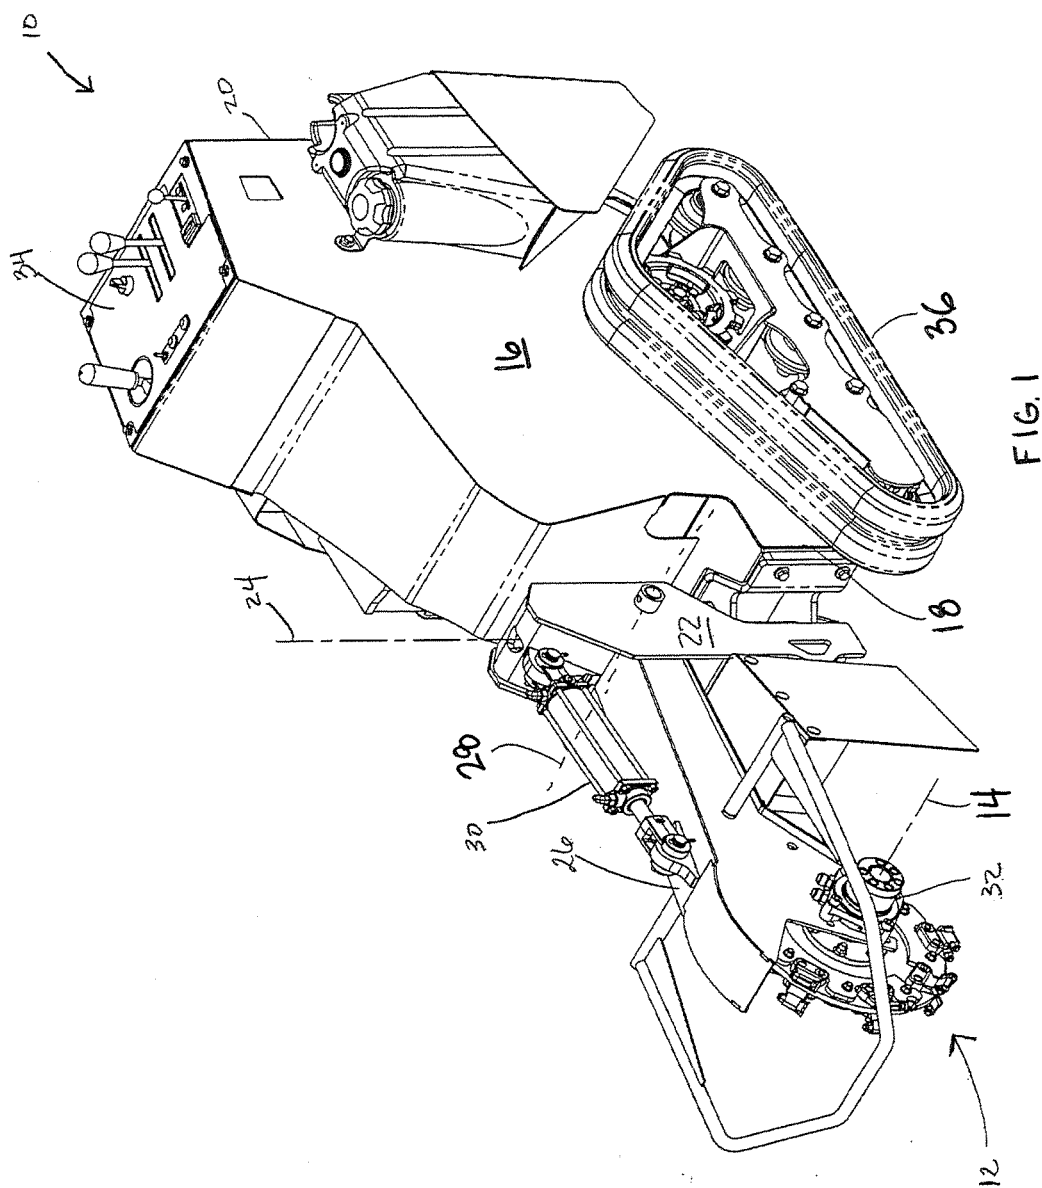

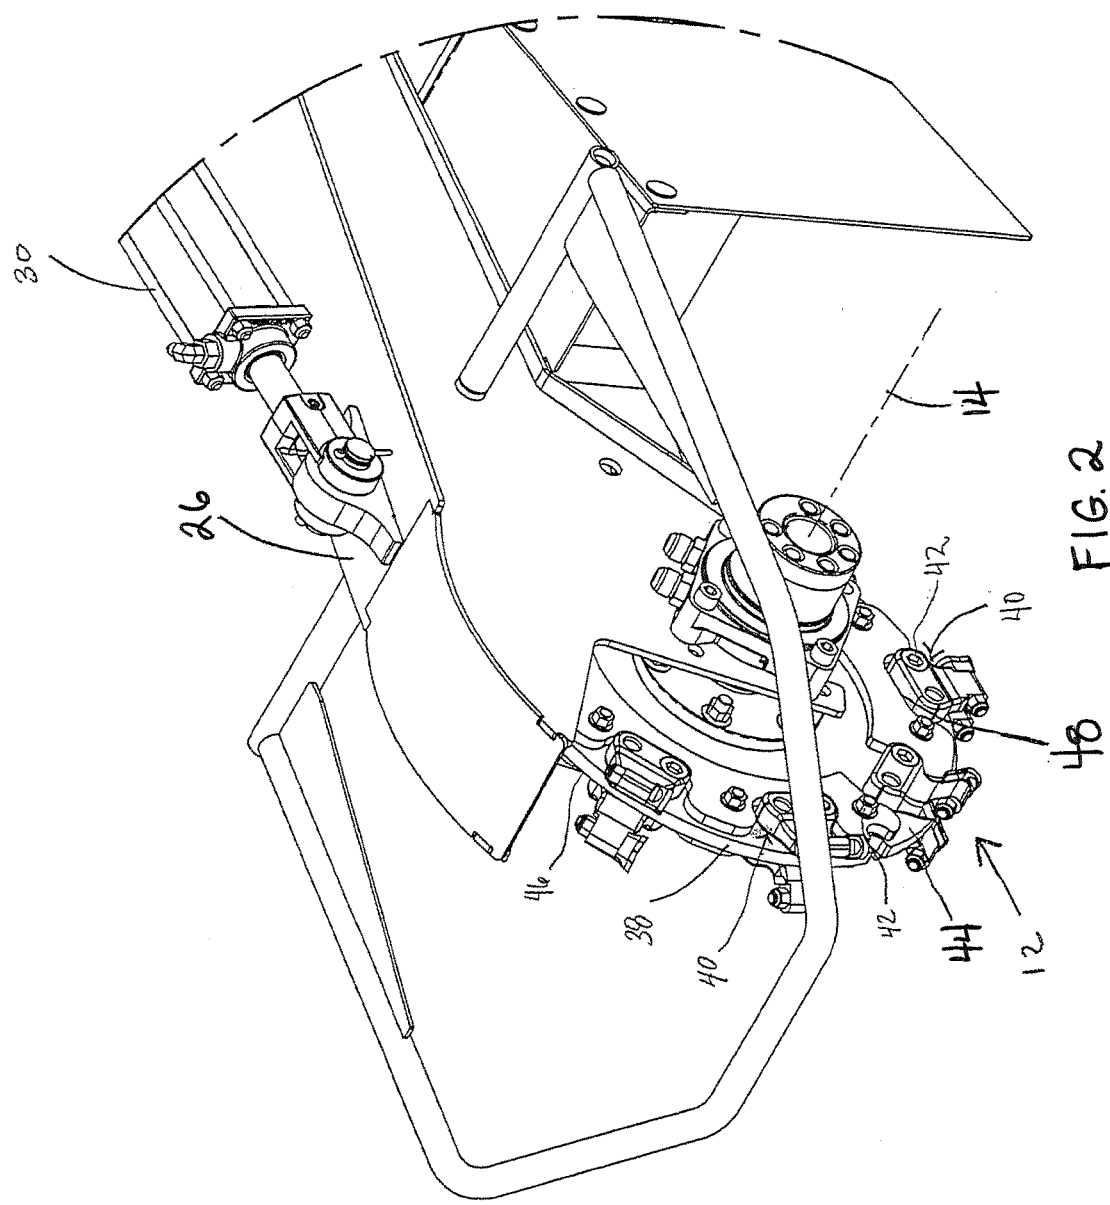
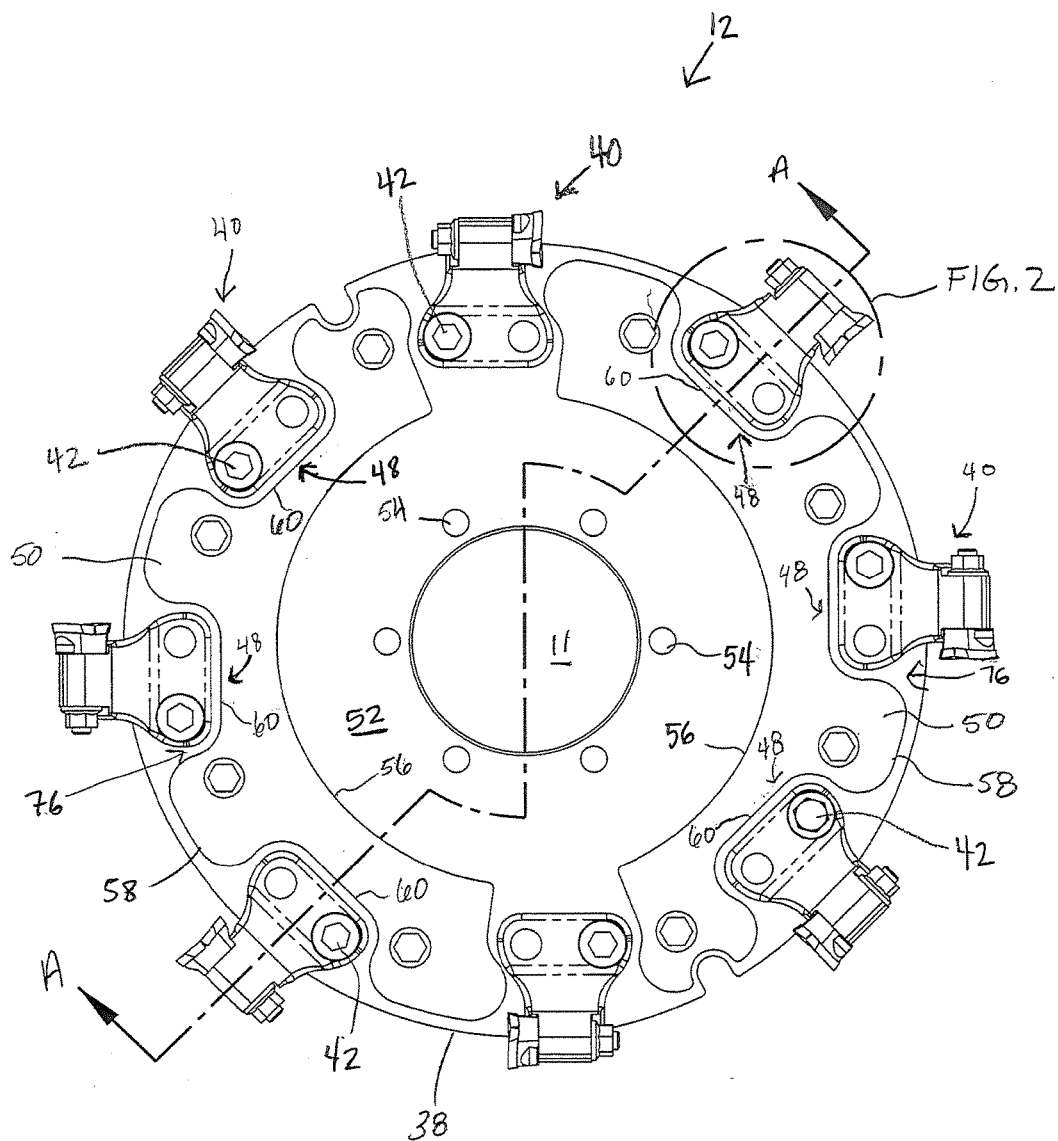


FIG. 3



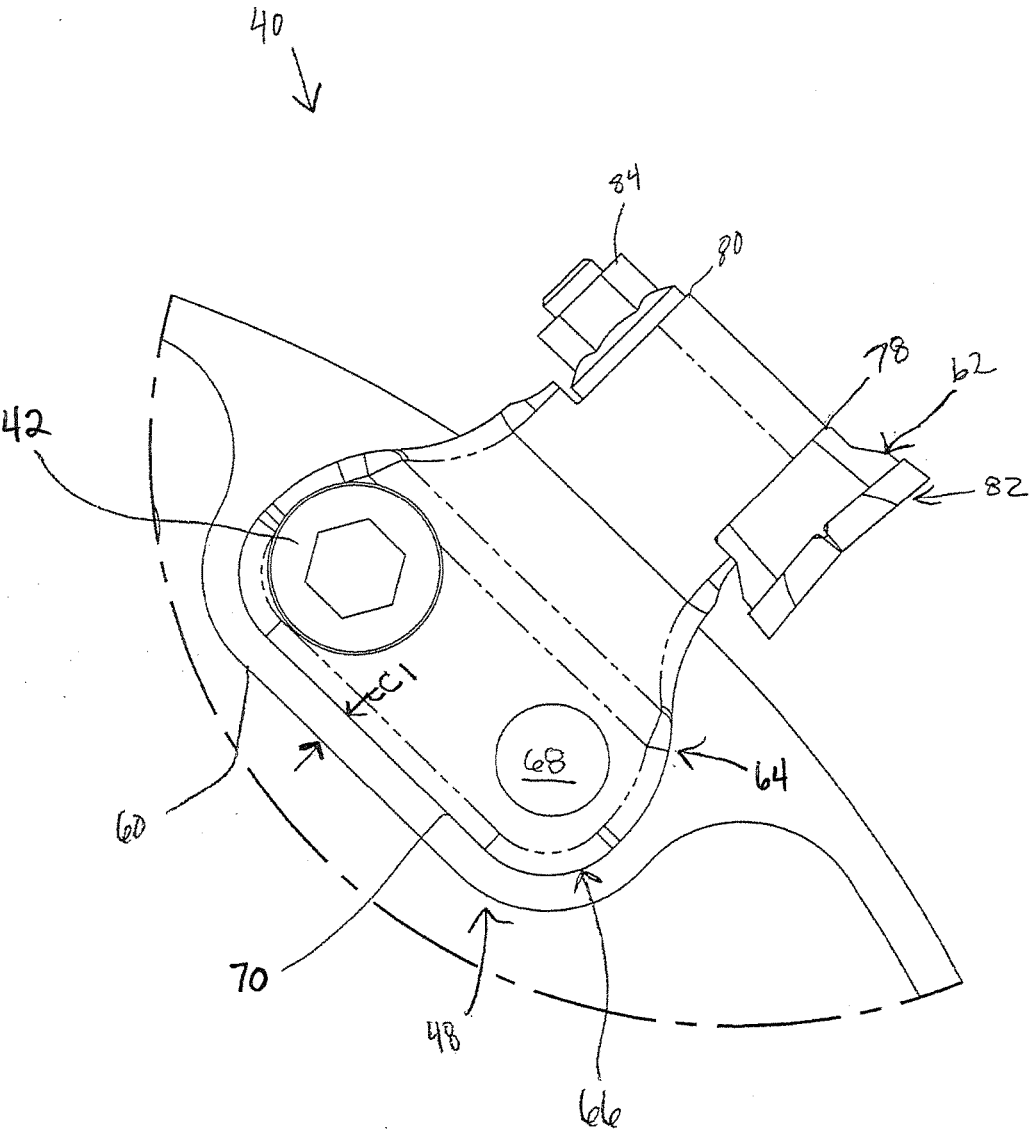


FIG. 4

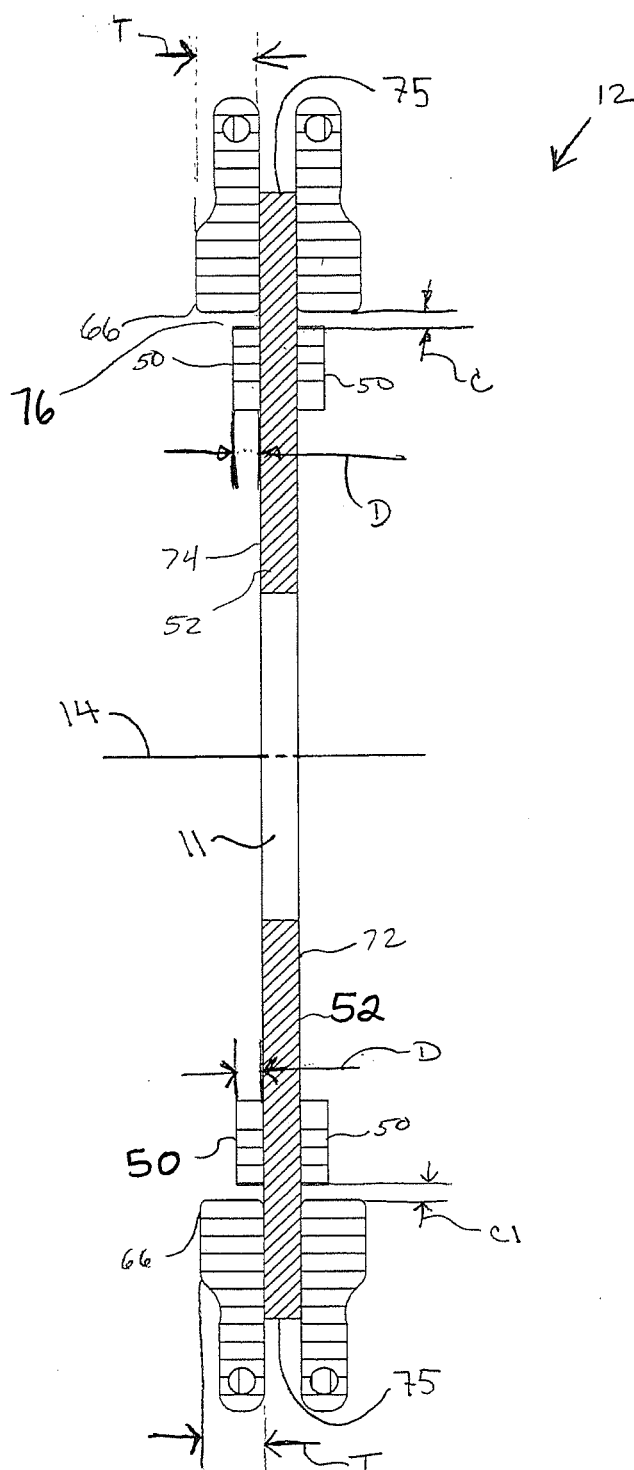


FIG. 5

## STUMP CUTTER DISC WITH RECESSED TOOTH POCKETS

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of, and claims priority to, U.S. patent application Ser. No. 14/147,277, filed Jan. 3, 2014, which claims priority to U.S. Provisional Application 61/751,705 filed Jan. 11, 2013.

### BACKGROUND

[0002] The present disclosure relates generally to material reduction machines that are adapted to be used to remove such items as tree stumps. Various methods and machines for removing or reducing the size of stumps are known. Examples of stump reduction machines are disclosed in U.S. Pat. No. 6,014,996 titled Control System for Stump Cutters assigned to Vermeer; U.S. Pat. No. 7,011,124 titled Stump Grinder Having Automatic Reversing Feed Assembly assigned to Tramo; U.S. Pat. No. 6,026,781 titled Stump Cutter Safety System assigned to Rayco; and U.S. Pat. No. 6,230,770 titled Stump Chipper and Method for the Operation Thereof assigned to Vermeer-Holland.

### SUMMARY

[0003] In one embodiment of the current invention, a stump cutter cutting wheel includes a wheel structure having a left side and a right side. The wheel structure can be rotatable about a central axis that extends through the wheel structure between the left and right sides. The left and right sides of the wheel structure define multiple receptacles that have receptacle depths measured in an orientation that extends along the central axis. Multiple cutter assemblies can be mounted to the wheel structure. The cutter assemblies include cutters mounted to cutter holders. The cutter holders include base portions that fit within the receptacles and the base portions each define at least one fastener opening. The base portions define base thicknesses measured in the orientation that extend along the central axis. The receptacle depths can be at least 0.25 times as large as the base thicknesses such that no more than 75 percent of the base thicknesses extend laterally outside of the receptacles. The stump cutter cutting wheel includes fasteners for securing the cutter holders to the wheel structure. The fasteners extend through the fastener openings defined by the base portions of the cutter holders.

[0004] Another aspect of the disclosure includes a stump cutter cutting wheel including a main wheel that has a left side and a right side. The main wheel can be rotatable about a central axis that extends through the main wheel between the left and right surfaces. Guard structures can be mounted to the left and right surfaces of the main wheel. The guard structures are formed by plates fastened to the main wheel. The plates define openings that define receptacles and the receptacles have inner and outer ends. The receptacles have depths that extend from the inner ends to the outer ends of the receptacles. The depths can be measured in an orientation that extends along the central axis of the main wheel. The inner ends are closed by the left and right surfaces of the main wheel and outer ends being open. The stump cutter cutting wheel includes multiple cutter assemblies including cutters mounted to cutter holders. The cutter holders include base portions that fit within the receptacles and the base

portions each define at least one fastener opening. The stump cutter cutting wheel includes fasteners for securing the cutter holders to the main wheel. The fasteners extend through the fastener openings defined by the base portions of the cutter holders and engage the main wheel.

[0005] A further aspect of the disclosure includes a stump cutter cutting wheel including a wheel structure that has a left side and a right side. The wheel structure can be rotatable about a central axis that extends through the wheel structure between the left and right sides. The left and right sides of the wheel structure define multiple receptacles that have receptacle depths measured in an orientation that extends along the central axis. The stump cutter cutting wheel includes multiple cutter assemblies mounted to the wheel structure. The cutter assemblies include cutters mounted to cutter holders and the cutter holders include base portions that fit within the receptacles. The base portions each define at least one fastener opening. The stump cutter cutting wheel includes fasteners for securing the cutter holders to the wheel structure. The fasteners extend through the fastener openings defined by the base portions of the cutter holders. The receptacles define receptacle outlines and the base portions define base portion outlines. A majority of each receptacle outline has a clearance of at least 0.2 inches with respect to the base portion outline of a corresponding one of the base portions.

[0006] Another aspect of the disclosure relates to a design that reduces the amount of debris thrown from the wheel structure while cutting assemblies cut and grind, for example, a tree stump.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is perspective view of a self-propelled stump cutter incorporating a stump cutter cutting wheel in accordance with the principles of the present disclosure;

[0008] FIG. 2 is an enlarged view of the portion of the self-propelled stump cutter and stump cutter cutting wheel shown in FIG. 1;

[0009] FIG. 3 is a side perspective view of the stump cutter cutting wheel shown in FIG. 1;

[0010] FIG. 4 is an enlarged view of a cutter assembly shown in FIG. 3; and

[0011] FIG. 5 is across-sectional view of the stump cutter cutting wheel shown in FIG. 3 taken along line A-A.

### DETAILED DESCRIPTION

[0012] An exemplary embodiment will be described in detail with reference to the drawings, wherein like reference numerals represent like parts and assemblies throughout the several views. Reference to the embodiment does not limit the scope of the claims attached hereto. Additionally, any examples set forth in this specification are not intended to be limiting and merely set forth some of the many possible embodiments for the inventive aspect disclosed herein.

[0013] The present disclosure relates generally to a stump cutter for improved operation below ground where tooth mount pockets are mounted such that they are recessed into the stump cutter disc. In one example, the pockets are mounted so that they are recessed into the stump cutter disc such that the outer surface of the pocket is approximately co-planar with the outside surface of the stump cutter disc. The stump cutter reduces drag on the stump cutter wheel when it is submerged, either in the ground or in chips of

wood. The stump cutter also reduces the tendency for the stump cutter wheel to throw material.

[0014] FIG. 1 illustrates perspective view of a self-propelled (i.e. walk-behind) stump cutter 10 having a stump cutter cutting wheel 12 on the front thereof which rotates about a substantially horizontal axis 14 as it sweeps in contact with, for example, a tree stump. The stump cutter 10 includes a chassis 16 (i.e., a mainframe) including a first end 18 and a second end 20. A sub frame 22 attaches to the chassis 16 at a swing axis 24. The sub frame 22 sweeps or pivots along swing axis 24, which is substantially vertical, toward a stump to be grounded. The stump cutter 10 includes a boom 26 that attaches to the sub frame 22 at pivot axis 28. A lift cylinder 30 pivotally connected to the sub frame 22 enable the boom 26 to pivot relative to the chassis 16 about a pivot axis 28. The lift cylinder 30 can be a hydraulic cylinder arranged to raise and lower the boom 26. A drive motor 32 is located on a side of the boom 26 to drive the stump cutter cutting wheel 12. The stump cutter 10 includes a control panel 34 mounted to the chassis 16 such that it can be positioned at the second end 20 of the chassis 16. The stump cutter 10 includes a propulsion structure 36 (i.e. wheel, rubber track, steel track etc.) that can be mounted on the chassis 16 to move the stump cutter 10 across a floor or ground.

[0015] FIG. 2 illustrates an enlarged portion of FIG. 1 showing the stump cutter cutting wheel 12. The stump cutter cutting wheel 12 includes a wheel structure 38, multiple cutter assemblies 40, and fasteners 42. The wheel structure 38 has a left side 44 and a right side 46 and may be rotated about the horizontal axis 14 that extends through the wheel structure 38 between the left and right sides 44, 46. The left and right sides 44, 46 of the wheel structure 38 define multiple receiving areas (or “receptacles”) 48. The receptacles 48 may have a measured depth in an orientation that extends along the horizontal axis 14. The wheel structure 38 includes multiple cutter assemblies 40 that are mounted and secured thereon using the fasteners 42. The cutter assemblies 40 are illustrated and described in more detail with reference to FIGS. 3-5.

[0016] FIGS. 3-5 illustrate features of the stump cutter cutting wheel 12.

[0017] FIG. 3 is a side view of the stump cutter cutting wheel 12. In this example, the stump cutter cutting wheel 12 includes guard plates 50, a main wheel 52 and bolts 54 for attaching the stump cutter cutting wheel 12 to the drive motor 32. The cutting wheel 12 defines an opening 11 for receiving the drive motor 32 that is attached to the boom 26. It is to be understood that the features shown in FIG. 3 are also depicted on the opposite side of the stump cutter cutting wheel 12 such that both left and right 44, 46 of the wheel structure 38 are representative of each other. The left and right 44, 46 sides may each include at least two guard plates 50.

[0018] The guard plates 50 shown in FIG. 3 are fastened to the main wheel 52 with fasteners 42. In an example, the guard plates 50 may have a thickness of between about 0.5 to 0.25 inches. The guard plates 50 each have a first side 56 and a second side 58. The second sides 58 of the guard plates 50 define multiple receptacles 48 positioned around the periphery of the guard plates 50. The receptacles 48 define receptacle outlines 60. It is to be understood that the receptacle outlines 60 may be configured in various shapes.

[0019] FIG. 4 is an enlarged view of a portion of FIG. 3 depicting the cutter assemblies 40. The cutter assemblies 40 include cutters 62 that are configured to mount to cutter holders 64. The cutter holders 64 include base portions 66 that fit within the receptacles 48. The base portions 66 define at least one opening 68 for receiving the fastener 42. The guard plates 50 are mounted to the stump cutter cutting wheel structure 38 such that the cutter holders 64 are recessed into the stump cutter cutting wheel 12. In this example, the design of the guard plates 40 help to eliminate the amount of debris that is thrown from the stump cutter cutting wheel 12.

[0020] Turning to FIG. 5, a cross-sectional view is shown of the stump cutter cutting wheel 12. The base portions 66 define a base thickness T that can be measured in the orientation that extends along the horizontal axis 14. In an example, the base thickness T can be between 1.0 and 0.5 inches. In this example, the receptacles 48 may have a depth D of at least 0.25 times as large as the base thickness such that no more than 75 percent of base thickness extends laterally outside of the receptacles 48. In other embodiments, the receptacle depth may be at least 0.30 times as large as the base thickness such that no more than 70 percent of the base thickness extends laterally outside of the receptacles 48. In another embodiment, the receptacle depth may be at least 0.35 times as large as the base thickness such that no more than 65 percent of the base thickness extends laterally outside of the receptacles 48. Still, in other embodiments the receptacle depth may be at least 0.40 times as large as the base thickness such that no more than 60 percent of the base thickness extends laterally outside of the receptacles 48 or be at least 0.45 times as large as the base thickness such that no more than 55 percent of the base thickness extends laterally outside of the receptacles 48.

[0021] The base portions 66 define base portion outlines 70 (FIG. 4). Generally, the receptacle outlines 60 may follow the overall shape of the base portion outlines 70. In this example, a majority of the receptacle outlines 60 have a clearance C1 of at least 0.2 inches with respect to the base portion outlines 70. It is to be understood that the clearance may vary in other embodiments according to the disclosure.

[0022] In accordance with another aspect of the disclosure, the main wheel 52 of the stump cutter cutting wheel 12 has a left surface 72, a right surface 74, and an outermost border 75 (a border that is furthest from the horizontal axis 14). In this example, the stump cutter cutting wheel 12 includes a left guard mounted to the left surface 72 and a right guard mounted to the right surface 74. The left and right guards each include at least one guard plate. The left and right guards may cover outer annular regions of the left and right surfaces 72, 74 of the main wheel 52. The outer annular regions may extend around the horizontal axis 14. In other embodiments, the left and right guards may not cover inner annular regions of the left and right surfaces 72, 74 of the main wheel 52. In other embodiments, the left and right guards cover 20-60 percent of the total areas defined by the left and right surfaces 72, 74 of the main wheel 52.

[0023] In this example, the left and right guards each include first and second plates that cooperate to cover the outer annular regions. The first and second plates may have a semi-circular shape. It is understood that the shape of the plates may vary. The left and right guards define openings 76



that partially define the receptacles 48. The openings 76 can be notches having open sides that face radially outwardly from the horizontal axis 14.

[0024] Referring again to FIG. 4, the cutter holders 64 may have leading sides 78 and trailing sides 80. The cutter holders 64 may include cutter fastener openings that extend through the cutter holders 64 from the leading sides 78 to the trailing sides 80. The cutters 62 include cutting heads 82 positioned at the leading sides 78 of the cutter holders 64 and fasteners 84 of the cutters 62 extend through the cutter fastener opening.

[0025] In accordance with another aspect of the disclosure, the receptacles 48 may have an inner and outer end and a depth that extends from the inner end to the outer end. The depth may be measured in an orientation that extends along the horizontal axis 14 of the main wheel 52. The inner ends may be closed by the left and right surfaces 72, 74 of the main wheel 52, and the outer ends may be open.

[0026] From the forgoing detailed description, it will be evident that modifications and variations can be made without departing from the spirit and scope of the disclosure.

What is claimed is:

1. A cutting wheel, comprising:
  - a main wheel rotatable about a center axis; the main wheel having a generally planar left surface, a generally planar right surface, and an outermost border; the left surface being generally parallel to the right surface;
  - a plurality of cutter assemblies extending from the main wheel beyond the outermost border, each cutter assembly having a base portion and a cutter configured for reducing material;
  - a guard extending a distance D1 normal to one of the left surface and the right surface, the guard defining a receiving area;
 wherein:
  - one of the cutter assembly base portions is positioned in the receiving area;
  - the cutter assembly base portion in the receiving area extends a distance D2 from the one of the left surface and the right surface; the distance D2 being measured in the orientation that extends along the center axis;
  - the distance D1 is at least 25% as large as the distance D2; and
  - the guard is fastened to the one of the left surface and the right surface by fasteners.
2. The cutting wheel of claim 1, further comprising two guards, one guard extending a distance D1 from the left surface, and another guard extending the distance D1 from the right surface.
3. The cutting wheel of claim 2, wherein each of the guards includes at least two guard plates.
4. The cutting wheel of claim 3, wherein each guard covers an outer annular region of the left and right surfaces of the main wheel, respectively, and wherein the outer annular regions extend around the central axis.
5. The cutting wheel of claim 1, wherein the receiving area is at least 0.30 times as large as the base portion of the cutter assembly such that no more than 70 percent of the base portion extends laterally outside of the receiving area.
6. A stump cutter cutting wheel comprising:
  - a wheel structure having a left side and a right side, the wheel structure being rotatable about a central axis that extends through the wheel structure between the left

and right sides, the wheel structure defining an outermost border and concordant outer annular regions associated with the left and right sides of the wheel structure;

- a right guard secured to the right side of the wheel structure, and a left guard secured to the left side of the wheel structure, each guard comprising a plate having an arced configuration with an inside edge and an undulating outside edge defining at least one receptacle therein;
  - a plurality of cutter assemblies mounted to the wheel structure, the cutter assemblies including cutters mounted to cutter holders, the cutter holders including base portions that fit correspondingly within the receptacles; and
  - fasteners for securing the cutter holders to the wheel structure, the fasteners extending through the fastener openings defined by the base portions of the cutter holders; and
- wherein the right guard and the left guard are positioned on respective outer annular regions of the right and left sides of the wheel structure.
7. The cutting wheel of claim 6, wherein each of the left and right guards is generally semi-circular.
  8. The cutting wheel of claim 7, wherein the left and right guards each include at least two guard plates, the guard plates being generally semi-circular.
  9. The cutting wheel of claim 8, wherein the respective guard plates of the left and right guards are cooperatively secured to the respective left and right sides of the wheel structure to cover the outer annular regions of the wheel structure.
  10. The cutting wheel of claim 7, wherein each guard covers an outer annular region of the left and right surfaces of the wheel structure, and wherein the outer annular regions extend around the central axis.
  11. The cutting wheel of claim 6, wherein the left and right guards are offset from the outermost border of the wheel structure.
  12. A cutting wheel, comprising:
    - a main wheel having a circumference; the main wheel being rotatable about a center axis and comprising a generally planar left surface, a generally planar right surface, and an outermost border; the left surface being generally parallel to the right surface;
    - a first guard extending along an annular region of one of the left surface and the right surface, the guard comprising a plate having an arced configuration with an inside edge and an undulating outside edge defining at least one receiving area therein; and
    - a cutter assembly mounted to the wheel structure, the cutter assembly including cutters mounted to cutter holders, the cutter holders including base portions that fit correspondingly within the receiving area, the base portions each defining at least one fastener opening, the base portions defining base thicknesses measured in the orientation that extends along the central axis, the receptacle depths being at least 0.25 times as large as the base thicknesses such that no more than 75 percent of the base thicknesses extend laterally outside of the receptacles, the base portions each defining at least one fastener opening.
  13. The cutting wheel of claim 12, wherein the first guard is offset from the outermost border of the main wheel.

**14.** The cutting wheel of claim **12**, wherein the guard extends a distance **D1** normal to the one of the left surface and the right surface.

**15.** The cutting wheel of claim **14**, wherein the cutter assembly base portion in the receiving area extends a distance **D2** normal to the one of the left surface and the right surface.

**16.** The cutting wheel of claim **15**, wherein **D2** is greater than **D1**.

**17.** The cutting wheel of claim **12**, wherein the guard is a semi-circle extending partially along the circumference of the main wheel.

**18.** The cutting wheel of claim **12**, wherein the guard is circular and extends along the circumference of the main wheel, the guard having a central bore formed therein.

**19.** The cutting wheel of claim **12**, further comprising a second guard, wherein the first guard extends along an annular region of the left surface of the main wheel and the second guard extends along an annular region of the right surface of the main wheel.

**20.** The cutting wheel of claim **19**, wherein the first and second guard each include at least two guard plates, and wherein the guard are cooperatively secured to the respective left and right sides of the main wheel to cover the outer annular regions of the main wheel.

\* \* \* \* \*