



BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(57) Abstract: A connection between a connector, a fastener and one or more structural members is disclosed. The connector can be formed with a fastening and alignment member. The fastening and alignment member includes a projecting member and a protruding member in close proximity to a predetermined location for the fastener.

FASTENING AND ALIGNMENT MEMBER

Background of the Invention

[0001] This invention provides a connection between a fastener, a connector and a structural member. The present invention has particular utility in positioning a power fastener driving tool for driving the fastener through the connector and into the structural member. The connector is generally used for joining two or more structural members together, such as a hanger for attaching a joist to a header.

[0002] The present invention provides that the material adjacent a fastener opening or point of fastener entry in a connector have a unique shape that improves the driving of the fastener, as well as the ability of the fastener to resist loads on the connection. The material of the connector adjacent the opening can be formed with a conical, downwardly projecting protrusion that guides the fastener towards the opening and can, in certain embodiments, itself form a connection with the structural member.

[0003] Using power fastener driving tools to join connectors to structural members can be very cost effective, as driving fasteners with a power tool is generally faster than driving fasteners by hand. Typical power fastener driving tools can be electrically or pneumatically powered. They can also be gas powered or use exploding charges. When properly used, power driving tools also have good consistency in driving the fastener with sufficient force such that the nail will be driven to the correct depth with its head contacting the surface of the wood or the face of the connector. This is helpful as the fastening strength of a nail is improved when the head of the nail is in contact with the surface of the connector or member into which it is driven. When the head of the nail is in contact with the connector or member, the nail connection is said to have end fixity. A fastener with end fixity resists rotation under shear loading. The state when a nail is not in contact is called an under-driven nail. The present invention is designed to assist with the use of power fastening guns and to improve the strength of the connection made with the fastener.

[0004] It is also important when installing connectors to use the prescribed number of

fasteners in the proper locations to achieve design load values. As such most connector manufactures will pre-punch holes in the connectors where the fasteners are supposed to be driven. Sometimes the openings will be of different shapes to differentiate between required fasteners and additional fasteners that may be used. As powered, fastener driving tools can be rather bulky and block the user's ability to see exactly where the fastener is being driven, a number of inventions have been developed to help the operator locate the opening in the connector.

[0005] A number of prior inventions addressed the issue of helping the operator locate the opening when using a power fastener driving tool by modifying the tool.

[0006] US Patent 5,579,975, granted to Charles J. Moorman, teaches power fastener driving tool where the nail to be driven projects forwardly of the tool such that the user can actually see the fastener being received in the opening before they actuate the tool. This powered fastener driving tool is specifically designed for driving a nail through an opening in a metal connector. Such driving tools are typically called metal connector nail guns.

[0007] US Patent 5,238,167, granted to Frank C. Howard et al, and US Patent 5,452,835, granted to Yury Shkolnikov, teach power fastener driving tools that use a protruding finger that is disposed adjacent the fastener to be driven. When this finger is received by the opening in the connector the user will know the fastener will be properly located.

[0008] US Patent 3,312,485, granted to G. A. Koenighshof, and US Patent 4,928,867, granted to Mark B. Jensen et al, addressed the issue of helping the operator locate the opening or point of fastener entry when using a power fastener driving tool by shaping the material of the connector around the opening in a unique way.

[0009] US Patent 4,928,867, in one approach, taught forming the nail gun with a special alignment foot that cooperated with an especially shaped alignment tab on the connector to align the fastener to be driven with the opening in the connector. In most of the embodiments shown in the patent, when the alignment foot captures the alignment member, the fastener should be in the proper position. In another approach, the patent teaches an alignment

member on the connector that will receive the nose of a typical power fastener gun. In this embodiment, one or more upper rings or arcs are formed concentrically about the opening or predetermined position for the fastener, or, conversely, it can be a groove partially or fully circumscribing the predetermined position, or a combination of one or more upper rings and grooves. In most embodiments shown in the patent, the alignment foot of the tool and the alignment member of the connector are designed to fit together.

[0010] Similarly, US Patent 3,031,727, granted G. G. Nesbitt, teaches nail openings in a connector plate where the nail openings are surrounded by an embossed ring that may be used to center a nail gun on the nail opening. This patent also teaches forming the nail opening with jagged, pointed projections. These projections are formed from the metal being pushed and ruptured during the formation of the nail hole. According to the inventor, the projections bite into the wood when a nail is driven through the plate, increasing the area of contact and thereby increasing the holding power of the nail. Published US Application 2004/0096269, filed by George Shahnazarian and published on May 20, 2004, also teaches forming fastener openings with rearwardly extending metal projections that will be embedded in the wood of the beam when a fastener is driven through the opening.

[0011] The present invention provides an improved fastening and alignment member on the connector that can both aid in the driving of the fastener by a power fastener gun and improve the connection between the connector and the structural member.

Summary of the Invention

[0012] The present invention provides a unique connection between a fastener, a connector and a structural member.

[0013] The present invention provides a fastening and alignment member on a connector.

[0014] The fastening and alignment member can be formed as one or more sloping surfaces that descend toward the opening or predetermined location for a fastener to be driven through the connector. The sloping surfaces are located on the periphery of the opening or

predetermined fastener location. The sloping surfaces can be a plurality of grooves or valleys converging or traveling towards the opening.

[0015] The one or more sloping surfaces are formed adjacent to the opening or predetermined location for the fastener at the periphery of the opening or predetermined location. The sloping surfaces can be part of a projecting member that protrudes below the back face of the connector, such that the projecting member can be embedded in the material of the structural or support member. The projecting member is adjacent to the opening and preferably surrounds the entire periphery of the opening. Preferably, the projecting member is concentric with the opening. Preferably, the rim of the opening is depressed with respect to the outlying portions of the front face of the connector around the opening or predetermined location for the fastener. In certain embodiments, the projecting member protrudes towards the attachment face of the structural member. In preferred embodiments, the projecting member protrudes into the structural member.

[0016] The sloping surfaces can descend from one or more upper portions adjacent to the sloping surfaces. The upper portions are located radially farther away from the opening or predetermined location for the fastener than the opening. The upper portions can be arranged in concentric manner around the fastener opening or predetermined location for the fastener. The sloping surface can be a single annular surface making a conical frustum.

[0017] The one or more upper portions can be surrounded by a groove or a series of depressions in the top surface of the connector. The one or more upper portions can partially or fully circumscribe the predetermined position for the fastener. The one or more depressions can partially or fully circumscribe the innermost upper portion or portions. The groove or series of depressions are preferably formed as protruding members that protrude from the back face of the connector.

[0018] The body portions that make up the connector can be formed as a planar members with planar front and back surfaces and the fastening and alignment member is a deformation in the body of the connector that creates depressions in the planar front surface and protrusions or projections extending out of the planar back surface of the connector. The

fastening an alignment member lifts the body portion of the connector off of the attachment face of the structural member.

[0019] The fastening and alignment member can be formed as a upper ring or arc, or a plurality of upper rings or arcs surrounding or partially surrounding an opening or a predetermined location or position for driving a fastener through the connector.

[0020] The fastening and alignment member can be formed as a plurality of concentrically disposed upper rings or arcs or upper portions separated by a trough or groove or other recess, surrounding or partially surrounding an opening or a predetermined location for driving a fastener through the connector. The groove or recess between the upper portions can have a back surface that projects farther away from the front surface of the connector than the back surfaces of the connector that are disposed radially outward and farther away from the opening than the trough. The back surface of the recess can extend as far toward the attachment face of the structural member as the projecting member. Preferably, the projecting member extends farthest away from the front surface of the connector than the back surface of the recess and the back surface of the portions of the connector disposed radially outward from the recess or trough surrounding the opening.

[0021] The opening can adopt any shape. Typical fastener openings in connectors are round or triangular with rounded vertices.

[0022] In the preferred embodiment, the present invention provides a conical, downwardly projecting protrusion that guides the fastener towards the opening and itself forms a connection with the structural member.

[0023] It is another benefit of the present invention that the use of the fastening and alignment member on a connector increases the end fixity of the nail or other fastener with a head that is received in the opening in the fastening and alignment member. If the head is not driven all the way, the funnel shape of the feature means less deformation needs to occur before fixity is developed. The sloping shape of the fastening and alignment feature or member means more of the nail head will be engaged by the feature and sooner under

deforming loads.

[0024] It is another benefit of the present invention that the embossed protrusions help locate the nose-piece of certain guns.

[0025] Another benefit of the present invention is that the funnel-shaped sides of the guide help direct the nail into the opening.

[0026] The washer like recess or groove between the upper portions in closer proximity to the nail opening and the outer upper portion farther away from the nail opening of the preferred embodiment also results in less deformation of the wood member by having the pressure of the nail head distributed across a wider surface area.

[0027] The present invention is also designed be used with pneumatic tools used in general framing, commonly called framing nailers. The noses of framing nailers are typically formed with teeth that grip the wood, and the nose is designed so that the nail does not protrude from the tool. Being able to work such nailers is a benefit to workers who prefer to use a framing nailer as they do not have to change tools to install a hanger or connector.

[0028] The present invention also provides a hanger connector having the alignment and fastening member of the present invention.

Detailed Description of the Drawings

[0029] Figure 1 is a perspective view of a connection made according to the present invention. The connector is formed with fastening and alignment members of the present invention. The connector is a hanger shown joining a joist to a header.

[0030] Figure 2 is a perspective view of a portion of a connector formed with a fastening and alignment member of the present invention.

[0031] Figure 3 is a cross-sectional view of a connector formed with a fastening and

alignment member of the present invention, and of a nail gun received by the fastening and alignment member and ready to drive a nail through an opening in the connector for the fastener.

[0032] Figure 4 is a top view of a portion of a connector formed with fastening and alignment members.

[0033] Figure 5 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention, and of a nail gun in contact with the fastening and alignment member and ready to drive a nail through an opening in the connector for the fastener.

[0034] Figure 6 is a perspective view of a connection made according to the present invention. The connector is formed with fastening and alignment members of the present invention. The connector is shown joining a joist to a header.

[0035] Figure 7 is a perspective view of a connection made according to the present invention. The connector is formed with fastening and alignment members of the present invention. The connector is a holdown shown joining a stud to a sill plate and a foundation.

[0036] Figure 8 is a perspective view of a connection made according to the present invention. The connector is formed with fastening and alignment members of the present invention. The connector is a holdown shown joining a stud to a sill plate and a foundation.

[0037] Figure 9 is a perspective view of a connection made according to the present invention. The connector is formed with fastening and alignment members of the present invention. The connector is a strap shown joining a pair of studs across a rim joist between two levels of a building.

[0038] Figure 10 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention, and of a nail gun in contact with the fastening and alignment member and ready to drive a nail through an opening in the connector for the

fastener.

[0039] Figure 11 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention, and of a nail gun aligned with the fastening and alignment member and ready to drive a nail through an opening in the connector for the fastener.

[0040] Figure 12 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention, and of a nail gun received by the fastening and alignment member and ready to drive a nail through an opening in the connector for the fastener. Figure 12 is similar to Figure 3, except the tip of the nail is shown already received by the opening in the fastener.

[0041] Figure 13 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention, and of a nail gun that is aligned with the fastening and alignment member and ready to drive a nail through an opening in the connector for the fastener. The sloping surface of the fastening and alignment member will help guide the nail to the opening.

[0042] Figure 14 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention, and of a nail gun received by the fastening and alignment member and ready to drive a nail through an opening in the connector for the fastener.

[0043] Figure 15 is a perspective view of a portion of a connector formed with a fastening and alignment member of the present invention.

[0044] Figure 16 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention. The structural member is also shown in cross-section and a nail is received by the connector and the structural member.

[0045] Figure 17 is a cross-sectional view of a connector formed with a fastening and

alignment member of the present invention. The structural member is also shown in cross-section and a nail is received by the connector and the structural member. The nail shown in Figure 17 has been under-driven.

[0046] Figure 18 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention. The structural member is also shown in cross-section and a nail is received by the connector and the structural member. The nail shown in Figure 18 has been under-driven, and the connector is shown flexing under load and making contact with the head of the fastener.

[0047] Figure 19 is a cross-sectional view of a connector formed with a fastening and alignment member of the present invention. The structural member is also shown in cross-section and a nail is received by the connector and the structural member. A portion of the projecting member is shown embedded in the structural member.

[0048] Figure 20 is a connection made according to the present invention, wherein a connector is shown joining a joist to a header. The connector is formed with fastening and alignment members of the present invention.

[0049] Figure 21 is front view of the connector of Figure 20.

[0050] Figure 22 is a right side view of the connector of Figure 20. The left side view is identical.

[0051] Figure 23 is a top view of the connection of Figure 20. The embedded portions of the fasteners and a portion of the seat of the connector are shown in dotted lines.

[0052] Figure 24 is a view of the blank of the connector of Figure 20.

[0053] Figure 25 is a perspective view of a connection made according to the present invention. The connector is formed with fastening and alignment members of the present invention. The connector is a strap shown joining a sill plate to a stud.

[0054] Figure 26 is a perspective view of a connection made according to the present invention. The connector is formed with fastening and alignment members of the present invention. The connector is a strap shown joining a rafter to a rim board in a wall.

Detailed Description of the Preferred Embodiment

[0055] As shown in Figure 1, the present invention provides a connection between a connector **1**, a fastener **2** and a structural member **3**. As shown in Figure 1, structural member **3** is a supporting member such as a header **3** for a joist **4**. The connector **1** is formed with fastening and alignment members **5** where the connector receives the fasteners **2** that are driven through the connector **1** and into the structural member **3**. Additional fasteners **6** are shown attaching the connector **1** to the joist **4**.

[0056] As shown in Figures 1 and 2, the fastening and alignment member **5** is formed as a pair of concentrically disposed upper portions **7** and **8** separated by a groove, trough or recess **9**, surrounding an opening **10** in the connector **1**. The innermost upper portion **7** is preferably formed as a ring. The outer upper portion **8** is the front surface **11** of the connector **1**. The sloping surface **12** that makes up part of the fastening and alignment member **5** descends from the upper portion **7** of the ring to the rim **13** of the opening **10** in the connector **1**. As shown in Figures 1 and 2, the sloping surface **12** is located on the periphery of or adjacent to the opening **10**.

[0057] As shown in Figure 2, the recess or trough **9** is shown with hatchings to roughen the receiving surface **14** of the trough.

[0058] As shown in Figure 2, the sloping surface or surfaces **12** descend from one or more upper portions **7** adjacent to the sloping surfaces **12**. The upper portions **7** are located radially farther away from the opening **10** or predetermined location for the fastener **2**. Preferably, the upper portions **7** are arranged in concentric manner around the fastener opening **10** or predetermined location for the fastener. As shown in Figure 2, the sloping surface **12** is a

single annular surface making a conical frustum.

[0059] As shown in Figure 2, the one or more upper portions 7 can be surrounded by a groove 9. The one or more upper portions 7 can partially or fully circumscribe the predetermined position for the fastener 2. Preferably, the fastening and alignment member 5 is formed with the upper portion 7 as a ring.

[0060] As shown in Figure 3, the sloping surface 12 is part of a projecting member 15 that protrudes below the back face 16 of the connector 1. The projecting member 15 is adjacent to the opening 10 and preferably surrounds the entire periphery of the opening 10. Preferably, the projecting member 15 is concentric with the opening 10. Preferably, the rim 13 of the opening 10 is depressed with respect to the front surface 11 of the radially outlying portions of the connector 1 around the opening 10 or predetermined location for the fastener 2. In certain embodiments, the projecting member 15 protrudes towards the attachment face or attachment surface 17 of the structural member 3, but not far enough to enter the structural member 3 as is shown in Figure 3.

[0061] As shown in Figure 3, the fastening and alignment member 5 is formed as a upper ring 7 separated by a trough or groove or other recess 9 from the surrounding material of the connector. The upper portion of the outer side wall 18 of the trough 9 that rises to the front surface 11 of the connector 1 disposed radially outward from the annular trough or recess 9 constitutes the outer upper portion 8 of the fastening and alignment member 5. The groove or recess 9 between the upper portions 7 and 8 is part of a protruding member 19 having a back surface 20, as shown in Figure 19, that projects farther away from the front surface 11 of the connector 1 than the back surfaces 16 of the connector 1 that are disposed radially outward and farther away from the opening 10 than the trough 9. Preferably, the trough 9 is part of the protruding member 19 that protrudes below the back face 16 of the connector 1. The protruding member 19 protrudes towards and makes contact with the attachment face 17 of the structural member 3. The back surface 20 of the protruding member 19 can extend as far toward the attachment face 17 of the structural member 3 as the projecting member 15. Preferably, the projecting member 15 extends farthest away from the front surface 11 of the connector 1 than the back surface 20 of the protruding member 19 and the back surface 16 of

the portions of the connector 1 disposed radially outward from the recess or trough 9 surrounding the opening 10.

[0062] As shown in Figure 3, the body portion **21** of the connector 1 is preferably formed as a planar member with planar front and back surfaces 11 and 16 and the fastening and alignment member 5 is a deformed portion or deformation in the body portion 21 of the connector 1 that creates depressions in the planar front surface 11 and protrusions or projections extending out of the planar back surface 16 of the connector 1. The result, in certain arrangements as shown in Figure 3, is that the fastening and alignment member 5 lifts the body portion 21 of the connector 1 off of the attachment face 17 of the structural member 3.

[0063] As shown in Figures 16, 17 and 19, in the present invention the structural member 3 has a generally planar attachment face 17, the fastener has an elongated shaft **33**, a portion of the elongated shaft 33 being received by the structural member 3 and entering the structural member 3 through the attachment face 17. The fastener is also received by the connector 1. The connector 1 has a body portion 21, the body portion 21 being a generally planar member having a generally planar front surface 11 disposed away from the attachment face 17 of the structural member 3 and a generally planar back surface 16 disposed facing the attachment face 17 of the structural member 3. The body portion also has a predetermined location 10 for the fastener 2, the fastener 2 being received by the body portion 21 at the predetermined location 10 or adjacent thereto. The body portion 21 has a deformed portion adjacent the predetermined location 10 for the fastener 2. The deformed portion includes a projecting member 15 that projects rearwardly towards the attachment face 17 of the structural member 3. The projecting member 15 has a sloping surface 12 that descends toward the predetermined location 10. The projecting member 15 descends from an upper portion 7 of the deformed portion, with the projecting member 15 projecting closer to the attachment face 17 of the structural member 3 than the generally planar back surface 16 of the connector 1 when the planar attachment face 17 of the structural member 3 and the generally planar back surface 16 of the body portion 21 of the connector 1 are substantially parallel. The upper portion 7 is adjacent to the projecting member 15 and radially farther away from the predetermined location 10 for the fastener 2 than the projecting member 15.

Adjacent to the upper portion 7 is a protruding member 19 that projects rearwardly towards the attachment face 17 of the structural member 3, with the protruding member 19 being disposed closer to the attachment face 17 of the structural member 3 than the upper portion 7 of the deformed portion, and the protruding member 19 is disposed closer to the attachment face 17 of the structural member 3 than the generally planar back surface 16 of the body portion 21 when the planar attachment face 17 of the structural member 3 and the generally planar back surface 16 of the body portion 21 of the connector 1 are substantially parallel. Adjacent to the protruding member 19 is a second upper portion 8, the second upper portion 8 is radially farther away from the predetermined location 10 for the fastener 2 than the protruding member 19, the protruding member 19 being disposed closer to the attachment face 17 of the structural member 3 than the second upper portion 8 when the planar attachment face 17 of the structural member 3 and the generally planar back surface 16 of the body portion 21 of the connector 1 are substantially parallel.

[0064] As is also shown in Figure 16, the protruding member 16 that projects rearwardly towards the attachment face 17 of the structural member 1 has a flat surface facing the attachment face 17 of the structural member 3.

[0065] Figure 3 shows the cylindrical nose **22** of a power fastener tool **23** received in the recess or trough 9 of the fastening and alignment member 5 and between the inner upper portion 7 and the outer upper portion 8 of the fastening and alignment member 5.

[0066] Figure 4 shows a pair of fastening and alignment members 5 in the body portion of a connector 1.

[0067] Figure 5 shows the cylindrical nose 22 of a power fastener tool 23 engaging the inner upper portion 7 of the fastening and alignment member 5.

[0068] Figure 6 is similar to Figure 1, except that it shows fastening and alignment members in the body portions 21 of the connector that will receive fasteners 2 that are driven into the joist 4.

[0069] Figure 7 shows a holdown connector 1 where fastening and alignment members 5 are formed in the back member **24** for attaching the holdown connector 1 to a upright stud **25**. The holdown has a seat **26** receiving an anchor **27** embedded in a concrete member **28**. The back 24 s connected to the seat by means of side flanges **29**.

[0070] Figure 8 shows a strap holdown connector 1 where fastening and alignment members 5 are formed in the strap member **30** for attaching the strap holdown connector 1 to a upright stud 25. The strap holdown has an anchor portion **31** embedded in a concrete member 28.

[0071] Figure 9 shows a strap connector 1 where fastening and alignment members 5 are formed in the strap connection for attaching the strap connector 1 to uprights studs 25 above and below a floor **32** in the wall **48** of a building.

[0072] Figure 10 shows the cylindrical nose 22 of a power fastener tool 23 received on the sloping surface 12 of the projecting member 15 of the fastening and alignment member 5.

[0073] Figure11 shows the cylindrical nose 22 of a power fastener tool 23 disposed above the fastening and alignment member 5 with the fastener 2 received in the opening 10.

[0074] Figure 12 shows the cylindrical nose 22 of a power fastener tool 23 received in the recess or trough 9 of the fastening and alignment member 5 and between the inner upper portion 7 and the outer upper portion 8 of the fastening and alignment member 5.

[0075] Figure 13 shows the cylindrical nose 22 of a power fastener tool 23 disposed above the fastening and alignment member 5 with the fastener 2 received on the sloping surface 12 of the projecting member 15. The sloping surface 12 will help guide the fastener into the opening 10.

[0076] Figure 14 shows the projecting finger guide **32** of a power fastener tool 23 received in the opening 10 in the fastening and alignment member 5 with the fastener 2 aligned with the opening 10. As shown in Figures 13 and 14, the projecting member 15 projects below the back face 16 of the connector 1, such that it is embedded in the material of the support

member 3.

[0077] As shown in Figure 15, the sloping surface or surfaces 12 descend from one or more upper portions 7 adjacent to the sloping surfaces 12. The sloping surfaces 12 are a plurality of valleys or grooves descending towards the opening 10.

[0078] Figure 16 shows a fastener 2, in a particular a nail, embedded in the structural member 3. The fastener 2 has a shaft 33 and a head **34** that has portions that flare outwardly from the shaft 33. The nail 2 has been driven with sufficient force that the flaring portions of the head 34 engage the sloped surfaces 12 of the fastening and alignment member 5.

[0079] Figure 17 shows a nail embedded in the structural member 3. The nail 2 has been driven with insufficient force such that the flaring portions of the head 34 do not engage the sloped surfaces 12 of the fastening and alignment member 5.

[0080] Figure 18 shows a nail embedded in the structural member 3. As in Figure 17, the nail 2 has been driven with insufficient force. The connector 1 is shown under forces that want to lift up one side of the connector 1 around the opening. As the connector lifts, the head 34 engages the sloped surface 12 of the fastening and alignment member 5. A similar under-driven nail used with a connector that did not have the fastening and alignment member 5 of the present invention would not engage the connector 1 as quickly as does the fastener 2 used with the present invention.

[0081] Figure 19 shows a nail 2 embedded in the structural member 3. The projecting member 15 of the fastening and alignment member 5 is embedded in the structural member 3. The protruding member 19 engages, and is in registration with the attachment face 17 of the structural member 3. The bottom surface 20 of the protruding member 19 is flat and distributes the compression load imposed by the nail head 34 engaging the fastening and alignment member 5 over a large surface area.

[0082] Figure 20 shows a connection between a structural member 3, a joist 4 and a hanger

connector 1. The connector 1 is formed with fastening and alignment members 5 on its back flange **35** and its side flanges **36**.

[0083] Figure 21 shows the hanger connector 1 having a seat **37** connecting the side flanges 36. The side flanges 36 extend upwardly from the seat 37. The side flanges 36 consist of three substantially planar portions: a substantially triangular gusset portion **38** and a front upstanding flange portion **39** and a rear upstanding flange portion **40**. The triangular gusset portion 8 has a seat side edge **41** where it connects to the seat. Preferably this seat side edge 41 is set at a non-orthogonal angle to the back flanges 35. The triangular gusset portion 38 is set at a non-orthogonal angle to the seat 37, extending upwardly and away from the seat 37, rather than upwardly and over the seat 37. The front and rear upstanding flange portions 39 and 40 each attach to one of the other side edges **42** of the substantially triangular gusset portion 38, and attach to each other along a common side edge **43**. The front upstanding flange portion 39 is set at a non-orthogonal angle to the back flanges 35 and the attachment face 17 of the structural member 3. This allows a fastener 2 to be driven orthogonally to front upstanding side flange portion 39 and enter the joist 4 at a non-orthogonal angle. Preferably, the rear upstanding flange portion 40 is set at an orthogonal angle to the back flanges 35. The rear upstanding flange portion 40 connects to the back flange 35 along a shared side edge **44**.

[0084] Figure 22 also shows the hanger connector 1. This side view provides a view of the protruding member 19 and the projecting member 15 extending from the back surface 16 of the body 21, in this case the back flange 35 of the hanger connector 1. The fastening and alignment members 5 can be disclosed close enough together, as on the front flange portions 39 of the side flanges 36, that the inner upper portion 7 for one opening 10 can serve as the outer upper portion 8 for an adjacent opening 10.

[0085] Figure 23 also shows the hanger connector 1. The top view shows the fasteners 2 received through fastening and alignment members 5 in the side flanges 36. The fasteners are driven at a non-orthogonal angle to both the joist 4 and the structural member or header 4. The fasteners 2 received by the side flanges 36 enter the joist 4 and extend through the joist 4 to be embedded in the structural member 3 creating a strong connection. Fasteners 2

are also shown received by fastening and alignment members 5 in the back flanges 35 of the hanger connector 1. The projecting members 15 of the fastening and alignment members 5 in the back flanges 35 are embedded in the structural member 3. The protruding members of the fastening and alignment members 5 interface with the attachment face of the structural member 3.

[0086] The connector can be formed such that it has a first side flange 36, and the first side flange 36 is disposed in close proximity to the joist 4. The first side flange 36 has a substantially triangular-shaped gusset portion 38 that is substantially planar, a substantially planar front upstanding flange portion 39, and a substantially planar rear upstanding flange portion 40, and the triangular-shaped gusset portion 38 has a seat side edge 41. The substantially planar front and rear upstanding flange portions 39 and 40 of the first side flange 36 each attach to a different side edge 42 of the triangular-shaped gusset portion 38 that is not the seat side edge 41. The substantially planar front and rear upstanding flange portions 39 and 40 of the first side flange 36 attach together along a common flange portion side edge 43. The substantially planar rear upstanding flange portion 40 connects to a back flange 35 along a shared side edge 44 between the back flange 35 and the substantially planar rear upstanding flange portion 40. The back flange 35 interfaces with the structural member 3 and is attached to the structural member 3 by one or more fasteners 2.

[0087] Figure 24 shows a blank **45** that can be folded to become the hanger connector 1 shown in Figures 20 through 23. The bend lines are shown as dotted lines, and the dotted lines show where the fastening and alignment members 5 will be formed. Preferably, the connector 1 is made from sheet steel, and the fastening and alignment members 5 are preferably made by cold-forming operations using a punch and die.

[0088] Figure 25 shows a tie connector 1 where fastening and alignment members 5 are formed in angled portions for attaching the tie connector 1 to an upright stud 25 above and a mudsill **46**.

[0089] Figure 26 shows a rafter tie 1 where fastening and alignment members 5 are formed in the attachment members to attach the rafter tie to a structural member 3 and a roof

member 47.

We claim:

1. A connection between a structural member, a connector and a fastener, the connection comprising:

- a. the structural member having a generally planar attachment face;
- b. the fastener having an elongated shaft, a portion of the elongated shaft being received by the structural member and entering the structural member through the attachment face, the fastener also being received by the connector; and
- c. the connector, the connector having a body portion, the body portion being a generally planar member having a generally planar front surface disposed away from the attachment face of the structural member and a generally planar back surface disposed facing the attachment face of the structural member, the body portion also having a predetermined location for the fastener, the fastener being received by the body portion at the predetermined location or adjacent thereto; the body portion having a deformed portion adjacent the predetermined location for the fastener, the deformed portion including a projecting member that projects rearwardly towards the attachment face of the structural member, the projecting member having a sloping surface that descends toward the predetermined location, the projecting member descends from an upper portion of the deformed portion, the projecting member projecting closer to the attachment face of the structural member than the generally planar back surface of the connector when the planar attachment face of the structural member and the generally planar back surface of the body portion of the connector are substantially parallel, the upper portion being adjacent to the projecting member and radially farther away from the predetermined location for the fastener than the projecting member, adjacent to the upper portion is a protruding member that projects rearwardly towards the attachment face of the structural member, the protruding member being disposed closer to the attachment face of the structural member than the upper portion of the deformed portion, the protruding member being disposed closer to the attachment face of the structural member than the generally planar back surface of the connector when the planar attachment face of the structural member and the generally planar back surface of the body portion of the connector are substantially parallel, adjacent to the protruding member is a second upper portion, the second upper portion being radially

farther away from the predetermined location for the fastener than the protruding member, the protruding member being disposed closer to the attachment face of the structural member than the second upper portion when the planar attachment face of the structural member and the generally planar back surface of the body portion of the connector are substantially parallel.

2. The connection of claim 1, wherein:

the projecting member surrounds the predetermined location for the fastener.

3. The connection of claim 1, wherein:

a portion of the projecting member is embedded in the structural member.

4. The connection of claim 1, wherein:

the predetermined location for the fastener is an opening in the body portion and the opening has a rim which is disposed closer to the attachment face of the structural member than the upper portion when the planar attachment face of the structural member and the generally planar back surface of the body portion of the connector are substantially parallel.

5. The connection of claim 1, wherein:

the sloping surface is a single annular surface making a conical frustum.

6. The connection of claim 1, wherein:

the protruding member and the projecting member are arranged in a concentric manner around the predetermined location for the fastener.

7. The connection of claim 1, wherein:

the projecting member sloping surface descends to the predetermined location for the fastener.

8. The connection of claim 1, wherein:

the projecting member and the protruding member lift the body portion of the connector

off of the attachment face of the structural member.

9. The connection of claim 1, wherein:

the protruding member is made with hatchings to roughen the receiving surface of the protruding member.

10. A connection between a structural member, a connector and a fastener, the connection comprising:

- a. the structural member having a generally planar attachment face;
- b. the fastener having an elongated shaft, a portion of the elongated shaft being received by the structural member and entering the structural member through the attachment face, the fastener also being received by the connector; and
- c. the connector, the connector having a body portion, the body portion having a generally planar front surface disposed away from the attachment face of the structural member and a generally planar back surface disposed facing the attachment face of the structural member, the body portion also having a predetermined location for the fastener, the fastener being received by the body portion at the predetermined location or adjacent thereto; the body portion having a deformed portion adjacent the predetermined location for the fastener, the deformed portion including a projecting member that projects rearwardly towards the attachment face of the structural member, the projecting member having a sloping surface that descends toward the predetermined location, the projecting member descends from an upper portion of the deformed portion, the upper portion being adjacent to the projecting member and radially farther away from the predetermined location for the fastener than the projecting member, adjacent to the upper portion is a protruding member that projects rearwardly towards the attachment face of the structural member, the protruding member having a flat surface facing the attachment face of the structural member, the protruding member being disposed closer to the attachment face of the structural member than the upper portion of the deformed portion when the planar attachment face of the structural member and the generally planar back surface of the body portion of the connector are substantially parallel, adjacent to the protruding member is a second upper portion, the second upper portion being radially farther away from the

predetermined location for the fastener than the protruding member, the protruding member being disposed closer to the attachment face of the structural member than the second upper portion when the planar attachment face of the structural member and the generally planar back surface of the body portion of the connector are substantially parallel.

12. The connection of claim 10, wherein:

the projecting member surrounds the predetermined location for the fastener.

13. The connection of claim 10, wherein:

a portion of the projecting member is embedded in the structural member.

14. The connection of claim 10, wherein:

the predetermined location for the fastener is an opening in the body portion and the opening has a rim which is disposed closer to the attachment face of the structural member than the upper portion when the planar attachment face of the structural member and the generally planar back surface of the body portion of the connector are substantially parallel.

15. The connection of claim 10, wherein:

the sloping surface is a single annular surface making a conical frustum.

16. The connection of claim 10, wherein:

the protruding member and the projecting member are arranged in a concentric manner around the predetermined location for the fastener.

17. The connection of claim 10, wherein:

the projecting member sloping surface descends to the predetermined location for the fastener.

18. The connection of claim 10, wherein:

the projecting member and the protruding member lift the body portion of the connector

off of the attachment face of the structural member.

19. The connection of claim 10, wherein:

the protruding member is made with hatchings to roughen the receiving surface of the protruding member.

20. A connection between a structural member, a joist a hanger connector and one or more fasteners, the connection comprising:

- a. the structural member, having an attachment face;
- b. the joist disposed closely adjacent to or in contact with the attachment face of the structural member;
- c. the one or more fasteners connecting the hanger connector to the structural member and the joist; and
- d. the connector, the connector having a first side flange, the first side flange disposed in close proximity to the joist, the first side flange having a substantially triangular-shaped gusset portion that is substantially planar, a substantially planar front upstanding flange portion, and a substantially planar rear upstanding flange portion, and the triangular-shaped gusset portion having a seat side edge, and wherein the substantially planar front and rear upstanding flange portions of the first side flange each attach to a different side edge of the triangular-shaped gusset portion that is not the seat side edge, and the substantially planar front and rear upstanding flange portions of the first side flange attach together along a common flange portion side edge, and wherein the substantially planar rear upstanding flange portion connects to a back flange along a shared side edge between the back flange and the substantially planar rear upstanding flange portion, and the back flange interfaces with the structural member and is attached to the structural member by one or more fasteners.

21. The connection of claim 20, wherein:

- a. the hanger connector has a seat that interfaces with the joist and that connects to the first side flange and to a second side flange, the first and second side flanges extending upwardly from the seat;
- b. the second side flange being disposed in close proximity to the joist, the second

side flange having a substantially triangular-shaped gusset portion that is substantially planar, a substantially planar front upstanding flange portion, and a substantially planar rear upstanding flange portion, and the triangular-shaped gusset portion having a seat side edge, and wherein the substantially planar front and rear upstanding flange portions of the second side flange each attach to a different side edge of the triangular-shaped gusset portion that is not the seat side edge, and the substantially planar front and rear upstanding flange portions of the second side flange attaches together along a common flange portion side edge, and wherein the substantially planar rear upstanding flange portion connects to a back flange along a shared side edge between the back flange and the substantially planar rear upstanding flange portion, and the back flange interfaces with the structural member and is attached to the structural member by one or more fasteners;

c. each triangular-shaped gusset portion of the first and second side flanges is attached to the seat at the seat side edge;

d. and wherein the triangular-shaped gusset portions of the first and second side flanges are set at a non-orthogonal angle to the seat and extend upwardly and away from the seat.

21. The connection of claim 20, wherein:

a. the hanger connector has a seat that interfaces with the joist and that connects to the first side flange and to a second side flange, the first and second side flanges extending upwardly from the seat;

b. the second side flange being disposed in close proximity to the joist, the second side flange having a substantially triangular-shaped gusset portion that is substantially planar, a substantially planar front upstanding flange portion, and a substantially planar rear upstanding flange portion, and the triangular-shaped gusset portion having a seat side edge, and wherein the substantially planar front and rear upstanding flange portions of the second side flange each attach to a different side edge of the triangular-shaped gusset portion that is not the seat side edge, and the substantially planar front and rear upstanding flange portions of the second side flange attaches together along a common flange portion side edge, and wherein the substantially planar rear upstanding flange portion connects to the back flange along a shared side edge

between the back flange and the substantially planar rear upstanding flange portion of the second side flange,

c. each triangular-shaped gusset portion of the first and second side flanges is attached to the seat at the seat side edge;

d. and wherein the triangular-shaped gusset portions of the first and second side flanges are set at a non-orthogonal angle to the seat and extend upwardly and away from the seat.

23. The connection of claim 20, wherein:

a. the seat side edge is set at a non-orthogonal angle to the back flange;

b. the front upstanding flange portion is set at a non-orthogonal angle to the back flange and to the attachment face of the structural member, such that a fastener driven orthogonally to front upstanding side flange portion enters the joist at a non-orthogonal angle.

24. The connection of claim 23, wherein:

the rear upstanding flange portion is set at an orthogonal angle to the back flange.

1/21

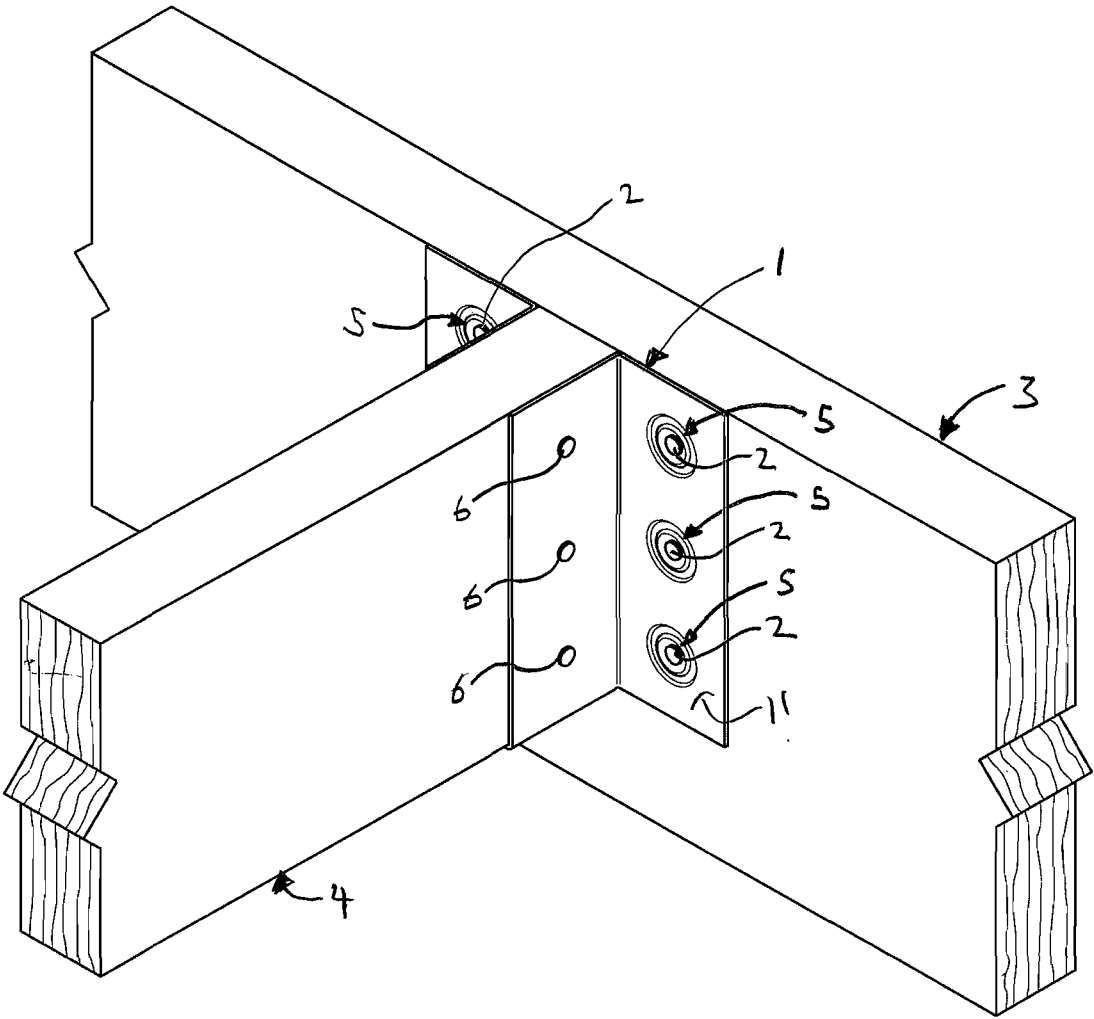


Fig. 1

2/21




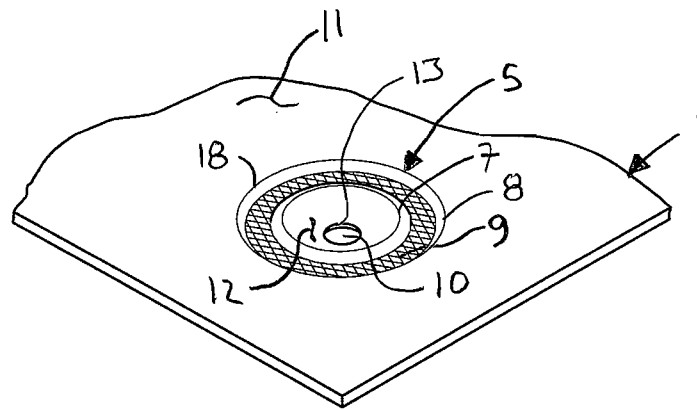


Fig. 2

3/21

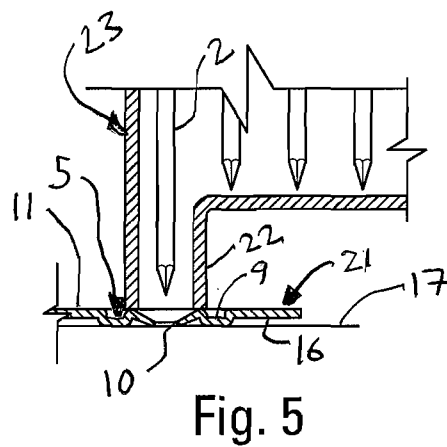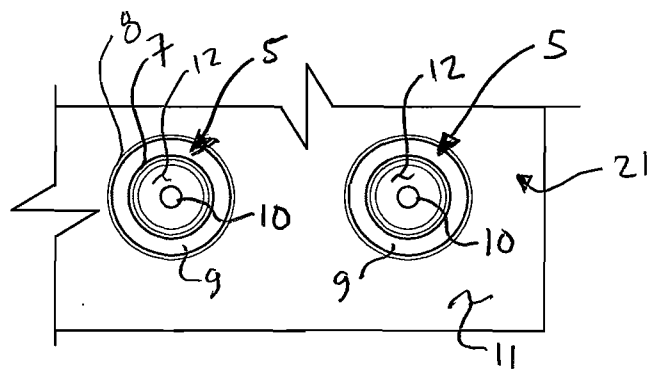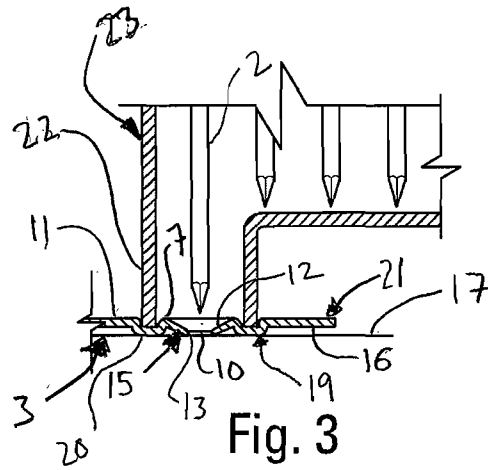

4/21

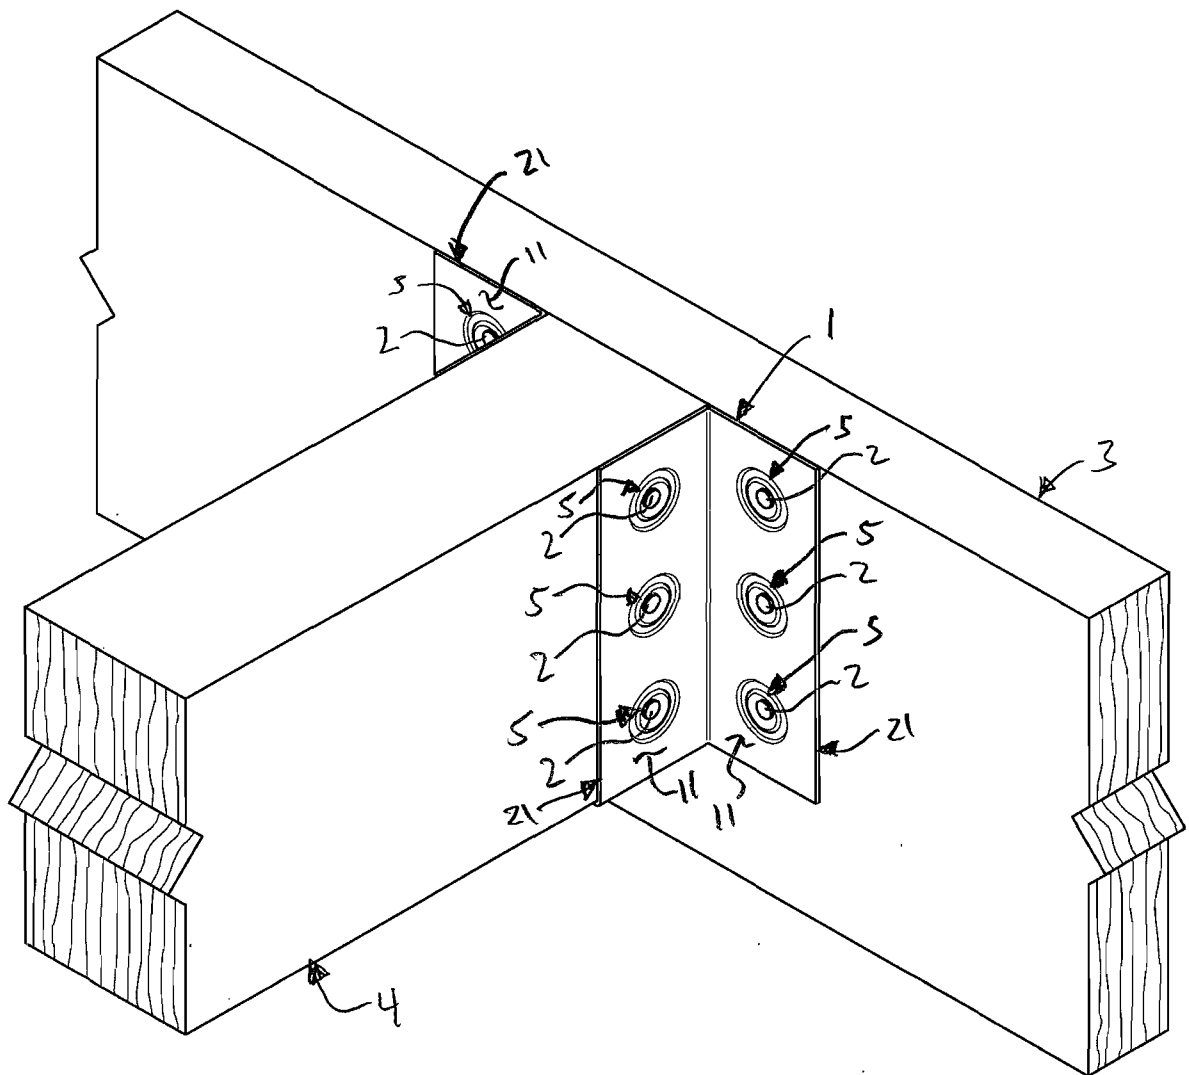


Fig. 6

5/21

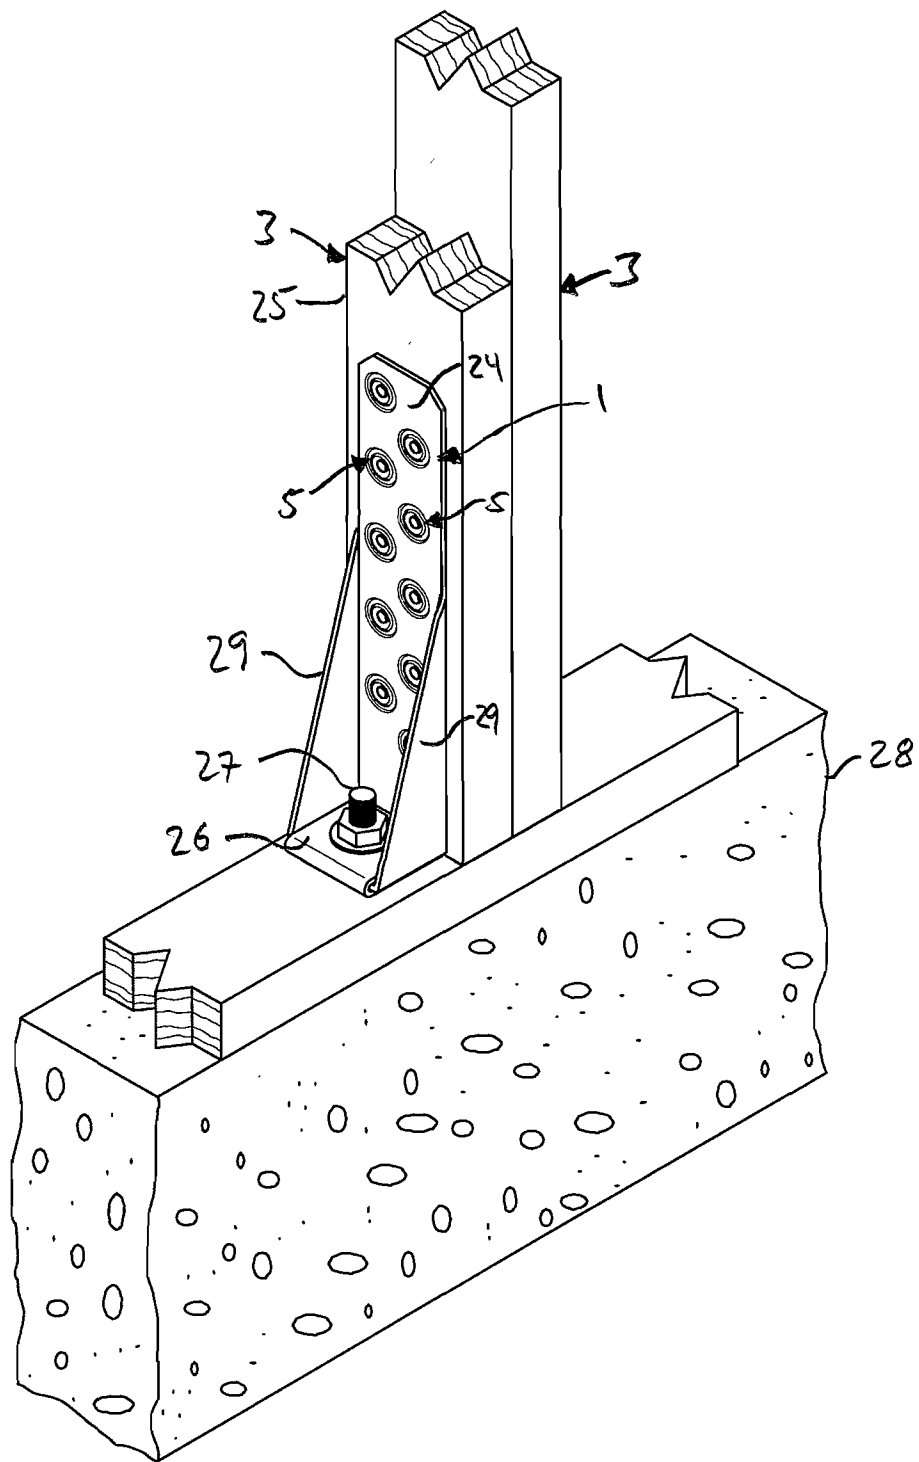


Fig. 7

6/21

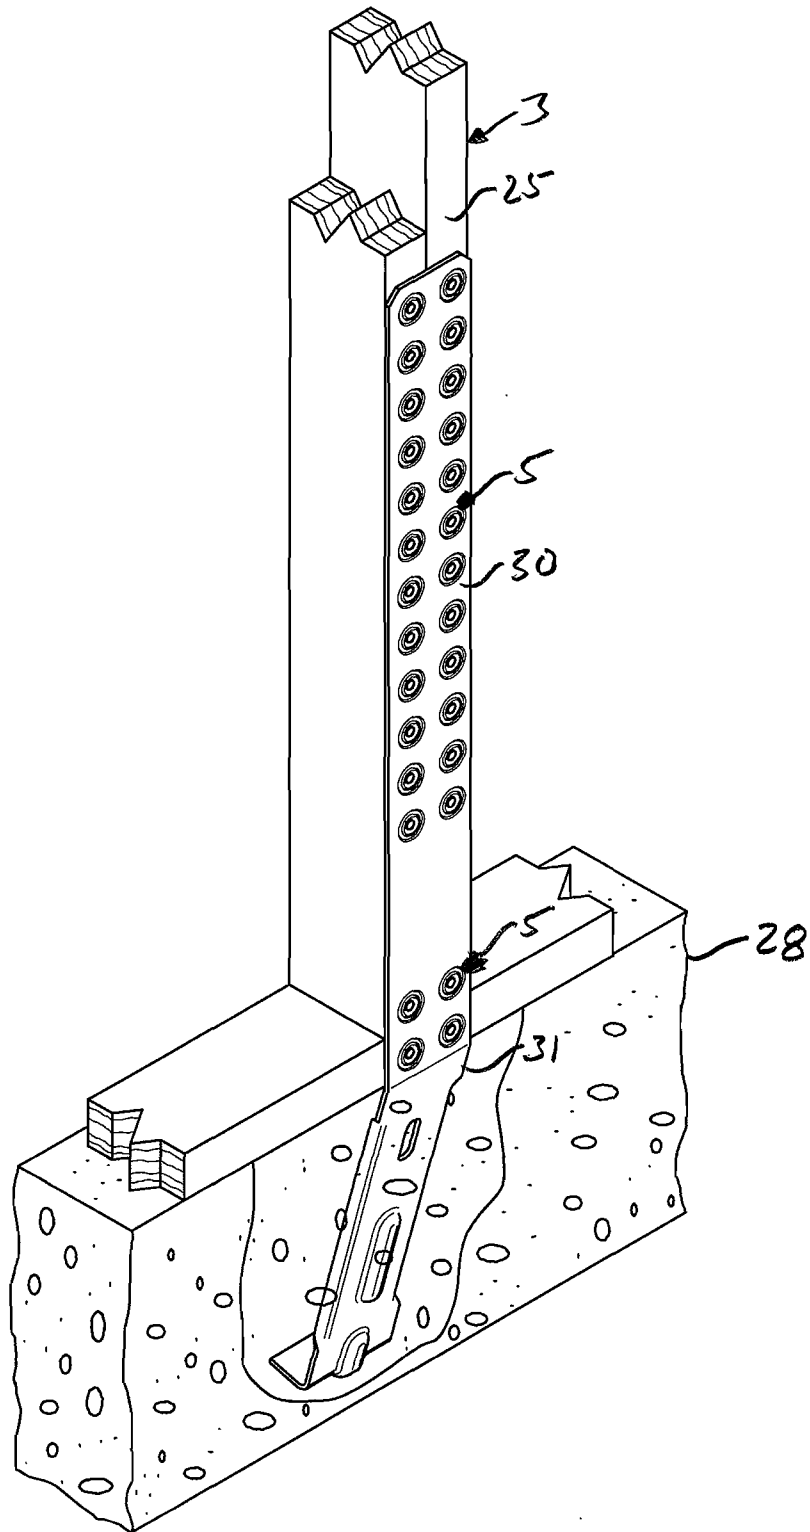


Fig. 8

7/21

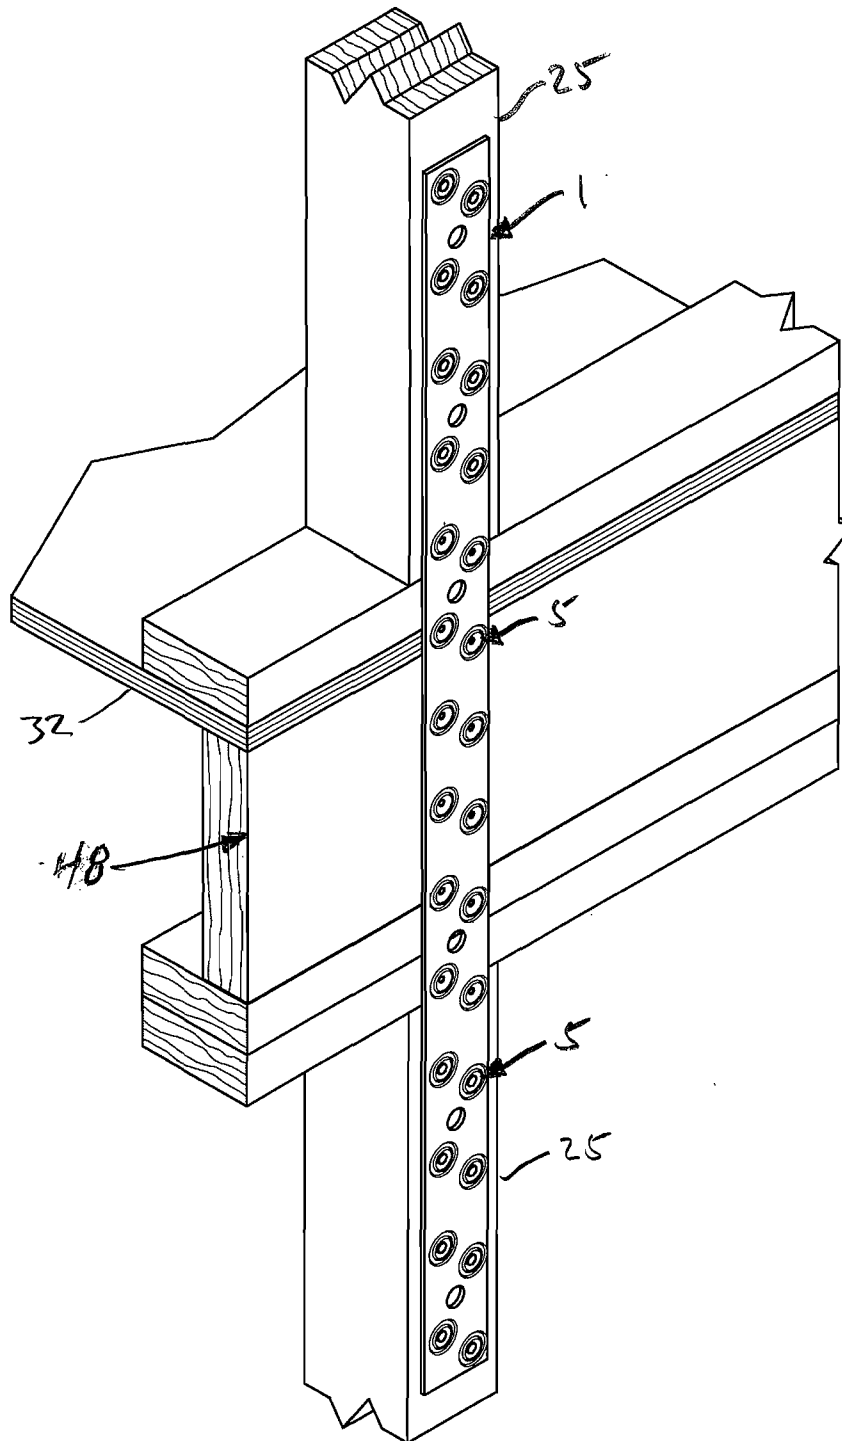


Fig. 9

8/21

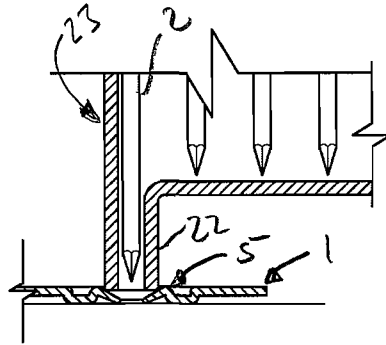


Fig. 10

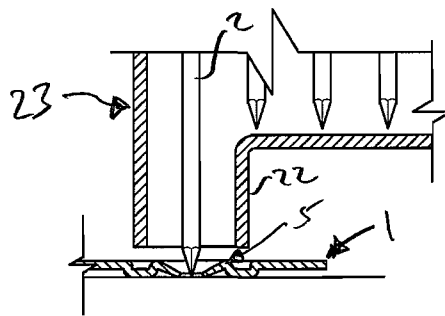


Fig. 11

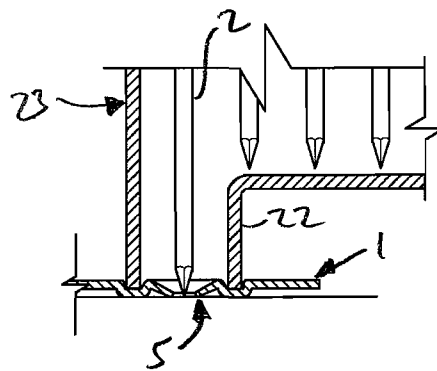


Fig. 12

9/21

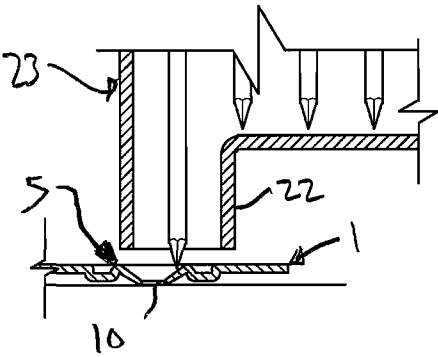


Fig. 13

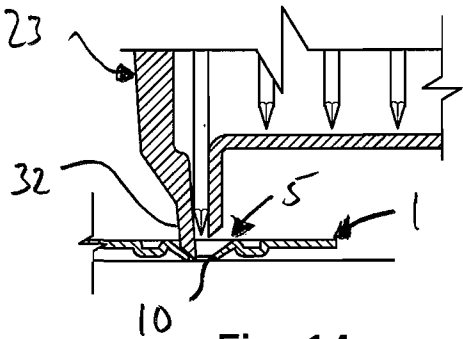


Fig. 14

10/21

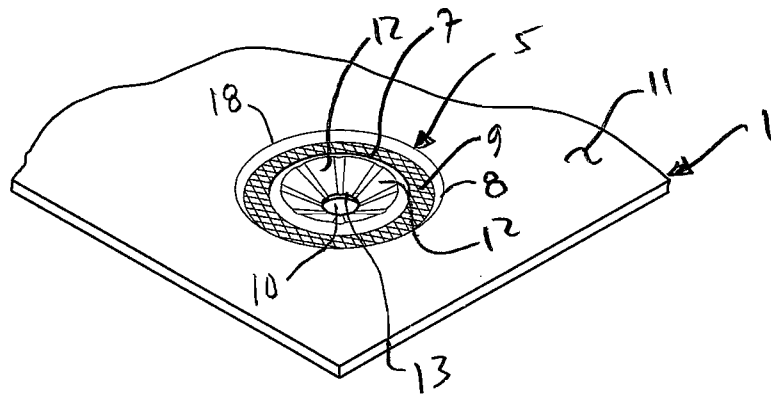


Fig. 15

11/21

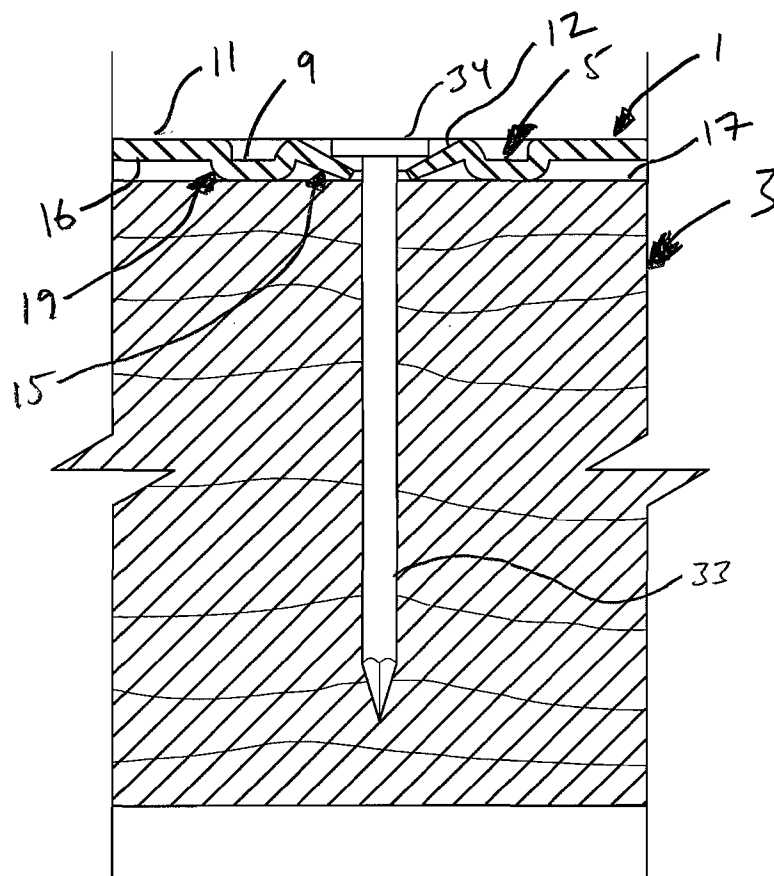


Fig. 16

12/21

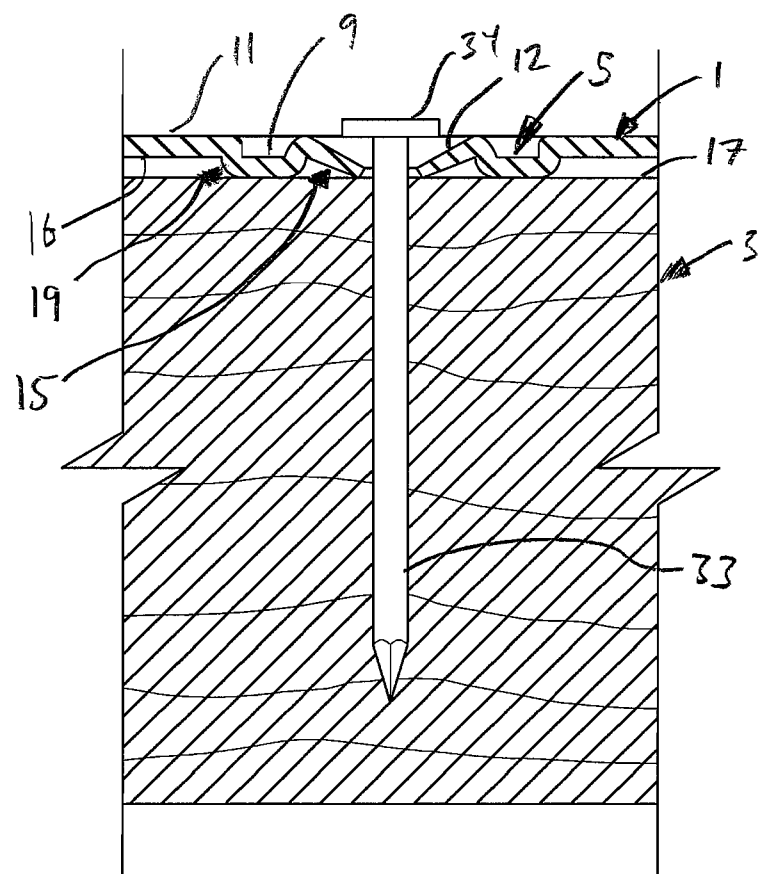


Fig. 17

13/21

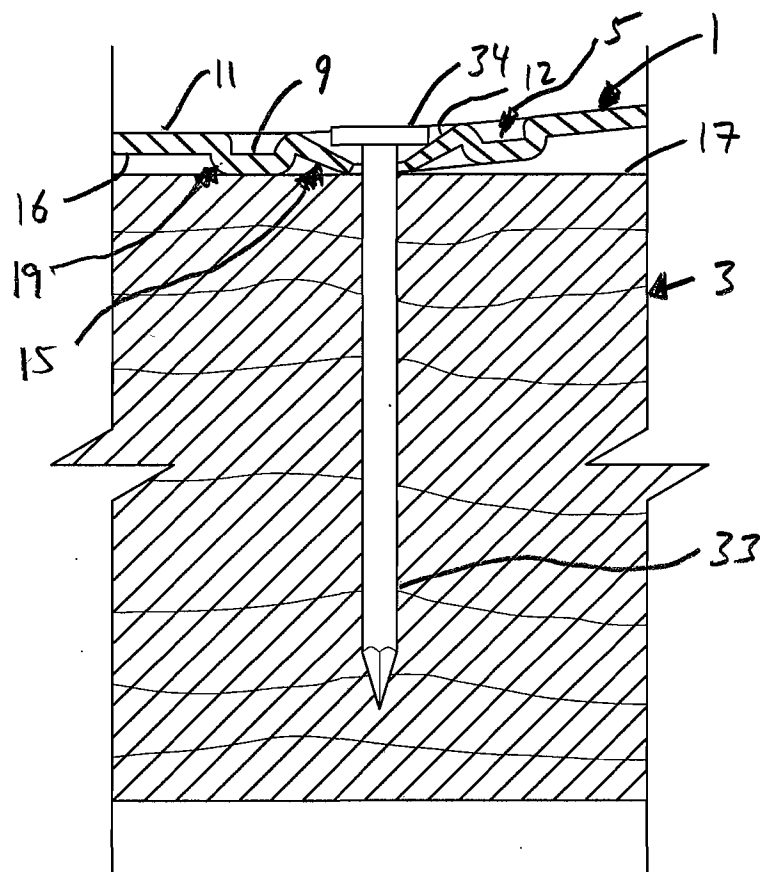


Fig. 18

14/21

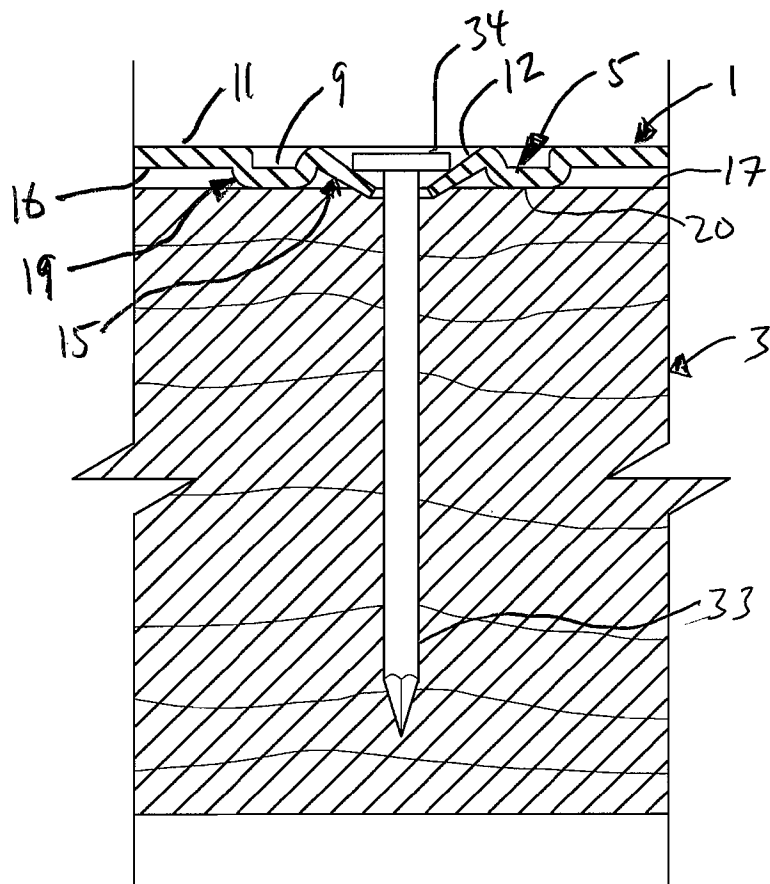


Fig. 19

15/21

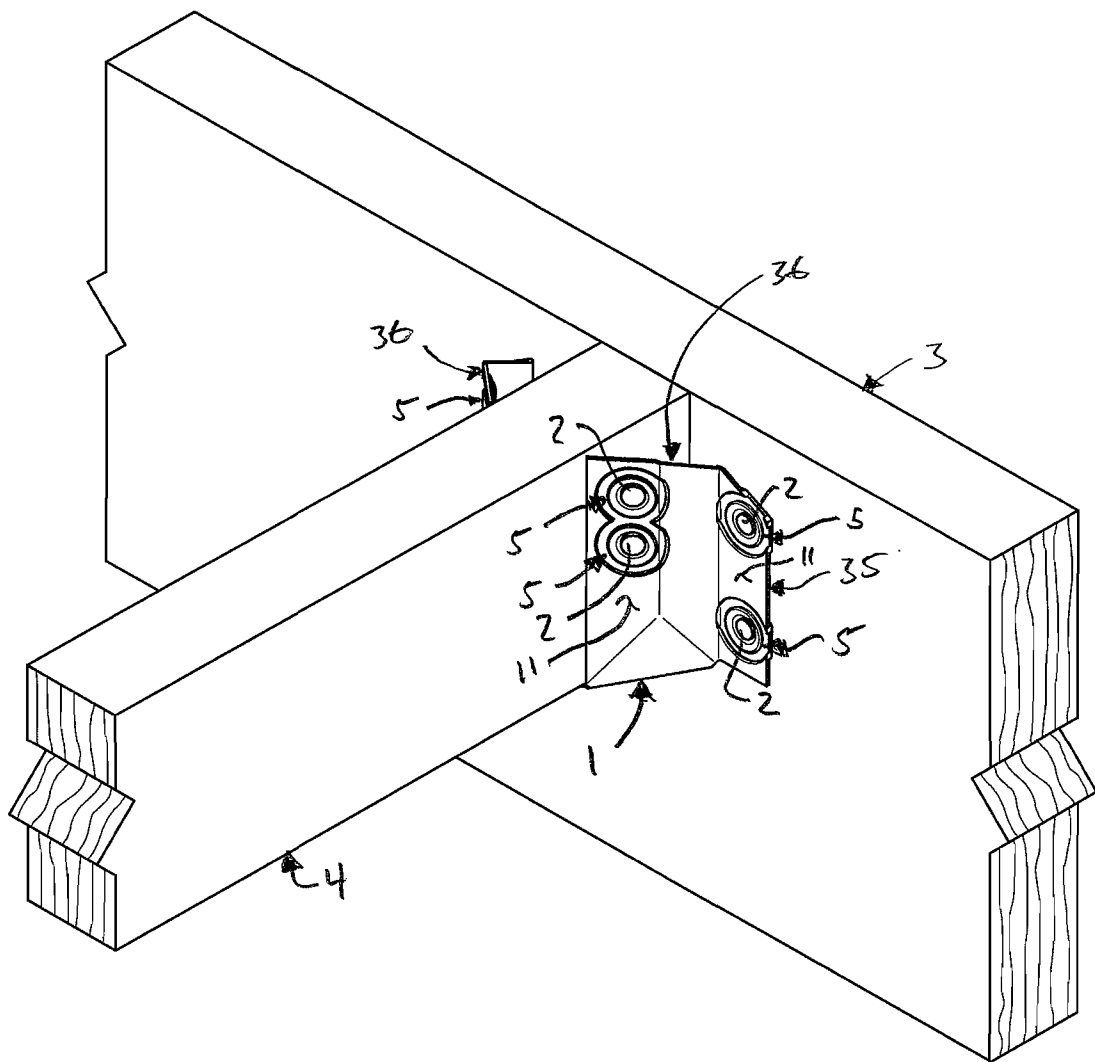


Fig. 20

16/21

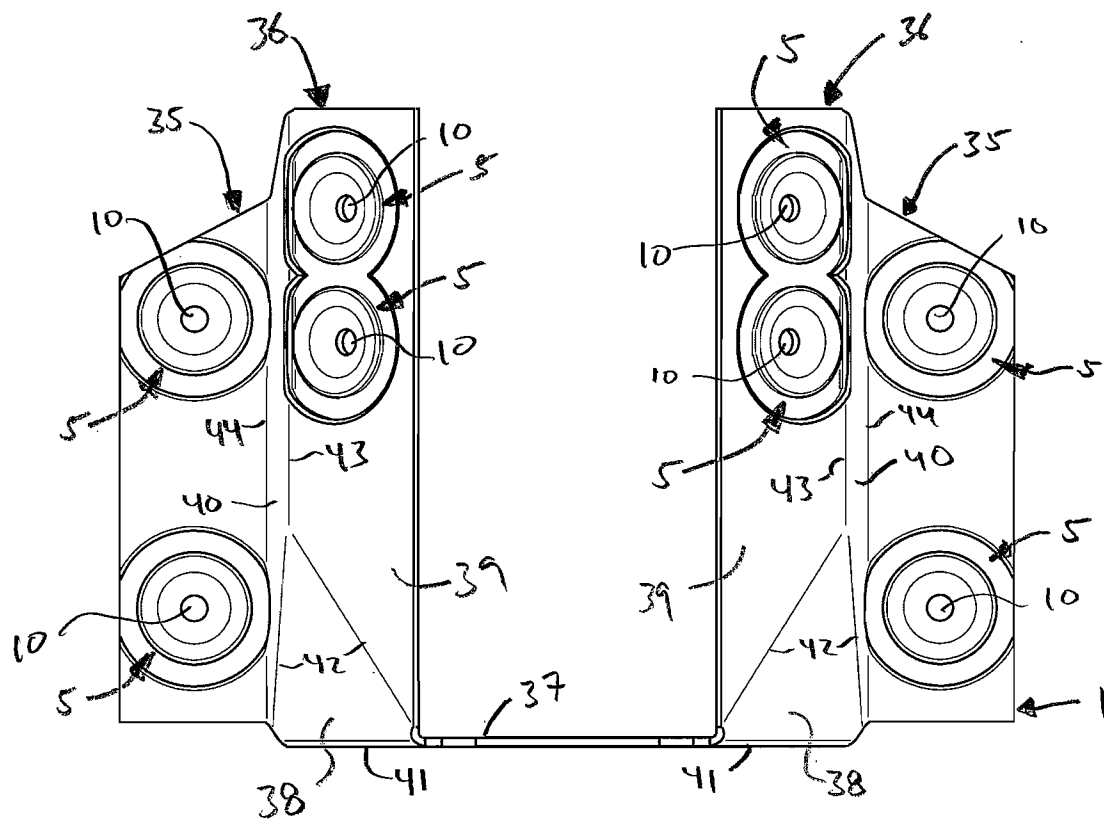


Fig. 21

17/21

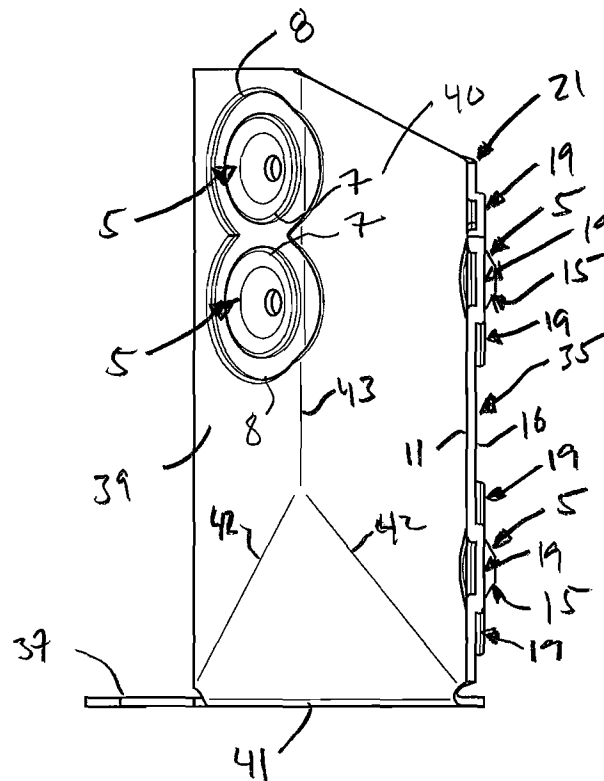


Fig. 22

18/21

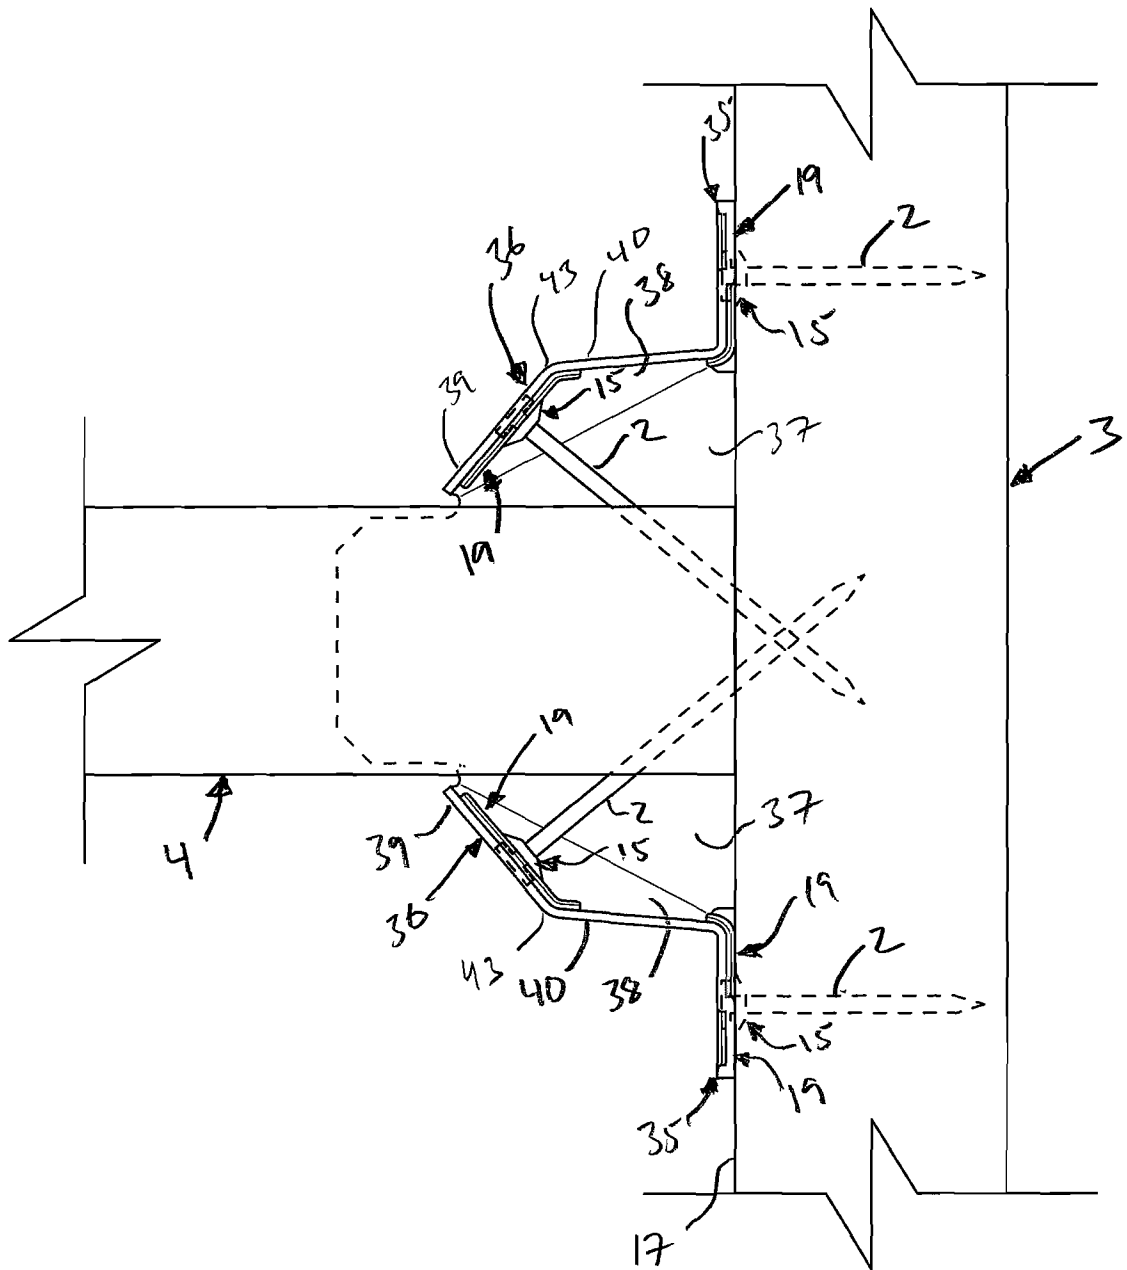


Fig. 23

19/21

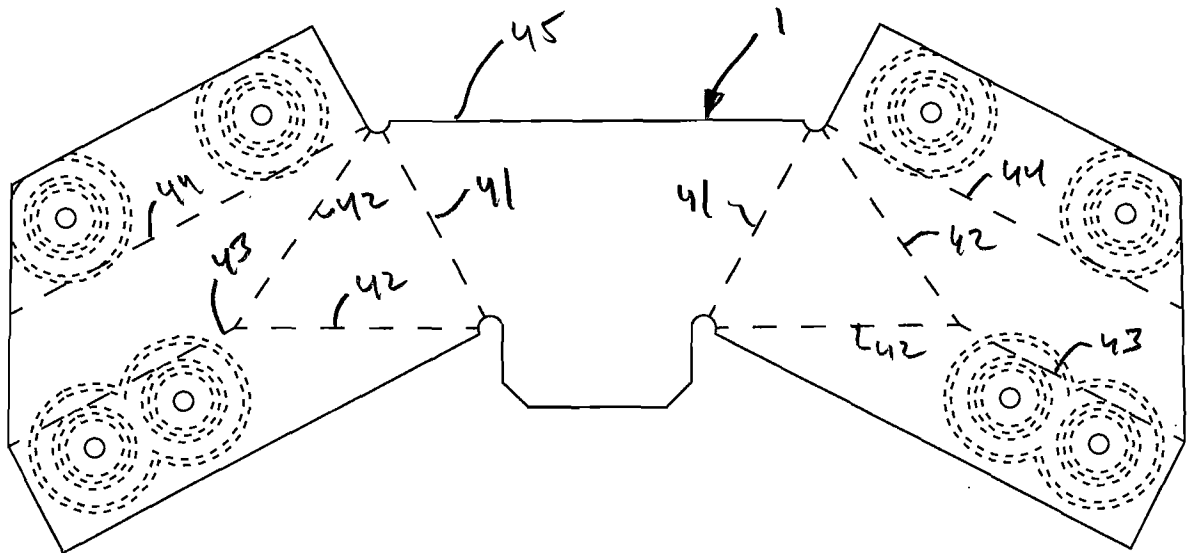


Fig. 24

20/21

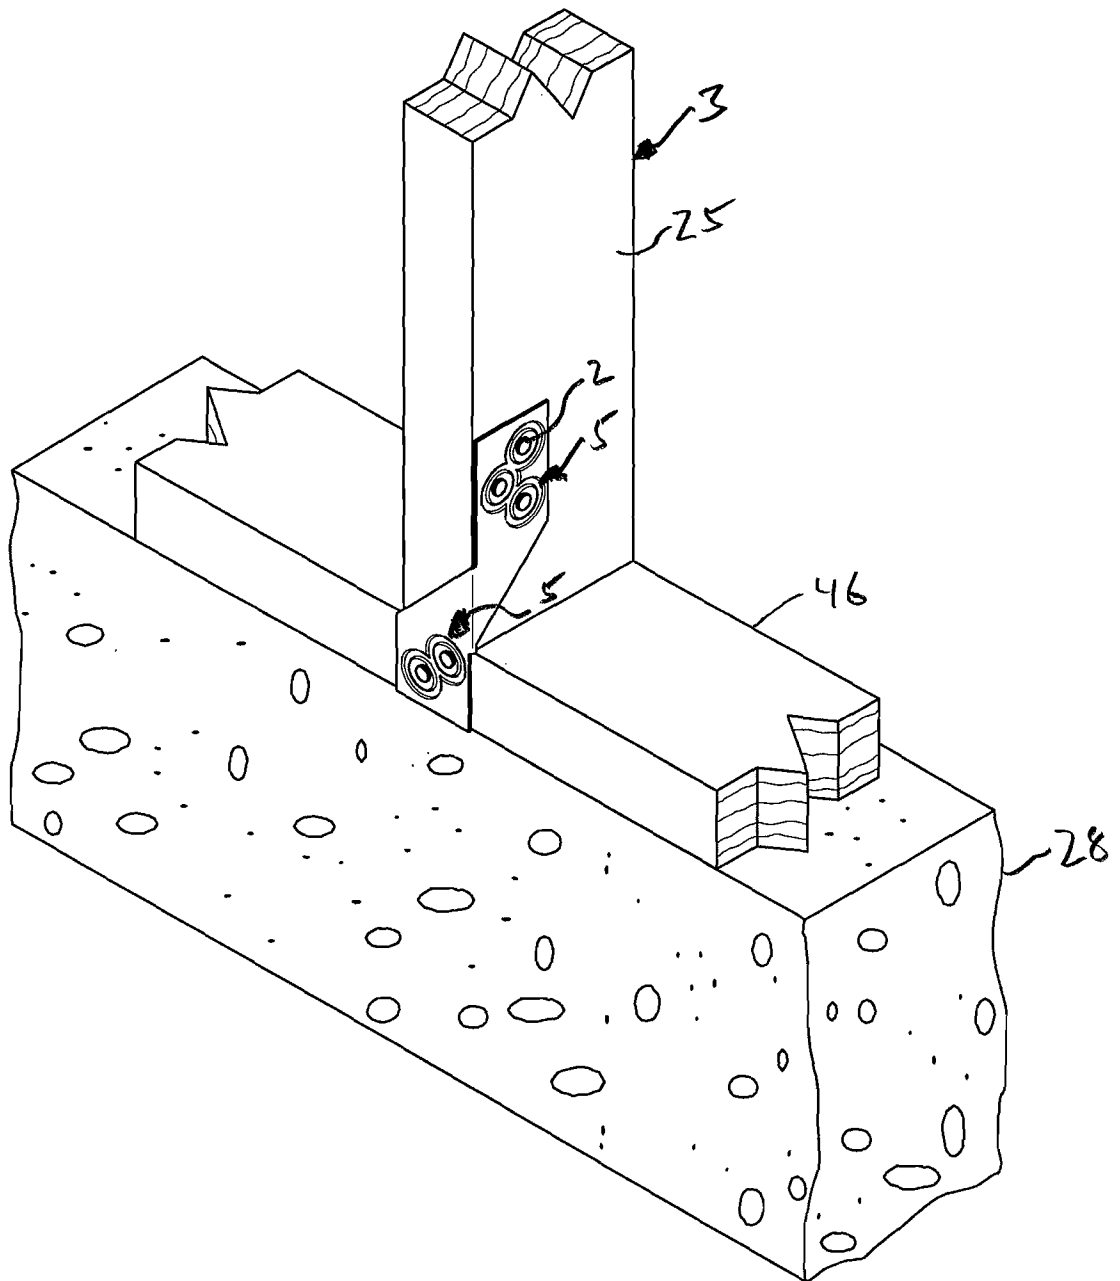


Fig. 25

21/21

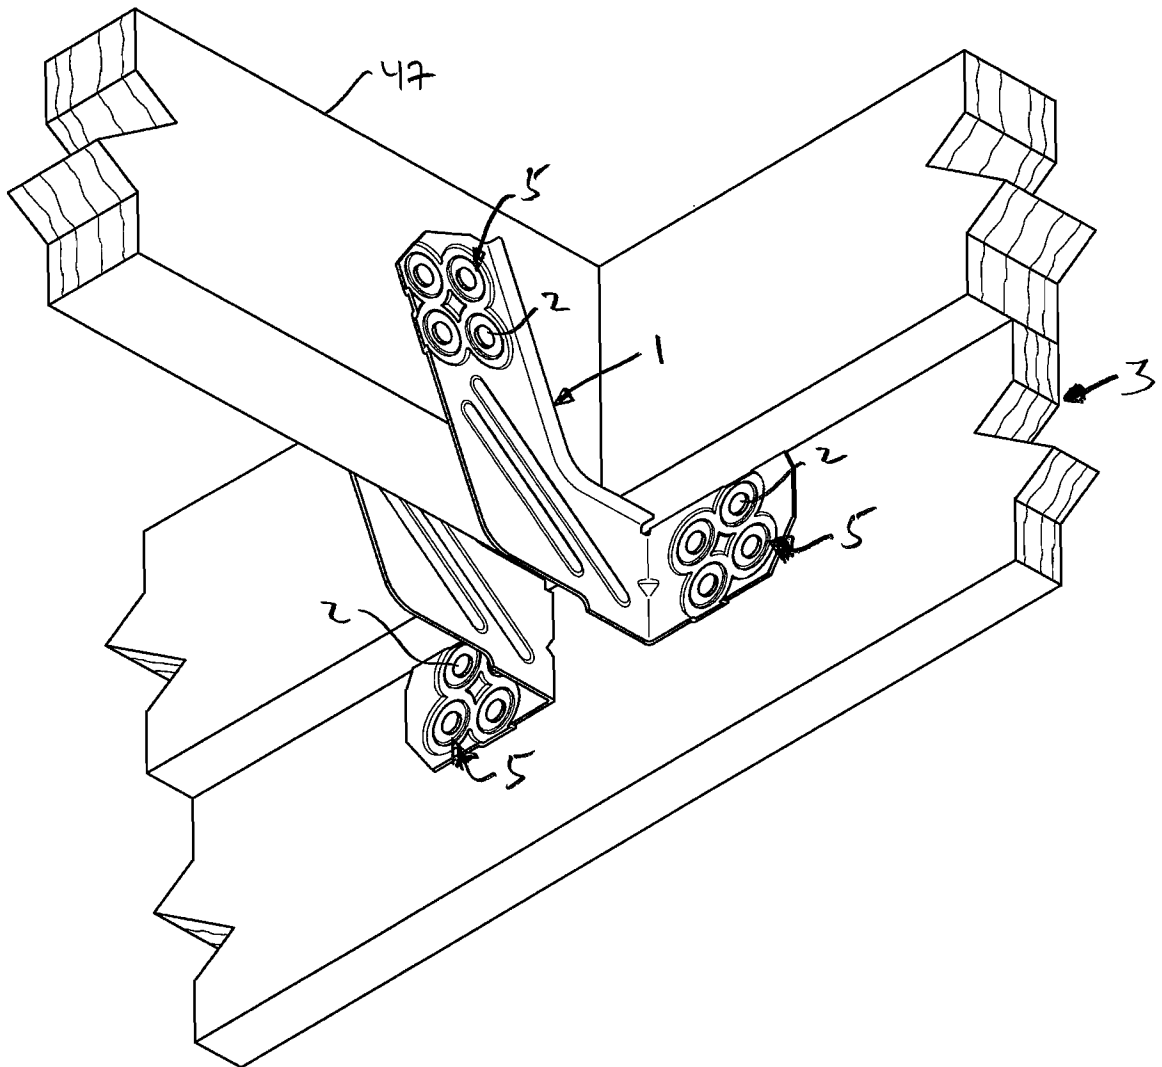


Fig. 26

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2016/041807

A. CLASSIFICATION OF SUBJECT MATTER

INV. B25C7/00 E04B1/26
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E04B B25C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 8 176 689 B1 (THOMPSON THOMAS C [US]) 15 May 2012 (2012-05-15)	1-19
A	column 1, line 9 - line 14 column 4, line 55 - column 5, line 25 column 7, line 38 - column 8, line 65 figures	20-24
A	----- US 8 347 582 B1 (THOMPSON THOMAS C [US]) 8 January 2013 (2013-01-08) column 1, line 18 - line 13 column 6, line 20 - column 12, line 14 claims figures ----- -/--	20-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 October 2016

Date of mailing of the international search report

24/10/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

van Woerden, N

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2016/041807

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 886 731 A1 (SIMPSON STRONG TIE CO INC [US]) 24 June 2015 (2015-06-24) paragraph [0001] paragraph [0058] - paragraph [0087] figures	1-19
A	----- US 2006/191233 A1 (TAMLYN JOHN T [US]) 31 August 2006 (2006-08-31) paragraph [0001] paragraph [0017] - paragraph [0021] figures -----	20-24

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/041807

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 8176689	B1	15-05-2012	NONE
US 8347582	B1	08-01-2013	NONE
EP 2886731	A1	24-06-2015	EP 2886731 A1 24-06-2015
		GB 2515754 A	07-01-2015
US 2006191233	A1	31-08-2006	NONE