



(43) International Publication Date
27 August 2015 (27.08.2015)

- (51) International Patent Classification:
B22D 41/34 (2006.01) B22D 41/56 (2006.01)
- (21) International Application Number:
PCT/EP2015/053313
- (22) International Filing Date:
17 February 2015 (17.02.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14155819.7 19 February 2014 (19.02.2014) EP
- (71) Applicant: VESUVIUS GROUP [BE/BE]; Rue de Douvrain, 17, B-7011 Ghlin (BE).
- (72) Inventors: QUINN, Jason; 2403 Blue Stem Ct., Mahomet, Illinois 61853 (US). SIBIET, Fabrice; Rue de Douvrain, 17, B-7011 Ghlin (BE). VASSELIN, Yannick; Rue de Douvrain, 17, B-7011 Ghlin (BE).
- (74) Agent: DEBLEED, Thierry; Vesuvius Group, Rue de Douvrain, 17, B-7011 Ghlin (BE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: LADLE SHROUD FOR CASTING METAL, KIT OF PARTS FOR COUPLING ASSEMBLY FOR COUPLING SAID LADLE SHROUD TO A LADLE, METAL CASTING INSTALLATION AND COUPLING PROCESS

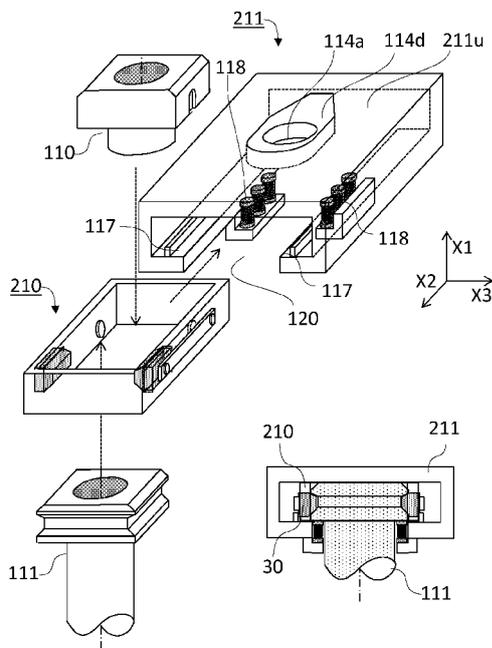


FIG. 7

(57) Abstract: The present invention concerns a metal casting installation comprising a ladle (11) comprising an inner nozzle (113) in fluid communication with the through-opening of a top gate plate (114u), and equipped with a ladle shroud coupling assembly comprising: (a) a support frame (211) comprising a bottom gate plate (114d) and a passage (120), said support frame (211) being slidably coupled to a planar bottom surface of the top gate plate (114u), such that the opening (114a) of the bottom gate plate (114d) can be brought in or out of registry with the through-opening of the top gate plate (114u), (b) a drawer frame (210) inserted in the passage (120) of the support frame (211), such that the drawer frame (210) can be moved back and forth through said passage (120), (c) first and second latches (30) resiliently mounted such that they can move from a coupling position, to a loading position, (d) a specifically designed ladle shroud (111), comprising a bore (115) and gripping means suitable for being reversibly coupled to the first and second latches (30), wherein the drawer frame (210), by moving through the passage (120) of the support frame can bring the bore (115) of the ladle shroud (111) alternatively in and out of registry with the opening (114a) of the bottom gate plate (114d).



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

Ladle shroud for casting metal, kit of parts for coupling assembly for coupling said ladle shroud to a ladle, metal casting installation and coupling process.

Technical Field

[0001] The present invention relates to nozzles for coupling to a ladle in a metal casting installation (in particular to a steel casting installation), referred to as ladle shrouds. In particular, it relates to ladle shrouds which can be loaded to and unloaded from the bottom base of a ladle, slipped into casting position and which can maintain their casting position without any external means such as a manipulator or a robot. The present invention also concerns a kit of part for a coupling assembly allowing such reversible coupling, a metal casting installation comprising such nozzle, and a process of coupling a ladle shroud to the bottom base of a ladle.

Background for the invention

10 [0002] In metal forming processes, molten metal is transferred from one metallurgical vessel to another, to a mould or to a tool. For example, as shown in Figure 1 a ladle (11) is filled with molten metal out of a furnace and transferred over a tundish (10) to cast the molten metal through a ladle shroud (111) into said tundish. The molten metal can then be cast through a pouring nozzle (101) from the tundish to a mould for forming slabs, billets, beams or ingots. Flow
15 of molten metal out of a metallurgic vessel is driven by gravity through a nozzle system (101, 111) located at the bottom of said vessel.

[0003] In particular, the inner surface of the bottom floor of a ladle (11) is provided with an inner nozzle (113) comprising an inner bore. The outlet end (113b) of said inner nozzle is coupled to a gate (114u, 114d), generally a sliding gate or a rotary gate, controlling the flow of molten metal
20 out of the ladle. In order to protect the molten metal from oxidation as it flows from the ladle to a tundish (10), a ladle shroud (111) is brought in fluid communication (via its upper end) with the outlet end of the inner nozzle while its lower end is immersed into the tundish, generally below the level of molten metal; to form a continuous molten metal flow path shielded from any contact with oxygen between the inlet end (113a) of the inner nozzle (113) within the ladle down to the
25 outlet of the ladle shroud immersed in the liquid metal contained in the tundish. A ladle shroud is simply a nozzle comprising a long tubular portion crowned by an upstream coupling portion with a central bore. In many cases, the ladle shroud is inserted about and sealed to a short collector nozzle (110) coupled to, and jutting out of the outer surface of the ladle bottom floor, and which is separated from the inner nozzle (113) by a gate (114u, 114d).

30 [0004] In practice, a ladle is brought to its casting position over a tundish or a mould from a furnace, a converter or another ladle where it was filled with a batch of molten metal, with the gate (114u, 114d) in a closed configuration. During its trips from the furnace, converter or other ladle to the casting position over a tundish and back, the ladle is not coupled to any ladle shroud (111) because the latter is long and it would be dangerous to move a ladle back and forth across
35 a workshop with a long ladle shroud jutting out of its lower base. Once the ladle is at its casting position above a tundish (10), a manipulator or a robot (20) brings a ladle shroud into casting

configuration. As shown in Figure 1(b), in traditional casting installations, the outlet end of the collector nozzle (110) is snugly nested in the bore inlet of the ladle shroud to form a sealing joint. The manipulator or robot (20) must maintain the ladle shroud (111) in its casting configuration during the whole casting of the molten metal batch contained in the ladle (11).

5 When the ladle is empty, the gate is closed and the manipulator or robot takes back the ladle shroud to allow the removal of the empty ladle and replacement by another ladle filled with a new batch of molten metal. The manipulator or robot (20) repeats the foregoing operations with the new ladle and the same or a new ladle shroud. The manipulator or robot (20) must be operational during the whole duration of the casting of molten metal from the ladle into a tundish,
10 and cannot be used in the meantime for other operations, such as measurements of various process parameters, removal of a clogging in the inner nozzle and the like.

[0005] Emergencies may happen, with the gate not functioning properly, requiring the swift removal of the ladle from its casting position to empty the remaining content of molten metal into an appropriate emergency waste area. If the collector nozzle of the ladle (110) is nested in the
15 bore of the ladle shroud (111) with the manipulator or robot firmly gripping the latter in its casting configuration (cf. Figure 1(b)), the emergency removal of the ladle would drag therewith both ladle shroud and manipulator or robot, causing serious damages to the installation. Indeed, the manipulator or robot cannot be dragged very far, and the ladle may be blocked halfway, casting molten metal in an inappropriate area of the workshop causing serious consequences and
20 danger.

[0006] To prevent such accidents to occur, specific ladle shrouds and coupling mechanisms comprising means for holding them in casting configuration without the need of a manipulator or robot have been proposed in the art. This way, the swift removal of a ladle would certainly break the ladle shroud, but would not drag and be stopped by a bulky (and expensive) manipulator or
25 robot in its run.

[0007] For example, JPS09-201657 proposes a ladle shroud provided with coupling means including a bayonet requiring the rotation of the nozzle about its longitudinal axis to block it in its casting configuration. Such rotation can become very difficult as soon as the slightest amount of molten metal flows into and jags the bayonet mechanism upon freezing. Alternatively,
30 JPS09-108825 proposes a ladle shroud comprising two pins on either side thereof suitable for being held in casting configuration by a moving bracket comprising complementary slots for receiving said pins. This mechanism requires an excellent coordination between the loading of a ladle shroud onto the slots of the brackets, and the tilting of the latter in a clamping configuration.

[0008] Once a ladle loaded with a fresh batch of molten metal is brought into casting position, it
35 is not always straightforward to initiate the discharge of molten metal into a tundish by opening the gate (114u, 114d). Indeed, when molten metal contacts the relatively cold walls of the vessel it may freeze forming a solid layer against the walls. The freezing of molten metal should be avoided by all means at the levels of the nozzle system and gate, lest the casting operation should be interrupted to unclog the system. Static molten metal has plenty of time to freeze in

place at the gate during the transfer of the ladle. For this reason, a plugging material (300), usually sand, is often used to fill the bore of the inner nozzle from its inlet to the closed gate to prevent any molten metal from flowing therein, such that metal freezing and clogging of the nozzle and gate system are prevented. Upon opening the gate, the plugging material flows out
5 followed by the molten metal thus preventing any metal from dwelling and freezing in the inner nozzle (113).

[0009] A solid crust of sintered sand impregnated with frozen metal usually forms at the interface between molten metal and sand. In most cases, the crust is thin enough to break under the own weight of molten metal upon opening the gate. Sometimes, however, it may happen that
10 the crust is hard enough to resist the weight of the molten metal. The crust must then be broken or fused with a tool or torch handled manually or with a robot. Because of the length of a ladle shroud, this operation is very cumbersome if the ladle shroud is already coupled to the collector nozzle of the ladle. If the crust resists, a ladle shroud in a traditional installation such as illustrated in Figure 1(b) must be de-coupled from the collector nozzle, the crust broken or
15 molten with a torch to initiate the casting of molten metal. Coupling the ladle shroud again to the collector nozzle as metal is flowing through the collector nozzle is dangerous as spilling of molten metal is unavoidable.

[0010] To eliminate the need of such dangerous operation, a device for inserting and removing ladle nozzles was proposed in WO2004/052576. Though solving a number of the problems
20 discussed above, said device is, however, cumbersome to operate. The device is rather large in size and does not provide the necessary visibility to permit an operator to work with the high precision required for the installation of a ladle shroud. For example, the lack of clearance with the tilting bar and ribs of the ladle and also between the bottom of the tube and the tundish is a drawback of said coupling assembly.

[0011] The present invention proposes a solution solving all the issues raised above, such as
25 providing a ladle shroud that can be inserted and removed easily, which holds in place without the need of any exterior manipulator or robot, and which allows the coupling to a ladle of a short collector nozzle upon initiation of the casting followed by the replacement thereof without spilling of molten metal by a long ladle shroud once casting has successfully initiated. These and other
30 advantages of the present invention are presented in the following sections.

Summary of the invention

[0012] The present invention is defined in the appended independent claims. Preferred
embodiments are defined in the dependent claims and will be discussed hereafter in relation to
the appended figures. In particular, the present invention concerns a shroud (111) for casting
35 metal from a ladle (i.e. a ladle shroud), said nozzle comprising:

(a) a bore (115) extending parallel to a first longitudinal axis, X1, from an inlet orifice (115a) to an outlet orifice (115b),

(b) an inlet portion located at an upstream end of the ladle shroud and consisting of a plate comprising:

- a planar upstream surface (2u) normal to said longitudinal axis, X1, said upstream surface comprising said inlet orifice (115a) and being defined by an upstream perimeter (2p),
- a downstream surface (4d) defined by a downstream perimeter (4p) and separated from the upstream surface by,

- 5 - a peripheral wall contiguous to both upstream (2u) and downstream (4p) perimeters defining the thickness of the plate at the level of the upstream perimeter (2p), and comprising at least a first and a second gripping portions separated from each other by the bore (115),
(c) a tubular portion extending along said first longitudinal axis, X1, from said downstream surface (4d) of the inlet portion to a downstream end, opposite to the upstream end, and where
10 said outlet orifice (115b) is located. The ladle shroud according to the invention is characterised in that, each of said first and second gripping portions of the peripheral wall comprises an upstream protrusion (3) culminating at an upstream ridge (3r) separating a leading edge (3u) facing towards the upstream end of the ladle shroud from a trailing edge (3d) facing towards the downstream end of the ladle shroud, and protruding out beyond the whole peripheral wall of the
15 corresponding gripping portion, said upstream portions (3) extending parallel to the upstream surface (2u) and substantially symmetrically to one another with respect to the longitudinal axis, X1, along the respective first and second gripping portions. The ladle shroud according to the invention is further characterized in that,
- said leading edge (3u) forms with a plane parallel to the upstream surface an angle, α_1 , and
20 - said trailing edge (3d) forms an angle, β_1 , with a plane parallel to the upstream surface (2u), wherein $|\alpha_1| \geq |\beta_1|$.

[0013] In the present document, the terms “*upstream*” and “*downstream*” are used with reference to the casting direction of the molten metal, i.e., “*upstream*” starting from the ladle (11) and “*downstream*” ending in the mould (100). In the following, the space is defined by an
25 orthogonal vectorial system (X1, X2, X3), wherein X1 is the longitudinal axis or direction, X2 the first transverse axis or direction, and X3 the second transverse axis or direction. The longitudinal axis, X1, corresponds in use to a substantially vertical direction parallel to the flow direction of molten metal through the various nozzles. The directions, X2 and X3, therefore define a plane normal to the longitudinal direction, X1, and is substantially horizontal. The term “*substantially*” is
30 used herein because in a workshop, it is impossible to ensure that a vessel such as a tundish is held perfectly horizontally, and consequently, the nozzles, though designed for being used vertically, can therefore often slightly deviate from verticality.

Brief description of the Figures

[0014] For a fuller understanding of the nature of the present invention, reference is made to
35 the following detailed description taken in conjunction with the accompanying drawings in which:

Figure 1: represents a general view of a casting installation for casting metal.

Figure 2: shows a perspective full and cut-out view of a ladle shroud according to three embodiments of the present invention.

Figure 3: shows a sequence of loading a ladle shroud onto a drawer frame slidingly coupled to a

support frame according to an embodiment of the present invention.

Figure 4: shows two embodiments of a drawer frame provided with latches mounted on resilient means in (a)&(c) coupling position and (b)&(d) loading position.

Figure 5: shows a loading sequence of a ladle shroud into a first embodiment of drawer frame.

5 **Figure 6:** shows a loading sequence of a collector nozzle and of a ladle shroud into a second embodiment of drawer frame.

Figure 7: shows a loading sequence of a drawer frame according to Figure 6 into a support frame, and loading of a collector nozzle and ladle shroud into said drawer frame.

10 **Figure 8:** shows a loading sequence of a drawer frame into a support frame equipped with resilient latches, and loading of a collector nozzle and ladle shroud into said drawer frame.

Figure 9: shows the movement of the latches during loading of a ladle shroud.

Figure 10: shows a ladle shroud in coupling position between two latches mounted on (a) a drawer frame and (b) a support frame.

Detailed description of the invention

15 **[0015]** As illustrated in Figure 1 a ladle shroud (111) is to be coupled to a ladle (11) once the latter is in casting position above a tundish (10) or any other metallurgical vessel or mould. A ladle shroud is a long tube used for transferring molten metal from a ladle (11) to a tundish (10) (or other vessel) sheltered from any contact with air to prevent oxidation. As discussed in the introductory section, it is an object of the present invention to provide a ladle shroud which is
20 easy to couple to the bottom base of a ladle (11) and which can be maintained in its casting position without any external tool such as a robot (20).

[0016] Like any ladle shrouds, a ladle shroud (111) according to the present invention comprises a bore (115) extending parallel to a first longitudinal axis, X1, from an inlet orifice (115a) to an outlet orifice (115b). As shown in Figure 1(b), the inlet portion located at an
25 upstream end of prior art ladle shrouds which are to be mounted over a collector nozzle (110) in a nesting relationship, is characterized by a conically tapering bore ending in a circular ridge, designed for snugly fitting a similarly conically tapering portion of a collector nozzle. Sealing contact is ensured at the level of the matching conically tapered collector nozzle and inlet portion of the ladle shroud bore. By contrast, the sealing contact between a ladle (11) and a ladle
30 shroud (111) according to the present invention is ensured by a planar upstream surface slidingly resting against a planar bottom surface of a bottom gate plate (114d) (see e.g., Figure 10). For this reason and as illustrated in Figure 2, the inlet portion of a ladle shroud according to the present invention consists of a plate comprising:

35 - a planar upstream surface (2u) normal to said longitudinal axis, X1, said upstream surface comprising said inlet orifice (115a) and being defined by an upstream perimeter (2p),
- a peripheral wall defining the thickness of the plate at the level of the upstream perimeter (2p) and comprising at least a first and a second gripping portions separated from each other by the bore (115) which extend symmetrically to each other with respect to the longitudinal axis, X1, from corresponding portions of the upstream perimeter (2p) down to,

- a downstream surface (4d) separated from the upstream surface by the height of the peripheral wall and defined by a downstream perimeter (4p).

[0017] Downstream of the downstream surface (4d) of the plate, a ladle shroud according to the present invention comprises a tubular portion similar to prior art ladle shrouds, extending along
5 said first longitudinal axis, X1, from said downstream surface (4d) to a downstream end, opposite the upstream end, and where said outlet orifice (115b) is located. The geometry of the tubular portion, such as its outer diameter, Dt, and of the bore in said tubular portion does not affect the present invention, and any desired shape of the tubular portion known in the art can be applied to a ladle shroud according to the present invention.

10 [0018] A ladle shroud (111) according to the present invention is characterized over the ladle shrouds of the prior art by the geometry of the inlet portion thereof. In particular, as shown in Figure 2, each of said first and second gripping portions of the peripheral wall comprises an upstream protrusion (3) culminating at an upstream ridge (3r) separating a leading edge (3u)
15 facing towards the upstream end of the ladle shroud from a trailing edge (3d) facing towards the downstream end of the ladle shroud. Said upstream protrusion (3) protrudes out beyond the whole peripheral wall of the corresponding gripping portion, said upstream portions (3) extending parallel to the upstream surface (2u) and substantially symmetrically to one another with respect to the longitudinal axis, X1, along the respective first and second gripping portions. The leading edge (3u) of the upstream protrusion forms with a plane parallel to the upstream surface an
20 angle, α_1 , and the trailing edge (3d) forms an angle, β_1 , with a plane parallel to the upstream surface (2u), wherein $|\alpha_1| \geq |\beta_1|$. The angle, α_1 , of the leading edge (3u) is preferably comprised between 45 and 70°, more preferably between 55 and 65° and the angle, β_1 , of the trailing edge (3d) is preferably smaller than the angle, α_1 , and is more preferably comprised between 25 and 45°, most preferably between 35 and 40°. The relevance of the angles, α_1 and β_1 , of the leading
25 edge and trailing edge of the upstream protrusion (3) will be discussed more in details below together with the drawing frame (210) and support frame (211) used to couple such ladle shroud (111) to a ladle (11).

[0019] It is preferred that the peripheral wall of the ladle shroud (111) comprises a third and a
30 fourth gripping portions separated from each other by the bore (115) and extending symmetrically to each other with respect to the longitudinal axis, X1, from corresponding portions of the upstream perimeter (2p) down to corresponding portions of the downstream perimeter (4p). The third and fourth gripping portions preferably have the same geometry and dimensions as, and extending transverse, generally normal to the first and second gripping portions, and comprise an upstream protrusion (3) of same geometry as the one of the first and second
35 gripping portions. The preferred geometry is a square upstream periphery (2p) with curved or preferably straight edges, and with an upstream protrusion (3) as defined above extending along the whole peripheral wall parallel to the upstream surface (2u). This way, an operator needs not check the angular orientation about the longitudinal axis, X1, of the ladle shroud when handling it as any 90°-rotation thereof would thus offer an equivalent coupling configuration of the shroud.

When the upstream surface (2u) must be planar, there is no particular requirement of planarity for any of the remaining surfaces defining the plate of a ladle shroud according to the present invention. It is, however, preferred that the portions of the upstream perimeter (2p) and downstream perimeter (4p) corresponding to each of the first and second gripping portions are straight lines. Similarly, it is preferred that the leading edge (3u) and upstream ridge (3r) of the upstream protrusion (3), as well as the downstream surface (4d) be at least partially planar, preferably fully planar.

[0020] The upstream protrusion (3) can be contiguous to the upstream surface (2u), the base of the leading edge (3u) thereof defining a section or the whole of the upstream perimeter (2p) as illustrated in Figure 2(a). Alternatively, as illustrated in Figure 2(b), the upstream protrusion (3) can be separated from the upstream perimeter (2p) by a portion of the peripheral wall. The exact position of the upstream protrusion (3) depends on the geometry of the drawer frame (210) and support frame (211) to which the ladle shroud (111) is to be coupled, and which are discussed more in details below. The upstream protrusion (3) normally is the first protrusion encountered when running the peripheral wall of the plate from the upstream surface (2u) down to the downstream surface (4d) thereof. The geometry of the upstream protrusion (3) is important as it must be suitable for cooperating with latches mounted on a drawer frame (210) or a support frame (211), to maintain it coupled to the bottom base of a ladle, holding the ladle shroud own weight, while it is not in its casting position. The distance, H_u , from the upstream ridge (3r) of the upstream protrusion (3) to the bottom of the leading edge (3u) measured along a plane parallel to the upstream surface is preferably greater than 5 mm, and more preferably comprised between 6 and 15 mm, most preferably between 8 and 12 mm. The distance, H_d , from the upstream ridge (3r) of the upstream protrusion (3) to the bottom of the trailing edge (3d) measured along a plane parallel to the upstream surface is, on the other hand, equal or different from H_u , and is preferably greater than 5 mm, more preferably comprised between 6 and 15 mm, most preferably between 8 and 12 mm,

[0021] In a preferred embodiment illustrated in Figure 2(c), each of the first and second gripping portions further comprises a downstream protrusion (4) culminating at a downstream ridge (4r) separating a leading edge (4u) facing towards the upstream protrusion (3) from the downstream surface (4d), and extending parallel to the upstream protrusion (3) along the respective first and second gripping portions. The upstream ridge (3r) and the downstream ridge (4r) are thus separated from one another by a recess. As discussed later, the trailing edge (3d) of the upstream protrusion (3), the leading edge (4u) of the downstream protrusion (4), and the recess separating the upstream from the downstream protrusions define a geometry that matches the profile of the latches (30) used to couple a ladle shroud to a ladle (11).

[0022] As shown in Figures 2, 7, 8 and 10, the elements required for coupling a ladle shroud (111) according to the present invention to a ladle (11) comprise:

- (a) a ladle shroud (111) as discussed above,
- (b) a drawer frame (210) for hosting the ladle shroud (111),

(c) a support frame (211) for receiving and coupling the drawer frame (210) to the ladle (11),
(d) a pair of resilient latches (30) mounted either on the drawer frame (210) or on the support
frame (211), for holding the ladle shroud in the drawer frame when not in a casting position,
(e) a gate comprising a top gate plate (114u) and a bottom gate plate (114d) for controlling the
5 flow of molten metal out of the ladle (11), and
(f) optionally, a collector nozzle (110).

[0023] The gist of the invention is the combination of a pair of resilient latches (30) with the
gripping portions of a ladle shroud (111) as discussed supra, wherein the latches (30) are
suitable for engaging the gripping portions of the ladle shroud (111). The resilient latches (30)
10 must be suitable for:

(a) allowing snap fitting engagement of the ladle shroud into a hanging position between the
latches (cf. Figures 3(c)-(e), 9 and 10),
(b) holding the ladle shroud own weight in its hanging position (cf. Figures 3(e), (g)&(h), and 10),
(c) allowing the transfer of the ladle shroud from its hanging position to a casting position,
15 wherein the bore (115) thereof is in registry with the opening (114a) of the lower gate plate
(114d) of a gate (cf. Figure 3(f)&(i)),
(d) allowing the transfer of the ladle shroud from its casting position back to its hanging position
between the latches (cf. Figure 3(g)&(k)), and
(e) allowing disengagement of the ladle shroud from between the latches (cf. Figure 3(l)).

[0024] The assembly for coupling a ladle shroud (111) to a ladle (11) comprises a drawer frame
(210) comprising two longitudinal beams (210x) extending along a first transverse axis, X2,
separated from one another by two transverse beams (210y), thus defining a cavity of area and
perimeter with a width and length measured along the first and second transverse axes, X2, X3,
respectively, which are suitable for snugly accommodating the equivalent of at least one inlet
25 surface (2u) of a ladle shroud (111) as discussed above and illustrated in Figures 4 to 8. The
transverse and longitudinal beams are arranged to form an external outline which can be
inscribed in a rectangle having a longitudinal length measured along a first transverse axis, X2,
and a transverse width measured along a second transverse axis, X3, normal to the first
transverse axis, X2. It is preferred that the longitudinal and transverse beams (210x, 210y) be
30 straight and form a rectangle or even a square as shown in Figure 5. The drawer frame (210)
must be suitable (a) for hosting at least a ladle shroud (111) and (b) for sliding along a
passage (120) of a support frame to bring the bore (115) of a ladle shroud (111) in and out of
registry with the opening (114a) of a bottom gate plate (114d), by means of a hydraulic arm
(40b) coupled to a transverse beam (210y) of the drawer frame (210) (cf. Figure 3(f), (g), (i)&(k)).

[0025] As shown in Figures 1&3, the bottom floor of a ladle (11) comprises an inner nozzle
(113) with a bore extending from an inlet (113a) at an inner end of the inner nozzle to an outlet
(113b) at the opposite end of the inner nozzle, said bore bringing in fluid communication the
interior of the ladle (11) with the exterior thereof. The outlet (113b) of the inner nozzle bore is
35 coupled with a top gate plate (114u) comprising a planar top surface and a planar bottom

surface parallel to the planar top surface and separated therefrom by the thickness of the top gate plate, as shown in Figure 10. The top gate plate (114u) is provided with a through-opening extending through the thickness of the top gate plate from the planar top surface to the planar bottom surface, and is stationarily coupled to the outer surface of the bottom floor of a ladle (11) with the through-opening in fluid communication with the outlet orifice (113b) of the inner nozzle (113). By "*stationarily coupled*," it is meant that, in use, the top gate plate (114u) does not move with respect to the ladle and, in particular, with respect to the inner nozzle.

[0026] The assembly for coupling a ladle shroud (111) to a ladle (11) further comprises a support frame (211). The support frame comprises a top plate (211u) having a top planar surface normal to a longitudinal axis, X1, normal to both first and second transverse axes, X2, X3, and comprising an opening. The top plate (211u) snugly encases a bottom gate plate (114d) having a planar top surface slightly protruding above the top planar surface (211u) of the support frame (211) and a planar bottom surface, parallel to said top surface and separated therefrom by the thickness of the bottom gate plate. The bottom gate plate is provided with an opening (114a) extending through the thickness of the bottom gate plate, parallel to the longitudinal axis, X1. In use, the support frame is coupled to the bottom floor of a ladle (11) such that the top surface of the bottom gate plate (114d) is parallel to and in sliding contact with the bottom surface of the top gate plate (114u) and such that it can slid from a sealed position to a casting position and back by means of a hydraulic arm (40a). In the *sealed position*, the opening (114a) of the bottom gate (114d) is out of registry with the through-opening of the top gate plate (114u) (cf. Figure 3(a)-(e)&(j)-(l)), and in the *casting position* the opening (114a) of the bottom gate (114d) is in registry with the through-opening of the top gate plate (114u) (cf. Figure 3(f)-(i)). Casting of molten metal through the ladle shroud (111) is only possible when,

(a) the ladle shroud and drawer frame (210) are in their casting position with the bore (115) of the ladle shroud (111) in registry with the opening (114a) of the bottom gate plate (114d), and (b) the support frame (211) is in its casting position with the opening (114a) of the bottom gate plate (114d) in fluid communication with the through opening of the top gate plate (114u) and thus with the bore of the inner nozzle (113).

[0027] For allowing the sliding of the drawer frame (210) holding a ladle shroud (111) to its casting position, the support frame (211) comprises a T-shaped passage (120) extending from a frame inlet along the first transverse axis, X2. The vertical bar of the T-passage (120) is suitable for allowing passage of the tubular portion of a ladle shroud (111), whilst the horizontal bar of the T-passage (120) -which extends parallel to the second transverse axis, X3- is suitable for accommodating the drawer frame (210) and sliding it along the passage on two guiding rails (117). The two guiding rails (117) extend along the first transverse axis, X2, and parallel to said top planar surface of the top plate (211u), on each protruding end of the horizontal bar of the T-passage, on either side of the vertical bar of the T-passage. The guiding rails are separated from one another by a gap having a width measured along the second transverse axis, X3, which is superior to the diameter, Dt, of the tubular portion of the ladle shroud and slightly inferior to the

transverse width of the rectangle in which the drawer frame (210) is inscribed. In order to allow the insertion from the bottom into the drawer frame (210) of a collector nozzle, the gap should have a width, at least locally greater than the width of the ladle shroud plate and thus of the cavity defined by the drawer frame (210). In other words, the guiding rails (117) should be

5 suitable for supporting in a sliding relationship the longitudinal beams (210x) of the drawer frame (210), without extending, at least locally over the cavity thereof.

[0028] Finally, the support frame (211) must comprise two sets of pushers (118) or rockers positioned adjacent to the two bottom guiding rails (118) on either side of the gap, at the level of the bottom gate plate opening. Pushers (118) or rockers are well known in the art with respect to

10 pouring nozzles used in tube exchange devices coupled to the bottom floor of a tundish (10) such as disclosed e.g., in WO2011/113597. Pushers are used for pressing the upstream surface (2u) of a ladle shroud (111) in tight and sealed contact against the lower surface of a bottom gate plate (114d), when the drawing frame (210) and thus the ladle shroud (111) are in their casting position with the ladle shroud bore (115) in registry with the opening (114a) of the bottom

15 gate plate (114d). When the ladle shroud (111) is not in casting position, the coupling assembly must support the ladle shroud own weight only, and the latter can therefore hang on the latches only. When the drawer frame is slid together with the ladle shroud into their casting position, the ladle shroud rests on the pushers (118) or rockers. This is necessary because the pushers ensure, on the one hand, a sealed contact between the ladle shroud and the bottom gate plate

20 and, on the other hand, a strong coupling to the ladle (11) able to resist the pressure of flowing metal through the ladle shroud and, in particular, any hammer possible in particular at the beginning of the casting operation or in case of loosened solid lumps which may have temporarily clogged the bore.

[0029] The resilient latches (30) can be mounted on the drawer frame (210) as illustrated in

25 Figures 3-7-and 10(a). Alternatively they can be mounted on the support frame (211) as illustrated in Figures 8 and 10(b). All that is required is that when the drawer frame (210) is inserted in the passage (120) of the support frame (211), said first and second latches can be located above or below the top sliding surface of the two guiding rails, vis-à-vis one another on either side of the gap formed between the guiding rails. The terms "above" and "below" refer

30 herein to the position with respect to the sliding surfaces when the support frame and drawer are coupled to a ladle ready for casting. In case the latches are mounted on the support frame (211) (cf. Figures 8&10(b)), the latches should be offset in the first transverse direction, X2, with respect to the opening (114a) of the bottom gate plate (114d) and thus of the pushers (118) or rockers, to allow enough clearance for the insertion between the two latches of a ladle shroud

35 from the bottom. If the latches (30) are mounted on the drawer frame (210), they will follow the translating movements of the ladle shroud (111) between its hanging and casting positions as the hydraulic arm (40b) moves the drawer frame back and forth. This means that, unlike in the case wherein the latches are mounted on the support frame (211), the ladle shroud (111) remains in contact with the latches also in its casting position. This is not a problem, since the

latches are designed to prevent the ladle shroud from falling down under its own weight, and the pushers apply an upward force onto the downstream surface (4d) of the ladle shroud plate, pressing the upper surface (2u) against the bottom gate plate (114d). These two operations are quite compatible with one another and the latches thus do not interfere with the pushers.

5 [0030] As shown in Figure 9, each of the two resilient latches (30) comprises a chamfered upstream surface (30u) forming an angle, β_1 , with a plane parallel to the first and second transverse axes, X2-X3, substantially equal to the angle, β_1 , formed by the trailing edge (3d) of the upstream protrusion (3) of a ladle shroud (111) according to the present invention, so that the ladle shroud (111) can rest on a matching surface of the latches. Each of the two resilient
10 latches (30) also comprises a chamfered downstream surface (30d) forming an angle, α_1 , with a plane parallel to the first and second transverse axes, X2-X3, substantially equal to the angle, α_1 , formed by the leading edge (3u) of the upstream protrusion (3) of a ladle shroud (111).

[0031] In case the ladle shroud (111) comprises a downstream protrusion (4) as illustrated in Figure 2(c), the leading edge (4u) of said downstream protrusion should form the same angle,
15 α_1 , as the downstream surface (30d) of the latches so that the two surfaces are in matching contact as illustrated in Figure 10. In this configuration, the ladle shroud geometry defined by the recess formed between the upstream and downstream protrusions (3, 4) should match the geometry of the latches (30) defined by the upstream and downstream surfaces (30u, 30d) and the surface separating them. This allows a stable and reproducible gripping of a ladle shroud
20 between the latches.

[0032] As can be seen in Figure 9, the latches (30) are movable back and forth along the second transverse axis, X3, from a coupling position to a loading position. In the coupling position, the first and second latches are closest to one another, separated by a distance, d, as illustrated in the top set of latches of Figure 9, with the upstream and downstream chamfered
25 surfaces of the first and second latches protruding out in the gap between the two guiding rails. If a ladle shroud (111) is inserted between the two latches (30) in their coupling position, the trailing edge (3d) of the ladle shroud upstream protrusions (3) can rest on the matching upstream surfaces (30u) of the latches, and the ladle shroud cannot fall down under its own weight. In the loading position, the first and second latches are furthest apart, separated by a
30 distance of about $d + 2H_d$, wherein H_d is the height of a trailing edge (3d) of a ladle shroud upstream protrusion (3). In this loading position the first and second latches do not protrude in the gap between the two guiding rails and a ladle shroud can be inserted from below between the two latches when they are in their loading position.

[0033] In order to provide a snap-fit effect upon introducing a ladle shroud (111) from below
35 between two latches, they are mounted on resilient means (31) naturally biased to drive the latches to their coupling position (cf. Figures 4&9). This way, as a ladle shroud (111) is introduced from below a drawer frame (210) inserted in a support frame (211) (cf. Figure 3(b)), the leading edges (3u) of the upstream protrusions (3) of the ladle shroud, which form an angle, α_1 , contact the downstream surfaces (30d) of the latches (30) which form the same angle, α_1

(cf. Figure 3(c)). By pressing upwards the ladle shrouds against the downstream surfaces (30d) of the latches, the latches (30) will recede as the ladle shroud is pushed up, by sliding along the leading edges (3u), until the latches are pushed back to the level of the upstream ridges (3r) of the upstream protrusions (3) where they reach their loading position (cf. Figures 3(d) and 9 (bottom)). By pushing the ladle shroud further up, the upstream ridges (3r) are brought passed the latches, which spring back to their coupling position, driven by the resilient means (cf. Figures 3(e)&10). At this stage, the trailing edges (3d), forming an angle, β_1 , contact the matching upstream surfaces (30u) of the latches (30) which form the same angle, β_1 , and the ladle shroud (111) is thus coupled to the ladle (11) and capable of remaining thus coupled without any external tool or robot (20).

[0034] One great advantage of the latches (30) in the present invention is that the coupling of the ladle shroud to the ladle is reversible and that a ladle shroud (111) can easily be un-coupled from the ladle (11) by simply pulling downwards the ladle shroud, e.g., with a robot (20), with sufficient force for the latches to recede as the upstream surfaces (30u) of the latches slide along the trailing edge (3d) of the upstream protrusion (3), until they reach the level of the upstream ridge (3r) where the latches are at their loading position. Pulling the ladle shroud further down will disengage it from the latches which return to their coupling position, driven by the resilient means (31). The angles, α_1 & β_1 , and the stiffness of the resilient means (31) must be such that (a) it is easy to insert a ladle shroud between two latches by pushing it up with a reasonable force, (b) the ladle shroud is supported by the latches which can hold the ladle shroud own weight, and (c) it is easy to disengage the ladle shroud by pulling it down with a reasonable force. For this reason, it is preferred that the leading edge (3u) of the upstream protrusion (3) be slanted by an angle, α_1 , which is greater than the angle, β_1 , formed by the trailing edge (3d) of the upstream protrusion (3). This way, it is easier to move the resilient latches to their loading position when inserting a ladle shroud than when disengaging it from the latches, since the sliding angle, α_1 , between the leading edge (3u) and the downstream surface (30d) of the latches (30) is larger than the sliding angle, β_1 , between the trailing edge (3d) and the upstream surface (30u) of the latches (30) (i.e., sliding angle, β_1 , is more horizontal). This is important since when inserting a ladle shroud, the robot must apply a force sufficient to carry the ladle shroud own weight and to push the latches to their loading position, whilst when disengaging a ladle shroud, the ladle shroud own weight actually helps pushing the latches back to their loading position.

[0035] The resilient means (31) can be any resilient means known in the art. In particular, in a first embodiment illustrated in Figures 3, 4(a)&(b), 5, and 8-10, the resilient means (31) comprise a coil spring, preferably enclosing a telescopic axle (32) visible in Figure 9, said coil spring being coupled to a latch and sandwiched between the latch (30) and a catch fixed at constant distance along the second transverse axis, X3, from the corresponding guiding rails (117). In a second embodiment illustrated in Figures 4(c)&(d), 6&7, the resilient means (31) comprise a cantilever spring consisting of an elastically flexible leaf pushing at one end thereof to the latch (30) and at

the opposite end either to the corresponding longitudinal beam (210x) of the drawer frame (210) or below the top sliding surface of the two bottom guiding rails (117) of the support frame (211).

[0036] The drawer frame (210) illustrated in Figure 5 defines a cavity suitable for hosting a single ladle shroud (111) which can be inserted between two latches (30) resiliently mounted on the longitudinal beams (210x) and provided with coil springs (31) as discussed supra with respect to the first embodiment. It can be seen that the latches are preferably engaged in an aperture on each longitudinal beam (210x) which face each other. By means of a telescopic axle (32) and coil spring (31) the latches (30) can reversibly and resiliently move through said aperture along the second transverse direction, X3 between their coupling and loading positions and back.

[0037] Figure 4 shows two embodiments of drawer frames (210) which have in common that the cavity can host two ladle shroud plates positioned side by side along the first transverse direction, X2. This geometry allows engaging in the drawer frame a ladle shroud (111) and a collector nozzle (110). A collector nozzle (110) comprises an inlet portion comprising a plate with a planar upstream surface, and a tubular portion which is very short. A bore extends from the upstream surface to the end of the short tubular portion. The use of such collector nozzle (110) is explained below with respect to Figure 3. The same resilient means according to the first embodiment and as discussed with respect to Figure 5 are represented in Figure 4(a)&(b).

Figure 4(c)&(d) show a second, alternative embodiment of an elastically flexible leaf fixed in cantilever at one end thereof to the longitudinal beam (210x) of the drawer frame (210) and at the opposite end to the latch (30). Again, the latch can resiliently move back and forth along the second transverse axis, X3, through apertures located in the longitudinal beams (210x).

Figure 4(a)&(c) show the latches in their coupling position, and Figure 4(b)&(d) in their loading position.

[0038] Figure 8 shows a drawer frame (210) devoid of any latches (30), the latches being mounted on the support frame (211) below the top sliding surface of the two bottom guiding rails (117). In this case the drawer frame (210) is of very simple construction. This is particularly true for a drawer frame (210) designed for hosting a single ladle shroud and no collector nozzle (this is not the case in Figure 8). Regardless of whether for one or two nozzles, such drawer frame is nonetheless useful because a hydraulic arm (40b) can be coupled to one of the transverse beams (210y) for sliding the drawer frame in and out of its casting position (cf. Figure 3(a)&(b)). It is not so easy to couple the hydraulic arm (40b) directly to a ladle shroud.

[0039] Figures 5 to 8 show the interactions with one another of a ladle shroud (111), optionally a collector nozzle (110), a drawer frame (210) and a support frame (211) which is slidingly coupled to a ladle as explained supra. The drawer frame (210) is engaged into the T-passage (120) of the support frame with the longitudinal beams (210x) of the drawer frame (210) resting on the guiding rails (117). By connecting a hydraulic arm (40b) to a transverse beam (210y) of the drawer frame (210), the latter can be moved in and out of its casting position by sliding along the guiding rails (117). In case of a drawer frame capable of hosting both a ladle shroud (111)

and a collector nozzle (110) as illustrated in Figures 7&8, it can be loaded in the drawer frame (210) before or after engaging the drawer frame (210) into the T-passage (120). Once the drawer frame (210) is engaged in the T-passage it is moved to a receiving position, wherein a ladle shroud (111) can be loaded up from the bottom into its corresponding position in the cavity defined by the drawer frame (210) and hung between the resilient latches (30). If the drawer frame hosts a collector nozzle (110) too, as illustrated in Figures 7&8, when the drawer frame (210) is in its receiving position, the collector nozzle (110) is preferably resting on the pushers (118) or rockers. This configuration illustrated in Figure 3(c) permits to reduce the size of the support frame (211).

5 [0040] In its receiving position in the T-passage, the drawer frame (210) is ready for receiving a ladle shroud (111) in the cavity as explained supra, by pushing it up with a robot (20) or other handling tool, through the resilient latches (30) until the trailing edges (3d) of the upstream protrusions (3) rest on the upstream surfaces (30u) of the latches, and the ladle shroud safely hangs below the ladle (10) in an idle position. By actuating the hydraulic arm (40b) the drawer frame (210) together with the ladle shroud (111) engaged in the cavity thereof, can be moved to their casting position wherein the bore (115) of the ladle shroud is in registry with the opening (114a) of the bottom gate plate (114d). In this position, the pushers (118) press on the downstream surface (4d) of the ladle shroud plate such as to form a sealing contact between the upstream surface (2u) of the ladle shroud and the lower surface of the bottom gate plate (114d).
15 If the drawer frame (210) hosts a collector nozzle (110), the latter is moved to an idle position as shown in Figure 3(f). Figures 7&8 only differ from one another in the position of the resilient latches (30): in Figure 7 they are engaged in openings provided in the longitudinal walls (210x) of the drawer frame (210), and in Figure 8 they are mounted on the support frame, below the guiding rails (117) and beside the pushers (118) in the longitudinal direction, X1. Similarly,
25 Figure 10(a) shows an embodiment with latches mounted on the drawer frame (210) and Figure 10(b) shows an embodiment with latches mounted on the support frame.

[0041] Figure 3 illustrates a number of process steps possible with a coupling assembly according to the present invention. For each step referred by a letter in parentheses, two cut views are showed along two orthogonal planes (X1, X3) and (X1, X2), referred to with the numerals 1 and 2, respectively. In the present description, each step is referred to by its letter only without specifying the numeral 1 or 2, unless referring to a particular view. In particular; for example, Figure 3(a) refers to both Figure 3(a1) and Figure 3(a2).

[0042] Figure 3(a) shows the bottom floor of a ladle (11) comprising an inner nozzle (113) in contact with a top gate plate (114u) such that the bore (113a, 113b) of the inner nozzle is in fluid communication with the through opening of the top gate plate. As discussed above, the position of the top gate plate (114u) remains fixed with respect to the ladle bottom floor throughout the casting operations. A support frame is coupled to the ladle (11) such that the opening (114a) of the bottom gate (114d) is out of registry with the through opening of the top gate plate (114u). The support frame (211) with bottom gate plate (114d) can slide by means of a hydraulic arm

(40a) such as to bring the opening (114a) of the bottom gate plate (114d) in and out of registry with the through opening of the top gate plate (114u). A drawer frame (210) loaded with a collector nozzle (110) is shown separate from the support frame (211). The collector nozzle (110) can be loaded on the drawer frame (210) before or after the latter is engaged in the T-
5 passage of the support frame (211).

[0043] In Figure 3(b) the drawer frame (210) is inserted into the T-passage (120). A transverse beam (210y) is coupled to a hydraulic arm (40b). The hydraulic arm (40b) moves the drawer frame (210) to its receiving position, ready to receive a ladle shroud (111) and with the collector nozzle (110) resting on the pushers (118) with the bore thereof in registry with the opening
10 (114a) of the bottom gate (114d). A ladle shroud (111) is brought below the support frame and drawer frame with a robot (20) or any other handling tool.

[0044] In Figure 3(c) to (e) the ladle shroud (111) is pushed up between the latches (30) into its position in the cavity defined by the drawer frame (210) until the trailing edges (3d) of the upstream protrusions (3) rest on the upstream surfaces (30u) of the latches (30). At this stage,
15 neither the support frame (211) nor the drawer frame (210) have been moved by the respective hydraulic arms (40a, 40b) with respect to their respective positions in Figure 3(b).

[0045] Figure 3(e) shows a particular technique discussed in the introductory section above and traditionally used to prevent stagnant metal melt from freezing in the bore of the inner nozzle (113) prior to initiating casting. Before filling a ladle with molten metal (200), the bore of the inner
20 nozzle (113) is filled with a plugging material (300), usually sand. Upon filling the ladle, some molten metal percolates a short distance through the sand bed (300) and freezes forming a solid cap (301) made of a mixture of sand particles and solid metal, thus preventing molten metal (200) from flowing through the bore inlet (113a).

[0046] As illustrated in Figure 3(f), upon sliding, on the one hand, the drawer frame (210) with
25 the hydraulic arm (40b) to its casting position, with the bore (115) thereof in registry with the opening (114a) of the bottom gate plate (114d) and, on the other hand, the support frame (211) with the hydraulic arm (40a) to its casting position, wherein the top and bottom gate plates (114u, 114d) and their respective openings are aligned, the plugging material flows out of the inner nozzle bore, through the gate (114u, 114d) and out of the ladle shroud (111) into the
30 bottom of a tundish (10). Most of the times the weight of the molten metal pressing upon the cap (301) is sufficient to break the crust (301) and casting of molten metal through the ladle shroud (111) into a tundish can thus start. In some cases, however, illustrated in Figure 3(g), the crust forming the cap (301) is sufficiently thick to resist the pressure of the molten metal and seals the bore inlet (113a) of the inner nozzle so that the casting process cannot start. It is therefore
35 necessary to break such cap with a tool. Generally a torch (21) is inserted from below into the bore of a collector nozzle (110) and used to melt the crust of the cap (301).

[0047] In traditional installations the collector nozzle is nested in the conically tapering bore of the ladle shroud as shown in Figure 1(b). Because of the length of the tubular portion of the ladle shroud, this must first be removed from the collector nozzle before a torch (21) can be inserted

to melt the crust (301) to initiate flow of molten metal through the collector nozzle. At this stage the ladle shroud must rapidly be re-inserted over the collector nozzle to shield the flowing metal from oxygen. This operation is very cumbersome and dangerous as spilling of molten metal is inevitable upon re-insertion of the ladle shroud during flow of molten metal.

5 [0048] With the coupling assembly of the present invention, the ladle shroud (111) and collector nozzle (110) are aligned side by side in the drawer frame (210). In case of clogging of the inner nozzle, the collector nozzle (110) can be brought to casting position by sliding the drawer frame (210) with the hydraulic arm (40b) (cf. Figure 3(g)). This operation brings the ladle shroud (111) to its idle position, such that it is held by the latches (30) only (cf. Figure 3(g2)&(h2)). Access to
10 the bore of the inner nozzle is very easy through the collector nozzle (110). When the crust (301) is melted, molten metal can flow through the inner nozzle (113), gate (114u, 114d) and collector nozzle (110). At this stage, as illustrated in Figure 3(i), the hydraulic arm (40b) can be activated to slide the drawer frame (210) to bring the ladle shroud (111) back to its casting position.

Casting of molten metal into a tundish can thus be started easily, rapidly, and with no spilling of
15 molten metal as the ladle shroud (111) is brought to its casting position. The danger of such operation has thus been substantially reduced compared with traditional metallurgic installations.

[0049] As shown in Figure 3(j), when the ladle is empty (or it has been decided to stop the casting operation from the ladle), the hydraulic arm (40a) is actuated to slide the support frame (211) to seal the gate by bringing the opening (114a) of the bottom gate plate (114d) out of
20 registry with the through-hole of the top gate plate (114u). As shown in Figure 3(k) the ladle shroud (111) is then brought to its idle position, off the pushers (118), by sliding the drawer frame (210) with the hydraulic arm (40b), such that the ladle shroud (111) hangs on the latches (30) only. Figure 3(l) shows how a robot (20) can grab the ladle shroud (111) and force its passage down through the resilient latches (30) and thus be removed from the ladle (11).

25 [0050] The coupling assembly of the present invention comprising a support frame (211), a drawer frame (210), and a ladle shroud (111) as defined above allows a very clean and reproducible casting operation from a ladle (11). This assembly is also advantageous in that many operations can be automated and controlled by a central processing unit (CPU), thus
30 further increasing the security level of such operations.

List of reference numerals

- 2 p upstream perimeter
- 2 u planar upstream surface of ladle shroud
- 3 d trailing edge of UP (3)
- 3 r upstream ridge of UP (3)
- 3 u leading edge of UP (3)
- 3 upstream protrusion (UP)
- 4 d downstream surface
- 4 p downstream perimeter
- 4 r downstream ridge
- 4 u leading edge of DP (4)
- 4 downstream protrusion (DP)
- 10 tundish
- 11 ladle
- 20 robot or handling tool
- 21 torch
- 30 d downstream chamfered surface
- 30 u upstream chamfered surface
- 30 first and second latches
- 31 resilient means of latches
- 32 telescopic axle
- 40 a hydraulic arm for support frame (211)
- 40 b hydraulic arm for drawer frame (210)
- 100 mould
- 101 pouring nozzle
- 110 collector nozzle
- 111 ladle shroud
- 113 Inner nozzle
- 113 a Inlet orifice of inner nozzle (113)
- 113 b outlet orifice of inner nozzle (113)
- 114 a opening of the bottom gate plate 114d
- 114 d bottom gate plate
- 114 u top gate plate
- 115 a inlet orifice
- 115 b outlet orifice
- 115 bore
- 117 bottom guiding rails
- 118 pushers
- 120 T-shaped passage
- 200 Molten metal
- 210 x longitudinal beams of DF (210)
- 210 y transverse beams of DF (210)
- 210 drawer frame (DF)
- 211 u top plate of support frame (211)
- 211 support frame
- 300 Plugging material
- 301 Crust of sintered material
- α 1 angle of leading edge 3u

α 2 angle of leading edge 4u
 β 1 angle of trailing edge 3d
H d height of trailing edge 3d
H u height of leading edge 3u

Claims.

1. Shroud (111) for casting metal from a ladle, said nozzle comprising:
 - (a) a bore (115) extending parallel to a first longitudinal axis, X1, from an inlet orifice (115a) to an outlet orifice (115b),
 - 5 (b) an inlet portion located at an upstream end of the ladle shroud and consisting of a plate comprising:
 - a planar upstream surface (2u) normal to said longitudinal axis, X1, said upstream surface comprising said inlet orifice (115a) and being defined by an upstream perimeter (2p),
 - a downstream surface (4d) defined by a downstream perimeter (4p) and separated
 - 10 from the upstream surface by,
 - a peripheral wall contiguous to both upstream (2p) and downstream (4p) perimeters defining the thickness of the plate at the level of the upstream perimeter (2p), and comprising at least a first and a second gripping portions separated from each other by the bore (115),
 - 15 (c) a tubular portion extending along said first longitudinal axis, X1, from said downstream surface (4d) of the inlet portion to a downstream end, opposite to the upstream end, and where said outlet orifice (115b) is located,

characterised in that, each of said first and second gripping portions of the peripheral wall comprises an upstream protrusion (3) culminating at an upstream ridge (3r) separating a

 - 20 leading edge (3u) facing towards the upstream end of the ladle shroud from a trailing edge (3d) facing towards the downstream end of the ladle shroud, and protruding out beyond the whole peripheral wall of the corresponding gripping portion, said upstream portions (3) extending parallel to the upstream surface (2u) and substantially symmetrically to one another with respect to the longitudinal axis, X1, along the respective first and second
 - 25 gripping portions **and in that**,
 - said leading edge (3u) forms with a plane parallel to the upstream surface an angle, α_1 , and
 - said trailing edge (3d) forms an angle, β_1 , with a plane parallel to the upstream surface (2u), wherein $|\alpha_1| \geq |\beta_1|$.
- 30 2. Ladle shroud according to claim 1, wherein said peripheral wall comprises a third and a fourth gripping portions separated from each other by the bore (115), said third and fourth gripping portions having same geometry and dimensions as, and extending contiguously transverse to the first and second gripping portions, and comprising an upstream protrusion (3) of same geometry as the one of the first and second gripping portions.
- 35 3. Ladle shroud according to claim 1 or 2, wherein α_1 is comprised between 45 and 70°, preferably between 55 and 65° and wherein β_1 is preferably comprised between 25 and 45°, more preferably between 35 and 40°.

4. Ladle shroud according to any of the preceding claims, wherein in each of the first and second gripping portions:
- the distance, H_u , from the upstream ridge (3r) of the upstream protrusion (3) to the bottom of the leading edge (3u) measured along a plane parallel to the upstream surface is greater than 5 mm, preferably comprised between 6 and 15 mm, more preferably between 8 and 12 mm, and
 - the distance, H_d , from the upstream ridge (3r) of the upstream protrusion (3) to the bottom of the trailing edge (3d) measured along a plane parallel to the upstream surface is equal or different from H_u , and is greater than 5 mm, preferably comprised between 6 and 15 mm, more preferably between 8 and 12 mm.
5. Ladle shroud according to any of the preceding claims, wherein each of the first and second gripping portions further comprises a downstream protrusion (4) culminating at a downstream ridge (4r) separating a leading edge (4u) facing towards the upstream protrusion (3) from the downstream surface (4d), and extending parallel to the upstream protrusion (3) along the respective first and second gripping portions, the upstream ridge (3r) and downstream ridge (4r) being separated from one another by a recess.
6. Ladle shroud according to any of the preceding claims, wherein the portions of the upstream perimeter (2p) and downstream perimeter (4p) corresponding to each of the first and second gripping portions are straight lines.
7. Kit of parts for fluidly coupling a ladle shroud (111) according to any of the preceding claims to the outlet orifice (113b) of an inner nozzle (113) of a ladle (11), at the outer surface of the bottom floor of said ladle, said kit of parts comprising:
- (a) a drawer frame (210) comprising two longitudinal beams (210x) extending along a first transverse axis, X_2 , separated from one another by two transverse beams (210y), thus defining a cavity of area and perimeter suitable for snugly accommodating the equivalent of at least one inlet surface (2u) of a ladle shroud (111) according to any of the preceding claims, the transverse and longitudinal beams being so arranged as to form an external outline which can be inscribed in a rectangle having a longitudinal length measured along a first transverse axis, X_2 , and a transverse width measured along a second transverse axis, X_3 , normal to the first transverse axis, X_2 ,
 - (b) a top gate plate (114u), comprising a planar top surface and a planar bottom surface parallel to the planar top surface and separated therefrom by the thickness of the top gate plate, and being provided with a through-opening extending through the thickness of the top gate plate from the planar top surface to the planar bottom surface, said top gate plate (114u) being suitable for being stationarily coupled to the outer surface of the bottom floor of a ladle (11) with the through-opening in fluid communication with the outlet orifice (113b) of the inner nozzle (113),

(c) a support frame (211) suitable for being coupled to the outer surface of the bottom floor of a ladle (11) such that it can be slid from a sealed position to a casting position and back, said support frame comprising:

- 5 - a top plate (211u) having a top planar surface normal to a longitudinal axis, X1, normal to both first and second transverse axes, X2, X3, and comprising an opening in which is snugly encased,
 - 10 - a bottom gate plate (114d) having a top surface slightly protruding above the top planar surface (211u) of the support frame (211) and a bottom surface, parallel to said top surface and separated therefrom by the thickness of the bottom gate plate, said bottom gate plate being provided with an opening (114a) extending through the thickness of the bottom gate plate, parallel to the longitudinal axis, X1, and wherein when the support frame is coupled to the ladle, the top surface of the bottom gate plate (114d) is parallel to and in sliding contact with the bottom surface of the top gate plate (114u), such that upon sliding the support frame (211) from its sealed position to its casting position, the opening (114a) of the bottom gate plate is moved from a position wherein it is sealed from the through-opening of the top gate plate (114u) to a position where it is in fluid communication with the through opening of the top gate plate,
 - 15 - two guiding rails (117) extending along said first transverse axis, X2, and parallel to said top planar surface of the top plate (211u), and separated from one another by a gap having a width measured along said second transverse axis, X3, which is smaller than the transverse width of the rectangle in which the external outline of the drawer frame (210) is inscribed, and which is at least locally larger than the width measured along the second transverse axis, X3, of the cavity defined in the drawer frame;
 - 20 - a T-shaped passage (120) extending from a frame inlet along the first transverse axis, X2, said opening being suitable for accommodating the drawer frame (210) and sliding it along the passage on the two guiding rails (117),
 - 25 - two sets of pushers (118) or rockers positioned adjacent to the two bottom guiding rails on either side of the gap, at the level of the bottom gate plate opening,
- characterized in that**, the kit of parts further comprises a first and second latches (30)
- 30 wherein, when the drawer frame (210) is inserted in the passage (120) of the support frame (211), said first and second latches,
 - are facing one another on either side of the gap formed between the guiding rails,
 - have a chamfered upstream surface (30u) forming an angle, β_1 , with a plane parallel to the first and second transverse axes, X2-X3, substantially equal to the angle, β_1 , formed by the trailing edge (3d) of the upstream protrusion (3) of a ladle shroud (111) according to any of the preceding claims,
 - 35 - have a chamfered downstream surface (30d) forming an angle, α_1 , with a plane parallel to the first and second transverse axes, X2-X3, substantially equal to the angle, α_1 , formed by the leading edge (3u) of the upstream protrusion (3) of a ladle shroud (111) according to any

of the preceding claims, and

- are movable back and forth along said second transverse axis, X3, from a coupling position, wherein the first and second latches are closest to one another and the upstream and downstream chamfered surfaces of the first and second latches protrude out in the gap between the two guiding rails, to a loading position, wherein the first and second latches are furthest apart and do not protrude in the gap between the two guiding rails, and
- are mounted on resilient means (31) naturally biased to drive the latches in their coupling position.

8. Kit of parts according to claim 7, wherein the two longitudinal beams (210x) of the drawer frame (210) each comprise an aperture facing each other through which the first and second latches (30) can move along the second transverse axis, X3, from their coupling position to their loading position and back.

9. Kit of parts according to claim 7, wherein the first and second latches (30) are mounted on the support frame, below the two bottom guiding rails (117) and offset with respect to the pushers (118) or rockers in the first transverse direction, X2.

10. Kit of parts according to any of claims 7 to 9, wherein each resilient means (31) comprises either:
- (a) a cantilever spring consisting of an elastically flexible leaf fixed at one end thereof to the latch (30) and at the opposite end either to the corresponding longitudinal beam (210x) of the drawer frame (210) or below the top sliding surface of the two bottom guiding rails (117) of the support frame (211), or
- (b) a coil spring, preferably enclosing a telescopic axle (32), said coil spring being coupled to a latch and sandwiched between the latch (30) and a catch fixed at constant distance along the second transverse axis, X3, from the corresponding guiding rails (117).

11. Kit of parts according to any of claims 7 to 10, wherein the area and perimeter of the cavity defined by the two longitudinal beams (210x) and two transverse beams (210y) is suitable for snugly accommodating the equivalent of two inlet surfaces (2u) of ladle shrouds (111) according to any of claims 1 to 6, positioned side by side along said first transverse axis, X2.

12. Kit of parts according to claim 11 further comprising a ladle shroud (111) according to any of claims 1 to 6 and a collector nozzle (110), said collector nozzle (110) having a planar upstream surface comprising an inlet orifice and being defined by an upstream perimeter, such that the upstream perimeter (2p) of the ladle shroud and the upstream perimeter of the collector nozzle (110) snugly fit in the cavity of the drawer frame (210) when the ladle shroud and collector nozzle are aligned side by side along the first transverse axis, X2.

13. A metal casting installation comprising a ladle (11) comprising a bottom floor with an inner nozzle (113) provided with an outlet orifice (113b) in fluid communication with the through-

opening of a top gate plate (114u) as defined in claim 7(b), and equipped with the assembled elements of a kit of parts according to any of claims 7 to 12, comprising
(a) a support frame (211) as defined in claim 7(c), slidingly coupled to a planar bottom surface of the top gate plate (114u), such that the opening (114a) of the bottom gate plate
5 (114d) can be brought in or out of registry with the through-opening of the top gate plate (114u), by means of a first hydraulic arm (40a),

(b) a ladle shroud (111) according to any of claims 1 to 6, wherein the distance separating the upstream ridge (3r) of the upstream protrusion (3) of the first gripping portion from the one of the second gripping portion is equal to, $d + 2Hd$, wherein Hd is the distance, from the
10 upstream ridge (3r) of the upstream protrusion (3) to the bottom of the trailing edge (3d) measured along a plane parallel to the upstream surface (2u), said ladle shroud (111) being releasibly coupled to,

(c) a drawer frame (210) as defined in claim 7(a), inserted in the T-passage (120) of the support frame (211), such that the drawer frame (210) can be moved back and forth through
15 said T-passage along the first transverse axis, X2, by means of a second hydraulic arm (40b), and wherein

(d) the first and second latches (30) are mounted such that they can move from their coupling position, wherein they are separated from one another along the second transverse axis, X3, by a distance substantially equal to d, to their loading position, wherein they are
20 separated from one another along the second transverse axis, X3, by a distance substantially equal to $d + 2Hd$,

(e) a robot or handling tool (20) suitable for holding said ladle shroud (111), bringing it below the support frame (211) at the level of the latches (30), and forcing the inlet portion thereof up through the latches by deforming the resilient means (31) until the latches engage below
25 the upstream protrusions (3) of the ladle shroud which thus reaches its coupled position, wherein the trailing edges (3d) of the upstream protrusions (3) rest snugly on the planar chamfered upstream surfaces (30u) of the corresponding latches (30),

wherein the drawer frame (210), by moving through the T-passage (120) of the support frame along the first transverse axis, X2, can bring alternatively the bore (115) of the ladle
30 shroud (111) in and out of registry with opening (114a) of the bottom gate plate (114d), with the pushers (118) pressing onto the downstream surface (4d) of the ladle shroud (111) when the bore (115) of the ladle shroud (111) is in registry with the opening (114a) of the bottom gate plate (114d).

14. Metal casting installation according to claim 13, wherein the drawer frame (210) is as
35 defined in claim 12 and is loaded with a collector nozzle (110), such that moving said drawer frame (210) through the passage of the support frame along the first transverse axis, X2, can bring alternatively the bore (115) of the ladle shroud (111) or the bore of the collector nozzle (110) in and out of registry with the opening (114a) of the bottom gate plate (114).

15. Process for casting molten metal from a ladle (11) into a tundish (10) or other metallurgical vessel comprising the following steps:

(a) bringing a ladle (11) containing molten metal and equipped with a support frame (211) as defined in claim 7(c) and a drawer frame (210) as defined in claim 7(a) or 8, over a tundish
5 (10) or any other metallurgical vessel,

(b) bringing a ladle shroud (111) with a robot (20) or any other handling tool, below the support frame (211) at the level of the latches (30),

(c) with said robot (20) or any other handling tool forcing the inlet portion of the ladle shroud (111) up into the cavity of the drawer frame (210) through the latches by deforming the
10 resilient means (31) until the latches engage and the ladle shroud reaches its coupled position, wherein the trailing edges (3d) of the first protrusions (3) rest snugly on the planar chamfered upstream surface (30u) of each of the corresponding latches (30),

(d) with a first hydraulic arm (40b) moving the drawer frame (210) such as to bring the bore (115) of the ladle shroud (111) in registry with the opening (114a) of the bottom gate plate (114d), with the pushers (118) pressing onto the downstream surface (4d) of the ladle
15 shroud (111),

(e) with a second hydraulic arm (40a) moving the support frame (211) into a casting position, such that the opening (114a) of the bottom gate plate (114d) is in registry with the through-opening of the top gate plate (114u), such that molten metal contained in the ladle (11) can
20 flow through the ladle shroud.

16. Process according to claim 15 further comprising the following steps:

(a) when casting molten metal from the ladle is finished, moving the support frame (211) with the second hydraulic arm (40a) to a sealed position such that the opening (114a) of the bottom gate plate (114d) is out of registry with the through-opening of the top gate plate
25 (114u),

(b) moving the drawer frame (210) with the first hydraulic arm (40b) such as to remove the ladle shroud (111) from the pushers (118) so that it hangs on the latches (30) only,

(c) with a robot (20) or other handling tool, forcing the ladle shroud (111) downwards through the latches by deforming the resilient means (31) until the ladle nozzle is disengaged from
30 the drawer frame (210) and removing the ladle shroud (111); and

(d) removing the ladle (11).

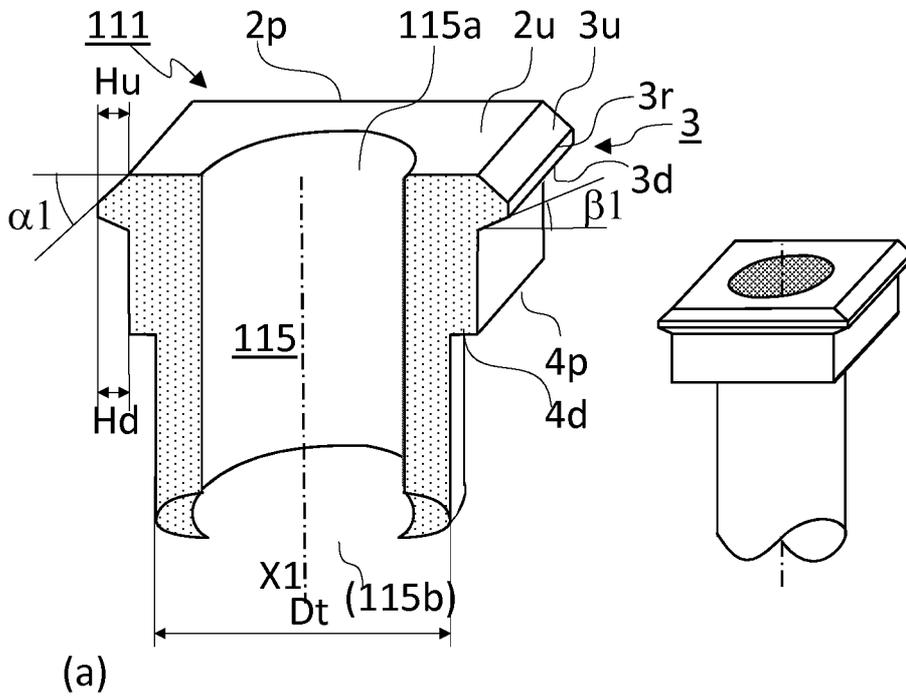
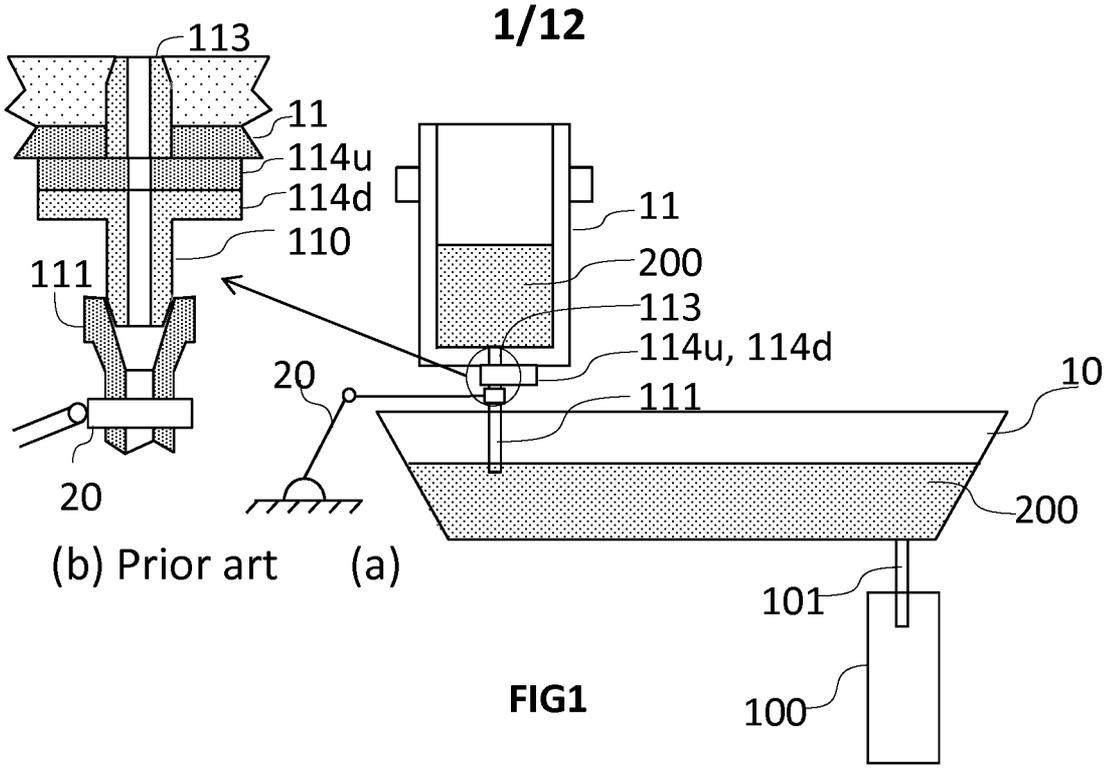


FIG.2

2/12

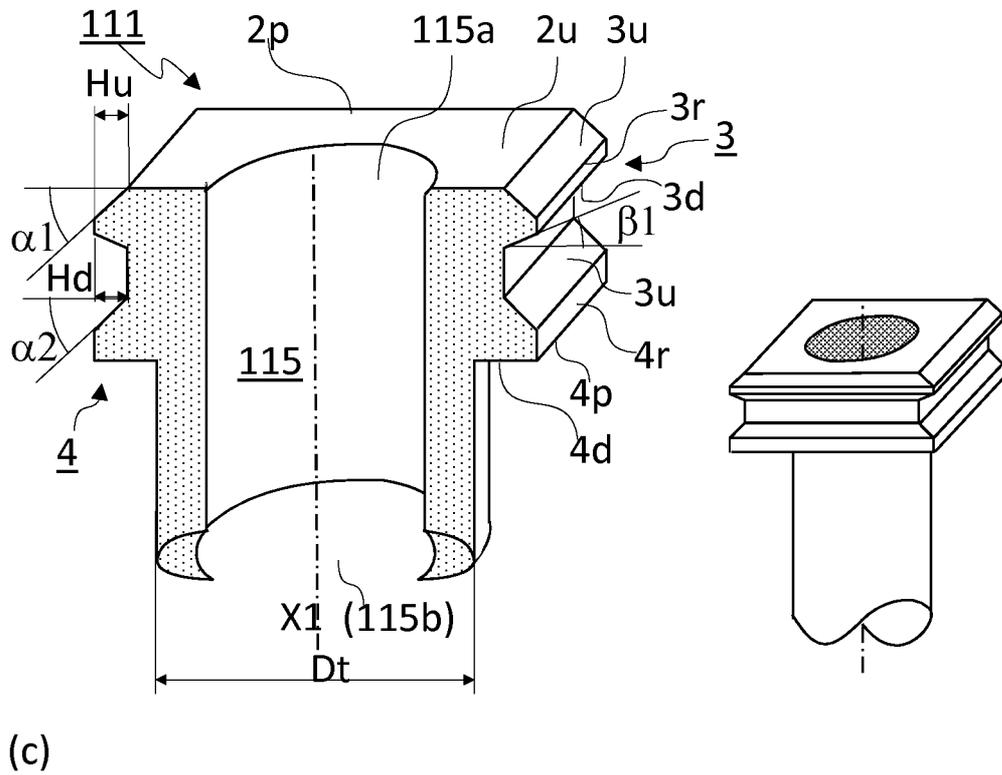
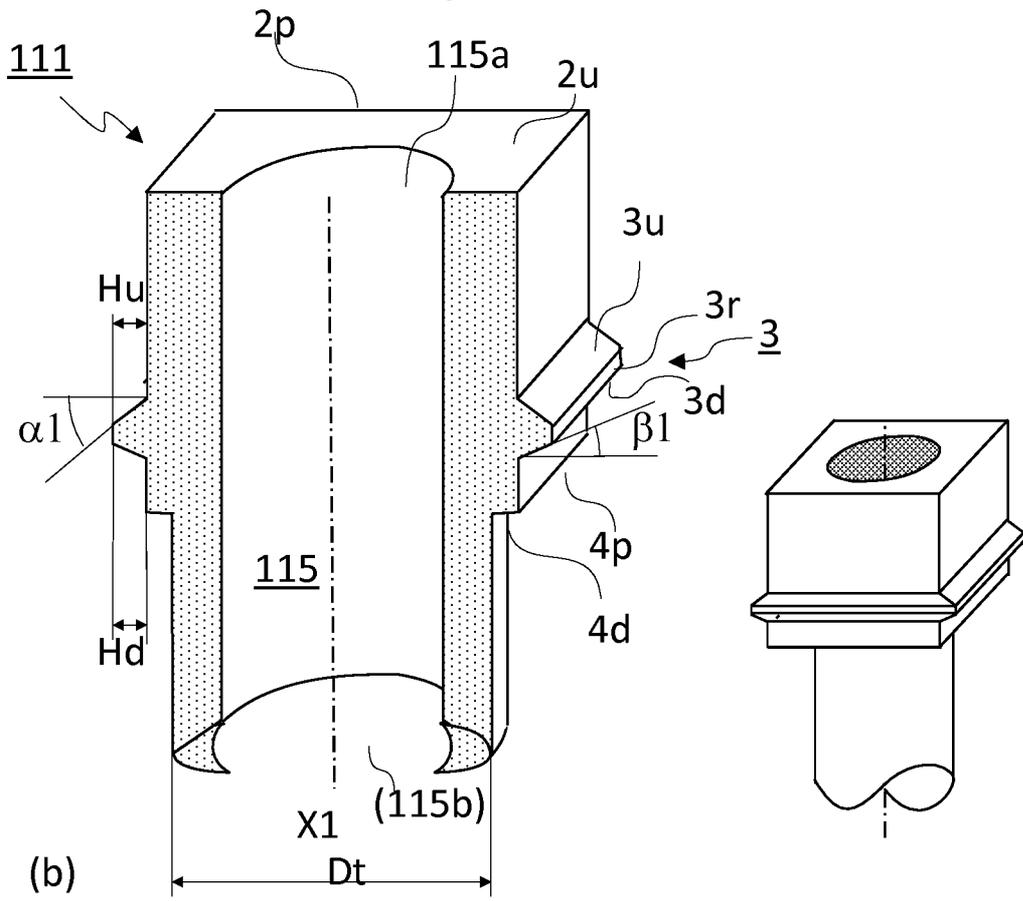


FIG.2 (contnd)

3/12

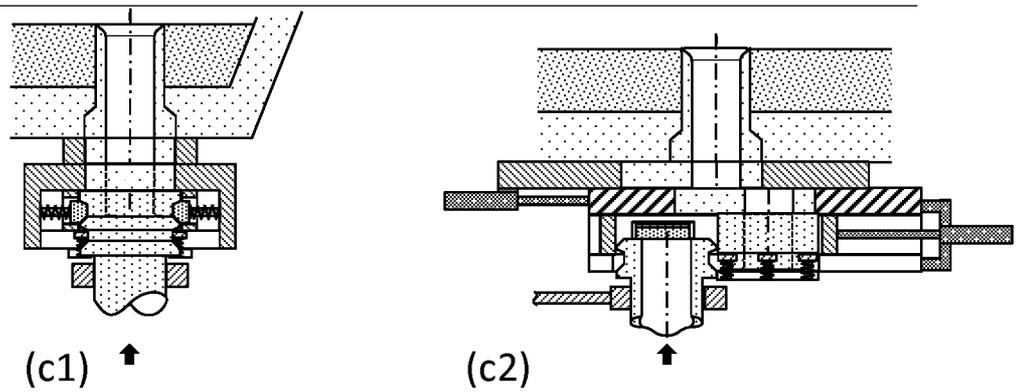
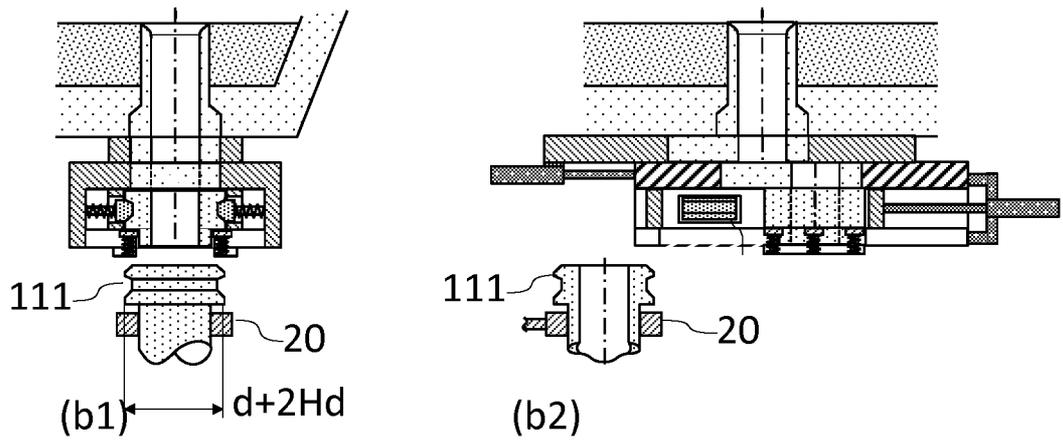
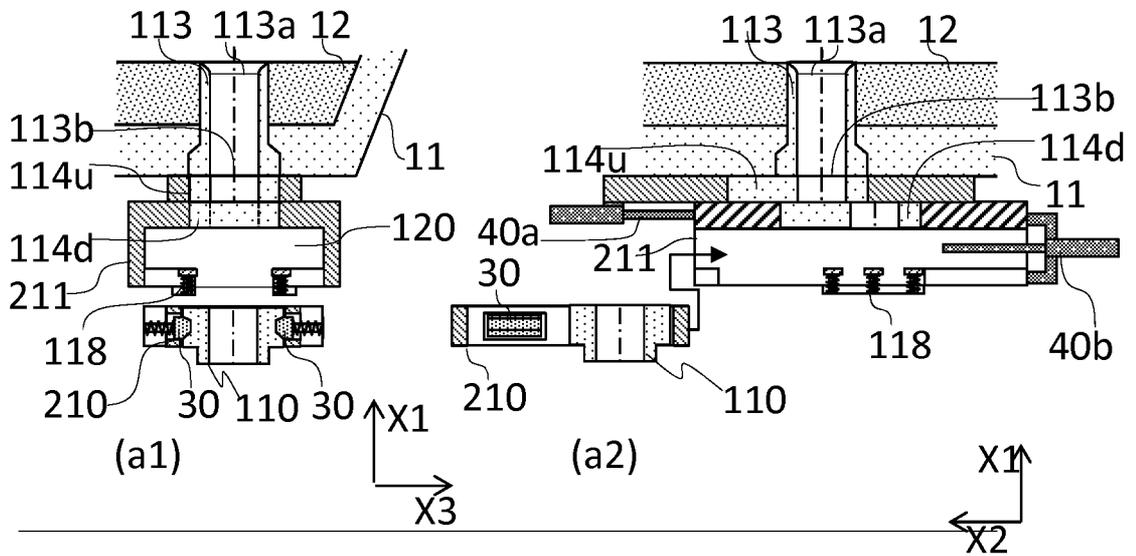


FIG.3

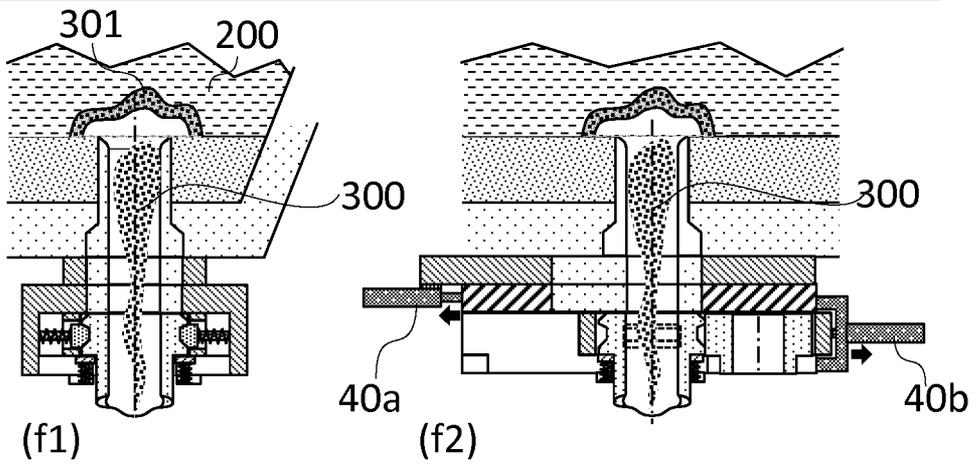
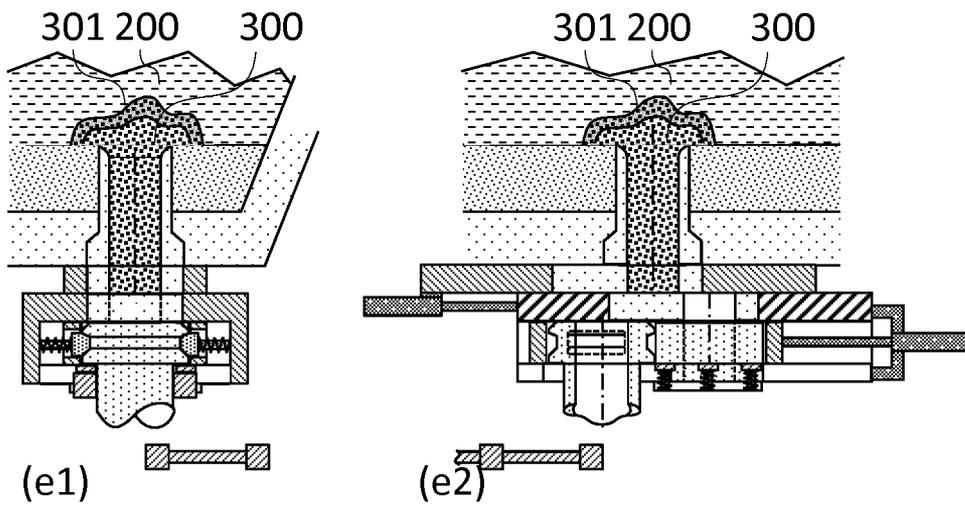
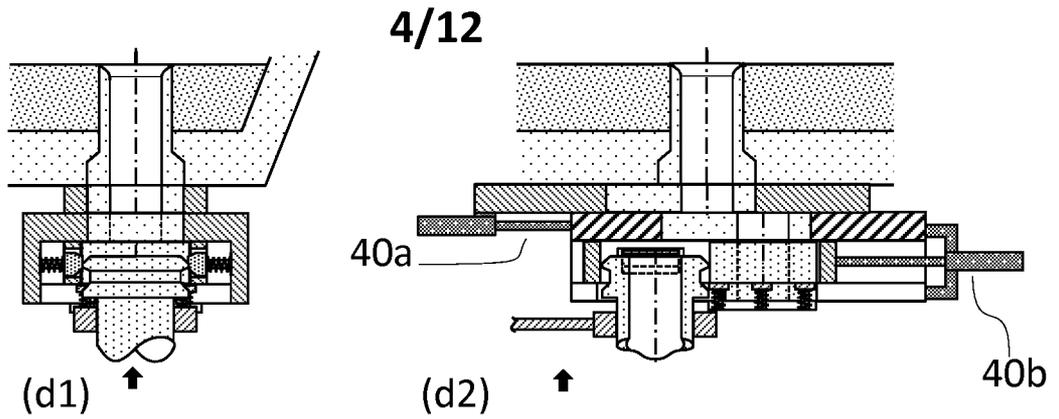


FIG3 (contnd)

5/12

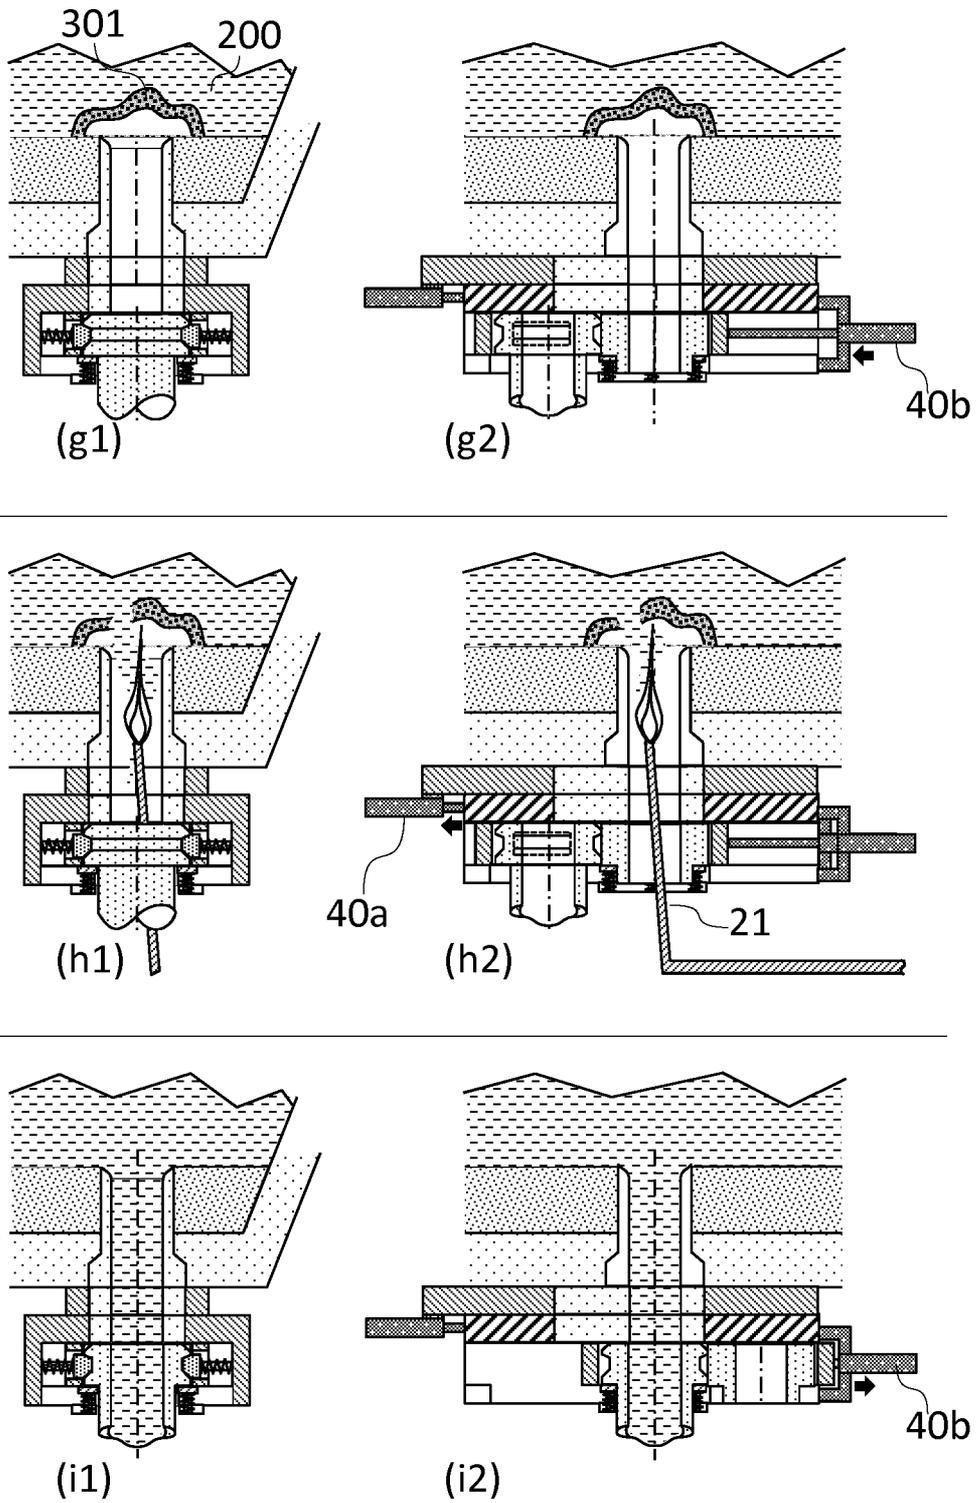


FIG.3 (contnd)

6/12

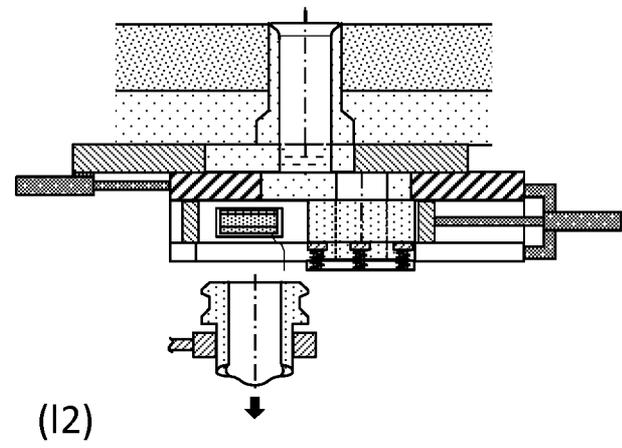
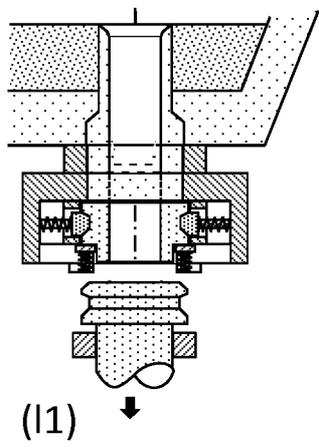
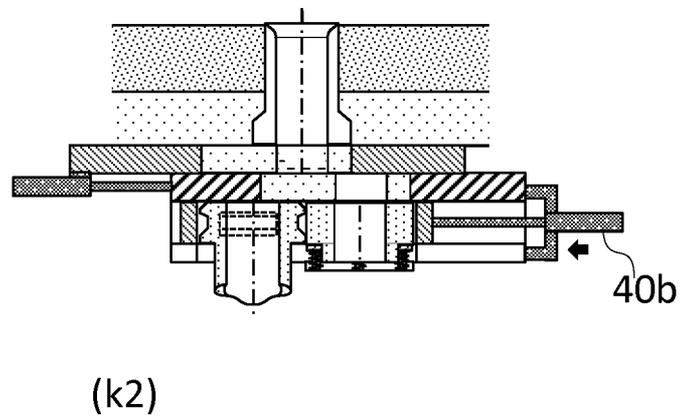
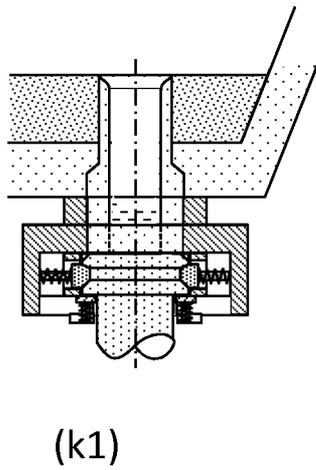
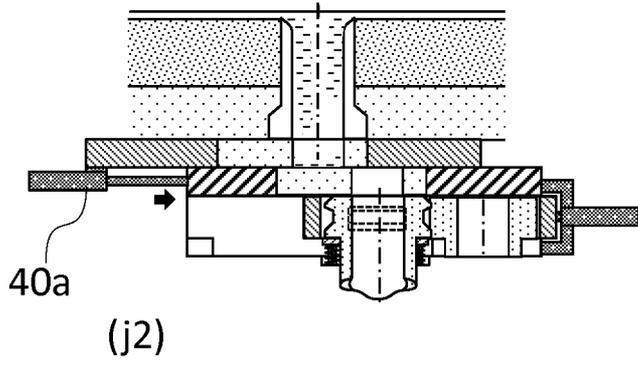
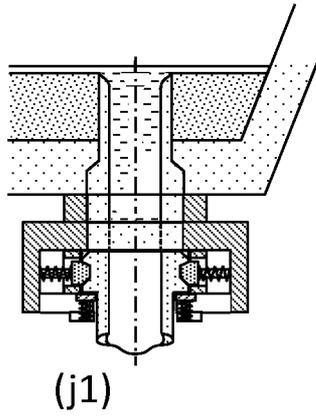


FIG.3 (end)

7/12

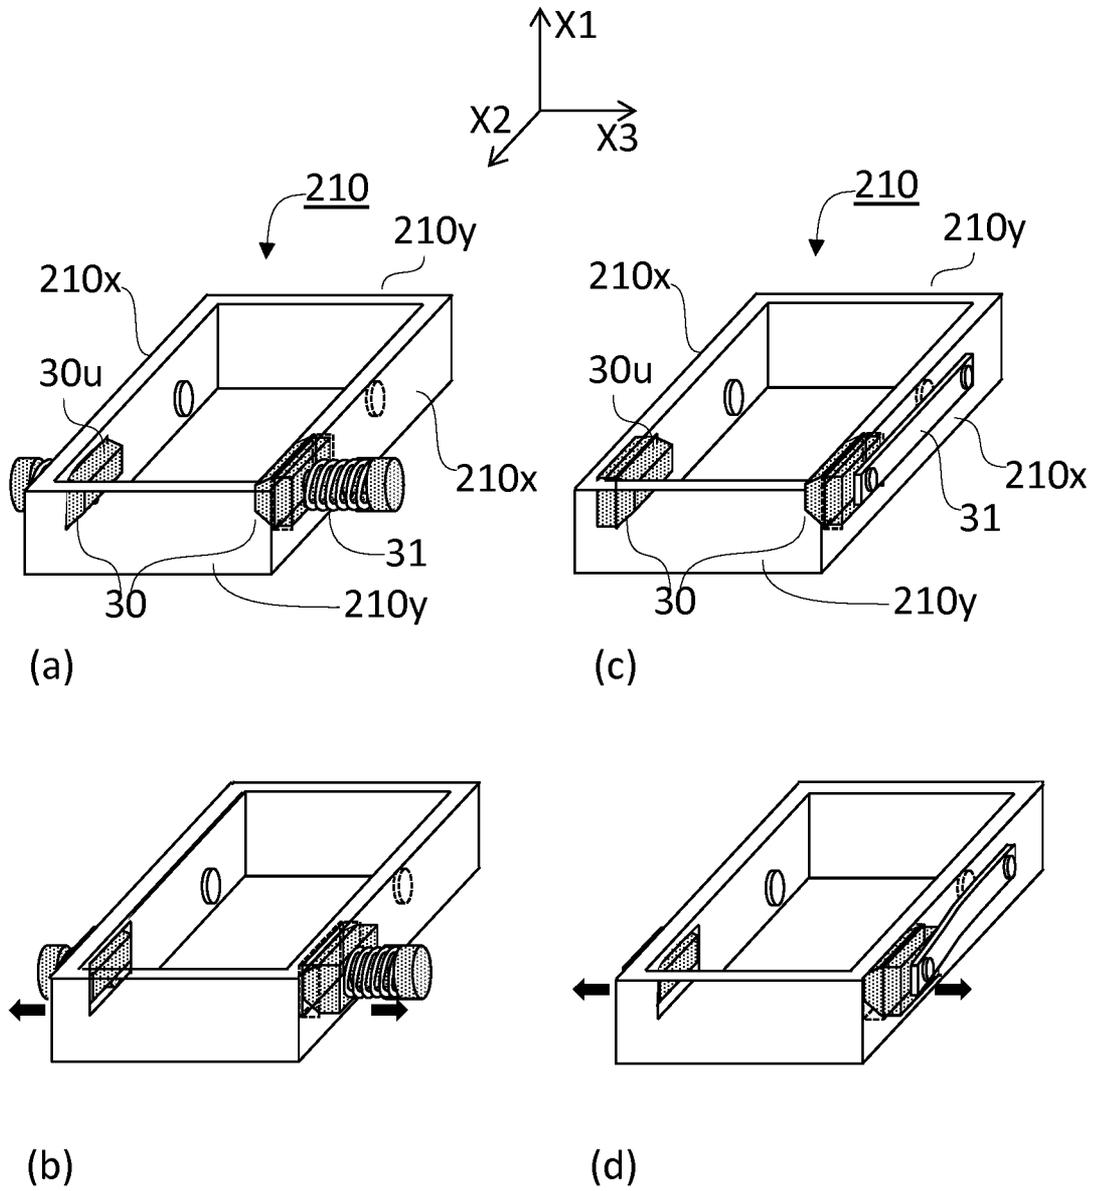


FIG. 4

8/12

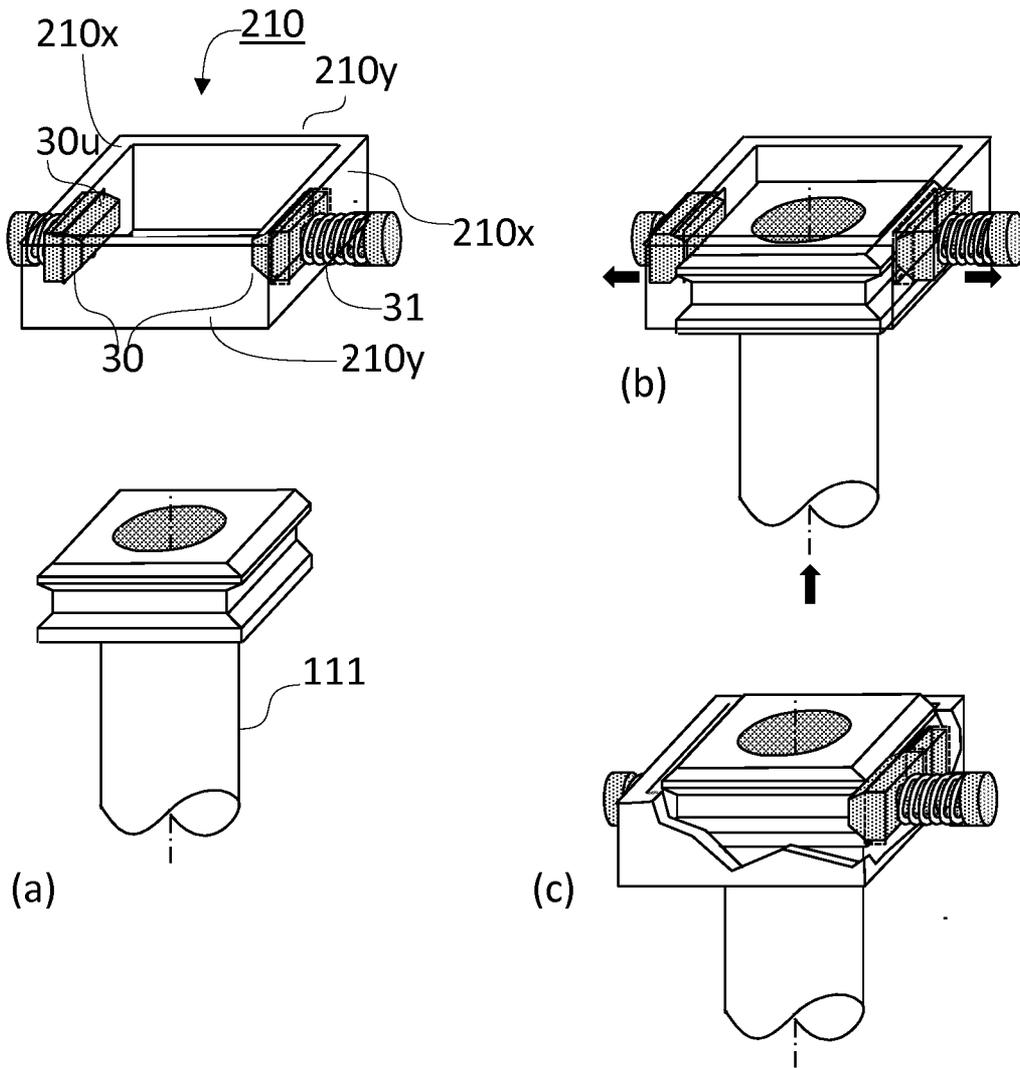



FIG. 5

9/12

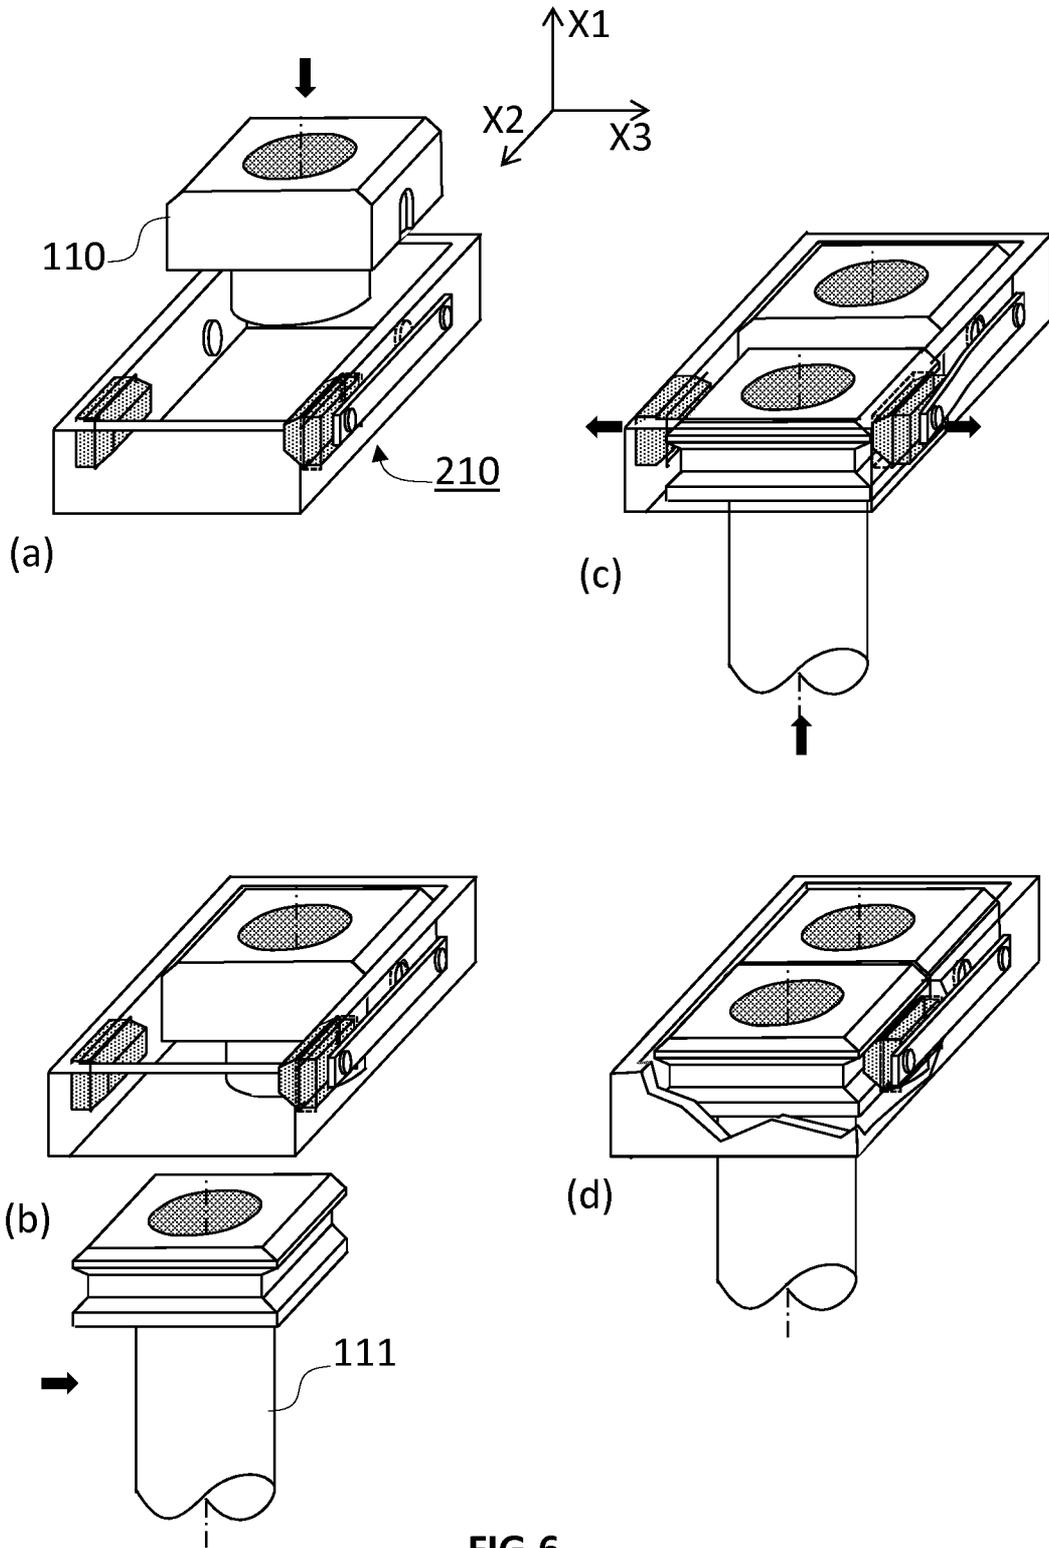


FIG. 6

10/12

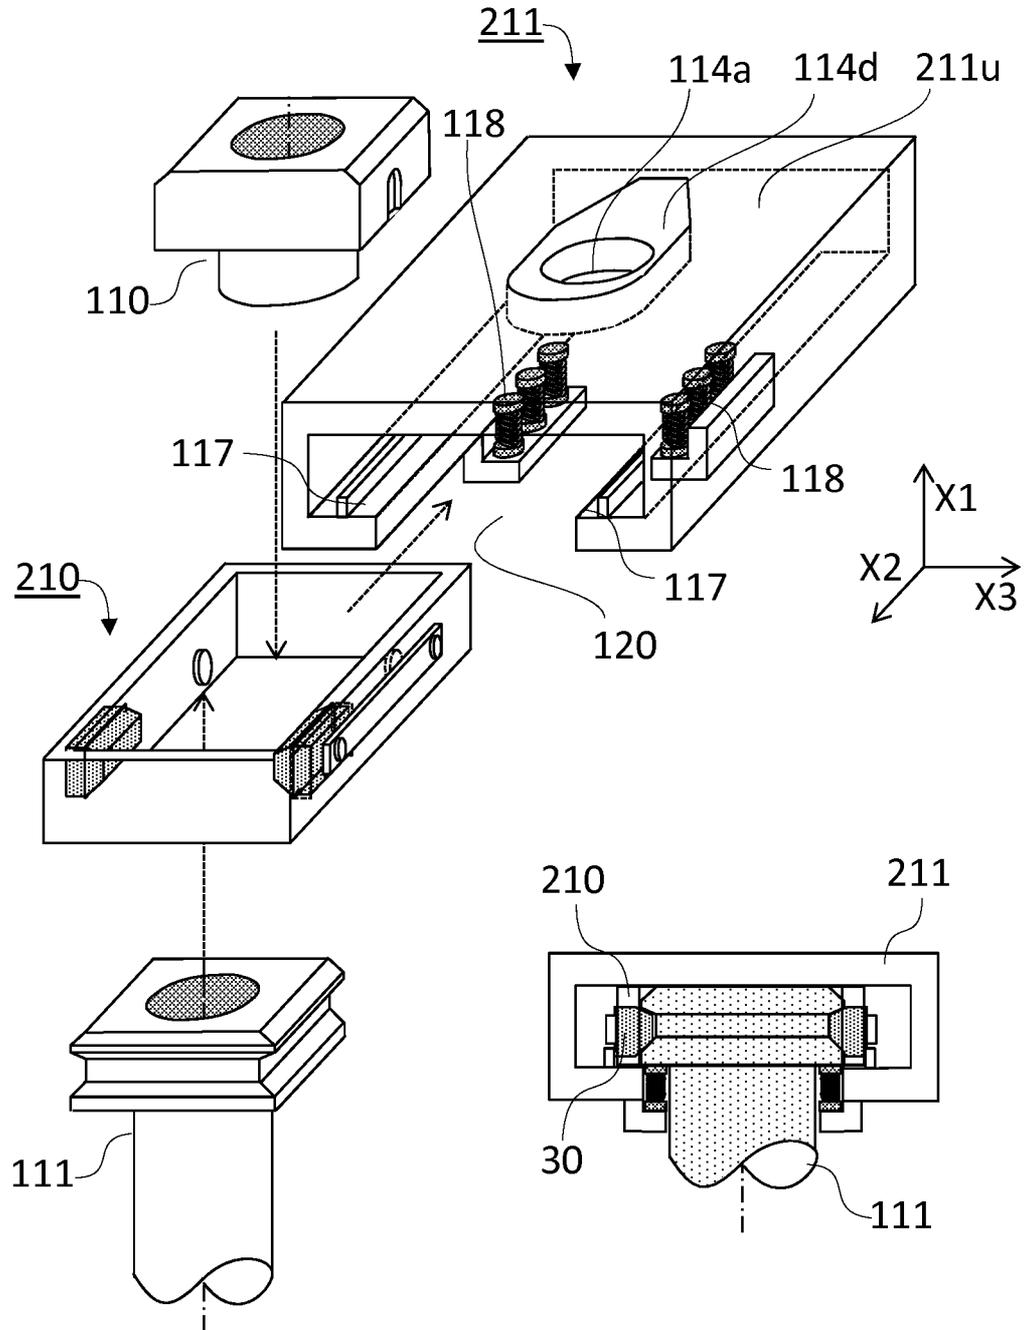


FIG. 7

11/12

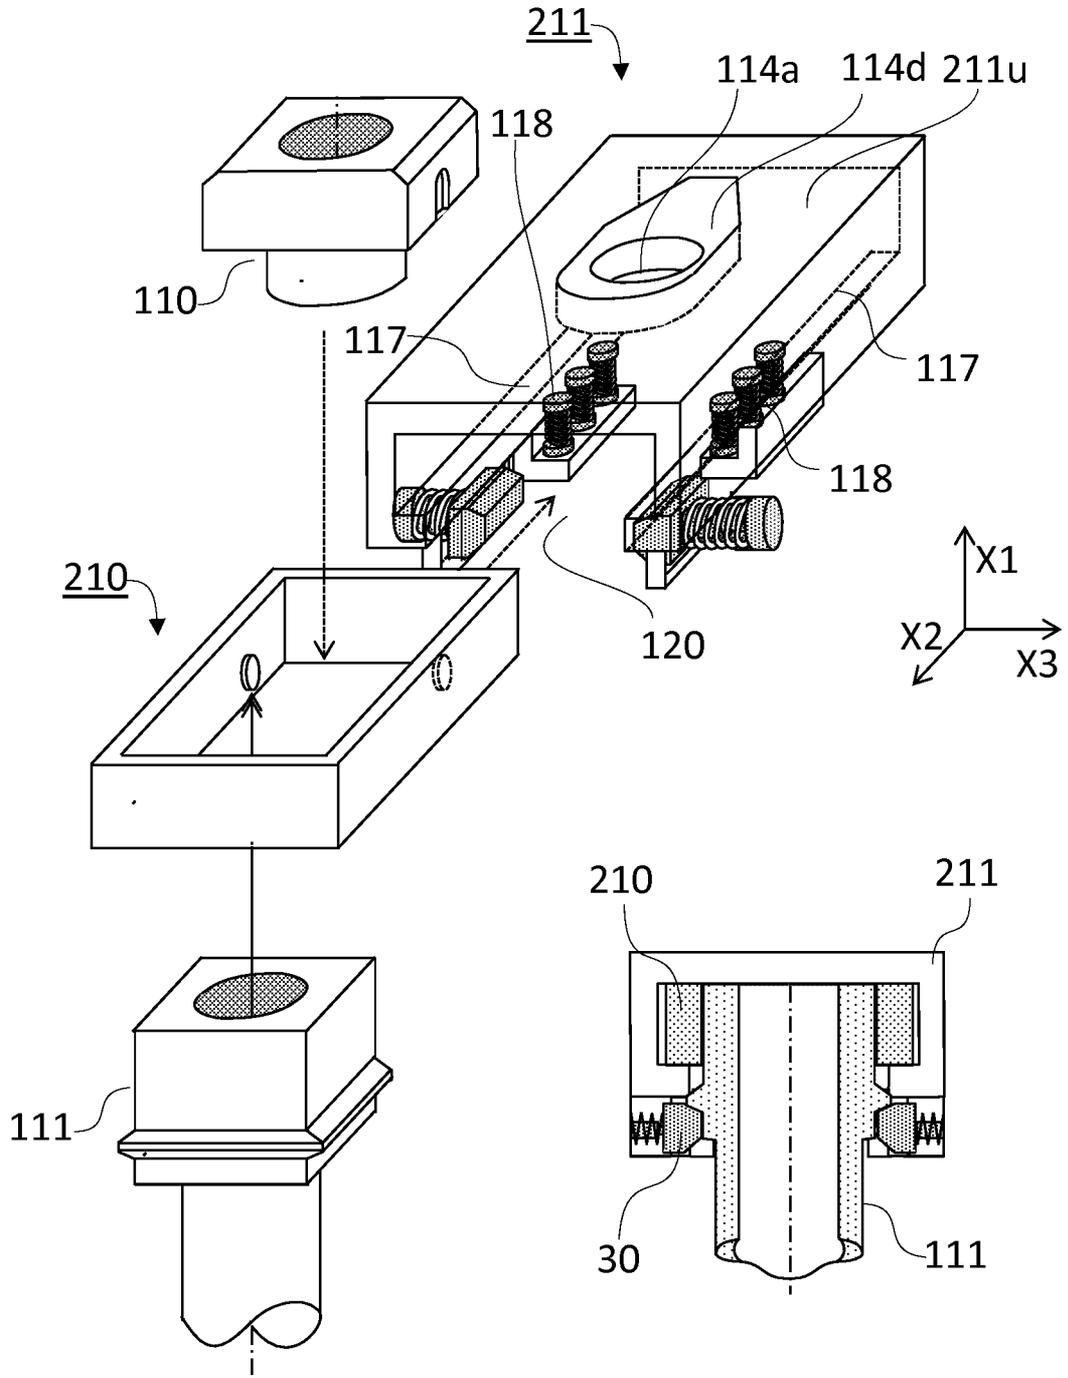


FIG. 8

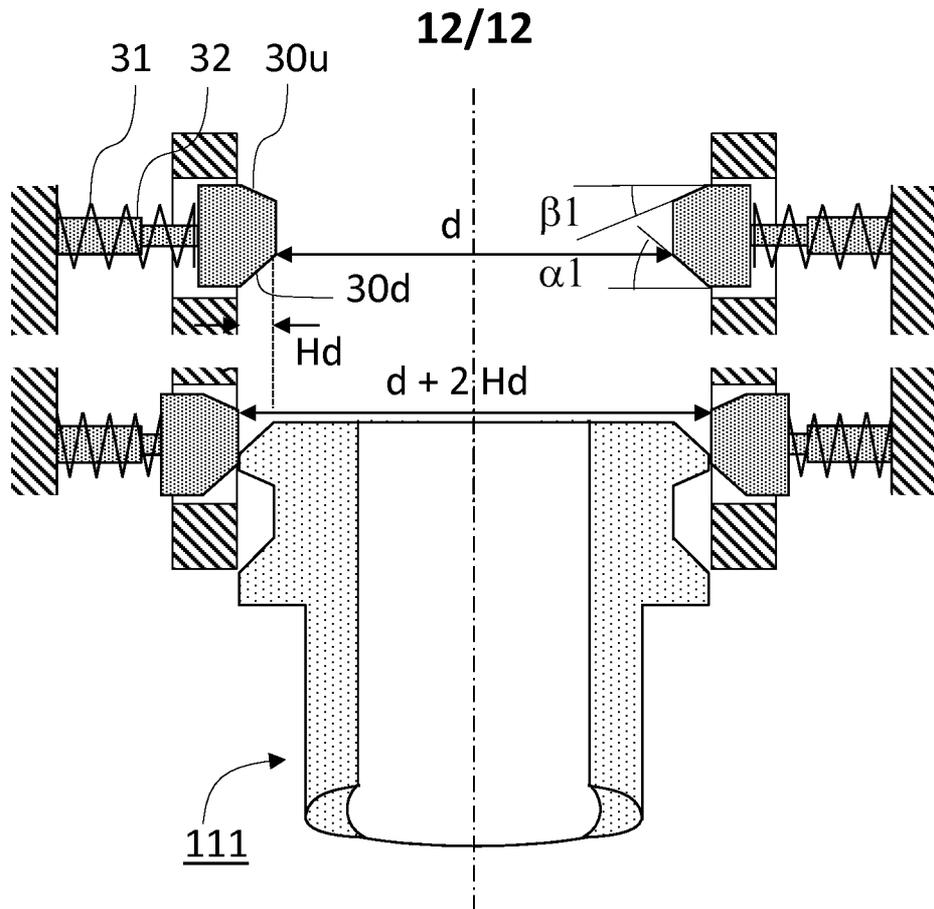


FIG.9

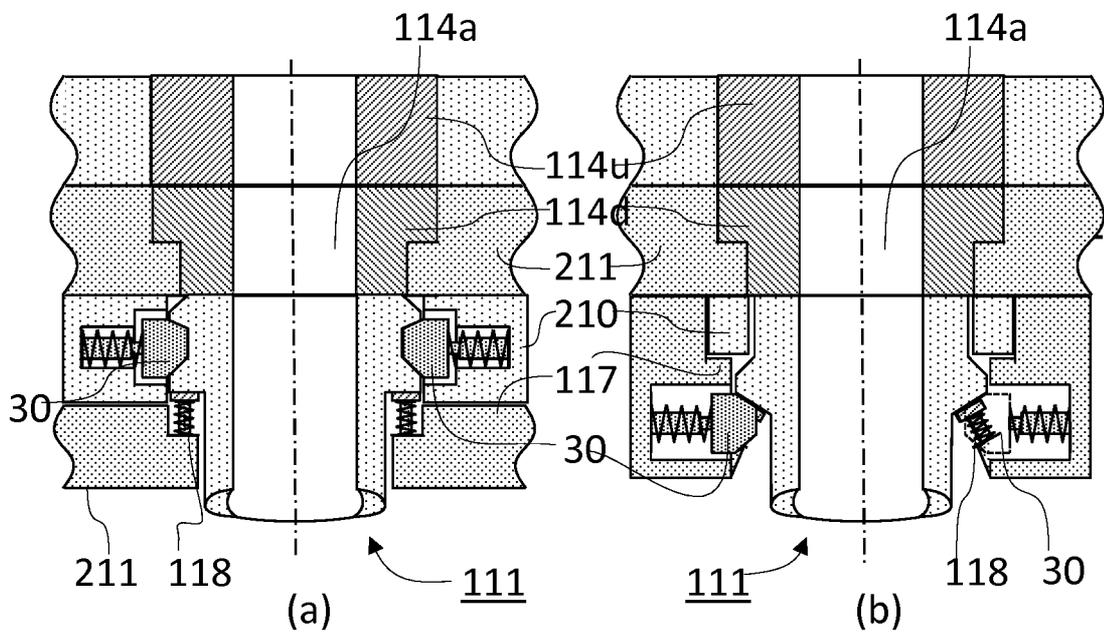


FIG.10

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/053313

A. CLASSIFICATION OF SUBJECT MATTER
INV. B22D41/34 B22D41/56
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
B22D
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2011/113599 A1 (VESUVIUS GROUP SA [BE]; BOISDEQUIN M VINCENT [BE]; COLLURA M MARIANO []) 22 September 2011 (2011-09-22) the whole document -----	1-16
A	WO 2013/000566 A1 (VESUVIUS GROUP SA [BE]; RENARD JEAN-LUC [BE]) 3 January 2013 (2013-01-03) paragraph [0006] - paragraph [0034] figures 1,2a,2c,3a,3c,5 -----	1-16
A	WO 2010/057638 A1 (VESUVIUS GROUP SA [BE]; HANSE ERIC [FR]) 27 May 2010 (2010-05-27) the whole document -----	1-16
A	JP 2005 211905 A (SHINAGAWA REFRACTORIES CO) 11 August 2005 (2005-08-11) the whole document -----	1-16
-/--		

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 8 June 2015	Date of mailing of the international search report 17/07/2015
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Zimmermann, Frank

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/053313

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 269 751 A1 (REFRACTORY INTELLECTUAL PROP [AT]) 5 January 2011 (2011-01-05) the whole document -----	1-16
A	US 2011/240248 A1 (YAMAUTI NORIAKI [JP] ET AL) 6 October 2011 (2011-10-06) the whole document -----	1-16
A	EP 2 368 654 A1 (VESUVIUS GROUP SA [BE]) 28 September 2011 (2011-09-28) the whole document -----	1-16
A	WO 2004/052576 A1 (VESUVIUS GROUP SA [BE]; COLLURA MARIANO [BE]; BOISDEQUIN VINCENT [BE]) 24 June 2004 (2004-06-24) cited in the application the whole document -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/053313

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011113599	A1	22-09-2011	AR 080696 A1 02-05-2012
			AU 2011229489 A1 20-09-2012
			CA 2790274 A1 22-09-2011
			CL 2012002395 A1 04-01-2013
			CN 102189233 A 21-09-2011
			CN 202087822 U 28-12-2011
			EP 2386368 A1 16-11-2011
			EP 2547475 A1 23-01-2013
			JP 2013522052 A 13-06-2013
			KR 20130038245 A 17-04-2013
			MA 34152 B1 03-04-2013
			NZ 602093 A 30-05-2014
			RU 2012136887 A 27-04-2014
			TW 201200268 A 01-01-2012
			US 2013056506 A1 07-03-2013
			WO 2011113599 A1 22-09-2011

WO 2013000566	A1	03-01-2013	AR 086749 A1 22-01-2014
			AU 2012278280 A1 15-08-2013
			CA 2825676 A1 03-01-2013
			CN 102847929 A 02-01-2013
			CN 203253917 U 30-10-2013
			EP 2726235 A1 07-05-2014
			JP 2014518157 A 28-07-2014
			KR 20140023966 A 27-02-2014
			US 2014103080 A1 17-04-2014
			WO 2013000566 A1 03-01-2013

WO 2010057638	A1	27-05-2010	AR 074355 A1 12-01-2011
			AU 2009317591 A1 07-07-2011
			CA 2742638 A1 27-05-2010
			CN 102281967 A 14-12-2011
			DK 2367647 T3 08-10-2012
			EG 26715 A 15-06-2014
			EP 2367647 A1 28-09-2011
			ES 2392383 T3 10-12-2012
			JP 5466242 B2 09-04-2014
			JP 2012509184 A 19-04-2012
			KR 20110084547 A 25-07-2011
			NZ 593482 A 30-11-2012
			PL 2367647 T3 30-11-2012
			PT 2367647 E 14-11-2012
			RS 52446 B 28-02-2013
			RU 2011124581 A 27-12-2012
			SI 2367647 T1 30-11-2012
			TW 201029773 A 16-08-2010
			UA 101076 C2 25-02-2013
			US 2011226438 A1 22-09-2011
			WO 2010057638 A1 27-05-2010

JP 2005211905	A	11-08-2005	JP 4342967 B2 14-10-2009
			JP 2005211905 A 11-08-2005

EP 2269751	A1	05-01-2011	AR 077271 A1 17-08-2011
			AT 510641 T 15-06-2011
			AU 2010268453 A1 08-12-2011
			CA 2762164 A1 06-01-2011
			CN 102427899 A 25-04-2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2015/053313

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 102548687 A	04-07-2012
		EP 2269751 A1	05-01-2011
		EP 2448700 A1	09-05-2012
		ES 2364737 T3	13-09-2011
		ES 2527821 T3	30-01-2015
		JP 5379301 B2	25-12-2013
		JP 2012531310 A	10-12-2012
		KR 20120027304 A	21-03-2012
		KR 20120040193 A	26-04-2012
		KR 20140011428 A	28-01-2014
		RS 20110549 A1	31-08-2012
		RU 2011146066 A	20-05-2013
		RU 2012103341 A	10-08-2013
		TW 201102191 A	16-01-2011
		UA 99086 C2	10-07-2012
		US 2012043354 A1	23-02-2012
		US 2012119486 A1	17-05-2012
		WO 2011000468 A1	06-01-2011
		WO 2011000517 A1	06-01-2011
US 2011240248	A1	06-10-2011	EP 2407262 A1
			18-01-2012
			JP 5116852 B2
			09-01-2013
			US 2011240248 A1
			06-10-2011
			WO 2011121721 A1
			06-10-2011
EP 2368654	A1	28-09-2011	NONE
WO 2004052576	A1	24-06-2004	AR 042353 A1
			15-06-2005
			AU 2003289763 A1
			30-06-2004
			WO 2004052576 A1
			24-06-2004