




(86) Date de dépôt PCT/PCT Filing Date: 2005/07/25
(87) Date publication PCT/PCT Publication Date: 2006/02/09
(85) Entrée phase nationale/National Entry: 2007/01/26
(86) N° demande PCT/PCT Application No.: US 2005/026464
(87) N° publication PCT/PCT Publication No.: 2006/014940
(30) Priorité/Priority: 2004/07/30 (US10/903,892)

(51) Cl.Int./Int.Cl. **A43B 13/22** (2006.01)
(71) Demandeur/Applicant:
RED WING SHOE COMPANY, INC., US
(72) Inventeurs/Inventors:
PASTERNAK, STEPHEN M., US;
ZIMMER, JAMIE JOE, US
(74) Agent: ROBIC

(54) Titre : CHAUSSURE A SEMELLE EXTERIEURE ARBORANT DES FORMES EN ETOILE
(54) Title: FOOTWEAR OUTSOLE INCLUDING STAR SHAPES

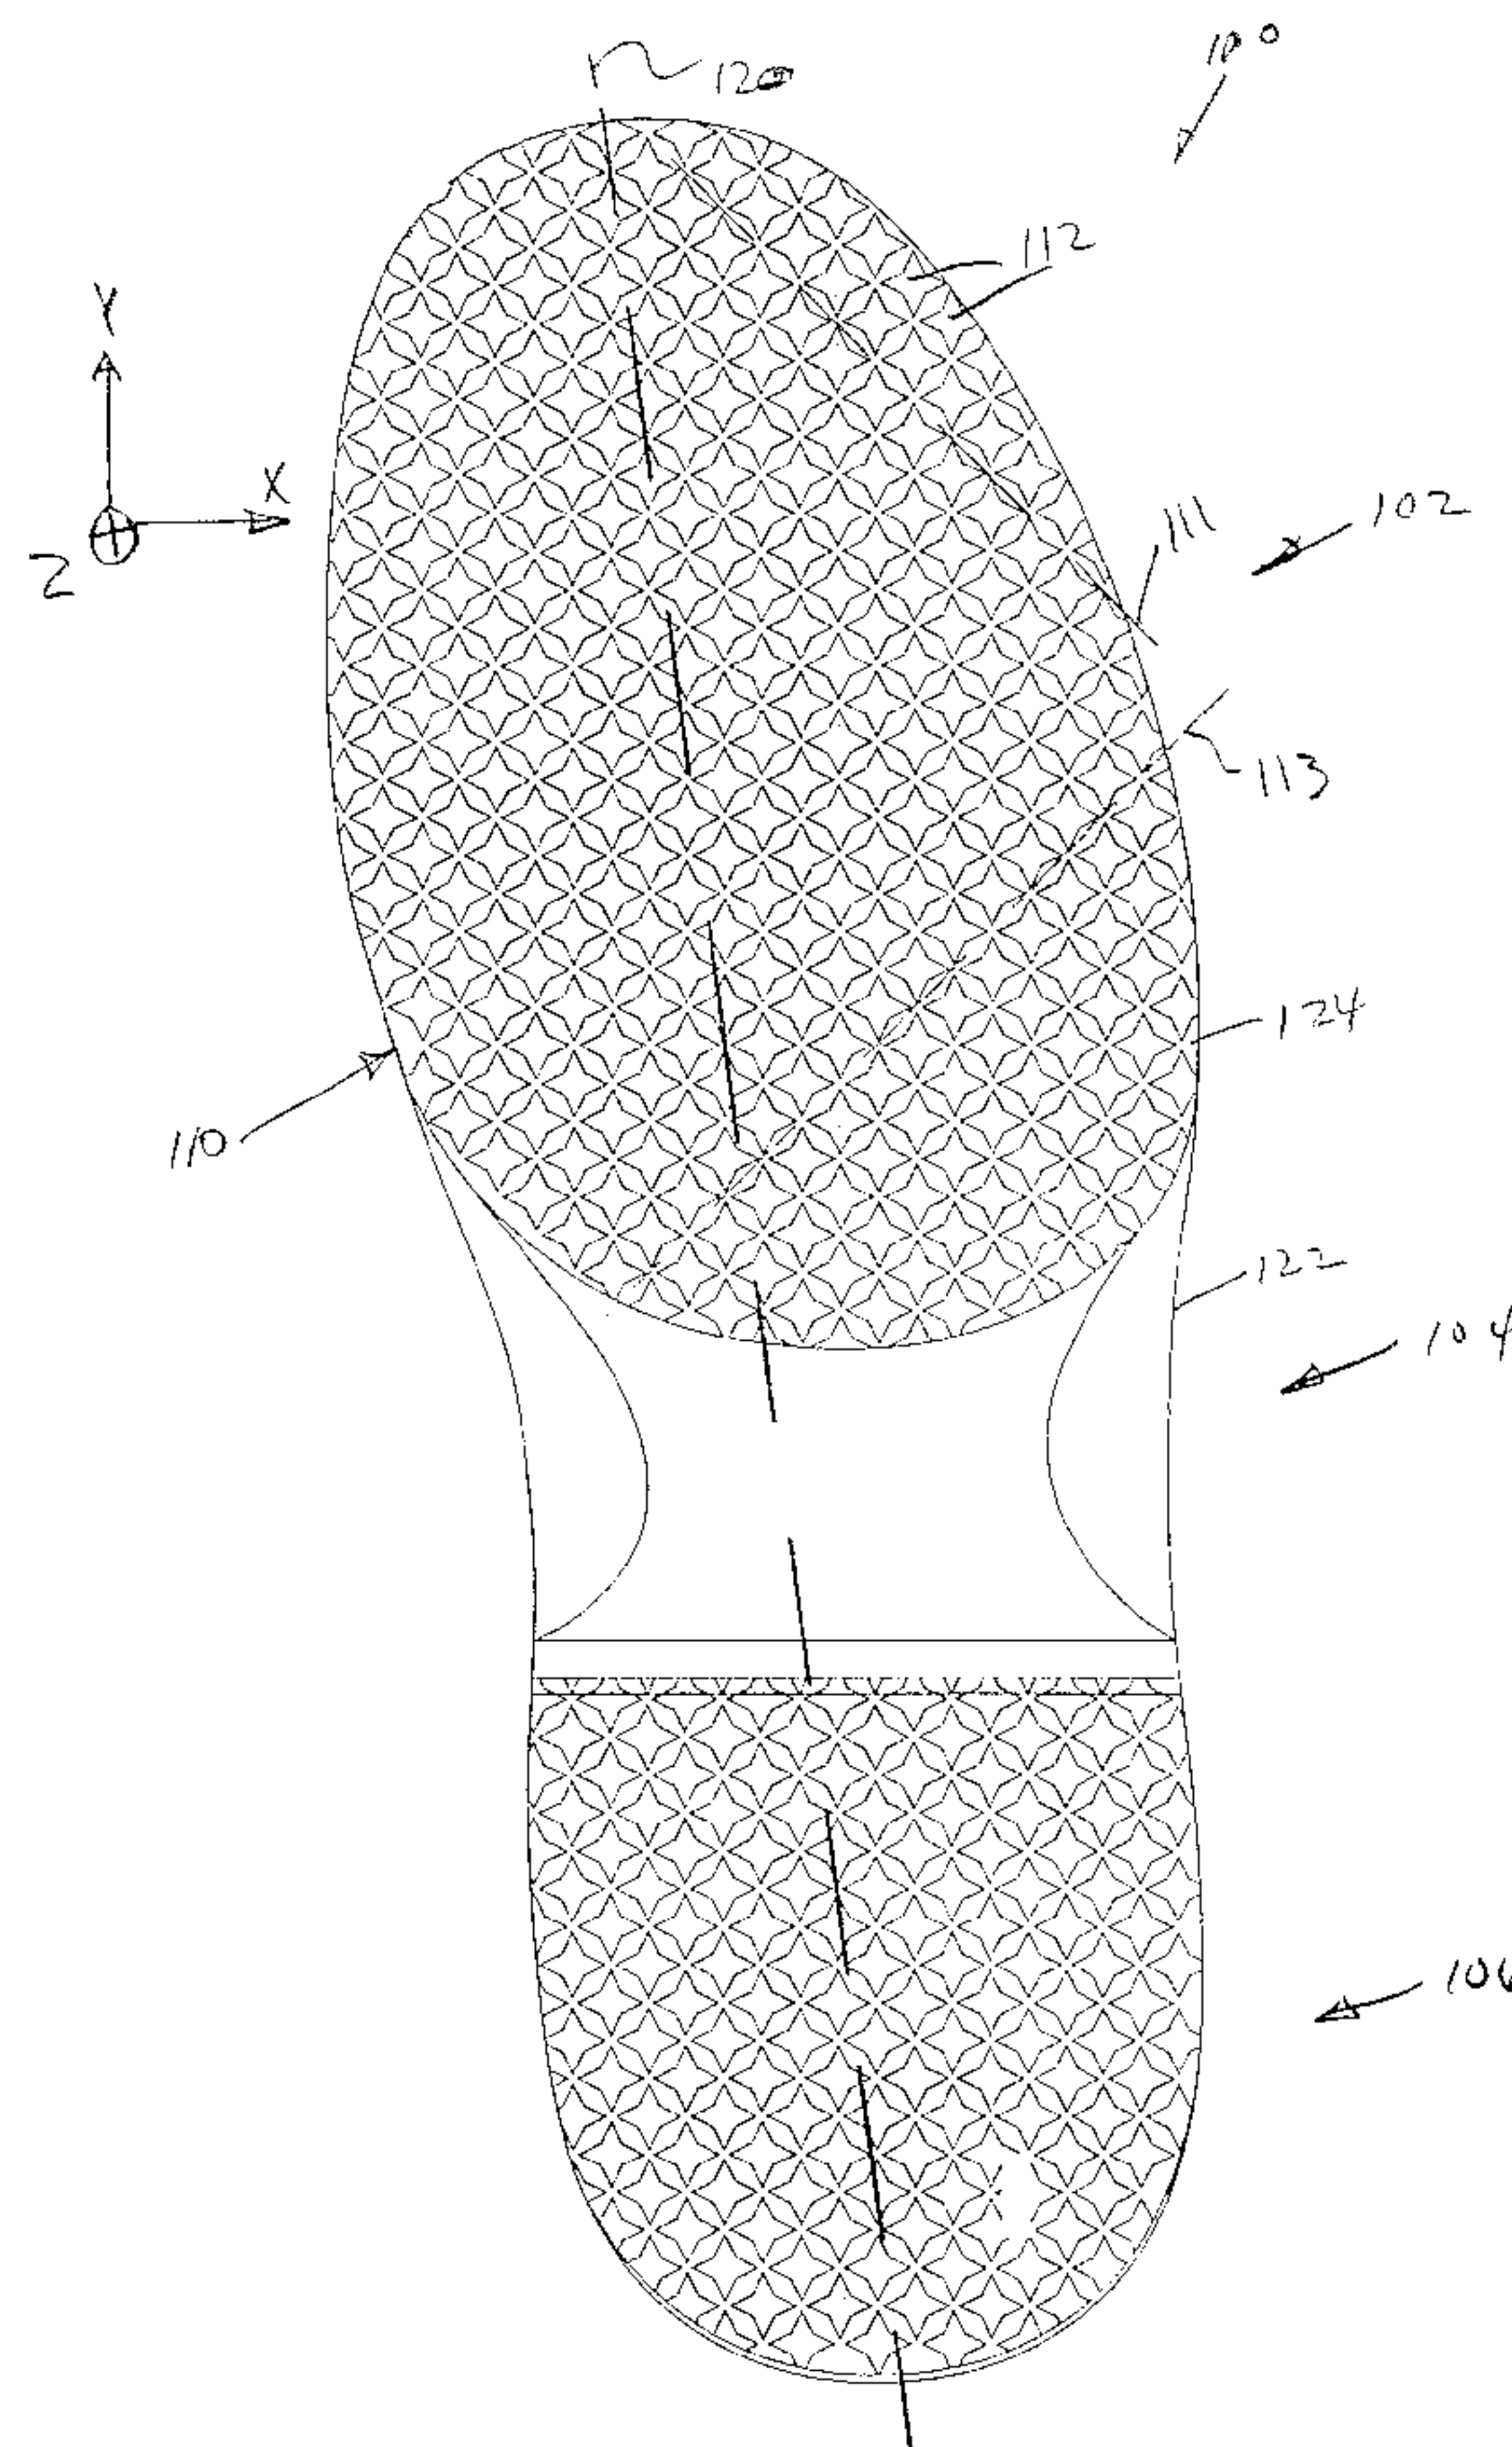

(57) Abrégé/Abstract:

A footwear outsole (100) includes a base portion (110) defining a tread attachment surface (224), and a plurality of tread members (112). The tread members are coupled to the tread attachment surface and protrude away from the tread attachment surface to



(57) **Abrégé(suite)/Abstract(continued):**

define a tread member height. Each tread member includes a plurality of pointed arm members (132, 134, 136, 138) that extend away from a center portion of the tread member in a direction substantially parallel to a plane of the attachment surface. The arm members include a pointed tip (144) that defines a maximum height of each tread member. The tread members include a primary surface facing away from the tread attachment surface. The primary surface includes a recessed portion that is reduced in height from the height of the plurality of edges (140, 142). The tread members may be arranged in a pattern across the tread attachment surface.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 February 2006 (09.02.2006)

PCT

(10) International Publication Number
WO 2006/014940 A1

(51) International Patent Classification⁷: **A43B 13/22**

(21) International Application Number:
PCT/US2005/026464

(22) International Filing Date: 25 July 2005 (25.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/903,892 30 July 2004 (30.07.2004) US

(71) Applicant (for all designated States except US): **RED WING SHOE COMPANY, INC.** [US/US]; 314 Main Street, Red Wing, MN 55066 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PASTERNAK, Stephen, M.** [US/US]; 1195 Larchmont Drive, Englewood, FL 34223 (US). **ZIMMER, Jamie, Joe** [US/US]; 2516 Shannon Court, Hudson, WI 54016 (US).

(74) Agent: **BRUESS, Steven, C.**; Merchant & Gould P.C., P.O. Box 2903, Minneapolis, MN 55402-0903 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: FOOTWEAR OUTSOLE INCLUDING STAR SHAPES

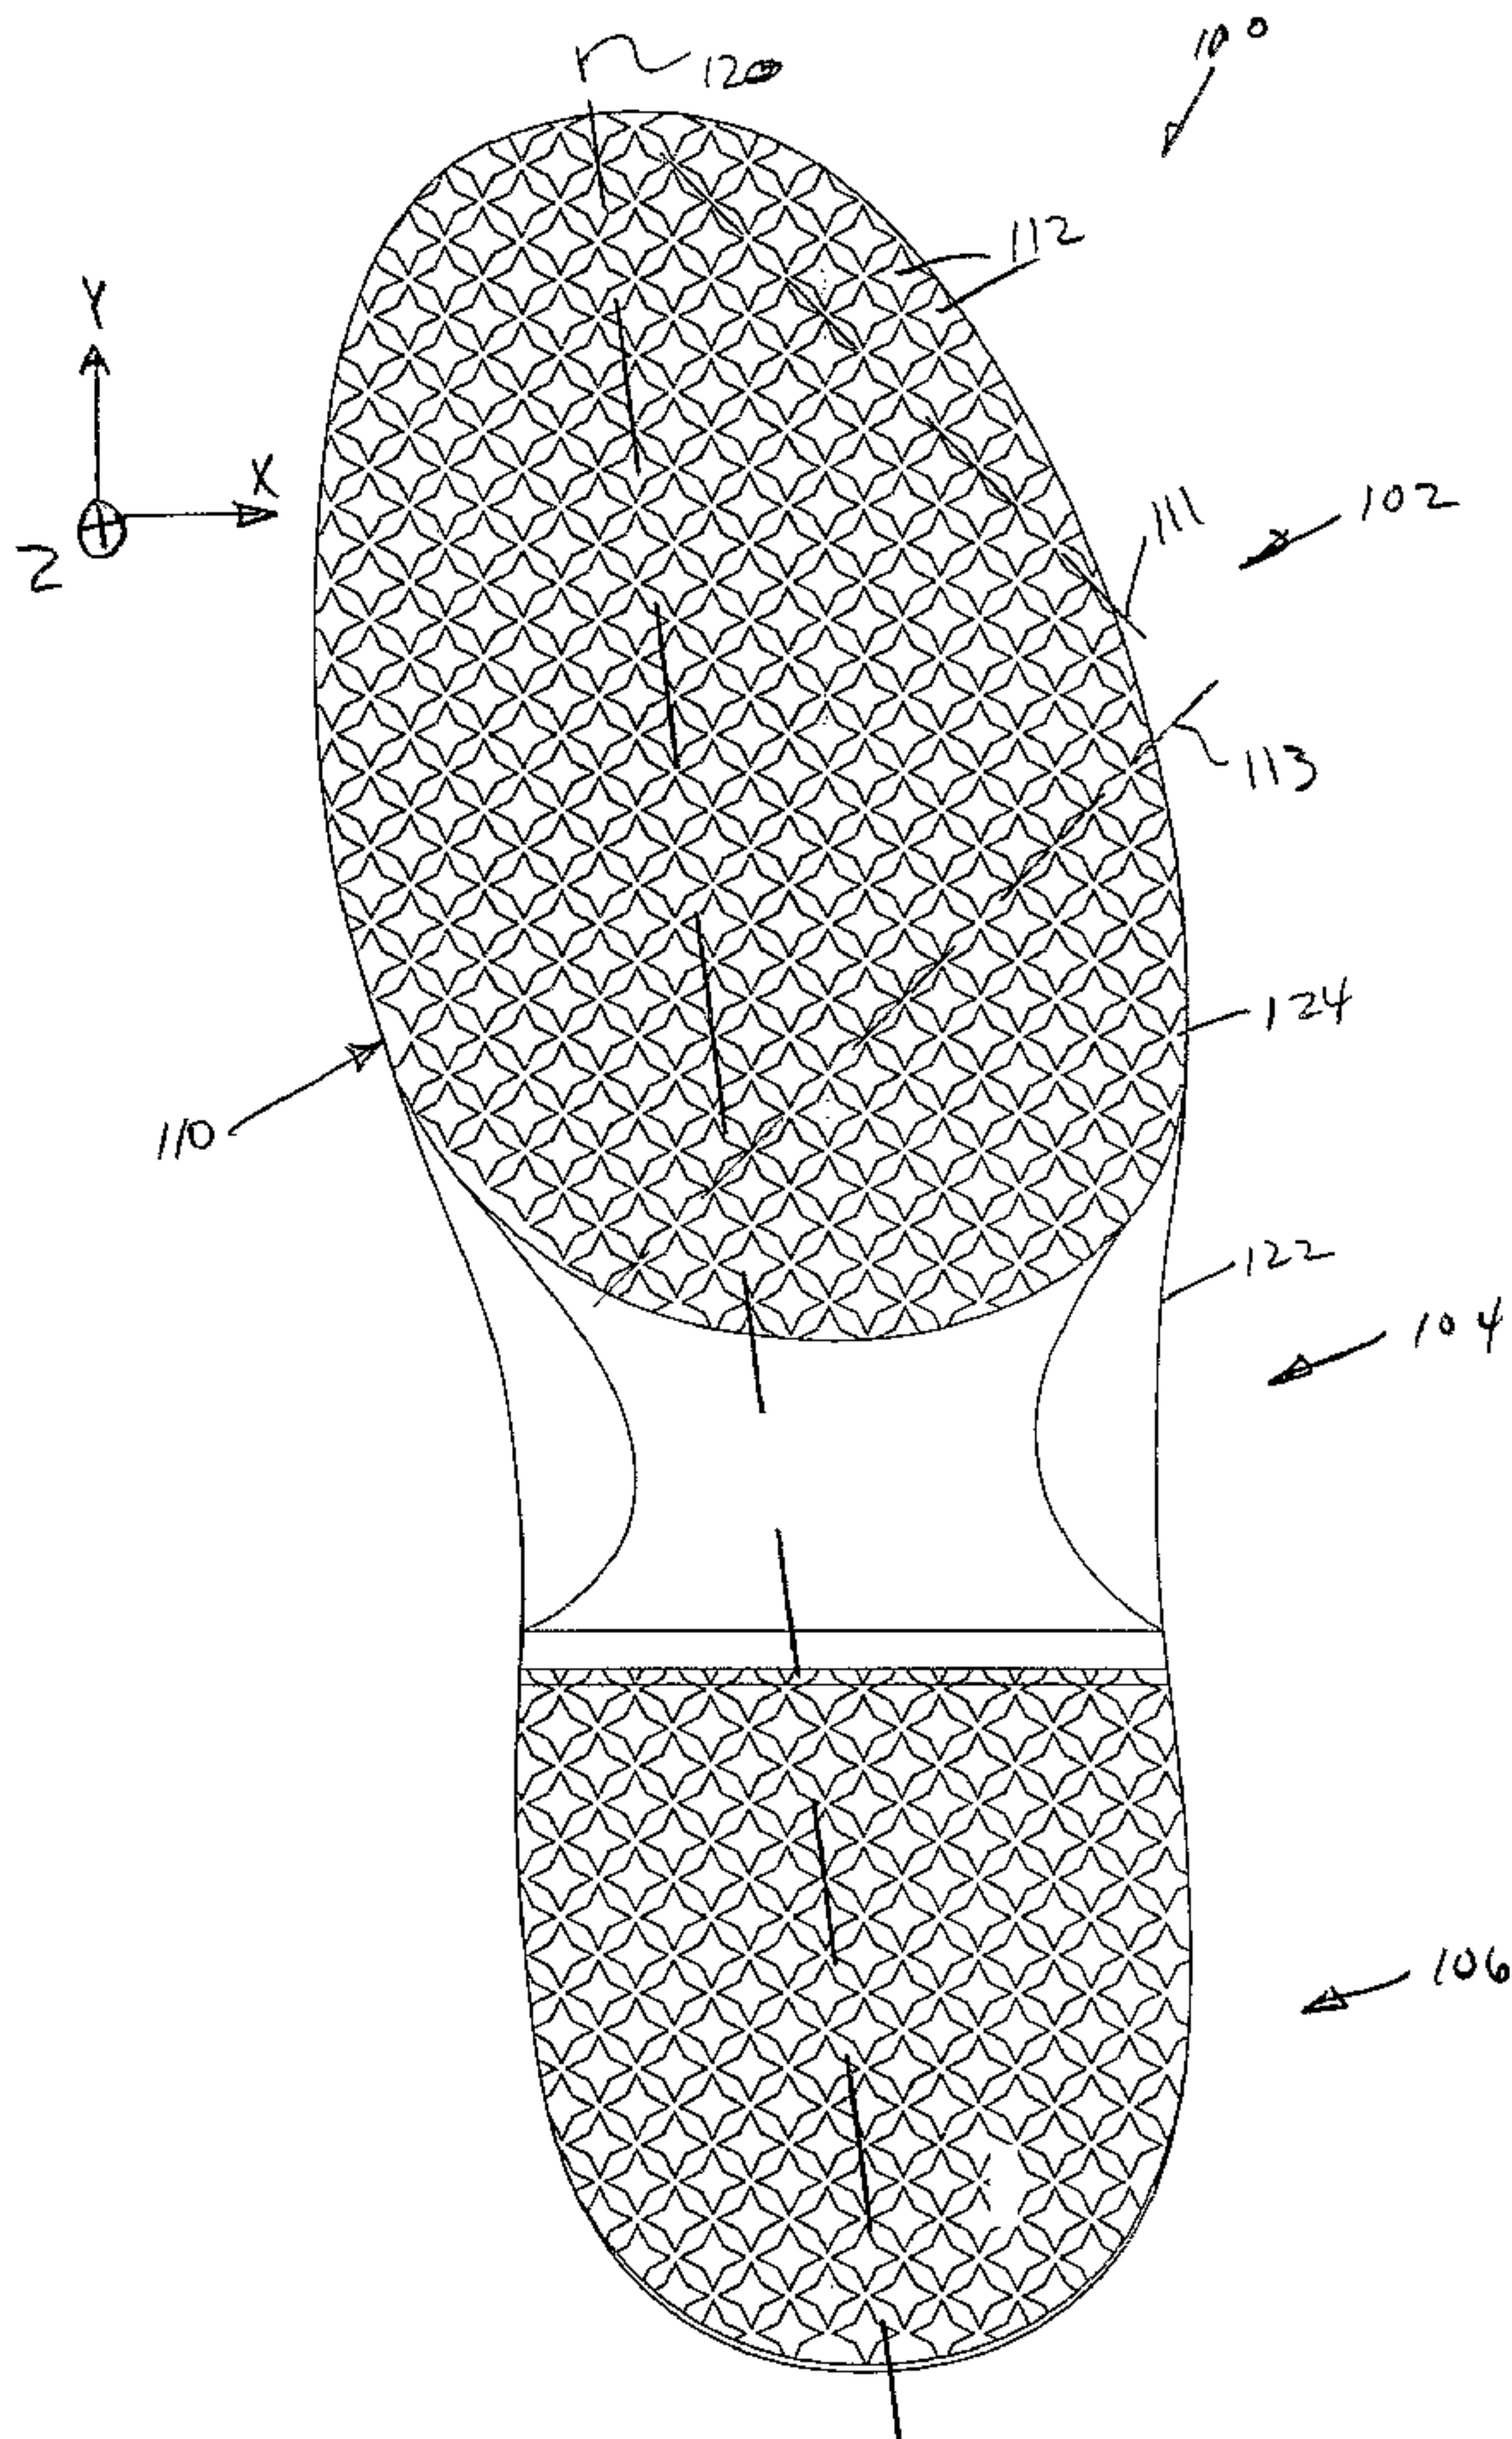

(57) Abstract: A footwear outsole (100) includes a base portion (110) defining a tread attachment surface (224), and a plurality of tread members (112). The tread members are coupled to the tread attachment surface and protrude away from the tread attachment surface to define a tread member height. Each tread member includes a plurality of pointed arm members (132, 134, 136, 138) that extend away from a center portion of the tread member in a direction substantially parallel to a plane of the attachment surface. The arm members include a pointed tip (144) that defines a maximum height of each tread member. The tread members include a primary surface facing away from the tread attachment surface. The primary surface includes a recessed portion that is reduced in height from the height of the plurality of edges (140, 142). The tread members may be arranged in a pattern across the tread attachment surface.

WO 2006/014940 A1

WO 2006/014940 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

FOOTWEAR OUTSOLE INCLUDING STAR SHAPES**Background of the Invention**Field of the Invention

The present invention generally relates to footwear soles, and more particularly relates to footwear outsoles and tread constructions for footwear outsoles.

Related Art

According to the U.S. Bureau of Labor Statistics, slip and fall accidents are the second leading personal injury incident and second cause of accidental death in the United States. For the approximately 10 million work force in the food and preparation serving industry, as reported by the Bureau of Labor Statistics, these incidents represent about 65% of all lost time accidents among employees and more than 50% of all falls are caused by a slippery walking surface. By wearing footwear that includes slip resistant soles, some types of workers can minimize the risk of slip and fall accidents.

The slip resistance of a footwear can be tested using ASTM F1677-96 testing methods. These testing methods utilize the Brungraber Mark 11 testing, which applies both horizontal and vertical forces to a footwear sole simultaneously, resulting in a more thorough slip resistance measurement. These testing methods are well recognized throughout the United States and many other parts of the world.

The focus of the Brungraber testing is to measure the slip resistance of a footwear on dry, wet, and oily/wet surfaces. The tests are conducted on a 4-inch square section of American Olean red quarry tile as a test surface. To generate a slippery surface, testing labs use 0.05 grams (2 drops) of vegetable oil for the oily test. For the oily/wet test, 25 milliliters of water is added to the 0.05 grams of vegetable oil. A second test uses 0.2 grams (7 drops) of vegetable oil for the oily test with 25 milliliters of water added for the oily/wet testing. There are also dry tests and wet tests performed on the tile surface.

The slip resistance of a footwear can be affected by both the tread design and the materials of the footwear outsole. A footwear with improved slip resistant properties using tread design, materials, or a combination of tread design and materials would be an advance in the art.

Summary of the Invention

The present invention generally relates to footwear outsoles and tread members for a footwear. One aspect of the invention relates to a footwear outsole that includes a base portion defining a tread attachment surface, and a plurality of tread members. The tread members are coupled to the tread attachment surface and protrude away from the tread attachment surface to define a tread member height. Each tread member includes a plurality of pointed arm members that extend away from a center portion of the tread member in a direction substantially parallel to a plane of the attachment surface. The arm members include a pointed tip that defines a maximum height of each tread member.

Another aspect of the invention relates to a footwear that includes an upper and an outsole coupled to the upper. The outsole includes an array of projections extending generally downward from the outsole. Each projection includes at least three pointed arms extending from a center portion of the projection in a direction substantially perpendicular to the direction in which the projection extends from the outsole. Each projection includes a downward facing primary surface defined in part by the pointed arms. The primary surface is configured to engage a ground surface and includes a recess formed therein.

A further aspect of the invention relates to a method of manufacturing a footwear sole. The method may include forming a base member that defines a mounting surface, forming a plurality of tread members, and coupling the tread members to the mounting surface. Each tread member includes a plurality of pointed arm members that extend from a center of the tread member in the plane of the mounting surface. The tread members may also include an outermost surface facing away from the mounting surface. The outermost surface includes a recess from tips of the pointed arm members toward a center of the tread member.

A still further aspect of the invention relates to a sole tread member that includes a base portion and a plurality of generally pointed arm members extending laterally from a center portion of the base portion. The base portion and arm members define an outward facing primary surface. The primary surface includes a recess and a plurality of edges that define a circumference of the recess.

Another aspect of the invention relates to a footwear outsole that includes a base portion defining a tread attachment surface, and a plurality of tread

members coupled to the tread attachment surface. Each tread member includes a plurality of arm members that define a star shaped cross section. The cross section is taken in a direction parallel to a plane of the tread attachment surface. The tread members also include a primary surface facing away from the tread attachment surface. Each arm member includes a tip defined by an acute angle portion of the arm. The tips of the plurality of arm members defining a portion of the tread member extending furthest from the tread attachment surface.

A further aspect of the invention relates to a footwear outsole that includes a base portion having a tread attachment surface, and a plurality of tread members coupled to the tread attachment surface. Each tread member includes a plurality of pointed arms extending from a center portion of the tread member in a direction substantially perpendicular to the direction in which the tread member extends from the outsole. The plurality of tread members are positioned on the tread attachment surface at spaced apart locations from each other across an entire width of the base portion.

A still further aspect of the invention relates to a footwear outsole that includes a base portion defining a tread attachment surface, and a plurality of tread members coupled to the tread attachment surface. The tread members protrude away from the tread attachment surface, and each tread member includes a plurality of pointed arm members having an acute angle defining a point of each arm member. The tread members also include a recess formed in a primary surface of the tread member, the primary surface facing away from the tread attachment surface. The tread members may be aligned in diagonal rows relative to a longitudinal centerline of the outsole.

The above summary of the present invention is not intended to describe each disclosed embodiment or every implementation of the present invention. Figures in the detailed description that follow more particularly exemplify certain embodiments of the invention. While certain embodiments will be illustrated and describe embodiments of the invention, the invention is not limited to use in such embodiments.

Brief Description of the Drawings

Figure 1 is a bottom plan view of an example footwear sole member according to principles of the invention.

5 1. Figure 2 is a front view of the footwear sole member shown in Figure 1.

Figure 3 is an end view of the footwear sole member shown in Figure 1.

Figure 4 is a side view of the footwear sole member shown in Figure 1.

10 Figure 5 is a top plan view of the footwear sole member shown in Figure 1.

Figure 6 is a bottom plan view of another example footwear sole member according to principles of the invention.

15 6. Figure 7 is a side view of the footwear sole member shown in Figure 6.

Figure 8 is a top plan view of the footwear sole member shown in Figure 6.

Figure 9 is a plan view of an example star-shaped tread member according to principles of the present invention.

20 Figure 10 is a cross-sectional view of the tread member shown in Figure 9 taken along cross-sectional indicators 10-10.

Figure 11 is a cross-sectional view of the tread member shown in Figure 9 taken along cross-sectional indicators 11-11.

25 9. Figure 12 is a perspective view of the tread member shown in Figure 9.

While the invention is amenable to various modifications and alternate forms, specifics thereof have been shown by way of example and the drawings, and will be described in detail. It should be understood, however, that the intention is not to limit the invention to the particular embodiments described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention.

30

Detailed Description of the Preferred Embodiment

The present invention generally relates to footwear outsoles and tread constructions for footwear that provide improved slip resistant properties. An example tread construction according to the principles of the invention includes a plurality of tread members that protrude from a base member of the footwear outsole. The tread members include several pointed arm portions that extend laterally (a direction generally perpendicular from a direction in which the tread members protrude from the base member) from a center portion of the tread member to define a star-shape cross-section. The tread members also define a primary surface using the arm portions, wherein the primary surface faces generally downward and away from the base member of the footwear outsole. The aggregate primary surfaces of the plurality of tread members define a bottom surface of the footwear that has spaces between the tread members.

The arm portions of each tread member also define a plurality of edges and pointed tips that provide additional "gripping" of the tread members to a ground surface. The edges and pointed tips may be useful for directing fluid away from the tread member primary surface. The edges and pointed tips may also provide point and line contact areas between the footwear outsole and a ground surface that enhance the slip resistance of the footwear as compared to a surface contact between the ground surface and the footwear outsole.

The primary surface defined by each tread member may include a concave, cup-like shape that provides a "suction" effect that may further improve the slip resistance of the footwear. The tread constructions described herein may comprise a variety of different materials that also enhance the slip resistance of the footwear when combined with either or both of the star shapes and concave surface features of the tread construction.

The term "star shaped" as used herein is defined as any shape having at least two generally pointed arm portions that extend laterally outward from a center point. The resulting star shape may give the appearance of a multi-pointed star. Referring to Figure 1, arms of a tread member 112 may extend laterally from a center point in the XY plane while the tread member 112 as a whole protrudes from the tread attachment surface 224 in the Z direction. A star shape may include arms extending symmetrically from a center point or asymmetrically from a center point.

The arms may also have different sizes and shapes. An example shape includes an acute angle shape.

A concave and recessed surface as used herein is defined as any surface having a form that bulges inward. An example recessed surface resembles the interior of a portion of a sphere. Concave and recessed surfaces as used herein may include linear rather than curved portions. Preferably, concave and recessed surfaces as defined herein are any generally concave shaped surfaces that are recessed relative to a reference point such as a primary surface. A "footwear" as used herein is defined as any type of wear suitable for use on a foot such as, for example, a shoe, boot, sandal, overshoe, etc. The term "outsole" as used herein is defined as any layer or member of a footwear that defines in part an outermost bottom facing surface of a footwear.

Slip resistant tread constructions for footwear outsoles may include a plurality of tread projections having a circular, rectangular or triangular cross section. Each of these shaped tread members include several edges that define an edge length for the tread member. The tread members also typically define contact surfaces for contacting a ground surface. Further, when positioning several tread members relative to each other the tread members may define channels for directing fluids out from under the outsole or away from the contact surface. The tips and edges of the tread arms and the channel features may help improve the slip resistance of the tread construction.

An example footwear outsole 100 is shown and described with reference to Figures 1-5. The outsole 100 includes forefoot, midfoot, and hindfoot sections 102, 104, 106, a base outsole member 110, and a plurality of tread members or lugs 112. The base member 110 defines a periphery 122 of the footwear 100, and a mounting or tread attachment surface 124 to which the plurality of tread members 112 are coupled. The tread members 112 are positioned in an array of rows and columns that extend diagonally from a longitudinal axis 120. The tread members 112 are also slightly offset from each other so as to define diagonally extending channels (see dashed lines marked 111, 113 in Figure 1) in alignment with the rows and columns of tread members 112 as shown in Figure 1.

Other embodiments may include rows and columns of tread members that are aligned in parallel or perpendicular alignment with the axis 120, or at any

diagonal angle desired. In further embodiments, the tread members may be aligned in curved rows or columns along the length or across a width of certain portions of the outsole. In yet further embodiments, the tread members may be positioned at random locations on the outsole rather than in rows or columns. Still further, the tread members of a single footwear may have many different sizes and shapes. For example, different tread sizes may be positioned to correspond with certain anatomical features of a user's foot.

Referring now to Figures 9-12, an example single tread member 112 is shown in further detail. Each tread member includes first, second, third and fourth arms 132, 134, 136, 138, wherein each arm includes first and second edges 140, 142 and a tip 144. The arms 132, 134, 136, 138 are coupled to a core or central portion 130. In this embodiment, core 130 is square-shaped and each of the arms 132, 134, 136, 138 is triangular in shape. Other embodiments may include arms that are directly coupled to each other wherein no core piece is required. Further embodiments may include arms that have different shapes such as rectangular or polygonal shapes, or shapes that include one or more curved sides.

The edges 140, 142 of each arm are shown coupled to each other as a continuous edge. The continuous periphery edge surface defined by the arms 132, 134, 136, 138 has a length that is greater than a periphery edge surface of a square-shaped tread member having four side edges that extend between corners of the square (see the dashed lines 151 in Figure 22). Furthermore, the edges 140, 142 of each arm 132, 134, 136, 138 provide a total number of edges (eight edges for tread 112) that is greater than the number of edges for the square shaped tread 151, a triangle shaped tread (not shown) that includes three edge sections, or a circular shaped tread (not shown) that includes a single, continuous edge. A tread member with more than four edge sections may provide improved slip resistance as compared to a tread member with four or fewer edge sections.

The tread member 112 also includes a concave or recessed surface as shown in Figures 9-12. The concave surface is formed in the contact surface 146. The contact surface 146 is defined by top surfaces of the core 130 and arms 132, 134, 136, 138. The concave feature extends from the tip 144 of each arm towards the core 130. In some embodiments, the edges 140, 142 may also recess from the tip 144 towards a center of core 130. In other embodiments, the edges 140, 142 are all

generally coplanar with the tips 144. The top surfaces of the arms 132, 134, 136, 138 may be flat, slanted or curved between the edges 140, 142. The top surfaces of the arms 132, 134, 136, 138 may be flat, slanted or curved from the edges 140, 142 towards the recessed top surface of core 130. In other embodiments, the top surface
5 of the arms 132, 134, 136, 138 may be relatively flat and not include a recess while the top surface of the core 130 includes a recessed feature with a slanted or curved portions in a transition area between the top surface of arms 132, 134, 136, 138 and the top surface of core 130.

The concave/recessed feature of the primary surface 146 may provide
10 several advantages related to slip resistance. One advantage of the concave/recessed feature is that it isolates the tip 144 and edges 140, 142 vertically from the core 13. As a result, the first contact between a ground surface and the tread member 112 (the application of forces in the directions P and T shown in Figure 10) is at the tips 144, along the multiple edges 140, 142, or upon the surface area of the arms 132, 134,
15 136, 138 between the edges 140, 142 before contact with contact with the large outer facing surface the core 130. Another advantage of including a recessed primary surface 146 surrounded by edges 140, 142 and tips 144 is that foreign materials such as water or oil that would otherwise build up between the tread member 112 and the ground surface can be transferred into the recessed portion of the contact surface
20 146. Directing foreign materials away from the portion of the tread member that first contact a ground surface may improve slip resistance.

The recess of the primary surface 146 may be recessed a depth of about 0.1 mm to about 2 mm, more preferably depth of about 0.1 mm to about 0.5 mm, and most preferably about 0.3 mm. The depth D of the recess is measured from
25 an outer most point of the tread to the lowest depth of the recess (see Figure 10). The tread members 112 have a height H from the tread mounting surface 124 to an outermost point of the tread member (the point 144) of about 0.5 mm to about 5 mm, more preferably about 1 mm to 3 mm, and more preferably about 2.5 mm. The width W of the tread member measured from one tip 144 of one arm member to an
30 opposing tip 144 may be less than about 20 mm, more preferably between about 5 mm to about 15 mm, and most preferably about 7 mm to about 9 mm. Other sizes for the depth D, height H, and width W than those listed above may be possible.

The number of tread members 112 on a give footwear outsole may vary. In one example, the outsole includes at least ten tread members in each of the forefoot and hindfoot portions 102, 106, an more preferably includes about 50 to 200 tread members in each of the forefoot and hindfoot portions 102, 106. In another
5 example, the footwear outsole includes at least 100 tread members total.

Referring again to Figure 1, the sole member 100 includes tread members 112 in the forefoot and hindfoot sections 102, 106, but not in the midfoot section 104. The midfoot section 104 includes a heel breast portion of the outsole base 110 that defines a recess that is typically not intended to make contact with a
10 ground surface when the footwear is used on a generally flat ground surface. In other embodiments, the tread members 112 may extend into the mid sole section 104 depending on the shape and design of the sole member. In still further embodiments, the tread members 112 may not extend to the outer periphery 122 of the sole member. For example, a strip of material may be positioned adjacent the
15 tread members 112 so as to define a boundary between the periphery 122 and the tread members 112.

In other embodiments, the sole member 100 may include only a few tread members that are clustered together at specific locations on the base portion 110 such as, for example, in discrete areas aligned with certain portions of a user's
20 foot. In still further embodiments, individual star members may be positioned separately at desired locations across the base portion mounting surface 124 and may be combined with other tread member configurations and outsole features.

Referring now to Figures 6-8, a further example footwear sole member 200 is shown and described. Sole member 200 includes forefoot, midfoot and hindfoot portions 202, 204, 206, a base portion 210 and a plurality of tread
25 members 212. The base member includes a longitudinal axis 220, a periphery 222, and a mounting surface 224. Each tread member 212 may include a core portion and a plurality of arms that each define first and second edges and a tip as described above with reference to sole member 100. The tread members 212 may also define
30 primary outward facing surfaces having a concave/recessed portion as described above with reference to tread members 112.

One difference between sole member 100 and sole member 200 is the shape of the forefoot and hindfoot sections 202, 206 and the size of the tread

members 212 as compared to tread members 112. Another difference between sole member 100 and sole member 200 is the structure of the midfoot section 204 as compared to midfoot section 104. A still further difference between sole members 100, 200 is the structure of the base portion 210 that extends in a direction opposite the mounting surface 224. The differences between base portion 110 and base portion 210 illustrate that many different base portion configurations can be used in combination with the star shaped tread members 112, 212.

The sole features described above may be constructed using a variety of different method such as, for example, molding or casting. Different portions of the sole such as the tread members and the base portion of the sole that the tread members are secured to may be formed separately using any desired method or process and then later secured together using a connecting method such as, for example, adhesives or heat welding. In one embodiment, the base portion of the sole and the tread members are molded together in a single step using, for example, injection molding. In another embodiment, the tread members are molded onto the base portion or vice versa.

The sole features described above may include different materials or combinations of materials to provide desired slip resistant properties. Some example materials includes natural rubber, synthetic rubber such as nitrile, styrene butadiene, and butyl, polyurethanes such as polyester and polyether, thermoplastic rubber, thermoplastic urethane, or combinations of these materials. In some embodiments, the tread members may include different materials than the base portion of the sole that the tread members are secured to. In other embodiments, the tread members themselves may includes different materials. For example, different tread members on a single footwear sole may include different materials to meet certain objectives for a specific portion of the sole (e.g., the heel strike area versa the forefoot area of the sole). In another example, a single tread member may include different layers of materials that are constructed by, for example, a layering molding process or by spraying a coating a layer onto a molded tread member.

The present invention should not be considered limited to the particular examples or materials described above, but rather should be understood to cover all aspects of the invention as fairly set out in the attached claims. Various modifications, equivalent processes, as well as numerous structures to which the

present invention may be applicable will be readily apparent to those of skill in the art to which the present invention is directed upon review of the instant specification.

What is claimed is:

1. A footwear outsole, comprising:
a base portion defining a tread attachment surface;
a plurality of tread members coupled to the tread attachment surface and protruding away from the tread attachment surface to define a tread member height, each tread member including a plurality of pointed arm members that extend away from a center portion of the tread member in a direction substantially parallel to a plane of the attachment surface, the arm members include a pointed tip that defines a maximum height of each tread member.
2. The outsole of claim 1, wherein the tread members include a primary surface facing away from the tread attachment surface, the primary surface including a recessed portion, the recessed portion being at a reduced height from the height of the plurality of edges.
3. The outsole of claim 2, wherein the recessed portion extends from a pointed tip of each arm member and along the plurality of edges toward a center portion of the tread member.
4. The outsole of claim 1, wherein each tread member includes at least two arm members having substantially the same size and shape.
5. The outsole of claim 1, wherein the tread members are aligned in rows and columns on the attachment surface.
6. The outsole of claim 1, wherein the base portion includes an outer periphery that defines an outer periphery of the footwear outsole, wherein at least some of the plurality of tread members extend along the outer periphery of the base portion.
7. The outsole of claim 1, wherein the tread members and the base member are molded together as a single piece.

8. The outsole of claim 1, wherein the plurality of tread members are aligned in rows and columns that extend diagonally to a longitudinal axis of the outsole.

9. The outsole of claim 4, wherein a pointed tip at an end of the arm members include a shape having an acute angle.

10. A footwear, comprising:
an upper;
an outsole coupled to the upper, the outsole including an array of projections extending generally downward from the outsole, each projection including at least three pointed arms extending from a center portion of the projection in a direction substantially perpendicular to the direction in which the projection extends from the outsole, each projection including a downward facing primary surface defined in part by the pointed arms and configured to engage a ground surface, the downward facing primary surface having a recess formed therein.

11. The footwear of claim 10, wherein the projections are aligned in rows that extend diagonally relative to a longitudinal centerline of the footwear.

12. The footwear of claim 11, wherein at least one arm member of each projection extends from the center portion of the projection in a direction of a longitudinal axis of the footwear.

13. The footwear of claim 10, wherein each projection includes a plurality of engagement edges that surround the downward facing primary surface and are configured to contact the ground surface before the recess of the downward facing primary surface contacts the ground surface.

14. The footwear of claim 13, wherein each projection includes at least six engagement edges, and each pointed arm defines two of the engagement edges.

15. The footwear of claim 13, wherein the plurality of engagement edges extend in a common plane.

16. A method of manufacturing a footwear sole, comprising:
forming a base member that defines a mounting surface;
forming a plurality of tread members, each tread member including a plurality of pointed arm members that extend from a center of the tread member in the plane of the mounting surface, and including an outermost surface facing away from the mounting surface, the outermost surface including a recess, the recess being circumscribed by a plurality of contact edges defined by edges of the arm member; and
coupling the plurality of tread members to the mounting surface.

17. The method of claim 16, wherein each arm member defines a portion of the recess.

18. The method of claim 16, wherein a point of the arm member positioned furthest from the center of the tread member is configured with an acute angle shape.

19. The method of claim 18, wherein each tread member includes at least four arm members.

20. The method of claim 16, wherein at least one arm member of at least one tread member is aligned along a longitudinal axis of the footwear sole.

21. The method of claim 16, coupling the plurality of tread members to the mounting surface includes molding the tread members and the base member in a single step.

22. A sole tread member, comprising:
a base portion; and
a plurality of generally pointed arm members extending laterally from a center portion of the base portion;

wherein the base portion and arm members define an outward facing primary surface, the outward facing primary surface including a recess and a plurality of edges that define a circumference of the recess.

23. The tread member of claim 22, wherein the tread member includes at least four pointed arm members, and each arm member includes a triangular cross-section.

24. The tread member of claim 22, wherein the plurality of arm member each define at least two of the plurality of edges.

25. The tread member of claim 22, wherein the plurality of edges define a circumference of the tread member.

26. A footwear outsole, comprising:
a base portion defining a tread attachment surface; and
a plurality of tread members coupled to the tread attachment surface, each tread member including a plurality of arm members that define a star shaped cross section in a direction parallel to a plane of the tread attachment surface and a primary surface facing away from the tread attachment surface, each arm member including a tip defined by an acute angle portion of the arm, the tips of the plurality of arm members defining a portion of the tread member extending furthest from the tread attachment surface.

27. The footwear outsole of claim 26, wherein a portion of the primary surface includes a recessed toward the tread attachment surface relative to the plurality of edges.

28. The footwear outsole of claim 26, wherein the outsole includes at least 20 tread members.

29. The footwear outsole of claim 26, wherein the tread members have a width measured from tips of opposing arm members, the width being between 5 to 10 mm.

30. The footwear outsole of claim 26, wherein the tread members include a primary surface facing away from the tread attachment surface, the primary surface including a recessed portion, the recessed portion being at a reduced height from the height of the plurality of edges about between about 0.1 to about 0.5 mm.

31. A footwear outsole, comprising:
a base portion having a tread attachment surface; and
a plurality of tread members coupled to the tread attachment surface, each tread member including a plurality of pointed arms extending from a center portion of the tread member in a direction substantially perpendicular to the direction in which the tread member extends from the outsole, wherein the plurality of tread members are positioned on the tread attachment surface at spaced apart locations from each other across an entire width of the base portion.

32. The footwear outsole of claim 31, wherein the tread members extend across substantially an entire width of a hindfoot and forefoot portion of the base portion.

33. A footwear outsole, comprising:
a base portion defining a tread attachment surface;
a plurality of tread members coupled to the tread attachment surface and protruding away from the tread attachment surface, each tread member including a plurality of pointed arm members having an acute angle defining a point of each arm member, the tread members including a recess formed in a primary surface facing away from the tread attachment surface, the tread members being aligned in diagonal rows.

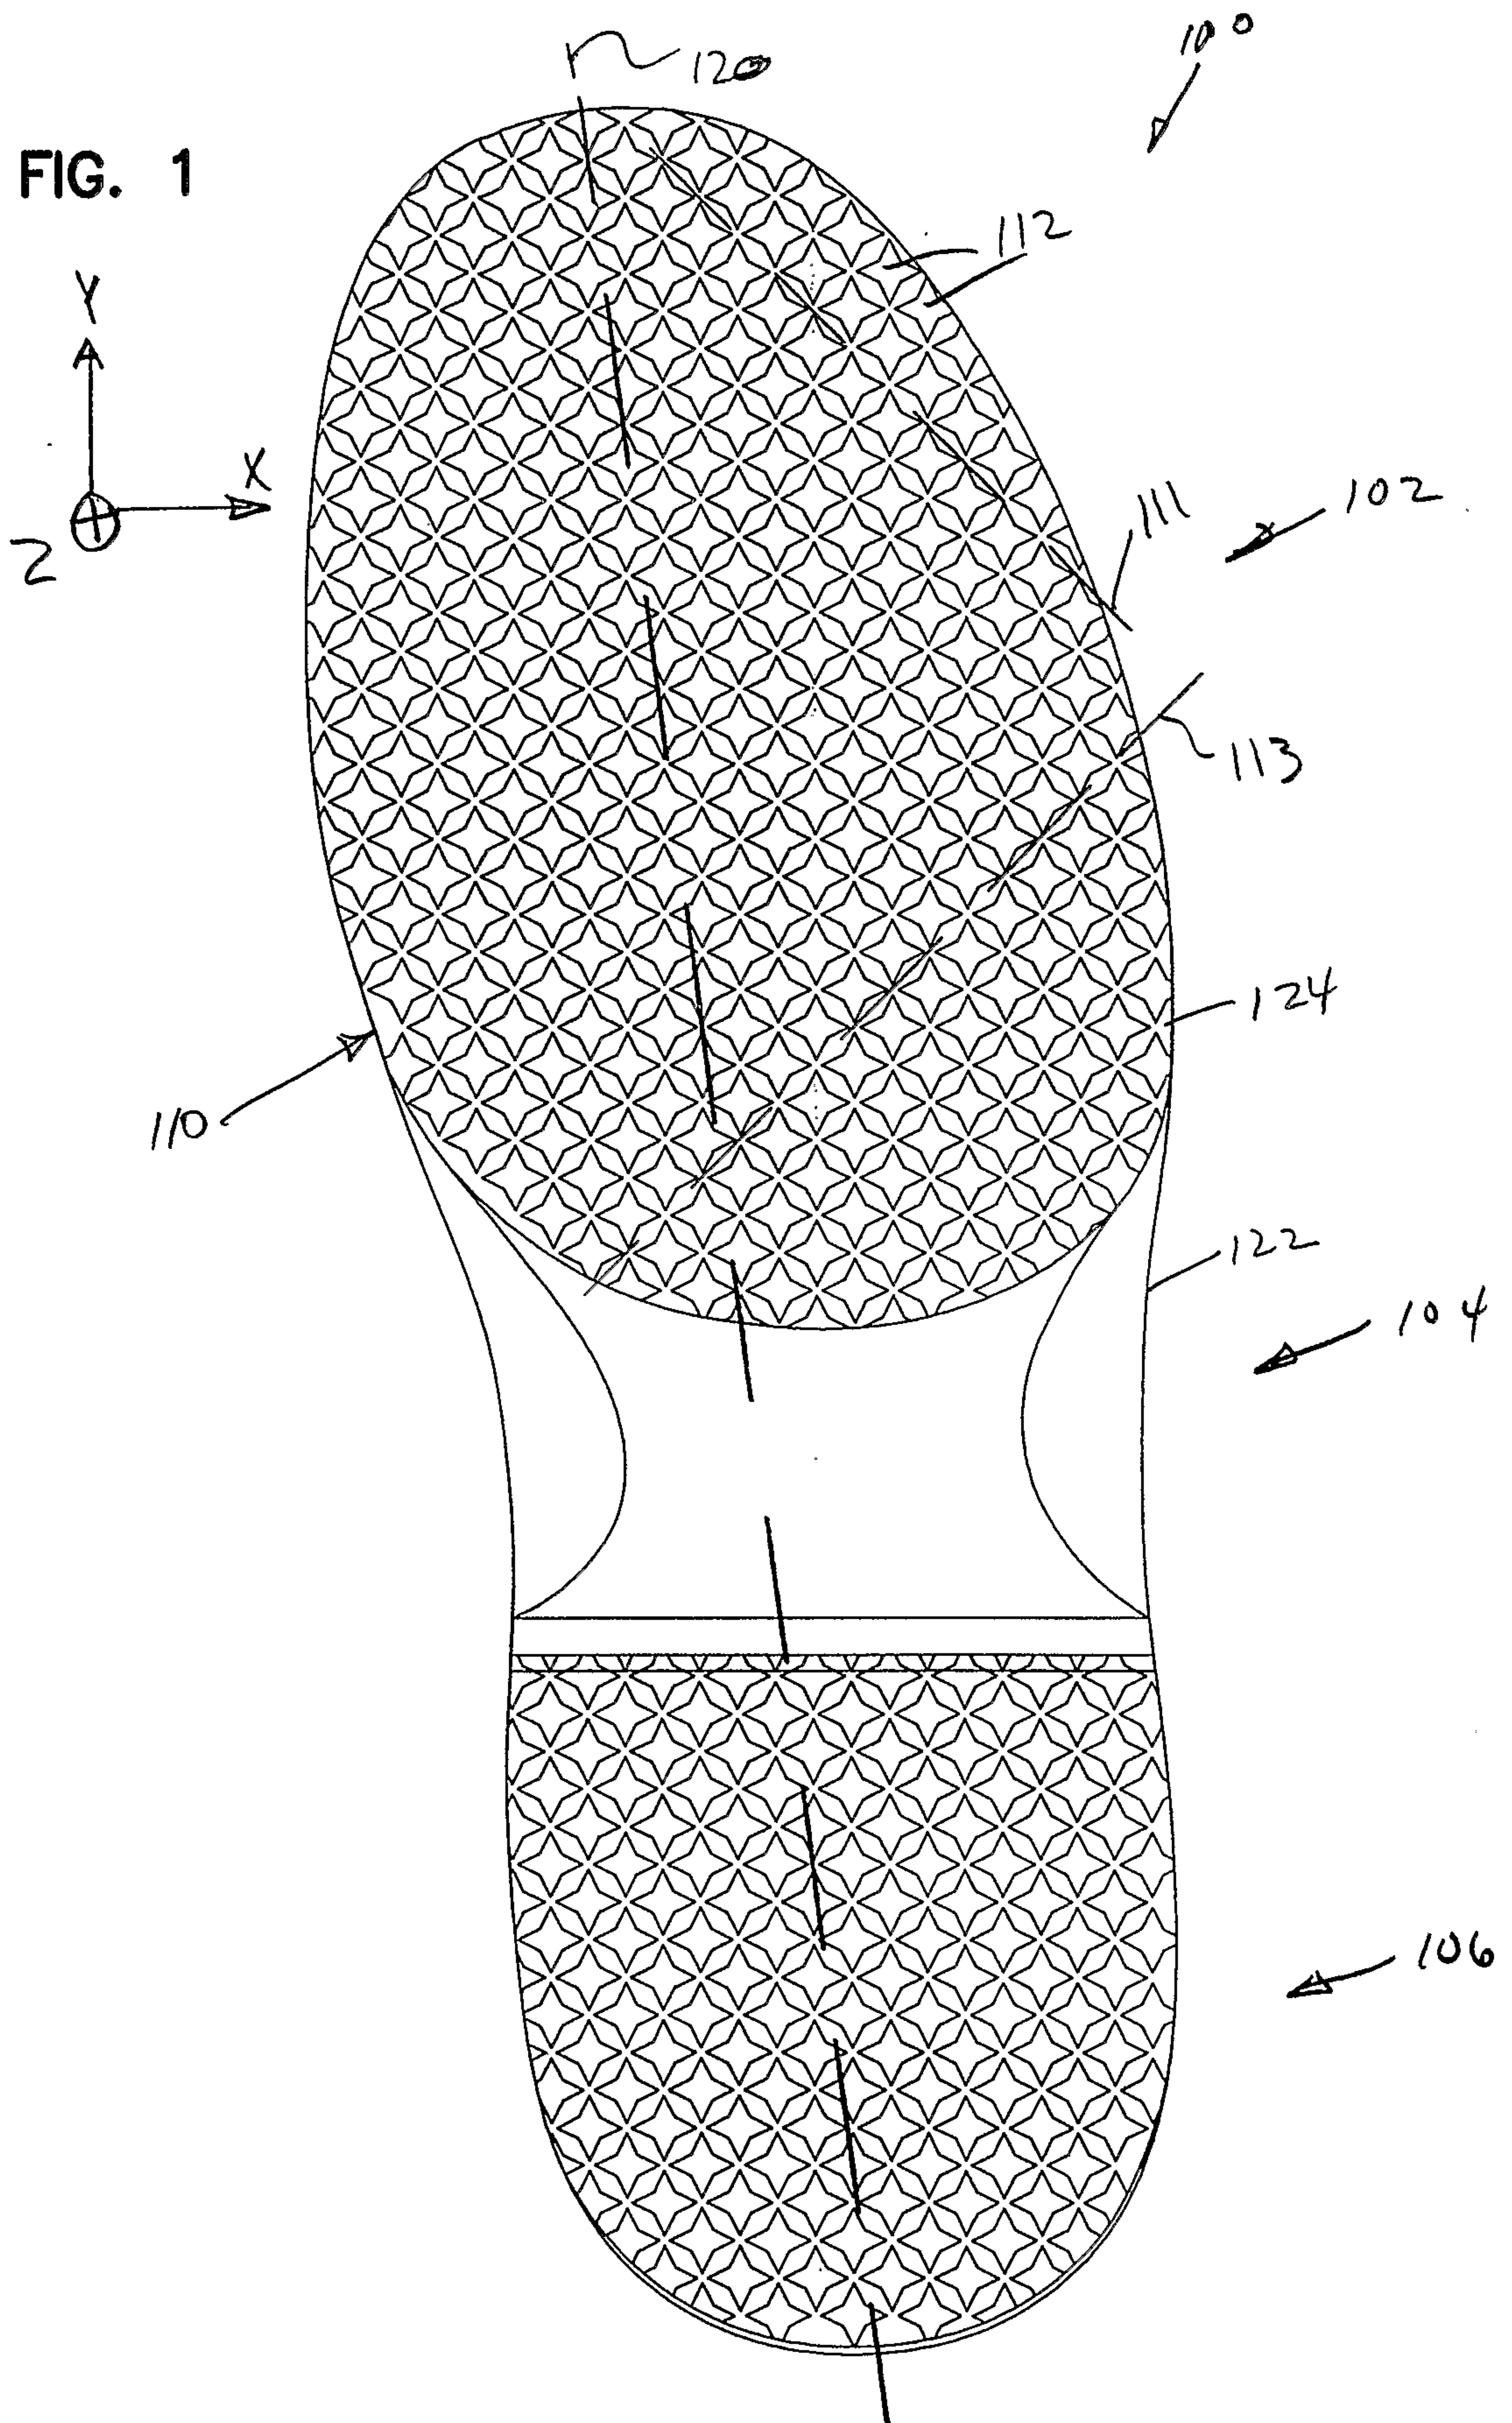


FIG. 2

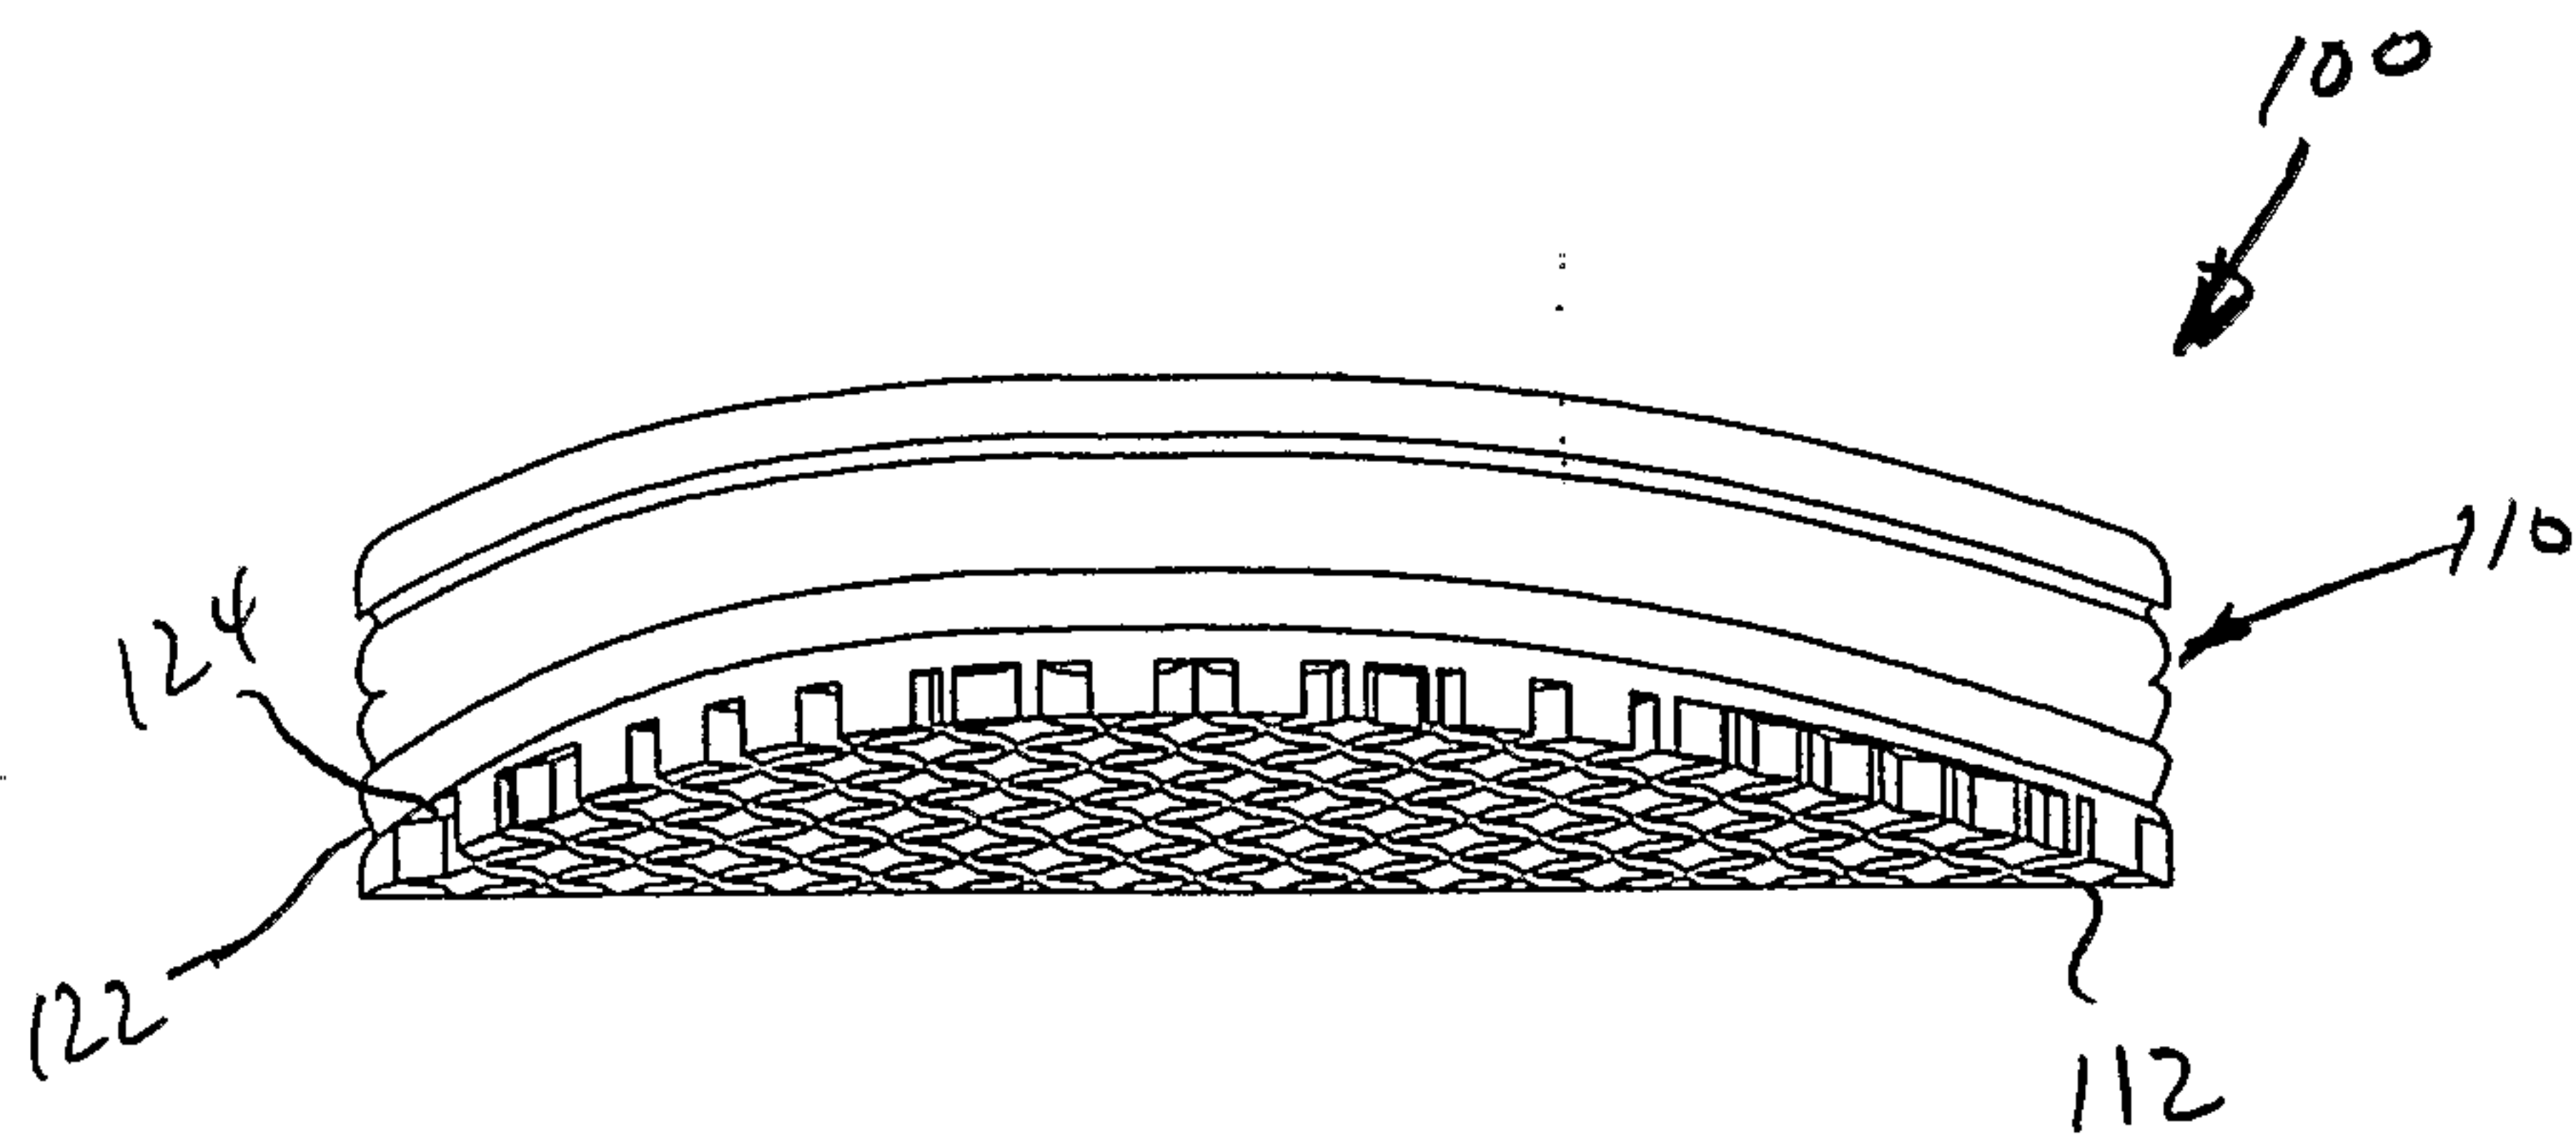


FIG. 3

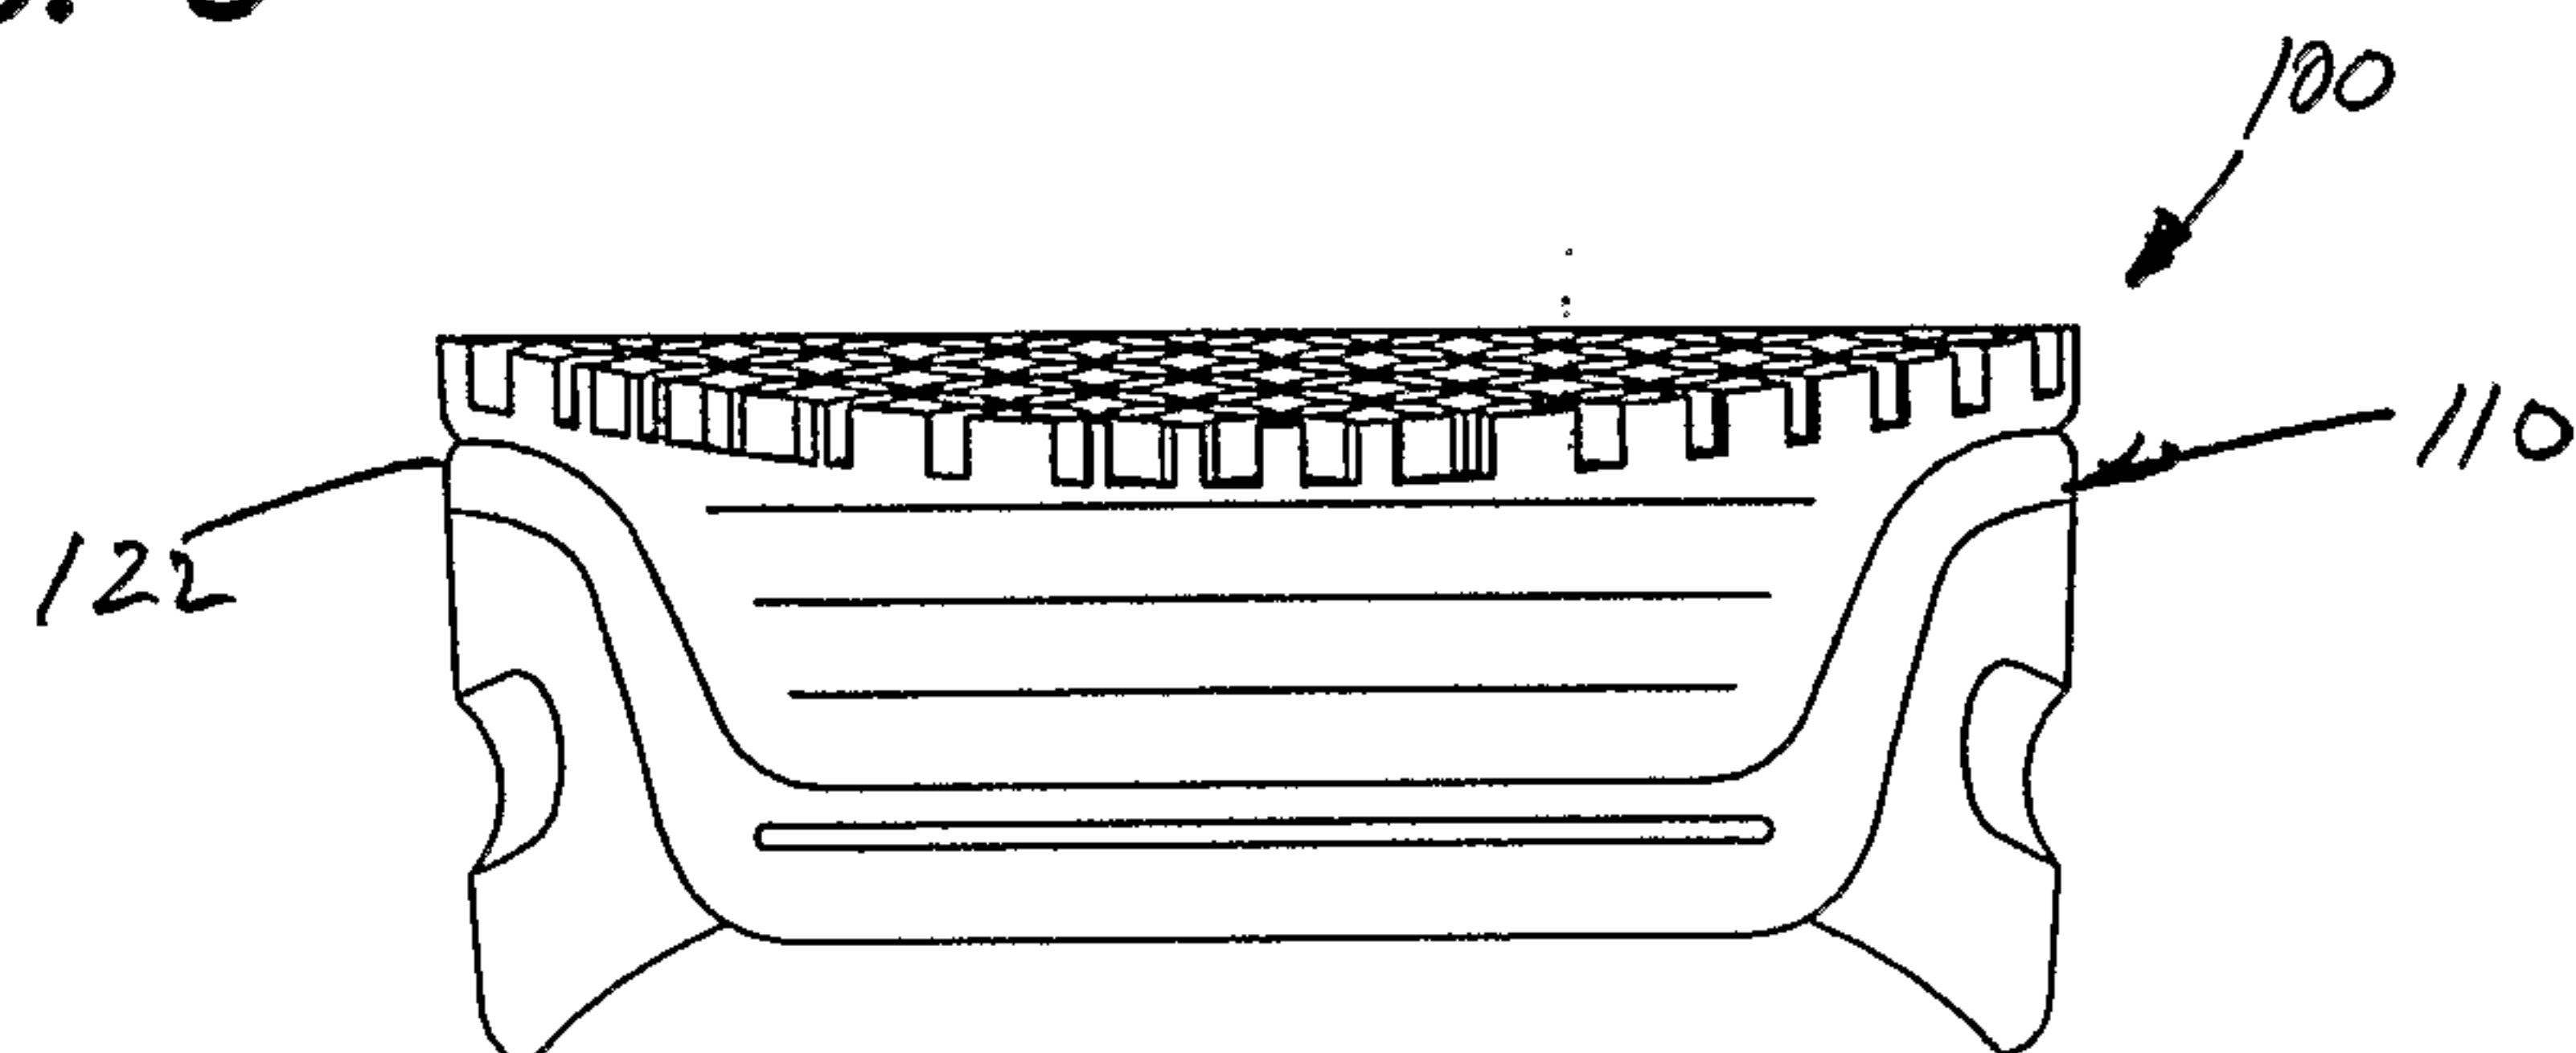


FIG. 4

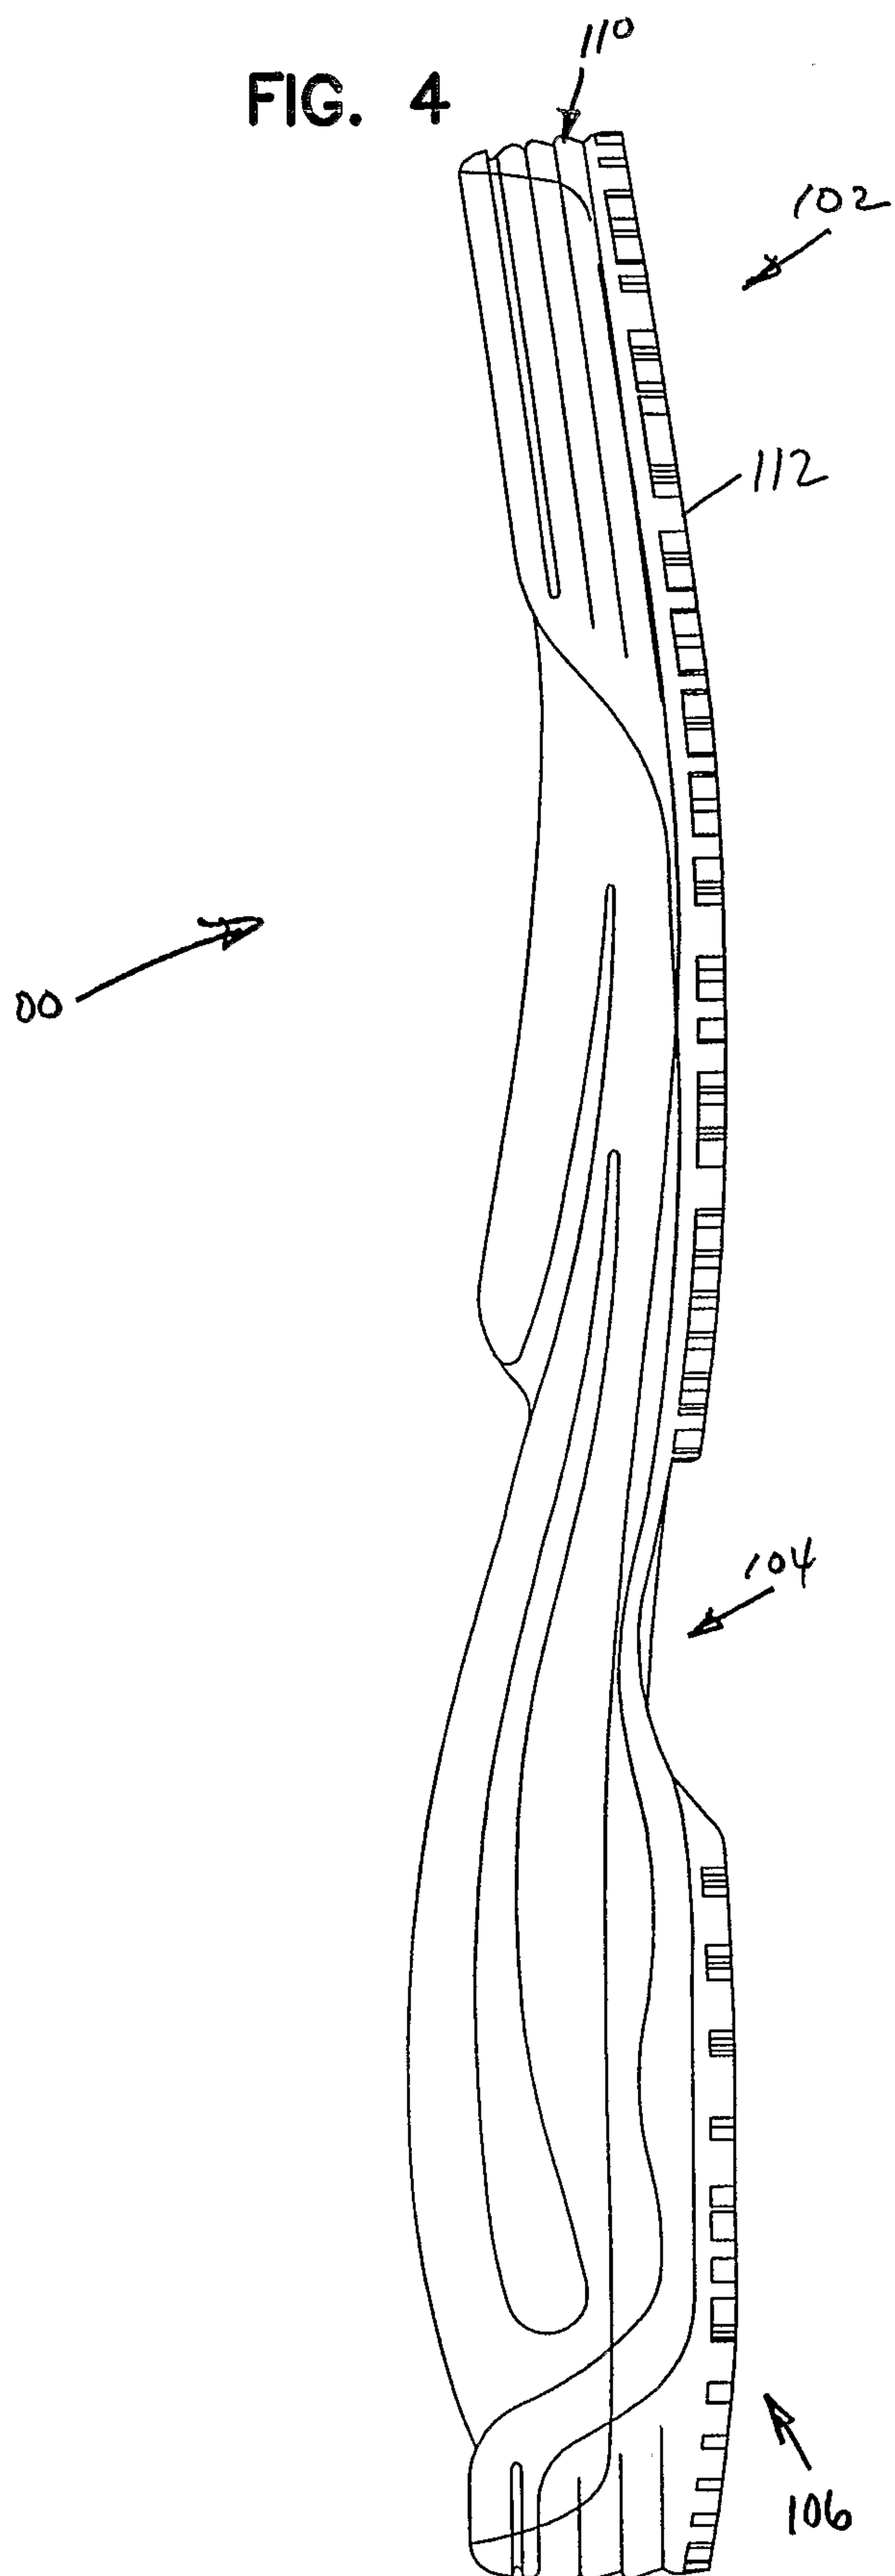
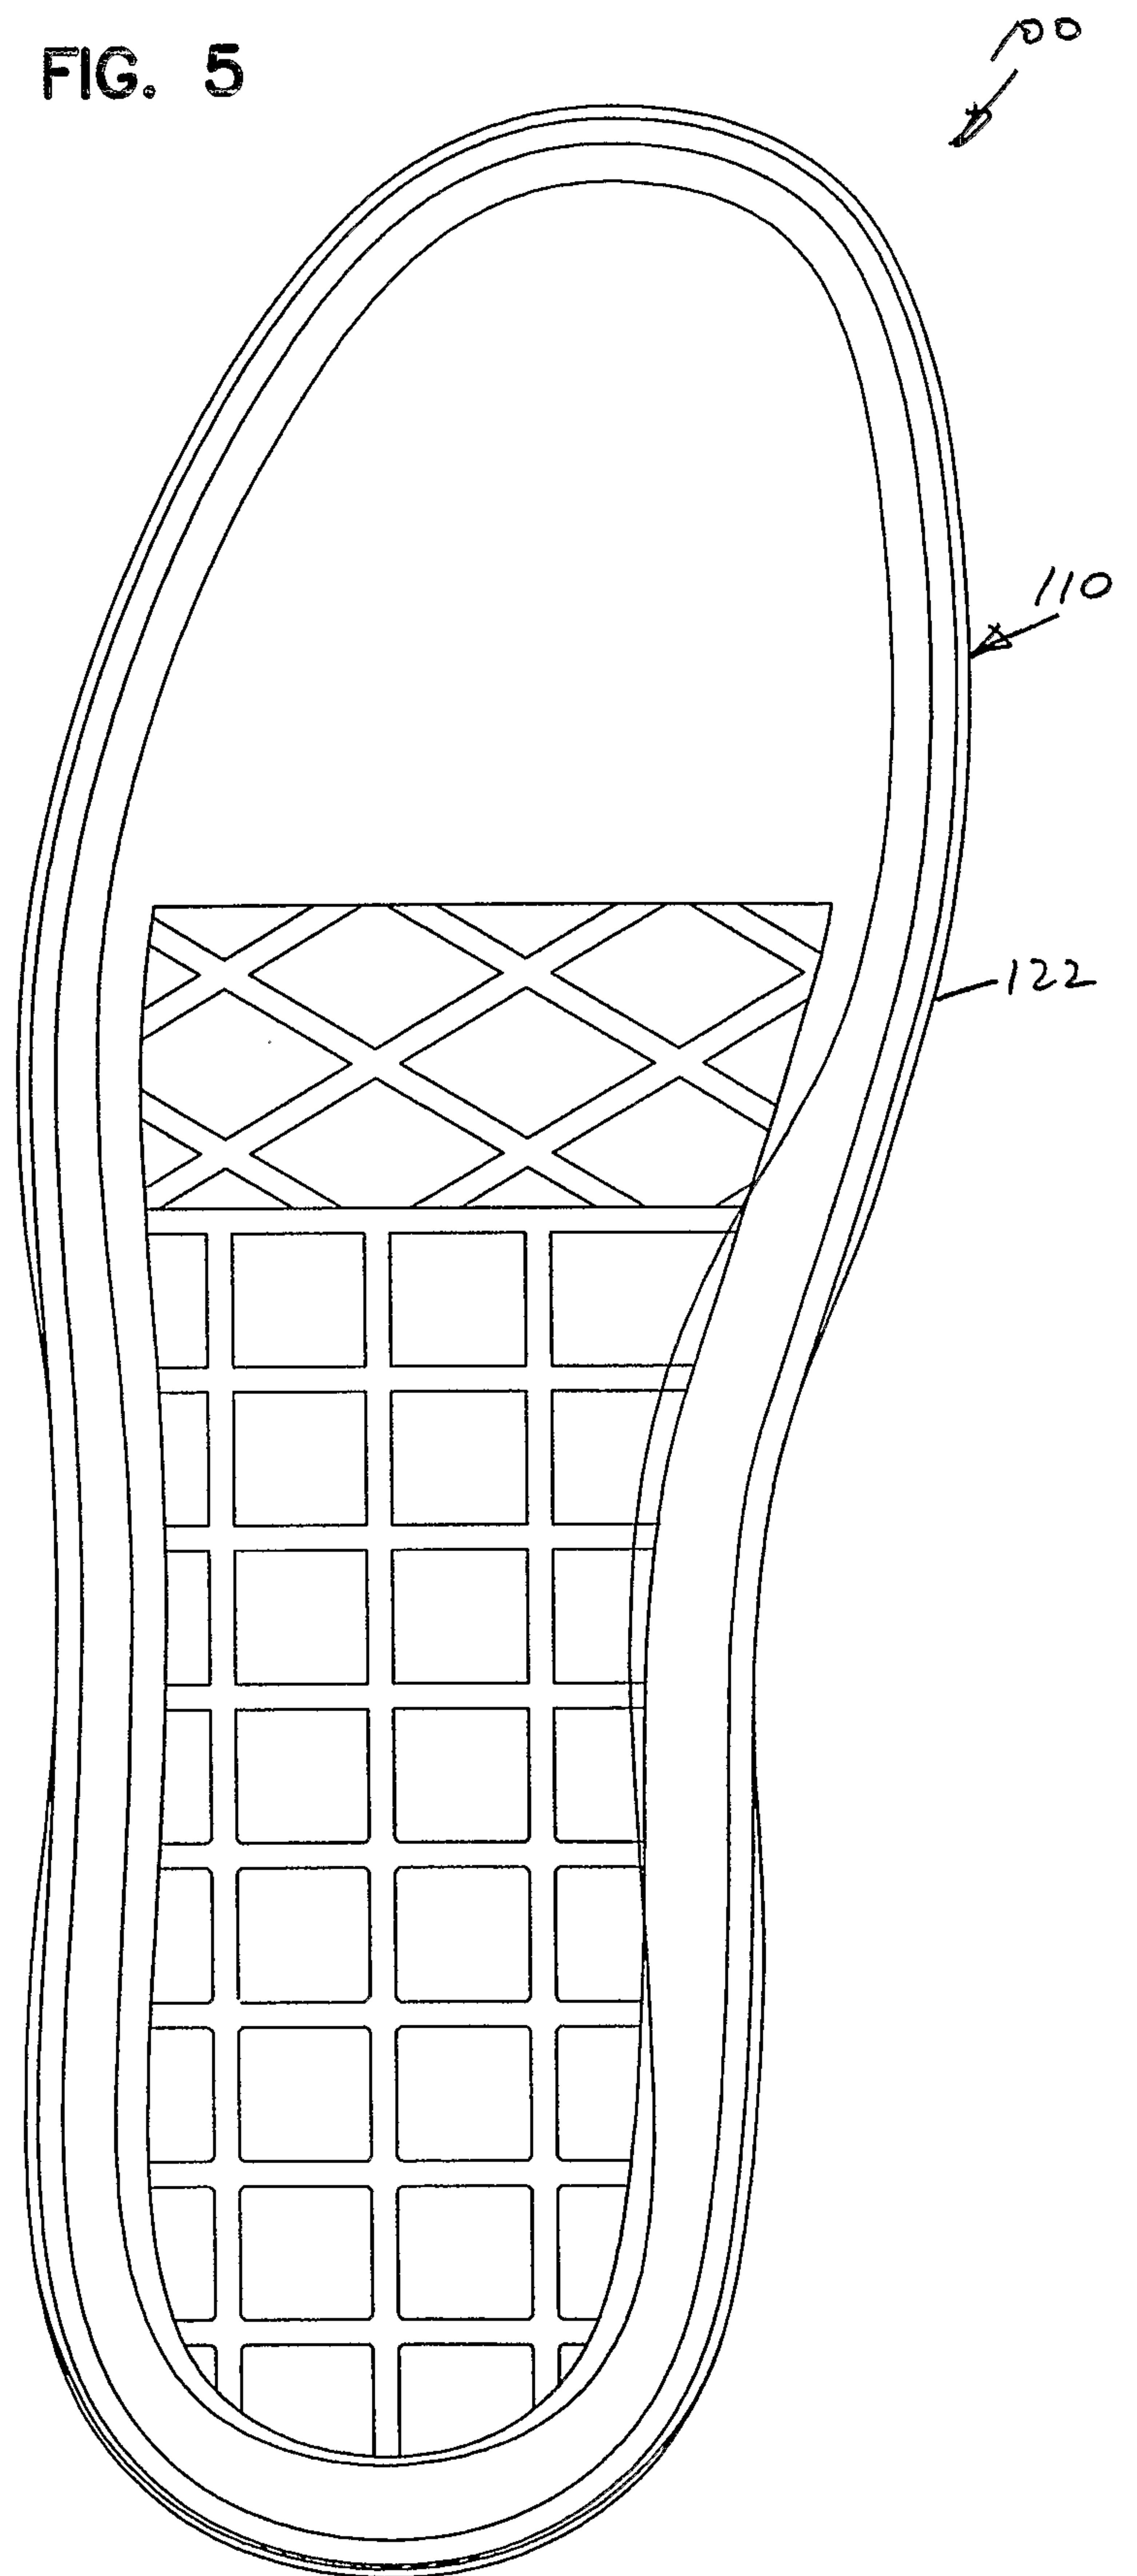


FIG. 5



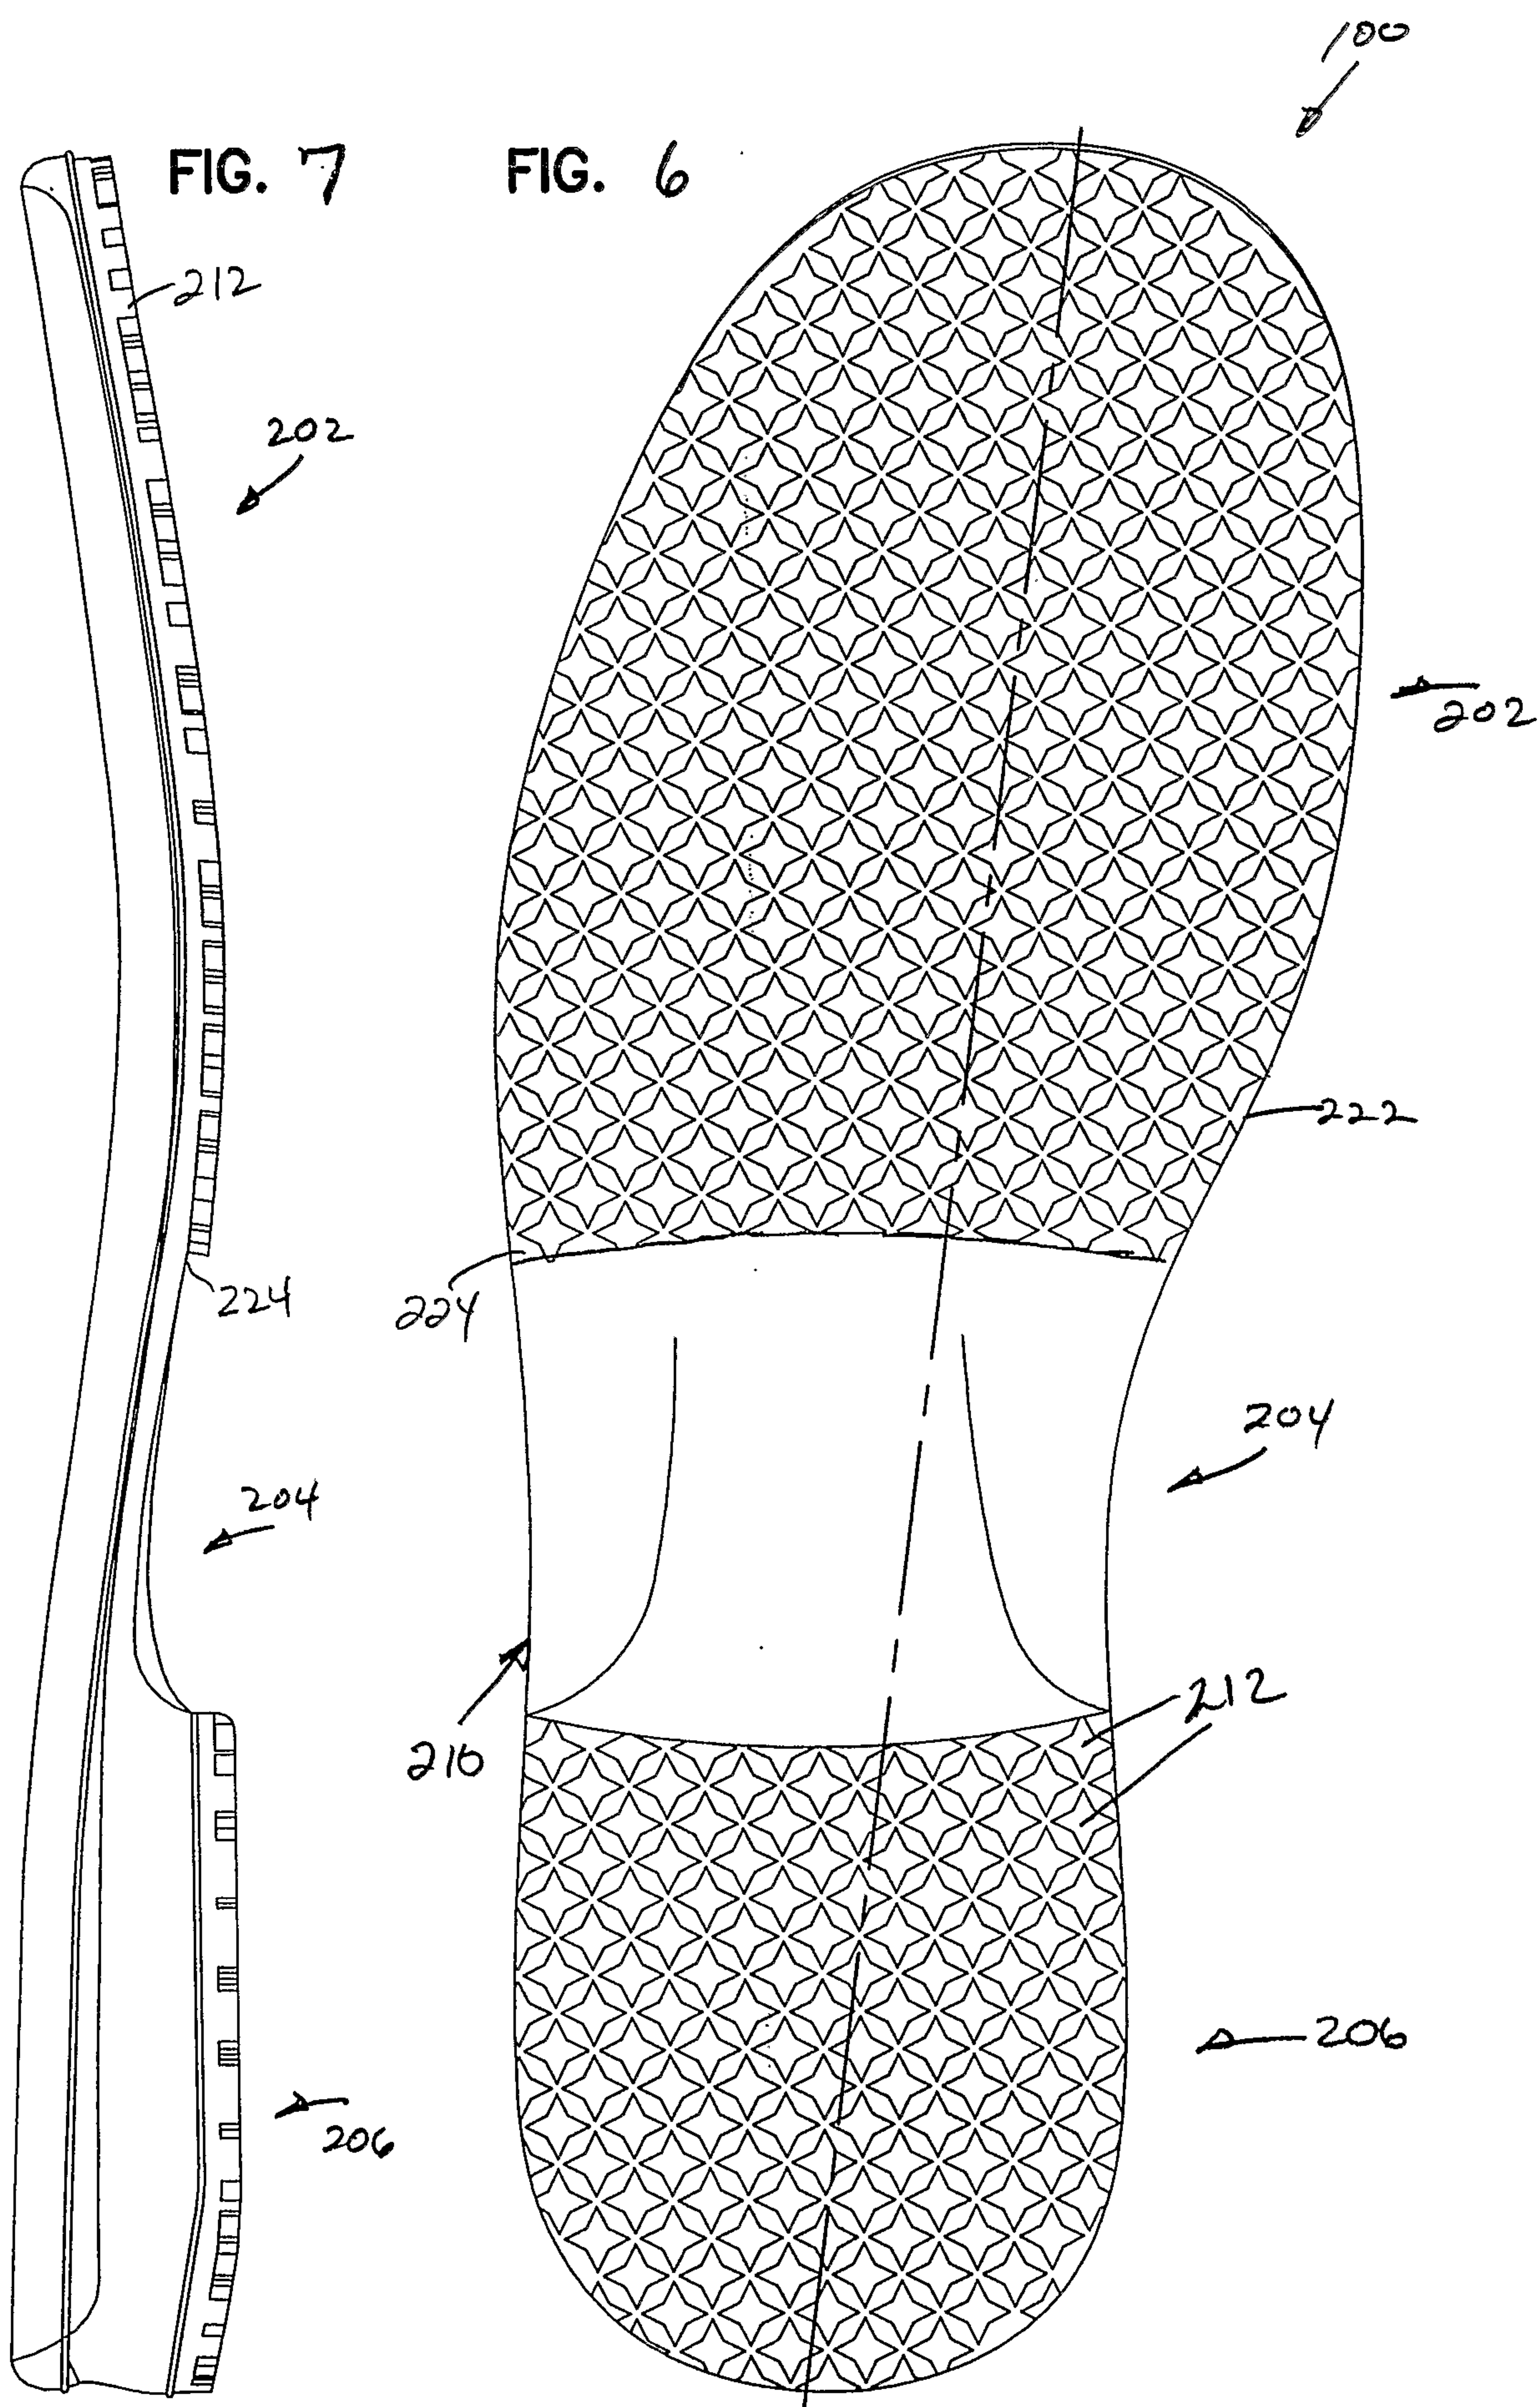


FIG. 8

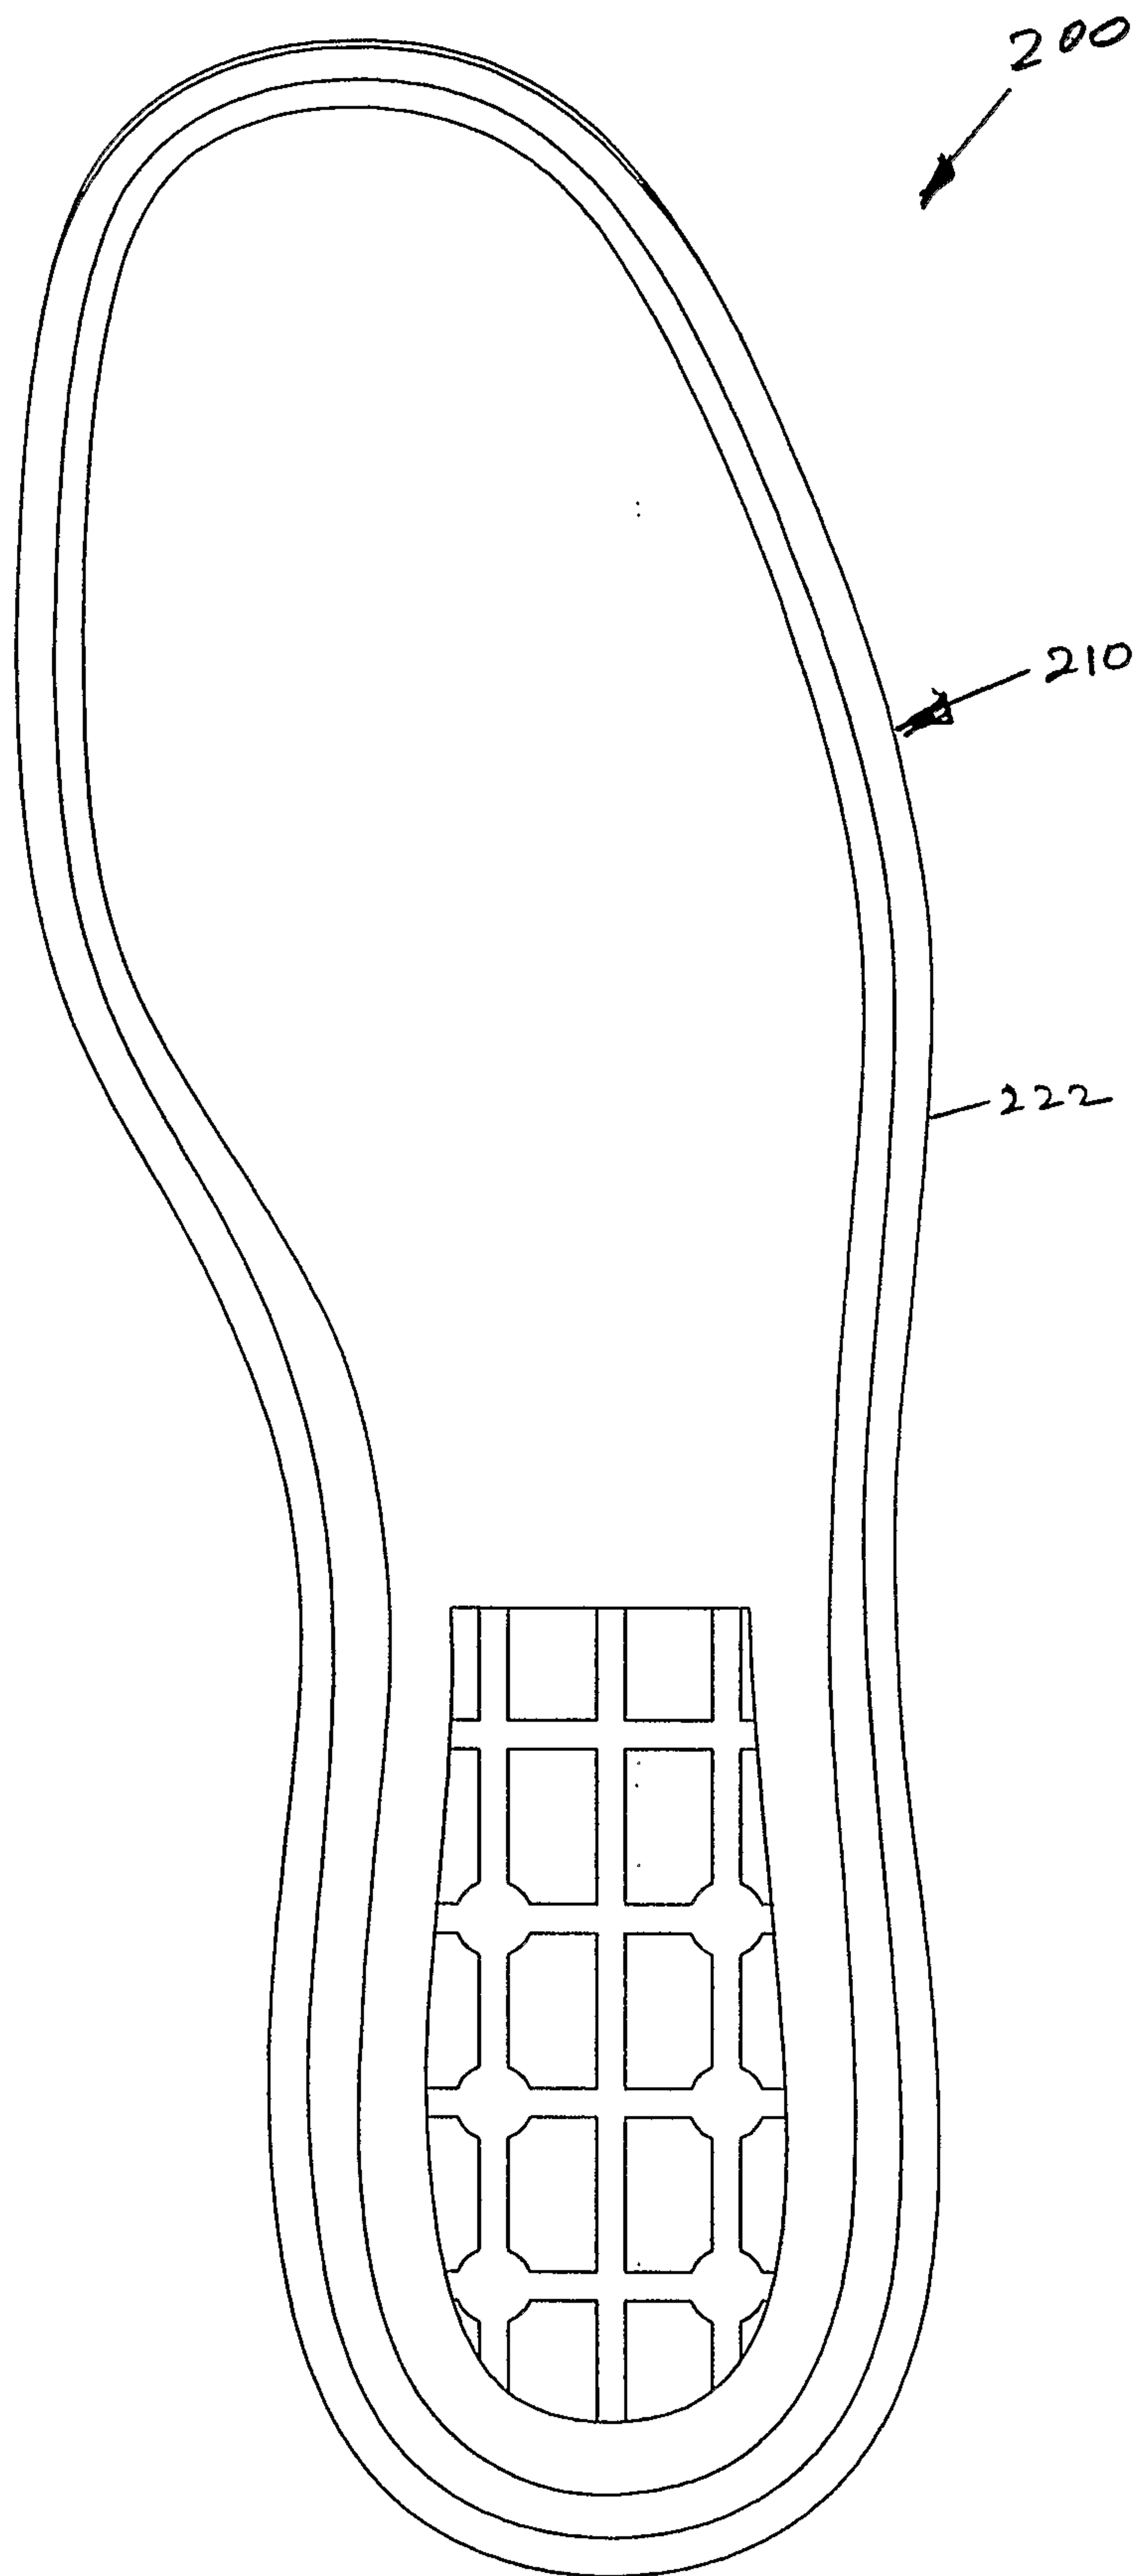


FIG. 12

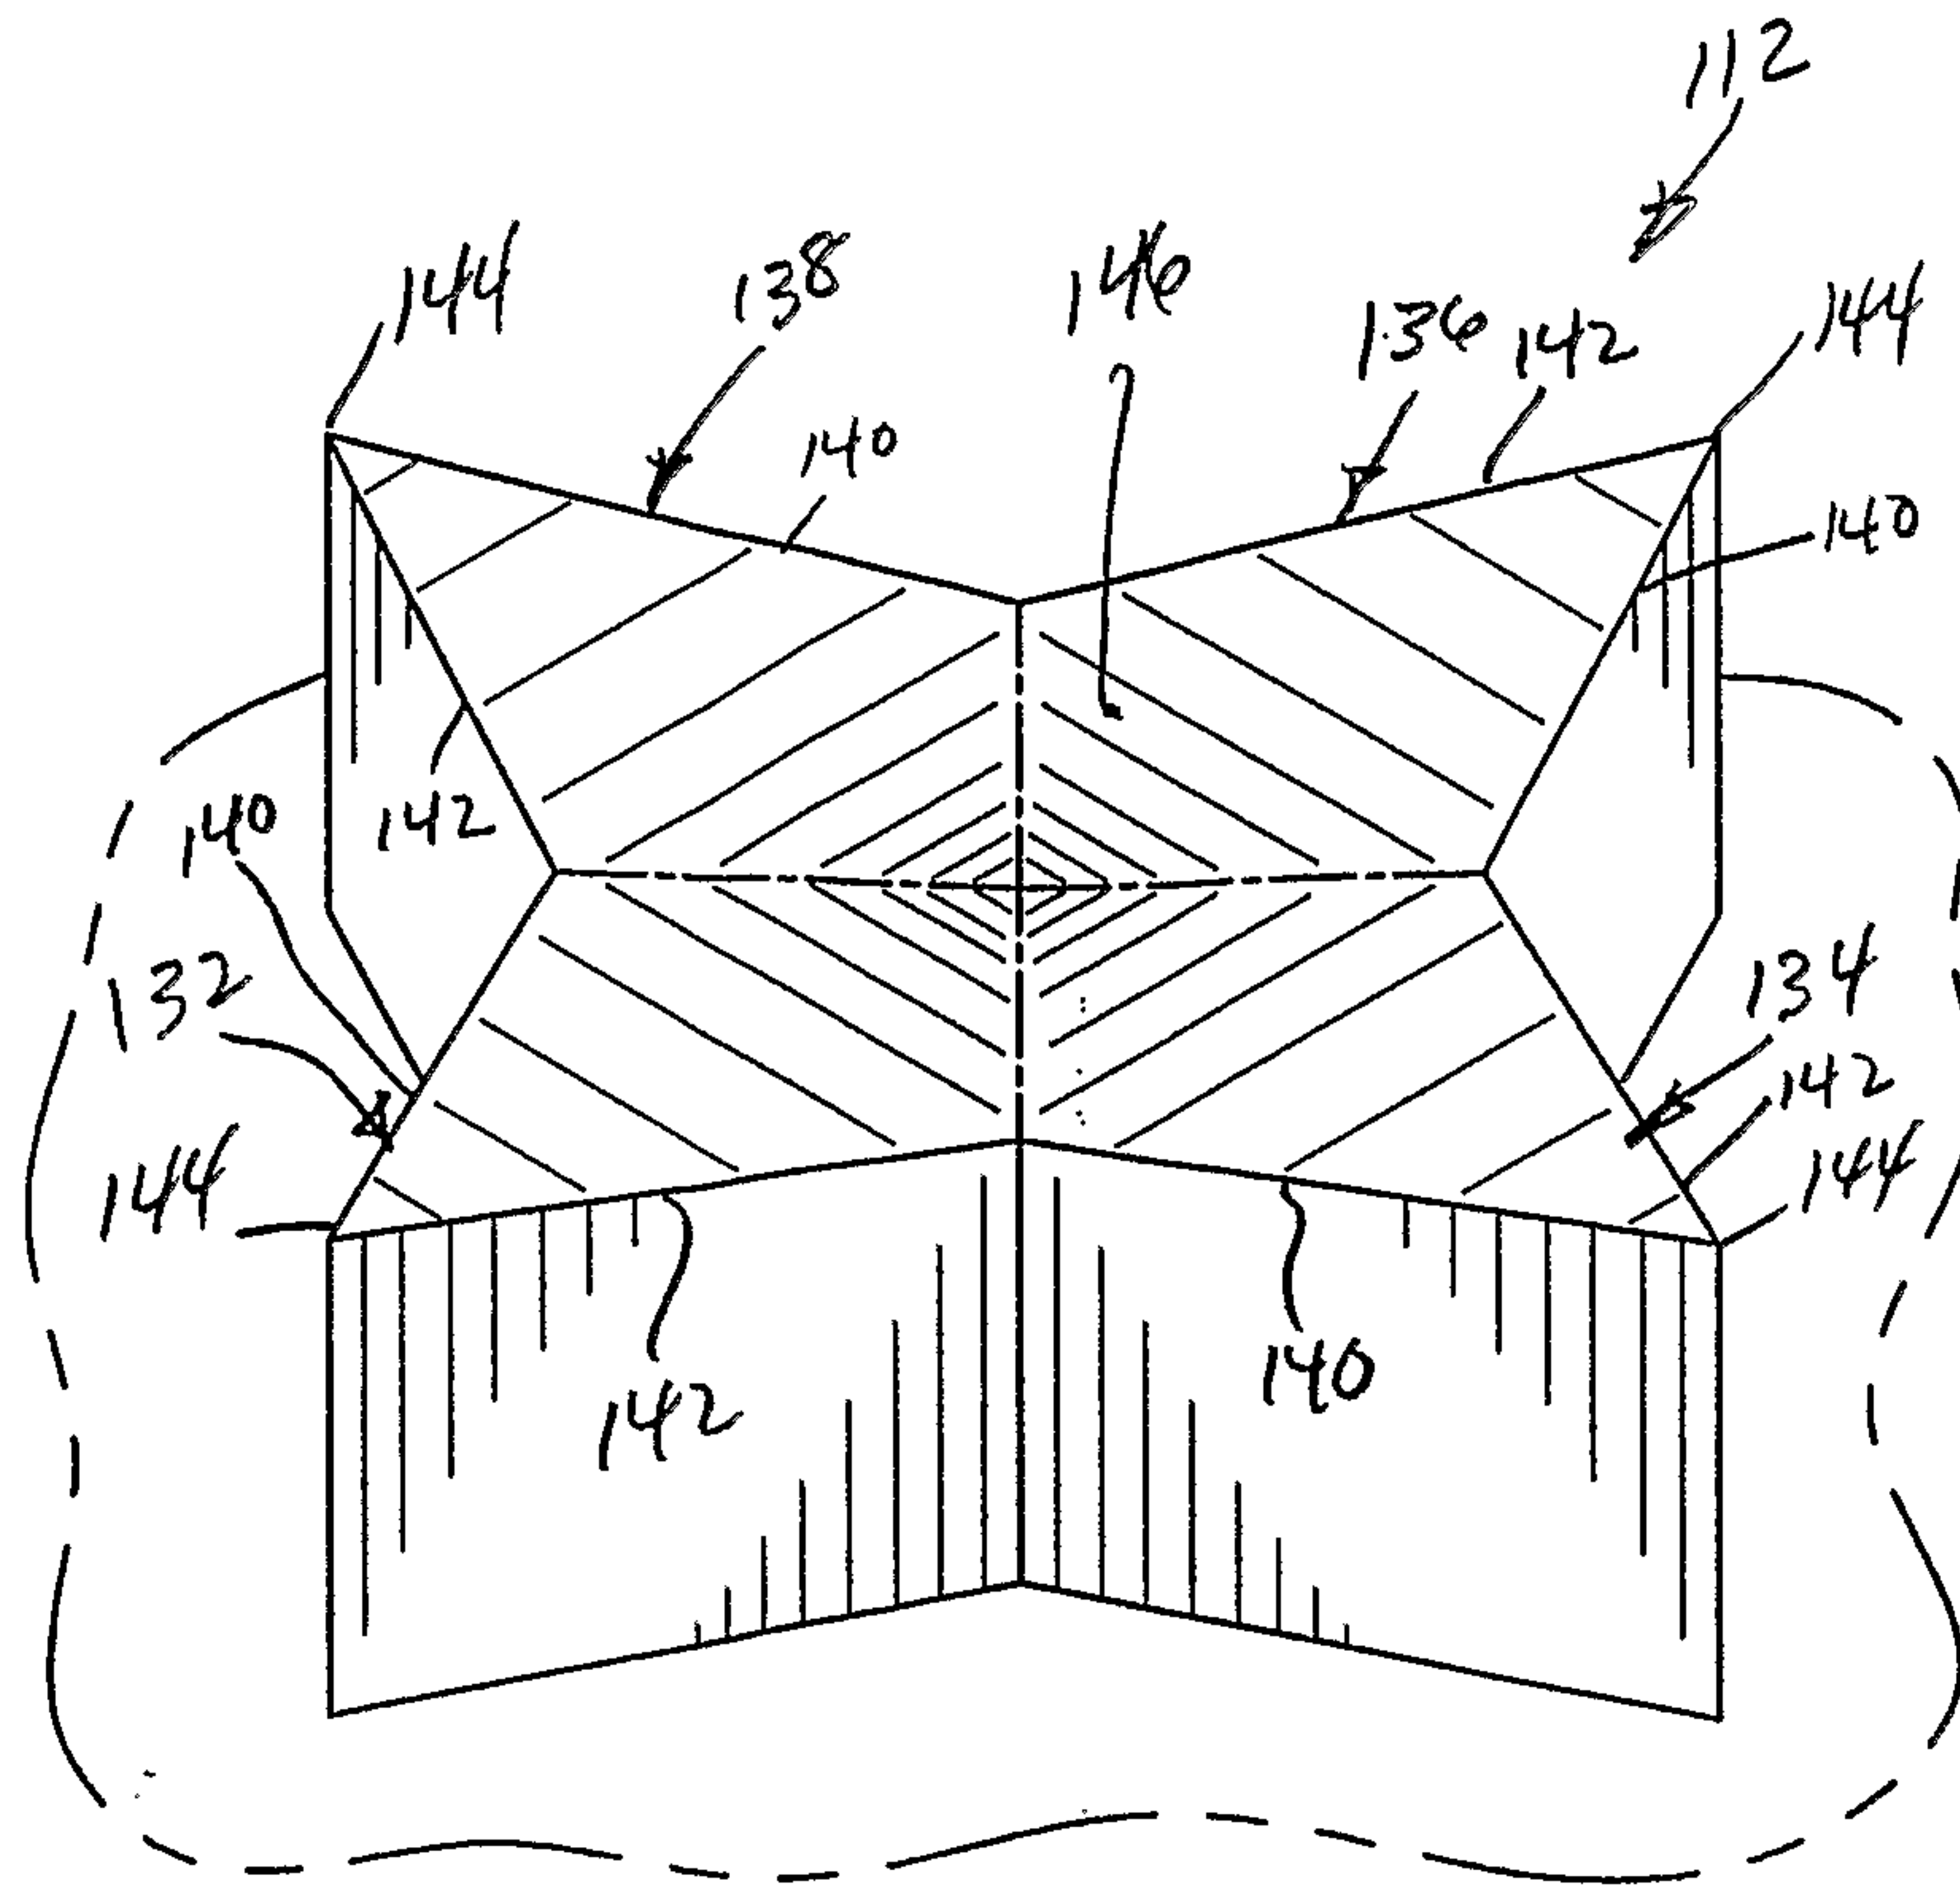


FIG. 9

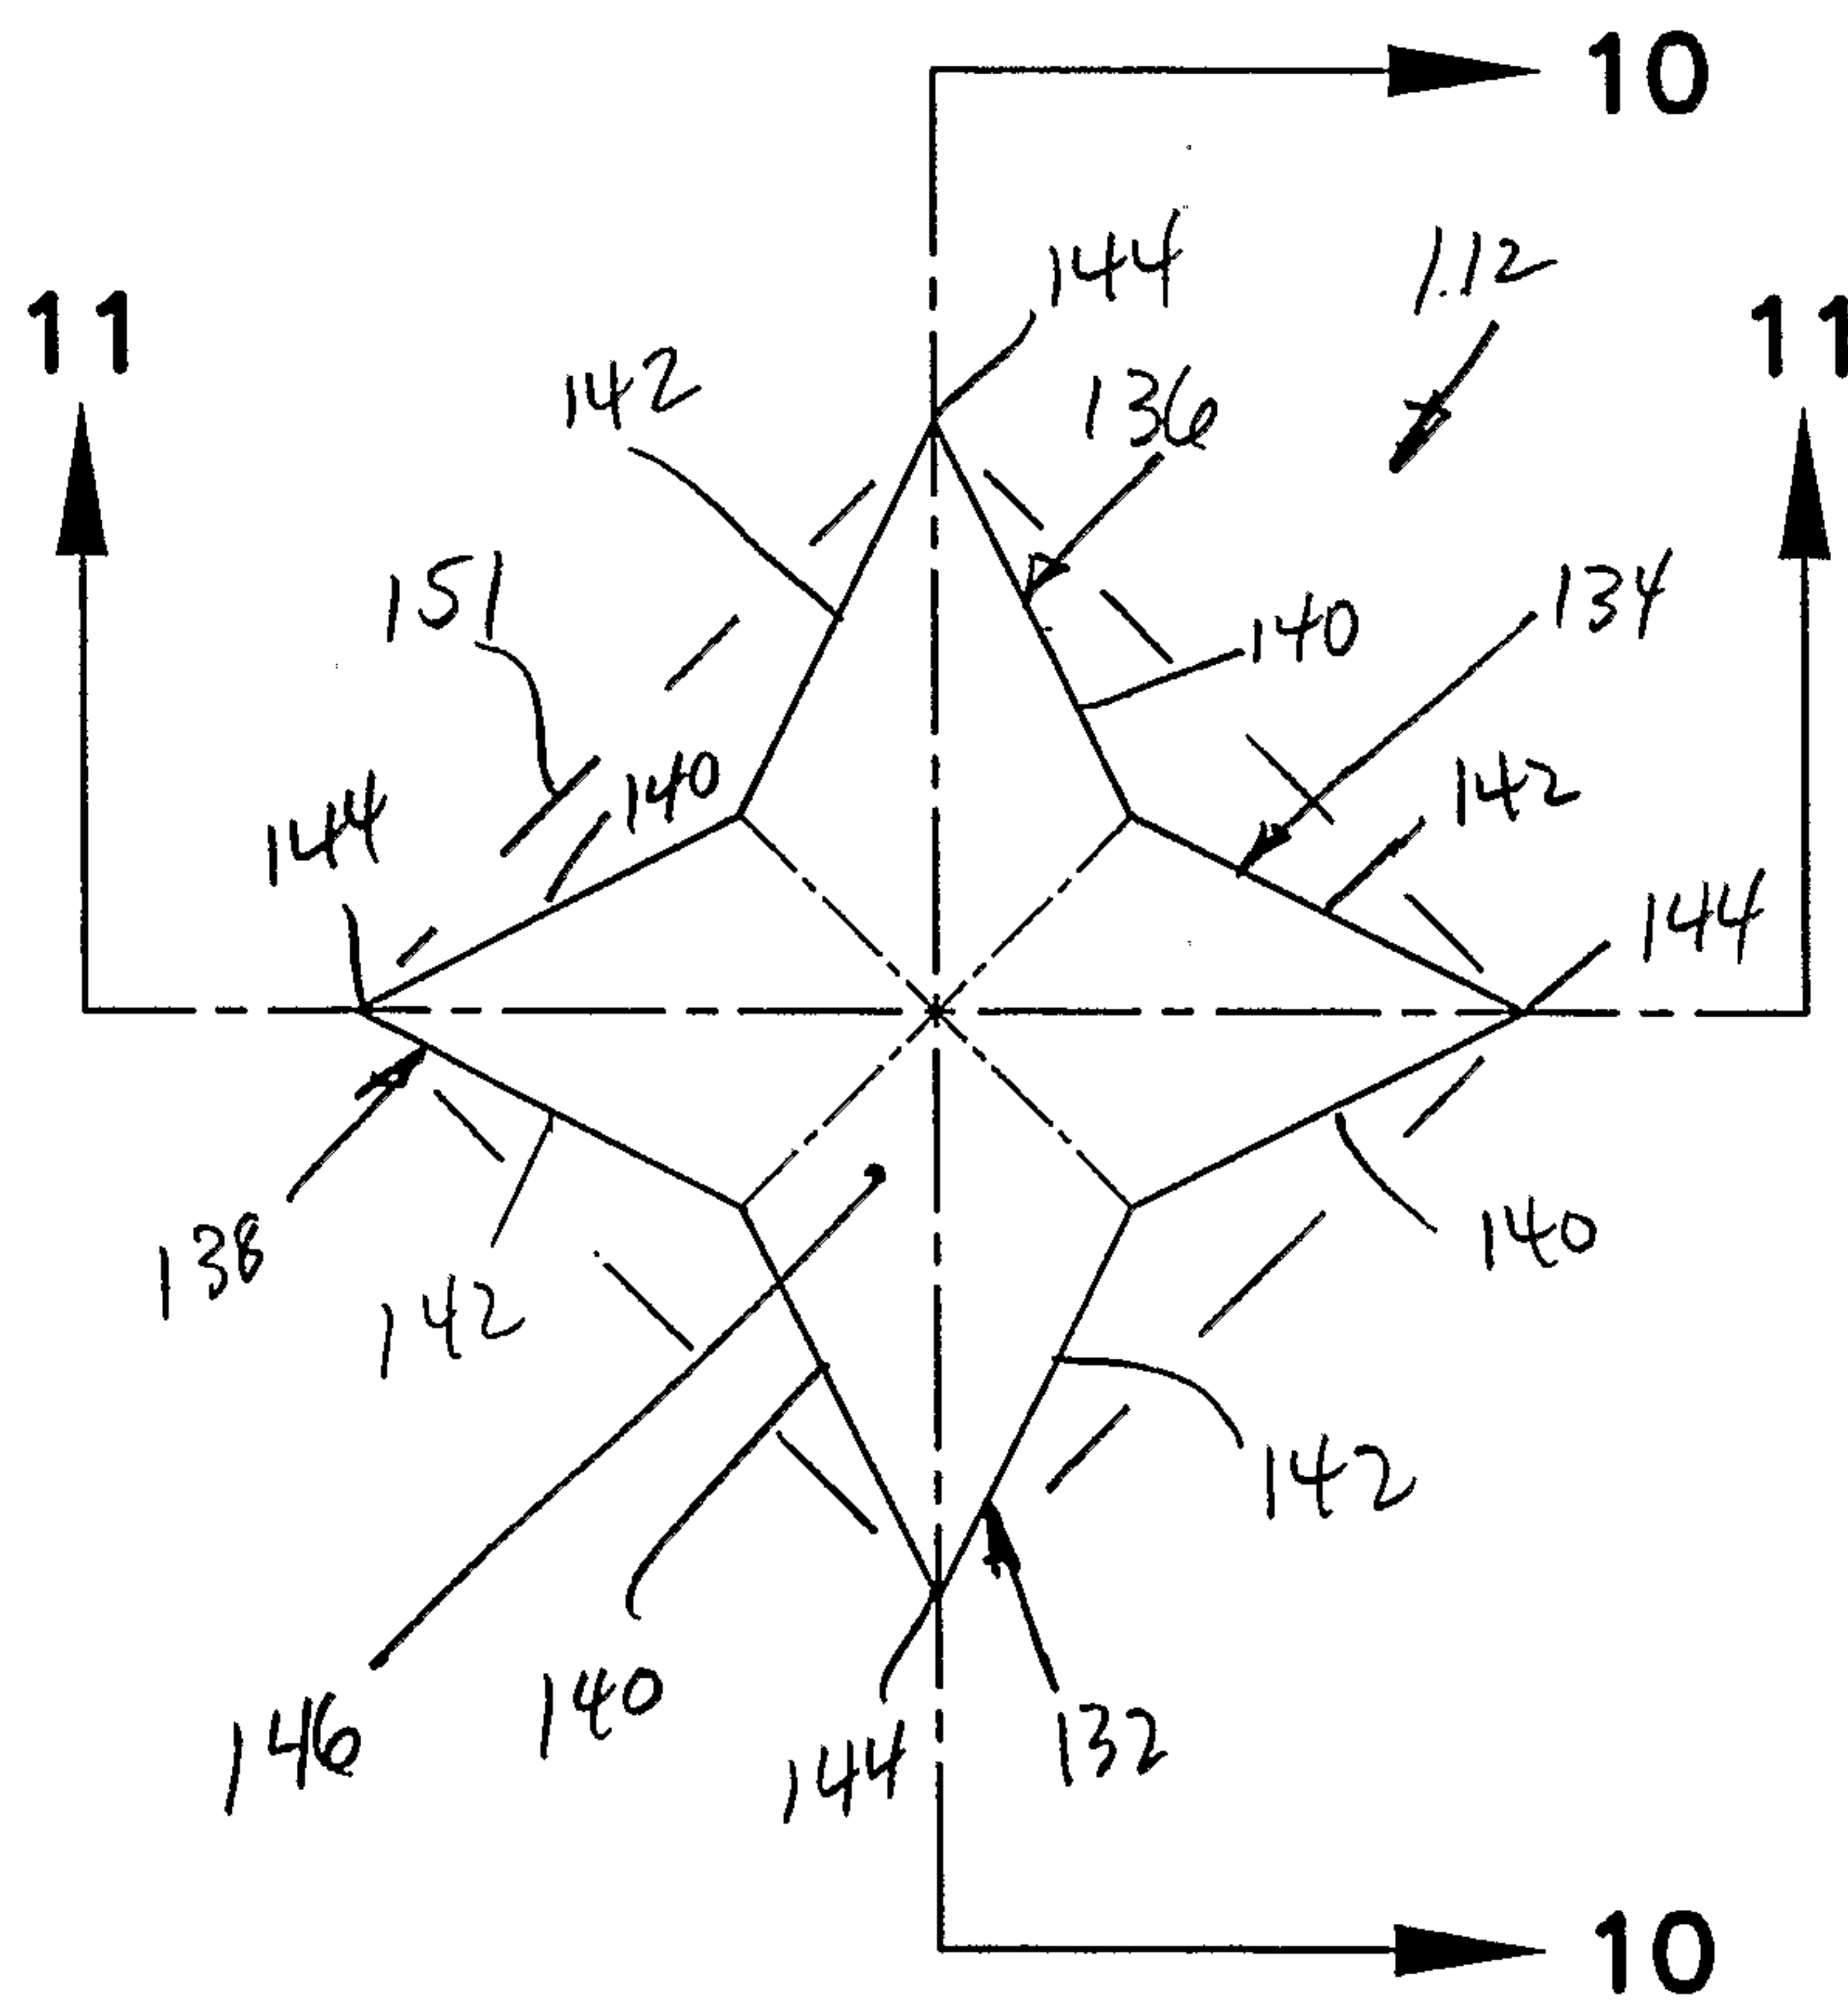


FIG. 10

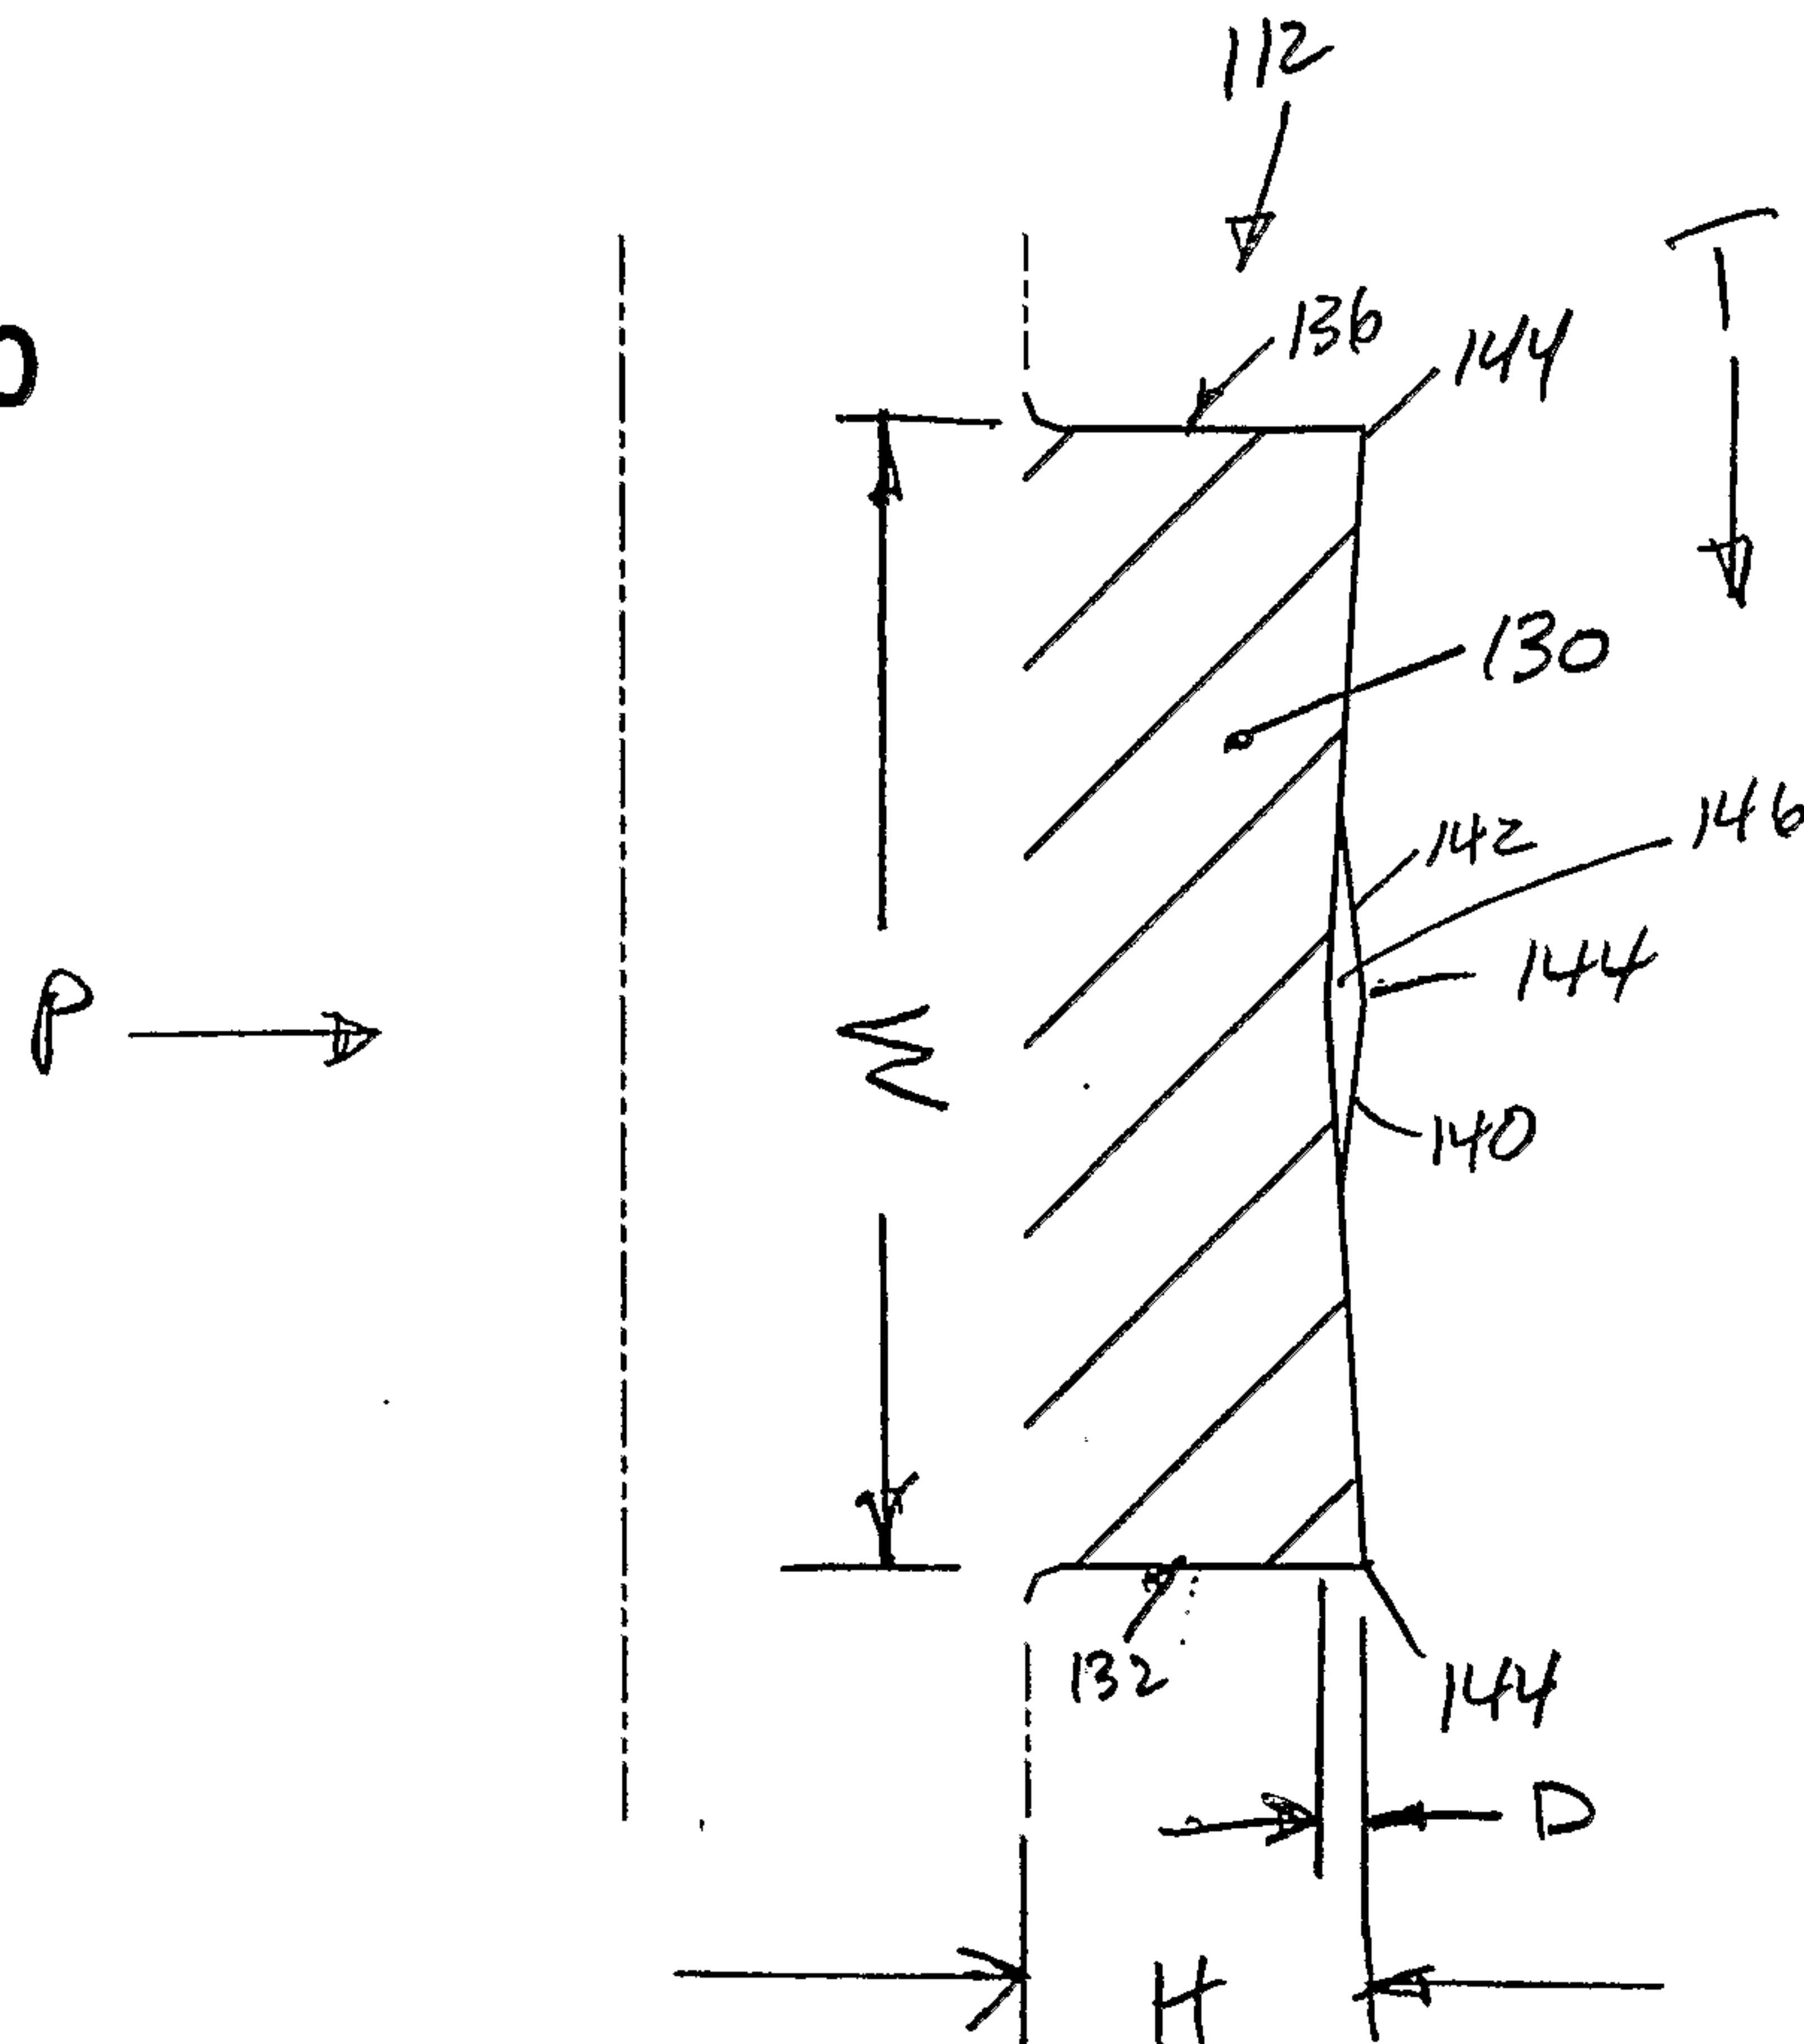


FIG. 11

