

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/012620 A2

- (51) International Patent Classification⁷: **A61C**
- (21) International Application Number:
PCT/US2003/024461
- (22) International Filing Date: 5 August 2003 (05.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/401,303 5 August 2002 (05.08.2002) US
- (71) Applicant (for all designated States except US): **LIQUID-METAL TECHNOLOGIES** [US/US]; Suite 3150, 100 North Tampa Street, Tampa, FL 33602 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **PEKER, Atakan** [TR/US]; 17 Coffeeberry, Aliso Viejo, CA 92656 (US). **KIM, Choongnyun, Paul** [US/US]; 19563 Turtle Ridge Lane, Northridge, CA 91326 (US). **NGUYEN, Tranquoc, Thebao** [US/US]; 2568 W. Rome Avenue, Anaheim, CA 92804 (US).
- (74) Agent: **PECK, John, W.**; Christie, Parker & Hale, LLP, Post Office Box 7068, Pasadena, CA 91109-7068 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METALLIC DENTAL PROSTHESES MADE OF BULK-SOLIDIFYING AMORPHOUS ALLOYS AND METHOD OF MAKING SUCH ARTICLES

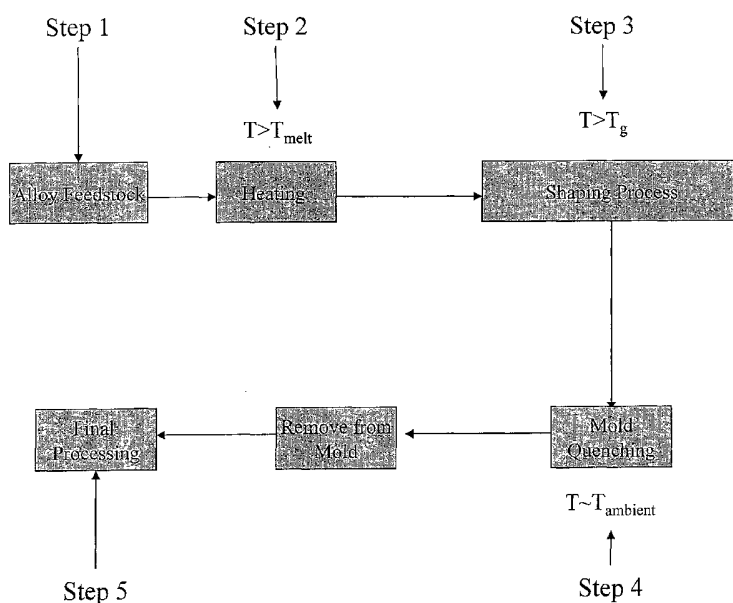

(57) Abstract: Metallic dental prostheses made of bulk-solidifying amorphous alloys wherein the dental prosthesis has an elastic strain limit of around 1.2% or more and methods of making such metallic dental prostheses are provided.

WO 2004/012620 A2

1 METALLIC DENTAL PROSTHESES MADE OF BULK-SOLIDIFYING AMORPHOUS
ALLOYS AND METHOD OF MAKING SUCH ARTICLES

5 FIELD OF THE INVENTION

The present invention relates to metallic dental prostheses constructed of bulk-solidifying amorphous alloys and methods of making such articles.

10 BACKGROUND OF THE INVENTION

15 Metallic dental prostheses, such as crown and bridges, are each custom-made to replicate the impressions made for a specific tooth/teeth. Generally, metallic dental prostheses are made from various metals and alloys using an investment casting process. The materials are chosen for their ability to replicate the exact features of the impression during casting, and the ability to attain a high quality surface finish during the post-cast finishing process. In addition, the choice of dental material should have a high yield strength and sufficient hardness to endure the stresses created by chewing, and sufficient erosion/corrosion resistance to withstand the harsh chemical environment created by various foods, by the body, and by the environment. Finally, the material of choice should have a relatively low coefficient of thermal expansion to be compatible with the tooth and other porcelain materials it is place in contact with.

20 The principal materials of choice for metallic dental prostheses are noble-metal based alloys, such as gold alloys, which are corrosion resistant and have better relative castability than conventional high strength materials. However, these noble-metal based alloys are expensive materials and generally do no have high yield strength and hardness. Other materials of choice, such as nickel-base alloys, are difficult to cast and do not sufficiently replicate the exact features of the intricate impressions.

25 Accordingly, there is a need for a new material for metallic dental prostheses, with high castability and replication characteristics, high yield strength and hardness, high corrosion resistance, and that are preferably relatively inexpensive.

30 SUMMARY OF THE INVENTION

35 The current invention is directed to metallic dental prostheses made of bulk-solidifying amorphous alloys wherein the dental prosthesis has an elastic strain limit of around 1.8% or more, and methods of making such metallic dental prostheses.

1 In one embodiment of the invention, the metallic dental prosthesis is made of a bulk-solidifying amorphous alloy. In one preferred embodiment of the invention, the metallic dental prosthesis is made of a Zr/Ti base bulk-solidifying amorphous alloy incorporating in-situ ductile crystalline precipitates.

5 In another preferred embodiment of the invention, the metallic dental prosthesis is made of a Zr/Ti base bulk-solidifying amorphous alloy incorporating no Nickel.

In still another preferred embodiment of the invention, the metallic dental prosthesis is made of a Zr/Ti base bulk-solidifying amorphous alloy incorporating no Aluminum.

10 In yet another preferred embodiment of the invention, the metallic dental prosthesis is made of a Zr/Ti base bulk-solidifying amorphous alloy incorporating no Beryllium.

In another embodiment of the invention, the metallic dental prostheses are comprised at least in part of another dental material.

15 In still another embodiment of the invention, the metallic dental prosthesis is coated with a biocompatible polymethyl methacrylate resin cement. In such an embodiment the cement can be reinforced with selected oxides including alumina, magnesia, zirconia, or a combination of these oxides along with an application of a small amount of a metal primer agent.

20 In yet another embodiment of the invention, the metallic dental prosthesis is a casting of a bulk-solidifying amorphous alloy. In a preferred embodiment of the invention, metallic dental prosthesis is an investment casting of a bulk-solidifying amorphous alloy.

25 In still yet another embodiment of the invention, the metallic dental prosthesis is a crown. In another embodiment of the invention, the metallic dental prosthesis is a bridge.

30 In still yet another embodiment the invention is directed to a method of forming a dental prosthesis of a bulk-solidifying alloy. In one such embodiment, a molten piece of bulk-solidifying amorphous alloy is cast into a near-to-net shape dental prostheses. In a preferred embodiment of the invention a molten piece of bulk-solidifying amorphous alloy is investment-cast into a near-to-net shape dental prostheses. In another preferred embodiment of the invention, a molten piece of bulk-solidifying amorphous alloy is cast into a near-to-net shape crown. In still another preferred embodiment of the invention, a molten piece of bulk-solidifying amorphous alloy is investment-cast into a near-to-net shape crown. In yet another preferred embodiment of the invention, a molten piece of bulk-solidifying amorphous alloy is cast into a near-to-net shape bridge. In still yet another preferred embodiment of the

35

1 invention, a molten piece of bulk-solidifying amorphous alloy is investment-cast into a near-to-net shape bridge.

5 In another embodiment of the method of making dental prostheses, the bulk solidifying amorphous alloy composition has a critical cooling rate of 100 °C/second or less and preferably 10 °C/second or less.

In still another embodiment of the method of making dental prostheses, the provided bulk solidifying amorphous alloy composition is selected from the group consisting of: Zr/Ti base, Zr-base, Zr/Ti base with no Ni, Zr/Ti base with no Al, and Zr/Ti base with no Be.

10 In yet another embodiment of the method of making dental prostheses, a molten piece of the bulk-solidifying amorphous alloy is cast into a dental prosthesis under either a partial vacuum or a vacuum.

15 In still yet another embodiment of the method of making dental prostheses, a molten piece of the bulk-solidifying amorphous alloy is fed into the mold by applying an external pressure such as an inert gas.

BRIEF DESCRIPTION OF THE DRAWINGS

20 These and other features and advantages of the present invention will be better understood by reference to the following detailed description when considered in conjunction with the accompanying drawing wherein:

Figure 1 shows a flow-chart an exemplary embodiment of a method of producing a metallic dental prosthesis according to the current invention.

25 DETAILED DESCRIPTION OF THE INVENTION

The current invention is directed to metallic dental prostheses made of bulk-solidifying amorphous alloys wherein the dental prosthesis has an elastic strain limit of around 1.8% or more, and methods of making such metallic dental prostheses.

30 Metallic dental prostheses, such as crowns and bridges, are each custom-made to replicate the impressions made for a specific tooth/teeth. In dental terminology, the crown is the visible part of tooth, which can be further covered by enamel to improve the aesthetics and durability of the prosthesis. Such a crown can be an artificial replacement for the visible
35 part of a tooth that has decayed or been damaged. In such an embodiment, the crown is a restoration that covers, or caps, a tooth to restore it to its normal shape and size. However, the

1 crown can also serve to strengthen or improve the appearance of a tooth. Finally, the crown
can also be used to cover a dental implant.

5 In contrast, a bridge is a partial false tooth, or a set of one or more false teeth that act
as a replacement for missing natural teeth. Such a bridge can be permanently anchored to
natural teeth (fixed bridge) or set into a metal appliance and temporarily clipped onto natural
teeth (removable bridge).

10 Bulk solidifying amorphous alloys are recently discovered family of amorphous
alloys, which can be cooled at substantially lower cooling rates, of about 500 K/sec or less,
and substantially retain their amorphous atomic structure. As such, these materials can be
produced in thickness of 1.0 mm or more, substantially thicker than conventional amorphous
alloys, which have typical thicknesses of 0.020 mm, and which require cooling rates of 10^5
K/sec or more. Exemplary bulk-solidifying amorphous alloy materials are described in U.S.
15 Patent Nos. 5,288,344; 5,368,659; 5,618,359; and 5,735,975 (the disclosures of which are
incorporated in their entirety herein by reference).

20 One exemplary family of bulk solidifying amorphous alloys can be described as
 $(\text{Zr,Ti})_a(\text{Ni,Cu, Fe})_b(\text{Be,Al,Si,B})_c$, where a is in the range of from 30 to 75, b is in the range of
from 5 to 60, and c in the range of from 0 to 50 in atomic percentages. Furthermore, these
alloys can accommodate other transition metals, such as Nb, Cr, V, Co, in amounts up to 20
% atomic and more.

25 A preferable alloy family is $(\text{Zr,Ti})_a(\text{Ni,Cu})_b(\text{Be})_c$, where a is in the range of from 40
to 75, b is in the range of from 5 to 50, and c in the range of from 5 to 50 in atomic
percentages. Still, a more preferable composition is $(\text{Zr,Ti})_a(\text{Ni,Cu})_b(\text{Be})_c$, where a is in the
range of from 45 to 65, b is in the range of from 7.5 to 35, and c in the range of from 10 to
37.5 in atomic percentages. Another preferable alloy family is $(\text{Zr})_a(\text{Nb,Ti})_b(\text{Ni,Cu})_c(\text{Al})_d$,
where a is in the range of from 45 to 65, b is in the range of from 0 to 10, c is in the range of
30 from 20 to 40 and d in the range of from 7.5 to 15 in atomic percentages. Other elements, e.g
Y, Si, Sn, Sc etc. can also be added as micro-alloying additions to the composition of bulk
solidifying amorphous alloys at fractions of atomic percentages in order to alleviate the
effects of detrimental impurities such as oxygen and as such reduce the critical cooling rate.

35 These bulk-solidifying amorphous alloys can sustain strains up to 1.5 % or more and
generally around 1.8 % without any permanent deformation or breakage. Further, they have
high fracture toughness of 10 ksi-sqrt(in) (sqrt : square root) or more, and preferably 20 ksi
sqrt(in) or more. Also, these materials have high hardness values of 4 GPa or more, and

1 preferably 5.5 GPa or more. The yield strength of bulk solidifying alloys range from 1.6 GPa and reach up to 2 GPa and more exceeding the current state of the Titanium alloys.

Another set of bulk-solidifying amorphous alloys are ferrous metals (Fe, Ni, Co) based compositions. Examples of such compositions are disclosed in U.S. Patent No. 5 6,325,868; publications to (A. Inoue et. al., Appl. Phys. Lett., Volume 71, p 464 (1997)) and (Shen et. al., Mater. Trans., JIM, Volume 42, p 2136 (2001)); and Japanese patent application 2000126277 (Publ. # .2001303218 A), all of which are incorporated herein by reference.

One exemplary composition of such alloys is $\text{Fe}_{72}\text{Al}_5\text{Ga}_2\text{P}_{11}\text{C}_6\text{B}_4$. Another exemplary 10 composition of such alloys is $\text{Fe}_{72}\text{Al}_7\text{Zr}_{10}\text{Mo}_5\text{W}_2\text{B}_{15}$. Although, these alloy compositions are not processable to the degree of the above-cited Zr-base alloy systems, they can still be processed in thicknesses of around 1.0 mm or more, sufficient to be utilized in the current invention. Similarly, these materials have elastic strain limits higher than 1.2% and generally 15 around 1.8 %. The yield strength of these ferrous-based bulk-solidifying amorphous alloys is also higher than the Zr-based alloys, ranging from 2.5 GPa to 4 GPa, or more, making them particularly attractive for use in dental prostheses. Ferrous metal-base bulk amorphous alloys also very high yield hardness ranging from 7.5 GPa to 12 GPa.

20 In general, crystalline precipitates in bulk amorphous alloys are highly detrimental to the properties of bulk-solidifying amorphous alloys, especially to the toughness and strength of these materials, and, as such, such precipitates are generally kept to as small a volume fraction as possible. However, there are cases in which ductile crystalline phases precipitate in-situ during the processing of bulk amorphous alloys and are indeed beneficial to the 25 properties of bulk amorphous alloys, and especially to the toughness and ductility of the materials. Such bulk amorphous alloys comprising such beneficial precipitates are also included in the current invention. One exemplary material is disclosed in (C.C. Hays et. al, Physical Review Letters, Vol. 84, p 2901, 2000), which is incorporated herein by reference. This alloy has a low elastic modulus of from 70 GPa to 80 GPa depending on the specific 30 microstructure of ductile-crystalline precipitates. Further, the elastic strain limit is 1.8% or more and the yield strength is 1.4 GPa and more.

Although generally the current invention is directed to improved metallic dental 35 prostheses, Applicants have found that dental prostheses constructed of bulk-solidifying amorphous alloys show a number of improved properties. First, as described above, bulk solidifying amorphous alloys have the high hardness and toughness properties associated with conventional materials. The bulk solidifying amorphous alloys also have excellent

1 corrosion resistance, as required for any material exposed to the harsh conditions to which
dental prostheses are subjected. However, these bulk-solidifying amorphous alloys also have
some general characteristics which make bulk-solidifying amorphous alloys uniquely suited
as a new class of material for the use and application in metallic dental prostheses.

5 Bulk-solidifying amorphous alloys have very high elastic strain limits, or the ability to
sustain strains without permanent deformation, typically around 1.8 % or higher. Although
Applicant's have discovered that this is an important characteristic for dental prostheses
because a high elastic limit helps to sustain global and local loading with minimal or no
10 permanent deformation of the metallic dental prostheses, this characteristic is absent in
conventional metallic dental materials. For example, conventional metals and alloys
typically used in dental prostheses have typical elastic strain limits below 0.8 %.
Accordingly, dental prosthesis made of bulk-solidifying amorphous alloys having an elastic
strain limit of 1.5 % or higher, and preferably 1.8 % or higher is desired.

15 The elastic limit of a material is also critical because metallic dental prostheses, such
as the crowns and bridges discussed above, have highly intricate shapes and features, which
must remain intact upon any mechanical loading both during preparation and in use. For
example, because of the need to fit the crown and/or bridge as close to the tooth as possible,
20 generally these prostheses have thin-walled shells as part of their overall shape and design. A
material having a high elastic strain limit helps to keep both the general shape and intricate
details of the metallic dental prostheses intact. In the case of conventional metals and alloys
with much lower elastic strain limit, the use of thicker shells and larger structures are needed
to sustain mechanical loading, as well as to maintain the integrity of the intricate details of
25 the impression. Both thicker shells and larger structures are highly undesirable due to the
increased operational and surgical complications. In addition, in some cases, these thicker
shells and larger structures require that a larger section of the healthy tooth or teeth be cut
away during operation in order to accommodate the crown or bridge in the patient.

30 Secondly, bulk solidifying amorphous alloys can be readily cast from the molten state
to replicate the very details of impression prepared for dental prosthesis. Indeed, Applicants
have discovered that the low melting temperatures of bulk-solidifying amorphous alloys
provide a relatively easier casting operation such as reduced or minimal reaction with molds
35 or investment shells. Further, the lack of any first-order phase transformation during the
solidification of the bulk solidifying amorphous alloy reduces solidification shrinkage and as
such provides a near-to-net shape configuration of the metallic dental prosthesis. The

1 solidification shrinkage is then dominated by the coefficient of thermal expansion rather than
the volume difference between the solid and liquid state of the casting alloy. Accordingly,
bulk amorphous alloys with low coefficient thermal expansion (at temperatures from ambient
to glass transition) are preferred. For example,. Zr-base bulk solidifying amorphous alloys
5 have generally a coefficient of thermal expansion of around 10^{-5} (m/m °C) providing low
shrinkage rates. This is extremely important in the production of metallic dental prostheses
since many of the intricate portions of the impressions can be lost if significant post-cast
processing is required. In addition, bulk-solidifying amorphous alloys keep their fluidity to
10 exceptionally low temperatures, such as down to the glass transition temperature, compared
to other dental casting materials, and especially those materials which exhibit the necessary
yield strengths for use in metallic dental prosthesis applications. Accordingly, bulk-
solidifying amorphous alloys with glass transition temperatures lower than 400 °C, and most
15 preferably lower than 300 °C are preferred. For example, Zr-Ti base bulk-solidifying
amorphous alloys have typical glass transition temperatures in the range of 320 °C to 450 °C
depending on the alloy composition.

Applicants have discovered that these characteristics combined with the lack of any
microstructure allow bulk-solidifying amorphous alloys to replicate the intricacies of the
20 impressions in a dental casting with exceptional quality. The casting characteristics of bulk-
solidifying amorphous alloys not only reduce the post-cast finishing processes, but also
provide a better surface finish and preparation due to reduced or minimal defects arising from
the initial casting operation. For example, a dental prosthesis constructed of a bulk-
25 solidifying amorphous alloy can be given a very high polish and surface smoothness which
helps to hinder bacteria growth in the mouth. Further, the high polish and other surface
smoothness characteristics can be desirable from an aesthetic perspective as well.

While the above discussion has focussed primarily on the high elastic limit and
castability properties of bulk-solidifying amorphous alloys, it should be understood that it is
30 the unique combination of properties that makes these materials particularly suitable for use
in metallic dental prostheses. For example the bulk-solidifying amorphous alloys described
herein exhibit a very high hardness of 4.0 GPa or more leading to improved wear resistance,
and inert properties which leads to improved corrosion resistance over conventional
35 materials. For example, Zr-base bulk-solidifying amorphous alloys have hardness values
ranging from 4.0 GPa up to 6.0 GPa. In addition, the yield strength of the bulk-solidifying
amorphous alloys is exceptionally high, especially compared to the crystalline alloys of their

1 base metals (e.g., Zr/Ti base amorphous alloys have typical yield strengths on the order of
1.5 to 2.0 GPa). Such properties, a hardness value of greater than 4.0 GPa and preferably
more than 5.0 GPa, along with the very high elastic strain limit of 1.2 % , preferably 1.5 %, and most preferably 1.8 % or higher, makes metallic dental prostheses of bulk-solidifying
5 amorphous alloys highly durable. Moreover, because of the excellent castability of these materials the desired mechanical and physical properties of bulk-solidifying amorphous alloys are readily obtained in an as-cast condition. This is generally not true for conventional metals and alloys which are often not available at all as castings.

10 Although the above discussion has focussed solely on choosing a bulk-solidifying amorphous alloy material based on certain advantageous physical properties, the bulk solidifying amorphous alloy composition can also be preferably selected to be free of Ni or Al or Be in order to address the high sensitivity or allergic reactions of specific population groups to such metals.

15 The invention is also directed to a method of manufacturing the metallic dental prostheses of the invention. Principally the bulk-solidifying amorphous alloys are fabricated by various casting methods. For example, in one exemplary embodiment, as shown in Figure 1, a feedstock of bulk solidifying amorphous alloy composition is provided (step 1). This feedstock does not have to be in amorphous phase. Then in a second step (step 2) the feedstock alloy is heated into the molten state above the melting temperature of bulk-solidifying amorphous alloy. Then in a third step (step 3) the molten alloy is fed into the mold having the shape of the desired dental prosthesis. After, the complete fill of the mold is
20 assured, the mold is immersed into a quenching bath (step 4) to form a substantially amorphous atomic structure. The casting of bulk amorphous alloy is then removed from the mold to apply other post-cast finishing processes such as polishing (step 5).

25 The provided bulk solidifying amorphous alloy is such that, it has a critical cooling rate of less than 1,000 °C/sec, so that a section having a thickness greater than 0.5 mm can be readily cast into an amorphous structure during the fabrication of dental prosthesis. However, more preferably, the critical cooling rate is less than 100 °C/sec and most preferably less than 10 °C/sec. In one preferred embodiment of the invention, the dental prosthesis is cast by providing a bulk-solidifying amorphous alloy having a coefficient of thermal expansion of
30 less than about 10^{-5} (m/m °C), and a glass transition temperature of less than 400 °C, and preferably less than 300 °C, in order to achieve a high level of replication of the prosthesis mold features after casting.

1 In a preferred embodiment, the molten amorphous alloy is superheated well above the
melting temperature by 100 °C or more. This will provide higher fluidity and will allow the
molten alloy to flow a much longer time before solidification. This is especially preferred in
cases where the dental prosthesis has a very high aspect ratio (i.e. long and skinny shapes),
5 and/or highly intricate shapes are to be duplicated.

In another preferred embodiment, the feedstock alloy is heated to the molten state
under an inert atmosphere and preferably under vacuum.

10 Regardless of the actual casting method used, the mold itself can be prepared by
various methods and preferably by an investment-cast method. In addition, various
mechanisms can be utilized to feed the molten alloy into the mold. For example, gravity-
feeding methods can be readily utilized, though other mechanisms providing external
pressure are preferred. Such mechanisms can use centrifugal forces and/or inert gas pressure.
15 Finally, various configurations of alloy feeding can be utilized, such as bottom-feeding.
Another feeding method comprises counter-gravity feeding and casting, in such a method the
feeding method is preferably carried out with vacuum suction assistance.

20 Although specific embodiments are disclosed herein, it is expected that persons
skilled in the art can and will design metallic dental prostheses and methods of making such
devices that are within the scope of the following description either literally or under the
Doctrine of Equivalents.

1 WHAT IS CLAIMED IS:

1 1. A dental prosthesis comprising a bulk-solidifying amorphous alloy having an elastic strain limit of around 1.2% or more.

5 2. The dental prosthesis as described in claim 1, wherein the bulk bulk-solidifying amorphous alloy is described by the following molecular formula: $(\text{Zr}, \text{Ti})_a(\text{Ni}, \text{Cu}, \text{Fe})_b(\text{Be}, \text{Al}, \text{Si}, \text{B})_c$, wherein "a" is in the range of from about 30 to 75, "b" is in the range of from about 5 to 60, and "c" in the range of from about 0 to 50 in atomic percentages

10 3. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy is described substantially by the following molecular formula: $(\text{Zr})_a(\text{Nb}, \text{Ti})_b(\text{Ni}, \text{Cu})_c(\text{Al})_d$, where a is in the range of from 45 to 65, b is in the range of from 0 to 10, c is in the range of from 20 to 40, and d in the range of from 7.5 to 15 in atomic percentages.

15 4. A dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy has an elastic strain limit of around 1.8% or more.

20 5. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy has a high fracture toughness of at least about 10 ksi-√in.

25 6. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy has a coefficient of thermal expansion of around 10^{-5} (m/m °C) or less.

30 7. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy has a high hardness value of at least about 4 Gpa.

35 8. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy has a high hardness value of at least about 5.0 GPa.

9. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy is based on ferrous metals.

1

10. The dental prosthesis as described in claim 9, wherein the bulk-solidifying amorphous alloy has a hardness of about 7.5 Gpa and higher.

5

11. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy has a glass transition temperature lower than 400 °C.

10

12. The dental prosthesis 1 as described in claim 1, wherein the bulk-solidifying amorphous alloy further comprises a ductile metallic crystalline phase precipitate.

15

13. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy is Al free.

14. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy is Ni free.

20

15. The dental prosthesis as described in claim 1, wherein the bulk-solidifying amorphous alloy is Be free.

16. The dental prosthesis as described in claim 1, wherein at least a portion of the prosthesis is constructed of a conventional dental material.

25

17. The dental prosthesis as described in claim 1, wherein the dental prosthesis is coated with a biocompatible resin cement.

30

18. The dental prosthesis as described in claim 17, wherein the cement is reinforced with a metal primer agent and an oxide selected from the group consisting of alumina, magnesia, zirconia, and a combination of these oxides.

35

19. The dental prosthesis as described in claim 1, wherein the at least one portion formed from the bulk-solidifying amorphous alloy has a section thickness of at least 0.5 mm.

1 20. The dental prosthesis as described in claim 1, wherein the dental prosthesis is
in the form of one of either a bridge or a cap.

5 21. A method of manufacturing a dental prosthesis comprising:
providing a feedstock of a bulk-solidifying amorphous alloy;
heating the feedstock to above the melting temperature of the bulk solidifying
amorphous alloy to form a molten alloy;
shaping the molten alloy to form a near-to-net shape dental prosthesis; and
10 quenching the dental prosthesis at a cooling rate sufficient to ensure that the bulk
solidifying amorphous alloy has a substantially amorphous atomic structure having an elastic
strain limit of around 1.2% or more.

15 22. The method as described in claim 21, wherein the step of heating includes
superheating the feedstock to a temperature at least 100 °C higher than the melting
temperature of the bulk solidifying amorphous alloy.

20 23. The method as described in claim 21, wherein the step of heating is conducted
in an inert environment.

25 24. The method as described in claim 21, wherein the step of heating is conducted
under a vacuum.

30 25. The method as described in claim 21, wherein the bulk-solidifying amorphous
alloy is described by the following molecular formula: $(\text{Zr}, \text{Ti})_a(\text{Ni}, \text{Cu}, \text{Fe})_b(\text{Be}, \text{Al}, \text{Si}, \text{B})_c$,
wherein "a" is in the range of from about 30 to 75, "b" is in the range of from about 5 to 60,
and "c" in the range of from about 0 to 50 in atomic percentages

35 26. The method as described in claim 21, wherein the bulk-solidifying amorphous
alloy is described substantially by the following molecular formula: $(\text{Zr})_a(\text{Nb}, \text{Ti})_b$
 $(\text{Ni}, \text{Cu})_c(\text{Al})_d$, where a is in the range of from 45 to 65, b is in the range of from 0 to 10, c is
in the range of from 20 to 40, and d in the range of from 7.5 to 15 in atomic percentages.

1 27. The method as described in claim 21, wherein the bulk-solidifying amorphous alloy has a coefficient of thermal expansion of around 10^{-5} (m/m °C) or less.

5 28. The method as described in claim 21, wherein the bulk-solidifying amorphous alloy further comprises a ductile metallic crystalline phase precipitate.

 29. The method as described in claim 21, wherein the bulk-solidifying amorphous alloy is based on ferrous metals having a hardness of about 7.5 Gpa and higher.

10 30. The method as described in claim 21, wherein the bulk-solidifying amorphous alloy has a glass transition temperature lower than 400 °C.

15 31. The method as described in claim 21, wherein a portion of the dental prosthesis is constructed of a conventional dental material.

 32. The method as described in claim 21, further comprising the step of coating the dental prosthesis with a biocompatible resin cement.

20 33. The method as described in claim 32, wherein the cement is reinforced with a metal primer agent and an oxide selected from the group consisting of alumina, magnesia, zirconia, and a combination of these oxides.

25 34. The method as described in claim 21, wherein the step of shaping comprises one of the methods selected from the group consisting of: molding, casting and investment casting.

30 35. The method as described in claim 21, wherein the bulk solidifying amorphous alloy has a critical cooling rate of 100 °C/second or less.

35 36. The method as described in claim 1, wherein the dental prosthesis is shaped into the form of one of either a bridge or a cap.

Figure 1

