



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 138 406 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
27.07.2005 Bulletin 2005/30

(51) Int Cl.7: **B21D 24/14**

(21) Application number: **01500085.4**

(22) Date of filing: **29.03.2001**

(54) **A press with a hydraulic cushion and a system for controlling the force and pad position thereof**

Eine Presse mit einem hydraulischen Ziehkissen und mit einem System zur Steuerung der Presskraft und der Position des Blechhalters des Ziehkissens

Presse avec un coussin hydraulique et un système pour régler la force de pression et la position du serre-flan dudit coussin hydraulique

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **30.03.2000 ES 200000793**

(43) Date of publication of application:
04.10.2001 Bulletin 2001/40

(73) Proprietor: **FAGOR, S.Coop
20500 Mondragon (Gipuzkoa) (ES)**

(72) Inventors:
• **Grande, Victoriano Esteban
20500 Mondragon (Gipuzkoa) (ES)**
• **Domaica Lopez de Armentia, Ramon
20500 Mondragon (Gipuzkoa) (ES)**

• **Ormaetxea Abad, Aitor
20500 Mondragon (Gipuzkoa) (ES)**

(74) Representative: **Fernandez Guzman, Juan
Apartado 213,
Barrio San Andres s/n
20500 Mondragon (Gipuzkoa) (ES)**

(56) References cited:
**EP-A- 0 173 755 EP-A- 0 417 754
DE-A- 3 230 673**

• **PATENT ABSTRACTS OF JAPAN vol. 013, no.
076 (M-800), 21 February 1989 (1989-02-21) -& JP
63 273524 A (ISHIKAWAJIMA HARIMA HEAVY
IND CO LTD), 10 November 1988 (1988-11-10)**

EP 1 138 406 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

[0001] The present invention relates to a press with a hydraulic cushions and a control system for controlling the force of the hydraulic cushion when a plate is drawn or stamped, according to the preamble of claim 1 (see for example JP-A-63 273 524).

PRIOR ART

[0002] US-5746084 discloses a press on which a cylinder with two pressure chambers is added for pre-acceleration control, said control being carried out by drawing out oil from the lower chamber by means of using a proportional valve and a metering cylinder.

[0003] In US-4896594 the pre-acceleration is also achieved by adding a pre-acceleration cylinder for this purpose.

[0004] In US-5339665 the cushion comprises a pneumatic cylinder and a hydraulic cylinder, the pre-acceleration being controlled by way of the hydraulic cylinder.

[0005] DE-3807683 describes a press that comprises a plurality of cylinder assemblies that include an axially arranged pressing cylinder and a lifting cylinder. The pressures of the pressing cylinders may be regulated individually by means of control elements and there is a control system for simultaneous movement of the lifting cylinders. The pressing cylinders are used for securing the plate during drawing and the lifting cylinders are used for raising the blank holder. This set-up permits control of cushion movement during the whole pressing process, the lifting cylinders being the ones that assist position control (during pre-acceleration, etc.) and the pressing cylinders being the ones that assist force control.

DISCLOSURE OF THE INVENTION

[0006] The object of the invention is a press with a hydraulic cushion with a system for controlling the force and pad position thereof, as defined in the claims.

[0007] This object is achieved according to the invention by a press with the features of claim 1.

[0008] The control system equipping the press enables the pad position and force to be controlled throughout the pressing process by means of the use of a single control element for each hydraulic cylinder.

[0009] The function of said control element is to regulate the input and output of oil from the lower chamber of each hydraulic cylinder during pressing, both when position control is required and when force control is required.

[0010] The advantages stemming from the invention are as follows:

- Since a single control element is used per cylinder,

the control system is simple.

- There is a single control system for both position and force control, the switchover between the force and position loops being performed at the right moment.
- The cylinders are the same that act both when there is force control and when there is position control, so that the number of cylinders needed is reduced.
- Closed loop force and position regulation is achieved in real time, with high speed of resolution and using sturdy control loops.
- Hydraulic and electronic simplicity are achieved.
- Compared with systems that only perform certain control functions, the system that is the object of the invention performs all the control functions needed during the pressing process.

DESCRIPTION OF THE DRAWINGS

[0011]

FIG. 1 is an elevational view of an example of a press according to the invention.

FIG. 2 is a diagram of the cushion along with the elements involved in the control system thereof according to the invention.

FIG. 3 is a graph showing examples of different paths that may be followed by the cushion of the invention in the course of the pressing process.

DETAILED EXPLANATION OF THE INVENTION

[0012] In the example in FIG. 1 the cushion 2 of the press 1 according to the invention comprises a box 21 that rests on a plurality of hydraulic cylinders 3. There is one valve 7 per said cylinder 3. The slide 29 of the press 1, which has a reciprocating up and down movement, carries the upper half of the die 18_a, which, together with the lower half of the die 18_b, forms plate 19. Said plate 19 is pressed by the upper half of the die 18_a and the blank holder 20 during the shaping process, the effort of the cushion 2 being transmitted to the blank holder 20 by way of a plurality of pressure pins 30.

[0013] With reference to FIG. 2, each cylinder 3 has a rod 14 on which the box 21 rests and a piston 15 that defines an upper chamber 4 and a lower chamber 5. The position and force of each cylinder 3 in the course of the pressing process is controlled by means of a single control element 7 which regulates the pressure of the lower chamber 5 of each cylinder 3.

[0014] The control element 7 is governed by a control unit 6 by way of a line 26. The control unit 6 receives information on the pressure in chambers 4 and 5 of each cylinder 3, on the position of the piston 15 of each cylinder 3, and on the position of slide 29 of the press 1. The information on the pressure in the chambers 4 and

5 is provided by the pressure transducers 8 and 9 by way of signals 22 and 23, respectively. The position transducers 10 and 11 supply, respectively, information on the position of the cylinder 3 (signal 24) and of the press 1 (signal 23).

[0015] The control element 7 is a valve that regulates the input and output of oil in chamber 5 by offering resistance to its flow. The outlet of the control element 7 is connected to the lower chamber 5 and its inlets are connected to a pressure generator set 12 and to a tank 13. Furthermore, the upper chamber 4 is also connected to the pressure generator set 12.

[0016] Besides transmitting command signal 26 to the control element 7, the control unit 6 exchanges status information with the press 1 controller 17 (line 28) and it is communicated with a user interface unit 16 (by way of a line 27). This enables the user to set up the operating and control parameters conveniently, besides performing graphic presentations and storing different working parameters.

[0017] Although a single cylinder 3 is shown in FIG. 2, a plurality of cylinders 3 is normally used, so that there will be a valve 7, a pair of pressure transducers 8 and 9 and a position transformer 10 per cylinder 3.

[0018] FIG. 3 shows some of the paths R that may be traversed by the cushion 2 in relation to the path P of the press 1 slide 29 during plate 19 pressing. These paths R are possible due to the different functions that may be performed by the control system that is the object of the invention. Said functions are, for instance, as follows:

- Height adjustment HA: it enables the user to set the height at which the cushion is going to be situated before the pressing process is started.
- Pre-acceleration PA: it enables the impact of the upper half of the die 18a with the blank holder 20 (represented in FIG. 1) to be reduced by initiating a downward movement of the cushion 2 and thereby reducing the relative speed of the upper half of the die with reference to the blank holder.
- Force Control FC: during the drawing process, and also during the upward stroke if a continuous contact between the blank holder 20 and the upper half of the die 18a is required. The retaining force may be variable in time and in space as well (by making each cylinder 3 exert a different force).
- Bottom Dead Centre Locking BDCL: it enables the cushion 2 to be held for a certain time at the position reached during drawing or even force a downstroke and locking at a level below drawing.
- Intermediate Stop Positions ISP: it enables stops to be made at programmed heights and for programmed times during the upstroke.
- Raise Speed Control RSC: it enables the speed of cushion 2 to be controlled during the upstroke.
- Stop Cushioning SC: it enables the cushion 2 to be stopped at the upper point in a controlled way,

thereby preventing sudden stops.

- Force Maintenance FM: in the event of press 1 stopping during the drawing process a minimum retaining force is assured.

[0019] There are therefore a series of functions that involve a position control of the cushion 2 (HA, PA, BD-CL, ISP, and others in which force control (FC, FM) is necessary.

[0020] These functions described are illustrative examples of the types of functions that may be performed by means of position and force control, but they in no way represent a restriction on the scope of the invention, as this covers any function that may require pad position or force control, within the scope of the appended claims.

Claims

1. A press with a hydraulic cushion and a control system for controlling the force of the hydraulic cushion (2),
 - said cushion (2) having at least one hydraulic cylinder (3) with an upper chamber (4) and a lower chamber (5) and
 - said control system comprising a control unit (6) and metering and control elements (7, 8, 9, 10, 11), said metering and controlling elements including pressure transducers (8, 9) associated to each cylinder (3) which provide information on the pressure in the chambers (4, 5) the control system acting on each cylinder (3), there being used for this purpose a single control element (7) per cylinder (3), governed by the control unit (6), which regulates the oil input and output in the lower chamber (5) of each cylinder (3), the upper chamber (4) being connected to a pressure generator set (12),
 - characterised in that** each cylinder (3) comprises a position transducer (10), whereby the control unit (6) receives a signal (24) from each position transducer (10) for controlling the position of each cylinder (3), so that both position and force of the cushion (2) are controlled by acting on each cylinder (3).
2. A press according to claim 1, wherein the control element (7) is a valve that regulates oil input and output in the lower chamber (5) by offering a resistance to its flow, its outlet being connected to said lower chamber (5) and its inlets to a pressure generator set (12) and to a tank (13).

Patentansprüche

1. Eine Presse mit einem hydraulischen Polster und einem Steuerungssystem zur Steuerung der Kraft

des hydraulischen Polsters (2),

wobei das genannte Polster (2) zumindest einen Hydraulikzylinder (3) mit einer oberen Kammer (4) und einer unteren Kammer (5) aufweist und

das genannte Steuerungssystem eine Steuereinheit (6) und Mess- und Steuerungselements (7,8,9,10,11) umfasst, wobei die Mess- und Steuerungselemente Druckaufnehmer (8,9) umfassen, die mit jedem Zylinder (3) in Verbindung stehen, die Informationen über den Druck in den Kammern (4,5) liefern, wobei das Steuerungssystem auf jeden einzelnen Zylinder (3) einwirkt, wozu ein einziges Steuerungselement (7) pro Zylinder (3) eingesetzt wird, das durch die Steuereinheit (6) geregelt wird, die den Öleinlass und -ablauf in der unteren Kammer (5) eines jeden Zylinders (3) reguliert, wobei die obere Kammer (4) an ein Druckerzeugeraggregat (12) angeschlossen ist,

dadurch gekennzeichnet, dass jeder Zylinder (3) einen Lageaufnehmer (10) umfasst, wobei die Steuereinheit (6) ein Signal (24) von jedem Lageaufnehmer (10) empfängt, um die Lage eines jeden Zylinders (3) zu steuern, so dass sowohl die Lage als auch die Kraft auf dem Polster (2) durch Einwirken auf jeden einzelnen Zylinder (3) gesteuert werden.

2. Eine Presse nach Anspruch 1, wobei das Steuerungselement (7) ein Ventil ist, das den Öleinfluss und -ablauf in der unteren Kammer (5) regelt, indem es Widerstand gegen seinen Fluss bietet, wobei der Ausgang an die genannte untere Kammer (5) und seine Eingänge an ein Druckerzeugeraggregat (12) und an einen Behälter (13) angeschlossen sind.

moyen duquel l'unité de contrôle (6) reçoit un signal (24) de chaque transducteur de position (10) pour le contrôle de la position de chaque vérin (3), de manière à ce que la position et la force du coussin (2) soient contrôlées en actionnant chaque vérin (3).

2. Une presse selon la revendication 1, où l'élément de contrôle (7) est une vanne qui régule l'admission et la sortie d'huile de la chambre inférieure (5) en exerçant une résistance sur son écoulement, son orifice de sortie étant connecté à ladite chambre inférieure (5) et ses orifices d'entrée, à un ensemble générateur de pression (12) et à un réservoir (13).

Revendications

1. Une presse dotée d'un coussin hydraulique et d'un système de contrôle pour la régulation de la force du coussin hydraulique (2), ledit coussin (2) ayant au moins un vérin hydraulique (3) avec une chambre supérieure (4) et une chambre inférieure (5) et ledit système de contrôle comprenant une unité de contrôle (6) et des éléments de mesure et de contrôle (7, 8, 9, 10, 11), lesdits éléments de mesure et de contrôle comprenant des transducteurs de pression (8, 9) associés à chaque vérin (3) qui indiquent la pression des chambres (4, 5), le système de contrôle actionnant chaque vérin (3), étant utilisé à cette fin un seul élément de contrôle (7) par vérin (3), piloté par l'unité de contrôle (6), qui régule l'entrée et la sortie de l'huile de la chambre inférieure (5) de chaque vérin (3), la chambre supérieure (4) étant connectée à un ensemble générateur de pression (12),

caractérisée en ce que chaque vérin (3) comprend un transducteur de position (10), par

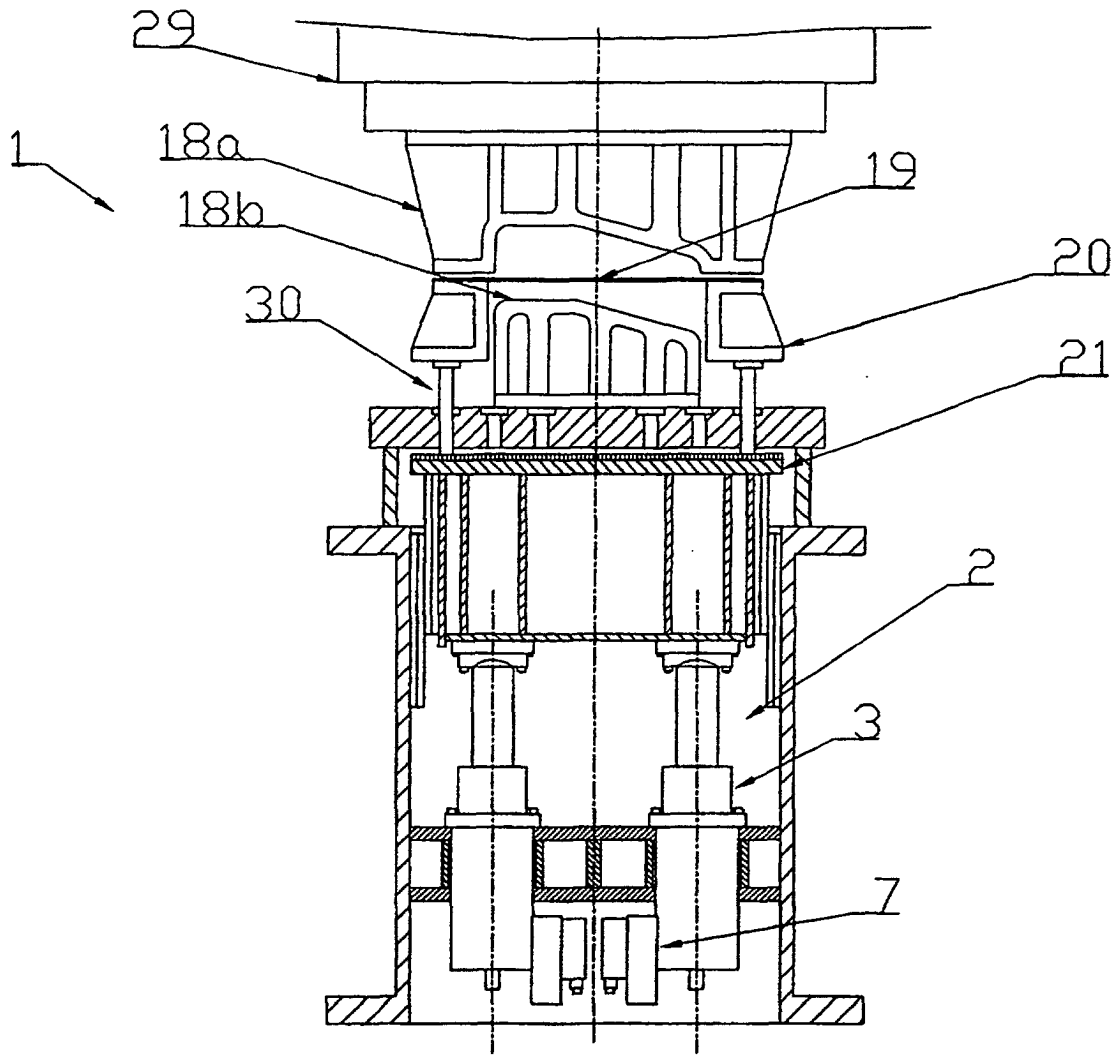


Fig. 1

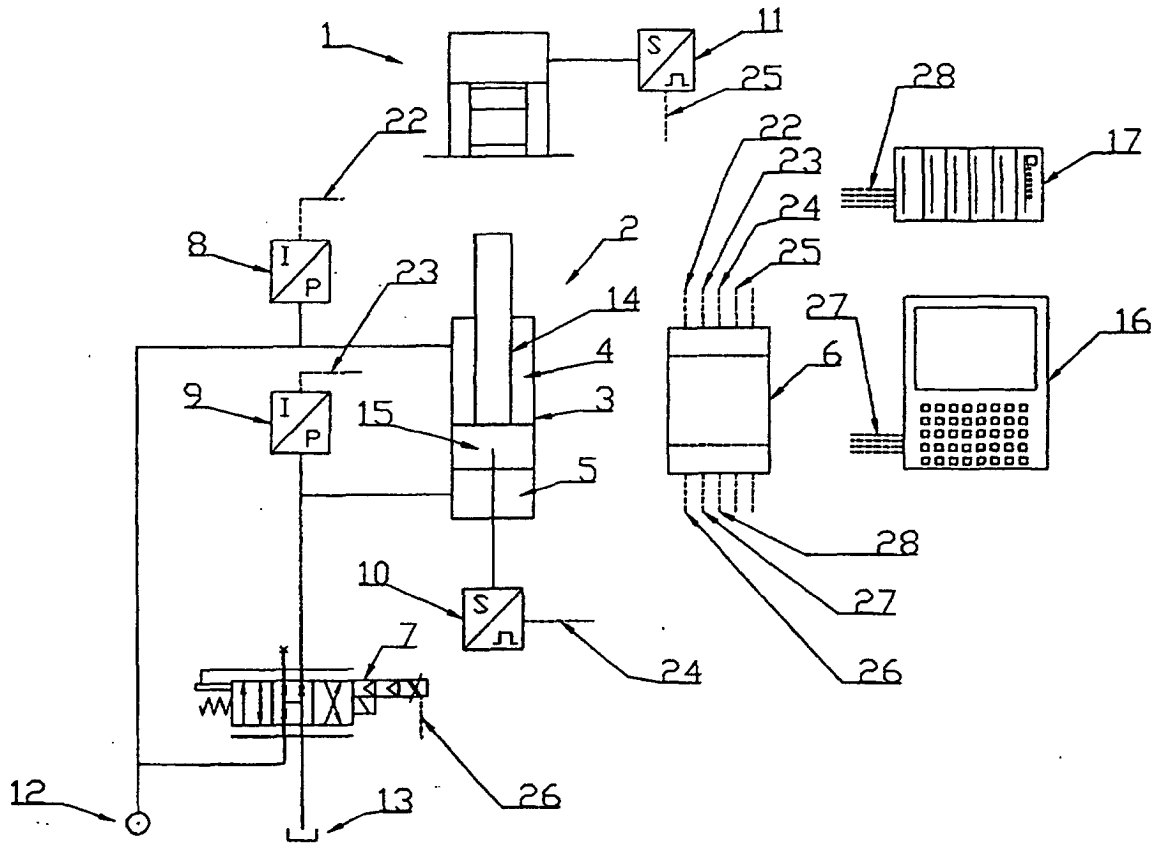


Fig. 2

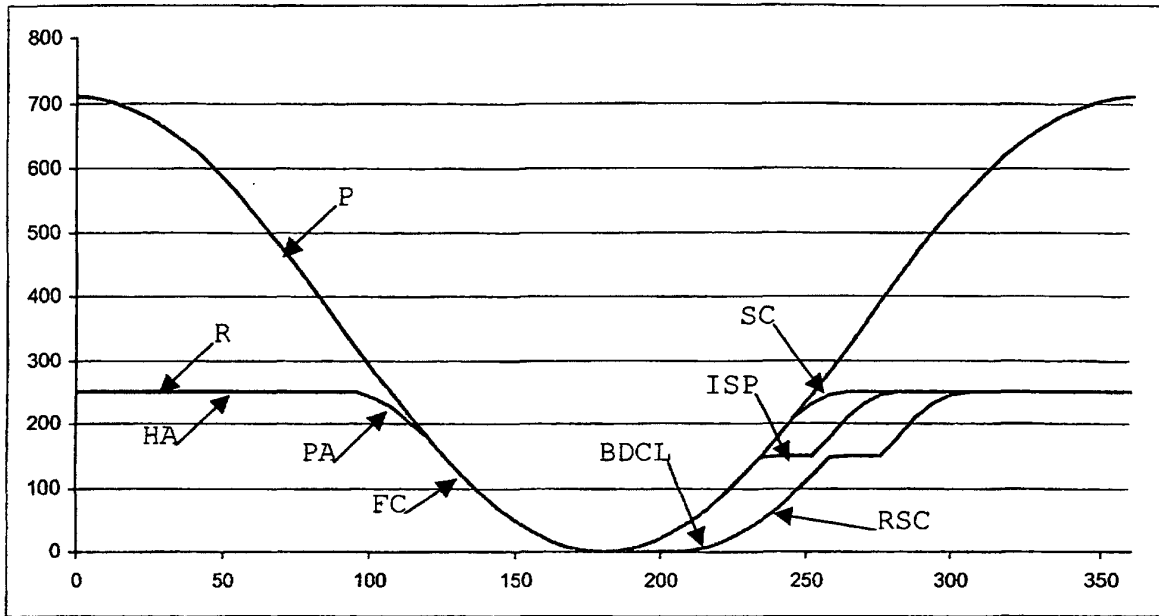


Fig. 3