



HU000026643T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 026 643**(13) **T2**

EURÓPAI SZABADALOM

SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 10 173212**(22) A bejelentés napja: **2010. 08. 18.**(51) Int. Cl.: **C08J 7/06** (2006.01)**C08J 9/36** (2006.01)**C08L 67/02** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20100173212

(97) Az európai bejelentés közzétételi adatai:

EP 2423249 A1 **2012. 02. 29.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2423249 B1 **2015. 11. 04.**

(72) Feltaláló(k):

Weidinger, Jürgen, 48167, Münster (DE)**Zauner, Christoph, 48147, Münster (DE)****Klusmann, Daniel, 48143, Münster (DE)**

(73) Jogosult(ak):

Armacell Enterprise GmbH & Co. KG, 12529**Schönefeld OT Waltersdorf (DE)**

(74) Képviselő:

Advopatent Szabadalmi és Védjegy Iroda,**Budapest**

(54)

Védett expandált poli(alkilidén-tereftalát)-ok

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 423 249 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
04.11.2015 Bulletin 2015/45

(51) Int Cl.:
C08J 7/06 ^(2006.01) **C08J 9/36** ^(2006.01)
C08L 67/02 ^(2006.01)

(21) Application number: **10173212.1**

(22) Date of filing: **18.08.2010**

(54) **Protected expanded polyalkylidene terephthalates**

Geschützte expandierte Polyalkyiden-Terephthalate

Téréphthalates de polyalkylidène expansés protégés

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO SE SI SK SM TR**

- **Zauner, Christoph**
48147, Münster (DE)
- **Klusmann, Daniel**
48143, Münster (DE)

(43) Date of publication of application:
29.02.2012 Bulletin 2012/09

(74) Representative: **von Fünér, Nicolai**
Von Fünér Ebbinghaus Finck Hano
Patentanwälte
Mariahilfplatz 3
81541 München (DE)

(73) Proprietor: **Armaceil Enterprise GmbH & Co. KG**
12529 Schönefeld OT Waltersdorf (DE)

(72) Inventors:
• **Weidinger, Jürgen**
48167, Münster (DE)

(56) References cited:
DE-A1-102005 032 557 JP-A- 52 115 878
JP-A- 2003 211 610

EP 2 423 249 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to material comprising an expanded polyalkylidene terephthalate based layer (A) being covered with at least one outer layer (B) comprising at least 50 weight-% of a solvent (including water) soluble inorganic chalkogene based compound, i.e. an easy-to-apply, but versatile method for significantly improving the fire retardant, anti-hydrolytic and mounting/coating properties of expanded polyalkylidene terephthalate polyester products by cold coating of the surface layer(s) of said foams and sponges, the manufacturing of such products and the use of such products.

[0002] Expanded polyester polymers, i.e. polyester foam or sponge, are of major importance for a large number of applications related to e.g. insulation against temperature gradients, noise shielding, vibration damping, lightweight construction etc. However, they are generally very sensitive to combustion through fire due to their organic nature caused by the polymer backbone, and due to the fact that hetero atoms having an additional negative effect on stability, such as oxygen, are part of the polymers. What makes the situation even worse is the fact that cellular polyesters are of course weaker than massive material, the surface is much higher, thus, more accessible for pyrolytic degradation, and air is already available in the cells in case of ignition. Therefore, polyesters in general are easily flammable and tend to continue burning once ignited. Polyalkylidene terephthalates (e.g. PET, PBT) are even more critical in this case as they are even easier to ignite than other polyesters and often will release more heat when burning. Thus, most methods for fire protection being efficient for other polyesters fail with polyalkylidene terephthalates, such as mixing of halogenated and non-halogenated flame retardants, non-combustible fillers etc. into the blend. However, as the manufacturing process of polyalkylidene terephthalate foams is almost always a reactive foaming process (see e.g. EP 0866089, JP 5117501, JP 62004729, JP 8151470, US 5288764, WO 2001051549) foreign substances may severely impact the expansion or foaming of the polymers as well as other final properties targeted for the intended applications. Additionally, these foreign substances would have to withstand the processing conditions which might be e.g. almost 300 °C when speaking about polyethylene terephthalate (PET). Most of the standard flame retardant agents would not survive these temperatures and decompose during the process. Other more stable substances, such as inorganic fillers, fibres etc., either will negatively influence the chain length of the polymers or the cell structure or simply can not be compounded into the matrix to an extent where a significant effect could be achieved. Additionally, care has been taken that any treatment of the polyethylene terephthalate has to be checked for possible acceleration or initiation (or acid/alkali catalysis) of hydrolytic decomposition of the polymer. To overcome these issues some works have been done on the field of coating and lamination technologies where the restriction provided by the processing of the expanded polyester is not given. KR 100701274 discloses a polyethylene terephthalate (PET) carpet layer with phosphorous as flame retardant. In JP 2008201079, JP 10119219, JP 8068164, JP 1261588, GB 2344834, GB1161045, GB 2222185, GB 882296 and US 6066580 polyester, polyester fibre or polyester/glass fibre lamination is used to protect the more flammable foam core consisting of other polymers; GB 2122232 is discussing a treatment of foam or its protective layers with halogen/antimony compounds. Using, mainly aluminium, foil is a rather widespread method, see e.g. in JP 2215521, JP 4347252, JP 8199709, US 4459334, CH 650196 etc. However, these multilayer methods bear some source for failure, such as the additional uncertainties provided by the necessary adhesive (flammability, durability, compatibility etc.). Even aluminium foil will fail in most fire tests as the flame temperatures generally exceed its melting point. Some rather lightweight compounds in the building industry, such as in DE 4436429 (epoxy layer with flame retardants on PU/PS), EP 1754746 (polymer bound filled layer on PS/polyolefin), JP 02043038 (incombustible fabric glued by polymer cement/mortar on a fibre filled foam) or JP 2004100236, GB 2355024, EP 1884352, DE 2517095, DE 102005032557, DE 102007048801, RU 2352601 and WO 66848 (PS or PU foam board dip coated, glued onto or brought into other connection with cement, gypsum or concrete) try to overcome some of the a.m. issues by varying the composite structure, however, as the foamed polymer is PS, PU or PE/PP, the strength of the compound is low (typical compressive strength values: PS/PE/PP 50-500 kPa; PU: 200-800 kPa, PET: 900-1500 kPa) together with other lacks in performance. In fact, all a.m. solutions lack of applicability and performance when it comes to fulfilling nowadays' requirements concerning fire resistance approvals: e.g. flammability test related certifications within the building industry become more and more global, but also more precise and application-related and therefore more challenging (e.g. ASTM E-84 "tunnel burn test", UL 94 "horizontal/vertical burn", EN 13823 "round corner burn test", FM "room burn test"). Another issue is the fact that the at least "better working" among the a.m. solutions require the application of heat during the lamination of coating process to ensure good bonding or connection of functional

[0003] layers. This, however, will always lead to deformation of the polyester foam which naturally is under tension after production due to the harsh manufacturing conditions. Application of additional heat will lead to tension release resulting in e.g. warping of boards or blocks, which of course would never be accepted in the building and construction sector. Another issue with the a.m. solutions occurs when it comes to further applicability, such as covering the materials with cement, mortar, paint etc., as usually the surface will be rendered inactive or too inert for further finishing. This will result in time and money consuming application of binders, adhesives etc.

[0004] A major object of the present invention thus is to provide an expanded polyalkylidene terephthalate polyester

material and related process for manufacturing the same being flame retardant and stable versus deformation, but also versus hydrolytic cleavage, showing good applicability when it comes to further coating or bonding operations, all that without losing any of the beneficial properties of polyalkylidene terephthalate foams, such as economy, low density, high T_g, controlled crystallinity, intrinsic strength etc., and maintaining a surface which is easily accessible for further operations.

[0005] Surprisingly, it is found that such a material not showing the above mentioned disadvantages can be achieved by applying a protective layer on the expanded polyester by a solvent and/or water based "cold coating" that is mainly consisting of inorganic material as a matrix which is giving a good direct bonding to the polyester and excellent accessibility for finishing operations, as well as significant improvement in fire retardant properties, such as general flammability and heat release.

Brief Description of the Drawings

[0006]

Fig. 1 is a schematic drawing of the claimed thermal and/or sound insulation material.

Fig. 2 is a schematic drawing demonstrating the flame and heat spreading and heat and flammable gas diluting function of the claimed material. a) shows the spread of flame on the surface of the protection layer (B) leading to delayed formation of decomposition gases; b) shows the dilution of said gases into the matrix (A); c) shows breakthrough of said flammable gases through the protection layer (B) (left) or the structure being maintained by reinforcement (C) leading to delay of breakthrough (right).

[0007] The claimed material comprises layer (A), see fig. 1, which is an expanded polyalkylidene terephthalate based blend. The expanded polyalkylidene terephthalate based blend can show a mainly open or mainly closed cell structure (i.e. may be a sponge or foam) of any cell size and distribution. Preferred are polyalkylidene terephthalate polymer foams based on polyethylene terephthalate (PET). The expanded polyalkylidene terephthalate based blend of layer (A) may comprise virgin material or post consumer (recycled) material and may comprise other ingredients other than the polyester polymer itself, such as, but not exclusively: fillers (e.g. carbon blacks, metal, half metal and non metal oxides, hydroxides, silicates, phosphates, sulphates; glass or ceramic fillers as powder, beads etc; recycled polymers based blends etc.), other polymers (e.g. thermoplasts, thermosets, thermoplastic elastomers, elastomers, resinous blends), fibres (e.g. from glass, polyester, polyamide, polyimide, polyaramide, hemp, wool, cellulose, cotton etc.; as pulp, chopped fibre, nonwoven etc.), additives (e.g. plasticizers, softeners, emulsifiers, phase transfer catalysts etc.), colours, crosslinkers, self-ceramifying substances, char-forming agents, intumescent systems, stabilizers (e.g. versus heat, reversion, radiation etc.), flame retardant agents (such as, but not exclusively, halogen containing substances, phosphorous compounds, water releasing chemicals, and mixtures thereof) etc., and any respective mixtures thereof. The expanded polyalkylidene terephthalate based blend may be obtained by reactive or non reactive extrusion or moulding. Preferred is the manufacturing by reactive extrusion by help of chain extenders, such as anhydrides. The polyalkylidene terephthalate can be expanded by physical and/or chemical blowing agents. (A) can be expanded to densities between 30 kg/m³ and 500 kg/m³, preferably between 45 kg/m³ and 120 kg/m³ according to ISO 845 for best insulation properties. The achievable thermal conductivity is between 0.5 W/mK and 0.015 W/mK, preferably between 0.051 and 0.020 W/mK according to EN 12667.

[0008] The claimed material comprises a least one additional layer (B), see fig. 1, based on at least one solvent (including water) soluble inorganic compound. The inorganic compound comprises any inorganic material that solidifies or sets (harden, crosslink) in cold to warm state (from -10°C to +80°C) during evaporation of the solvent and/or by influence of air and/or vacuum and/or humidity and/or one of its components (e.g. CO₂), such as, but not exclusively, all kinds of generally calcium carbonate and/or cement based compounds (e.g. chalk, cement, mortar, concrete etc.), gypsum based compounds (e.g. gypsum, plaster, stucco etc.), clay based compounds, silicate compounds (e.g. aluminium silicates, kieselguhr, diatomaceous earth, mountain flour, zeolites) and the like, and any mixtures thereof. The layer (B) comprises at least 50 weight-% inorganic chalkogene compounds.

[0009] Layer (B) may comprise fillers (e.g. carbon blacks; metal, half metal and non metal oxides, hydroxides, silicates, phosphates, sulphates; glass or ceramic fillers as powder, beads etc; polymers like thermoplasts, thermosets, thermoplastic elastomers, elastomers, resinous blends etc.).

[0010] Layer (B) furthermore may comprise fibres as internal reinforcing agents, such as, but not exclusively, from glass, minerals, ceramics, metals, polyester, polyamide, polyimide, polyaramide, hemp, wool, cellulose, cotton etc., as hollow or solid fibres.

[0011] Layer (B) also may comprise additives, such as, but not exclusively, binders and/or adhesion promoters (e.g. acrylics, vinyl acetates, silanes/siloxanes etc.), dispersers, emulsifiers, phase transfer catalysts, colours, crosslinkers, siccatives, ceramifying or char-forming agents, intumescent systems, stabilizers (e.g. versus coagulation), flame retard-

ant agents etc., and any respective mixtures thereof.

[0012] Layer (B) may be applied as solid layer or as porous material. Porosity may be achieved by gas formation or inclusion during the solidification/drying process or by loading the inorganic compound with gas during mixing or application on (A).

[0013] (B) can be applied onto (A) on one or all sides/surfaces by various methods, such as, but not exclusively, coextrusion, co-moulding or overmoulding, (co)coating, spray coating, dip coating etc., in on-line or off-line processes, continuously or discontinuously. (B) can be brought onto (A) in dry state and then be wet with solvent or as a dispersion or emulsion of any concentration and viscosity in any solvent, from liquid to paste or putty. The solvent can be let evaporate or be removed faster e.g. by airflow and/or application of temperature up to maximum 80 °C to prevent warping of (A) and/or by application of vacuum. The minimum application temperature is determined by the solvent but should not go below -10 °C. (B) will give excellent connection to (A) due to (A)'s polyester, thus oxidic, nature being ideal for bonding to inorganic materials. The polarity of (A) as well as its chemistry will lead to direct and strong chemical bonding of (B) into (A). The high surface of the expanded material of (A) will multiply this effect. (B) will render the claimed material flame retardant to very flame retardant (see table 1) as it is firstly non combustible itself, will secondly disperse the flame and thus prevent local hot spots, and thirdly it will either prevent that flammable gases are formed by thermal decomposition of (A) or at least prevent such gases from breaking through to the flame. (B)

[0014] therefore can act as barrier for flammable gases by blocking and diluting/dispersing them; the same is valid for flames as said above (see fig. 2).

[0015] (B) furthermore can also act as gas/vapour barrier or diffusion facilitating layer during use, leading to a regulation of humidity in the whole layer. Additionally, (B) can have protective effect on (A) by stabilizing it against hydrolysis which is mainly caused by humidity in combination with strong alkalis. (B) should show a pH value between 2 and 10 to guarantee this functionality.

[0016] (B) can be applied in any thickness, however, to provide best performance concerned the mentioned properties a minimum thickness of 0.2 mm is preferred, as well as a maximum thickness of 15 mm to prevent formation of ruptures or other damage on or in the layer by too elevated rigidity. Especially preferred is a thickness range of 0.5 to 10 mm. (b) may be of smooth or structured surface. Structured surfaces will lead to better acoustic decoupling and sound dispersion, but also can improve thermal insulation properties.

[0017] The claimed material furthermore may comprise additional functional layers (C), see fig. 1, consisting of e.g. paint, metal, fibre or plastics, as covering and/or intermediate without or in a matrix on or between (A) and/or (B) to act e.g. as a shielding, a reinforcing or as a decorative layer, see fig. 1. Preferred are layers that will either be incombustible or flame-retardant themselves, or intumescent and/or char-forming or easily be burning or melting away so not to disturb the functioning of the (A) (B) flame retardancy system. Especially preferred are incombustible or flame retardant materials being applied between (A) and (B) in an open porous form (fibre, pulp, mesh, grid, tissue, woven, nonwoven) or in a closed form (foil or sheet) without or in a matrix. The layers (C) may be bond to (A) and/or (B) by adhesives, preferably flame retardant ones, or adhere by themselves. (C) can support the flame retardant properties of the claimed material, especially of (B), if it is a foil, mesh, tissue or nonwoven, as it provides additional structural integrity to (B) and will prevent flammable gases (formed from decomposing polyester) from breaking through to the flame in case of bum (see table 2 and fig. 2).

[0018] The claimed material furthermore may contain any further element (D) necessary for the intended application, such as, but not exclusively, parts made from wood, glass, plastics, metal or concrete etc., structures for building purposes etc., to act as reinforcement, mounting aid, link etc., see fig. 1. The elements (D) may be bond to other layers of the material by adhesives, preferably flame retardant ones, or adhere by themselves or may be incorporated mechanically.

[0019] It is a prominent advantage of the claimed material that it will not warp during or after being coated with the functional layer(s) (B) as the critical temperature for warping of polyalkylidene terephthalate blends (100-120 °C) is significantly above the processing temperature for said "cold coatings".

[0020] Another major advantage of the claimed material is the fact that hydrolytic attack on the polyester is prevented by the coating.

[0021] A major advantage of the claimed material is the fact that its manufacturing process will allow to enclose a broad variety of substances in high concentration into the outer layer, such as flame retardants that will render this layer incombustible or at least extremely difficult to ignite or bum through, and therefore will allow to generate properties that would never be achievable by additivition of the foam only or by use of polymer based, thus organic, layers.

[0022] This leads to another prominent advantage of the claimed material which is the fact that the developer and the process responsible can independently focus on optimization of the protective layer or the expanded core, their performance and their manufacturing, as the materials' properties and requirements are decoupled, which is not the case with expanded material that has been tried to be additivited directly.

[0023] This is linked to a further advantage of the claimed material which is the possibility to adapt its properties to the desired property profile (concerning mechanics, damping, insulation, flexibility, etc.) by possible independent modification of the core (A) and/or the layer (B) concerning respective thickness, loading with additives, crystallinity etc.

[0024] Another major advantage of the claimed material is the fact that the base material for (A) can be recycled/post consumer material, and that the main ingredients for (B) are both economic and environmentally friendly.

[0025] The term "post consumer" is defined as material being brought back into the process — i.e. being recycled - after its prior use, e.g. as PET bottles.

[0026] It is another advantage of the claimed material that the polyester foam core will not be affected (e.g. through hydrolytic cleavage or its catalysis) by the coating during manufacturing and use as the coating is chemically neutral versus the polyalkylidene terephthalate. The coating will even act as protective layer (i.e. buffer) versus acid or alkali impact.

[0027] A very prominent advantage of the claimed material is the fact that the surface is accessible to adhesion and interaction of other compounds, e.g. can easily be painted or plastered.

[0028] A further prominent advantage of the claimed material is the fact that (B) will show excellent adhesion to (A) without any further measures and that the resulting composite will act as "one" material.

[0029] Another advantage of the claimed material is the fact that no additives have to be put into the major volume of the final part, i.e. the foam, leading to a more "clean" product

[0030] This leads to another advantage of the claimed material as it is recycling-friendly due to the fact that pure polyester is obtained after removal of the top layer.

[0031] A basic advantage of the claimed material is the fact that in its preferred compositions it is free of both fibres, brominated substances and PVC, all of them being under survey and being discussed for environmental and health issues.

[0032] A further advantage of the claimed material is that its flame retardant properties are almost independent from the geometry of the part to be protected.

[0033] It is a prominent advantage of the claimed material that it can be produced in an economic way in a continuous process, e.g. by extrusion and coating in various manners as discussed above. It shows versatility in possibilities of manufacturing and application and thus it can be applied in unrestricted shaping onto various surfaces in automotive, transport, aeronautics, building and construction, furniture, machinery engineering and many other industries.

[0034] It is a further advantage of the claimed material that it can be transformed and given shape by standard methods being known in the industry and that it does not require specialized equipment.

[0035] It is another advantage of the claimed material that the coating itself can be expanded, thus contributing to the insulation properties of the composite and further reducing weight.

[0036] A further advantage of the claimed material is its suitability for thermal and sound/vibration insulation applications, e.g. in building industry, as expanded polyalkylidene terephthalate is known to be a very high strength material ideal for this kind of application where structural support is desired. Layer (B) here can act as sound decoupler or absorber, and as a vapour barrier and water repellent surface, but even -depending on its composition- as diffusion accelerator, e.g. when painted/coated with silica and/or silicone based compounds or the like.

Examples

[0037] In the following examples and comparative examples standard PET insulation foam (ArmaStruct®, Armacell GmbH, Münster, Germany) of 65 kg/m³ density was cut to 25 mm thickness and 500 mm width and length samples. The cold coated layers were applied on the foam parts by use of a trowel, followed by homogenizing the surface with a squeegee to obtain a layer thickness of approximately 0.5 mm, then letting the composite set at room temperature for 30 minutes (with coating 5 and 6, see table 1) or let set by applying a 40 °C air stream for 30 min (with coating 1-4). Table 1 is providing data for cold coating compositions.

Table 1: Composition of cold coating compounds

Coating	Solvent	Ingredients	Suppliers
1	Water	Gypsum (adhesion modified)	Knauf; Iphofen, Germany
2	Water	Gypsum/cement 1:2	Knauf; Holcim; Hamburg, Germany
3	Water	Limestone/silicate 1:3	Fels; Goslar, Germany
4	Water	Gypsum/aluminium trihydrate 5:1	Albemarle; Bergheim, Germany
5	Cyclopentane	Gypsum/chloraprene latex 6:1	Knauf; Lanxess; Leverkusen, Germany
6	Water/Ethanol 1:1	Gypsum/cement/SBR latex 6:2:1	Knauf; Holcim; Lanxess

(continued)

Coating	Solvent	Ingredients	Suppliers
1A	Water	Like 1, with glass fibre nonwoven between foam and coating	STW; Schenkenzell, Germany
2A	Water	Like 2, with glass fibre nonwoven between foam and coating	STW
3A	Water	Like 3, with aluminium mesh between foam and coating	Expanded Metal; Hartlepool, UK
4A	Water	Like 4, with aluminium mesh between foam and coating	Expanded Metal
5A	Cyclopentane	Like 5, with short cellulose fibres between foam and coating	STW
6A	Water/Ethanol 1:1	Like 6, with glass fibre nonwoven between foam and coating	STW

The manufactured composites were partially examined for fire retardant behaviour according to EN 13823/EN 13501-1 (single burning item/round corner test), DIN 4102, and UL 94 (horizontal/vertical burn). Table 2 shows the results in comparison with untreated foam board of same thickness (comparative example, marked with asterisk). The examples without asterisks comprise claimed material.

Table 2: Flammability test results (n.e.: not examined)

Coating	EN 13823/ 13501-1	DIN 4102	UL 94-coating on one side / two sides	ASTM E-84	General evaluation
none*	E	fail	fail	200/200	Extremely flammable
1	C-sl-d0	A2	V-2/V-1	50/150	Flame retardant
2	C-S1-d0	A2	V-2/V-1	50/200	Flame retardant
3	C-S2-d0	B1	HB/V-1	n.e.	Flame retardant
4	B-S2-d0	B1	V-2/V-0	n.e.	Flame retardant
5	C-S1-d0	B1	V-2/V-1	n.e.	Flame retardant
6	C-S3-d0	B2	HB/V-2	n.e.	Flame retardant
1A	B-S1-d0	A2	V-1/V-0	25/50	Very flame retardant
2A	B-S2-d0	A2	V-1/V-0	25/50	Very flame retardant
3A	B-S2-d0	B1	V-2/V-0	n.e.	Flame retardant
4A	B-S1-d0	A2	V-1/V-0	n.e.	Very flame retardant
5A	B-S3-d0	B1	V-2/V-1	n.e.	Flame retardant
6A	B-S3-d0	B1	V-1/V-1	n.e.	Flame retardant

Claims

1. A material comprising an expanded polyalkylidene terephthalate based layer (A) being covered with at least one outer layer (B) comprising at least 50 weight-% of a compound based on a solvent (including water) soluble inorganic chalcogene compound which itself comprises an inorganic material that solidifies (set, harden, crosslink) in cold to

warm state (from -10 °C to +80 °C) during evaporation of the solvent and/or by influence of air and/or vacuum and/or humidity and/or one of its components and wherein the compound of layer (B) is calcium carbonate and/or cement based compound, gypsum based compound, clay based compound, silicate compound and any mixtures thereof.

- 5 **2.** The material according to claim 1 where the polyalkylidene terephthalate is expanded to a density between 30 kg/m³ and 500 kg/m³, preferably between 45 kg/m³ and 120 kg/m³ according to ISO 845.
- 10 **3.** The material according to one of claims 1 or 2 where the thermal conductivity of the expanded polyalkylidene terephthalate based blend is between 0.5 W/mK and 0.015 W/mK, preferably between 0.051 and 0.020 W/mK according to EN 12667.
- 15 **4.** The material according to one of claims 1-3 wherein the polyalkylidene terephthalate is polyethylene terephthalate (PET).
- 20 **5.** The material according to one of claims 1-4 wherein the expanded polyalkylidene terephthalate blend is obtained by reactive extrusion by help of chain extenders.
- 25 **6.** The material according to one of claims 1-5 wherein the polyalkylidene terephthalate is based on recycled/post consumer raw material.
- 30 **7.** The material according to one of claims 1-6 wherein layer (B) shows a pH value of 2-10.
- 35 **8.** The material according to one of claims 1-7 wherein layer (B) has a thickness of 0.2 to 15 mm, preferably 0.5 to 10 mm.
- 40 **9.** The material according to one of claims 1-8 wherein (B) comprises flame retardant agents and/or anti-hydrolysis agents from 0.5 to 50 weight-percent.
- 45 **10.** The material according to one of claims 1-9 wherein additional layers are applied for protection, reinforcement and decoration purposes.
- 50 **11.** The material according to one of claims 1-10 where at least one additional layer is applied between (A) and (B), comprising incombustible or flame retardant material.
- 55 **12.** The material according to claim 11 where the incombustible or flame retardant material is applied between (A) and (B) in an open porous form (fibre, pulp, mesh, grid, tissue, woven, nonwoven) or in a closed form (foil or sheet) without or in a matrix.
- 60 **13.** A process for manufacturing the material according to one of claims 1-12 in a continuous process.
- 65 **14.** A process for manufacturing the material according to claim 12 in a two-step-extrusion and coating process.
- 70 **15.** A process for manufacturing the material according to one of claims 1-12 wherein the coating is done by spraying, dipping, by squeegee, and/or roller(s).
- 75 **16.** The use of a material according to one of claims 1-12 for thermal and/or acoustic insulation and/or acoustic and/or vibration damping.
- 80 **17.** The use of a material according to 1-12 for thermal and/or sound insulation inside and outside of structures, vessels, containers and pipes, walls, ceilings, floors, roofs, tanks, tubes and ducts.
- 85 **18.** The use of a material according to one of claims 1-12 for building products for lightweight and/or energy saving construction.

55 **Patentansprüche**

1. Material, umfassend eine Schicht (A) auf der Basis eines geschäumten Polyalkylidenterephthalats, die mit wenigstens einer Außenschicht (B) beschichtet ist, umfassend wenigstens 50 Gew.-% einer Verbindung auf der Basis

einer in einem Lösungsmittel (einschließlich Wasser) löslichen anorganischen Chalkogenverbindung, die ihrerseits ein anorganisches Material umfasst, das sich verfestigt (erstarrt, härtet bzw. vernetzt), und zwar in kaltem bis warmen Zustand (von -10 °C bis +80 °C) während der Verdampfung des Lösungsmittels und/oder unter Einfluss von Luft und/oder von Vakuum und/oder Feuchtigkeit und/oder einer dieser Komponenten, und wobei die Verbindung der Schicht (B) Kalziumcarbonat und/oder ein Gemisch auf der Basis von Zement, ein Gemisch auf der Basis von Gips, ein Gemisch auf der Basis von Ton, eine Silikatverbindung und Gemische davon darstellt.

2. Material nach Anspruch 1, wobei das Polyalkylidenterephthalat bis zu einer Dichte von 30 kg/m³ - 500 kg/m³, vorzugsweise von 45 kg/m³ - 120 kg/m³, nach ISO 845 geschäumt ist.
3. Material nach einem der Ansprüche 1 oder 2, bei dem die Wärmeleitfähigkeit des Gemisches auf der Basis des geschäumten Polyalkylidenterephthalats 0,5 W/mK - 0,015 W/mK, vorzugsweise von 0,051 - 0,020 W/mK nach EN 12677 beträgt.
4. Material nach einem der Ansprüche 1 bis 3, wobei das Polyalkylidenterephthalat Polyethylenterephthalat (PET) ist.
5. Material nach einem der Ansprüche 1 bis 4, wobei das geschäumte Polyalkylidenterephthalat-Gemisch durch reaktive Extrusion mit Hilfe von Kettenverlängerern erhalten wird.
6. Material nach einem der Ansprüche 1 bis 5, wobei das Polyalkylidenterephthalat auf rückgeführten/wiederverwerteten Rohstoff beruht.
7. Material nach einem der Ansprüche 1 bis 6, wobei die Schicht (B) einen pH-Wert von 2-10 besitzt.
8. Material nach einem der Ansprüche 1 bis 7, wobei die Schicht (B) eine Dicke von 0,2 - 15 mm, vorzugsweise von 0,5 - 10 mm aufweist.
9. Material nach einem der Ansprüche 1 bis 8, wobei die Schicht (B) Flammenschutzmittel und/oder Antihydrolysemittel in einer Menge von 0,5 - 50 Gew.-% enthält.
10. Material nach einem der Ansprüche 1 bis 9, wobei die zusätzlichen Schichten zum Schutz, zur Verstärkung und für Dekorationszwecke aufgebracht werden.
11. Material nach einem der Ansprüche 1 bis 10, wobei mindestens eine zusätzliche Schicht zwischen (A) und (B) aufgebracht wird, die ein unbrennbares Material bzw. Flammenschutzmaterial umfasst.
12. Material nach Anspruch 11, wobei das unbrennbare Material bzw. das Flammenschutzmaterial zwischen (A) und (B) in offenporiger Form (Fasern, Brei, Netz, Gitter, Stoff, Gewebe, Vlies) oder in geschlossener Form (Folie oder Bahn) ohne eine Matrix oder in einer solchen aufgebracht ist.
13. Verfahren zur Herstellung des Materials nach einem der Ansprüche 1 bis 12 in einem kontinuierlichen Verfahren.
14. Verfahren zur Herstellung des Materials nach Anspruch 12 in einem Zweistufenextrusions- und Beschichtungsverfahren.
15. Verfahren zur Herstellung des Materials nach einem der Ansprüche 1 bis 12, wobei die Beschichtung durch Aufsprühen, Eintauchen, mit Hilfe einer Quetschwalze und/oder mit Hilfe von Rollenwerkzeug erfolgt.
16. Verwendung eines Materials nach einem der Ansprüche 1 bis 12 für die Wärme- und/oder Schallisolierung und/oder Schall- und/oder Schwingungsdämpfung.
17. Verwendung eines Materials nach den Ansprüchen 1 bis 12 für die Wärme- und/oder Schallisolierung im Innern von Bauwerken oder auf deren Außenseite, von Gefäßen, Containern und Röhren, Wänden, Zimmerdecken, Fußböden, Dächern, Tanks, Rohren und Rohrleitungen.
18. Verwendung eines Materials nach einem der Ansprüche 1 bis 12 für Baustoffe für die Leichtbauweise und/oder für den Energiesparbau.

Revendications

1. Matière comprenant une couche (A) à base de polyalkylidène téréphtalate expansé, revêtue d'au moins une couche externe (B) comprenant au moins 50 % en poids d'un composé à base d'un composé inorganique de chalcogène soluble dans un solvant (y compris de l'eau) qui, quant à lui, comprend une matière inorganique qui se solidifie (par prise, par durcissement, par réticulation) en passant de l'état froid à l'état chaud (de -10 °C à +80 °C) au cours de l'évaporation du solvant et/ou sous l'influence d'air et/ou de vide et/ou d'humidité et/ou d'un de leurs composants, et dans laquelle le composé de la couche (B) représente du carbonate de calcium et/ou un composé à base de ciment, un composé à base de gypse, un composé à base d'argile, un composé de silicate et l'un quelconque de leurs mélanges.
2. Matière selon la revendication 1, dans laquelle le polyalkylidène téréphtalate est expansé jusqu'à une densité entre 30 kg/m³ et 500 kg/m³, de préférence entre 45 kg/m³ et 120 kg/m³ conformément à la norme ISO 845.
3. Matière selon l'une quelconque des revendications 1 ou 2, dans laquelle la conductivité thermique du mélange à base de polyalkylidène téréphtalate expansé se situe entre 0,5 W/mK et 0,015 W/mK, de préférence entre 0,051 et 0,020 W/mK conformément à la norme EN 12667.
4. Matière selon l'une quelconque des revendications 1 à 3, dans laquelle le polyalkylidène téréphtalate est du polyéthylène téréphtalate (PET).
5. Matière selon l'une quelconque des revendications 1 à 4, dans laquelle on obtient le mélange à base de polyalkylidène téréphtalate expansé par extrusion réactive en utilisant des agents d'allongement de chaîne.
6. Matière selon l'une quelconque des revendications 1 à 5, dans laquelle le polyalkylidène téréphtalate est à base d'une matière première recyclée/de post-consommation.
7. Matière selon l'une quelconque des revendications 1 à 6, dans laquelle la couche (B) présente une valeur de pH de 2 à 10.
8. Matière selon l'une quelconque des revendications 1 à 7, dans laquelle la couche (B) possède une épaisseur de 0,2 à 15 mm, de préférence de 0,5 à 10 mm.
9. Matière selon l'une quelconque des revendications 1 à 8, dans laquelle la couche (B) comprend des agents retardateurs des flammes et/ou des agents antihydrolyse à concurrence de 0,5 à 50 % en poids.
10. Matière selon l'une quelconque des revendications 1 à 9, dans laquelle on applique des couches supplémentaires à des fins de protection, de renforcement et de décoration.
11. Matière selon l'une quelconque des revendications 1 à 10, dans laquelle on applique au moins une couche supplémentaire entre les couches (A) et (B), comprenant une matière incombustible ou une matière retardant les flammes.
12. Matière selon la revendication 11, dans laquelle la matière incombustible ou retardant les flammes est appliquée entre les couches (A) et (B) sous une forme à pores ouverts (sous la forme de fibres, de pâte de papier, de mailles, d'une grille, d'un tissu, d'une étoffe tissée, d'un non-tissé), ou sous une forme fermée (feuille mince ou feuille) en l'absence d'une matrice ou dans cette dernière.
13. Procédé pour la fabrication de la matière selon l'une quelconque des revendications 1 à 12, dans un procédé en continu.
14. Procédé pour la fabrication de la matière selon la revendication 12, dans un procédé d'extrusion et d'enduction en deux étapes.
15. Procédé pour la fabrication de la matière selon l'une quelconque des revendications 1 à 12, dans lequel l'enduction est réalisée par pulvérisation, par immersion, à l'aide d'un racloir et/ou en utilisant un ou plusieurs rouleaux.
16. Utilisation d'une matière selon l'une quelconque des revendications 1 à 12, pour l'isolation thermique et/ou acoustique et/ou pour l'amortissement des vibrations.

EP 2 423 249 B1

17. Utilisation d'une matière selon l'une quelconque des revendications 1 à 12, pour l'isolation thermique et/ou acoustique à l'intérieur et à l'extérieur de structures, de récipients, de conteneurs et de tuyaux, de parois, de plafonds, de planchers, de toits, de cuves, de tubes et de conduits.

5 **18.** Utilisation d'une matière selon l'une quelconque des revendications 1 à 12, pour des produits de construction pour une construction légère et/ou économisant de l'énergie.

10

15

20

25

30

35

40

45

50

55

Figure 1


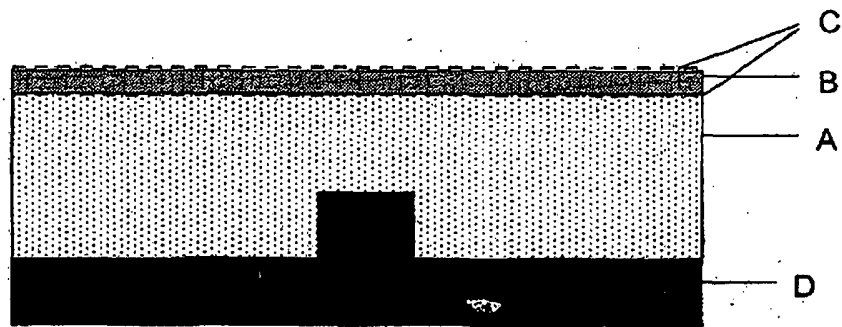


Figure 2

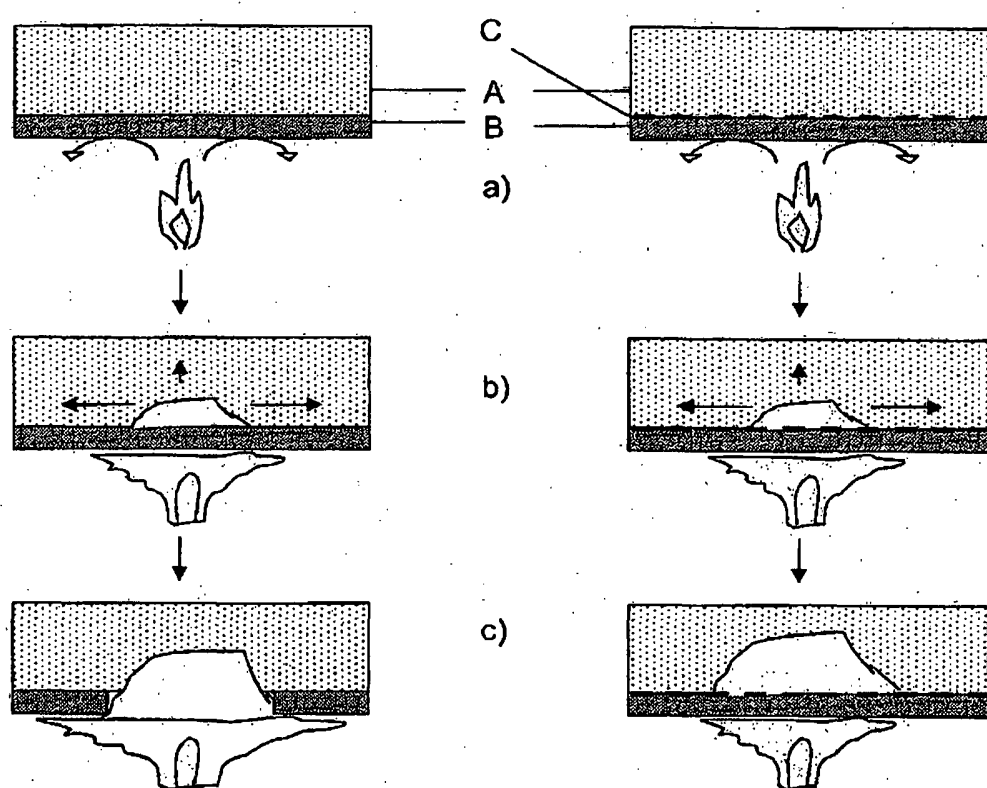

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0866089 A [0002]
- JP 5117501 B [0002]
- JP 62004729 B [0002]
- JP 8151470 B [0002]
- US 5288764 A [0002]
- WO 2001051549 A [0002]
- KR 100701274 [0002]
- JP 2008201079 B [0002]
- JP 10119219 B [0002]
- JP 8068164 B [0002]
- JP 1261588 A [0002]
- GB 2344834 A [0002]
- GB 1161045 A [0002]
- GB 2222185 A [0002]
- GB 882296 A [0002]
- US 6066580 A [0002]
- GB 2122232 A [0002]
- JP 2215521 A [0002]
- JP 4347252 B [0002]
- JP 8199709 B [0002]
- US 4459334 A [0002]
- CH 650196 [0002]
- DE 4436429 [0002]
- EP 1754746 A [0002]
- JP 02043038 A [0002]
- JP 2004100236 B [0002]
- GB 2355024 A [0002]
- EP 1884352 A [0002]
- DE 2517095 [0002]
- DE 102005032557 [0002]
- DE 102007048801 [0002]
- RU 2352601 [0002]
- WO 66848 A [0002]

Védett expandált poli(alkilidén-tereftalát)-ok

1. Anyag, amely tartalmaz egy expandált poli(alkilidén-tereftalát)-alapú réteget (A), amely legalább egy külső réteggel (B) van bevonva, amely külső réteg legalább 50 tömeg% arányban tartalmaz egy oldószerben (beleértve a vizet) oldható szervesen kalcogén vegyületein alapuló vegyületet, amely önmaga tartalmaz egy olyan szervesen anyagot, amely az oldószer elpárolgása során és/vagy levegő hatására és/vagy vákuum hatására és/vagy nedvesség hatására és/vagy valamely komponense hatására hidegtől melegig (-10°C -tól $+80^{\circ}\text{C}$ -ig) terjedő állapotban megszilárdul (megköt, kikeményedik, kereszt kötéseket képez), és ahol a (B) réteg vegyülete kalcium-karbonát és/vagy cementalapú vegyület, gipszalapú vegyület, agyagalapú vegyület, szilikátvegyület és ezek keverékei.

2. Az 1. igénypont szerinti anyag, ahol a poli(alkilidén-tereftalát) 30 kg/m^3 és 500 kg/m^3 közötti, előnyösen 45 kg/m^3 és 120 kg/m^3 közötti, ISO 845 szerinti sűrűségűre van expandálva.

3. A 1. vagy 2. igénypont szerinti anyag, ahol az expandált poli(alkilidén-tereftalát)-alapú keverék EN 12667 szerinti hővezetőképessége $0,5\text{ W/mK}$ és $0,015\text{ W/mK}$ közötti, előnyösen $0,051\text{ W/mK}$ és $0,020\text{ W/mK}$ közötti.

4. Az 1-3. igénypontok bármelyike szerinti anyag, ahol a poli(alkilidén-tereftalát) a poli(etilén-tereftalát).

5. Az 1-4. igénypontok bármelyike szerinti anyag, ahol az expandált poli(alkilidén-tereftalát) lánchosszabbító vegyületek segítségével végzett reaktív extrudálással lett előállítva.

6. Az 1-5. igénypontok bármelyike szerinti anyag, ahol a poli(alkilidén-tereftalát) újrahasznosított/fogyasztóktól származó nyersanyagon alapul.

7. Az 1-6. igénypontok bármelyike szerinti anyag, ahol a (B) réteg pH-értéke 2-10.

8. Az 1-7. igénypontok bármelyike szerinti anyag, ahol a (B) réteg vastagsága $0,2\text{ mm}$ - 15 mm , előnyösen $0,5\text{ mm}$ - 10 mm .

9. Az 1-8. igénypontok bármelyike szerinti anyag, ahol (B) $0,5\text{ tömeg\%}$ mennyiségben tartalmaz gyulladásgátló és/vagy hidrolízisgátló szereket.

10. Az 1-9. igénypontok bármelyike szerinti anyag, ahol védelmi, megerősítési és dekorációs célból további rétegek vannak felhordva.

11. Az 1-10. igénypontok bármelyike szerinti anyag, ahol az (A) és (B) réteg között legalább egy további réteg van felhordva, amely éghetetlen vagy gyulladásgátló anyagot tartalmaz.

12. A 11. igénypont szerinti anyag, ahol az éghetetlen vagy gyulladásgátló anyag az (A) és (B) réteg közé nyitott pórusú alakban (rost, pép, háló, rács, szövetek, szövött vagy nem szövött alakban) vagy zárt alakban (fólia vagy lemez formájában), beágyazóanyagban vagy anélkül van felhordva.

13. Eljárás az 1-12. igénypontok bármelyike szerinti anyag előállítására folyamatos eljárással.

14. Eljárás a 12. igénypont szerinti anyag előállítására két lépéses extrudálási és bevonatkészítési eljárással.

15. Eljárás az 1-12. igénypontok bármelyike szerinti anyag előállítására, ahol a bevonatkészítést porlasztással, bemártással, nyomóhenger alkalmazásával és/vagy henger(ek) alkalmazásával végezzük.

16. Az 1-12. igénypontok bármelyike szerinti anyag alkalmazása hő- és/vagy hangszigetelésre és/vagy zaj- és/vagy rezgéscsillapításra.

17. Az 1-12. igénypontok bármelyike szerinti anyag alkalmazása hő- és/vagy hangszigetelésre szerkezetek, edények, tartályok és csövek, falak, födémek, padlók, tetők, medencék, csövek és csővezetékek belső és külső felületén.

18. Az 1-12. igénypontok bármelyike szerinti anyag alkalmazása építőanyagokhoz könnyűszerkezetű és/vagy energiatakarékos kivitelezéshez.