



(51) International Patent Classification:
G02B 6/00 (2006.01)

(21) International Application Number:
PCT/US2011/022041

(22) International Filing Date:
21 January 2011 (21.01.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/299,530 29 January 2010 (29.01.2010) US

(71) Applicant (for all designated States except US): **AFL TELECOMMUNICATIONS LLC** [US/US]; P.O. Box 3127, Spartanburg, South Carolina 29304-3127 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DONALDSON, Christopher** [US/US]; 321 Crestmont Way, Greenville, South Carolina 29615 (US). **KIMBRELL, Eddie** [US/US]; 929 Autumn Glen Way, Dacula, Georgia 30019 (US). **LICHOULAS, Ted** [US/US]; 505 Spring Lake Loop, Simpsonville, South Carolina 29681 (US). **MARCHEK, Kyle** [US/US]; 222 Rock Road, Greer, South Carolina 29651 (US).

(74) Agents: **PELLEGRINI, Carl J.** et al.; Sughrue Mion, PLLC, 2100 Pennsylvania Avenue, NW, Suite 800, Washington, District of Columbia 20037-3213 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

[Continued on next page]

(54) Title: HIGH FIBER COUNT PACKAGE FOAM INSERT

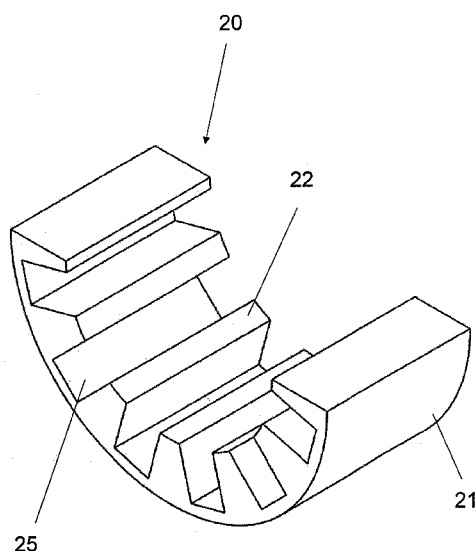


FIGURE 1

(57) Abstract: Provided is a fiber packaging module that contains a plurality of fiber optic connectors. The module includes an outer shell containing a plurality of fiber optic connectors connected to respective fiber optic cables. The module also includes a body comprised of a low density material disposed within the outer shell, the body having an outer side surface and an inner side surface. Also, a plurality of receiving portions are formed on the body to hold the fiber optic connectors.



— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

HIGH FIBER COUNT PACKAGE FOAM INSERT

CROSS-REFERENCE TO RELATED APPLICATIONS

[01] This application claims the benefit of U.S. Provisional Patent Application No. 61/299,530 filed on January 29, 2010 in the U.S. Patent and Trademark Office, the disclosure of which is incorporated herein in its entirety by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[02] Methods and apparatuses consistent with aspects of the present invention relate to a foam insert for use with a high fiber count package.

2. Background of the Invention

[03] As telecommunications and enterprise service providers upgrade their systems from copper trunks to fiber optic trunks to improve data transmissions rates, it is necessary to replace the copper backbones with fiber optic backbones in central offices and data centers or install fiber optic backbones in new central offices and data centers. As part of this upgrade process, High Fiber Count (HFC) fiber optic cable assemblies (fiber optic cable trunks with more than 12 optic fibers which are broken out into individual connectors on one or both ends) are used to build this fiber optic backbone. The break-out end of these High Fiber Count (HFC) fiber optic

cables consist of numerous individual fibers terminated with fiber optic connectors which are bulky and difficult to package efficiently and compactly. In the related art, a flexible tube may be fitted over the bundled connectors by heat shrinking the tube or by utilizing cable ties. This methodology makes it difficult to route the cable in ducts, wireways, and in panels due to its size. As a result, installers often will remove this packaging before attempting to install the High Fiber Count (HFC) cable. This creates a risk of damaging the product. Additionally, this packaging methodology makes it difficult to open and reseal this packaging when inspecting and testing fiber optic connectors prior to installation in order to prevent the installation of damaged cables and project delays.

SUMMARY OF THE INVENTION

[04] This invention is related to U.S. Patent Application No. 61/147,265 and PCT/US2010/022037 [High fiber count packaging capsule](the disclosure of which is incorporated herein in its entirety by reference) in which fiber optic connectors are held in the packaging case in a pocket and retained with a snap-in C-clip. It is also related to U.S. Patent Application No. 61/227,223 and PCT/US2010/042735 (the disclosure of which is incorporated herein in its entirety by reference) in which fiber optic connectors are held in the resealable packaging case using an interior snap feature.

[05] It is an aspect of the present invention to provide an improved apparatus and the method to secure individual fiber optic connectors in a housing, such as the fiber packaging modules described in the two patent

applications cited above. More specifically, it is an aspect of the present invention to provide a foam insert (or any low density compressible material) that is installed into the housings. The foam insert is configured with a multiple holes or slots for receiving at least one individual connector in each hole or slot. The compression of the foam insert enables the insert to grip the connector. By using a compressible low density material, the connector may then be removed and reinserted easily to facilitate inspection.

[06] According to one aspect, an insert for holding a connector is provided and includes a body comprised of a low density material wherein the body has an outer side surface and an inner side surface. The body includes a plurality of receiving portions that are configured to receive and hold connectors. The receiving portions may be formed in the inner side surface. Also, the receiving portions may be formed as a rectangular or square slot extending a length of the insert.

[07] According to another aspect, each receiving portion of the insert comprises a lower slot portion having a width different than an upper slot portion. The lower slot portion may be configured with a width less than an upper slot portion wherein the lower slot portion defines a bottom of the receiving portion.

[08] According to another aspect each receiving portion may comprises a cavity extending along a length direction of the foam insert. The cavity may be configured as a through hole extending through the foam insert.

[09] According to another aspect, a fiber packaging module that contains a plurality fiber optic connectors is provided. The module includes an outer shell containing the plurality of fiber optic connectors which are connected to respective fiber optic cables. The module also is fitted with a body comprised of a low density material that is disposed within the outer shell, the body having an outer side surface and an inner side surface. A plurality of receiving portions are formed on the body that hold the fiber optic connectors.

[10] The receiving portions are formed in the inner side surface and may be formed as a rectangular or square slot extending a length of the body.

[11] According to another aspect, each receiving portion may comprise a lower slot portion having a width different than an upper slot portion. These slots may be configured such that the lower slot portion has a width less than the upper slot portion wherein the lower slot portion defines a bottom of the receiving portion.

[12] According to another aspect, each receiving portion may comprise a cavity extending along a length direction of the body and the cavity may be configured as a through hole extending through the body.

[13] According to another aspect, a method for packaging a plurality of fiber optic cable connectors is provided. The method includes providing an insert having a body comprised of a low density material, the body having an outer side surface and an inner side surface and a plurality of receiving portions formed on by body that are configured to receive and hold

connectors. A plurality of connectors is placed into the receiving portions of the insert and the insert is placed into a fiber packaging module. These operations may be performed in this order or any other order.

BRIEF DESCRIPTION OF THE DRAWINGS

[14] The above and/or other aspects of the invention will become apparent and more readily appreciated from the following description of the exemplary embodiments, taken in conjunction with the accompanying drawings in which:

[15] FIG. 1 is a perspective view showing a foam insert according to a first exemplary embodiment;

[16] FIG. 2 is a perspective view of the foam insert of FIG. 1 having a plurality of optical fiber connectors inserted therein;

[17] FIG. 3 is a perspective view a foam insert according to second exemplary embodiment;

[18] FIG. 4 is a perspective view showing a foam insert according to a third exemplary embodiment;

[19] FIG. 5 is perspective view of a fiber packaging module;

[20] FIG. 6 is a perspective view of the fiber packaging module having a plurality of foam inserts installed therein; and

[21] FIG. 7 is a perspective view of the fiber packaging module of FIG. 6 having fiber optic connectors inserted into slots of the foam insert.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[22] Hereinafter the non-limiting exemplary embodiments of the present invention will be described in detail with reference to the accompanying drawings.

[23] The first exemplary embodiment is shown in FIGS. 1 and 2. FIG. 1 shows a foam insert 20 made of a foam material. While the material in this embodiment is described as a foam or foam material, any other low density compressible material having compressibility that enables it to conform to and hold a connector may be used. Also, by using a low density material, the amount of deformation permitted by the foam insert 20 is large enough to enable the foam insert 20 to receive and hold fiber optic connectors 30 of different shapes and sizes.

[24] The foam insert 20 has an outer side surface 21 that is configured to be fitted into and received by a fiber packing module 10 (see FIG. 5). In this embodiment, the outer side surface 21 has a cylindrical shape having a cross section of a half circle. The inside surface 22 is formed with multiple slots 25, each slot 25 configured to receive and hold a fiber optic connector 30 via compression. In the embodiment shown in FIG. 1, each slot 25 has a rectangular or square cross section that is sized smaller than the fiber optic connector 30 it is to receive and hold. However, the foam insert 20 may be formed to have a cross section of a full circle. The shape of the outer side surface 21 is not limited to that of a cylinder or circular cross section. The shape of the outer side surface is generally configured to fit the inside surface of the fiber packaging module 10 into which it is placed.

[25] FIG. 2 shows a fiber optic connector 30 inserted into each slot 25. As illustrated, the compressibility of the foam insert enables the slots 25 to conform to the outer surface of the fiber optic connector 30 to hold the connector. While each fiber optic connector 30 shown in FIG. 2 is of the same type (i.e., SC or LC), fiber optic connectors 30 of different shapes may be placed in different slots 25.

[26] A foam insert 40 of a second embodiment is shown in FIG. 3. This foam insert 40 has similar material characteristics as the first embodiment described above. However, this foam insert 40 is configured with multiple through holes 45 that extend into the foam insert between an outer side surface 41 and an inner side surface 42. The through holes 45 may extend through the full length of the foam insert 40, or alternatively, only through a portion thereof. The through holes 45 are sized to be at least slightly smaller than the fiber optic connectors 30 they are intended to receive. This ensures the fiber optic connectors 30 remain in the foam insert 40.

[27] The shape of the outer side surface 41 is generally configured to fit the inside surface of the fiber packaging module 10 into which it is placed.

[28] FIG. 4 shows a third embodiment of a foam insert 50. This embodiment has most of the characteristics of the first embodiment but includes an alternative slot configuration. In particular, the slot 55 is configured to have a lower slot portion 56 having a width different than an upper slot portion 57. In this case, the width of the lower slot portion 56 is

less than the width of the upper slot portion 57. Due to this configuration, each slot 55 may hold multiple fiber optic connectors 30. For example, an LC connector may be placed in the lower slot portion 56 and an SC connector may be placed in the upper slot portion 57. Because an LC connector has a width that is less than an SC connector, this slot configuration enables the slot 55 to conform to and be compressed by each of the fiber optic connectors 30. In other words, by having the narrower portion, even when an SC connector is inserted into a slot to thereby expand the width of the slot, the narrow portion is still narrower than the width of an LC connector.

[29] FIG. 6 shows a fiber packaging module 10 having multiple foam inserts 20 placed therein. While four foam inserts 20 are shown in the figure, more foam inserts 20 may be placed in the fiber packaging module 10. Also, FIG. 6 shows a foam insert 20 of the first embodiment. However, any of the foam inserts 20, 40, 50 may be inserted in a fiber packing module in any combination thereof. FIG. 7 shows a packaging module 10 having fiber optic connectors 30 inserted in the foam insert 20. Any combination of the foam insert embodiments disclosed herein may be used within a single packaging module. The foam inserts described herein may be fitted into the fiber packaging module 10 by compression or they may be attached to the module using an adhesive 60 or double sided tape.

[30] The fiber packaging module 10 may be assembled by placing the foam inserts 20, 40, 50 into the module before the fiber optic connectors

are inserted into the foam inserts, or alternatively, after the fiber optic connectors are inserted into the foam inserts.

[31] Although a few exemplary embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in this embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents. Additionally, while the foam inserts described above for use with fiber optic connectors, the invention is not so limited. Rather, the foam inserts may be used with wires or any other type of connector, such as an electrical connector.

What is claimed is:

1. An insert for holding a connector, the insert comprising:
a body comprised of a low density material, the body having an outer side surface and an inner side surface;
a plurality of receiving portions formed on by body that are configured to receive and hold connectors.
2. The insert for holding a connector according to claim 1, wherein the receiving portions are formed in the inner side surface.
3. The insert for holding a connector according to claim 2, the receiving portions are formed as a rectangular or square slot extending a length of the insert.
4. The insert for holding a connector according to claim 2, wherein each receiving portion comprises a lower slot portion having a width different than an upper slot portion.
5. The insert for holding a connector according to claim 4, wherein the lower slot portion has a width less than an upper slot portion, the lower slot portion defining a bottom of the receiving portion.

6. The insert for holding a connector according to claim 1, wherein each receiving portion comprises a cavity extending along a length direction of the foam insert.

7. The insert for holding a connector according to claim 6, wherein the cavity is a through hole extending through the foam insert.

8. A fiber packaging module that contains a plurality fiber optic connectors, the module comprising:

an outer shell containing a plurality of fiber optic connectors connected to respective fiber optic cables;

a body comprised of a low density material disposed within the outer shell, the body having an outer side surface and an inner side surface;

a plurality of receiving portions formed on the body that hold the fiber optic connectors.

9. The fiber packaging module according to claim 8, wherein the receiving portions are formed in the inner side surface.

10. The fiber packaging module according to claim 9, the receiving portions are formed as a rectangular or square slot extending a length of the body.

11. The fiber packaging module according to claim 9, wherein each receiving portion comprises a lower slot portion having a width different than an upper slot portion.

12. The fiber packaging module according to claim 11, wherein the lower slot portion has a width less than an upper slot portion, the lower slot portion defining a bottom of the receiving portion.

13. The fiber packaging module according to claim 8, wherein each receiving portion comprises a cavity extending along a length direction of the body.

14. The fiber packaging module according to claim 13, wherein the cavity is a through hole extending through the body.

15. A method for packaging a plurality of fiber optic cable connectors, the method comprising:

providing an insert having a body comprised of a low density material, the body having an outer side surface and an inner side surface and a plurality of receiving portions formed on by body that are configured to receive and hold connectors;

placing a plurality of connectors into the receiving portions of the insert; and

placing the insert into a fiber packaging module.

1/7

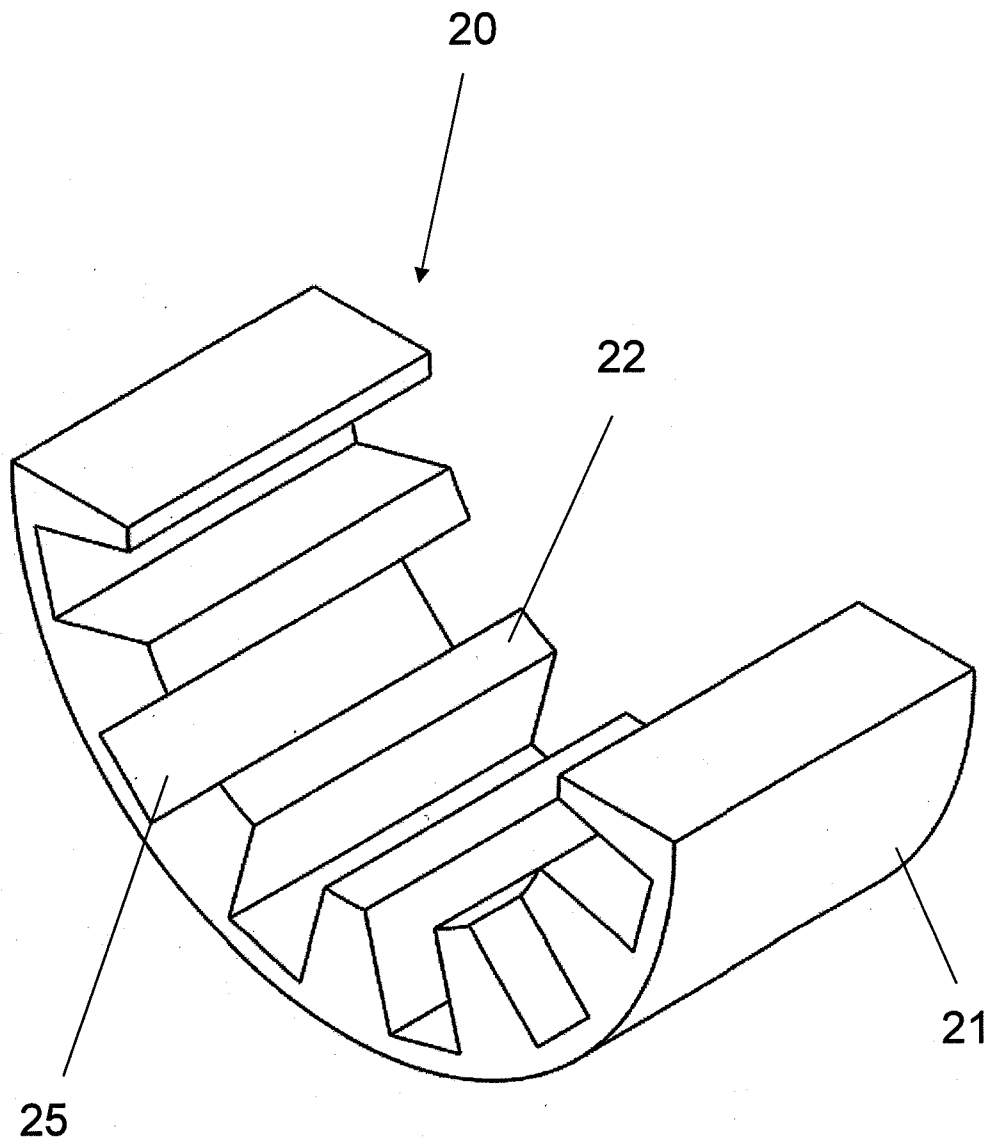


FIGURE 1

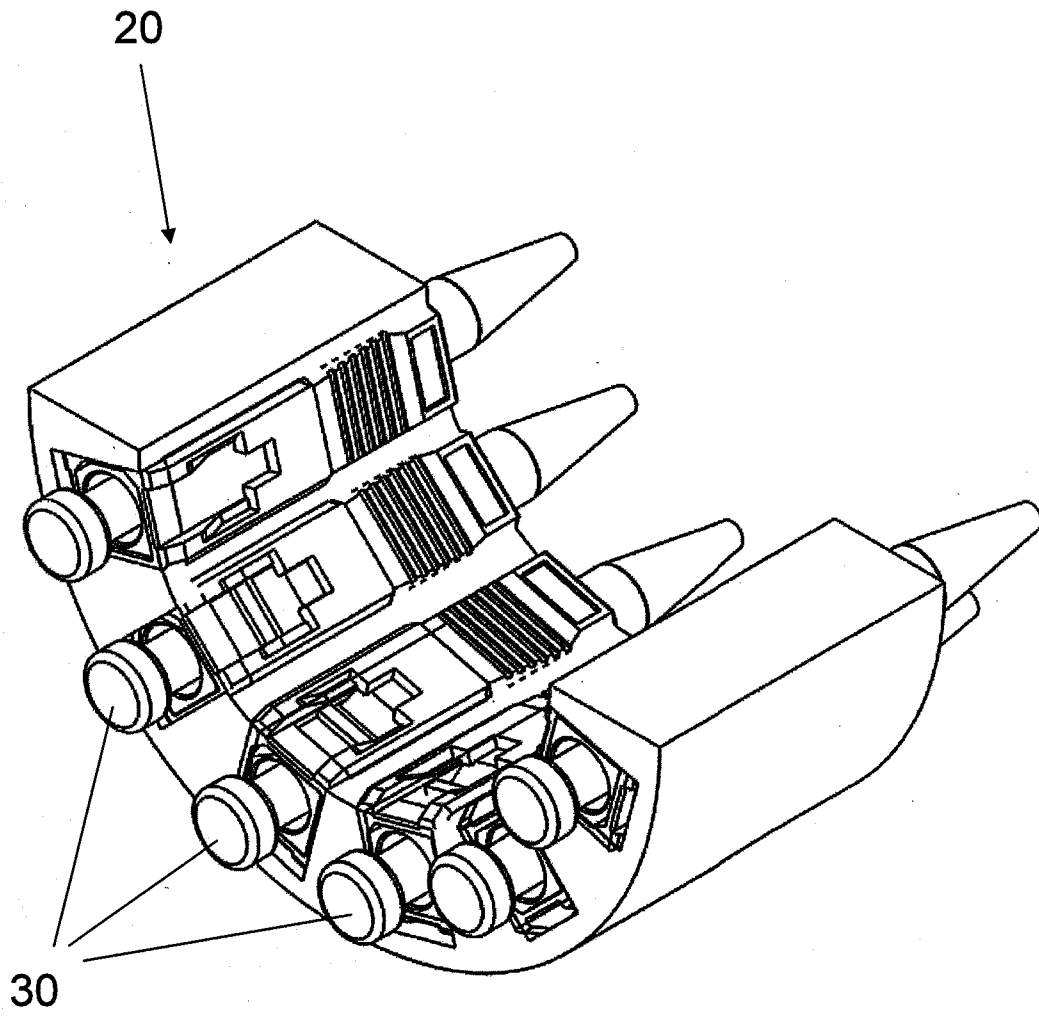


FIGURE 2

3/7

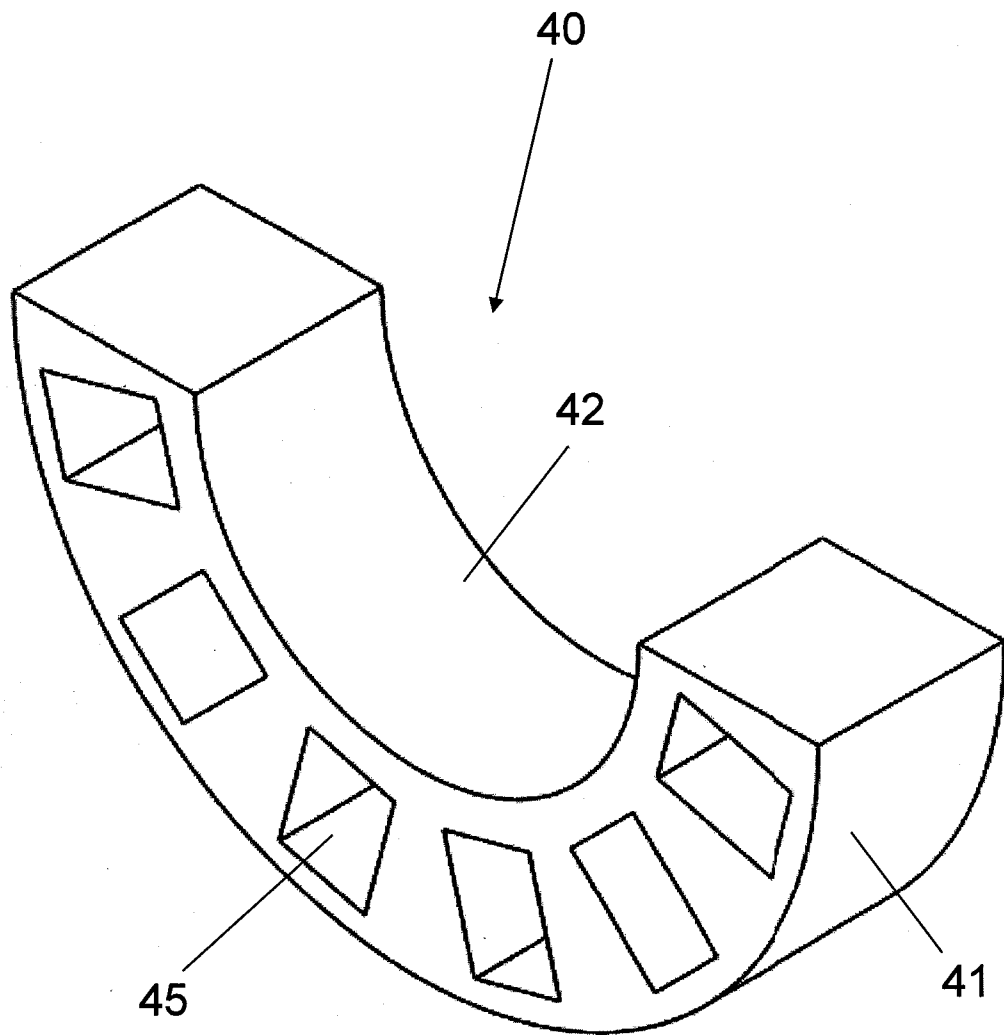


FIGURE 3

4/7

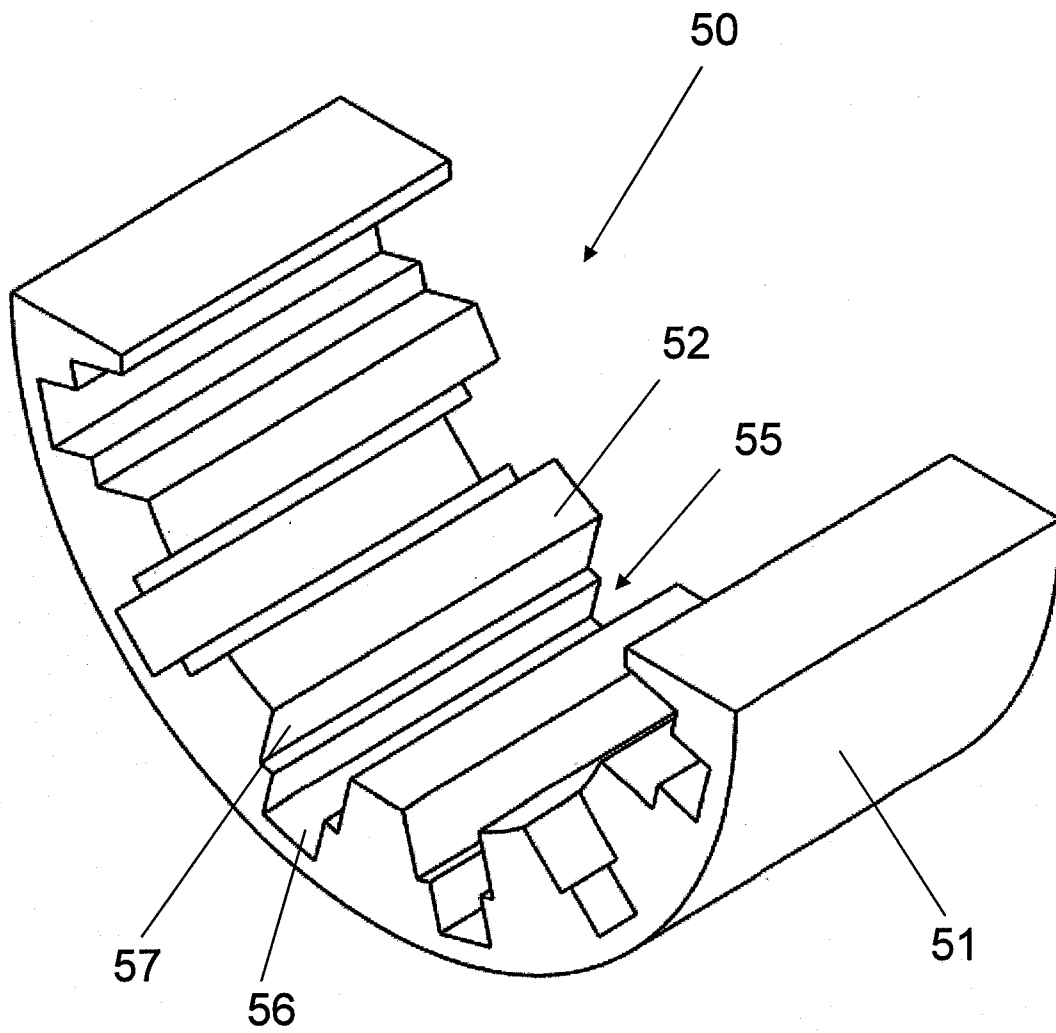


FIGURE 4

5/7

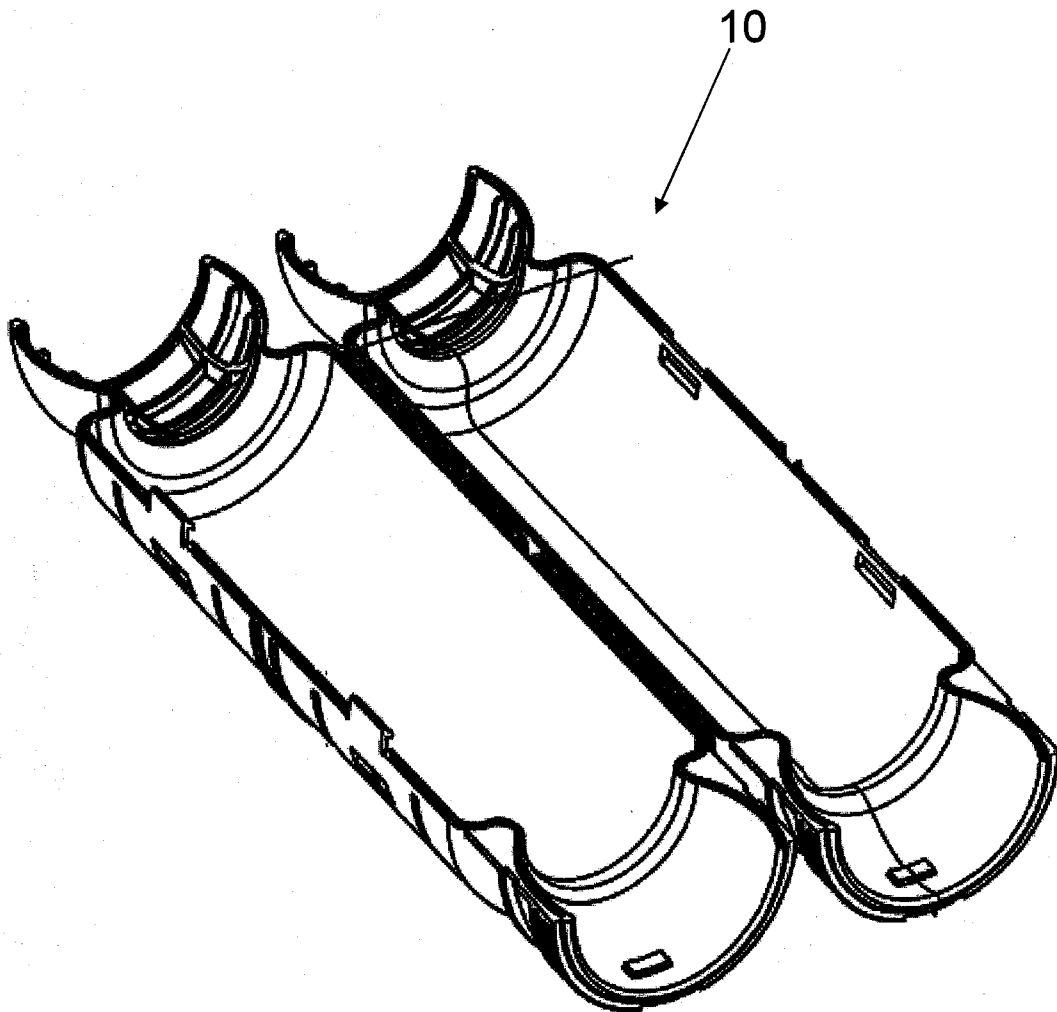


FIGURE 5

6/7

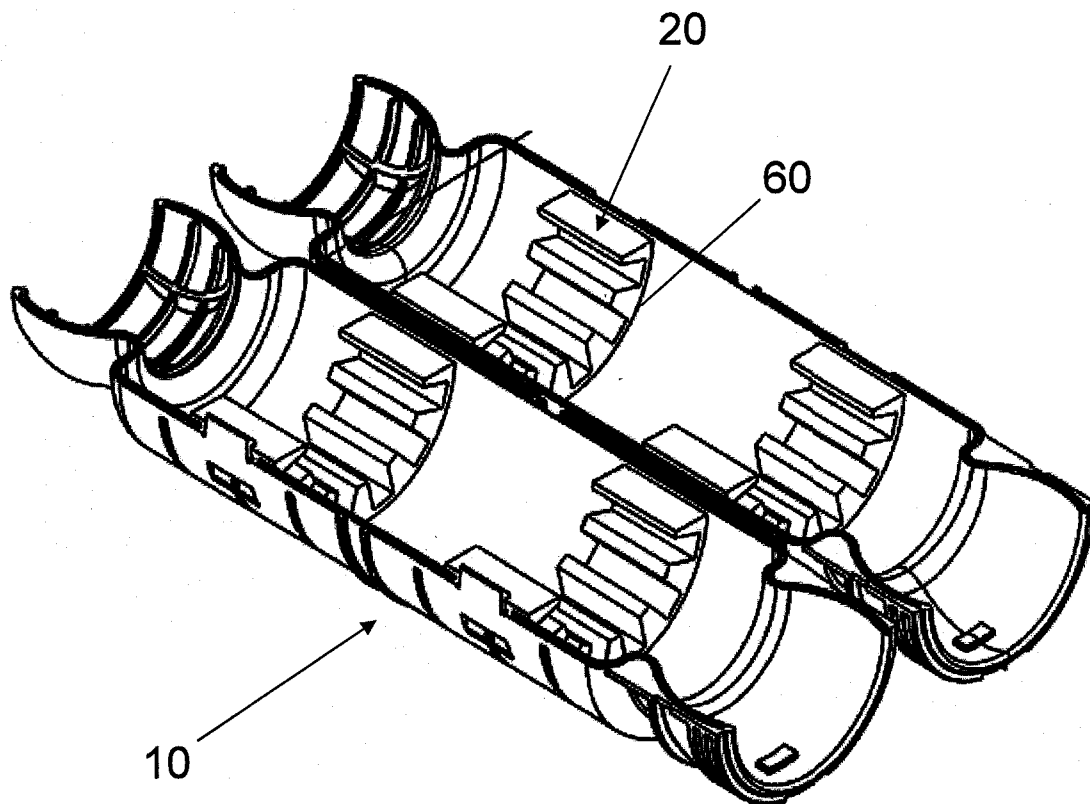


FIGURE 6

7/7

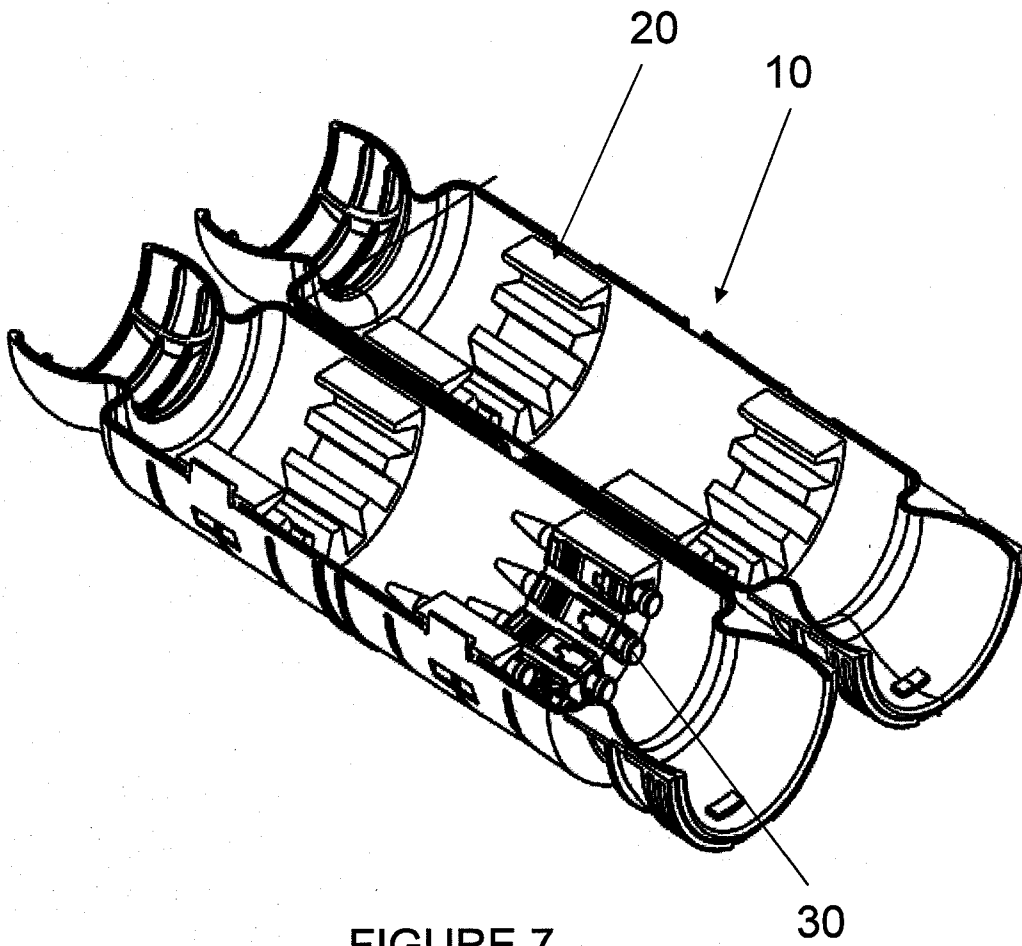


FIGURE 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 11/22041

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G02B 6/00 (2011.01)

USPC - 385/137

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC: 385/137; IPC: G02B 6/00 (2011.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
385/134, 135, 137, 139, G02B6/00, G02B\$ (keyword limited: see terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST (PGPB, USPT, EPAB, JPAB); Google (Patents and Scholar)

Search Terms: Insert, bed, packag\$, implant, holder, HFC, High, fiber, optical, cable, foam, low, density, connector, clamp, joint, junction, coupling, surface\$, face\$, facet, Side\$, top, inner, outer

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008/0298764 A1 (Bloodworth et al.) 04 December 2008 (4.12.2008), entire document, especially Fig 1-2 and para [0016]-[0041]	1-15
Y	US 4,887,405 A (Nickerson) 19 December 1989 (19.12.1989), entire document, especially Fig 1 and col 1, ln 55-60	1-7, 10, 15
Y	US 6,567,601 B2 (Daoud et al.) 20 May 2003 (20.05.2003), entire document, especially abstract and col 2, ln 55-63	5, 12
Y	US 3,288,916 A (Koon) 29 November 1966 (29.11.1966), entire document, especially Fig 2 and col 2, ln 1-33	8-14
A	US 20090285541 A1 (KOWALCZYK et al.) 19 November 2009 (19.11.2009), entire document especially Fig 1	1-15
A	US 6,810,195 B2 (Bhagavatula et al.) 26 October 2004 (26.10.2004), entire document, especially Fig 1 and 4	1-15
A	US 5,530,786 A (Radcliff et al.) 25 June 1996 (25.06.1996), entire document, especially Fig 2 and 4	1-15
A	US 5,805,758 A (Kim) 08 September 1998 (08.09.1998), entire document, especially Fig 1C and 2B	1-15
A	US D568,723 S (Morgan) 13 May 2008 (13.05.2008), entire document, especially Fig 1 and 2-7	1-15

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 march 2011 (15.03.2011)

Date of mailing of the international search report

28 MAR 2011

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 11/22041

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009/0034918 A1 (Caldwell et al.) 05 February 2009 (05.02.2009), entire document	1-15
A	US 7,394,963 B2 (Hartlef) 01 July 2008 (01.07.2008), entire document, especially abstract, Fig 1-2, col 1, ln 55-col3, ln43	1-15