

(12) UK Patent Application (19) GB (11) 2 416 662 (13) A

(43) Date of A Publication 08.02.2006

(21) Application No: 0417068.4

(22) Date of Filing: 30.07.2004

(71) Applicant(s):
C B Kaymich & Company Limited
(Incorporated in the United Kingdom)
Leigh Street, SHEFFIELD, S9 2PR,
United Kingdom

(72) Inventor(s):
Lawrence Fowles

(74) Agent and/or Address for Service:
Harrison Goddard Foote
Fountain Precinct, Balm Green,
SHEFFIELD, S1 2JA, United Kingdom

(51) INT CL:
A24D 3/02 (2006.01)

(52) UK CL (Edition X):
A2C CGJB C617

(56) Documents Cited:
US 20030224918 A

(58) Field of Search:
UK CL (Edition W) **A2C**
INT CL⁷ **A24B, A24D**
Other:

(54) Abstract Title: **Apparatus for applying an additive to cigarette filter tow material**

(57) Apparatus for applying an additive to cigarette filter tow material which is in, or exiting, a filter tow funnel (6), the apparatus comprising:
a flavour inlet (12);
a valve; and
a hollow needle (13) positioned downstream of at least a portion of said filter tow funnel, the needle being in fluid communication controlled by said valve with said flavour inlet,
whereby, in use, a flavouring is delivered by said needle into the path of said filter tow material.

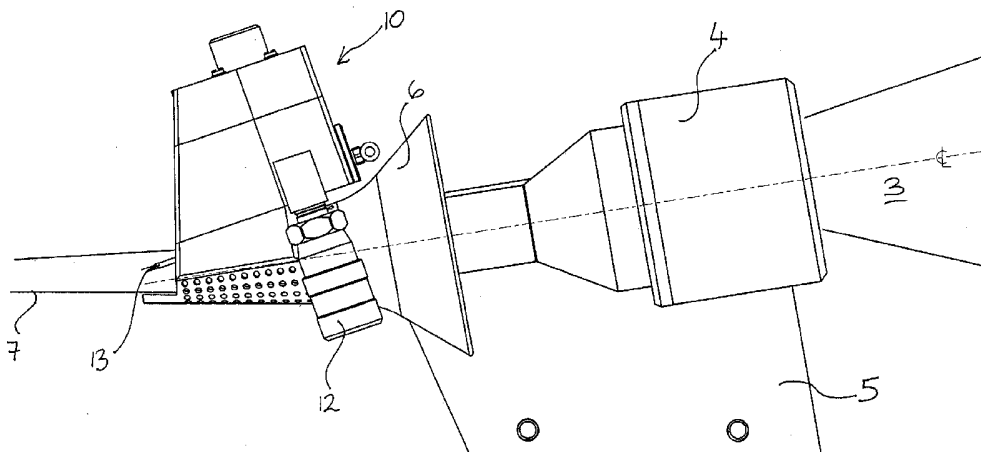


FIGURE 2

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

This print takes account of replacement documents submitted after the date of filing to enable the application to comply with the formal requirements of the Patents Rules 1995

Original Printed on Recycled Paper

GB 2 416 662 A

1/8

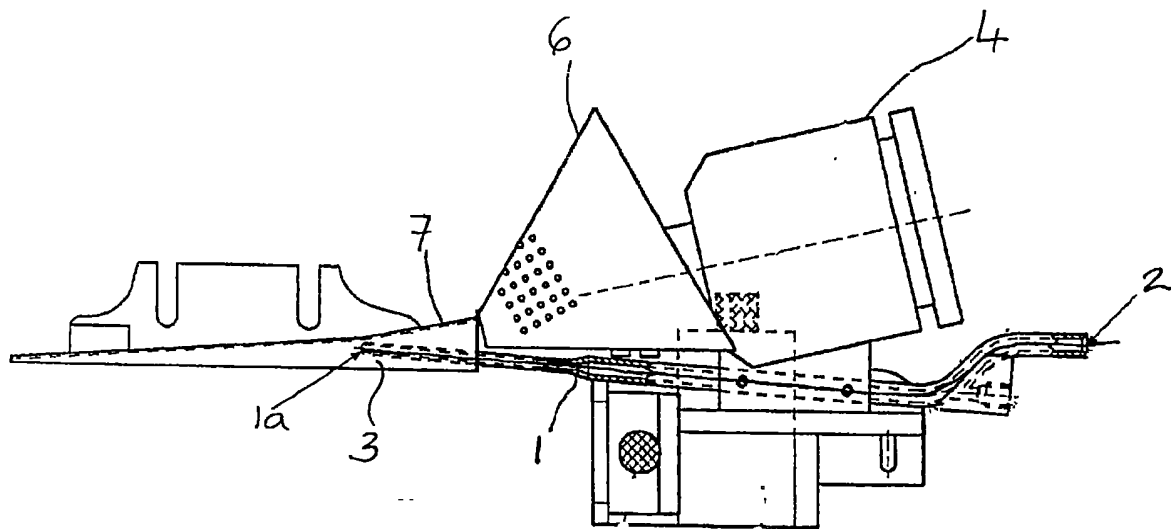


FIGURE 1
(PRIOR ART)

2/8

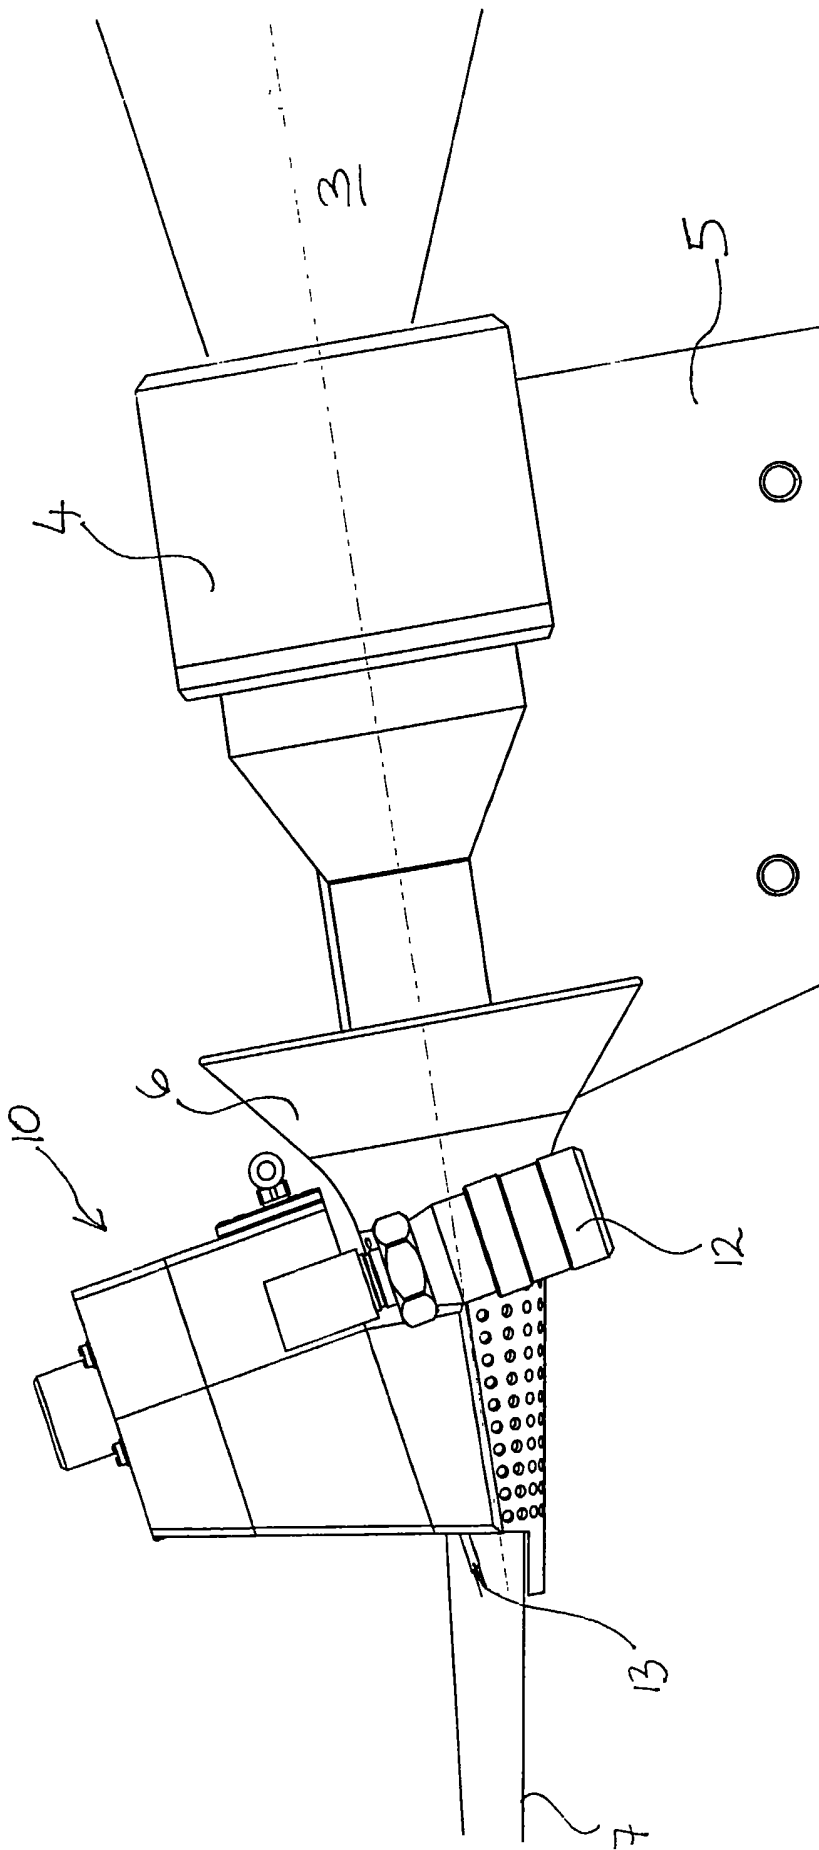


FIGURE 2


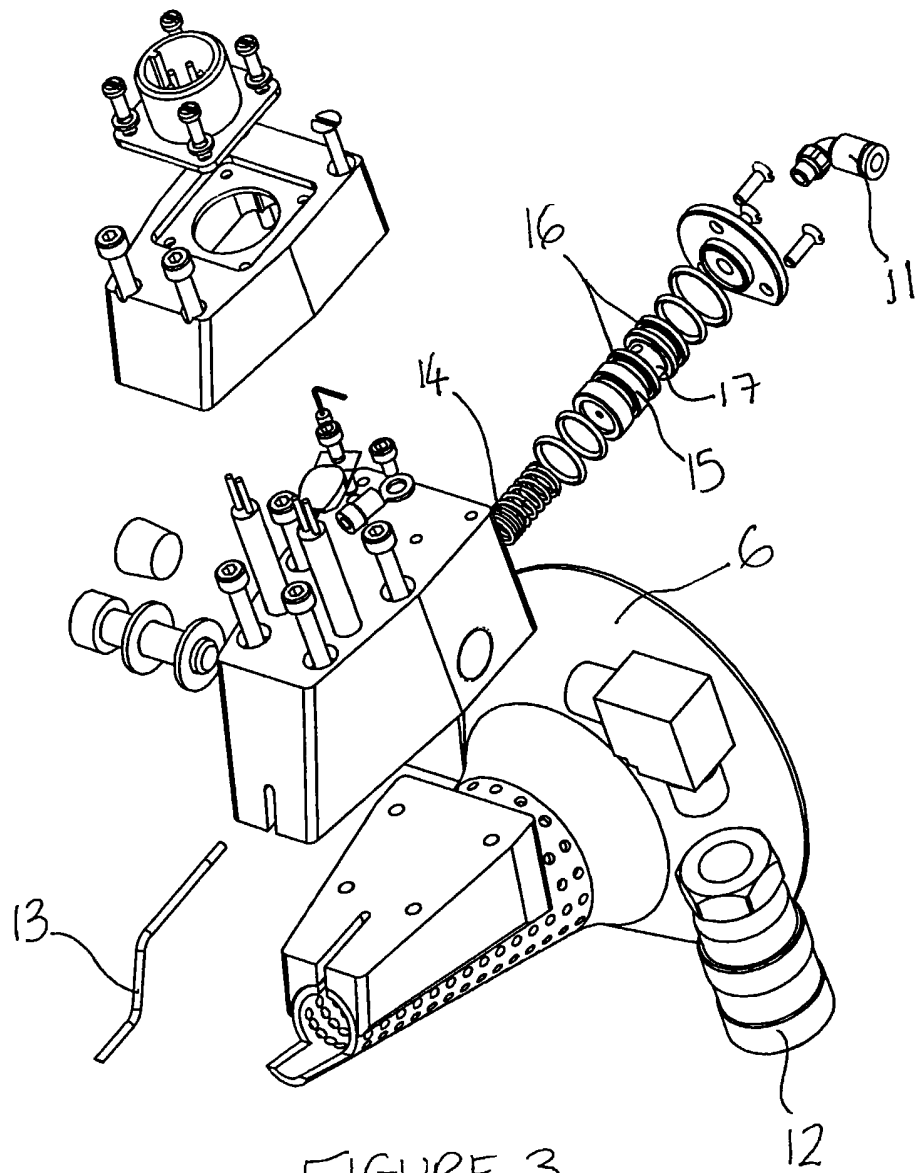


FIGURE 3

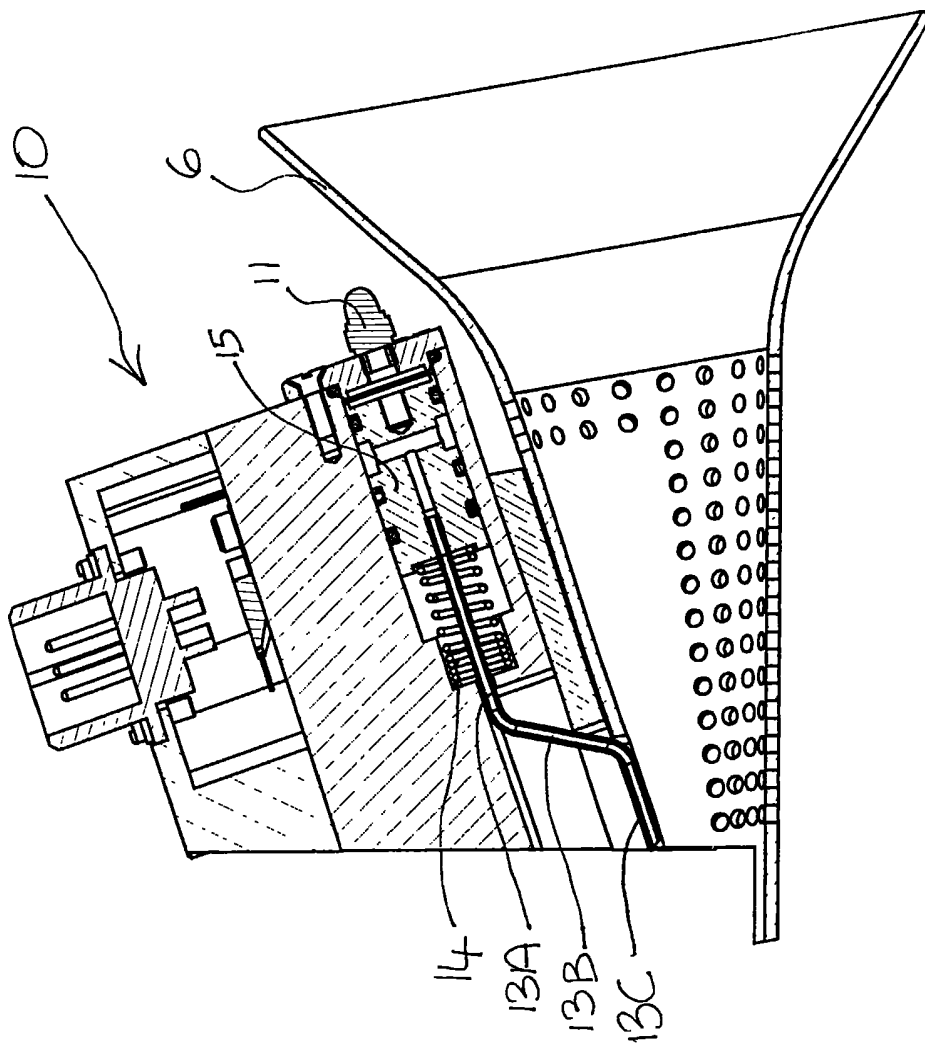

5/8


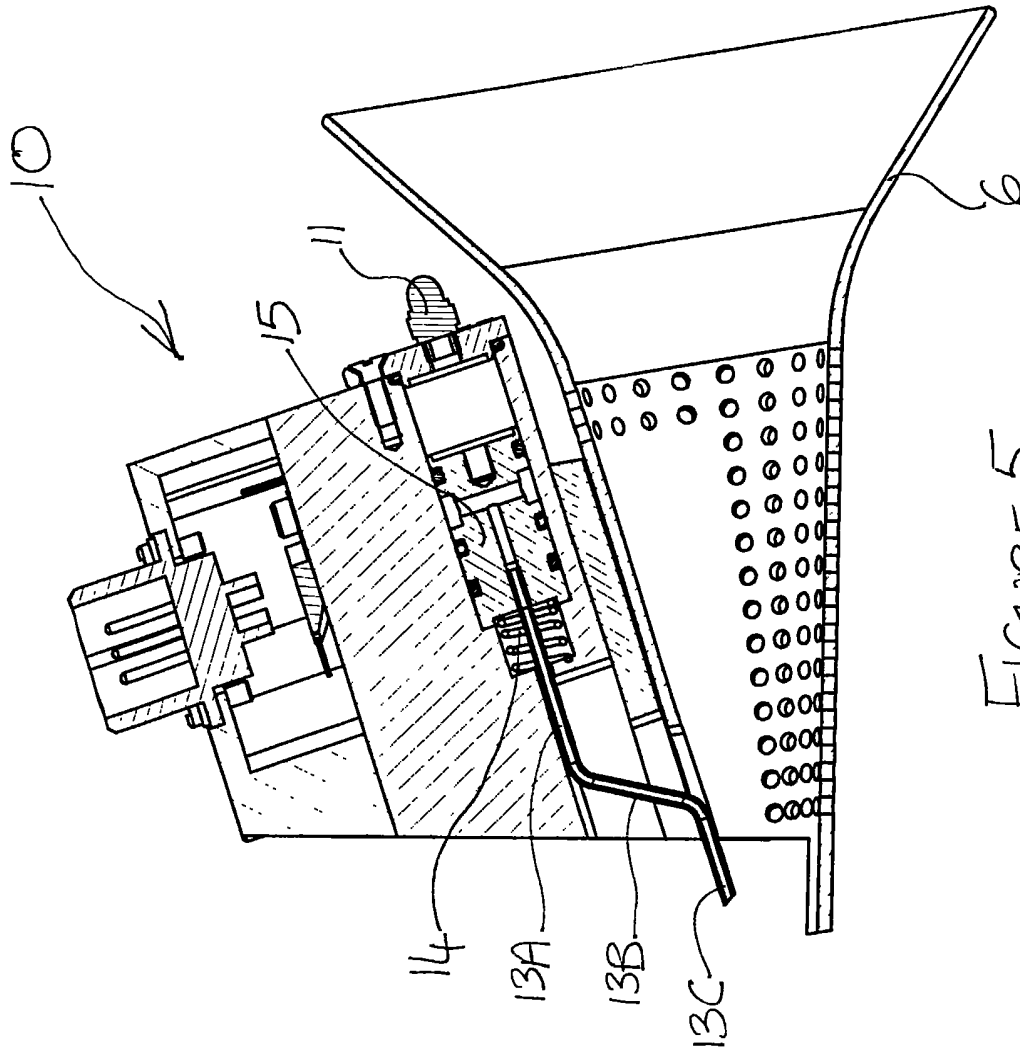


FIGURE 5

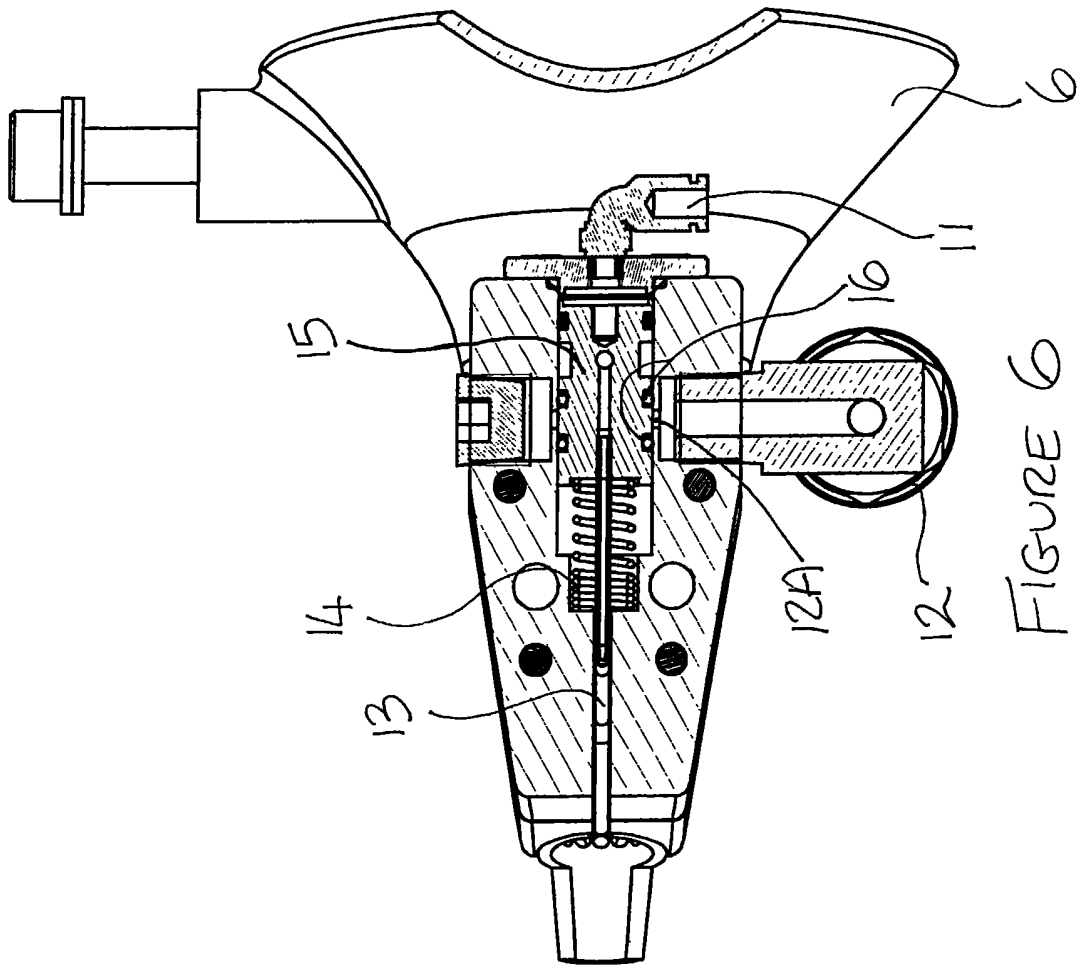

7/8


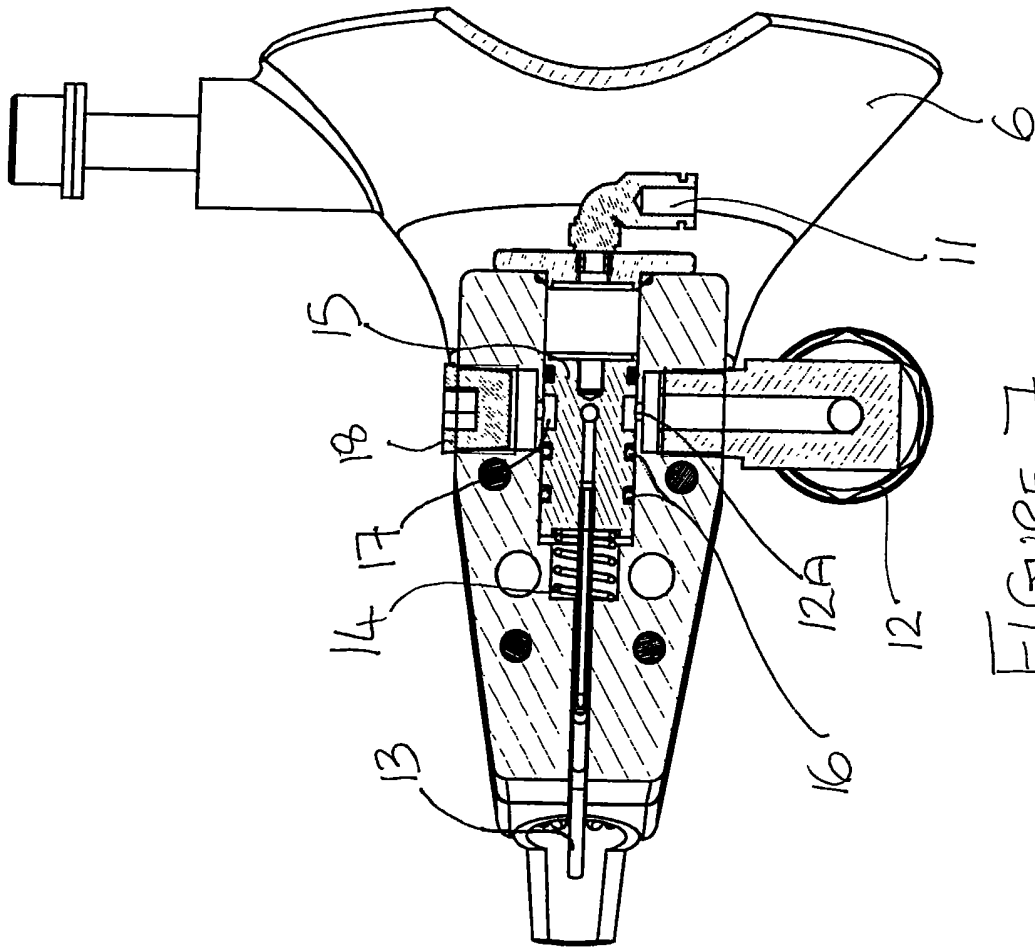


FIGURE 7

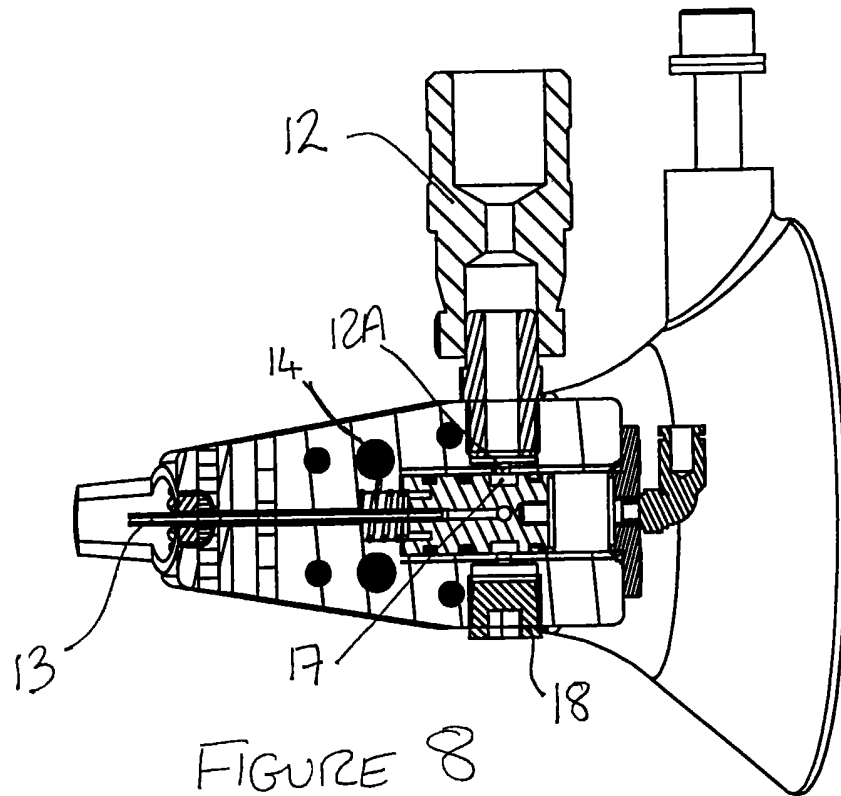

ADDITIVE APPLICATOR

This invention relates to the field of apparatus and methods for applying an additive to a cigarette filter and to cigarettes incorporating such filters.

Although the present invention is described with reference to the addition of flavouring to a cigarette filter, the invention is equally relevant to the application of other additives, for example those which may affect the burn characteristics of the cigarette.

Several methods are known of adding flavouring to cigarette filters. GB 1342931 (British-American Tobacco Limited) describes a method of injecting additives using a needleless injection technique known from the medical field.

GB2229078 (Rothmans International Tobacco UK Limited) describes a method of applying flavour or additive to one or more faces of the wrapping paper which contains the filter material ("tow"). This has the disadvantage of the flavour being located at the surface of a barrier (the paper) which prevents distribution of the flavour within the filter material.

WO 02/069745 (Philip Morris Products, Inc) describes a cigarette having a multi-component filter, one part of which comprises a flavour-releasing segment. This arrangement is relatively complex and therefore expensive to manufacture.

GB2236656 (Rothmans International Tobacco UK Limited) describes a process for producing a flavoured cigarette filter, in which a carrier is impregnated with a liquid

flavour concentrate. It is suggested that the flavour concentrate, in the form of solid granules should be mixed into the tow, which is then used in conventional fashion to make cigarette filters. Little further
5 technical detail of how the granules are mixed with the tow, in practice, is described in the patent application and various technical difficulties are envisaged. For example, typically, the filter-making apparatus would be used for manufacturing both flavoured and non-flavoured
10 filters. Loose flavoured granules are likely to contaminate the apparatus, which will then require cleaning before non-flavoured filters or differently-flavoured filters can be manufactured. Furthermore it is difficult to regulate the dose of flavour being
15 introduced into any particular length of finished filter rod.

With reference to Figure 1, US2003/0224918A1 (Philip Morris USA Inc) attempts to mitigate these problems by
20 providing a filter making apparatus in which the flavour is more precisely positioned within the tow material. There is provided a positioning device 1 with a passageway therethrough into which liquid flavourant is supplied. A continuous strand of textile material 2 is
25 guided through the passageway so that it becomes saturated with the flavourant. A portion of the positioning device 1a then guides the continuous strand of textile material into the path of filter tow material 3 that is being converged around it, as it exits tow
30 funnel 6 into tongue 7, to form a cigarette filter rod.

The finished filter therefore comprises compressed filter tow material surrounding an approximately centrally-placed strand of flavoured textile material. The
35 positioning and accuracy of the dose of the flavour is

thus improved, compared with the prior art methods described above.

However, the method described in US2003/0224918A1 suffers
5 from several potential disadvantages:

- the flavoured textile strand is visible in the finished product, which may lead the smoker to view this as a flaw;
- 10 • there is a possibility that the smoker may dislodge the strand from the filter during inhalation;
- the dose of flavour which can be applied is limited by the absorbency characteristics of the textile strand;
- 15 • it is undesirable to place anything (such as the positioning device) in the path of the forward-moving tow material because of the risk of impeding or disrupting its flow, leading to defective product.

20 It is therefore an object of the present invention to provide a method and apparatus for applying a liquid additive to a filter which seeks to alleviate the above-described disadvantages.

25 According to a first aspect of the invention there is provided apparatus for applying an additive to cigarette filter tow material which is in, or exiting, a filter tow funnel, the apparatus comprising:

- a flavour inlet;
- 30 a valve; and
- a hollow needle positioned downstream of at least a portion of said filter tow funnel, the needle being in fluid communication controlled by said valve with said flavour inlet,
- 35 whereby, in use, an additive is delivered by said

needle into the path of said filter tow material.

5 The use of a needle to apply the additive to the tow material enables the additive to be placed precisely within the tow, preferably as close to the centre line of the moving tow as possible. In this way, the additive is fully enclosed by the tow moving around it and the additive can be evenly and cleanly incorporated into the tow material. The risk of other apparatus in the
10 production line being contaminated by the additive is minimised as the additive is fully enclosed within the needle or other parts of the apparatus of the invention throughout, until being delivered into the heart of the tow material.

15 Contrary to the expectation that it would be undesirable to place anything in the path of the moving tow, the use of the needle does not adversely affect the flow of the tow.

20 The prior art disadvantages associated with the use of a flavoured textile strand are eliminated.

25 Preferably, the needle is selectively moveable along a longitudinal axis between a forward position, in which at least the distal end of the needle is in the path of the filter tow material, and a retracted position, in which said needle is not in the path of said tow material. The option of retracting the needle enables operators to work
30 on the apparatus, for example during setting-up procedures, without risk of needle stick injury. Correspondingly, the needle itself is protected from damage when in the retracted position.

35 Preferably, said longitudinal axis is substantially

parallel with a tapered inner surface of said tow funnel. The tapered inner surface of the tow funnel determines and guides the path of the moving tow material. Moving the needle into the tow along an axis substantially
5 parallel with the inner surface of the tow funnel, or preferably substantially parallel to the centre line of the flow path of said tow, allows the needle to enter the tow at an angle which minimises disruption to the flow path, both upon entry of the needle and when in use with
10 the tow flowing around the needle.

Preferably, said needle is selectively moveable between said forward and retracted positions by said valve which is preferably pneumatically-operated.

15

Preferably, the orifice at the distal end of the needle is in the range 0.5mm-1.0mm.

In a preferred form, the apparatus further comprises
20 heating means. Heating means can be used to ensure the additive remains in a liquid state during its passage through the apparatus.

Preferably, said additive is provided in solid form and
25 melted into a liquid during passage through the apparatus.

Preferably, the delivery of additive to the flavour inlet is regulated by additive metering means. Use of the
30 needle in combination with additive metering means enables a carefully controlled dose of additive to be supplied, taking into account the speed of the tow, the desired strength of dose, the size of the needle orifice and other factors.

35

Preferably, the passage of additive from the flavour inlet to the needle is controlled by said valve.

Ideally, said valve is provided with one or more O-ring
5 seals.

In a preferred embodiment, said additive is a flavour.

According to a second aspect of the invention, there is
10 provided a method of applying additive to a cigarette filter, comprising the steps of:

providing apparatus as described in any of the preceding paragraphs;

supplying an additive to said flavour inlet;

15 actuating said valve so as to move said valve and said needle into the forward position, into the path of tow material which is in, or exiting a tow funnel;

delivering additive via said needle into the
20 tow.

Preferably, the method further comprises the step of heating all or part of the apparatus to ensure the additive is in liquid form.

25

According to a third aspect of the invention, there is provided a cigarette filter manufactured according to the method of or using apparatus as described in any of the preceding paragraphs.

30

According to a fourth aspect of the invention, there is provided a cigarette incorporating a filter as claimed described in the preceding paragraph.

35

Preferred embodiments of the present invention will now be more particularly described, by way of example only, with reference to the accompanying drawings in which:

5 Figure 1 (PRIOR ART) is a side elevation view of part of the apparatus of US2003/0224918A1;

Figure 2 is a side elevation view of the apparatus embodying the first aspect of the present invention;

10

Figure 3 is an exploded view of part of the apparatus;

Figure 4 is a cross-sectional side view of part of Figure 2, with the needle in the retracted position;

15

Figure 5 is a cross-sectional side view of part of Figure 2, with the needle in the forward position;

20 Figure 6 is a cross-sectional top view of part of the spool valve assembly, shown in the retracted position;

Figure 7 is a cross-sectional top view of part of the spool valve assembly, shown in the forward position; and

25 Figure 8 is another cross-sectional view of part of the spool valve assembly, shown in the forward position, showing the flow path for the additive.

30 With reference to Figure 2, the conventional parts of the apparatus are identified as follows. Tow filter material 3 is delivered to the apparatus from an adjacent processing machine in the production line. The tow 3 is delivered into the rear of a stuffer jet assembly 4 which is mounted at an angle on a stuffer jet assembly mounting
35 bracket 5.

The relatively loose-fibred tow 3 is channelled into a tow funnel 6 where it is compressed and guided into a rod of narrowed diameter by the time it exits the end of tongue 7 at the downstream end of the tow funnel 6.

Additive (in this case, flavour) applicator apparatus according to the first aspect of the present invention is also illustrated in Figure 2. The flavour applicator assembly 10 is mounted in the region of the tow funnel 6.

Liquid flavour is applied to the tow by means of a hollow needle 13. As can be seen most clearly in Figures 4 and 5, the needle is not linear, but is shaped as shown. Preferably, the needle 13 comprises three sections - a proximal section 13A which is the upstream end, an angled centre section 13B, and a distal section 13C which is the downstream end. The distal section 13C is preferably relatively short and is substantially parallel to the proximal section 13A.

The needle 13 is moveable between two positions - a retracted position (see Figure 4) wherein it is wholly retained inside the flavour applicator assembly 10, and a forward position (see Figure 5) wherein at least the distal end 13C of the needle is positioned within the flow path of the tow material 3. A hydraulically or pneumatically operated spring 14 moves the needle between the two positions on demand.

The needle 13 is mounted to a spool valve 15. With reference to Figure 4, in the retracted position, the spool valve 15 and hence needle 13 is biased rearwardly (upstream) by a spring 14.

Upon supply of compressed air to an air inlet 11, the spool valve 15 and needle 13 are pushed forwardly (downstream), against the action of spring 14, to the forward position illustrated in Figure 5. In this position, the distal end 13C of the needle moves through a slot (not shown) in the housing of the flavour applicator assembly 10 and protrudes into the flow path of the tow. In this position, the apparatus is ready to deliver flavour into the tow.

10

Flavour is supplied to the flavour applicator assembly 10 via a flavour inlet 12 which is coupled to a universal flavour applicator (additive metering means) of known type (not illustrated), for example the UFA1000 flavour applicator manufactured by CB Kaymich & Co. Limited. The additive metering means is designed for use with many types of cold or heated flavours, such as menthol (crystal or solution), mint, fruit, clove, vanilla, liqueurs etc.

20

The spool valve 15 directs flavour from the flavour inlet 12 to the needle 13, as illustrated in Figures 6-8. Figure 6 shows the spool valve 15 in its retracted (or closed) position. As described above, the needle 13 and spool valve 15 are retracted upstream (cf. Figure 4). In this position, the orifice 12A of flavour inlet 12 is blocked by the spool valve 15 and sealed by the positioning of O-ring seals 16 either side thereof. Therefore, no flavour can escape from the flavour inlet into the spool valve 15 and nothing is delivered to the needle 13.

30

Turning now to Figures 7 and 8, when the needle 13 and spool valve 15 are in the forward position (cf. Figure 5), the orifice 12A of flavour inlet 12 is now adjacent

35

an orifice in the spool valve 15. This allows flavour to be delivered from the flavour inlet 12 via an annular undercut 17 into the spool valve 15 and then into the needle 13. The position of the distal end 13C of the
5 needle means that flavour is delivered right into the centre of the tow.

Item 18 is a sealed plug which can be removed to allow the flavour inlet 12 to be connected to the opposite side
10 of the apparatus, if desired.

In a preferred embodiment, some or all of the apparatus may be provided with heating means to ensure that the flavour (which may initially be supplied in solid
15 granular or crystalline form) is kept in a liquid state during its passage through the apparatus.

CLAIMS

1. Apparatus for applying an additive to cigarette
filter tow material which is in, or exiting, a
5 filter tow funnel, the apparatus comprising:
a flavour inlet;
a valve; and
a hollow needle positioned downstream of at least
a portion of said filter tow funnel, the needle
10 being in fluid communication controlled by said
valve with said flavour inlet,
whereby, in use, an additive is delivered by said
needle into the path of said filter tow material.
- 15 2. Apparatus as claimed in claim 1 wherein said needle
is selectively moveable along a longitudinal axis
between a forward position, in which at least the
distal end of the needle is in the path of the
filter tow material, and a retracted position, in
20 which said needle is not in the path of said tow
material.
3. Apparatus as claimed in claim 2 wherein said
longitudinal axis is substantially parallel with a
25 tapered inner surface of said tow funnel.
4. Apparatus as claimed in claim 2 wherein said
longitudinal axis is substantially parallel to the
centre line of the flow path of said tow.
- 30 5. Apparatus as claimed in any of the preceding claims
wherein said needle is selectively moveable between
said forward and retracted positions by said valve
which is preferably pneumatically-operated.

6. Apparatus as claimed in any of the preceding claims wherein the orifice at the distal end of the needle is in the range 0.5mm-1.0mm.
- 5 7. Apparatus as claimed in any of the preceding claims further comprising heating means.
8. Apparatus as claimed in any of the preceding claims wherein said additive is provided in solid form and
10 melted into a liquid during passage through the apparatus.
9. Apparatus as claimed in any of the preceding claims wherein the delivery of additive to the flavour
15 inlet is regulated by additive metering means.
10. Apparatus as claimed in any of the preceding claims wherein the passage of additive from the flavour inlet to the needle is controlled by said valve.
20
11. Apparatus as claimed in any of the preceding claims wherein said valve is provided with one or more O-ring seals.
- 25 12. Apparatus as claimed in any of the preceding claims wherein said additive is a flavour.
13. Apparatus for applying an additive to cigarette filter tow material substantially as described
30 herein, with reference to any of Figures 2-7.
14. A method of applying additive to a cigarette filter, comprising the steps of:
providing apparatus as claimed in any of the
35 preceding claims;

supplying an additive to said flavour inlet;
 actuating said valve so as to move said valve
 and said needle into the forward position, into the
 path of tow material which is in, or exiting a tow
 5 funnel;
 delivering additive via said needle into the
 tow.

15. Method as claimed in 14 further comprising the step
 10 of heating all or part of the apparatus to ensure
 the additive is in liquid form.

16. A method of applying additive to a cigarette filter
 substantially as described herein, with reference to
 15 any of Figures 2-7.

17. A cigarette filter manufactured according to any of
 claims 14-16 or using apparatus as claimed in any of
 claims 1-13.

20 18. A cigarette incorporating a filter as claimed in
 claim 17.



INVESTOR IN PEOPLE

Application No: GB0417068.4

Examiner: Robert Mirams

Claims searched: 1 to 18

Date of search: 24 September 2004

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
A	N/A	US2003/0224918 A (PHILIP MORRIS) whole document

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^w :

A2C

Worldwide search of patent documents classified in the following areas of the IPC⁰⁷

A24B; A24D

The following online and other databases have been used in the preparation of this search report