

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2008 (18.12.2008)

PCT

(10) International Publication Number
WO 2008/153458 A1

(51) International Patent Classification:
A61J 1/20 (2006.01)

(21) International Application Number:
PCT/SE2007/050414

(22) International Filing Date: 13 June 2007 (13.06.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):
CARMEL PHARMA AB [SE/SE]; Box 5352, S-402 28
Göteborg (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ELLSTRÖM, Anna**;
Lerbrännargatan 5C, S-431 48 Mölndal (SE).

(74) Agent: **VALEA AB**; Lindholmspiren 5, S-417 56 Göte-
borg (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,
ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX,
MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO,
RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: AN ARRANGEMENT FOR USE WITH A MEDICAL DEVICE

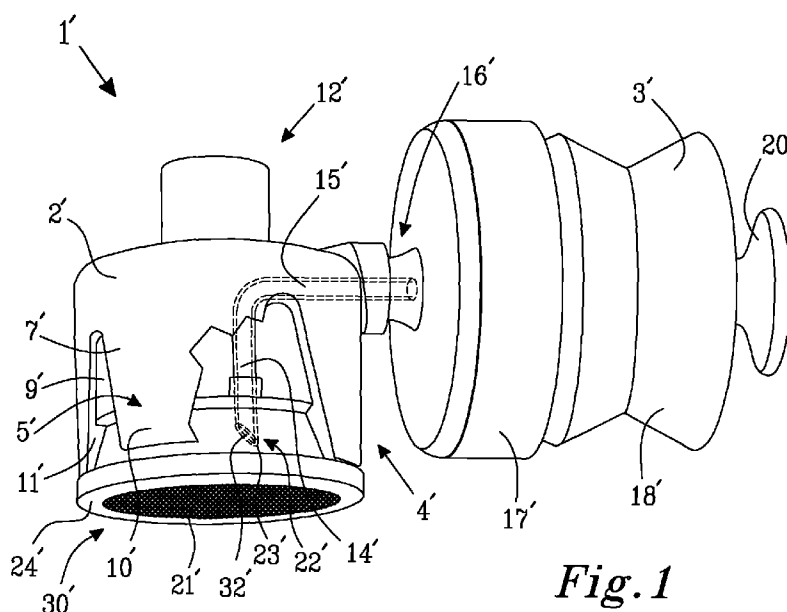


Fig. 1

(57) Abstract: The invention relates to an arrangement (30') for use with a medical device which arrangement comprises a shield (22') for a tip (23') of a needle member (14') of a medical device (1'). The arrangement (30') comprises a filter (21') for filtering gas to be transferred out from or into the medical device (1') via the needle member (14') when the arrangement (30') is interconnected with the medical device. The filter (21') is integrated with or constitutes at least a portion of the needle member tip shield (22').

AN ARRANGEMENT FOR USE WITH A MEDICAL DEVICE

TECHNICAL FIELD

The invention relates to an arrangement for use with a medical device according to the
5 preamble of claim 1, and a medical device according to the preamble of claim 14.

The invention can be implemented in various medical equipments and be used for a number of purposes, but hereinafter the particular, but not in no way limiting for the invention, fields of application constituting an arrangement used together with a device for
10 aseptic preparation of drugs will be described.

BACKGROUND OF THE INVENTION

In the field of drug preparation for injection or infusion generally two basic problems have to be considered. Firstly, certain demands are made on aseptic conditions so as to avoid
15 contamination of the drug, and, secondly, the drug has to be handled in such a way that drug leakage to the environment is prevented or minimized. By a sterile or aseptic handling of the drug, the risk for transferring bacteria or any other undesired substance to the patient is reduced. By preventing drug leakage to the environment, the exposure of medical and pharmacological staff to hazardous drugs is decreased.

20

In order to achieve aseptic conditions special safety boxes, cabinets or isolators are being used where the air is filtered through HEPA filters to prevent contamination during preparation of drugs. Ventilated cabinets are also used to reduce uncontrolled leakage to the environment and prevent occupational exposure to possibly hazardous drugs. Such
25 facilities, however, require a lot of space and are associated with relatively high costs. Furthermore, the offered protection can be insufficient and working environment problems due to accidental exposure to drugs, for example cytotoxins, have been reported.

Another solution of the problems mentioned above is to create a so called "closed" or
30 "non-vented" system for handling the drugs during preparation. Such systems exist and enable the preparation to be accomplished without the use of special clean rooms or fume cupboards. In such a closed system the drugs are handled isolated from the environment

during every single step so as to avoid contamination of the drug and undesired drug leakage to the environment.

A known problem associated with the preparation of drug solutions is the fact that medical
5 bottles or vials normally are made of a non-compressible material, such as glass or plastic. To enable the vial to be drained off, air has to flow into the vial so as to avoid negative pressure in the drug vial which negative pressure otherwise counteracts or prevents further transportation of liquid from the vial to another receptacle such as syringe.

10

Different systems for providing sterilised or cleaned gas are described for example in WO 00/35517 and WO 02/11794. However, these systems have drawbacks due to the number of manipulations to be accomplished and/or the requisite special equipment for providing the gas.

15

Within the field of medical devices very often any kind of needle for penetration is used. For example, hollow needles are used for penetration of a closing (which can be made of rubber for instance) covering an opening of a drug vial. Such injection needles or cannulae can be used for enabling gas or liquid transportation between a drug vial and
20 another receptacle. The expression "piercing member" or "needle" used hereinafter is meant to comprise also spikes and similar components for penetration of such a closing in order to create a channel for the transportation of gas or liquid.

A medical device comprising such a needle has drawbacks because the person handling
25 the device can due to incautiousness be injured by the needle. Furthermore, the package enclosing the device can be damaged by the needle during transport and storage of the device. To solve this problem such medical devices can be provided with a needle shield covering the tip of the needle, which shield functions as a protection during storage and the initial handling of the device.

30

SUMMARY OF THE INVENTION

An object of the invention is to provide an arrangement for use with a medical device, which arrangement can reduce the total number of requisite components and/or provide
35 an additional function to a medical device. In particular, the invention aims to provide such

an arrangement suitable for use together with a medical device for providing cleaned gas in a rational and safe way during preparation of drugs.

According to the invention the object is achieved by an arrangement according to claim 1.

5

By the provision of an arrangement which comprises a shield for a tip of a needle member of a medical device, wherein the arrangement comprises a filter, preferably a particulate air filter for filtering gas to be transferred out from or into the medical device via the needle member when the arrangement is interconnected with the medical device, and the filter is
10 integrated with or constitutes at least a portion of the needle member tip shield, two important functions are provided in one single component. The needle member tip is protected or shielded and gas can be cleaned by means of the filter. Thus, the invention is based on the insight that by providing a needle member tip shield with a filter two functions can be achieved in one and the same component.

15

According to a preferred embodiment of the invention the needle member tip shield is mainly or entirely constituted by the filter. By manufacturing the needle shield from a filter material a single component having two functions can be obtained in a very rational way.

20 Further advantages and advantageous features of the arrangement according to the invention are disclosed in the following description and remaining dependent claims.

The invention also relates to a medical device provided with a needle member and an arrangement according to the invention.

25

BRIEF DESCRIPTION OF THE DRAWINGS

With reference to the appended drawings, below follows a more detailed description of preferred embodiments of the invention cited as examples.

30 In the drawings:

Fig. 1 is a perspective view of a medical device comprising an arrangement according to the invention,

Fig. 1b is a cross section view illustrating a portion of a filter having a channel for receiving a needle member,

Fig. 2 is a view corresponding to figure 1 illustrating the medical device in another
5 condition,

Fig. 3 is a perspective view of the device according to figure 1 where the arrangement according to the invention has been removed from the medical device,

10 Fig. 4 is an exploded view corresponding to figure 3,

Fig. 5 is a partly cut view illustrating a variant of the arrangement according to the invention.

15 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

In figures 1 and 2 a medical device 1' for providing cleaned gas, for example air, to a receptacle and thereby facilitating conveyance of a substance out of the receptacle is illustrated. Such a substance can be various solutions and liquids constituting drugs, for
20 example cytotoxic drugs or antibiotics, for use in the field of medicine. The device comprises a connector 2' and a container 3' which may form an integrated unit 4'. The connector 2' is provided with a first means 5' for connection to a receptacle 6' or in other words a first connector portion 5'. See also figure 3 illustrating the device connected to a medicine bottle or vial 6', and the exploded view in figure 4.

25

The first connection means 5' can be designed for connection to a bottle, such as the neck of a vial. In the embodiment illustrated in figures 1-4, the first connection means 5' is constituted by a ring-shaped portion 7' for enclosing the neck 8' of a vial 6'. The ring-shaped portion 7' has slits 9' so as to form flanges 10' which protrude downwardly. The
30 flanges 10' can be provided with hooks 11' or barbs for gripping around the neck 8' of the vial 6'. The connector 2' is suitably provided with a second means 12' for connection to a transfer member 13' (illustrated in figures 3 and 4), such as an injector device to be interconnected with the connector, for conveyance of a substance out of the receptacle 6', or in other words; the connector 2 is suitably provided with a second connector portion
35 12'.

In another embodiment the second connection means 12' can comprise a luer lock coupling or bayonet coupling (not shown) to enable an injection device to be connected. Both the injector device and the connector are suitably provided with a membrane so as to create a double membrane coupling between the injector and the current device.

5

The connector 2' is preferably provided with a piercing member, such as a hollow needle 14' (as illustrated) for penetration of a closing (not illustrated) made of rubber for instance, which closing covers the opening of a receptacle 6, such as vial. In addition to injection needles or cannulae, the expression "needle" is meant to comprise spikes and similar
10 components for penetration of such a closing in order to create a channel for transportation of gas. Herein, a channel between the container 3' and the receptacle 6' to which the connector 2' is connected is created. By a channel or passage 15' of the needle 14', gas contained in the container 3' can be transferred from the container to the receptacle 6', i.e. gas can flow from the container 3' to the receptacle 6'.

15

The connector 2' and the container 3' may form an integrated unit 4'. This implies that the connector and the container are made in one piece or the connector 2' and the container 3' can be coupled to each other so as to form an integral unit. For such a reason, different types of coupling means 16' known from prior art can be used as long as an airtight, or at
20 least a substantially airtight connection can be obtained between the current components 2', 3'.

The container 3' has to be filled with gas before connection of the connector 2' to a receptacle 6'. The volume of the container 3' is preferably variable. To obtain a container
25 3' having a variable volume the container can comprise a first portion 17' made by a relatively rigid material which first portion is coupled to the connector 2', and a second portion 18' made by a relatively flexible material attached to the first portion 17'. The second portion 18' can be extensible by manipulation of for example a handle 20' arranged at the end of the container 3'. Hereby the volume of the container 3' can be
30 increased and decreased, respectively. For example, the container 3' can be designed as a bellows which is compressible and extendable by affecting the container manually. The container 3' is preferably provided with said handle 20' for regulating the volume of the container 3'. Although the volume of the container is preferably variable as illustrated, there may be other ways to fill the container and at the same time ensure that the gas
35 passes a filter 21'. For example, the gas container could be constituted by a sealed

vacuum-packed flexible bag whose seal can be broken to allow gas to flow into the bag. Alternatively, the gas container is rigid or semi-rigid and pressurized gas is used to fill the container.

- 5 The amount of gas, preferably air, provided by the pre-filled container, should be adapted to the volume of the receptacle which is to be drained off. The volume of the gas when being in the receptacle should preferably correspond to the volume of the receptacle so as to enable the receptacle to be completely drained off. This implies that the volume of the cleaned or sterilized gas in the pre-filled container is preferably approximately equal to
10 or larger than the volume of the receptacle provided that the pressure of the gas is substantially the same in the receptacle as in the container. For most medicine bottles or vials, the volume of the gas should be in the interval 1-100 cm³ at atmospheric pressure.

By the expression "cleaned" gas is meant that the gas has been filtered by a filter, such as
15 a particulate air filter to remove particles and/or viable micro-organisms to such an extent that the gas is classified to be aseptic and accepted by the relevant authority and/or any standards. The degree of purity can be expressed in the largest particles allowed to pass the filter for a given flow rate of gas. In some cases no or very few particles having a size exceeding 5µm are allowed to occur in the cleaned gas. However, the allowed particle
20 size is determined by the requirements in the current application. Some drug treatments require that substantially all particles having a size exceeding 0.15µm are removed from the gas by the particulate air filter. As an example, a filter with the mesh size 0.2µm can be used to remove substantially all particles and micro organisms of that size.

25 Furthermore, the medical device 1' is provided with an arrangement 30' according to the invention. The arrangement 30' and the medical device 1' are interconnected with each other. In the embodiment illustrated in figure 1, the arrangement comprises a shield 22' for covering the tip 23' of a needle member 14' of the medical device 1'. In accordance with the invention a filter 21' is integrated with or constitutes at least a portion of the needle
30 member tip shield 22'. In the illustrated embodiment the filter is arranged to filter the gas to be transferred into the medical device via the needle member 14'. The filter 21' is preferably a particulate air filter, for cleaning gas, such as air to be transferred into the medical device via the needle member 14'. In this example the needle member shield 22' comprises a holder or a frame 24' for accommodating the filter 21', hereinafter called
35 particulate air filter, which frame 24' is connectable to the medical device 1', i.e. to the

connector 2'. The main portion of the needle member shield 22' is suitably constituted by the particulate air filter 21' which is arranged for cleaning gas to be transported from the environment into the container 3'. In other words; the particulate air filter 21' is arranged to clean gas which passes the particulate air filter 21' during filling the container 3' with gas
5 (by increasing the volume of the container 3') before connection of the connector 2' to a receptacle 6'. According to the invention the filter is integrated with or constitutes at least a portion of the needle member tip shield. The expressions "integrated with" and "constitutes at least a portion of" are intended to comprise an arrangement where the filter is releasably or permanently connected to the needle member tip shield or is made in one
10 piece with the shield, as well as embodiments where the filter itself constitutes a portion of or the entirely needle member tip shield. Furthermore, in another embodiment of the invention the arrangement could comprise two or more filters.

In a preferred embodiment of the invention the needle member tip shield is adapted to be
15 arranged to at least partially cover or surround the tip of a needle member of a medical device when the arrangement is interconnected with the medical device. This implies that the needle member tip shield covers the tip at least in one direction so as to avoid a user of the arrangement to be injured by the needle due to incautiousness. For example, the shield can be arranged immediately in front of the tip so as to cover the tip in the
20 longitudinal direction of the needle member. The shield can also be designed as a tube, or as a part or parts of a tube, which surrounds the needle tip. Such a shield rather covers the tip in a direction substantially perpendicular to the longitudinal direction of the needle member but extends beyond the tip in the longitudinal direction of the needle and away from the needle member so as to prevent contact with the needle member tip also in the
25 longitudinal direction.

The particulate air filter 21' is preferably adapted to be arranged in front of the tip 23' of the needle member 14' and to at least partially cover or surround the tip of the needle member 14' of the medical device when the arrangement is interconnected with the
30 medical device. As already described, the particulate air filter 21' may be arranged in a frame or holder 24' or similar which in turn fits to the connector 2'. Furthermore, alternatively or in combination, the air particulate filter 21' itself can be designed to be engaged with the connector 2' and/or with the needle member 14', or the particulate air filter 21' can be partly penetrated by the needle member 14' so as to keep the particulate
35 air filter 21' in position. Thus, in one embodiment of the invention the particulate air filter

21' is adapted to be arranged to enclose the tip 23' of the needle member 14' of the medical device 1' when the arrangement 30' is interconnected with the medical device 1'.

Instead of being partly penetrated by the needle 14', the particulate air filter 21' can be provided with a channel 31' (illustrated in Fig. 1b) for receiving the tip 23' of the needle member 14' therein. In both cases, the particulate air filter 21' preferably encloses the tip 23' of the needle member tightly so as to prevent gas transportation into or out from the needle member 14' without passing the particulate air filter 21'.

10 In accordance with a preferred embodiment of the invention the particulate air filter 21' is designed and arranged as a protection portion of the needle member shield 22'. This implies that the particulate air filter 21' cleans the gas and at the same time the particulate air filter 21' functions as a protection during handling of the device 1', since the particulate air filter 21' at least partially covers or surround the tip 23' of the needle 14'. Furthermore, 15 the needle member tip shield 22' protects the sterile package enclosing the device during transport and storage of the device.

The particulate air filter 21' is preferably arranged to abut against the needle member tip 23', or rather in immediate contact with the needle portion having an opening 32' for fluid transportation into or out from the needle member 14'. By covering the opening 32' of the needle 14' by means of the particulate air filter 21', it is ensured that the gas which is brought into the container 3' has to pass the particulate air filter 21'. The arrangement and thus the needle member tip shield 22' is preferably adapted to be removably arranged on a medical device 1'. In the illustrated examples the needle member shield 22' is removed 25 before connection of the medical device 1' to a vial 6' as further described hereinafter. The arrangement 30' according to the invention, and, thus the particulate air filter 21' is arranged to be removed from the integrated unit 4' after the container 3' has been filled with cleaned gas. Subsequently to filling the container 3' the particulate air filter 21' is removed and the connector 2' is to be connected to the receptacle 6'. By removing the 30 particulate air filter 21', after the container 3' has been filled with the gas and prior to interconnection of the connector 2' and the receptacle 6' to each other, any contamination particles removed from the gas and collected in the particulate air filter 21' are removed from the integrated unit 4'. Thus, one and the same channel 15' can be used for both filling the container 3' with cleaned gas and transferring the cleaned gas from the 35 container 3' to a receptacle 6'.

In Fig. 5 a variant of the arrangement 30' according to the invention is illustrated. The particulate air filter 21' is arranged in a frame 24' to be connected to a medical device and the particulate air filter 21' covers the needle member tip 23'. According to such an embodiment of the invention illustrated in Fig. 5, where the particulate air filter 21' does not enclose the needle member tip 23', but is arranged somewhat spaced apart from the needle member tip 23', the arrangement 30' can preferably be connected to the medical device, for example to the connector 2', so as to obtain a substantially airtight connection between the medical device and the needle member shield 22'. This implies a limited space 35', which space 35' is sealed off relative the environment, being created around the tip 23' of a needle member 14' of the medical device, thereby allowing gas transportation between the space 35' and the environment only via the particulate air filter 21'.

A cover means, for example a lid (not illustrated) can be arranged for covering the particulate air filter, preferably in an airtight manner. The lid may have the function of preventing transportation of liquid, gas or any vapour in the direction from the medical device to the environment or in the opposite direction, i.e. into the medical device from the environment, so as to counteract that any undesired substance in the receptacle escapes to the environment or is introduced into the medical device, respectively.

20

Such a lid can be used to prevent further communication between the interior of the medical device and the environment via the particulate air filter after the container has been filled. The container can be filled with the cleaned gas and thereafter the lid is mounted to cover the particulate air filter and prevent further gas transportation through the air particle filter. Thereafter, the arrangement can be removed from the medical device and the connector and the receptacle can be interconnected, and the subsequent manipulations can be safely executed.

It is to be understood that the present invention is not limited to the embodiments described above and illustrated in the drawings; rather, the skilled person will recognize that many changes and modifications may be made within the scope of the appended claims.

30

CLAIMS

1. An arrangement (30') for use with a medical device, comprising a shield (22') for a tip (23') of a needle member (14') of a medical device (1'), **characterized in that**
5 the arrangement (30') comprises a filter (21') for filtering gas to be transferred out from or into the medical device (1') via the needle member (14') when the arrangement (30') is interconnected with the medical device, and in that the filter (21') is integrated with or constitutes at least a portion of the needle member tip shield (22').
10
2. An arrangement according to claim 1, **characterized in that** the needle member tip shield (22') is adapted to be arranged to at least partially cover or surround the tip (23') of a needle member of a medical device when the arrangement is interconnected with the medical device.
15
3. An arrangement according to claim 1 or 2, **characterized in that** the filter (21') is adapted to be arranged to at least partially cover or surround the tip (23') of a needle member (14') of a medical device (1') when the arrangement is interconnected with the medical device.
20
4. An arrangement according to any preceding claim, **characterized in that** the filter (21') is adapted to be arranged to cover an opening (32') of a needle member (14') of a medical device (1') when the arrangement is interconnected with the medical device.
25
5. An arrangement according to any preceding claim, **characterized in that** the filter (21') is adapted to be arranged to enclose the tip (23') of a needle member (14') of a medical device (1') when the arrangement is interconnected with the medical device.
30
6. An arrangement according to claim 5, **characterized in that** the filter (21') is adapted to be partly penetrated by the tip (23') of the needle member (14').
35
7. An arrangement according to claim 5, **characterized in that** the filter (21') is provided with a channel (31') for receiving the tip (23') of the needle member (14').

- 5 8. An arrangement according to any preceding claim, **characterized in that** the filter (21') is adapted to be arranged in front of the tip (23') of a needle member (14') of a medical device (1') when the arrangement is interconnected with the medical device.
9. An arrangement according to any preceding claim, **characterized in that** the needle member tip shield (22') is mainly or entirely constituted by the filter (21').
- 10 10. An arrangement according to any preceding claim, **characterized in that** the arrangement (30') is adapted to be removably arranged on a medical device (1').
- 15 11. An arrangement according to any preceding claim, **characterized in that** the arrangement (30') is adapted to be connected to a medical device (1') so as to obtain a substantially airtight connection between the medical device and the arrangement.
- 20 12. An arrangement according to any preceding claim, **characterized in that** the filter is a particulate air filter (21').
- 25 13. An arrangement according to any preceding claim, **characterized in that** the arrangement (30') comprises a frame (24') for accommodating the filter (21'), which frame is connectable to a medical device (1').
- 30 14. A medical device (1') provided with a needle member (14') and an arrangement (30') according to any of claims 1-13.
15. A medical device (1') according to claim 14, **characterized in that** the arrangement (30') is removably arranged on the medical device (1').
16. A medical device (1') according to claim 14 or 15, **characterized in that** the arrangement (30') is arranged on the medical device (1') so as to obtain a substantially airtight connection between the medical device and the arrangement.

17. A medical device according to any of claims 14-16, **characterized in that** the medical device (1') is a device for providing cleaned gas to a receptacle (6').

5 18. A medical device according to any of claims 14-17, **characterized in that** the medical device (1') is a device to be used in preparation of drugs.

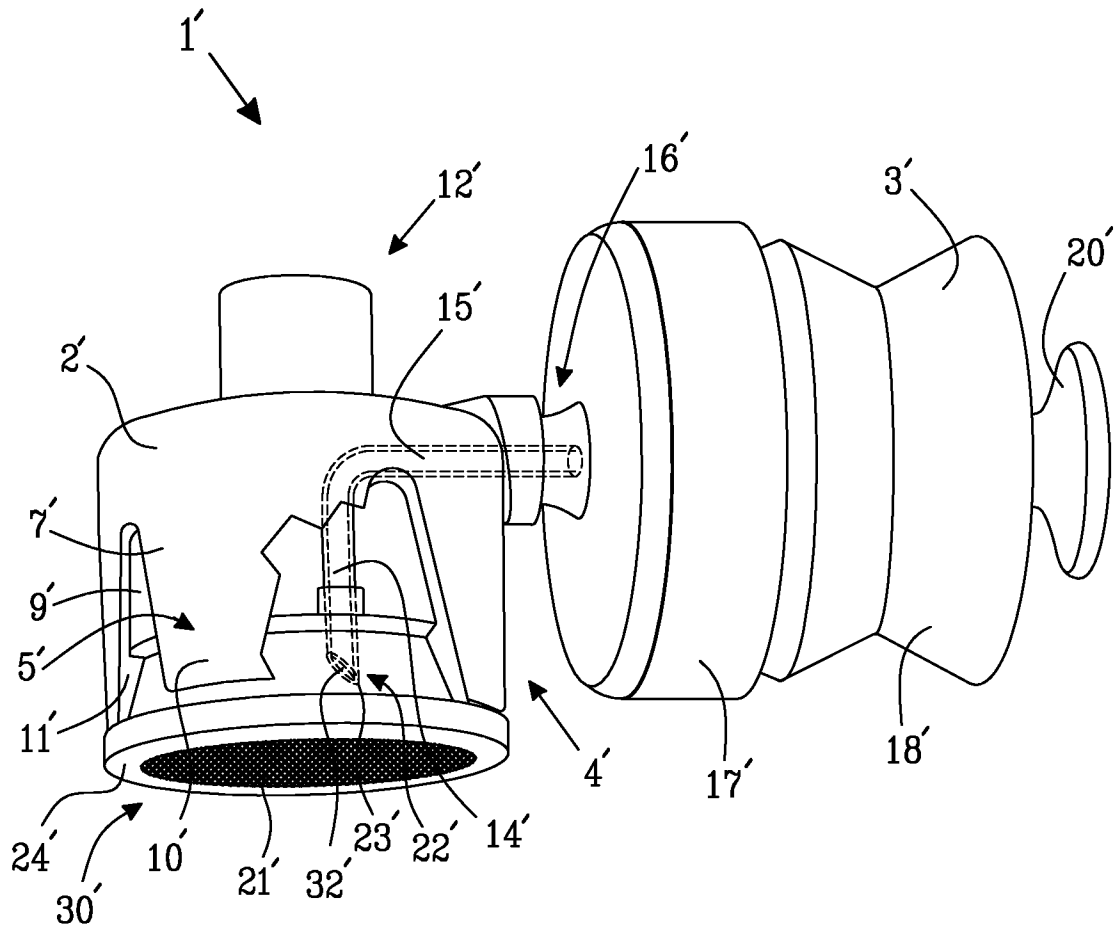


Fig. 1




Fig. 1b

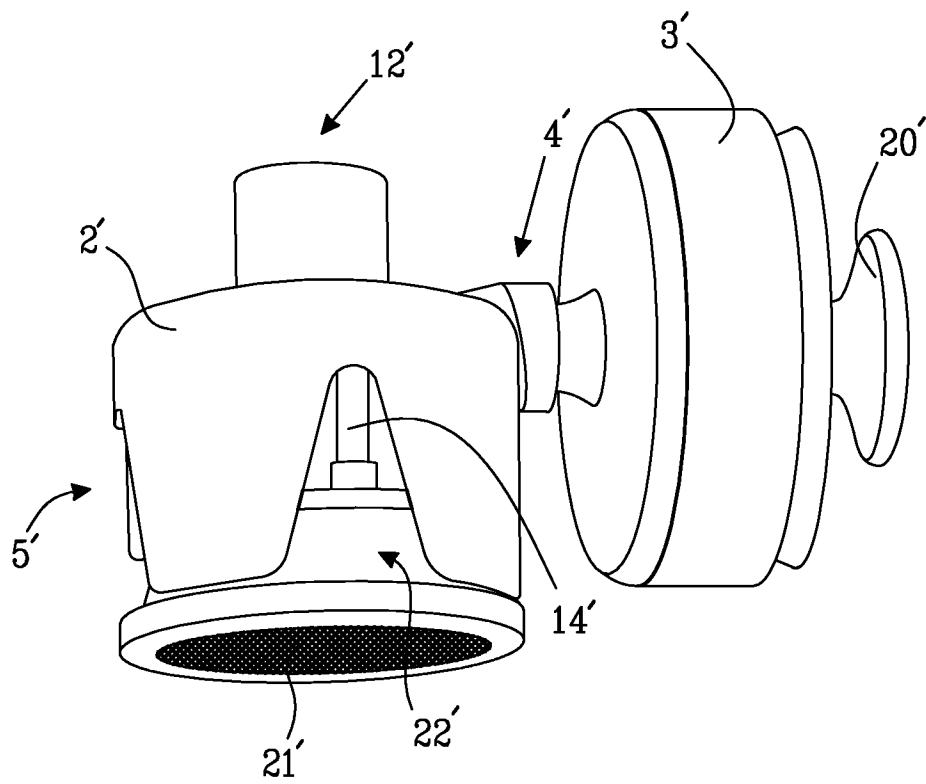


Fig. 2

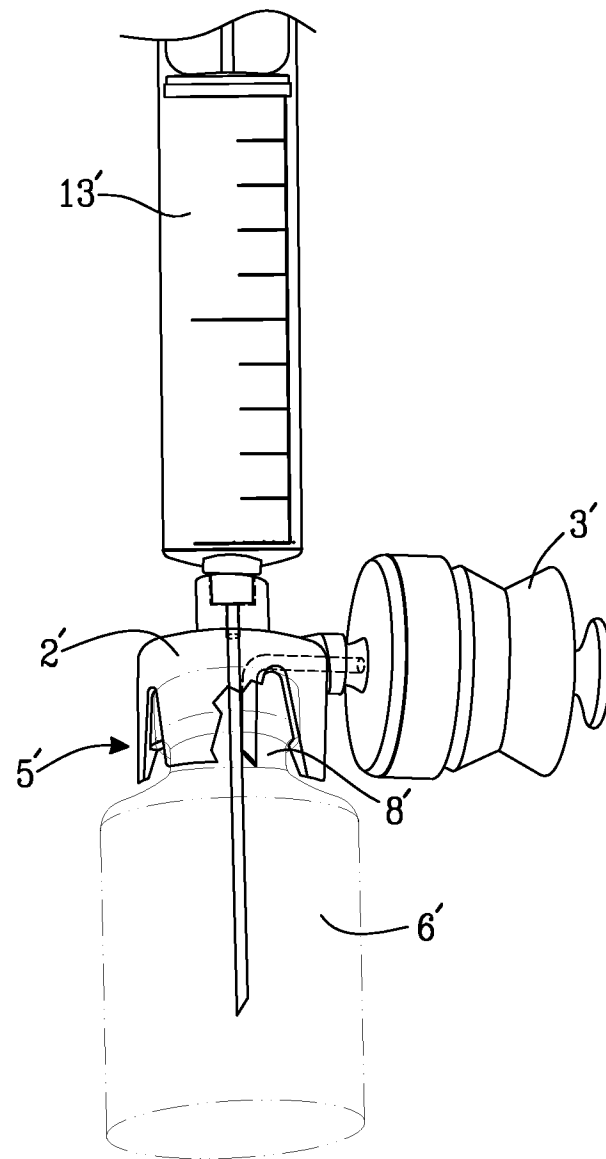


Fig. 3

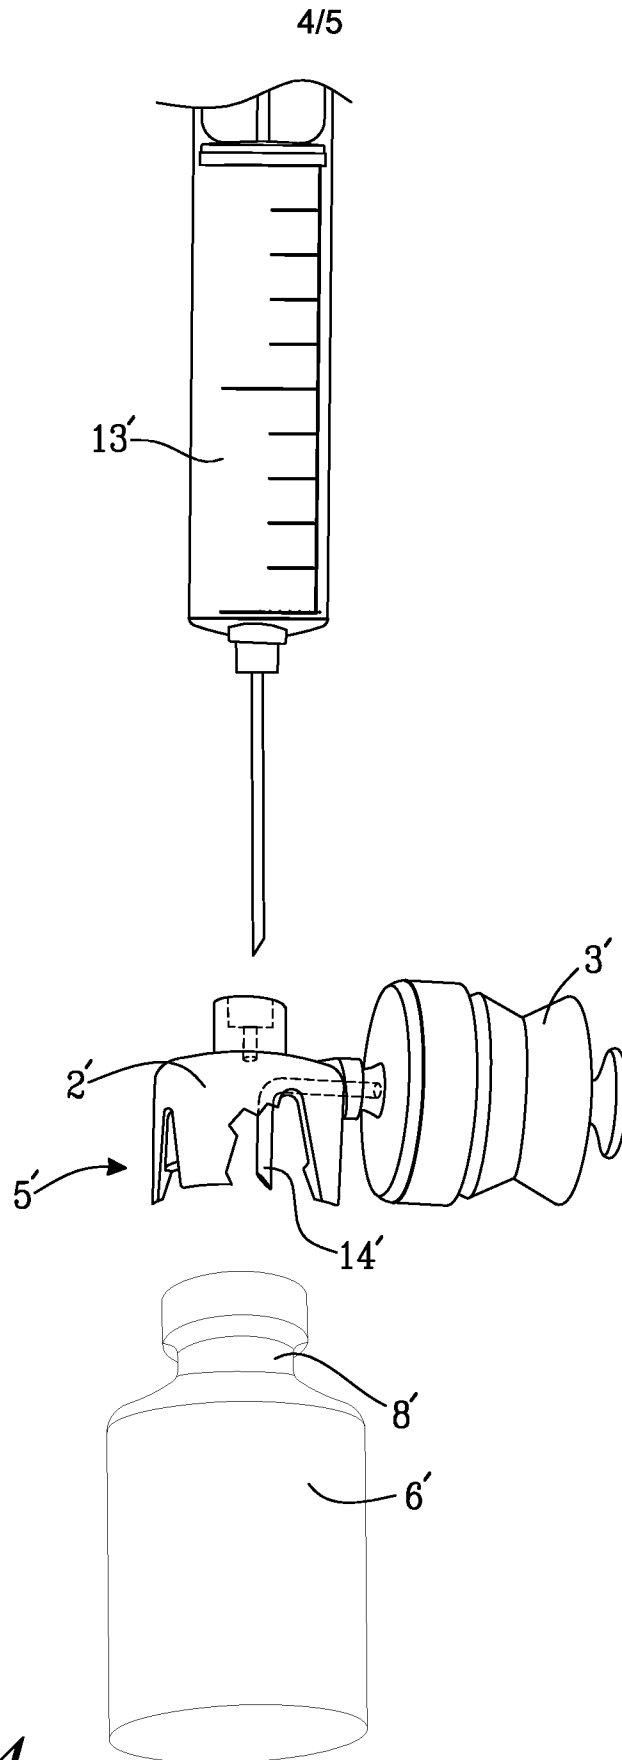


Fig.4

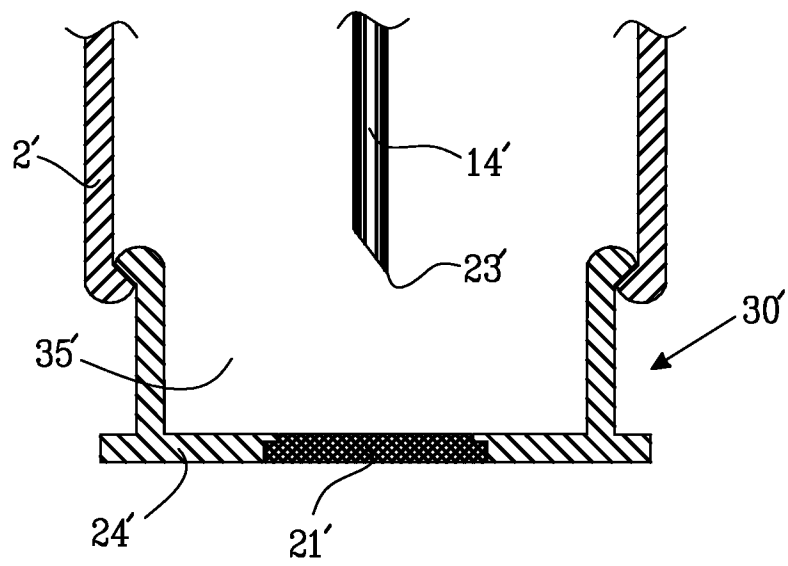


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2007/050414

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A61J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 20030070726 A1 (ANDREASSON, K ET AL), 17 April 2003 (17.04.2003), figures 1-6 --	1-18
A	US 4564054 A (GUSTAVSSON, B), 14 January 1986 (14.01.1986), figure 5, abstract --	1-18
A	WO 8404672 A1 (GUSTAVSSON, B), 6 December 1984 (06.12.1984), figures 1-5, abstract --	1-18
A	WO 0035517 A1 (CARMEL PHARMA AB), 22 June 2000 (22.06.2000), figure 2, abstract, cited in application --	1-18

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 February 2008

Date of mailing of the international search report

19 -02- 2008

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Tomas Lund/PR

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE2007/050414

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0211794 A1 (CARMEL PHARMA AB), 14 February 2002 (14.02.2002), figures 1-14, abstract, cited in application --	1-18
A	US 20070106244 A1 (MOSLER, T J ET AL), 10 May 2007 (10.05.2007), figure 6, abstract -- -----	1-18

International patent classification (IPC)**A61J 1/20** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument(service in Swedish).

Use the application number as username.

The password is **XEJDWWHMUA**.

. Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT
Information on patent family members

26/01/2008

International application No.
PCT/SE2007/050414

US	20030070726	A1	17/04/2003	AT	320236	T	15/04/2006
				CA	2462837	A	17/04/2003
				DE	60209931	D,T	16/11/2006
				EP	1434549	A,B	07/07/2004
				ES	2259102	T	16/09/2006
				JP	2005504609	T	17/02/2005
				US	6715520	B	06/04/2004
				WO	03030809	A	17/04/2003

US	4564054	A	14/01/1986	AT	36955	T	15/09/1988
				AT	57612	T	15/11/1990
				AU	569900	B	25/02/1988
				AU	575814	B	11/08/1988
				AU	2653784	A	18/12/1984
				AU	3017584	A	18/12/1984
				BR	8407302	A	25/03/1986
				CA	1215945	A	30/12/1986
				DE	3473823	D	00/00/0000
				DE	3483475	D	00/00/0000
				DK	23885	A	20/03/1985
				DK	23985	A	12/03/1985
				DK	159866	B,C	24/12/1990
				DK	161181	B,C	10/06/1991
				EP	0126718	A	28/11/1984
				EP	0165926	A,B	02/01/1986
				SE	0165926	T3	
				EP	0176511	A,B	09/04/1986
				SE	0176511	T3	
				FI	852454	A	20/06/1985
				FI	852455	A	20/06/1985
				JP	5050293	B	28/07/1993
				JP	60501294	T	15/08/1985
				JP	60501342	T	22/08/1985
				NO	155526	B,C	05/01/1987
				NO	158990	B,C	15/08/1988
				NO	850234	A	18/01/1985
				NO	850235	A	18/01/1985
				NZ	207354	A	29/02/1988
				SE	434700	B,C	13/08/1984
				SE	8301176	D	00/00/0000
				US	4673404	A	16/06/1987
				WO	8404672	A	06/12/1984
				WO	8404673	A	06/12/1984
				ZA	8401591	A	28/11/1984

INTERNATIONAL SEARCH REPORT
Information on patent family members

26/01/2008

International application No.
PCT/SE2007/050414

WO	8404672	A1	06/12/1984	AT	36955	T	15/09/1988
				AT	57612	T	15/11/1990
				AU	569900	B	25/02/1988
				AU	575814	B	11/08/1988
				AU	2653784	A	18/12/1984
				AU	3017584	A	18/12/1984
				BR	8407302	A	25/03/1986
				CA	1215945	A	30/12/1986
				DE	3473823	D	00/00/0000
				DE	3483475	D	00/00/0000
				DK	23885	A	20/03/1985
				DK	23985	A	12/03/1985
				DK	159866	B,C	24/12/1990
				DK	161181	B,C	10/06/1991
				EP	0126718	A	28/11/1984
				EP	0165926	A,B	02/01/1986
				SE	0165926	T3	
				EP	0176511	A,B	09/04/1986
				SE	0176511	T3	
				FI	852454	A	20/06/1985
				FI	852455	A	20/06/1985
				JP	5050293	B	28/07/1993
				JP	60501294	T	15/08/1985
				JP	60501342	T	22/08/1985
				NO	155526	B,C	05/01/1987
				NO	158990	B,C	15/08/1988
				NO	850234	A	18/01/1985
				NO	850235	A	18/01/1985
				NZ	207354	A	29/02/1988
				SE	434700	B,C	13/08/1984
				SE	8301176	D	00/00/0000
				US	4564054	A	14/01/1986
				US	4673404	A	16/06/1987
				WO	8404673	A	06/12/1984
				ZA	8401591	A	28/11/1984
				SE	8400075	D	00/00/0000

WO	0035517	A1	22/06/2000	AU	2009700	A	03/07/2000
				SE	513225	C	07/08/2000
				SE	9804190	A,L	04/06/2000

WO	0211794	A1	14/02/2002	AU	8037801	A	18/02/2002
				CA	2417099	A	14/02/2002
				EP	1309368	A	14/05/2003
				IL	153998	D	00/00/0000
				JP	2004505682	T	26/02/2004
				SE	517084	C	09/04/2002
				SE	0002868	A,L	11/02/2002
				US	7306584	B	11/12/2007
				US	20040215147	A	28/10/2004

US	20070106244	A1	10/05/2007	NONE			
----	-------------	----	------------	------	--	--	--
