

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 December 2002 (19.12.2002)

PCT

(10) International Publication Number
WO 02/100741 A1

(51) International Patent Classification⁷: **B65D 88/28**,
88/54, 88/56, B01F 13/10

(74) Agent: **ELLA CHEONG MIRANDAH & SPRUSONS PTE LTD**; Ronbinson Road Post Office, P.O. Box 1531, Singapore 903031 (SG).

(21) International Application Number: **PCT/SG02/00119**

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 13 June 2002 (13.06.2002)

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

Declarations under Rule 4.17:

(26) Publication Language: English

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

(30) Priority Data:
0103487-5 13 June 2001 (13.06.2001) SG


[Continued on next page]

(71) Applicant (for all designated States except US): **SKY TECHNOLOGY PTE LTD** [SG/SG]; Block 217 Henderson Road, #02-03 Henderson Industrial Park, Singapore 159553 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOH, Eng, Soon** [SG/SG]; Block 401, #25-02 Pandan Gardens, Singapore 600401 (SG). **GOH, Eng, Hock** [SG/SG]; 21 Murai Farmway, Singapore 709144 (SG).

(54) Title: CONTAINERISED HANDLING OF BULK MATERIALS AND APPARATUS THEREFOR

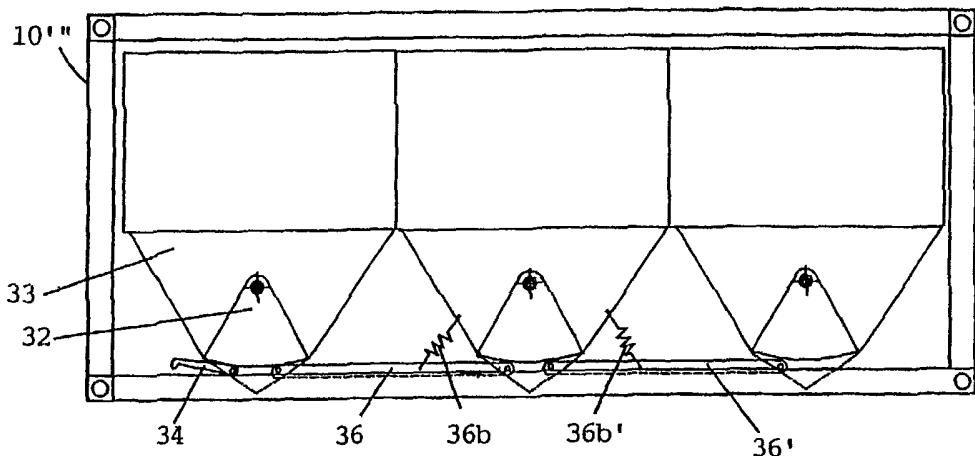

WO 02/100741 A1

(57) Abstract: A freight container (10) has a base (20) or a portion thereof that can be opened to discharge its contents. This container (10) has a top which can be opened in similar manner as the base. Another container having at least one compartment, each compartment having a lower section with a reducing cross-sectional area and a pivotably operable closure assembly, with several such closure assemblies being linked together by means of bars. Such a container is used to contain raw building materials for stockpiling of these materials at a container port. It is also used to supply materials to a concrete production plant where pollution control containers are provided below the supply container and above the scaling and mixing stations to reduce particulate pollution. A pair of slewing apparatuses is also provided to engage both ends of a container and turn the container over about its longitudinal axis, thereby emptying its contents.



CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONTAINERISED HANDLING OF BULK MATERIALS AND APPARATUS
THEREFOR

FIELD OF THE INVENTION

5

This invention relates to containerised handling of bulk materials, for instance raw building materials. It also relates to stockpiling and batching of such materials using containers in general.

10 BACKGROUND OF THE INVENTION

Containers can be used to carry bulk materials, for instance raw building materials. However, one problem with this is that such materials are not always easy to unload. The containers tend to be tipped up from one end, so that the materials fall out of the 15 other. However, this is not just a simple matter of tipping by a few degrees. Some materials require a tipping angle of over 45° to be fully unloaded. This requires tipping equipment and space and moreover can cause a lot of dust and mess.

An alternative to using a normal box container is to use a tank or silo container (with 20 the tank in a container frame). The materials there are emptied through valves at the base. Whilst this may work for dry materials, it tends not to work for damp ones; the valves clog up.

The transportation of bulk materials is well exemplified by concrete. Concrete is a 25 common construction materials and is a composite of cement, sand, gravel and water. The strength of cured concrete depends on the proportions of each component. Additives may be added to improve the fluid properties of the concrete during mixing and/or casting; others may be added to improve the hardness of the concrete after curing; colour pigments can also be added to give the concrete a distinct colour for a 30 specific application, such as to differentiate the floor areas at a factory.

These raw materials are normally supplied in bulk by separate suppliers. For example, cement is manufactured only at a specialised plant, where limestone and large electric power are readily available and only at the locations approved by the environmental authorities. Similarly, gravels are produced at the quarries and the industry is also controlled by the environmental authorities. Sand may be dredged out from the sea or river bed. These raw materials are then transported to a batching plant. This may be at a construction site, but in many cases, there is no land available for an on site concrete batching plant or there may be other reasons why it is not feasible. In such cases, the raw materials are batched at a remote batching plant and transported to site by concrete mixers. This remote batching plant may have to occupy a large piece of land to stockpile the raw materials. In land-scarce countries, such as in Singapore, efficient use of land is a concern.

In many places, all the raw building materials are imported from the surrounding regions; gravel may come from one place with sand and cement coming from again different places. Typically, gravel and sand are transported by barges, while cement by specialised ship. At the landing point, these materials are stockpiled and then transferred to the batching plants or construction sites.

These batching plants and landing points are normally open facilities and the transfer of huge amounts of materials generates a lot of dust into the air. Abatement of dust pollution is therefore important.

Tipping of a container mounted on a truck tends to cause a lot of dust. Also tipping of a container suspended on a crane is not a safe practice. Shipping of wet sand and gravels in silo or tank containers does not work.

These problems necessitate a search for simpler and economical means of shipping and transfer of bulk materials and yet reducing pollution from the present levels. .

SUMMARY OF THE INVENTION

This invention provides novel containers and, *inter alia*, an apparatus and system for containerised handling of raw building materials. These containers are handled at a 5 container port and are stockpiled at the stacking yard. Sand and gravel (aggregate) can also be batched into mixer containers for stockpiling.

According to a first aspect of the present invention, there is provided a container for transferring bulk materials, being shaped, dimensioned in length and width and 10 operable as a standard freight container and having a base, at least a portion of which is openable for discharging contents of the container therethrough.

The base or a portion thereof can be slidable, pivotable, hinged, swingable, displaced vertically, etc.

15 Preferably, the container has at least one compartment, the or each compartment having at least one lower section of reducing cross-sectional area, each leading to an opening, and a closure assembly for the or at least one opening, for releasing or retaining the compartment's contents. Moreover, the or at least one closure assembly is preferably 20 pivoted.

According to a second aspect of the present invention, there is provided slewing apparatus for turning a container comprising:

25 a supporting portion;
a rotatable, container holding portion; and
means for rotating said container holding portion on said supporting portion;
wherein
said container holding portion comprises:
a base portion for supporting and fastening to the lower part of a container; and
30 arm means extensible in a first direction and having fastening means with an extent in at least a second plane, orthogonal to said first direction, for fastening to the upper part of a container;

wherein said fastening means is rotatable between a first position where it cannot fasten said container, whilst the container is supported and fastened to said base portion, and a second position, where it can fasten said container, whilst the container is supported and fastened to said base portion.

5

Preferably, when said fastening means is in said first position, a container can be placed for fastening to said base portion or removed therefrom, and, when said fastening means is in said second position, the fastening means obstructs a container from being placed for fastening to said base portion or removed therefrom.

10

Advantageously, the base portion may be arranged to support a container from below and said fastening means arranged to fasten to a container from above.

Preferably two such apparatus are used together, one for each end of a container.

15

A pollution control enclosure for use with the slewing apparatus is also provided.

According to another aspect of the invention, there is provided a system for producing a mixture of components, comprising:

20 at least one stocking section having a stocking chamber for a component; and
 a scaling section for determining and delivering a scaled amount of each component;
and operable such that a container may be stacked on top of said stocking section for replenishing said component therein.

25

This system for producing a mixture of components, may further comprise a section for holding or blending the scaled components before discharging the mixture.

This could be by using a container as above or the slewing apparatus as above.

30

Preferably the system includes a pollution control section for use between at least said container and said stocking section for abating particulate pollution as material is discharged into the stocking section.

- 5 The stocking section, scaling section, mixing section and the one or more pollution control sections ideally are shaped, dimensioned, transportable and stackable as a standard freight container.

This system is advantageous for producing concrete.

10

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be further described by way of non-limitive examples with reference to the accompanying drawings, in which:-

15

- Figs. 1a - 1c show containers having a sliding base plate in one or two parts, according to one aspect of the invention;
- Figs. 2a - 2e show containers having a hinged base plate in one or two parts, according to embodiments of the invention;
- 20 Figs. 3a - 3b show a compartmentalised container, being another embodiment of the invention;
- Figs. 4a - 4b show a container with both a base and top that can be opened;
- Figs. 5a - 5e show details of containers according to further embodiments;
- Figs. 6a - 6f show details of containers according to yet more embodiments;
- 25 Figs. 7a - 7c show a slewing apparatus for a container according to another aspect of the invention;
- Figs. 8a - 8g show a system for containerised handling of raw building materials at a concrete production plant, according to yet another aspect of the invention;
- 30 Figs. 9a - 9c show a pollution control enclosure for a slewing apparatus;
- Fig. 10 shows another system for containerised handling of raw materials at a concrete production plant;

Figs.11a - 11d show interfacial seals between stacked-up containers, according to again another aspect of the invention;

Figs.12a - 12c show covers for preventing waste of raw materials according to yet again another aspect of the invention; and

5 Fig. 13 shows a system for containerised handling of raw building materials at a port.

DESCRIPTION OF THE EMBODIMENTS OF THE INVENTION

10

Fig. 1 shows a container 10 with a single sliding base plate 20. This container 10 has the same or similar external length and width dimensions and corner castings as a regular freight container already in use, such as that of an ISO-type or SeaLand-type container. The height can be non-standard, although standard heights may be preferred.

15

However, the base is different, allowing the base plate 20 to slide open. In this manner materials within the container can fall out of the bottom. The base frame of the container has support bars 30 supporting the base plate when closed and keeping it rigid under the weight of the raw materials. These support bars 30 are preferably pointed or curved at the top to prevent material settling on them when it falls.

20

Additionally, around the edges of the base plate 20, there are seals 15 to prevent material in the container getting around the ends and sides of the base plate 20 and escaping or clogging up the sliding action.

25

The base plate 20 need not be a single piece. It can be made of two pieces 20', 20" as shown in Figs. 1b and 1c, preferably with an overlapping edge 21. This has the advantage that the opening of the base can be carried out from either or both sides, if and when space constraints require it. A single container can have two or more independently movable or immobile base plates along its length and/or its width. There 30 may be containers where the split is not central and/or where one side is immobile.

In another embodiment of this invention, Fig 2a shows a hinged base plate 22 instead of a sliding one. Preferably, this hinged base plate comprises two pieces 22', 22" as shown in Fig. 2b, with the pivot axes along the base struts of the container frame and the overlapping edges substantially mid-way in between. For a long container, such as a 5 twenty-footer, it is possible to have the hinged base plates across the container in several sections 24 so as to ensure rigidity of the base (see Fig. 2c). It is also possible that a strut 31 be provided along the centre(s) of the base frame(s) of the container, in either the long or the short section. In this way, the moving edges of the base plates may abut the centre strut 31 offering more secure locking and releasing mechanisms 10 and greater strength. The hinges may be located at struts 31 instead of the edge struts of the container (Fig.s 2d and 2e).

A further embodiment compartmentalises the container 10' to handle various raw building materials at the same time (Fig. 3a and 3b). In this way, for example, sand 15 and/or gravel (aggregate) can be batched into different compartments of a container. With this provision, it is possible to supply a container of sand and aggregate to a blending station to produce concrete with different structural strengths (having different compositions of sand, aggregate, cement and water). With prescaling of each batch of material, it is also possible to do away with the scaling station at a typical cement 20 batching plant. Three compartments are shown but there may be any other number with compartments separated along the length and/or width of the container.

A further embodiment is shown in Figs. 4a and 4b, which has a top that can be similarly opened. This feature allows easy loading whilst afterwards covering its 25 contents, especially sand, and ensures that the moisture content is maintained during shipping or stockpiling.

The sliding action of the base plate (or sections of it) can be achieved by means of built-in hydraulic cylinders and a (remote) hydraulic power unit. This method is 30 preferred for the large power that it can deliver, yet the cylinders are compact enough for installation below the base plate. With some compact control units, installed at an edge of the container for example, an operator can easily operate the cylinders to slide

open the base plate. By operating different control units, different sections of the base plate can be opened. The cylinders and control units may be connected at least in some parts by flexible hoses that are in common use. The flexible hoses allow relative movement between the cylinders and control units thereby making the opening of the 5 base possible. The control unit may be integrated with the power unit.

In the same manner, hydraulic cylinders, for example, may be used to release the catches of the locks for the hinged base plate or sections of it. Hydraulic power is preferred, due to its huge power, compact cylinders and control units, and flexible 10 power lines. Additional hydraulic cylinders may be provided to enable closing of the hinged base plate. This is particularly useful when access to close the hinged base is not possible for safety reasons, for example.

The movable base plates are also provided with handles, which allow them to be pulled 15 from outside, for example by a hook on a chain, a forklift. Other means, especially rotary means, such as a motor connected to a reduction gear set driving a rack and pinion assembly; or a winch and cable mechanism may be used.

It is also possible that the actuators (both linear and rotary) for operating the base plate 20 (or sections of) of container 10, 10" are mounted in the structure on which container 10, 10" sits. In this case a projection at the moving end of the actuator engages with a catch on the lower side of base plate 20 (or sections 20" of it). The advantage of this feature is that only one set of operable mechanism is required at each material discharge point.

25 Figs. 5a and 5b show yet another embodiment of a container for discharging its content through an openable base, the details of which are shown in Fig. 5c. The container 10" is illustrated with three funnel portions in its lower part, which are sealed by operable pivoting base plates 32. Pulling a pivoting base plate 32 to one side allows the material in the container to fall out through the end of the funnel. In this embodiment, the three 30 pivoting base plates 32 are interconnected, such that pulling one aside, pulls all three. However, in some other embodiments, especially where the container is

compartmentalised, this would not be so. Of course there do not have to be three of these funnels and opening portions. There could be any number, from one upwards.

As can be seen from Figs. 5a to 5c, each pivoting base plate 32, is made up mainly of
5 two vertical end hinge plates 32a, one at each end, and an interconnecting base portion. The base portion has, as its upper part, an arcuate closure plate 32b. The centre of the closure plate 32b is its lowest part. Below this is a triangular support structure 32c. Two of the apices of the support structure 32c are common to the ends of the arcuate closure plate 32b. The third apex is below the centre of the closure plate 32b, this
10 being its lowest point.

The main part of the closure plate 32b closes off the base of the funnel portion 33, thereby preventing material from passing out. The ends of the closure plate, however, extend beyond the edges of the funnel to ensure complete closure. Seals 38 on each
15 side prevent materials slipping between the end of the funnel and the closure plate.

The vertical end hinge plates 32a are pivoted to the outside of the funnel 33, allowing them to swing to either side. In so swinging, the interconnecting closure plate also swings to one side, thereby opening the funnel. The arcuate shape of the closure plate
20 is centred on the pivot axis of the end hinge plates 32a to allow it to swing past the edges of the funnel without allowing any material to get between them. However, this is not essential.

The end plates are shown as solid, but could mainly consist of bars around its edges
25 instead. They are shown as hinged to the funnel 33, but could be hinged to the container walls or other struts. Funnels 33 are shown as narrowing in two orthogonal directions, but do not need to. They need only narrow in the direction of swing of the closure plate. In the other orthogonal direction they only need to allow the end plates to pivot outside them.

30

The closure plates are shown as being perforated. Perforations 32d allow water collected in container 10"" to drain out and maintain the moisture of the material. Below

the perforated closure plate 32b is a filter material 32e, such as a sponge, for example. The filter material 32e allows water to pass through but keeps the material inside the container. Inside support structure 32c is a sloping plate 37. Plate 37 keeps filter material 32e in place and directs water to port 32f. Fig 5b shows two sloping plates 37, 5 37' but may, for example, have only one sloping in one direction. A hose or pipe may be connected to port 32f to direct water beyond the container boundary, thus preventing water from the upper containers dripping into the lower containers.

10 The opening mechanism will now be described. A hook 34 is pivoted on support structure 32c at pivot 34a. Pulling the hook pulls the pivoting base plate 32. In order to open all the compartments of container 10"" at the same time, link bars 36 are provided between the individual pivoting base plates 32. These are pivoted on the support structure 32c at pivot points 36a. The pivot points 36a and 34a may well be common, if required. In addition, springs 36b, 36b' are provided between the funnels and hooks 34 15 and/or link bars 36 to return the pivoting base plates 32 to their closed positions.

20 A remote activation bar 35 below the container 10"" may be used to engage hook 34 when container 10"" is lowered to its discharge position. Its height is set to push the hook upwards during lowering, to pull the base plates 32 open, thereby opening the base of container 10"" and allowing its content to fall out. The height of activation bar 35 is adjustable. This allows for easy control on the opening of bases 32. Once the container 10"" is emptied and the container is hoisted up, bases 32 return to their closed position by gravity (and springs or other biasing means).

25 In order to reduce the load on the base 32, the area of the openable base should be kept low, whilst allowing the contents to be discharged in a controlled manner and within a reasonable rate. This also means that the base 32 should be of a reasonable size and mass.

30 An alternative mechanism for opening the pivoted base plate 32 is to replace the remote activation bar 35 with an actuator 35a, such as a pneumatic or hydraulic cylinder as shown in Fig. 5d. Once the replenishing container 10" is placed at the material

discharge point (which can be a container), actuator 35a is extended and engaged with the catch fixedly mounted on base plate 32, thereby turning it about its pivot and opening the base of the compartment of container 10". Link bars 36' may be used to link the base plates 32 of two or more compartments.

5

A variation of the opening mechanism is to mount the actuator 35a' directly to container 10" as shown in Fig. 5e. This may be useful such as when the lifting facility has limited headroom.

- 10 Fig.s 6a and 6b show yet another embodiment of a container 10^{iv} for discharging its contents through an openable base. As illustrated in these figures, the base of the container comprises a plurality of paired inclined plates 25 extending across the base of the container and spaced apart from each other. These plates 25 slope at an angle of between 20 and 60° to the vertical. They are joined at the upper edges, forming 15 triangular shaped sections 26 across the width of the container. The spaces between each pair of these sections 26 form discharge chutes 27 through which the contents are discharged. At each end of the container is another inclined plate 25 whose upper edge is joined to the end wall and the lower edge joined to the base. These inclined plates 25, together with the nearest inclined plates of adjacent sections 26 also form discharge 20 chutes 27.

- The discharge chutes 27 are kept closed by means of triangular-shaped covers 28 extending across the width of the container. These covers 28 are substantially symmetrical about the vertical. This profile ensures that the flow of the content creates 25 equal opposing dynamic lateral forces on both sides of a cover, and this ensures that each cover 28 is located at the centre of the discharge space 27. The symmetrical sides of covers 28 also ensure that the lateral components of the weight of the content on the cover are balanced whilst the vertical component induces self-closing of the covers.

- 30 Fig. 6a shows actuator means 29 installed vertically in the space directly below covers 28 and part of the container. These actuators are operable to extend vertically for pushing or lifting the covers from their closed position and allowing the contents to

- discharge through the space between the covers 28 and the inclined plates 25. These actuators are connected to direction control valves by pipes conveying the compressed fluid, either pneumatic or hydraulic. These controls (not shown in the figure) are conveniently installed in the void space below the triangular sections 26 and are
- 5 accessible from a side of the container. Of course, a plurality of the actuators may be linked together and are operable as a group from a control valve. Additional set(s) of control valves may be provided at opposite sides of the container for the ease of operation.
- 10 To prevent wear and tear on the actuators 29 due to the flow of the materials discharging from the base of the container, there may be provided a sacrificial cover 29a around each actuator. This sacrificial cover 29a can then be replaced at regular intervals as and when necessary.
- 15 Fig. 6b illustrates the opening of covers 28 in another embodiment when the container is lowered on top of a pollution control container 120 (shown in Fig. 8a or 8b) for discharging its content therethrough. In this embodiment, the actuators 29 do not form part of the container but are located as part of or in addition to the pollution control container 120, at a material landing or discharge site. Similarly, the control
- 20 mechanisms, such as the pneumatic or hydraulic lines and direction flow control valves are also located with the pollution control container 120. This helps to reduce the hardware cost of a container of this embodiment.
- Each actuator in Fig.s 6a or 6b need not be controlled by a separate control mechanism.
- 25 They can be linked up in parallel, or even in series depending on the actuators used. Of course, the number of actuators or control mechanisms is not a limitation.

Fig 6c illustrates another embodiment and the opening of covers 28 with the use of fixed activation bars 29b installed on the pollution control container 120, instead of an extensible piston means. Thus the act of lowering the container causes the discharge chutes to be opened.

It is noted that installation of these actuators 29 or activation bars 29b are not confined to the pollution control container 120. They could be similarly installed elsewhere, such as on a stock container 104, 110 or discharge container 102 (as described later in Fig.s 8) depending on the apparatus adopted for each material handling facility.

5

Fig.s 6d and 6e illustrate yet another method of opening covers 28. As shown in Fig. 6d, the top edge of cover 28 has two points spaced apart from each other, to each of which is attached an end of a rope 28a. The other end of each rope is attached to a cross bar 28b moveably positioned across the container near the top. The ends of the cross bar 28b have hooks for engaging the top edge of the container. Engaging the cross bars 28b, for example using additional hooks from the lifting equipment, and hoisting them up a distance pulls the covers 28 up, thereby opening the chutes to discharge the contents of the container. A pair of sliding guides adjacent the upper edge of the container, or other suitable means for allowing the repositioning of each cross bar 28b 10 after they have been lifted, may be provided instead of hooks.

To prevent wear and tear on the ropes, a sacrificial pipe 28c is provided around each rope 28c. At the base of pipe 28c is attached a V-shaped plate 28d. This V-shaped plate 28d fits onto the upper edge of cover 28 and provides additional support for the pipe or 20 rope.

The cross bars 28b are linked to each other by means of a pair of lengthwise bars 28e so that hoisting the lengthwise bars 28e at either two or four points is sufficient to pull all the covers 28 up and open the discharge chutes 27. Alternatively, a single bar 28e is 25 provided at the centre of 28b linking all the cross bars 28b together and two hook engaging points on 28e may then be used for opening all of the covers 28 simultaneously.

Variations of this embodiment are also possible. A variation is to provide covers with 30 other cross-sections, for example, a partial cylindrical section. Another variation, as shown in Fig. 6f, is to provide a slanting rope with each end attached to each of the two attachment points on cover 28 with the centre part of the rope going over a single cross

bar 28e. In order to help locate cross bar 28e at the centre of the container, at least two cross-bars 28b are provided near the two ends of the container. Sacrificial pipes may be provided here too around the ropes for reducing direct wear and tear of the ropes and indirectly the maintenance cost. Another variation is to do away with the rope but to 5 use the sacrificial pipe or some other link, for example, a cable or chain, for lifting the covers 28.

Another aspect of the invention is shown in Figs. 7a - 7c. In this aspect, open top or opened top containers are discharged by turning them upside down using a slewing 10 apparatus 40.

A support structure 47 rotatably mounts a slewing structure 42, using a slew ring 41. An outer ring 41a of slew ring 41 is fixedly mounted on the slewing structure 42. An inner ring 41b of the slew ring 41 is mounted on the support structure. A motor, 15 gearbox and pinion assembly 48 is mounted on support structure 47 for turning slew ring 41a. Depending on the turning torque required, additional drive assembly may be provided.

Slewing structure 42 has a base portion with twistlocks 45 for supporting and affixing 20 to the lower corner castings of a standard freight container. It also has two vertically operable hydraulic actuators 43 at its sides for adjusting the heights of two vertically movable clamping supports 44. The tops of these supports 44 have twistlocks 46 for affixing to the upper corner castings of a standard freight container, for clamping it against the base portion. The upper twistlocks 46 are on arms which can rotate about 25 vertical axes in the vertical portions of the clamping supports 44. They can be turned through 90° to become clear of the container to be handled. This allows the container to be loaded vertically onto the slewing structure 42. The angle of rotation could be slightly less or could be more, even allowing 360°. The axis could even be horizontal to allow the arms to pivot in a vertical plane.

30

The clamping supports 44 and upper twist locks 46 can also or alternatively pivot about a horizontal axis between first and second positions. In the first position support 44 is in

a horizontal position with twistlock 46 directed downwards. Support 44 can also swing upward to its second position and become clear of the way for a supply container to be lowered vertically. Once the lower twist locks 45 have engaged with the lower corner castings of the container, the supports 44 and upper twist locks 46 are moved back to 5 their first positions. They are then lowered by retracting actuators 43 before engaging with the upper corner castings. These operations can also be simultaneous or ordered in other ways.

When a container is locked onto the slewing structure 42, the slew ring 41 is rotated to 10 turn the slewing structure 42 and container through substantially 180° to empty out its contents. It can then return to its upright position back through the 180° it came or through the remaining 180°.

Support structure 47 can be mounted on the ground, on a trailer, on a forklift or on 15 other suitable structures or vehicles.

As full containers can be very heavy, the preferred embodiment has two such slewing apparatuses 40, one for each end. A preferred arrangement is shown in Fig. 7c, where two slewing assemblies 40 are mounted on a guide rail 49 to allow for variations in 20 lengths of containers. Although both are shown as being at adjustable positions, only one needs to be adjustable or on the rail.

Fig. 8a illustrates a containerised batching plant where various components are batched together in bulk, for instance for concrete. Each type of raw material used has its own feeding stack 100, which comprises an assembly of containers stacked on top of each 25 other. The bottom, discharge container 102 has an outlet chute 50 through which the material is transferred by a feeder, for example a conveyor, to a scaling station 60 before it is blended with other components in a station 70. From there it may be loaded into a mobile mixer or other container. Station 70 may be a mixing device and/or a 30 stock holding device.

Depending on the amount of stock of material required, there is at least one stock container 104, 110 stacked above the discharge container 102. For purposes of automation, a minimum material level sensor 103 is provided near the base of the discharge container. Two stock containers 104, 110 are shown. The three containers 5 hold a stock of the relevant material. Near the top of the stock container(s), is a material level sensor 105 for detecting the upper limit of the material stock.

Fig. 8b shows a container 10 full of relevant materials on the top of the stack 100. It empties downwards into a pollution control container 120 which itself empties into the 10 top-most stock container 104. A retractable vibrator may be connected to the outside of the supply container 10. This is used as and when necessary, for example when the sand is wet and it is difficult for it to begin to fall by gravity or to minimise the amount of wet sand remaining on the inside surfaces of the supply container.

15 The opening mechanism may be any shown earlier, e.g. a movable base or by tipping the container upside down, using the slewing mechanism described earlier.

Discharge container 102 is exemplified by the different embodiments of Figs. 8c - 8e. Each drawing shows a side view of the container and an end view. In each case the 20 contents of the container are moved to a discharge point by at least one screw.

The pollution control container 120 is shown in more detail in Fig. 8f. It is illustrated with two funnels 126. These collect and direct the material falling into this container from above. Below and to the sides of the funnels 126 are a plurality of exhaust fans 25 122. Separating each fan from the inner chamber of the container is a filter 124 for catching fine dust particles in the exhaust air when the raw material is released into the feed stack from container 10. The undersides of the funnels 126, above the exhaust fans and filters act as diverting shrouds for creating venting spaces for the fans and filters. Below each filter section is an enclosure 128 to trap dust particles that accumulate and 30 fall off the filter. On the bottom of each enclosure is a valve 129 for periodic removal of the accumulated dust. This aspect of the invention provides for an abatement of dust pollution inherent in this industry.

The fans 122 have a controller to operate them in switchable bi-directional rotations. For normal pollution control during the material discharge process, the fans 122 are operated as exhaust fans with the impellers rotating in the first direction. To clear the 5 dust adhering onto the filter and forcing the dust particle to collect in enclosure 128, the fans are operated as blowers with the impellers rotating in the reverse direction. With this feature, the filter is operated with higher efficiency. Unnecessary machine breakdown due to filter choking is avoided. This filter cleaning process may be carried out periodically using automatic and interlocking control. Additional vibrating means 10 connected to the filter can also be used to improve the filter efficiency.

The funnels in the pollution control container may divert the flow of materials to different storage points when a compartmentalised container 10", 10"" is used to supply different components.

15 Above the stations 60 and 70 is another pollution control container 80, as shown in Fig. 8a. As with the pollution control container 120 described earlier, there is a plurality of exhaust fans 84 with a filter 86 separating the fans from the other chamber of the container into which the raw materials are conveyed through chute 50. Above the filter 20 and near the top centre of the container, there is a plurality of anti-choke cylinders 82. These cylinders are operable to shake off the dirt on the filter to prevent the filters from being clogged up and become non-functional.

Depending on the reachable height of the handling facilities at the batching plant, the 25 feed stack 100 (comprising at least one stock container, a pollution control container and the material supply container) may be mounted directly above the stations 60 and 70. This is illustrated in Fig. 8b.

A pollution control container 120' for use with the container slewing apparatus 40 30 described earlier is illustrated from the side in Fig. 9a and from the top in Fig. 9b. This container 120' is larger than standard containers. However it is balanced such that it can

stack on top of them and has twist locks suitably positioned for that purpose. It is shown stacked on top of stack 100.

As in the other pollution control container described earlier, there is a plurality of fans and filters. Funnel 126' is used to divert the falling materials into the container below, such as the stock container 104 or other containers in stack 100. This pollution control container 120' has a large frame 132, which is shown in full in Fig. 9c, and encloses a pair of slewing apparatus 40, mounted on a guide rail 49. This is mounted onto the base 130 of frame 132 by means of twist locks. 120' also has retractable covers 131 at the top. These are closed when a supply container is loaded onto the slewing apparatus for it to be overturned and the contents discharged. In this manner, the dust created is contained inside 120' and the filters trap the dust particles from polluting the environment. As with the other pollution control containers, the fans' rotation may be reversed periodically to clear the dust particles from clogging up the filters. Additional vibration means may also be used to improve the filter efficiency.

Fig. 10 shows yet another embodiment of a material feeding stack. A transtainer 150 moves along a set of rails and loads/unloads the material supply containers 10 onto/from on top of stock containers 104'. This transtainer 150 has a finite working height. In this case, the pollution control features of 120 are integrated into the upper part of stock container 104'. Below container 104' is a scaling conveyor 152 for feeding the right amounts of the different material components to a link conveyor(s) 153 for discharge into station(s) 70.

Each station 70 is enclosed in a pollution control enclosure 120". As with the other pollution control features, there may be a plurality of fans and filters for reducing dust pollution. Additional vibration means may also be provided.

In accordance with the requirements of standard freight containers, they are stacked on top of each other with only the corner castings of one container in contact with those of the other container. This means that the interface between containers is open and dust pollution can emanate from or enter into the interfacial gaps. Therefore portable seals

are provided to ensure that this pollution control means is effective. Figs. 11a - 11d illustrate the use of the seals 200, 210. In the case of seal type 200, these can be inserted from one side once the containers are in situ. Seals 200 are secured in position by means of rotatable locks 201. These locks may be spaced at regular intervals, for 5 example every 0.6 m. In the case of seal 210, these must be placed on a lower container before an upper container is placed.

Containers are usually filled with raw building materials using rather messy bulk transfer, eg. by means of conveyors, clam shell bucket and cranes; shovel and tractor, 10 etc. During such filling processes, raw materials unavoidably fall in between the containers. This is wasteful. Further, when this process is repeated several times it leaves mounds of material which make placing of the containers awkward and need removing. To minimise accumulation of materials, a cover 140, as shown in Fig. 12 a and 12b, is used. This clips containers together along their edges, with one cover 15 covering two adjacent lengths, sides or other edges, thereby preventing material falling between them. A different cover 142 is used to cover adjacent edges and corner castings. Otherwise the material may fall in there too and make it difficult to lock them properly. Between them covers 140,142 can be used for every adjacent edge. For instance, along the top, several of cover 140 can be used along an adjacent length, 20 depending on the lengths of the containers.

Fig. 13 illustrates a system for a container port for containerised handling of raw building materials. From a barge or container ship 300, the containers are unloaded by means of a crane or other means (not shown), and unloaded onto prime movers 350 for 25 transfer to the stacking yard by another crane, typically a rubber-tyre gantry crane 400. Within the crane operating area, is a concrete production area 500, for instance the batching plant described earlier. Each component of concrete is loaded into the scaling station 60 to determine the amount before it is loaded into the station 70. This may include the relevant amount of water if it is required wet immediately. However, a 30 customer may order only the raw building materials. In this case, a container with the required type of raw materials is retrieved by the crane, loaded onto a container truck for dispatch to the customer, without going through the concrete production area.

The containers from the barge or ship can also be known container mixers. In this case, the drums of the container mixers may already be carrying the right amounts of sand and aggregate to produce a common grade of concrete. These are stacked away for 5 stockpiling or are sent to the production area 500 where water, cement and other additives are scaled and added to produce concrete. Alternatively, a separate grouting station 600 is provided just to fill these container mixers.

It is also possible to use the container of this invention for shipping or transferring of 10 other materials or general cargoes that can be unloaded by opening of the base plate or sections of it. This general cargo includes, but not limited to, any one or more of: goods on pallets; materials in drums or cartons; and machinery. This container, further comprising one or more doors at one or more of the ends and/or sides allow easy loading of goods.

15

While only a few embodiments of the apparatus and system have been described and illustrated, it is to be understood that many changes, modifications and variations could be made to the present invention without departing from the scope of the invention.

CLAIMS

1. A container for transferring bulk materials, being shaped and dimensioned in at least length and width to be handled as a standard freight container and having a base, 5 at least a portion of which is openable for discharging contents of the container therethrough.
 2. The container according to claim 1, wherein said at least a portion of said base is slidably openable.
- 10
3. The container according to claim 1 or 2, wherein said at least a portion of said base is hingably openable.
- 15
4. The container according to any one of the preceding claims, wherein the openable portion of the base comprises at least one pair of two cooperating halves, with one cooperating edge having an overlap over the other when said base is closed.
- 20
5. The container according to claim 4, wherein both halves of the or each pair are openable.
- 25
6. The container according to claim 1, having at least one compartment, the or each compartment having at least one lower section of reducing cross-sectional area, each leading to an opening, and a closure assembly for the or at least one opening, for releasing or retaining the compartment's contents.
 7. The container according to claim 6, wherein said at least a portion of said base comprises an arcuate portion, operable to swing away from said opening.
- 30
8. The container according to claim 6 or 7, wherein the or at least one closure assembly is pivoted.

9. The container according to claim 6, 7 or 8, further comprising hook means for moving the closure assembly to an open position to allow the contents of its compartment to discharge.
- 5 10. The container according to any one of claims 6 to 9, having a plurality of said closure assemblies pivotably linked by linkage means so that opening one opens them all.
- 10 11. The container according any one of claims 6 to 10, wherein the or at least one closure assembly has a perforated closure plate for allowing fluid to drain through.
12. The container according to claim 11 further comprising a filter means disposed below the or at least one perforated closure plate for allowing fluid to drain through but keeping material inside the container.
- 15 13. The container according to claim 11 or 12, wherein the or at least one closure plate is arcuate and is arranged to have a substantially constant gap between it and its opening, as it is opened.
- 20 14. The container according to claim 1, wherein said base comprises a plurality of sloped portions spaced apart from each other with the spaces between portions which slope down towards each other forming discharge chutes.
- 25 15. The container according to claim 14, wherein said base further comprises sloping portions along both ends of the container to facilitate the discharge of the contents and prevent materials from accumulating at the ends during discharge.
- 30 16. The container according to claim 14 or 15, further comprising a plurality of moveable covers on said discharge chutes operable to close and open the discharge chutes.

17. The container according to claim 16, wherein said covers can be lifted to open the discharge chutes for discharge.
18. The container according to claim 17, further comprising piston means for lifting
5 said covers.
19. The container according to claim 17, further comprising access means to allow
actuators to access and lift said covers from below the container.
- 10 20. The container according to claim 17, further comprising lifting means attached
to the upper sides of the covers to lift them from above
- 15 21. The container according to claim 20, wherein said lifting means comprise
flexible means chosen from the group comprising: cable, rope and chain.
22. The container according to any one of the preceding claims, being
compartmentalised, the base of each compartment being openable and closable
independently of each other.
- 20 23. The container according to any one of the preceding claims, also being suitable
for transferring general cargo, including, but not limited to, any one or more of: goods
on pallets; materials in drums or cartons; and machinery.
24. The container according to any one of the preceding claims, further comprising
25 one or more doors at one or more of the ends and/or sides.
25. The container according to any one of the preceding claims wherein at least a
portion of the top is slidably or hingably openable.
- 30 26. The container according to any one of the preceding claims, further comprising
locking and securing means for securing the openable base portions in a closed
position.

27. The container according to any one of the preceding claims, further comprising piston means for opening and closing the at least one openable portion of said base.
- 5 28. The container according to any one of the preceding claims, further comprising seal means around the at least one openable portion of said base, to prevent contamination of the movement mechanism and to minimise wastage of materials.
29. Slewing apparatus for turning a container comprising:
- 10 a supporting portion;
- a rotatable, container holding portion; and
- means for rotating said container holding portion on said supporting portion;
- wherein
- said container holding portion comprises:
- 15 a base portion for supporting and fastening to the lower part of a container; and
- arm means extensible in a first direction and having fastening means with an extent in at least a second plane, orthogonal to said first direction, for fastening to the upper part of a container;
- wherein said fastening means is rotatable between a first position where it
- 20 cannot fasten said container, whilst the container is supported and fastened to said base portion, and a second position, where it can fasten said container, whilst the container is supported and fastened to said base portion.
30. Apparatus according to claim 29, wherein, when said fastening means is in said
- 25 first position, a container can be placed for fastening to said base portion or removed therefrom, and, when said fastening means is in said second position, the fastening means obstructs a container from being placed for fastening to said base portion or removed therefrom.
- 30 31. Apparatus according to claim 29 or 30, wherein fastening means is rotatable about at least a vertical axis.

32. Apparatus according to claim 29 or 30, wherein fastening means is rotatable about at least a horizontal axis.
33. Apparatus according to any one of claims 29 to 32, wherein the base portion is 5 arranged to support a container from below and said fastening means are arranged to fasten to a container from above.
34. Apparatus according to any one of claims 29 to 33, wherein
10 said base portion includes a pair of twistlocks for fastening to lower corner castings of a container; and
said fastening means includes a pair of twistlocks for fastening to upper corner castings of a container.
35. Turning apparatus for turning a standard freight container over, comprising two 15 slewing apparatus facing each other, each as defined in any one of claims 29 to 34.
36. Turning apparatus according to claim 35, further comprising rail means on which at least one of said slewing apparatus is movable mounted for adjusting the relative distance between the container holding portions of the two slewing apparatus.
- 20
37. A system for producing a mixture of components, comprising:
at least one stocking section having a stocking chamber for a component; and
a scaling section for determining and delivering a scaled amount of each component;
25 wherein said system is arranged such that a container may be stacked on top of said stocking section for replenishing said component therein.
38. The system according to claim 37, further comprising a section for holding or
blending said scaled components before discharging the mixture.
- 30
39. The system according to claim 37 or 38, operable such that a container according to any one of claims 1 to 28 may be stacked on top of said stocking section

for replenishing said component therein by opening said base and discharging said material therethrough.

40. The system according to claim 37 or 38, further comprising slewing apparatus 5 according to any one of claims 29 to 34 or turning apparatus according to claim 35 or 36 on top of said stocking section, for turning a container over to replenish said component therein.

41. The system according to any one of claims 37 to 40 having a plurality of said 10 stocking sections.

42. The system according to any one of claim 37 to 41, wherein a material transfer means is provided to move said component from the bottom of the or each stocking section to the top of said scaling section.

15 43. The system according to any one of claim 37 to 42, wherein the or each stocking section includes a pollution control section for use between said container and said stocking chamber for abating particulate pollution as material is discharged into the stocking section.

20 44. The system according to claim 43, wherein the stocking section is shaped, dimensioned in at least length and width and operable as a standard freight container and includes said pollution control section.

25 45. The system according to any one of claims 37 to 43, further comprising a pollution control section disposed on top of said scaling section for abating particulate pollution.

30 46. The system according to claim 43, 44 or 45, wherein at least one pollution control section comprises at least one exhaust fan separated from an inner portion of the said section by filter means.

47. The system according to claim 46, wherein at least one pollution control section further comprises a plurality of diverting elements for creating venting spaces for said at least one exhaust fan and filter means to operate.
- 5 48. The system according to claim 46 or 47, wherein the at least one exhaust fan is operable in one direction as an exhaust fan for abating particulate pollution, or in the reverse direction as a blower to clear particulates from clogging up the filter means.
- 10 49. The system according to claim 48, wherein the at least one exhaust fan is operable in the reverse direction at periodic intervals to clear dust particles from clogging up the filter means.
50. The system according to claim 48 or 49 further comprising vibration means connected to the filter means to improve efficiency.
- 15 51. The system according to any one of claims 37 to 50, further comprising interfacial seal means for interface gaps between said container and said stocking section and/or between said pollution control means and said stocking section.
- 20 52. The system according to any one of claims 37 to 51, wherein at least one of the one or more stocking section, scaling section, mixing section, holding station and the one or more pollution control sections is shaped, dimensioned in at least length and width, transportable and stackable as a standard freight container.
- 25 53. The system according to any one of claims 37 to 52, being a system for producing concrete.
54. The method of producing a mixture using the system of any one of claims 37 to 53, comprising the steps of:
- 30 dropping components into stocking sections;
transferring said components from said stocking sections into said scaling section;

scaling said components and emptying said scaled components into said mixing section; and

blending said components.

5 55. Cover means clipably attachable to adjacent edges of adjacent freight containers to prevent materials falling therebetween.




56. Cover means according to claim 55, including cover portions to cover corner castings.

10

57. Interfacial seal means for sealing interfacial gaps between containers stacked on top of the other.

15 58. A container, apparatus, system or method substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

1 / 19

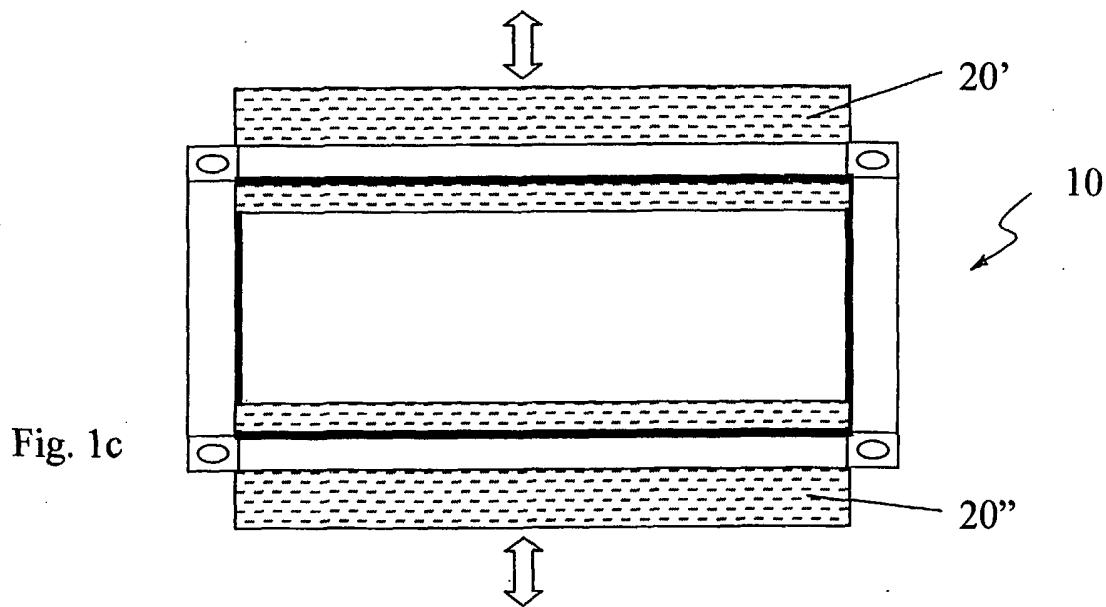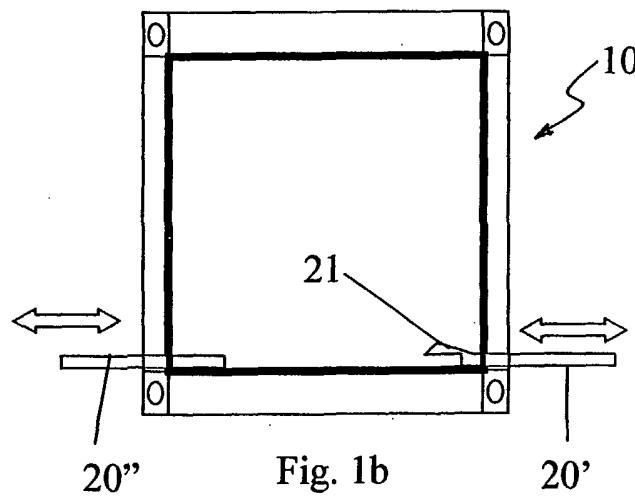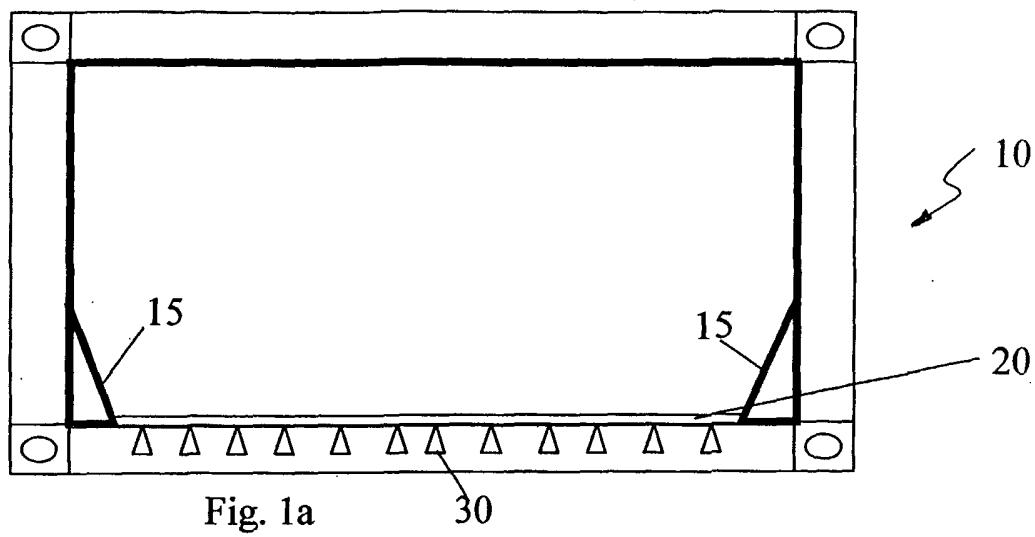

2/ 19

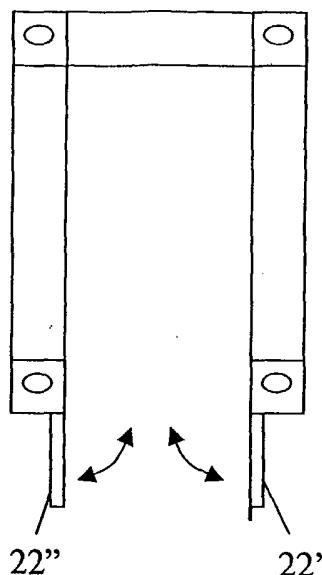


Fig. 2b

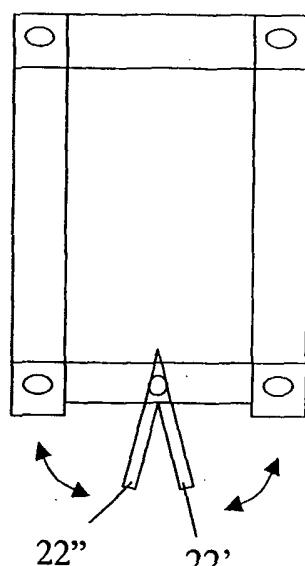


Fig. 2d

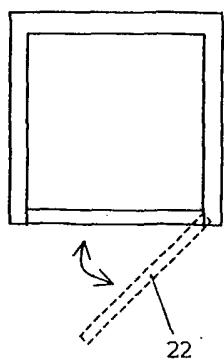


Fig. 2a

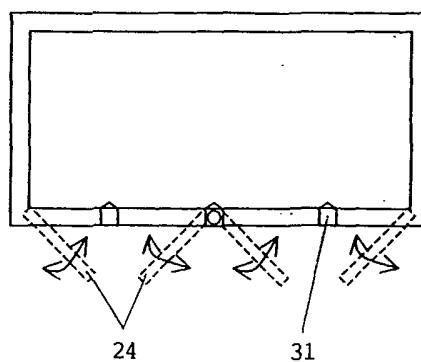


Fig. 2c

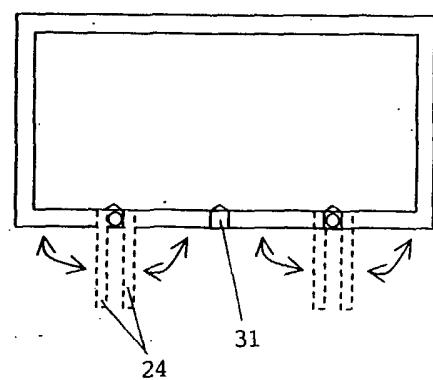


Fig. 2e

3/ 19

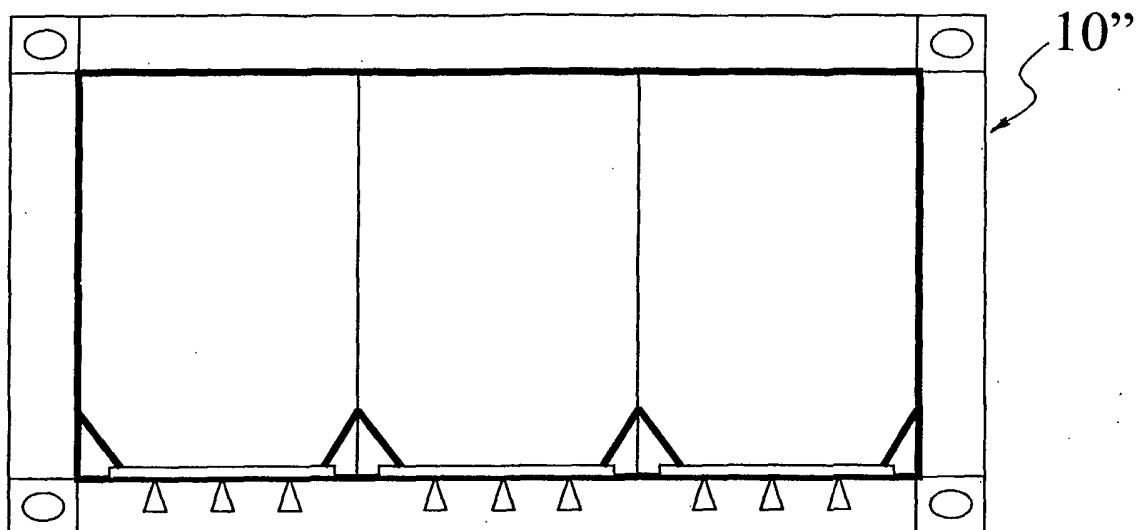


Fig 3a

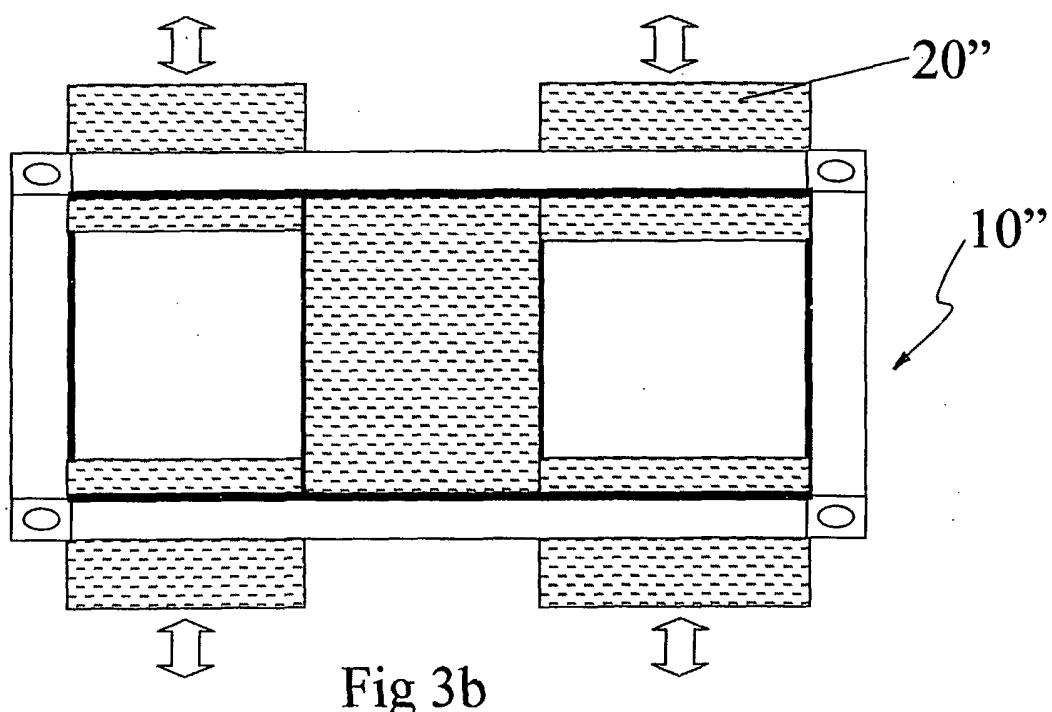


Fig 3b

4/19

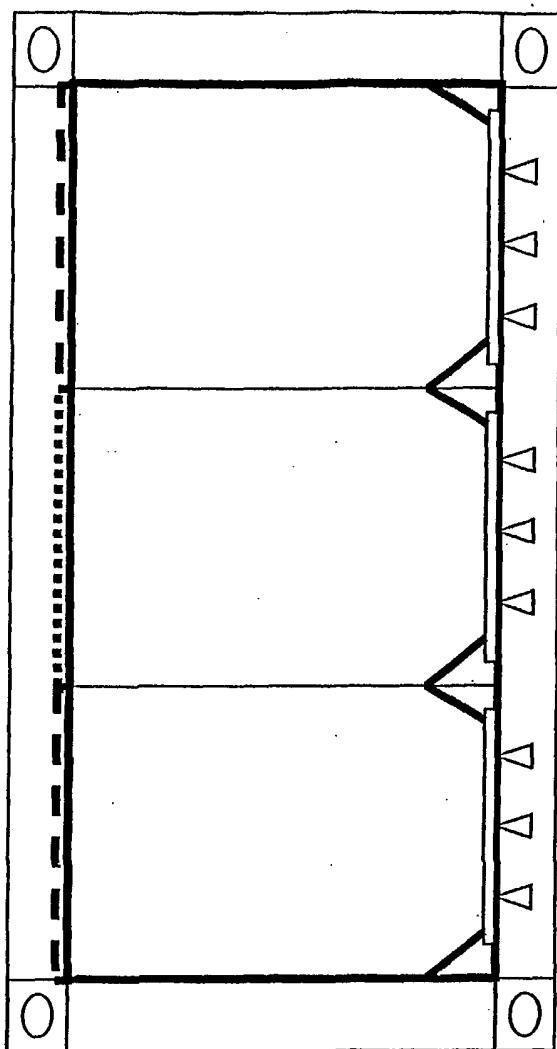


Fig 4b

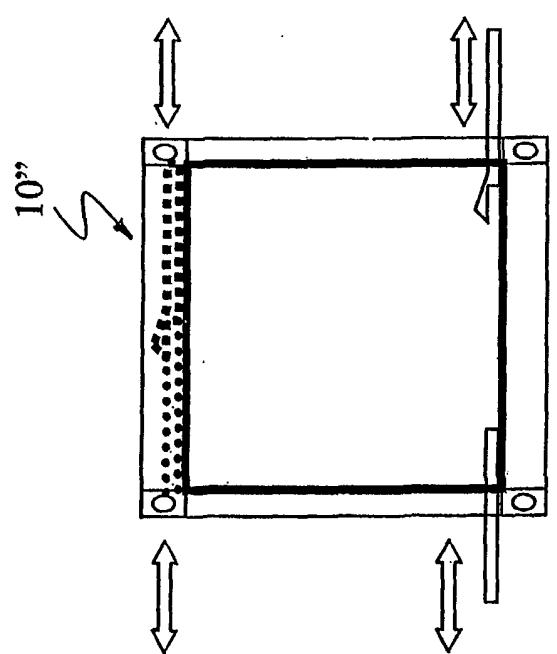


Fig 4a

5/19

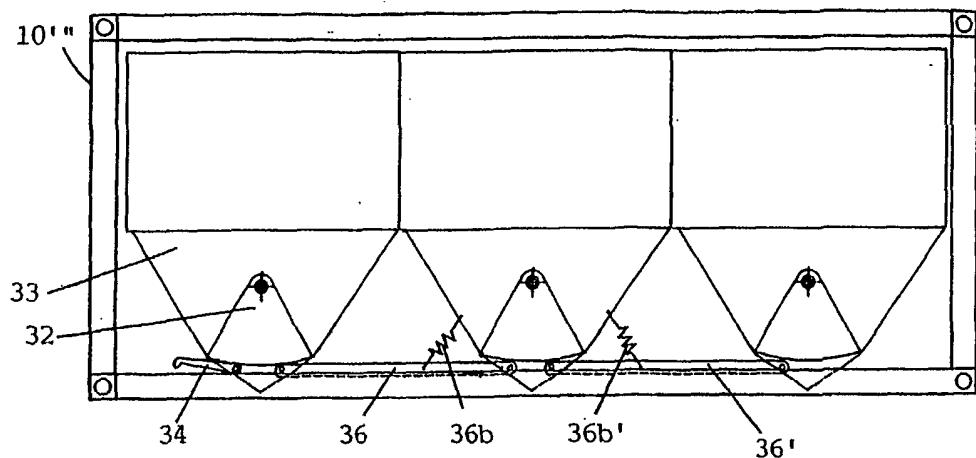


Fig 5a

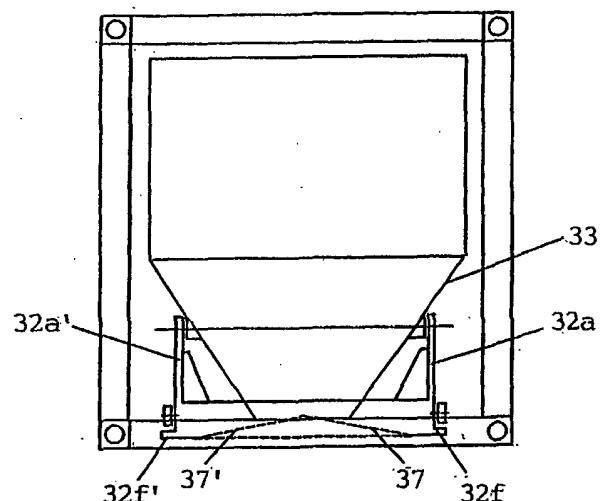


Fig 5b

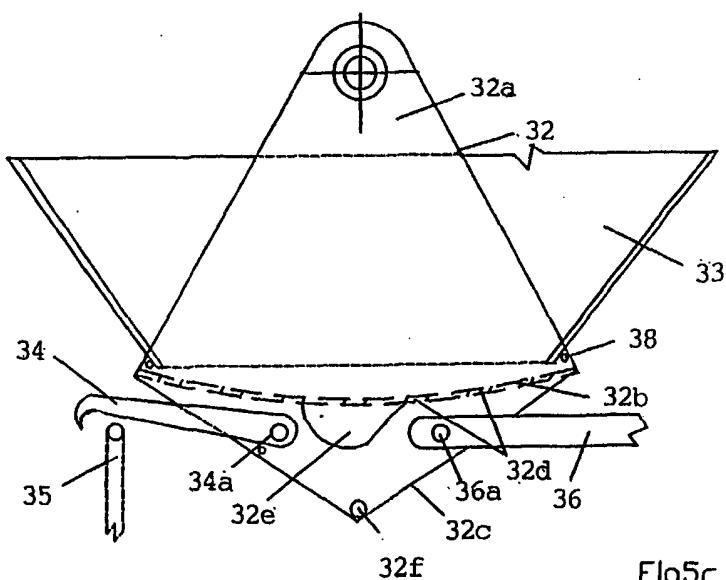


Fig 5c

6/19

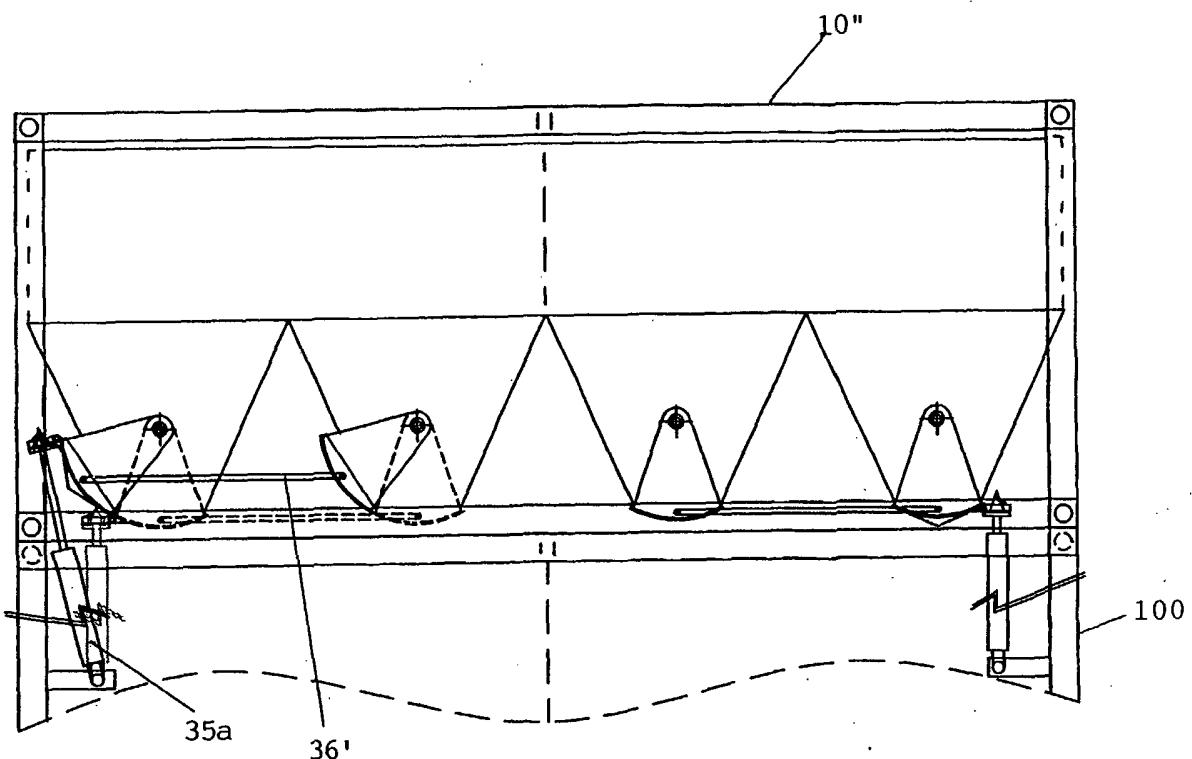


Fig. 5d

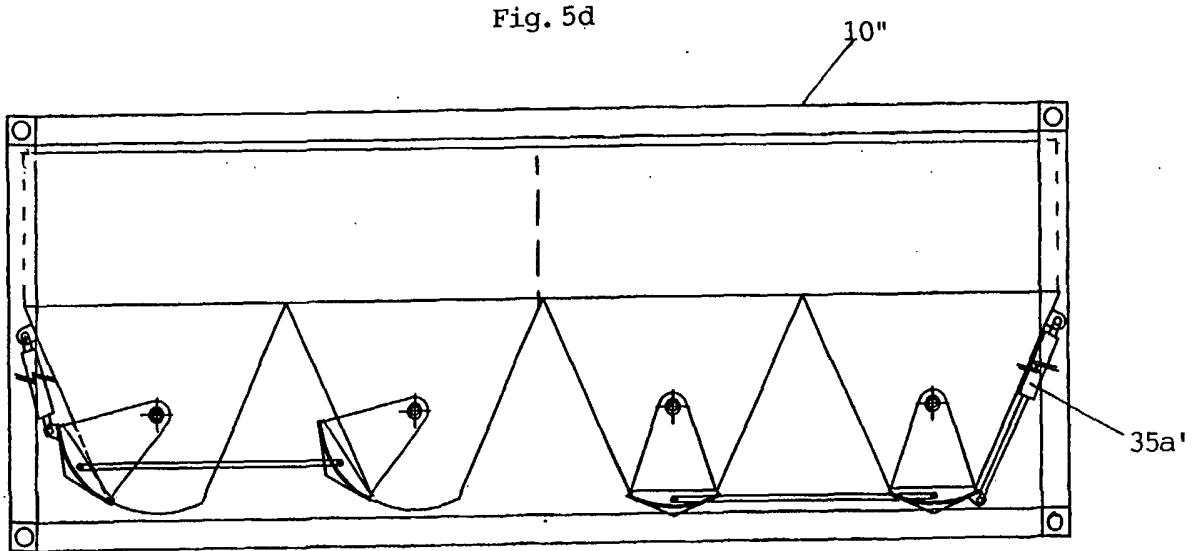


Fig. 5e

7/19

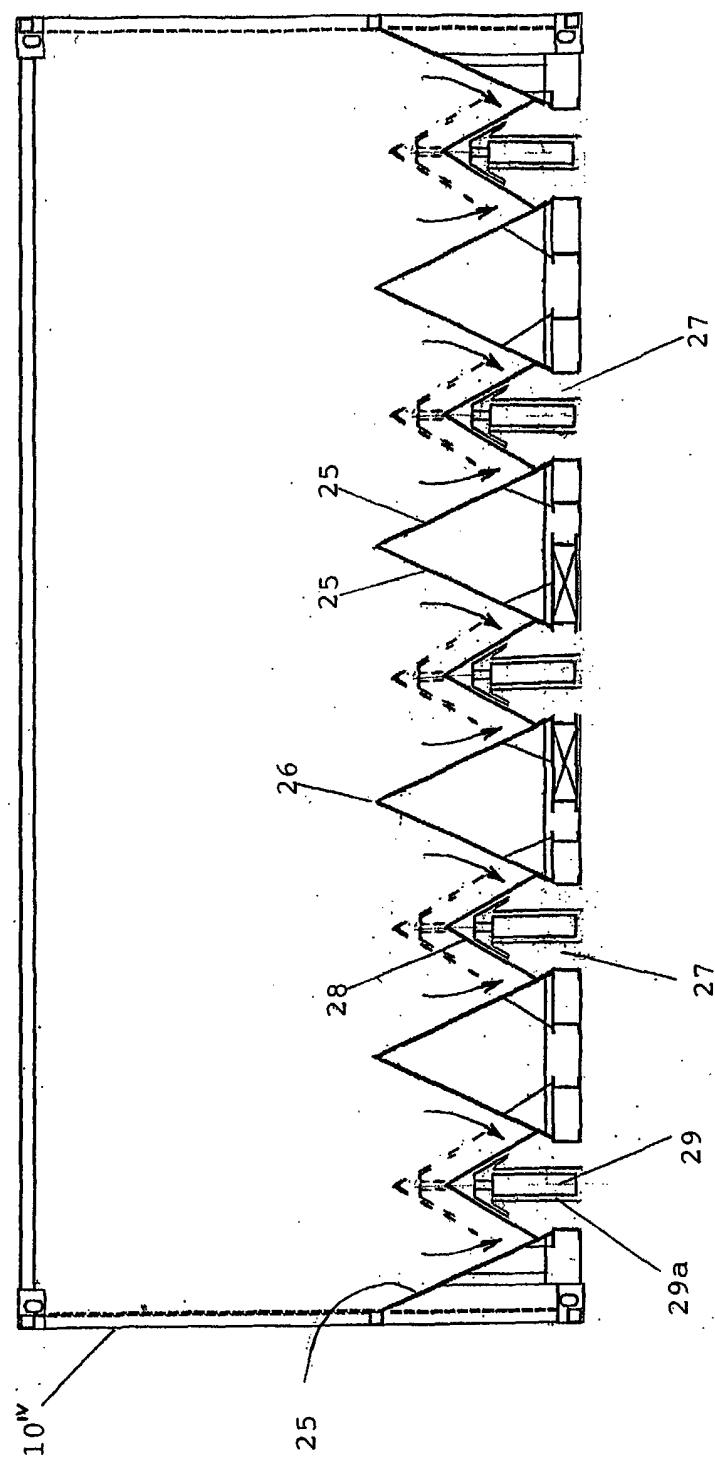


Fig. 6a

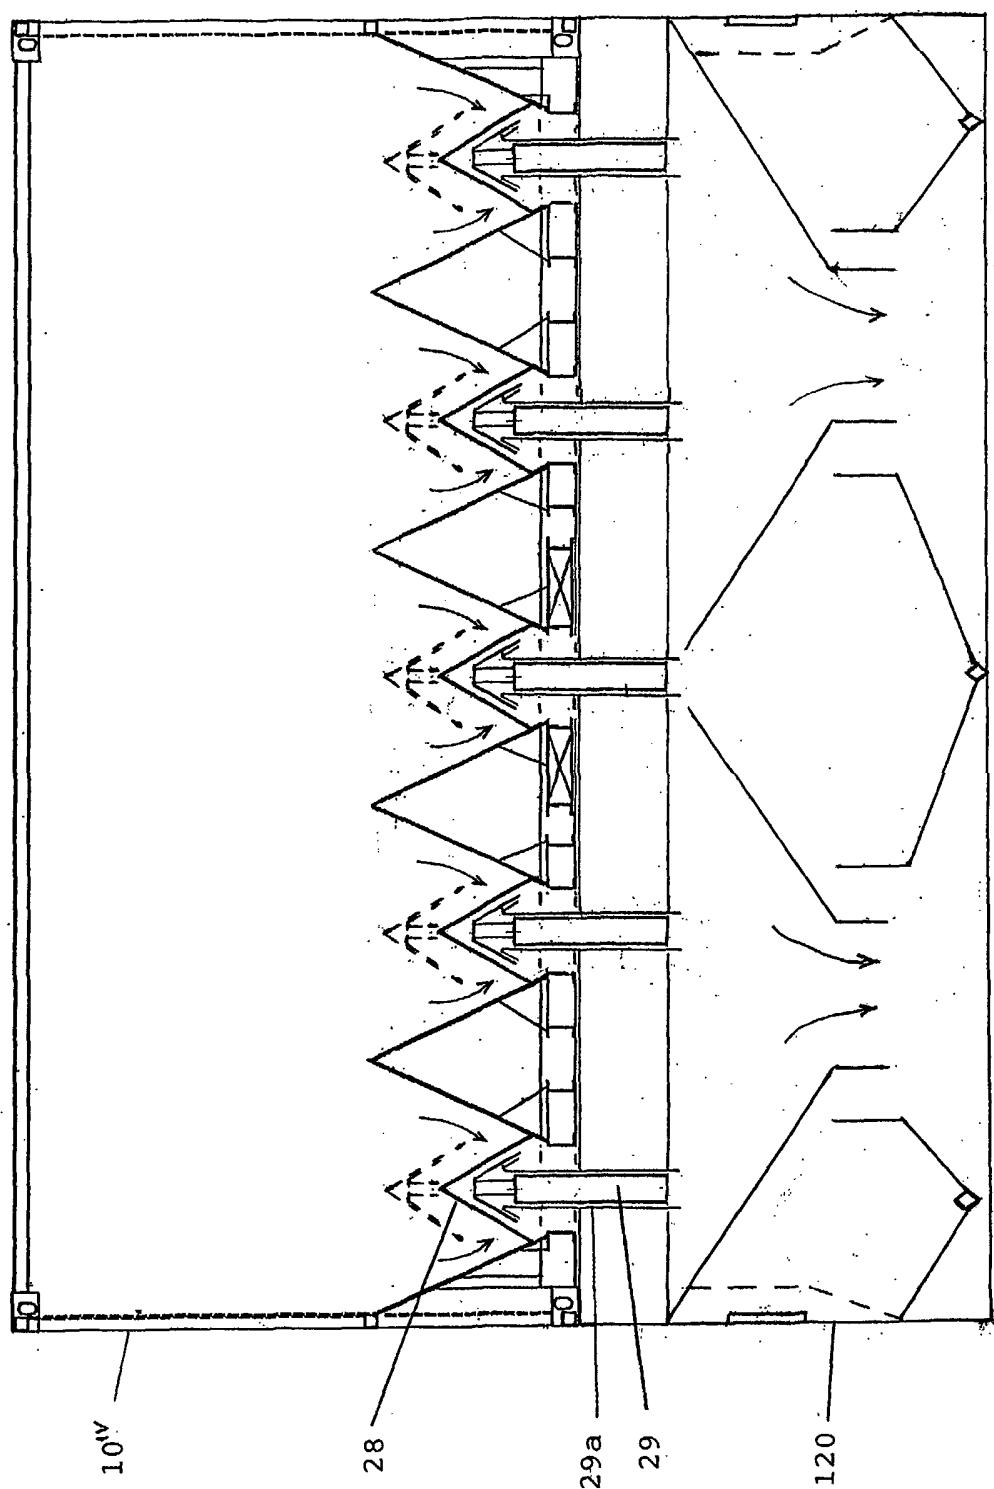


Fig. 6b

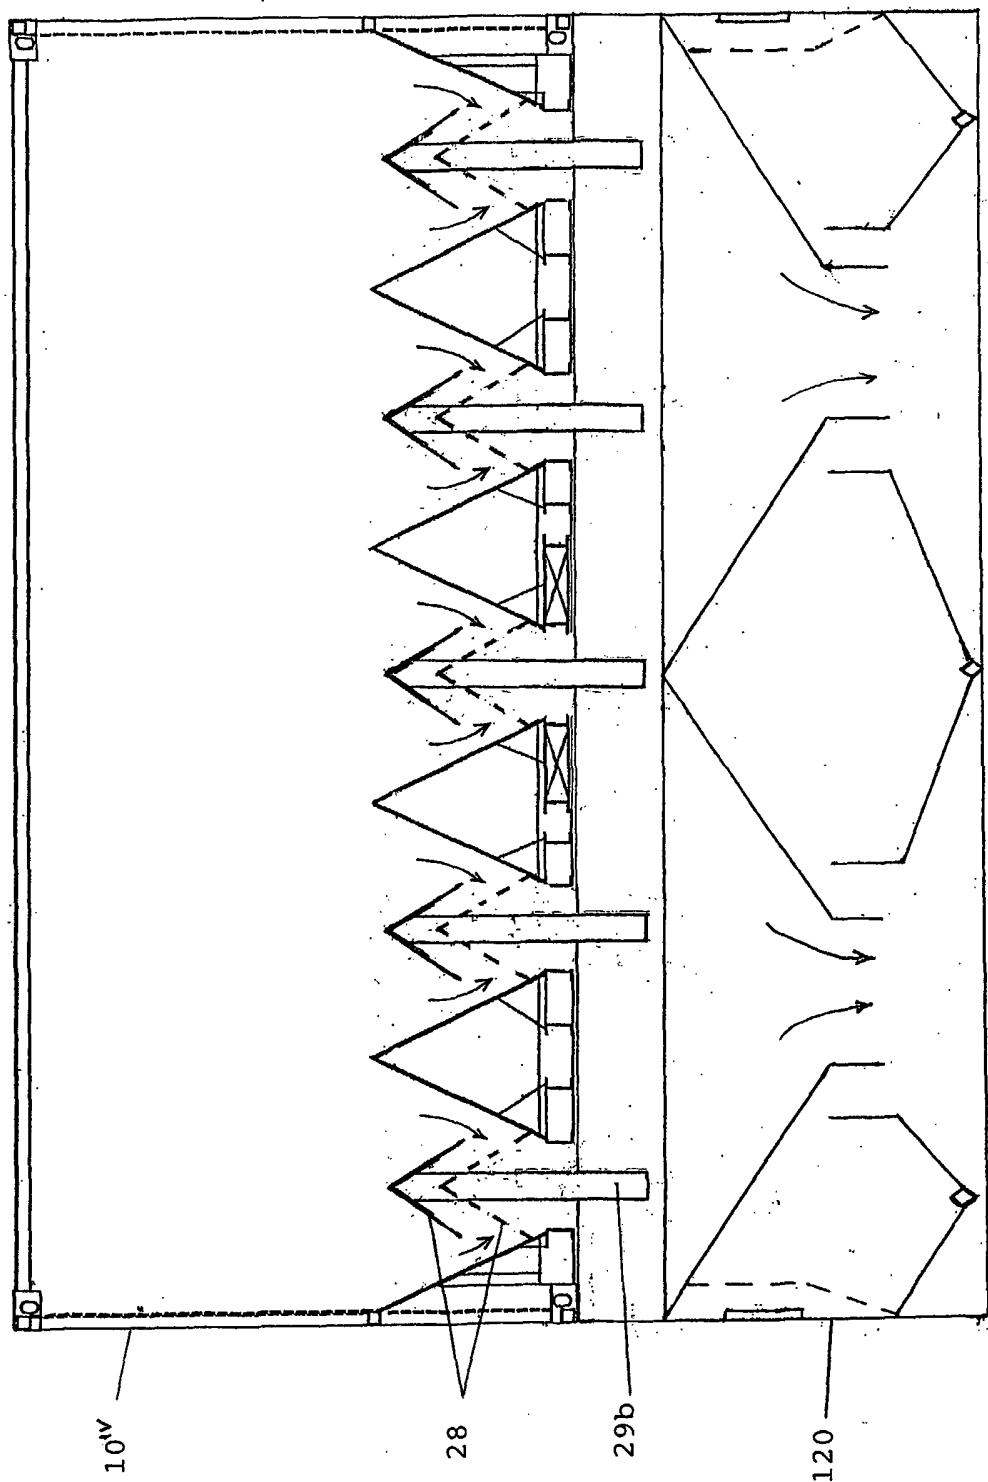


Fig. 6c

10/19

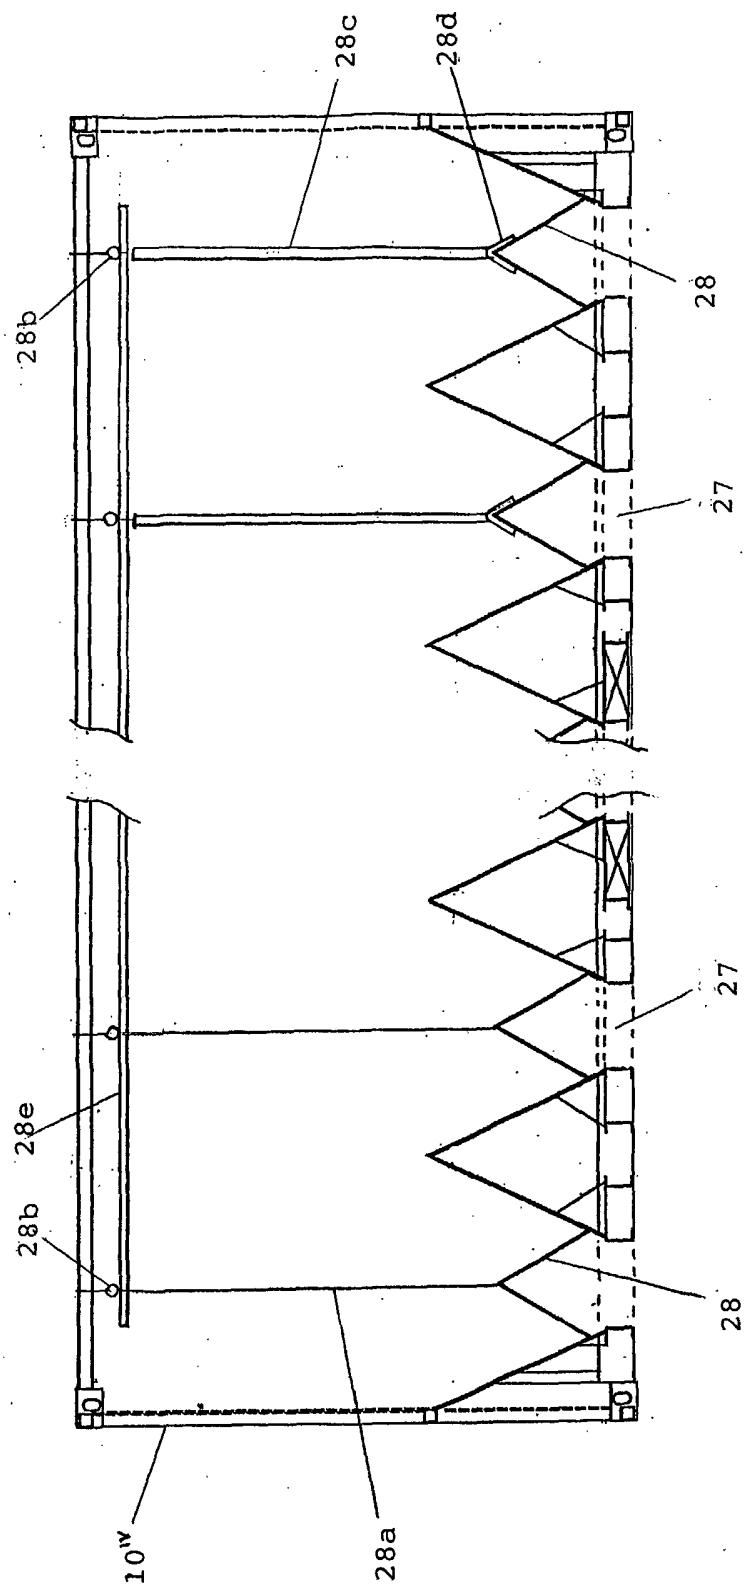


Fig. 6d

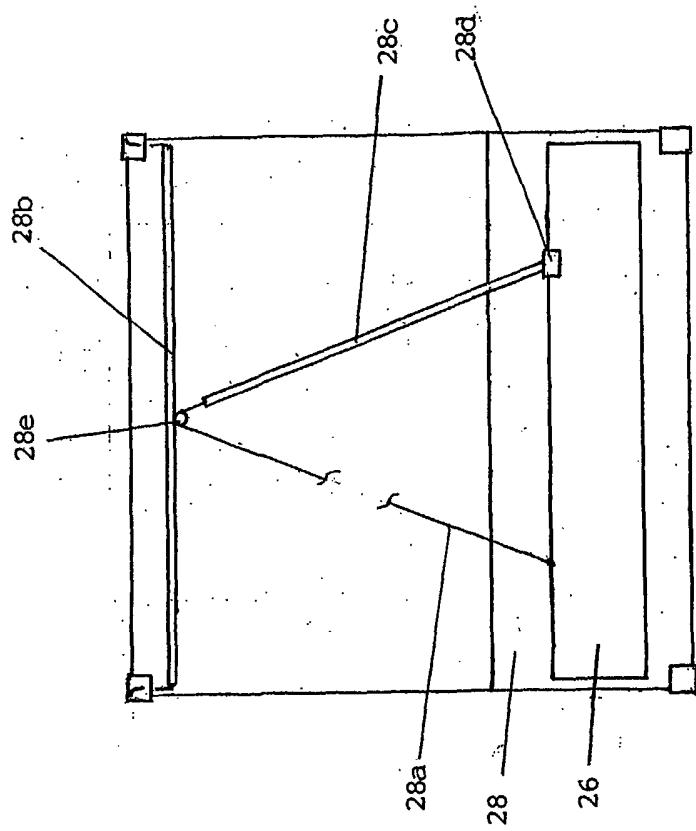


Fig. 6f

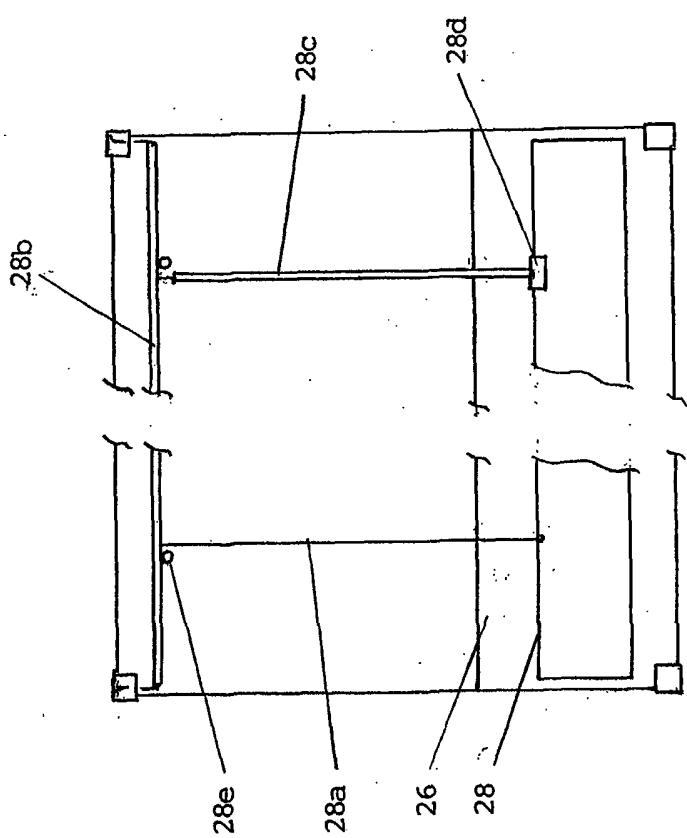


Fig. 6e

12/19

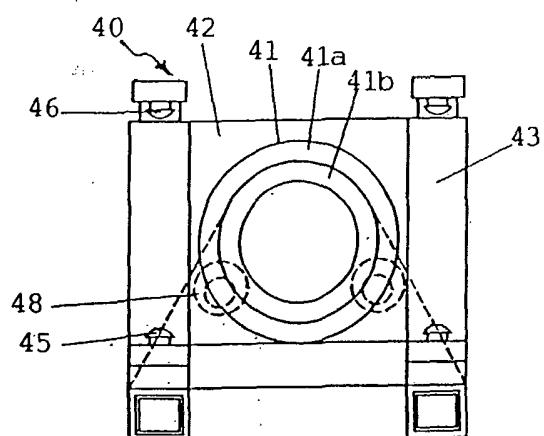


Fig. 7a

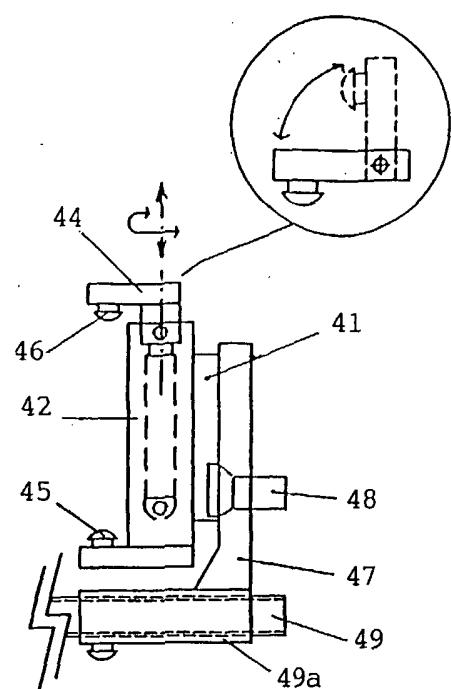


Fig. 7b


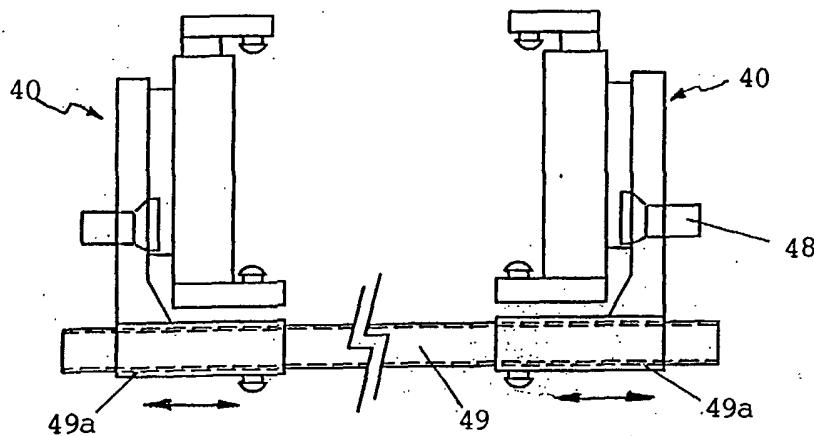


Fig. 7c

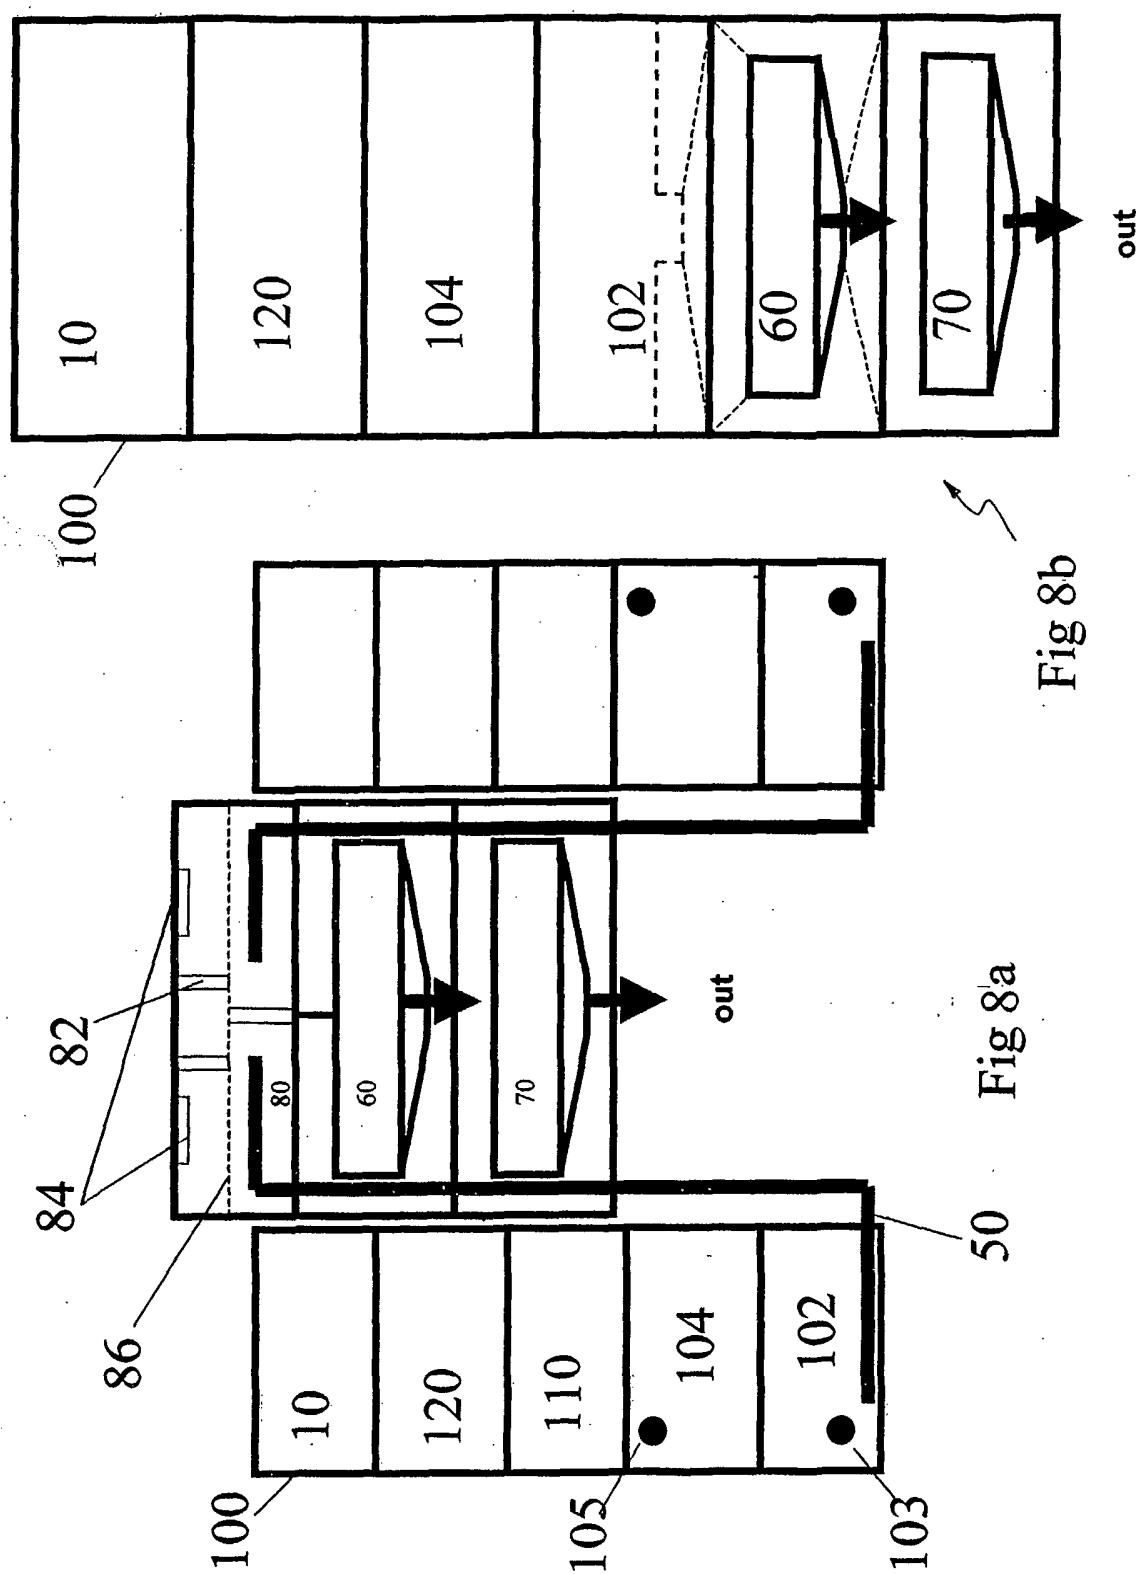

14/19


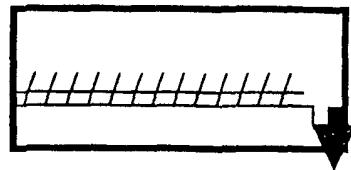
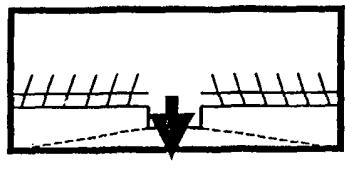
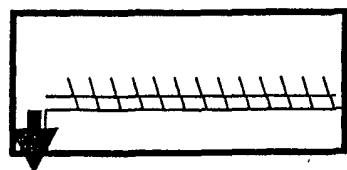


Fig. 8c




Fig. 8d




Fig. 8e

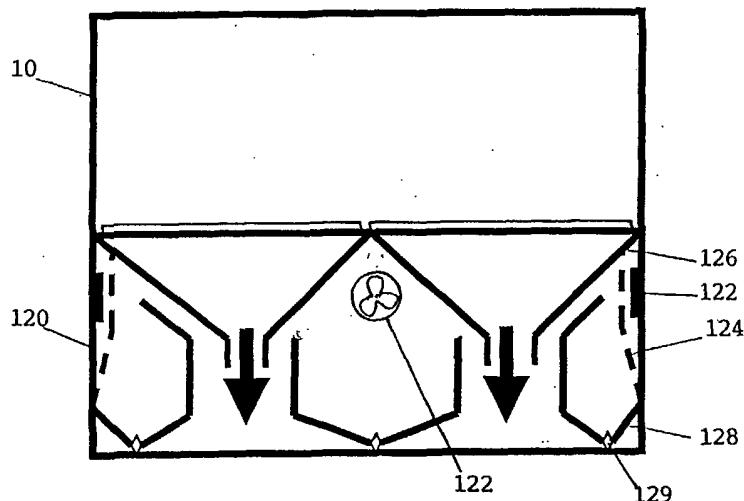


Fig. 8f

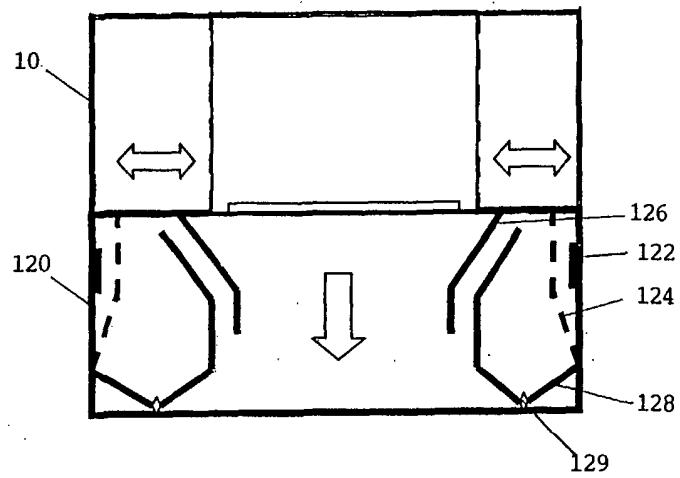


Fig. 8g

15 / 19

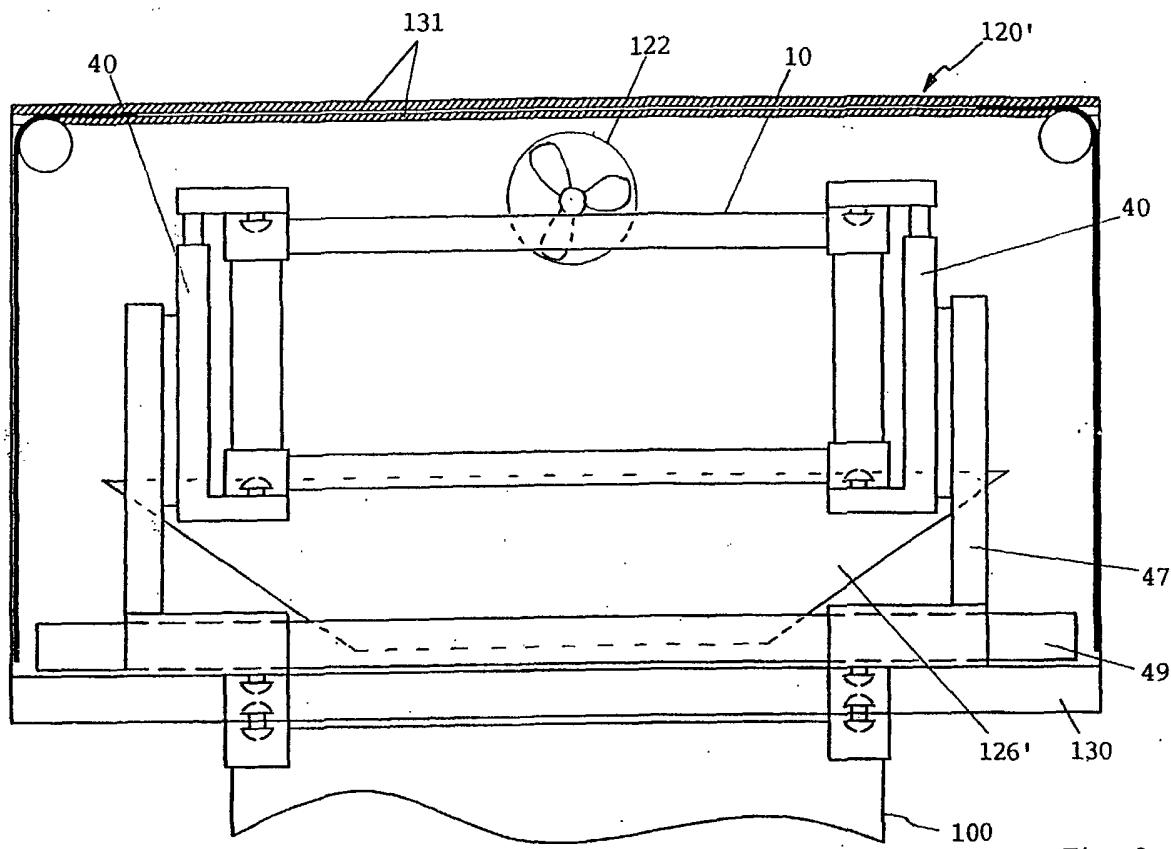


Fig. 9a

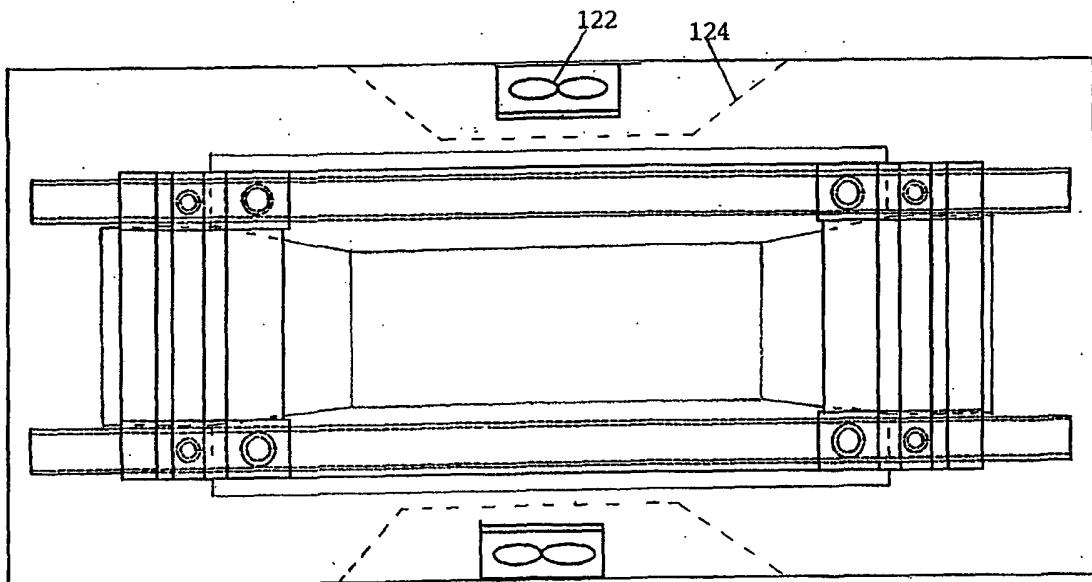


Fig. 9b

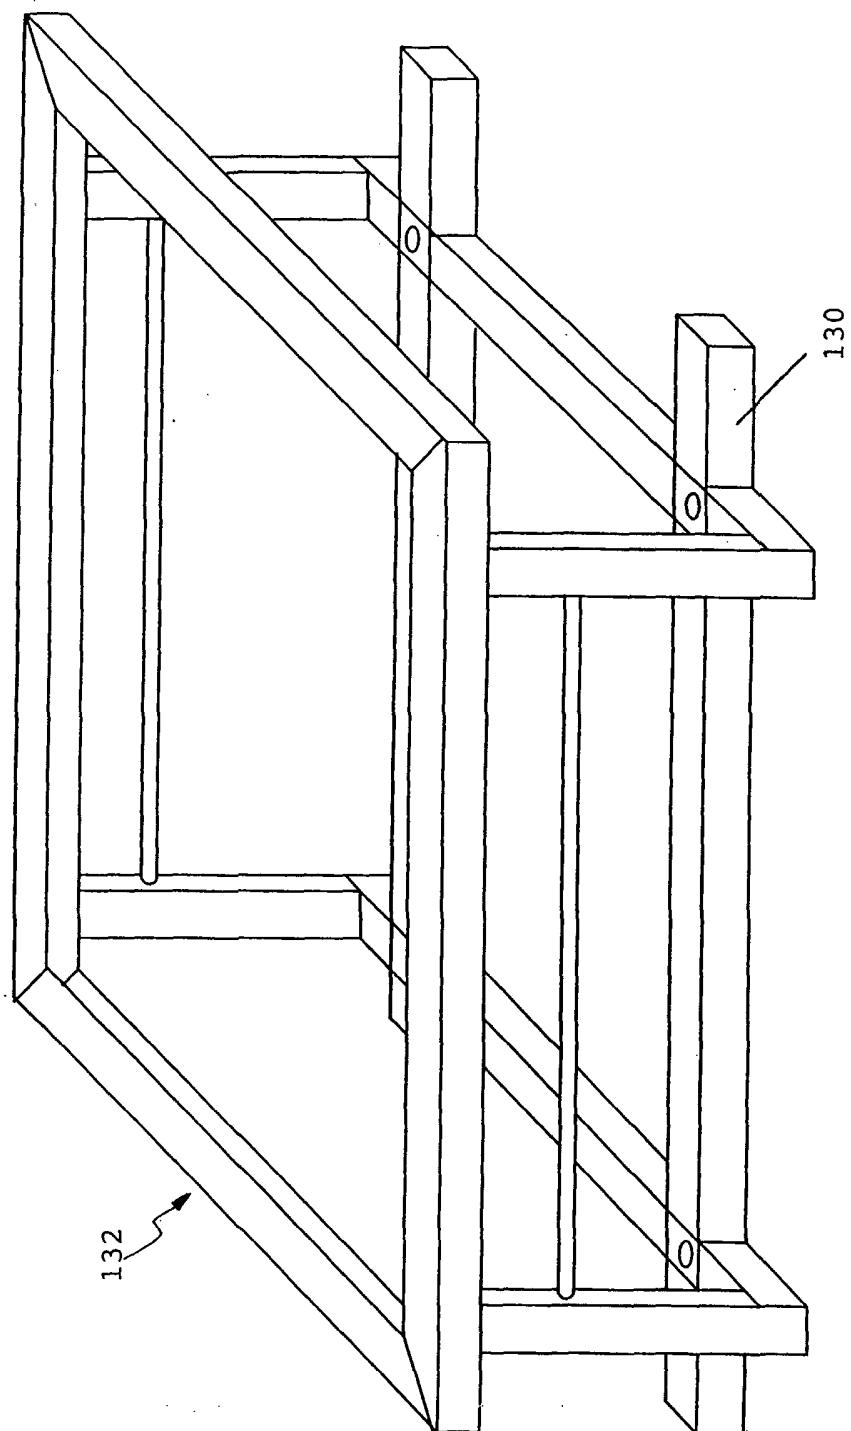


Fig. 9c

17/19

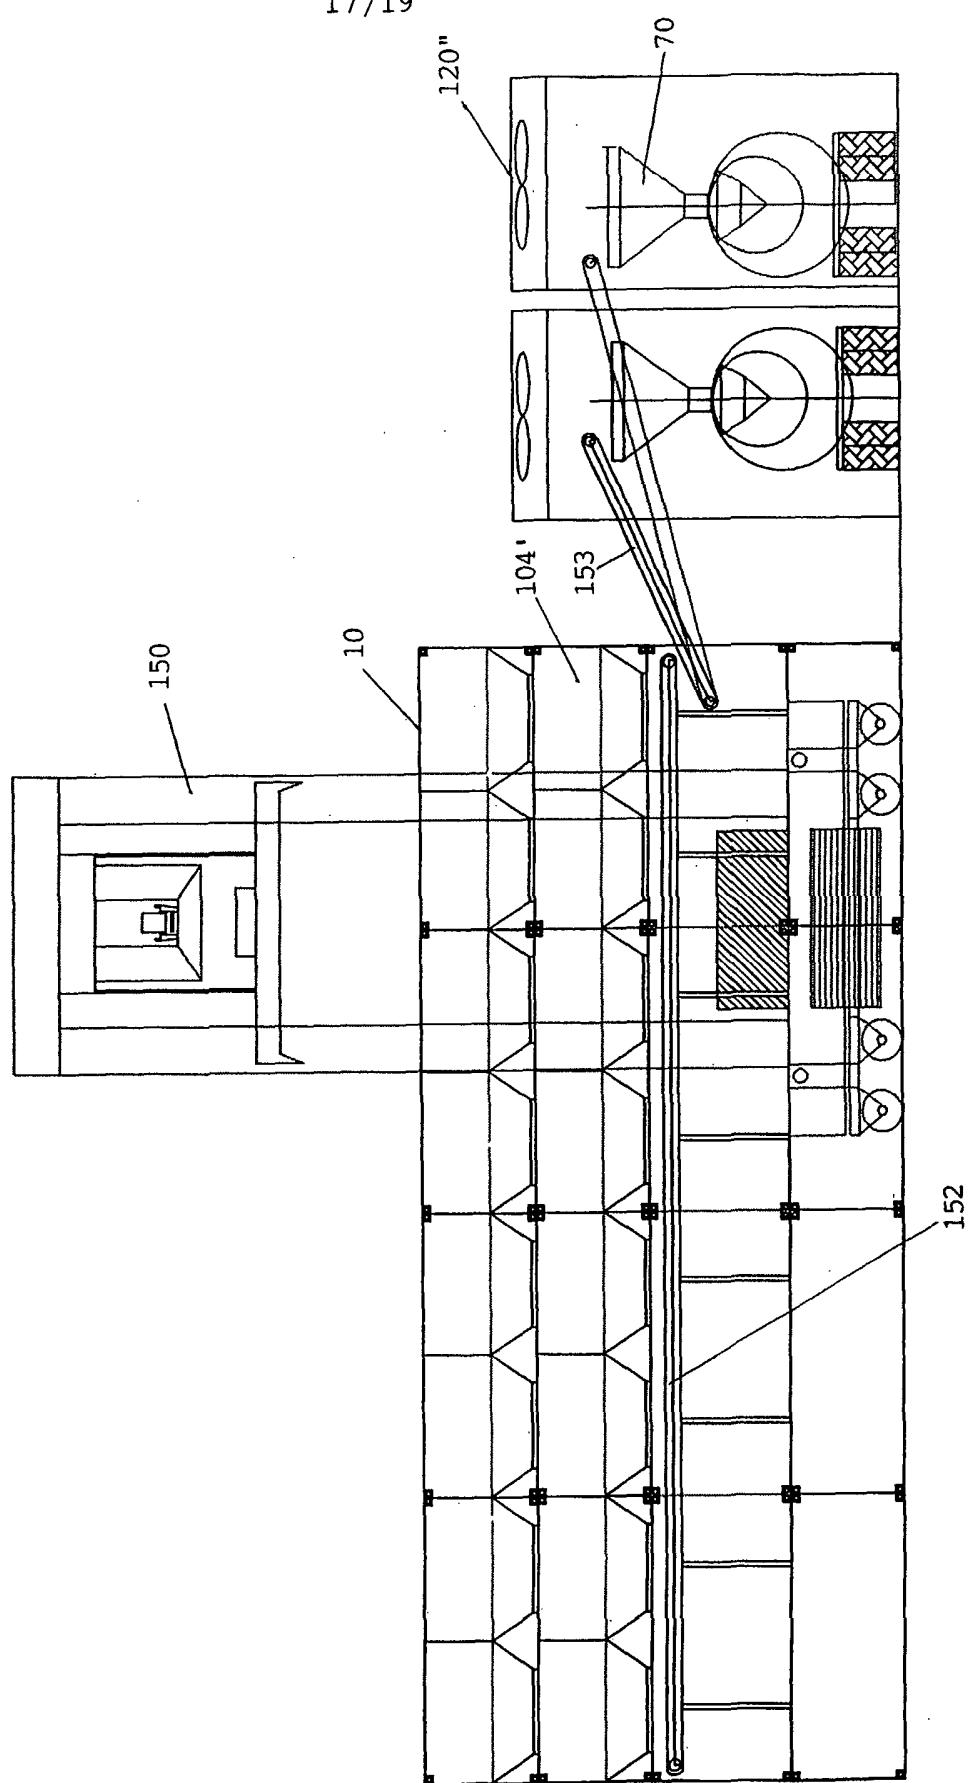


Fig. 10

18 / 19

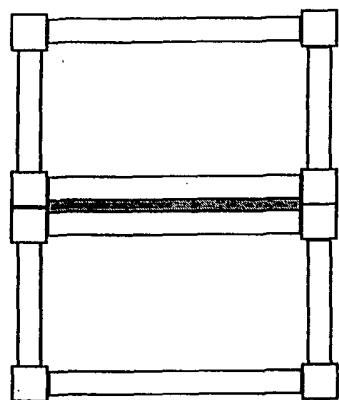


Fig. 11a

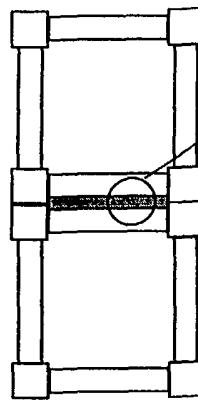


Fig. 11b

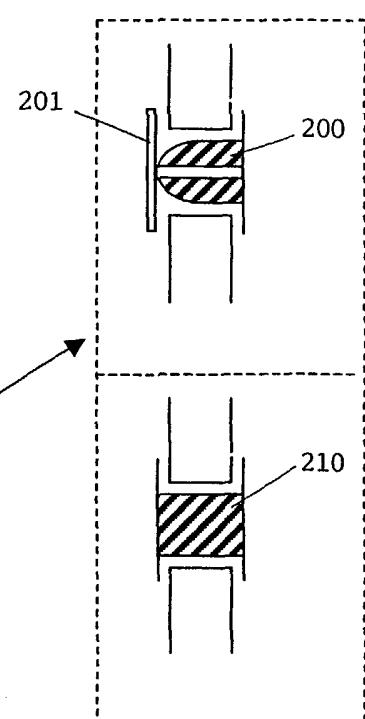


Fig. 11c

Fig. 11d

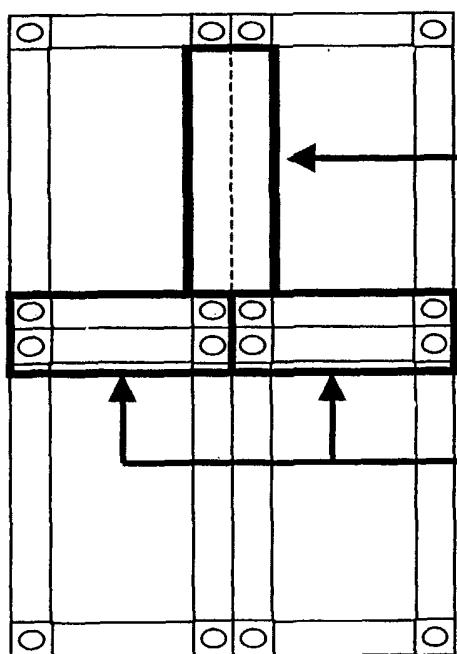


Fig. 12a

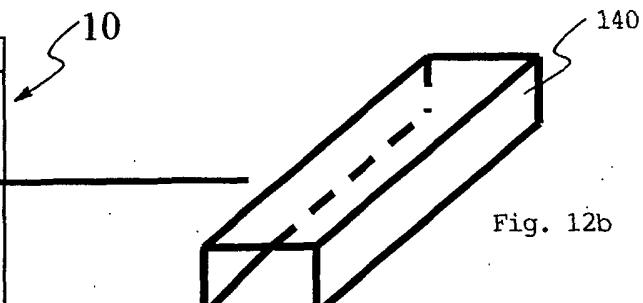


Fig. 12b

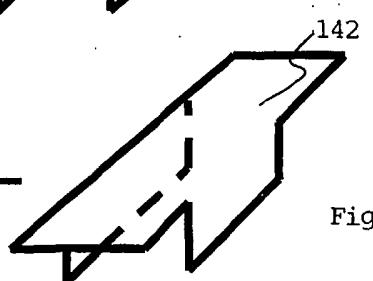


Fig. 12c

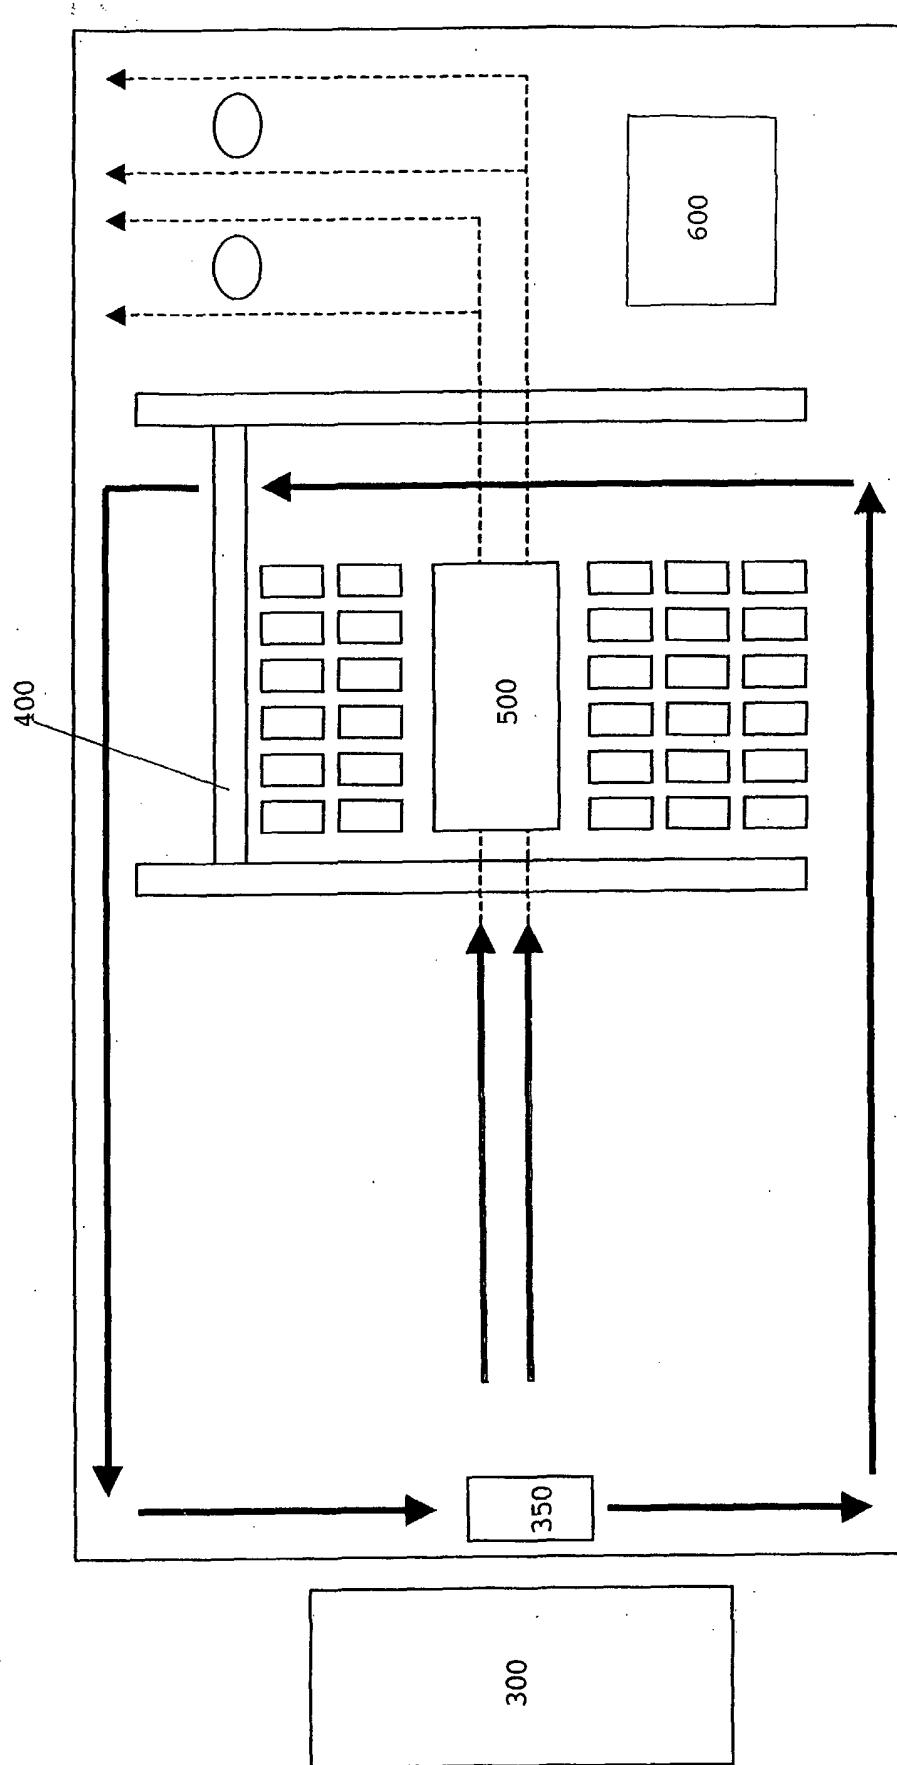


Fig. 13

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG02/00119

A. CLASSIFICATION OF SUBJECT MATTER																						
Int. Cl. ⁷ : B65D 88/28, 88/54, 88/56, B01F 13/10																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
B. FIELDS SEARCHED																						
Minimum documentation searched (classification system followed by classification symbols) ELECTRONIC SEARCH AS BELOW																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI and IPC: B65D 88/-, 90/-, 25/-, B61D 7/-, 9/-, B65F 1/12, B65G 65/-, B01F, B28C and keywords bulk, freight, base, floor, opening, tilt, slew, arm, extend, scale, meter, mixture, replenish and similar words																						
C. DOCUMENTS CONSIDERED TO BE RELEVANT																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
X	US 3986708 A (HELTZEL et al.) 19 October 1976 See figures 1, 5 and 6	1-28, 37-54																				
X	US 5121989 A (HORTON et al.) 16 June 1992 See figures 2-6	1-28, 37-54																				
X	US 4550665 A (BROUWER) 5 November 1985 See figure 2	1-28																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C		<input checked="" type="checkbox"/> See patent family annex																				
<p>* Special categories of cited documents:</p> <table> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier application or patent but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 25 September 2002		Date of mailing of the international search report 4 OCT 2002																				
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929		Authorized officer DALE E. SIVER Telephone No : (02) 6283 2196																				

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG02/00119

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4580502 A (RITZL et al.) 8 April 1986 See figures 3 to 5	1-28
X	US 4224877 A (STARK et al.) 30 September 1980 See figures 1 to 3	1-28
X	US 5441321 A (KARPISEK) 15 August 1995 See figures 1 to 13	1-28
X	US 3945619 A (TAIBI) 23 March 1976 See figures 1-4	37-54
X	US 5785421 A (MILEK) 28 July 1998 See figure 7	37-54
A	US 4095708 A (GERHARD) 20 June 1978 See figure 1	29-36
A	GB 2065594 A (NEUHAUSER KG) 1 July 1981 See figures 1-4	29-36
A	EP 242820 B (OSAKA TAIYU COMPANY, LTD) 20 December 1989 See figure 1	29-36

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG02/00119

Box I Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos : **55-57**

because they relate to subject matter not required to be searched by this Authority, namely:

Claims 55 and 56 are directed to a spillage cover.

Claim 57 is directed to a seal means.

2. Claims Nos :

because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos :

because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

Box II Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See attached supplemental sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.: 1-54
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

The additional search fees were accompanied by the applicant's protest.

No protest accompanied the payment of additional search fees.

Supplemental Box

(To be used when the space in any of Boxes I to VIII is not sufficient)

Continuation of Box No: II

The international application does not comply with the requirements of unity of invention because it does not relate to one invention or to a group of inventions so linked as to form a single general inventive concept. In coming to this conclusion the International Searching Authority has found that there are different inventions as follows:

1. Claims 1-4 and 22-28 are directed to a container for transferring bulk materials and handled as a standard freight container having a base with an openable portion. It is considered that a portion openable for discharging the contents comprises a first "special technical feature".
2. Claims 1, 6-13 and 22-28 are directed to a container for transferring bulk materials and handled as a standard freight container having a base with an openable portion. It is considered that the at least one compartment comprises a second "special technical feature".
3. Claims 1 and 14-28 are directed to a container for transferring bulk materials and handled as a standard freight container having a base with an openable portion. It is considered that sloped discharge portions (not hinged or slidable) comprises a third "special technical feature".

These groups are not so linked as to form a single general inventive concept, that is, they do not have any common inventive features, which define a contribution over the prior art. The common concept linking together these groups of claims is the container having a base with an openable portion. However this concept is not novel in the light of US 4550665 (BROUWER) 5 November 1985. Therefore these claims lack unity a posteriori.

4. Claims 29-36 are directed to a slewing apparatus for rotating a container. It is considered that the fastening means rotatable between a first position where it cannot fasten said container, whilst the container is supported and fastened to said base portion, and a second position where it can fasten said container comprises a fourth "special technical feature".
5. Claims 37-54 are directed to a system for handling containers. It is considered that the system is arranged such that a container may be stacked on top of said stocking section for replenishing said component comprises a fifth "special technical feature".
6. Claims 55 and 56 are directed to a spillage cover. It is considered that the cover clipably attached to adjacent edges of adjacent freight containers comprises a sixth "special technical feature".
7. Claim 57 is directed to a seal means. It is considered that the seal means for sealing interfacial gaps between containers stacked on top of each other comprises a seventh "special technical feature".

Since the abovementioned groups of claims do not share any of the technical features identified, a "technical relationship" between the inventions, as defined in PCT rule 13.2 does not exist. Accordingly the international application does not relate to one invention or to a single inventive concept, a priori.

As the search for inventions four to seven will require more than a little additional search effort over that for the first invention, an additional search fee is warranted. However, invention 1 and any combination of invention 1 with inventions 2 or 3 could be searched without significant extra effort, therefore could be searched without extra charge.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SG02/00119

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member				
US	3986708	NONE					
US	5121989	NONE					
US	4550665	AU 35619/78 ES 469396	CA 1096239 GB 1576916		ES 478727 ZM 45/78		
US	4580502	AU 18542/83 EP 104140 ZA 8306387	CA 1230780 ES 525480		DE 3236424 ES 8405710		
US	4224877	NONE					
US	5441321	WO 9304953	EP 555451		AU 22066/92		
US	3945619	AU 11641/76 CH 602301 GB 1536892	BE 839156 DE 2608770 JP 51111821		CA 1033353 FR 2302827		
US	5785421	NONE					
US	4095708	AU 85916/75 FR 2289426 NL 7512330	BE 834765 GB 1494579 SE 7511779		DE 2450420 JP 52022283 ZA 7506596		
GB	2065594	DE 2950042					
EP	242820	AU 71829/87	JP 62249826				
END OF ANNEX							