

McCALLUM, RADEMEYER & FREIMOND

Ref: P.20231/MAJR

REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978


PUBLICATION PARTICULARS AND ABSTRACT

(Section 32(3)(a) – Regulations 22(1)(g) and 31)

Official Application No.		Lodging Date		Acceptance Date	
21	01 20 04 / 28 74	22	16 APRIL 2004	43	7-4-05
International Classification			Not for Publication		
51	C07C	Classified By:			
Full Name(s) of Applicant(s)					
71	CHINA PETROLEUM & CHEMICAL CORPORATION; SHANGHAI RESEARCH INSTITUTE OF PETROCHEMICAL TECHNOLOGY SINOPEC				
Full Name(s) of Inventor(s)					
72	XIE, Zaiku; YANG, Weisheng; KONG, Dejin; ZHU, Dongmao				
Earliest Priority Claimed					
33	Country CN	31	Number 01131953.4	32	Date 22 October 2001
Title of Invention					
54	THE SELECTIVE DISMUTATION PROCESS OF TOLUENE AND THE DISMUTATION AND TRANSALKYLATION PROCESS OF TOLUENE AND AROMATIC HYDROCARBONS OF C9 AND C9 +				
57	Abstract (not more than 150 words)		Number of Sheets		28

(57) Abstract: The invention relates to a selective dismutation process of toluene and to a dismutation and transalkylation process of toluene and aromatic hydrocarbons of C₉ and C₉+, which solve the problems in the prior art, such as large circulation in aromatics disposal, high energy consumption and critical requirement of raw materials, etc. In this invention, toluene is selectively dismutated to produce the mixed xylene with high concentration of *p*-xylene, toluene and aromatic hydrocarbons of C₉ and C₉+ are dismutated and transalkylated to obtain benzene and mixed xylene in thermodynamic equilibrium, by which the problems mentioned above can be overcome. These processes can be carried out in commercial scale.

ADVERTISEMENT DRAWING

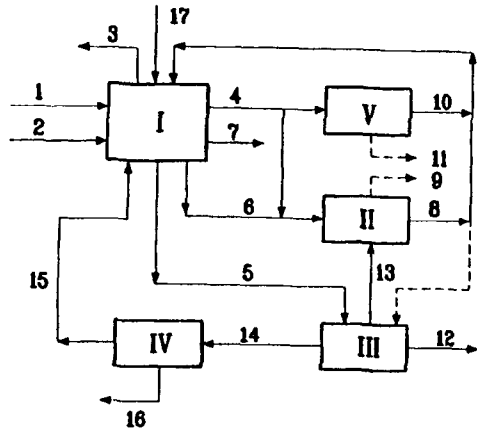

FPCH02160021

WO03/035589

**THE SELECTIVE DISMUTATION PROCESS OF TOLUENE AND THE
DISMUTATION AND TRANSALKYLATION PROCESS OF TOLUENE AND
AROMATIC HYDROCARBONS OF C₉ AND C₉+**

FIELD OF THE INVENTION

The present invention relates to a process for the selective disproportionation of toluene, and the disproportionation and transalkylation of toluene and C₉ aromatics C₉⁺ (C₉⁺A), in particular it relates to a process for the selective disproportionation of toluene, and the disproportionation and transalkylation of toluene and C₉⁺ aromatics followed by a process for producing *p*-xylene (PX) by a technique of the isomerization of C₈ aromatics (C₈A) and a technique of *p*-xylene separation.

BACKGROUND OF THE INVENTION

p-xylene is one of the major basic organic feedstocks in petrochemical industry and has widespread applications in many fields such as chemical fiber, synthetic resin, pesticide, medicine, plastic, etc. The traditional process for producing *p*-xylene is shown in Figure 1. The stream of xylenes containing ethylbenzene, i.e. C₈ aromatics (C₈A) in thermodynamic equilibrium produced from the catalytic reforming process of naphtha passes through a multi-stage subzero crystallization separation or molecular sieve simulation moving bed separation (abbreviated as adsorptive separation) to separate *p*-xylene from its isomer mixture with near boiling points. A C₈A isomerization (abbreviated as isomerization) process is generally used to isomerize *o*-xylene and *m*-xylene to *p*-xylene. The use of disproportionation of toluene, or the disproportionation and transalkylation of toluene and C₉⁺ aromatics (C₉⁺A) to produce benzene and C₈A, which increases the output of C₈A, is an effective route for increasing the output of *p*-xylene.

So far, the typical and mature processes relating to toluene disproportionation in the world are the Tatoray traditional toluene disproportionation process of UOP Inc. industrialized in the end of 1960s, the MTDP process of Mobil Chemical Company developed in the end of 1980s, the S-TDT process of Shanghai Institute of Petrochemical Industry developed recently, and the TransPlus transalkylation process of heavy aromatics of Mobil Chemical Company. The selective disproportionation of toluene is a new route for producing *p*-xylene. Since the selective disproportionation of toluene on modified ZSM-5 catalysts can produce benzene and C₈A with a high concentration of *p*-xylene, the difficulty in the separation of *p*-xylene is greatly alleviated. In recent years, along with the improvement of the catalyst performance, this process has made a great progress. The typical processes are the Mobil toluene selective disproportionation process MSTDP industrialized late 1980s and the UOP toluene selective disproportionation process PX-Plus developed late 1990s.

In the industrialized toluene selective disproportionation process-MSTDP, a converted ZSM-5 mesoporous molecular sieve is used as the catalyst to treat a toluene feedstock yielding C₈A with a high concentration of *p*-xylene (85-90% by weight, the same bellow except otherwise noted) and nitration grade benzene. In the PX-Plus process, no report on the industrialization of which has seen, the major reaction

performance are a PX selectivity of 90%, a mole ratio of benzene to PX of 1.37 in case of the toluene conversion of 30%.

Nevertheless, in these toluene selective disproportionation processes, a high *p*-xylene selectivity is accompanied by a harsh requirement to the feedstock selection, and only toluene can be used as the feedstock. C_9^+A has no use for these processes, and at least it can not be directly used. This is a vital shortcoming of the selective disproportionation process.

The feed for the reactor of a typical Tatoray process is toluene and C_9 aromatics (C_9^+A). The xylenes produced in the Tatoray process are a mixture of the isomers in thermodynamic equilibrium, and generally, the content of *p*-xylene having the most industrial application value is only about 24%. Compared to the selective disproportionation of toluene wherein mixed xylenes having a *p*-xylene concentration of about 90% can be obtained, the Tatoray process is obviously inferior in this aspect, but a great advantage of the Tatoray process over the process for selective disproportionation of toluene is that the Tatoray process can convert C_9A to benzene and xylenes.

The literature based on the Tatoray Process includes U.S. Patent 4341914, CN98110859.8, U.S. Patent 2795629, U.S. Patent 3551510, CN97106719.8, etc. The process flow disclosed by the representative U.S. Patent 4343914 comprises conducting the aromatics fractionation of the reformed product, feeding the derived toluene and C_9A to the Tatoray unit to conduct disproportionation and transalkylation reactions, recycling toluene, C_9A , and a part of C_{10} aromatics ($C_{10}A$) after separating the products, withdrawing benzene as a product, feeding xylene together with the xylene from the isomerization unit to the PX separation unit to separate the high purity *p*-xylene product. The other isomers of xylene is fed to the isomerization unit to conduct the isomerization reaction of xylene, yielding the mixed xylenes in thermodynamic equilibrium again.

One representative aromatics complex based on the selective disproportionation process is the PX-Plus Process. The greatest difference between the PX-Plus Process and traditional aromatics complex Tatoray process is that C_9^+A is withdrawn as a byproduct instead of as a feed in the PX-Plus Process.

It is readily seen from summarizing the above processes that the traditional aromatics production process uses the disproportionation and transalkylation process to attain the object of increasing the output of xylenes, but the amount of the recycled xylenes is large since the produced mixed xylenes are the isomers of xylene in the thermodynamic equilibrium and therefore the concentration of *p*-xylene is low. The other isomers of xylene have to pass through the isomerization unit to be converted to *p*-xylene, thus resulting in heavy xylene recycles and high energy consumption in the isomerization unit, PX separation unit and xylene separation tower of aromatics fractionation unit. Although mixed xylenes with high concentration of *p*-xylene can be obtained by the aromatics production process using the selective disproportionation process, and thereby the feeds of the isomerization unit and the like are greatly reduced, the process can not treat C_9^+A , resulting in a waste of C_9^+A resource, and a reduced output of the target product, *p*-xylene.

SUMMARY OF THE INVENTION

The problems to be solved by the present invention is to overcome the shortcomings present in the prior art of low *p*-xylene concentration in the mixed xylenes, high energy consumption, or harsh requirement for the reaction feedstock in the production of *p*-xylene, and provide a novel process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics. The process possesses the advantages of integrated utilization of the advantages of the selective disproportionation process and the traditional disproportionation and transalkylation process, no restriction on the feedstock, and enhancement of the concentration of *p*-xylene in the mixed xylenes at the same time, thereby greatly reduces the scale of the *p*-xylene separation unit, isomerization unit, and the aromatics fractionation unit and the energy consumption of the whole device. In addition, the capacity of the whole device and the output of the target products, *p*-xylene and benzene can be increased.

To solve the above problems, the present invention adopts the following technique solution: a process of the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics, which process comprises:

a) introducing the benzene and toluene stream and C_8^+ aromatics stream, which are separated from the aromatics-rich depentanized oil originated from the reforming unit after separation in the deheptanizer and the aromatics extraction unit, into the aromatics fractionation unit;

b) introducing a part of the toluene stream separated in the aromatics fractionation unit into the toluene selective disproportionation unit to conduct the toluene selective disproportionation reaction producing a *p*-xylene-rich C_8 aromatics and benzene stream, which enters into the aromatics fractionation unit to conduct aromatics separation or into the present unit to conduct aromatics separation, the separated mixed xylenes being fed to the *p*-xylene separation unit;

c) introducing another part of the toluene stream and C_9^+ aromatics stream separated in the aromatics fractionation unit into the toluene disproportionation and transalkylation unit to conduct the toluene disproportionation and transalkylation reaction in the presence of hydrogen producing a mixed xylene and benzene stream, which either enters into the aromatics fractionation unit to conduct the aromatics separation or into the present unit to conduct the aromatics separation, the separated mixed xylene being fed to the *p*-xylene separation unit.

In the above technique solution, the operation conditions of the reaction zone of the toluene selective disproportionation unit are a pressure of 1-4 MPa, a reaction temperature of 300-480°C, a hydrogen to hydrocarbon mole ratio of 0.5-10, and a liquid weight space velocity of 0.8-8 h^{-1} ; the catalyst used in the toluene selective disproportionation unit is a ZSM-type molecular sieve catalyst, and preferably a ZSM-5-type molecular sieve catalyst; the SiO_2/Al_2O_3 mole ratio of the ZSM-5-type molecular sieve is 15-100; the ZSM-5-type molecular sieve preferably contains at least one metal or oxide of the element selected from the group consisting of platinum,

molybdenum, or magnesium, and the amount of which is 0.005-5% by weight, and preferably 0.01-1% by weight. The operation conditions of the reaction zone of the disproportionation and transalkylation unit are a reaction pressure of 1-5 MPa, a reaction temperature of 250-480°C, a hydrogen to hydrocarbon mole ratio of 0.5-10, and a liquid weight space velocity of 0.8-8 h⁻¹. the content of C₉ aromatics in the feed is 5-60% by weight; the catalyst used in the disproportionation and transalkylation unit is at least one molecular sieve selected from the group consisting of β-zeolite, mordenite, or MCM-22, with β-zeolite or/and mordenite being preferred; the SiO₂/Al₂O₃ mole ratio of the molecular sieve is 10-100, preferably 10-50; the preferred catalyst is a catalyst containing metal bismuth or its oxide, the amount of which is 0.005-5% by weight, preferably 0.05-2% by weight. *p*-xylene may be separated by the adsorptive separation or subzero crystallization separation in the *p*-xylene separation unit. The toluene from the aromatics fractionation unit is preferably the toluene separated in the aromatics fractionation unit or the toluene separated in the aromatics fractionation unit and a foreign toluene. The amount of the toluene entering into the toluene selective disproportionation unit is preferably 5-95% of the total amount of toluene, and more preferably 20-80%. The reaction resultants in the toluene selective disproportionation unit are subjected to aromatics separation in the present unit and the derived *p*-xylene-rich C₈ aromatics are separated by the subzero crystallization separation process to recover a part of the *p*-xylene product. The separated residual liquid is mixed with the mixed xylene stream separated from the aromatics fractionation unit and enters into the adsorptive separation unit together with the latter to produce the *p*-xylene product. The weight ratio of the benzene feed to C₉⁺ aromatics in the disproportionation and transalkylation unit is 80/20-40/60.

In the toluene disproportionation and transalkylation unit of the present invention, the adopted bismuth-containing zeolite catalyst has the function to convert toluene and C₉⁺A to xylenes and benzene in the presence of hydrogen through the disproportionation and transalkylation reactions. Because the decrease in the proportion of toluene and increase in the proportion of C₉A in the feedstock benefit the occurrence of the transalkylation reaction of toluene and C₉A⁺, more C₈A is produced. In the toluene selective disproportionation unit, toluene selective disproportionation reaction takes place, as a result, toluene converts to *p*-xylene with high selectivity. This kind of process route not only can convert C₉⁺A to xylenes, eliminating the harsh requirement for the feedstock, but also can convert toluene to mixed xylenes with a high content of *p*-xylene through the selective disproportionation, further raising the concentration of the *p*-xylene in the mixed xylene feed entering into the PX separation unit, lowering degree of the difficulty of the PX separation, and lowering the scale of the isomerization unit and the like, and thereby lowering the energy consumption of the whole aromatics device and attaining a better technical effect. Besides, the present invention is especially applicable to the reconstruction of the existing aromatic complex for extension. The reconstruction is very simple: reserving the isomerization, *p*-xylene separation, and aromatics fractionation units as they are, setting up a new selective disproportionation unit. In this way, it is possible to increase the output of *p*-xylene and benzene by raising the

capacity of the reforming unit or purchasing an adequate amount of toluene, and meanwhile, the energy consumption is obviously lowered and better effects are obtained.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is the flow diagram of the traditional complex for aromatics production.

Fig. 2 is the flow diagram of the process for selective disproportionation and disproportionation and transalkylation of xylene+ C_8^+A for producing *p*-xylene.

DETAILED DESCRIPTION OF THE INVENTION

Now referring to Fig. 1 and Fig. 2, I represents the aromatics fractionation unit, comprising a benzene separation tower, a toluene separation tower and a xylene separation tower, and optionally a heavy aromatics separation tower to be dependent on the concrete situation, II represents the disproportionation and transalkylation unit, III represents the PX separation unit, IV represents the isomerization unit, and V represents the toluene selective disproportionation unit. Whether units II and V are equipped with the independent aromatics separation device of their own depends on the concrete situation. Line 1 is the mixed stream of benzene and toluene, line 2 is the C_8^+A stream withdrawn from the bottom of the deheptanizer, line 3 is the high purity benzene product withdrawn from the top of the benzene tower, line 4 is the toluene withdrawn from the top of the toluene tower, line 5 is the C_8A withdrawn from the top of the xylene tower, line 6 is the C_9A and a part of $C_{10}A$ withdrawn from the top of the heavy aromatics tower of the aromatics fractionation unit I, line 7 is C_{10}^+A withdrawn from the bottom of the heavy aromatics tower, line 8 is the effluent withdrawn from the bottom of the stabilization tower of the disproportionation and transalkylation unit, line 9 is the benzene product, line 10 is the effluent withdrawn from the bottom of the stabilization tower of the selective disproportionation unit, line 11 is the benzene product, line 12 is the high purity *p*-xylene product, line 13 is the small amount of toluene separated from the PX separation unit, line 14 is the mixed xylenes after separating PX, line 15 is the C_8^+A stream withdrawn from the bottom of the deheptanizer of the isomerization unit, and line 16 is the benzene- and toluene-containing stream withdrawn from the top of the deheptanizer of isomerization unit IV and line 17 is a foreign toluene.

The flow scheme of the traditional complex for producing aromatics is shown in Fig. 1. Benzene and toluene stream 1 from the aromatics extraction unit and the bottom effluent C_8^+A stream 2 of the deheptanizer of the catalytic reforming unit enter into the aromatics fractionation unit I separately and the separated benzene stream 3 and C_{10}^+A stream 7 are withdrawn as the products. Toluene stream 4 and C_9^+A stream 6 serve as the feed of toluene disproportionation and transalkylation unit II and mixed xylene stream 5 is fed to xylene separation unit III. Whether toluene disproportionation and transalkylation unit II is equipped with the aromatics separation device depends on the concrete situation. When the aromatics separation device is equipped, nitration grade benzene product 9 is withdrawn from the selective disproportionation unit and C_8A stream 8 enters into the PX separation unit to

separate PX; when the toluene disproportionation unit is not equipped with the aromatics fractionation unit, bottom effluent 8 withdrawn from the stripping tower directly enters into the aromatics fractionation unit for separation. Target product *p*-xylene 12 is separated from *p*-xylene separation unit III, the small amount of toluene 13 returns to the toluene disproportionation unit, and other mixed xylenes 14 enter into xylene isomerization unit IV to conduct the isomerization reaction. C_8^+A stream 15 withdrawn from the bottom of deheptanizer of the isomerization unit is fed to the aromatics fractionation unit and benzene- and toluene- containing stream 16 withdrawn from the top of the deheptanizer is fed to the aromatics extraction unit.

The process flow scheme of the complex of the present invention for producing aromatics is shown in Fig. 2. Compared to the traditional process, the improvement of the present invention is the addition of a toluene selective disproportionation unit based on the traditional process and the corresponding modification of the process route. The similarity between Fig. 1 and Fig. 2 will not be described and the difference will be described below in detail. The present process divides the toluene 4 which entirely serves as the feed of the toluene disproportionation and transalkylation unit originally into two streams. One still serves as the feed of the toluene disproportionation transalkylation unit and the remaining toluene serves as the feed of toluene selective disproportionation unit V. Whether the selective disproportionation unit is equipped with the aromatics separation device depends on the concrete situation. When the aromatics separation device is equipped, nitration grade benzene product 11 is withdrawn from the selective disproportionation unit. The unreacted toluene is recycled, and *p*-xylene-rich C_8A stream 10 enters into the subzero crystallization separation unit to separate PX; when the selective disproportionation unit is not equipped with the aromatics fractionation unit, bottom effluent 8 withdrawn from the stripping tower directly enters into the aromatics fractionation for separation, and no benzene stream 11 is withdrawn. Foreign toluene 17 enters the aromatics fractionation unit I as another stream of the feedstock.

The present invention will be further described by the examples below.

Examples

Example 1

The capacity for producing PX and energy consumption of the present invention was examined based on the composition of various substances of C_6A - C_{10}^+ aromatics in the aromatics stream withdrawn from the reforming unit of a typical aromatics complex as the fundamental data.

Table 1 is the composition of the aromatics withdrawn from a typical reforming unit and the flow rates of various components used in the present example.

Table 1 Composition and flow rates of the reformed aromatics

Component	Ben	Tol	C_8A	C_9A	C_{10}^+A	Σ
Content, %	11.65	43.09	31.45	11.51	2.30	100
Flow rate, kg/h	10000	37000	27000	9882	1976	85858

The feedstock shown in Table 1 and the aforesaid technique of the present invention (aromatics fractionation device is included in the selective disproportionation unit) are used to produce *p*-xylene. 75% of toluene stream 4 enters into the selective disproportionation unit, and the remaining 25% enters into the toluene disproportionation and transalkylation unit. The weight ratio of toluene to C₉A was 60/40. The catalyst used in the toluene selective disproportionation unit was a ZSM-5 molecular sieve with a SiO₂/Al₂O₃ mole ratio of 50, on which 0.1% by weight of platinum was supported; the reaction conditions were a reaction pressure of 1.5 MPa, a reaction temperature of 420°C, a hydrogen to hydrocarbon mole ratio of 3, and a liquid weight space velocity of 4 h⁻¹. The catalyst used in the toluene disproportionation unit was a mordenite molecular sieve with a SiO₂/Al₂O₃ mole ratio of 30, on which 0.8% by weight of bismuth was supported; the reaction conditions are a reaction pressure of 3.0 MPa, a reaction temperature of 360°C, a hydrogen to hydrocarbon mole ratio of 6, and a liquid weight space velocity of 1.5 h⁻¹. Under the above situations, the feed and effluent of the selective disproportionation unit, disproportionation and transalkylation unit, and isomerization unit are shown in Table 2, the treating scales of various units of the aromatics complex are shown in Table 3, the outputs of the products *p*-xylene and benzene are shown in Table 4.

Table 2 Process materials in Example 1

Component		Selective disproportionation unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Xylene tower
Feed into unit, Kg/h	Ben	11	3			0
	Tol	86823	27698	125	125	125
	C ₈ A	84	238	161555	214447	214661
	C ₉ A	/	18909	41	41	18979
	C ₁₀ ⁺ A	/	657			3632
	Σ	86918	47505	161722	214613	237398
Flow-out of unit, kg/h	Ben	12006	3866	2061	0	0
	Tol	59799	16818	1043	125	125
	C ₈ A	12195	15704	155915	214447	214661
	C ₉ A	703	7540	825	41	18979
	C ₁₀ ⁺ A	20	1458			3632
	Σ	84723	45386	159844	214613	237398

Where Ben is benzene, Tol is toluene, C₈A is C₈ aromatics, C₉A is C₉ aromatics, and C₁₀⁺A is C₁₀ and higher aromatics.

Table 3 Treating scales of various units in Example 1

Unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Benzene/toluene fractionation unit	Xylene fractionation unit
Scale, kg/h	47505	161722	210658	96240	233214

Table 4 Outputs and purities of the products in Example 1

Product	<i>p</i> -xylene	Benzene
Output, kg/h	48936	27933
Purity, %	99.8	99.94

The results show that the energy consumption was 575 Mkal/t (*p*-xylene + benzene), which was reduced by 18% in the technique of the present invention relative to the 702 Mkal/t (*p*-xylene + benzene) in the following Comparative Example 1. In the present invention, the weight concentration of the *p*-xylene in the mixed xylenes entering into the adsorptive separation unit was 23.0%, which was 20% higher than that in the Comparative Example 1 (19.2%).

Example 2

By still using the process flow, process conditions, and catalyst in Example 1, the capacity of the technique of the present invention for producing PX was re-examined based on the composition of the feedstock and 22% more flow rate of the feed shown in Table 1. The composition and flow rate of the feed are shown in Table 5. The specific situations of the feed and effluent of the selective disproportionation unit, disproportionation and transalkylation unit, and isomerization unit are shown in Table 6, the treating scales of various units of the aromatics complex are shown in Table 7, and the outputs of the products *p*-xylene and benzene are shown in Table 8.

Table 5 Contents and flow rates of the reformed aromatics

Component	Ben	Tol	C ₈ A	C ₉ A	C ₁₀ ⁺ A	Σ
Content, %	11.65	43.09	31.45	11.51	2.30	100
Flow rate, kg/h	12200	45140	32940	12056	2410	104746

Table 6 Process materials in Example 2

Component		Selective disproportionation unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Xylene tower
Feed into unit, Kg/h	Ben	13	4	0		0
	Tol	105875	33847	153	125	125
	C ₈ A	102	295	201195	214447	214661
	C ₉ A	/	23106	50	41	18979
	C ₁₀ ⁺ A	/	3819			3632
	Σ	105991	61071	201397	214613	237398
Flow-out of unit, kg/h	Ben	14641	5323	2566	0	0
	Tol	72921	20535	1296	125	125
	C ₈ A	14871	20126	194172	214447	214661
	C ₉ A	857	9217	1026	41	18979
	C ₁₀ ⁺ A	24	2017			3632
	Σ	103314	57218	199060	214613	237398

Table 7 Treating scales of various units in Example 2

Unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Benzene/toluene fractionation unit	Xylene fractionation unit
Scale, kg/h	61071	201397	261926	118380	289732

Table 8 Outputs and purities of the products in Example 2

Product	<i>p</i> -xylene	Benzene
Output, kg/h	60528	34731
Purity, %	99.8	99.94

5 Compared to Comparative Example 1, the treating capacity of the device in Example 2 increased by 22%, the output of *p*-xylene increased by 18.4%, and the output of benzene increased by 30.8%, while the treating scales of the other units did not increase except the selective disproportionation unit, which was not equipped in Comparative Example 1. The nearest treating capacities were in the adsorptive separation unit, but the treating capacity was only 99.8% of that in Comparative Example 1. Therefore, by using the technique of the present invention, the treating capacity of the device and the output of the products *p*-xylene and benzene can be increased.

15 Example 3

By still using the process flow, process conditions, and catalyst in Example 1, the capacity of the technique of the present invention for producing PX was re-examined based on the flow rate of the feedstock shown in Table 1, but purchased 53000 kg/h pure toluene entered into the selective disproportionation unit. The specific situations of the feed and effluent of the selective disproportionation unit, disproportionation and transalkylation unit, and isomerization unit are shown in Table 9, the treating scales of various units of the aromatics complex are shown in Table 10, and the outputs of the products *p*-xylene and benzene are shown in Table 11.

Table 9 Process materials in Example 3

Component		Selective disproportionation unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Xylene tower
Feed into unit, Kg/h	Ben	22	3	0		0
	Tol	256328	31722	245	125	125
	C ₈ A	201	288	183099	214447	214661
	C ₉ A	/	21647	41	41	18979
	C ₁₀ ⁺ A	/	688			3632
	Σ	256551	54349	183386	214613	237398
Flow-out of unit, kg/h	Ben	34969	4392	2277	0	0
	Tol	177790	19261	1270	125	125
	C ₈ A	35437	17858	176776	214447	214661
	C ₉ A	2046	8839	922	41	18979
	C ₁₀ ⁺ A	57	1578			3632
	Σ	250299	51928	181245	214613	237398

Table 10 Treating scales of various units in Example 3

Unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Benzene/toluene fractionation unit	Xylene fractionation unit
Scale, kg/h	54349	183386	256880	103347	282395

Table 11 Outputs and purities of the products in Example 3

Product	<i>p</i> -xylene	Benzene
Output, kg/h	73494	51638
Purity, %	99.8	99.94

- 5 The results show that in case of the present example, the output of *p*-xylene increased by 45%, and the output of benzene increased by 197%, while the treating scales of the other units did not increase except the selective disproportionation unit, which was not equipped in Comparative Example 1. The nearest treating capacities were in the adsorptive separation unit, but the treating capacity was only 99% of that
- 10 in Comparative Example 1. Therefore, by using the technique of the present invention, the treating capacity of the device and the outputs of the products *p*-xylene and benzene can be greatly increased by only setting up a new selective disproportionation unit containing an aromatics fractionation device and purchasing an adequate amount of toluene, but keeping the scale of the original device unvaried. In addition, the
- 15 weight concentration of the *p*-xylene in the mixed xylenes entering into the adsorptive separation unit increases by 29.6%.

Example 4

- By still using the process flow, process conditions, and catalyst in Example 1, and the same feedstock as Example 3, the capacity of the technique of the present
- 20 invention for producing PX was re-examined, but the difference was that the process for separating the mixed xylenes produced by the toluene selective disproportionation changed from the adsorptive separation to the subzero crystallization separation. The treating scales of various units of the aromatics complex are shown in Table 12, and the outputs of the products *p*-xylene and benzene are shown in Table 13.

25

Table 12 Treating scales of various units in Example 4

Unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Benzene/toluene fractionation unit	Xylene fractionation unit	Subzero crystallization unit
Scale, kg/h	54323	182414	232553	103315	258054	37573

Table 13 Outputs and purities of the products in Example 4

Product	<i>p</i> -xylene			Benzene
	Adsorptive separation product	Crystallization separation product	Total	
Output, kg/h	50147	23344	73491	51638
Purity, %	99.8			99.94

In this example, the recovery rate of *p*-xylene in the subzero crystallization separation unit was 75%, and the residual liquid (including unrecovered 25% of *p*-xylene and other isomers of C_8A) was fed to the adsorptive separation unit for further separation yielding *p*-xylene.

The results show that the output of *p*-xylene and the output of benzene were comparable to Example 3, but the scales of the adsorptive separation unit and the xylene fractionation unit were reduced by 9.5% and 8.6% respectively compared to Example 3. Therefore, the capacity of the complex can be raised by using the technique of the present invention and the subzero crystallization separation to separate the *p*-xylene-rich mixed xylenes produced by the toluene selective disproportionation, and therefore more *p*-xylene and benzene can be produced. The concentration of the *p*-xylene in the mixed xylene feed entering into the adsorptive separation unit was 22.0%.

Comparative Example 1

p-xylene was produced still based on the flow rate of the feed in Example 1 but according to the traditional aromatics integrated process (Fig. 1) to examine the capacity for producing PX and the energy consumption with the process conditions and catalyst being the same as Example 1. The situations of the feed and effluent of the disproportionation and transalkylation unit and isomerization unit are shown in Table 14, the treating scales of various units are shown in Table 15, and the outputs of the products *p*-xylene and benzene are shown in Table 16.

Table 14 Process materials in Comparative Example 1

Component		Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Xylene tower
Feed into unit, kg/h	Ben	13	0		0
	Tol	82668	89	125	125
	C_8A	336	208790	214447	214661
	C_9A	21233	48	41	18979
	$C_{10}A$	2177			3632
	Σ	106426	208927	214613	237398
Flow-out of unit, kg/h	Ben	13504	2670	0	0
	Tol	44496	1279	125	125
	C_8A	31277	201481	214447	214661
	C_9A	10336	1063	41	18979
	$C_{10}A$	2429			3632
	Σ	102041	206494	214613	237398

Table 15 Treating scales of various units in Comparative Example 1

Unit	Disproportionation and transalkylation unit	Isomerization unit	Adsorptive separation unit	Benzene/toluene fractionation unit	Xylene fractionation unit
Scale, kg/h	106426	208927	259544	153993	285441

Table 16 Output and purity of the products in Comparative Example 1

Product	<i>p</i> -xylene	Benzene
Output, kg/h	50617	26174
Purity, %	99.8	99.94

The results show that to react the aromatics stock shown in Table 1, the traditional aromatics production process consumed 702 Mkal/t (*p*-xylene+benzene) of energy, produced 51107 kg/h of PX and 26556 kg/h of benzene in total. The weight concentration of the *p*-xylene in the mixed xylenes entering into the adsorptive separation unit was 19.2%.

Comparative Example 2

p-xylene was produced still based on the flow rate of the feed in Example 1 to examine the capacity for producing PX, but the process flow was that toluene was treated in the selective disproportionation unit while C₉+A were directly discharged as byproduct without any treatment. The process conditions and catalyst in the selective disproportionation unit were the same as in Example 1.

Under the above situations, the treating scales of various units of the aromatics complex are shown in Table 17, and the outputs and purities of the products *p*-xylene and benzene are shown in Table 18.

Table 17 Treating scales of various units in Comparative Example 2

Unit	Toluene selective disproportionation unit	Isomerization unit	Adsorptive separation unit	Benzene/toluene fractionation unit	Xylene fractionation unit
Scale, kg/h	120934	108925	148853	167528	162234

Table 18 Outputs and purities of the products in Comparative Example 2

Product	<i>p</i> -xylene	Benzene
Output, kg/h	39922	28088
Purity, %	99.8	99.94

The results show that the output of *p*-xylene was reduced by 18.4% when only the toluene selective disproportionation unit was equipped.

What we claim is:

1. A process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics, which process comprises the following steps of:

5 a) introducing the benzene and toluene stream and C_9^+ aromatics stream, which are separated from the aromatics-rich depentanized oil originated from the reforming unit after separation in the deheptanizer and the aromatics extraction unit, into the aromatics fractionation unit;

10 b) introducing a part of the toluene stream separated in the aromatics fractionation unit into the toluene selective disproportionation unit to conduct the toluene selective disproportionation reaction for producing a p-xylene-rich C_8 aromatics and benzene stream, which enters into the aromatics fractionation unit to conduct aromatics separation or into the present unit to conduct aromatics separation, the separated mixed xylenes being fed to the p-xylene separation unit;

15 c) introducing another part of the toluene stream and C_9^+ aromatics stream separated in the aromatics fractionation unit into the toluene disproportionation and transalkylation unit to conduct the toluene disproportionation and transalkylation reaction in the presence of hydrogen for producing a mixed xylene and benzene stream, which either enters into the aromatics fractionation unit to conduct the aromatics separation or into the present unit to conduct the aromatics separation, the separated mixed xylene being fed to the p-xylene separation unit.

2. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the adsorptive separation or subzero crystallization separation are used in the p-xylene separation unit to separate p-xylene.

3. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the operation conditions in the reaction zone of the toluene selective disproportionation unit are a reaction pressure of 1-4 MPa, a reaction temperature of 300-480°C, a hydrogen to hydrocarbon mole ratio of 0.5-10, and a liquid weight space velocity of 0.8-8 h^{-1} .

4. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the operation conditions in the reaction zone of the disproportionation and transalkylation unit are a reaction pressure of 1-5 MPa, a reaction temperature of 250-480°C, a hydrogen to hydrocarbon mole ratio of 0.5-10, a liquid weight space velocity of 0.8-8 h^{-1} , and a content of C_9 aromatics in the feedstock of 5-60% by weight.

40 5. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the toluene from the aromatics fractionation unit is the toluene separated in the aromatics fractionation unit, or a toluene separated in the aromatics fractionation unit and a foreign toluene.

6. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the catalyst used in the selective disproportionation unit of toluene is a ZSM-type molecular sieve catalyst.

5 7. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 6, characterized in that the catalyst used in the selective disproportionation unit of toluene is a ZSM-5-type molecular sieve catalyst.

10 8. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 7, characterized in that the SiO_2/Al_2O_3 mole ratio of the ZSM-5-type molecular sieve is 15-100.

15 9. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 7, characterized in that the ZSM-5-type molecular sieve contains at least one metal or oxide of the element selected from the group consisting of platinum, molybdenum, or magnesium, and the amount is 0.005-5% by weight.

20 10. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 9, characterized in that the ZSM-5-type molecular sieve contains at least one metal or oxide of the element selected from the group consisting of platinum, molybdenum, or magnesium, and the amount is 0.01-1% by weight.

25 11. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the catalyst used in the disproportionation and transalkylation unit is at least one molecular sieve selected from the group consisting of β -zeolite, mordenite, or MCM-22.

30 12. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 11, characterized in that the catalyst is β -zeolite and/or mordenite, and the SiO_2/Al_2O_3 mole ratio is 10-100.

35 13. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 12, characterized in that the catalyst is β -zeolite and/or mordenite, and the SiO_2/Al_2O_3 mole ratio is 15-50.

14. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 12, characterized in that the catalyst contains metal bismuth or its oxide, the amount of which is 0.005-5% by weight.

40 15. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 14, characterized in that the catalyst contains metal bismuth or its oxide, the amount of which is 0.05-2% by weight.

16. The process for the selective disproportionation of toluene and the

disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the reaction resultants in the selective disproportionation unit of toluene are subjected to aromatics separation in the present unit, and the derived *p*-xylene-rich C_8 aromatics are separated by the subzero crystallization separation process to recover a part of the *p*-xylene product.

17. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 16, characterized in that the reaction resultants in the selective disproportionation unit of toluene are subjected to aromatics separation in the present unit, and the derived *p*-xylene-rich C_8 aromatics are separated by the subzero crystallization process, and then the residual liquid is mixed with the mixed xylene stream separated from the aromatics fractionation unit, and fed to the adsorptive separation unit together with the latter to produce the *p*-xylene product.

18. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 1, characterized in that the amount of the toluene entering into the selective disproportionation unit of toluene accounts for 5-95% of the total amount of toluene.

19. The process for the selective disproportionation of toluene and the disproportionation and transalkylation of toluene and C_9^+ aromatics according to claim 18, characterized in that the amount of the toluene entering into the selective disproportionation unit of toluene accounts for 20-80% of the total amount of toluene.

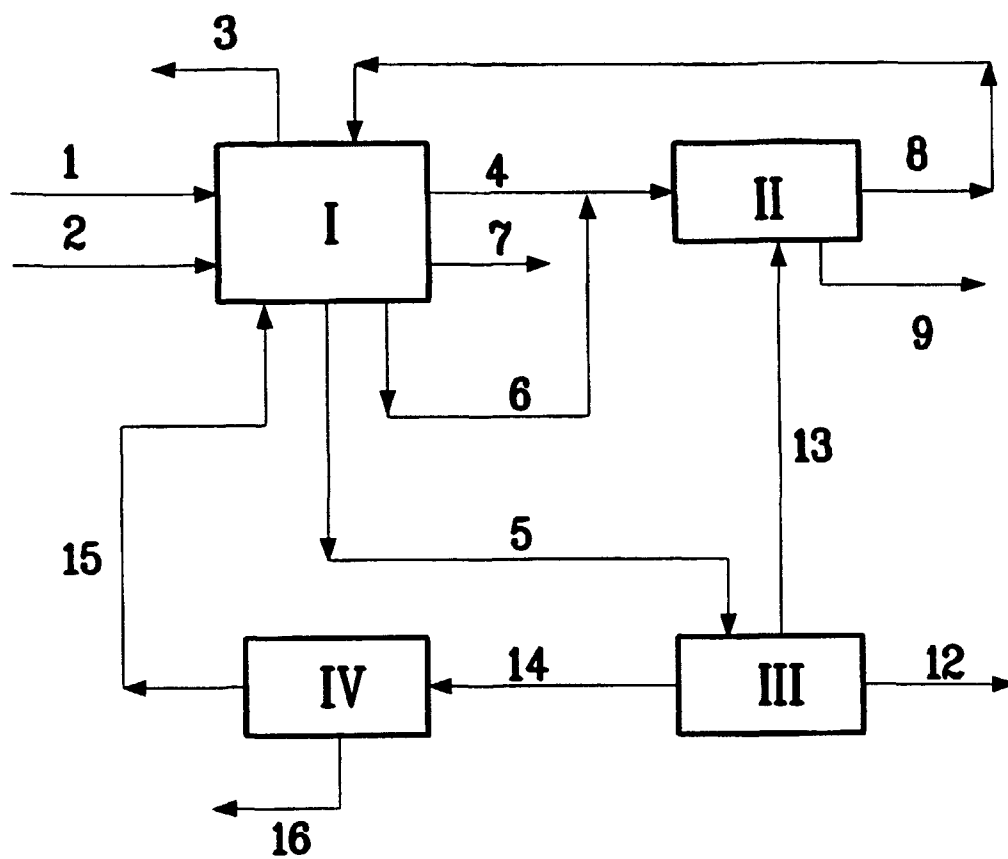


图 1

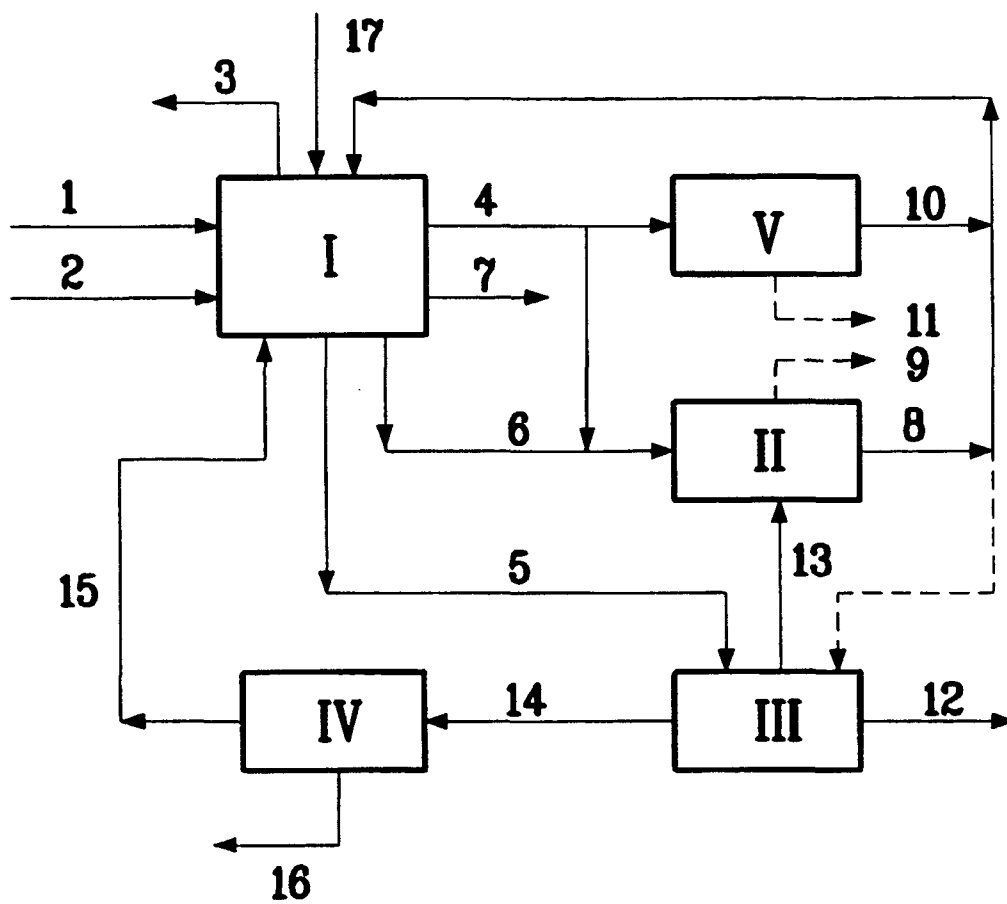


图 2