



US 20040092937A1

(19) **United States**

(12) **Patent Application Publication**

Criscuolo et al.

(10) **Pub. No.: US 2004/0092937 A1**

(43) **Pub. Date: May 13, 2004**

(54) **ABSORBABLE FASTENER AND APPLYING APPARATUS**

Related U.S. Application Data

(60) Provisional application No. 60/242,647, filed on Oct. 23, 2000.

(76) Inventors: **Christopher J. Criscuolo**, Branford, CT (US); **Russell S Heinrich**, Hamden, CT (US); **Kourosh Azarbarzin**, Faitfield, CT (US)

Publication Classification

(51) **Int. Cl.⁷** **A61B 17/56**
(52) **U.S. Cl.** **606/72**


(57) ABSTRACT


A surgical fastener apparatus, for securing a surgical mesh material to body tissue including a pair of anchors each having retaining means formed on an outer surface thereof, and a suture tether interconnecting the pair of anchors to one another. The pair of anchors having a substantially cylindrical body having a conically tapered distal end and a planar proximal end. The retaining means includes a series of semi-circular angled projections having a planar proximal surface and a tapered distal end, wherein a center of each of the angled projections is spaced a distance from a longitudinal central axis of the body portion. The surgical fastener is made from a bioabsorbable material which reabsorbs into said body tissue at an appropriate rate, such as for example, polyglycolic acid and polylactic acid.



(21) Appl. No.: **10/399,486**


(22) PCT Filed: **Oct. 23, 2001**


(86) PCT No.: **PCT/US01/50165**

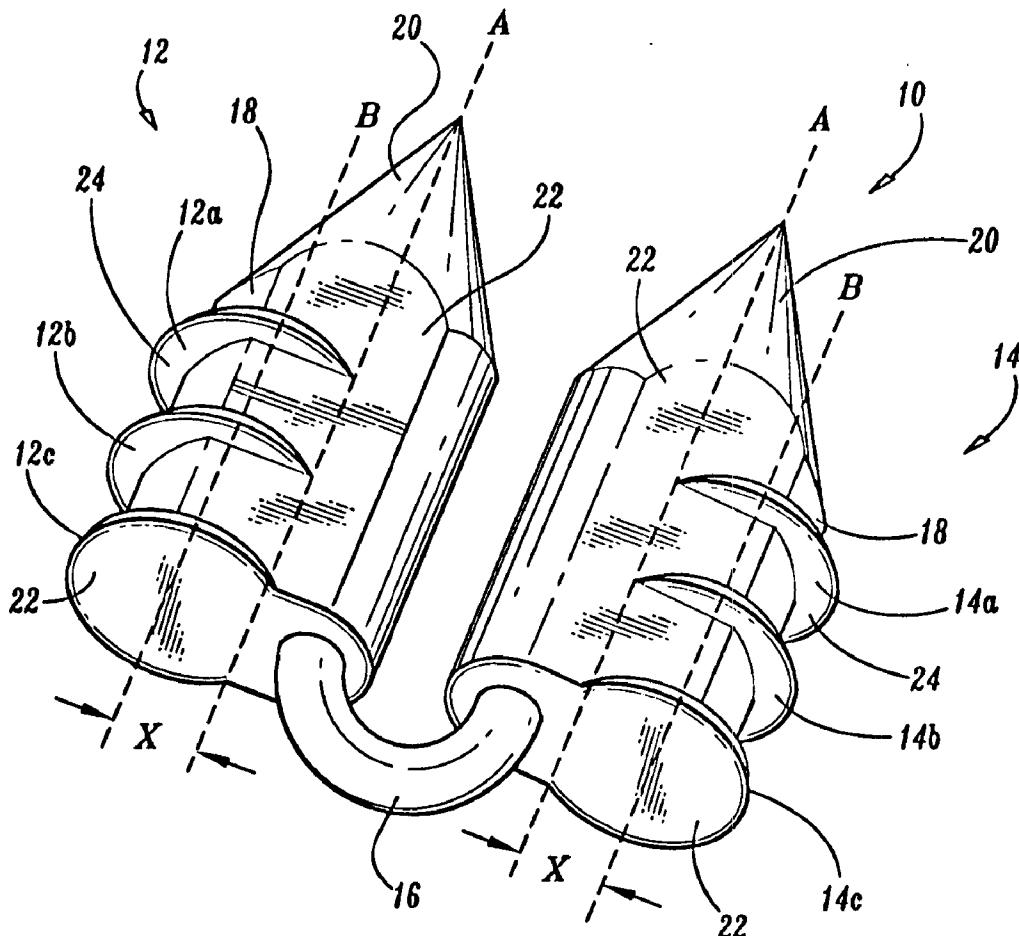

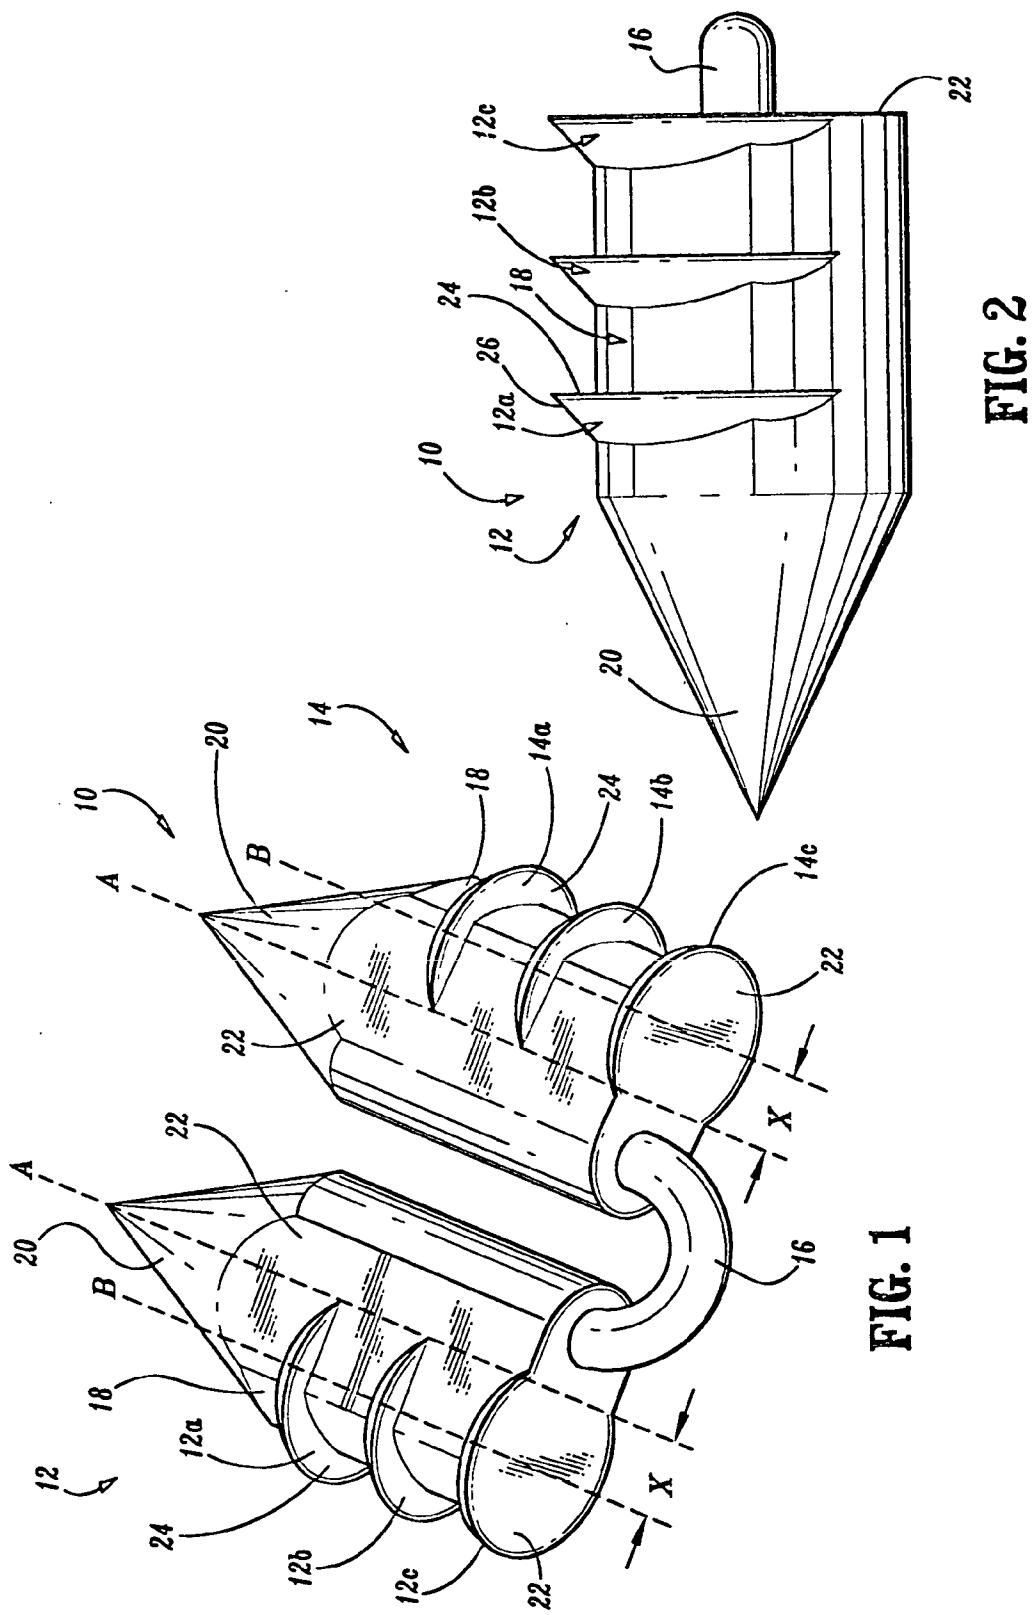

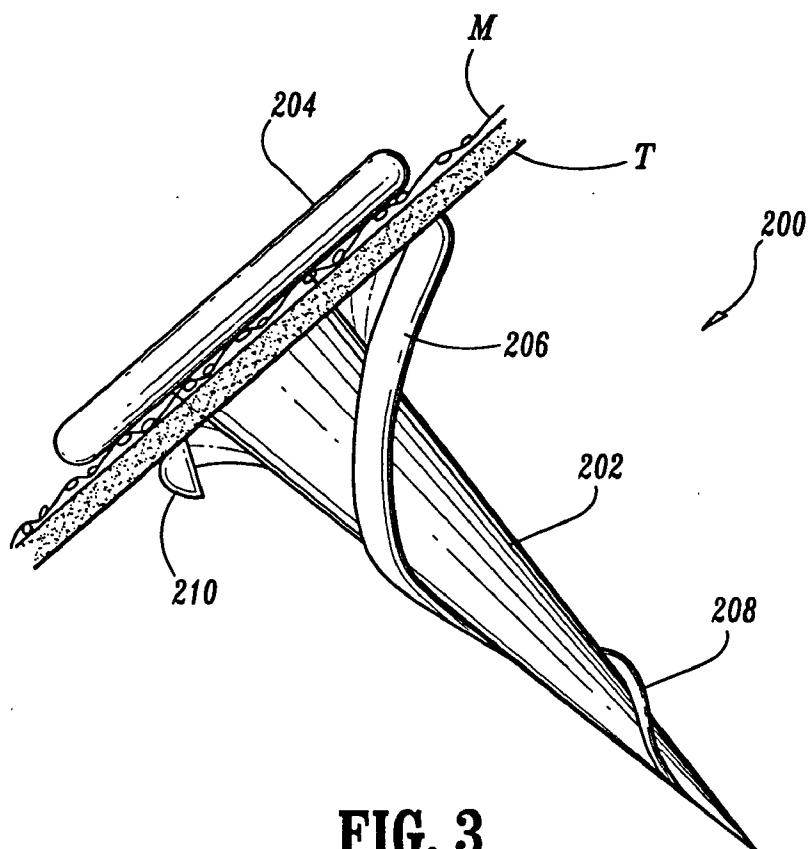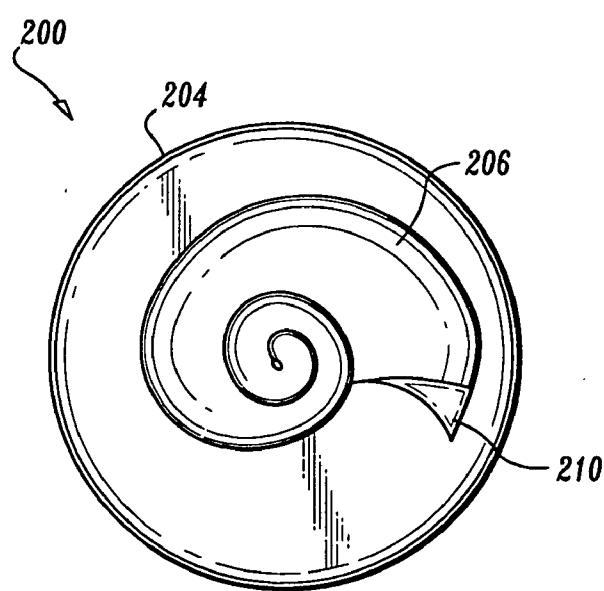**FIG. 3****FIG. 4**

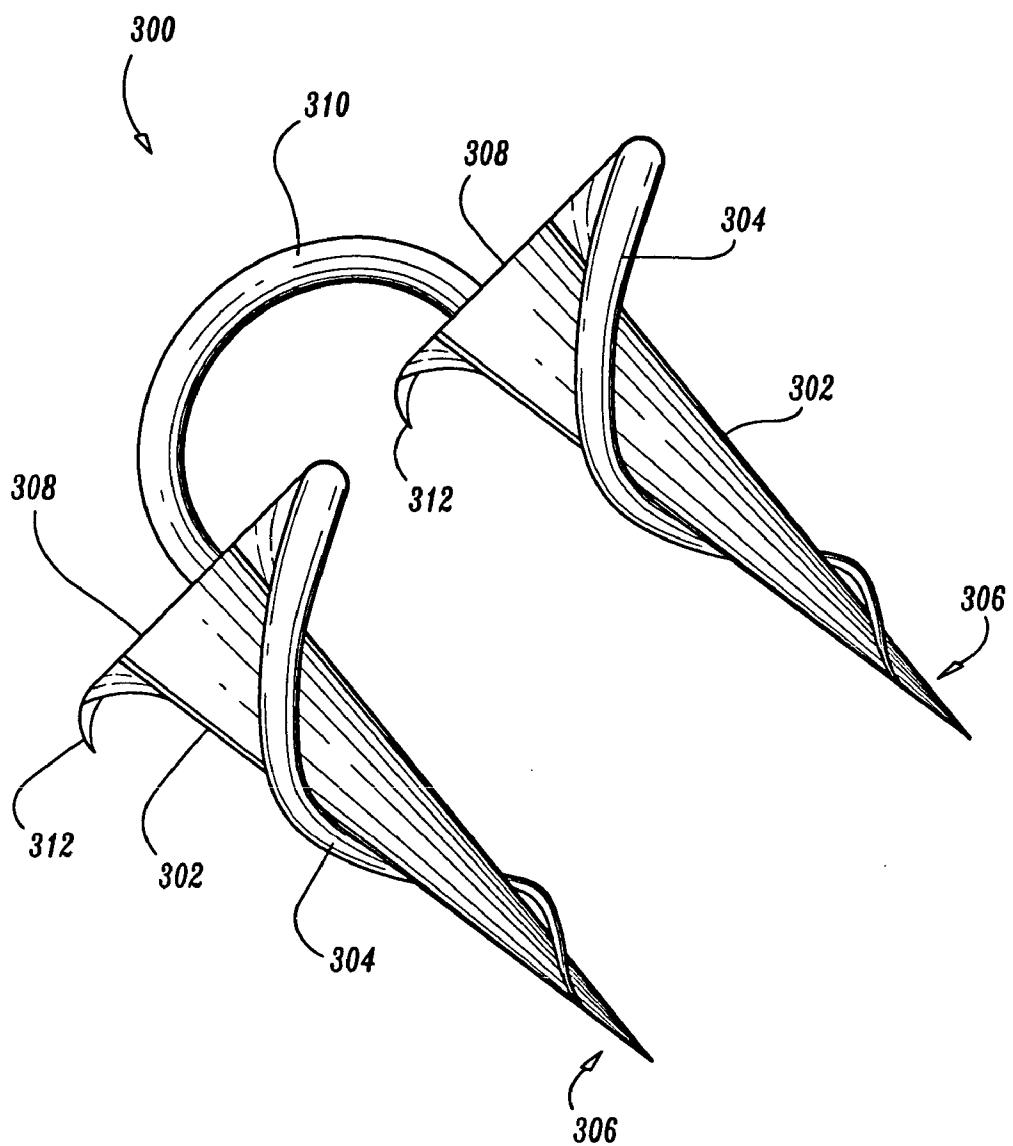**FIG. 5**

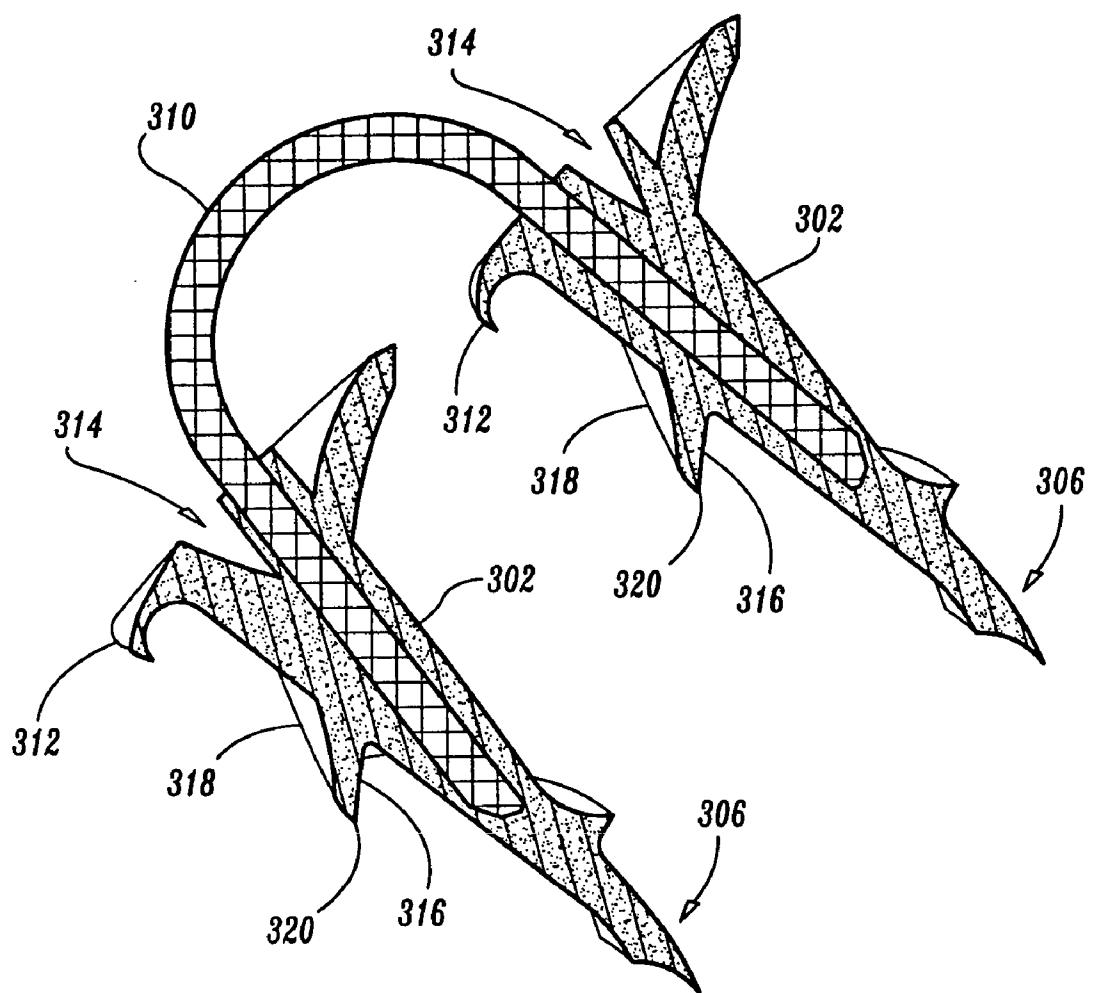**FIG. 6**

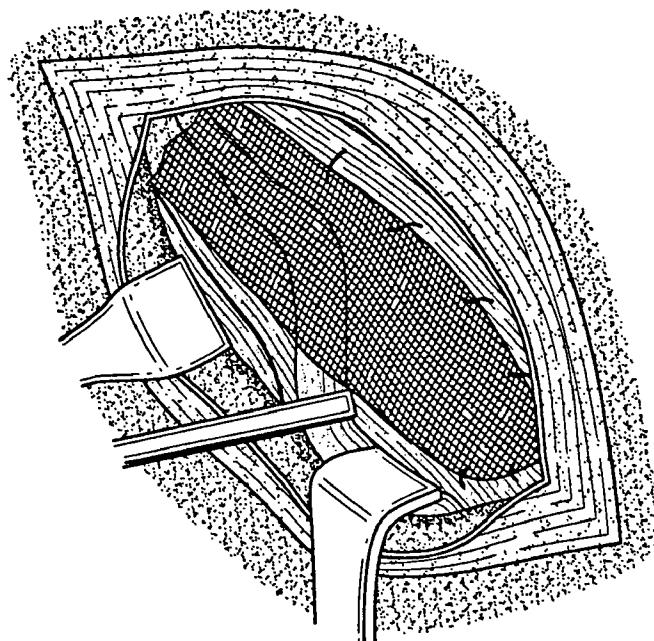


FIG. 8

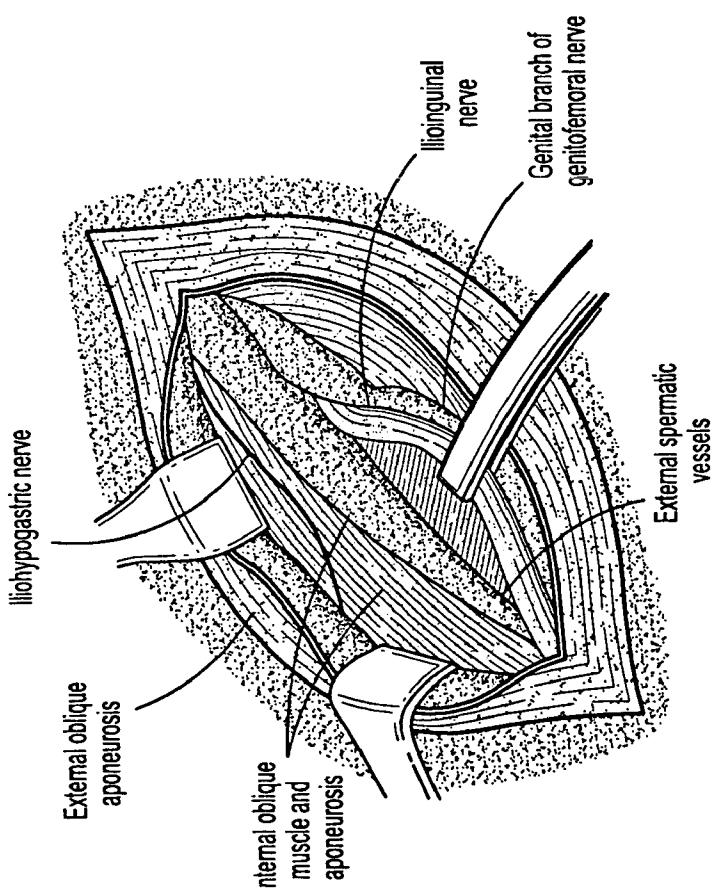
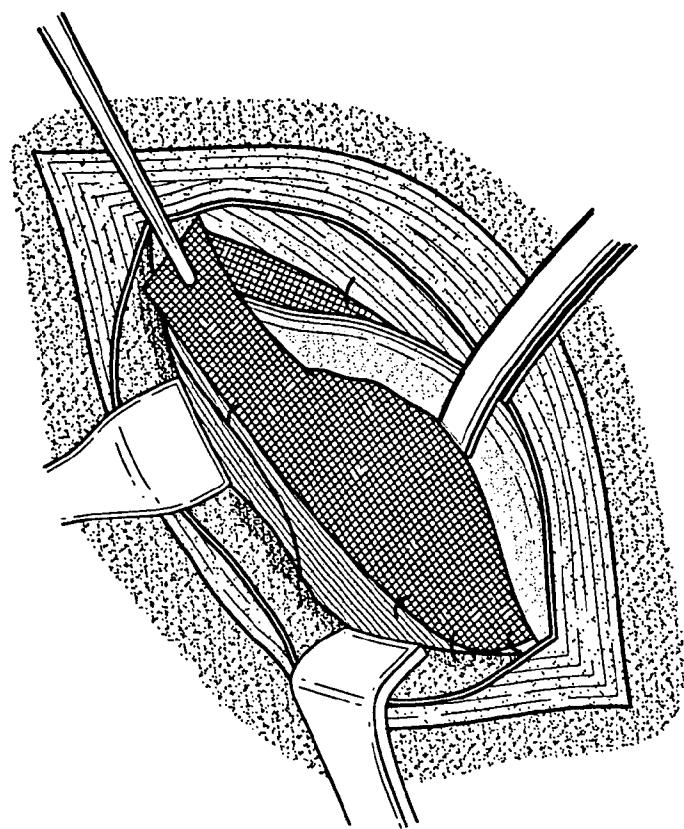
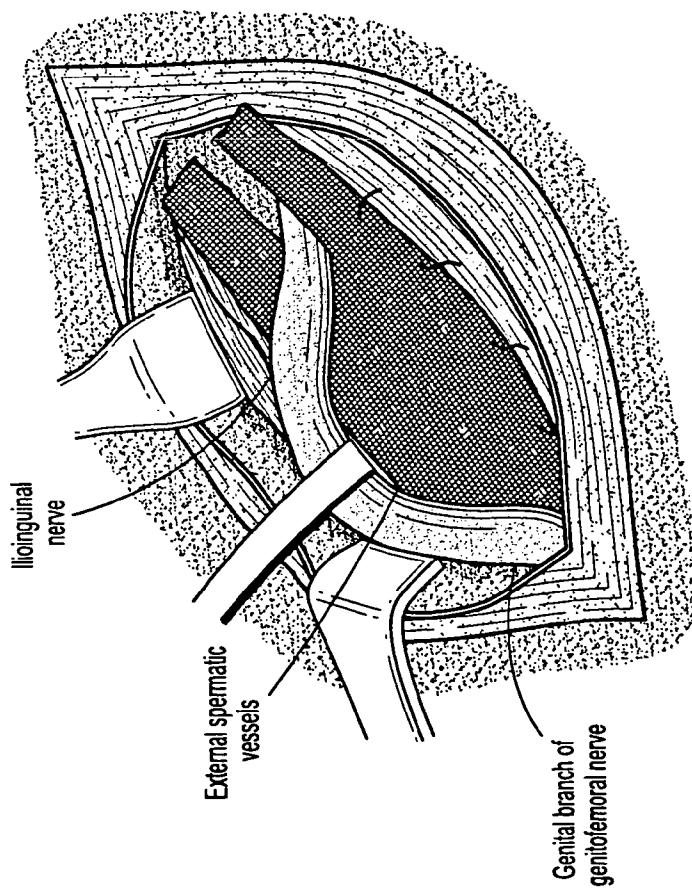


FIG. 7

FIG. 10**FIG. 9**

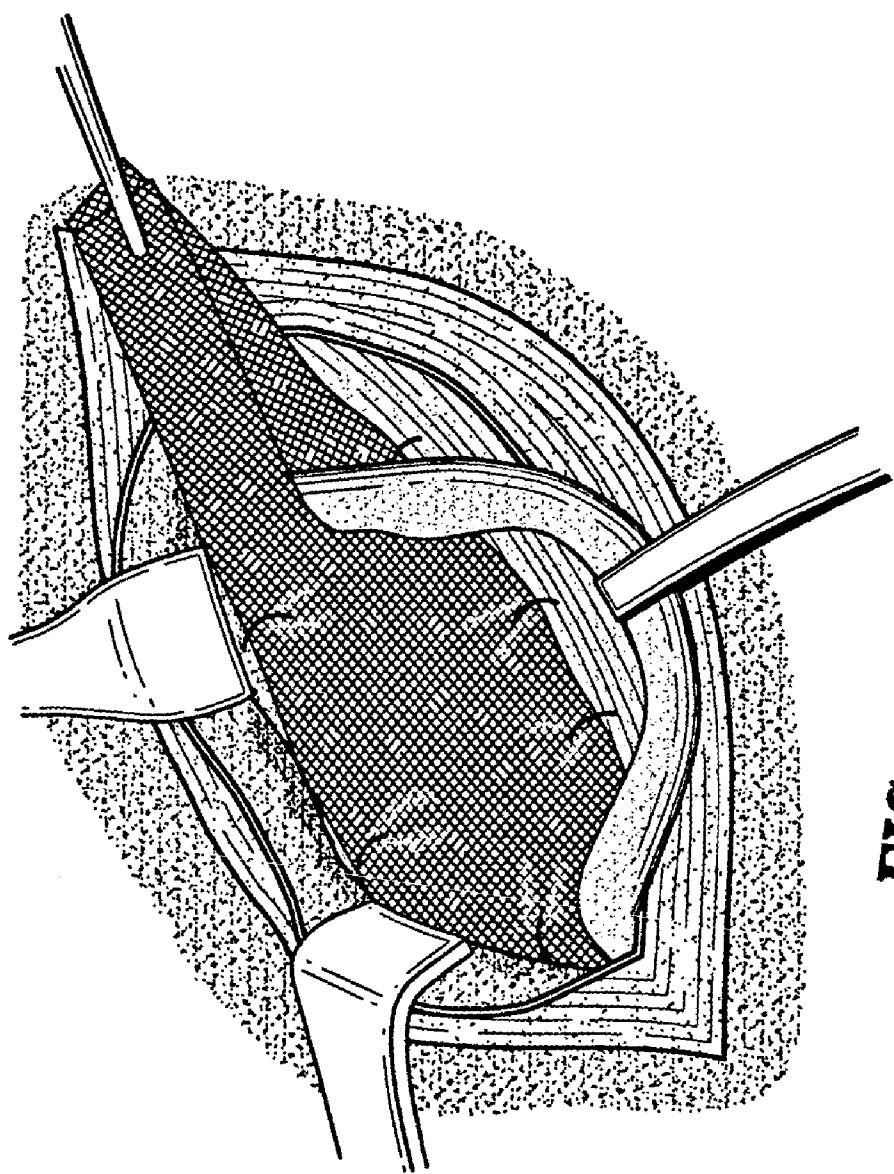


FIG. 11

ABSORBABLE FASTENER AND APPLYING APPARATUS

CROSS REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority to U.S. provisional application Serial No. 60/242,647 filed Oct. 23, 2000, the entire contents of which is hereby incorporated by reference.

BACKGROUND

[0002] 1. Technical Field

[0003] The present disclosure relates to a surgical fastener and to an apparatus for applying the surgical fastener as well as to a procedure for fastening objects to body tissue. More particularly, the present disclosure relates to an absorbable surgical fastener and apparatus for applying the absorbable fastener. In addition, the present disclosure relates to procedures for fastening an object to tissue and to procedures that require fastening of tissue together.

[0004] 2. Background of Related Art

[0005] Fastening objects to body tissues is a commonly required task in many different surgical applications. One illustrative example of such an application is in hernia repair procedures wherein a reinforcing synthetic mesh material is attached to the tissue. A hernia is a general term referring to a protrusion of tissue through a wall of a cavity in which the tissue is normally contained, also called rupture. An inguinal hernia is a condition in which a loop of intestine enters the inguinal canal (i.e., a tubular passage through the lower layers of the abdominal wall). A direct inguinal hernia creates a bulge in the groin area, and an indirect hernia descends into the scrotum. In men, a hernia can develop at the point where the spermatic cord passes out of the abdomen into the scrotum. An inguinal hernia is a condition in males which occurs in approximately 2% of the male population. Often, an inguinal hernia can be pushed back into the abdominal cavity. However, if the inguinal hernia cannot be forced back through the abdominal wall, the herniated bowel may become trapped in the inguinal ring and/or strangulated. If the flow of blood is restricted (strangulated hernia) or the intestine is blocked (obstructed), emergency surgery is necessary. Without treatment, the strangulated loop of intestine dies as a result of a lack of blood to the loop of intestine.

[0006] In order to treat the inguinal hernia, surgery is often required to reposition the loop of intestine and secure the weakened muscles in the abdomen. There are two primarily practiced open surgical procedures for hernia repair which procedures use reinforcing synthetic mesh. One procedure is the Lichtenstein anterior repair method and the other is the Stoppa preperitoneal repair method. Modifications of these procedures exist, as do additional open surgical procedures that do not require the placement of reinforcing mesh over the hernia defect.

[0007] The Lichtenstein repair method is a "tension-free hernioplasty" based on two important facts, namely, inguinal hernias are caused by a metabolic disorder, which leads to a progressive destruction of the fibroconnective tissue of the groin, making the tissue unsuitable for use in hernia repair and the fact that traditional tissue repairs are associated with

undue tension at the suture line, which leads to more postoperative pain, longer recovery time, and a higher rate of.

[0008] The Lichtenstein repair method includes the following steps. First, a transverse incision is made within a Langer's line, beginning from the pubic tubercle. The external oblique aponeurosis is opened and the spermatic cord with its cremasteric covering, external spermatic vessels, and the genital nerve are freed from the inguinal floor and lifted with a Penrose drain. The spermatic cord is then dissected free from the pubic bone area medial to the pubic tubercle in order to make room for extending the mesh beyond the pubic tubercle.

[0009] Next, the external oblique aponeurosis is dissected from the underlying internal oblique muscle and aponeurosis high enough to make room for a prosthesis. The sac is then dissected from the cord beyond its neck and inverted into the properitoneal space without ligation or excision. The proximal end is closed, dissected away from the cord structures, and inverted into the preperitoneal space. The medial side of the mesh is then shaped to the patient's anatomy. The first anchoring suture of the mesh fixes the mesh to the anterior rectus sheath where it inserts into the pubic bone. The lower edge of the mesh is sutured to the inguinal ligament using the same suture in a continuous fashion and ends at the lateral border of the internal ring. A slit is next made on the lateral end of the mesh, creating 2 tails. The upper tail is then passed under the cord and pulled toward the head of the patient, placing the spermatic cord in between the 2 tails. The upper tail is then crossed over the lower one and held with a pair of hemostats. The tails are later sutured together and tucked under the external oblique aponeurosis.

[0010] The Stoppa method of hernia repair places a single sheet of prosthetic material (i.e., surgical mesh) between the peritoneum and the musculopectineal orifice. The surgical mesh is then anchored to Cooper's ligaments using nonabsorbable sutures. The Stoppa hernia repair method is further described in the attached article in Appendix A, the entire contents of which are hereby incorporated by reference.

[0011] Yet another hernia repair method, known as Trans-Abdominal PrePeritoneal (TAPP) Laparoscopic Hernia repair method, generally includes the following steps. A pneumoperitoneum is created in the abdomen and an intra-abdominal pressure is maintained. The repair is then initiated. A laparoscope is inserted and is pointed toward the afflicted inguinal canal. The peritoneal defect or hernia is identified. A peritoneal incision is made, which incision is extended from the lateral aspect of the inguinal region to the lateral umbilical ligament. The Cooper's ligament is then exposed as well as the inferior epigastric vessels and the spermatic Cord. The indirect inguinal hernia sac is then dissected carefully from the spermatic cord. A surgical mesh is then inserted into the intra-abdominal cavity and deployed over the inguinal region. There are three methods to place and secure the mesh over the inguinal region. The mesh is then secured in place with a surgical stapler. It is first stapled on to Cooper's ligament followed by placing several staples perpendicular to the ligament followed by a row more lateral and parallel to Cooper's Ligament. The graft is also anchored around the inferior epigastric vessels and lateral to them. If the mesh is wrapped around the spermatic cord,

both limbs of the mesh are stapled closed. The peritoneum is then closed using additional staples and homeostasis is checked.

[0012] Yet another hernia repair method is known as Total ExtraPeritoneal (TEP) Laparoscopic Hernia repair method. This method is identical to the TAPP repair method, however, it entirely takes place in the preperitoneal space. The TEP method includes the following steps. Unlike the TAPP repair method, no pneumoperitoneum is created in the TEP repair method. Instead, a small incision is made below the umbilicus (midline) and the midline exposed. An incision is made slightly lateral to the midline aponevrosis and the anterior and posterior rectus muscle sheaths are exposed. The anatomy must first be clearly identified. Cooper's ligament should be first visualized as well as the inferior epigastric vessels. The indirect hernia sac should be bluntly pulled away from the spermatic cord and the inguinal canal. The hernia sac should then be dissected as medially as possible to allow a surgical mesh to cover the entire inguinal region. The mesh is then inserted and stapled into place as in the TAPP repair method. With the repair completed the small incisions can be closed.

[0013] The two most common of these methods are the Total ExtraPeritoneal (TEP) repair method and the Trans-Abdominal PrePeritoneal (TAPP) repair method. As discussed above, each of these methods utilizes a reinforcing synthetic mesh that must be fixed to the tissue to prevent early migration of the mesh away from the hernia site. However, the mesh must be anchored into place at first in order to prevent its movement from the hernia repair sight. Only after 7-10 days, does the mesh have sufficient tissue in-growth to prevent its motion away from the hernia repair site.

[0014] Each of the above disclosed procedures utilizes titanium staples to retain the mesh in place. These staples become permanent residents in the body cavity. A disadvantage of permanent metal staples is the possibility of the formation of excessive scar tissue (adhesions) which can in turn cause further patient complications and hinder future surgical procedures. In addition, these permanent staples may be associated with increased long-term discomfort to the patient as a result of the hernia repair procedure.

[0015] Accordingly, a need exists for an improved surgical fastener and applying apparatus as well as for methods in securing objects to body tissue, for example such as in attaching a mesh material for a sufficient time to a hernia repair site until sufficient tissue in-growth occurs to retain the mesh in place.

SUMMARY

[0016] It is an object of the present disclosure to provide an absorbable surgical fastener apparatus and methods in which the amount of foreign material in the patients body is reduced, thereby minimizing adhesion formation and reducing fastener-associated long-term discomfort to the patient.

[0017] It is another object of the present disclosure to provide an absorbable surgical fastener and method which is easier and faster to use than traditional suturing techniques in open procedures. Further, the relatively high firing force that can be applied to the absorbable fasteners of the present disclosure facilitate more reliable penetration of tougher tissue materials, such as for example, Cooper's ligament.

[0018] It is yet another object of the present disclosure to provide an absorbable surgical fastener which is radiolucent and provides greater peace of mind for the patient.

[0019] It is still a further object of the present disclosure to provide an absorbable surgical fastener apparatus having a suture tether disposed between anchoring barbs. The tether provides the advantage of holding the mesh in place loosely thus minimizing the tension in the surrounding tissue and reducing fastener pull-out occurrences.

[0020] It is another object of the present disclosure to provide a surgical fastener apparatus which is dimensioned to not penetrate the abdominal wall of the patient and which is provided with a series of barbs having a relatively larger surface than standard fastener barbs to thereby better retain the fastener in soft tissue.

[0021] The presently disclosed surgical fastener apparatus and method serve the function of previously used staples to secure objects to body tissue as performed in previous methods, for example, mesh being fixed to specific anatomic landmarks surrounding the hernia repair, or attaching mesh to tissue, or attaching tissue to tissue or attaching tissue to ligaments. However, the presently disclosed absorbable fastener apparatus and method have the uniquely advantageous feature that the absorbable fasteners are utilized to attach the mesh to the tissue for a sufficient time to allow tissue in-growth to occur on the mesh material. In this manner, the absorbable fasteners help prevent early mesh migration and then after sufficient tissue in-growth are absorbed in the body.

[0022] A surgical fastener apparatus is provided for securing a surgical mesh material to body tissue, in which the apparatus includes a pair of anchors each having retaining means formed on an outer surface thereof and a suture tether interconnecting said pair of anchors to one another. The fastener apparatus is preferably made from a bioabsorbable material and is dimensioned such that the apparatus will only be partially absorbed over a period of 2 to 3 weeks after implantation and will be completely absorbed into the body at any time thereafter.

[0023] In an alternate embodiment, the surgical fastener apparatus includes a conical body portion having a pointed distal tip and an enlarged proximal head. The conical body portion being provided with a helical thread commencing at or near the distal tip and terminating preferably at a distance spaced from the enlarged proximal head.

[0024] In addition, a hernial repair method utilizing the fasteners in accordance with the present disclosure is provided in which a surgical mesh is secured in place over the hernia repair site by imbedding the surgical fasteners in to body tissue through the surgical mesh.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] Various embodiments of the presently disclosed surgical fastener and methods will be described herein with reference to the accompanying drawing figures wherein:

[0026] FIG. 1 is an enlarged perspective view of one embodiment of an absorbable surgical fastener apparatus constructed in accordance with the present disclosure;

[0027] FIG. 2 is a side view of a barb portion of the absorbable surgical fastener apparatus of FIG. 1;

[0028] **FIG. 3** is an enlarged perspective view of an alternative embodiment of an absorbable surgical fastener in accordance with the present disclosure;

[0029] **FIG. 4** is an end view of the surgical fastener of **FIG. 3**;

[0030] **FIG. 5** is an enlarged perspective view of an absorbable surgical fastener apparatus including a pair of fasteners as shown in **FIG. 3**;

[0031] **FIG. 6** is a cross-sectional view of the absorbable fastener shown in **FIG. 5**, taken along the longitudinal axis;

[0032] **FIG. 7** is an illustration of a sequential step in one embodiment of attaching an object to body tissue using the presently disclosed absorbable surgical fasteners;

[0033] **FIG. 8** is a further sequential step according to the method embodiment of **FIG. 7**;

[0034] **FIG. 9** is a still further sequential step of the method of **FIG. 7**;

[0035] **FIG. 10** is another sequential step of the method of **FIG. 7**; and

[0036] **FIG. 11** is another illustration of a step of the method embodiment of **FIG. 7**.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0037] Preferred embodiments of the presently disclosed absorbable surgical fastener apparatus and method of applying same will now be described in detail with reference to the drawing figures wherein like reference numerals identify similar or identical structural elements.

[0038] The presently disclosed absorbable surgical fastener apparatus and method is shown and described herein in connection with open and laparoscopic inguinal, femoral and ventral hernia repairs. Although not described in detail herein, the absorbable fastener can also be applied to other procedures which require that objects be attached to body tissue.

[0039] Referring initially to **FIGS. 1 and 2**, an absorbable surgical fastener apparatus for connecting objects to body tissue, such as absorbable fastener **10** includes dual fastener anchors **12** and **14** secured to one another by a suture tether **16** extending therebetween. Each anchor **12** and **14** has a substantially cylindrical body portion **18** having a conically tapered distal end **20** and a substantially planar proximal end surface **22**. Anchors **12** and **14** are preferably provided with conically shaped distal ends **20** for easier penetration of anchors **12** and **14** into hard tissues, such as, for example, Cooper's ligament. While a generally conical distal end has been disclosed, it is envisioned that other shaped ends (e.g., pyramid, and the like) can be provided. Each anchor **12** and **14** is provided with a pair of opposed flattened side surfaces **22** extending longitudinally along the length thereof.

[0040] Anchors **12** and **14** are provided with barbs **12a**, **12b**, **12c**, and **14a**, **14b**, **14c** respectively to inhibit fastener pull-out occurrences in either hard or soft tissue. Each barb is semi-circular having a planar proximal surface **24** which is orthogonal to a central longitudinal axis "A" of each anchor **12** and **14**, and a tapered lower surface **26**. Preferably, barbs **12a**-**12c** and **14a**-**14c** share a common central axis

"B", however, it is envisioned that each respective barb can have a different center as compared to other barbs on the anchor. Preferably, central axis "B" is spaced a distance "X" from longitudinal axis "A". In this manner, the center of barbs **12a**-**12c** and **14a**-**14c** can be positioned to reveal a greater amount of planar proximal surface **24** in order to provide an anchor with predetermined anchoring and securing characteristics for body tissue without compromising the strength of body portion **18** of each anchor **12** and **14**. For example, if greater retaining strength is desired, distance "X" between central axis "B" and longitudinal axis "A" is increased thereby forming a bard with a larger planar proximal surface **24**. In the case of securing a fastener to soft tissue, as is the case in hernia repair, a fastener having a larger projecting barb is desired in order to better anchor the fastener into the soft tissue of the patient.

[0041] While each barb **12a**-**12c** and **14a**-**14c** is orthogonal to longitudinal axis "A" of each anchor **12** and **14** respectively, it is envisioned that each barb can be angled relative to longitudinal axis "A" such that barbs **12a**, **12b** and **12c** form a partial thread around body portion **18** of each anchor **12** and **14**. In this manner, as each anchor **12** and **14** is pressed into body tissue, each anchor **12** and **14** will rotate into the body tissue.

[0042] Although the embodiment of **FIGS. 1 and 2** illustrate barbs formed partially around the circumference of anchors **12** and **14**, multiple barb configurations can be utilized and are within the scope of the present disclosure. For example, in addition to the illustrated configuration, single barb, circumferential barb (i.e., barbs encircling the entire anchor), sharp barbs, dull barbs, multiple barbs, and various geometrically shaped barbs may be utilized.

[0043] While a planar proximal end **20** has been shown, it is envisioned that each anchor **12** and **14** can be provided with a notch or detent (not shown) formed in the proximal end thereof. In this manner, when a series of absorbable fasteners **10** are joined together, the tapered distal ends **18** are received in the detents to thereby maintain the absorbable fasteners **10** and anchors **12** and **14** longitudinally aligned with one another.

[0044] Absorbable fasteners **10** are preferably made of medical grade absorbable materials, for example, Polyglycolic Acid (PGA) and Polylactic Acid (PLA). A critical feature of the presently disclosed absorbable fastener is that the absorbable fastener provide sufficient strength to retain a mesh material in place for a desired period of time. For example, in the case of applying a hernia repair mesh material, it is recommended that absorbable fasteners **10** remain in place retaining the mesh material for approximately 2-3 weeks and be absorbed into the body tissue anytime after that.

[0045] It is preferred that absorbable fasteners **10** are approximately 3 mm long, from the tip of distal end **18** to proximal end **20**, by approximately 1.5 mm in diameter. Other suitably configured and dimensioned fasteners may also be utilized depending on the particular application. It is also preferred that absorbable fasteners **10** are configured and dimensioned to avoid penetrating too far into the tissue. An example of a similar fastener structure and an instrument for applying such fasteners are disclosed in U.S. Pat. No. 5,997,552 (hereinafter "the '552 patent"), issued to Person et al. and entitled Meniscle Fastener Applying Device, the

entire contents of which are hereby incorporated by reference. Unlike the fastener in the '552 patent, the barbs of fastener **10** according to the present disclosure have a center "B" which is spaced a distance "X" from the longitudinal axis "A" of the anchor as opposed to the body of the anchor being cut away to reveal a barb in the '552 patent. In this manner, a barb having a larger height is achieved without altering the dimensions of the body portion, which larger height more firmly secures the anchor of fastener **10** into body tissue as compared to the fastener disclosed in the '552 patent.

[0046] Unlike the applicator instrument for placing absorbable fasteners **10** disclosed in U.S. Pat. No. 5,997,552, previously incorporated by reference herein, the applicator according to the present disclosure is preferably adapted to fire 20 to 30 fasteners per instrument for use in either open and/or laparoscopic procedures. It is envisioned that the applicator instrument be either entirely disposable after use or be provided with a replaceable cartridge of fasteners which can be coupled to the end of a reusable applicator and replaced within a given procedure while the handle of such an applicator would still be disposable but would be reusable within a single procedure. While an alternate applier may be used, the fastener applier disclosed in the '552 reference can be used to apply the surgical fasteners disclosed herein.

[0047] By way of example, the general procedure of applying a mesh material during a hernia repair procedure, is to first create an access to the location of the hernia (i.e., incision and dissection) thereby exposing the hernia; then place a prosthetic mesh over the hernia defect; next fasten the mesh to the surrounding tissue by firing a plurality of absorbable fasteners **10** through the mesh and into tissue to thereby secure the mesh into place; and finally close the access wound.

[0048] Turning now to FIGS. 3-5, an alternative embodiment of a surgical fastener in accordance with the present disclosure is shown generally as **200**. As seen in FIGS. 3 and 4, fastener **200** includes a substantially conical body portion **202** depending from a circular head portion **204**. Conical body portion **202** includes a helical thread **206** commencing at a pointed distal tip **208** of body portion **202** and terminating at a distance spaced from head portion **204**. As the helical thread **206** advances from distal tip **208** toward head portion **204**, the radial projection of the helical thread **206** from the body portion **202** increases. While the helical thread **206** is disclosed as commencing at the distal tip **208**, it is envisioned that the helical thread **206** can commence at a distance spaced from the distal tip **208**. In addition, head portion **204** can be provided with a recess or notch (not shown) formed in the center of the proximal surface thereof. The recess being configured to receive the distal tip **208** of an adjacent fastener **200** therein. In this manner, a series of fasteners **200** can be aligned in a tip-to-tail fashion with one another and share a common axis.

[0049] In use, fastener **200** is pressed into body tissue "T", through surgical mesh "M", until the entire body portion **202** of fastener **200** has passed through mesh "M" and has been buried in tissue "T". Head portion **204** ensures that fastener **200** does not completely pass through mesh "M" thereby ensuring that mesh "M" is in contact with tissue "T".

Fastener **200** includes an arcuate tooth **210** projecting radially outwardly from the proximal end of helical thread **206** and oriented such that the curve of the arcuate tooth **210** is oriented to inhibit a rotation of fastener **200** which would remove fastener **200** from body tissue "T".

[0050] Turning now to FIG. 5, a surgical fastener apparatus according to the present disclosure is shown generally as **300**. Similar to fastener **200**, surgical fastener apparatus **300** includes a pair of substantially conical anchors **302** each having a helical thread **304** commencing at a distal tip **306** of each anchor **302** and terminating at a proximal end surface **308** of each anchor **302**. Once again, the radial projection of the helical thread **304** on anchor **302** increases as the helical thread **304** advances from the distal tip **306** to the proximal end of the anchor **302**. While the helical thread **304** is disclosed as commencing the distal tip **306**, it is envisioned that the helical thread **304** can commence at a distance spaced from the distal tip **306** just as well. Anchors **302** are connected to one another by a suture tether **310** extending therebetween. As seen in FIG. 5, the orientation of helical thread **304** on each anchor **302** is in the same direction. In this manner, as anchors **302** are being imbedded into body tissue and commence rotating in the direction of helical thread **304**, suture tether **310** on each anchor **302** will rotate in the same direction and not become tightened. The proximal end of each helical thread is provided with an arcuate tooth **312**, which arcuate tooth **312** is oriented such that after anchors **302** have been completely imbedded into the body tissue the tooth **312** will dig into the body tissue if the anchor is rotated in a direction which would remove the anchor from the body tissue. Similar to fastener **10**, surgical fastener apparatus **300** can be provided with a detent or recess **314** (see FIG. 6) formed in the proximal end surface thereof. In this manner, a series of fasteners **300** can be aligned in tip-to-tail fashion with one another in a fastener applier so that fasteners **300** share a common axis.

[0051] As seen in FIG. 6, helical thread **304** is made up of a distal surface **316** and a proximal surface **318** joined together to form a sharp edge **320**. In addition, suture tether **310** is fixedly retained within anchors **302**, however, it is envisioned that suture tether **310** can be rotatably mounted to proximal surface **308**.

[0052] Fasteners **200** and **300** are also preferably made of medical grade absorbable materials, for example, Polyglycolic Acid (PGA) and Polylactic Acid (PLA). A critical feature of the presently disclosed absorbable fastener is that the absorbable fastener provide sufficient strength to retain a mesh material in place for a desired period of time. For example, in the case of applying a hernia repair mesh material, it is recommended that absorbable fasteners **200** or **300** remain in place retaining the mesh material for approximately 2-3 weeks and be absorbed into the body tissue anytime after that. In addition, it is preferred that absorbable fastener **200** and that each anchor of fastener apparatus **300** are approximately 3 mm long, from the tip of distal end to the proximal end, and wherein the proximal end is approximately 1.5 mm in diameter. It is preferred that fastener **200** and fastener apparatus **300** are configured and dimensioned to avoid penetrating too far into the body tissue.

[0053] Fasteners **200** and **300** can be imbedded into body tissue by either pressing the fastener in to the tissue and allowing the thread on the fastener to automatically twist the

fastener into the tissue, by providing a twisting applier which turns the fastener and thus the helical threads draw the fastener into the body tissue or by a combination of pressing and twisting.

[0054] By way of example only, and not to be considered limiting in any way, with reference to FIGS. 7-11, a Lichtenstein repair method will now be described as performed using any of the absorbable surgical fasteners in accordance with the present disclosure. First, a 5 cm to 6 cm transverse incision is made within a Langer's line, beginning from the pubic tubercle. The external oblique aponeurosis is opened. As shown in FIG. 7, the spermatic cord with its cremasteric covering, external spermatic vessels, and the genital nerve are freed from the inguinal floor and lifted with a Penrose drain. The spermatic cord is dissected free from the pubic bone area for approximately 2 cm medial to the pubic tubercle in order to make room for extending a prosthetic mesh beyond the pubic tubercle. The external oblique aponeurosis is dissected from the underlying internal oblique muscle and aponeurosis high enough to make room for a prosthesis that is 6 cm to 7 cm in height. The sac is then dissected from the cord beyond its neck and inverted into the properitoneal space without ligation or excision.

[0055] Referring to FIG. 8, a medial side of the mesh, is shaped to the patient's anatomy. A first absorbable fastener 10, 200 or 300 is applied to the mesh to fix the mesh to the anterior rectus sheath where it inserts into the pubic bone. The absorbable fastener is placed approximately 2 cm medial to the pubic tubercle in order to be sure that the area is covered by the mesh. Additional absorbable fasteners 10, 200 or 300 are placed therearound and end at the lateral border of the internal ring. The lower edge of the mesh is then anchored to the inguinal ligament using the same fasteners 10, 200 or 300 around the surgical mesh and ending at the lateral border of the internal ring.

[0056] According to one method of the present disclosure, the absorbable fastener is secured into place by firing the fastener into the body tissue such that a first anchor of the surgical fastener penetrates through the surgical mesh and into the body tissue and such that a second anchor of the surgical fastener is implanted directly into the body tissue. In this manner, the suture tether of the fastener apparatus extends partially across the surgical mesh and partially across body tissue. In an alternative method, an absorbable fastener in accordance with the present disclosure, can be secured into place such that both anchors are imbedded into the body tissue and pass through the surgical mesh. If fastener 200 is used in the method, fasteners 200 are anchored into the body tissue solely through the mesh.

[0057] A slit is then made on the lateral end of the mesh, as seen in FIG. 9, creating 2 tails— $\frac{2}{3}$ above and $\frac{1}{3}$ below. The upper tail is then passed under the cord and pulled toward the head of the patient, placing the spermatic cord in between the 2 tails. The upper tail is then crossed over the lower one and held with a pair of hemostat, as seen in FIG. 10. The tails are later sutured together and tucked under the external oblique aponeurosis, leaving 5 cm to 6 cm of mesh lateral to the internal ring.

[0058] While the upper edge of the mesh is fixed in place, care is taken to keep the mesh slightly relaxed. This laxity produces a dome-like ripple in the mesh to compensate for increased intra-abdominal pressure when the patient stands

up from his or her recumbent position during the operation. If the mesh is kept completely flat, it becomes subject to tension when the patient stands up. This pulling effect on the mesh and the tissue, is illustrated when the mesh is kept flat as shown in FIG. 11. The use of a surgical fastener in accordance with the present disclosure effectively eliminates the tension of the surgical mesh the anchors of the surgical fastener are relatively movable with respect to one another. In other words, one anchor is able to move with respect to the other anchor if needed as the patients body tissue shifts. In so doing, the tension on the mesh is reduced since the suture tether provides the mesh with some room to move since the individual anchors are moveable with respect to one another.

[0059] A Total ExtraPeritoneal Laparoscopic Hernia repair using fasteners 10 or 300, in accordance with the present disclosure, will now be described. First, a skin incision is created and the fascia is incised. A balloon type distractor is then placed therein and distended in order to create an operative extraperitoneal space. Umbilical trocars and secondary trocars are then inserted into the extraperitoneal space and the space explored. The medial and lateral structures are then dissected and the spermatic chord identified. A surgical mesh is then cut to the desired size and shape such that a slit is provided in order to wrap the mesh on either side of the spermatic chord. The mesh is then laterally fixed in place using surgical fasteners 10, 200 or 300 in order to anchor the mesh to the transversus arch and the iliopubic tract. This step is repeated for the opposite side. The mesh is then medially fixed in place using additional fasteners 10, 200 or 300 to the transversus arch and to Cooper's ligament or in the alternative, fix the mesh to the medial iliopubic tract. Finally, the incision is closed.

[0060] It is envisioned that fasteners 10, 200 or 300 can be used in a TAPP repair method to replace suturing of the mesh both laterally and medially. In the TAPP repair method, fasteners 10, 200 or 300 are used to secure the mesh in to place by penetrating the mesh and being anchored into the body tissue.

[0061] While each of the above described fasteners have been described as being used in connection with hernial repair surgery, it is envisioned that fasteners having a similar structure can be used in surgical procedures for fastening items to bone or cartilage. In such surgical procedures, the surgical fasteners can be made from surgical grade stainless steel, titanium or any other surgical grade material having sufficient strength to penetrate bone.

[0062] It will be understood that various modifications may be made to the embodiments of the presently disclosed surgical absorbable fastener apparatus and methods disclosed herein. Therefore, the above description should not be construed as limiting, but merely as exemplifications of preferred embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the present disclosure.

We claim:

1. A surgical fastener apparatus for securing a surgical mesh material to body tissue, comprising:
 - a pair of substantially cylindrical anchors, wherein each anchor is provided with a conically tapered distal end and a substantially planar proximal end, and wherein

each anchor member is further provided with a series of semi-circular angled projections having a proximal surface and a tapered distal end and wherein a center of said series of angled projections is spaced a distance from a longitudinal central axis of said anchors; and a tether interconnecting said proximal ends of said pair of anchors.

2. The surgical fastener according to claim 1, wherein said pair of anchors are made from a bioabsorbable material.

3. The surgical fastener according to claim 2, wherein said bioabsorbable material is selected from a material which reabsorbs into said body tissue at an appropriate rate.

4. The surgical fastener according to claim 2, where said bioabsorbable material is selected from the group consisting of polyglycolic acid and polylactic acid.

5. The surgical fastener according to claim 1, where said pair of anchors and said tether are dimensioned to be partially absorbed into said body tissue for at least a period of approximately 2 to 3 weeks immediately after implanting and are fully absorbed into said body tissue at any time thereafter.

6. The surgical fastener according to claim 1, wherein said pair of anchors have a length of approximately 3 mm from a distal tip of said tapered distal end to said planar proximal end.

7. The surgical fastener according to claim 6, wherein said pair of anchors have a diameter of approximately 1.5 mm.

8. The surgical fastener according to claim 1, wherein said tether is made from a bioabsorbable material.

9. The surgical fastener according to claim 8, wherein said bioabsorbable material is selected from the group consisting of polyglycolic acid and polylactic acid.

10. The surgical fastener according to claim 1, wherein said tether is nonrigid.

11. A surgical fastener apparatus, for securing a surgical mesh material to body tissue, comprising:

a pair of anchors each having retaining means formed on an outer surface thereof; and

a suture tether interconnecting said pair of anchors to one another.

12. The surgical fastener apparatus according to claim 11, wherein each of said pair of anchors include a substantially cylindrical body portion having a conically tapered distal end and a substantially planar proximal end.

13. The surgical fastener apparatus according to claim 12, wherein said retaining means includes a series of semi-circular angled projections having a substantially planar proximal surface and a tapered distal end, wherein a center of each of said angled projections is spaced a distance from a longitudinal central axis of said body portion.

14. The surgical fastener apparatus according to claim 13, wherein said suture tether is operatively coupled to said planar surface of each of said pair of anchors.

15. The surgical fastener apparatus according to claim 11, wherein each of said pair of anchors includes a conical body portion having a helical thread extending therearound.

16. The surgical fastener apparatus according to claim 15, wherein said helical thread commences from a distal tip of each of said anchors and terminates at a proximal end of each of said anchors.

17. The surgical fastener apparatus according to claim 16, wherein said suture tether is operatively coupled to said proximal end of each of said anchors.

18. The surgical fastener apparatus according to claim 15, wherein said helical thread increases in a radial direction as said helical thread progresses from said distal end to said proximal end.

19. The surgical fastener apparatus according to claim 11, wherein said pair of anchors are made from a bioabsorbable material.

20. The surgical fastener according to claim 19, wherein said bioabsorbable material is selected from a material which reabsorbs into said body tissue at an appropriate rate.

21. The surgical fastener according to claim 19, where said bioabsorbable material is selected from the group consisting of polyglycolic acid and polylactic acid.

22. The surgical fastener according to claim 11, where said pair of anchors and said tether are dimensioned to be partially absorbed into said body tissue for at least a period of approximately 2 to 3 weeks immediately after implanting and are fully absorbed into said body tissue at any time thereafter.

23. The surgical fastener according to claim 11, wherein said pair of anchors have a length of approximately 3 mm from a distal tip of said tapered distal end to said planar proximal end.

24. The surgical fastener according to claim 23, wherein said pair of anchors have a diameter of approximately 1.5 mm.

25. The surgical fastener according to claim 11, wherein said tether is made from a bioabsorbable material.

26. The surgical fastener according to claim 25, wherein said bioabsorbable material is selected from the group consisting of polyglycolic acid and polylactic acid.

27. The surgical fastener according to claim 11, wherein said tether is nonrigid.

28. A surgical fastener for securing surgical mesh material to body tissue, comprising:

a conical body portion having a pointed distal tip and an enlarged proximal head; and

a helical thread extending radially from said conical body portion.

29. The surgical fastener according to claim 28, wherein said helical thread commences at said distal tip and terminates at a distance spaced from said distal tip.

30. The surgical fastener according to claim 29, wherein said helical thread increases in a radial direction as said helical thread progresses from said distal end to said proximal end.

31. The surgical fastener according to claim 30, wherein said fastener is made from a bioabsorbable material.

32. The surgical fastener according to claim 31, wherein said bioabsorbable material is selected from the group consisting of polyglycolic acid and polylactic acid.

33. The surgical fastener according to claim 30, wherein said fastener is dimensioned to be partially absorbed into said body tissue for at least a period of 2 to 3 weeks immediately after implanting and is fully absorbed into said body tissue at any time thereafter.

34. The surgical fastener according to claim 33, wherein said fastener has a length of approximately 3 mm from said distal tip to said head.

35. A method for applying a surgical mesh material to a hernial repair site during a hernia repair procedure, comprising the steps of:

creating an access to the location of said hernial repair site to expose said hernial repair site;

placing a surgical mesh into position over said hernial repair site, wherein said mesh covers said hernial repair site and extends over surrounding body tissue;

providing an absorbable surgical fastener having a pair of anchors with each anchor having retaining means formed on an outer surface thereof, and a suture tether interconnecting said pair of anchors to one another;

fastening said surgical mesh to said hernial repair site by imbedding a plurality of said absorbable surgical fasteners through said surgical mesh and into said surrounding body tissue; and

closing said access to said hernial repair site.

36. The method for fastening a surgical mesh according to claim 35, wherein said absorbable surgical fasteners are oriented such that a first of said pair of anchors is directly imbedded into said surrounding body tissue and a second of said pair of anchors is imbedded into said body tissue through said surgical mesh.

37. The method for fastening a surgical mesh according to claim 35, wherein said absorbable surgical fasteners are oriented such that said pair of anchors are imbedded into said body tissue through said surgical mesh.

38. The method for fastening a surgical mesh according to claim 35, wherein each of said pair of anchors include a substantially cylindrical body portion having a conically tapered distal end and a substantially planar proximal end.

39. The method for fastening a surgical mesh according to claim 38, wherein said retaining means includes a series of semi-circular angled projections having a substantially planar proximal surface and a tapered distal end, wherein a center of each of said angled projections is spaced a distance from a longitudinal central axis of said body portion.

40. The method for fastening a surgical mesh according to claim 39, wherein said suture tether is operatively coupled to said planar surface of each of said pair of anchors.

41. The method for fastening a surgical mesh according to claim 35, wherein each of said pair of anchors includes a conical body portion having a helical thread extending therearound.

42. The method for fastening a surgical mesh according to claim 41, wherein said helical thread commences from a

distal tip of each of said anchors and terminates at a proximal end of each of said anchors.

43. The method for fastening a surgical mesh according to claim 42, wherein said suture tether is operatively coupled to said proximal end of each of said anchors.

44. The method for fastening a surgical mesh according to claim 41, wherein said helical thread increases in a radial direction as said helical thread progresses from said distal end to said proximal end.

45. The method for fastening a surgical mesh according to claim 35, wherein said pair of anchors are made from a bioabsorbable material.

46. The method for fastening a surgical mesh according to claim 45, wherein said bioabsorbable material is selected from a material which reabsorbs into said body tissue at an appropriate rate.

47. The method for fastening a surgical mesh according to claim 45, where said bioabsorbable material is selected from the group consisting of polyglycolic acid and polylactic acid.

48. The method for fastening a surgical mesh according to claim 35, where said pair of anchors and said tether are dimensioned to be partially absorbed into said body tissue for at least a period of approximately 2 to 3 weeks immediately after implanting and are fully absorbed into said body tissue at any time thereafter.

49. The method for fastening a surgical mesh according to claim 35, wherein said pair of anchors have a length of approximately 3 mm from a distal tip of said tapered distal end to said planar proximal end.

50. The method for fastening a surgical mesh according to claim 49, wherein said pair of anchors have a diameter of approximately 1.5 mm.

51. The method for fastening a surgical mesh according to claim 35, wherein said tether is made from a bioabsorbable material.

52. The method for fastening a surgical mesh according to claim 51, wherein said bioabsorbable material is selected from the group consisting of polyglycolic acid and polylactic acid.

53. The method for fastening a surgical mesh according to claim 52, wherein said tether is nonrigid.

* * * * *