



(51) International Patent Classification:

F24H 3/06 (2006.01)

G01N 30/30 (2006.01)

F24H 9/18 (2006.01)

G01N 30/02 (2006.01)

(21) International Application Number:

PCT/US2019/051476

(22) International Filing Date:

17 September 2019 (17.09.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/138,269

21 September 2018 (21.09.2018) US

16/422,201

24 May 2019 (24.05.2019) US

(71) Applicant: ROSEMOUNT INC [US/US]; 6021 Innovation Boulevard, Shakopee, Minnesota 55379 (US).

(72) Inventor: BLACK, Steven S.; 12427 Westell Drive, Houston, Texas 77077 (US).

(74) Agent: CHRISTENSON, Christopher et al.; Kelly, Holt & Christenson, PLLC, 141 West 1st Street, Suite 100, Waconia, Minnesota 55387 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: FORCED CONVECTION HEATER

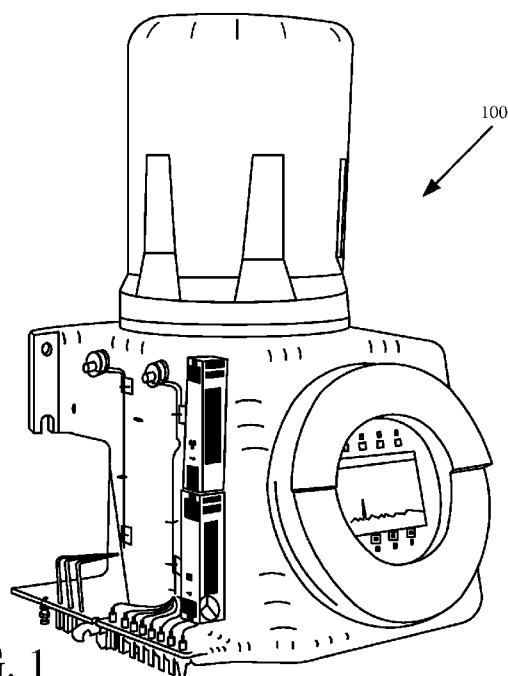


FIG. 1

(57) Abstract: A heating assembly (218, 400, 700) includes a heater (502) extending in a longitudinal direction from a first end to a second end. Heat transfer fins (320, 704) are thermally coupled to the heater (502) and extend in a direction transverse to the longitudinal direction. An airflow component (316, 708) is positioned proximate one of the first and second end (703, 705) and is configured to generate airflow along the plurality of heat transfer fins (320, 704) toward the other of the first and second end (703, 705).



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

FORCED CONVECTION HEATER BACKGROUND

[0001] Various applications often necessitate a heating element to heat a sample or substance to a desired temperature. One example application is gas chromatography. Gas chromatography is the separation of a mixture of chemical compounds due to their migration rates through a chromatographic column. This separates the compounds based on differences in boiling point, polarity, or molecular size. The separated compounds then flow across a suitable detector, such as a thermal conductivity detector (TCD) that determines the concentration of each compound represented in the overall sample. Knowing the concentration of the individual compounds makes it possible to calculate certain physical properties such as BTU or specific gravity using industry-standard equations.

[0002] In operation, it may be necessary to position a gas chromatograph and/or other application within a hazardous environment having an explosive or combustible gas present. In this circumstance, the heating element may only operate under specific operating conditions to ensure that the heating element does not generate a source of ignition. For example, industry standard temperature classifications can specify a minimum ignition temperature threshold for a hazardous area. Additionally, temperature class ratings can specify a maximum surface temperature for an instrument in a particular environment.

[0003] However, in order to heat a sample or substance to a desired temperature, the heating element surface temperature may exceed the temperature classification. For example, a hazardous environment can be given a temperature classification rating of T6, indicating a minimum ignition temperature of 85° C [185° F] for the hazardous environment. However, a heating element within a gas chromatograph, or other device, may have to operate in excess of 85° C to properly heat a mixture or substance to a desired temperature. Therefore, in order to comply with the industry standards, select devices may not be able to operate in hazardous environments.

SUMMARY

[0004] A heating assembly includes a heater extending in a longitudinal direction from a first end to a second end. Heat transfer fins are thermally coupled to the heater and extend in a direction transverse to the longitudinal direction. An airflow component is positioned proximate one of the first and second end and is configured to generate airflow along the plurality of heat transfer fins toward the other of the first and second end.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a diagrammatic view of a gas chromatograph with which embodiments of the present invention may be used.

[0006] FIG. 2 is a diagrammatic system view of a gas chromatograph in accordance with an embodiment of the present invention.

[0007] FIG. 3 is a diagrammatic view of a heating assembly in accordance with embodiments of the present invention.

[0008] FIG. 4 is a diagrammatic side view of a heating assembly in accordance with embodiments of the present invention.

[0009] FIG. 5 is an exploded view of a heating assembly in accordance with embodiments of the present invention.

[0010] FIG. 6 is a cross sectional view of a heat sink of a heating assembly in accordance with embodiments of the present invention.

[0011] FIGS. 7A-7C are front elevation, side elevation, and perspective views, respectively, of a heat sink of a heating assembly in accordance with another embodiment of the present invention.

[0012] FIG. 8 is a perspective cut-away view of a heat sink of a heating assembly in accordance with another embodiment of the present invention.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0013] In accordance with embodiments of the present invention, a heating assembly is provided that allows various devices and enclosures, such as an analytical oven of a gas chromatograph, to be used in hazardous environments. In one example, a heating assembly is provided that requires less supply air with a lower exposed surface temperature, compared to a standard heating element, to heat a sample or mixture to a desired temperature through forced convection. This will be discussed further with respect to FIGS. 3-6. Additionally, while the present description will proceed for a heating assembly to be used within a gas chromatograph, it is expressly contemplated that the present heating assembly may be used in a wide variety of different applications and devices utilized in hazardous environments.

[0014] FIG. 1 is a diagrammatic view of a gas chromatograph with which embodiments of the present invention may be used. While FIG. 1 illustrates a model 700XA gas chromatograph 100,

available from Rosemount Inc., methods and embodiments provided herein may be utilized with other exemplary gas analyzers. This can include model 1500XA Process Gas Chromatographs and model 570 Natural Gas Chromatographs, both available from Rosemount Inc., among a variety of other types and models of gas chromatographs. Additionally, it is contemplated that a wide variety of other devices, beyond gas chromatographs, can be utilized with embodiments of the present invention.

[0015] FIG. 2 is a diagrammatic system view of a gas chromatograph in accordance with an embodiment of the present invention. While one example of a gas chromatograph 200 will now be provided, it is to be understood that gas chromatograph 200 can take a wide variety of other forms and configurations. For example, it is to be understood that gas chromatograph 200 may have other configurations for columns, valves, detectors, etc. However, in this example, gas chromatograph 200 illustratively includes a carrier gas inlet 202, a sample inlet 204, a sample vent outlet 206 and a measure vent outlet 208. In operation, carrier gas is provided to flow panel 210 where it passes through a regulator 212 and dryer 214 before entering analyzer oven 216 and passing through carrier gas pre-heater 218.

[0016] During measurement, sample gas enters chromatograph 200 via sample inlet 204 and passes through sample gas pre-heater 220 within analyzer oven 216. In accordance with embodiments of the present invention, heater(s) 218 and/or 220 can include heating assemblies that allow gas chromatograph 200 to be utilized in hazardous environments. This will be discussed further with respect to FIGS. 3-6. However, both sample gas (during measurement), or calibration gas (during calibration), and carrier gas eventually enter a plurality of pneumatically-controlled multiport selector valves 60 in order to selectively flow various volumes of a sample and/or carrier gas through various chromatographic columns 222 in accordance with known gas chromatography techniques. Each of pneumatically-controlled multiport selector valves 60 is fluidically coupled to a respective solenoid 224 that receives its control signal from controller 226.

[0017] Additionally, as shown in FIG. 2, each pneumatically-controlled multiport selector valve 60 has a pair of states. In the first state, the fluidic connections of each valve 60 are shown in solid lines. The fluidic connections of each valve 60 in the second state are shown in phantom. Controller 226 is also operably coupled to detector 228, which is, in one embodiment, a thermal conductivity detector disposed with analyzer oven 216. Thus, controller 226 is able to fully control flow through gas chromatograph 200 by virtue of controlling solenoids 224. Additionally,

controller 226 is able to determine the response of detector 228 to gas flow therethrough. In this way, controller 226 is able to selectively introduce the sample into a chromatographic column for a selected amount of time, reverse the flow of gas through the chromatographic column; and direct the reverse flow through the detector to observe and/or record the detector response over time. This provides chromatographic analysis relative to the sample.

[0018] FIG. 3 is a diagrammatic view of a heating assembly in accordance with embodiments of the present invention. Heating assembly 218 illustratively includes a heating component 304 and a fan assembly 316 attached to a base plate 312. Heating component 304 illustratively includes a heat sink 318 having a number of fins 320 radiating out from a housing portion (illustratively shown in FIG. 6) configured to house a cartridge heater. In operation, the cartridge heater, along with heat sink 318, can heat the surrounding air of heating assembly 218. While fins 320 of heat sink 318 illustratively fully extend along the housing portion, it is contemplated that, in other examples, fins 320 may only extend along a specific portion of the housing portion. In operation, the housing portion of heat sink 318 includes an inlet 314 for the cartridge heater that allows for leads 302 to extend through heat sink 318 to a heater power source. Leads 302 can be routed through a gland, conduit or other certified conveyance to the heater power source. Additionally, heat sink 318 can comprise any number of heat conducting materials such as aluminum, steel, or any other alloy.

[0019] Fan assembly 316 illustratively includes a fan 308 and a motor assembly 310. While motor assembly 310 will be described as a pneumatic motor, it is expressly contemplated that other types and configurations of motors can be used as well. For example, motor assembly 310 can include a rotary vane type and can be located external to an enclosure (e.g., analyzer oven 216 of gas chromatograph 200) of heating assembly 218. This can include hydraulic, electrical, mechanical or other types of pneumatic motors. However, in this example, motor assembly 310 includes a motor housing 322, an air inlet 324 and an exhaust port 306. In operation, compressed air is received, via air inlet 324, and drives a paddle wheel within motor housing 322 prior to exiting exhaust port 306. As will be discussed later with respect to FIG. 5, upon receiving compressed air, the paddle wheel drives a rotary shaft that extends through housing 322 and is attached to fan 308. Fan 308, in turn, can circulate the warmed air within an enclosure of heating assembly 218.

[0020] In this example, an enclosure of heating assembly 218 can be heated through forced convection in which the heated air adjacent heating component 304 is re-circulated within the enclosure through actuation of fan 308. This configuration allows for a reduction of necessary supply air required to heat the enclosure. Additionally, this also allows for a reduction in necessary power for heating assembly 218, while also allowing for a reduction in surface temperature for the heater cartridge within heat sink 318. Through forced convection, a gas chromatograph, or other device, with heating assembly 218 can heat a sample or mixture to a desired temperature while also complying with necessary industry standard temperature classifications for hazardous environments.

[0021] FIG. 4 is a diagrammatic side view of a heating assembly in accordance with embodiments of the present invention. Heating assembly 400 includes many of the same components as heating assembly 218, and, as such, is numbered similarly. Heating assembly 400 includes heating component 304 having a heating cartridge located within a housing portion of heat sink 318. Heat sink 318 illustratively includes radially-extending fins 320 and threaded inlet 314. In operation, one or more leads 302 coupled to the heating cartridge can traverse threaded inlet 314 and connect to a heater power source.

[0022] Heating assembly 400 also includes fan assembly 316 having fan 308 coupled to motor assembly 310. In accordance with different embodiments, fan 308 can take a variety of forms and configurations. For example, fan 308 can include a centrifugal type, and, additionally, does not have to align directly with heating component 304. For example, fan 308 can be positioned away from heat sink 318 and can still adequately recirculate the air in order to heat a sample or mixture within an enclosure of heating assembly 400. However, in the illustrated embodiment, fan assembly 316 includes motor assembly 310, with air inlet 324 and motor housing 322, aligned with heating component 304.

[0023] FIG. 5 is an exploded view of a heating assembly in accordance with embodiments of the present invention. Heating assembly 218 illustratively includes heating component 304, fan assembly 316 and base plate 312. As is illustratively shown, one or more fastening members 504 can be used to securely fasten heating component 304 and fan assembly 316 to base plate 312. Additionally, one or more fastening members 504 can be used to securely fasten other components of heating assembly 218 to each other. Heating component 304 includes a cartridge heater 502,

coupled to a heater power source using leads 302, and a heat sink 318 that includes a housing portion and radially extending fins.

[0024] Fan assembly 316 illustratively includes fan 308 and motor assembly 310. Motor assembly 310 illustratively includes motor housing 322, air inlet 324, exhaust port 306, paddle wheel 506 and rotary shaft 508. In operation, compressed air can be received via air inlet 324 and used to drive paddle wheel 506 within motor housing 322 prior to being released via exhaust port 306. Paddle wheel 506, upon receiving the compressed air via air inlet 324, applies a rotary force to rotary shaft 508 which, in turn, drives fan 308. Fan 308, when actuated, circulates the heated air provided by heating component 304. This allows for a forced convection heater to heat an enclosure without necessitating a large quantity of supply air or an elevated surface temperature for cartridge heater 502.

[0025] FIG. 6 is a cross sectional view of a heat sink of a heating assembly in accordance with embodiments of the present invention. Heat sink 318 illustratively includes a housing portion 602 and radially extending fins 320. Housing portion 602 is configured to house a heater cartridge (e.g., heater cartridge 502) within a bore 604 of housing portion 602. Bore 604 can take a wide variety of forms and configurations depending on a desired shape of a heater cartridge. In operation, a heater cartridge can be inserted into bore 604 and used to heat air adjacent to radially extending fins 320. Heated air may then be circulated around an enclosure using a fan assembly.

[0026] FIG. 7A is a diagrammatic front elevation view of a heating assembly in accordance with an embodiment of the present invention. Heating assembly 700 includes heatsink 702 formed a plurality of fins 704 extending radially from central portion 706 containing a heater (not shown in FIG. 7A). In contrast to previously-discussed embodiments, heating assembly 700 does not include a fan. Instead, heating assembly 700 includes a fitting 708 for coupling to an air supply. The supplied air is then conveyed to air distribution block or manifold 710 which includes a plurality of air apertures 712 (shown in FIG. 7B). When air is provided to fitting 708, the air will be distributed within air distribution block 710 and emitted from a various air apertures 712. The air will generally flow along the length of the individual fins 704 and be heated by contact with fins 704. In this way, heating assembly 700 generates heated air for the device. Additionally, FIG. 7A illustrates a fitting for an electrical conduit coupling in order to interface with the electric heater and thermal cutoff switch (shown in FIG. 8). In one example, fitting 714 is configured to threadably receive an electrical conduit or cable gland.

[0027] FIG. 7B is a side elevation view illustrating the various apertures 712 disposed between individual heatsink fins 714. As shown, distal ends of the heatsink fins 714 may include additional geometry (such as a T-shape) in order to increase surface area of the fins 714 as well as to help guide the air along the length of the assembly.

[0028] FIG. 7C is a perspective view of heatsink assembly 700 in accordance with an embodiment of the present invention. Heat sink assembly 700 includes a heater (shown in FIG. 8) that is disposed within central portion 706. The heater extends in a longitudinal direction 707 from first end 703 to second end 705. As can be seen, fins 704 generally extend in directions 709 that have a transverse component to the longitudinal direction 707. The air distribution block is disposed at one of ends 703, 705 and directs airflow along fins 704. In the embodiment shown in FIGS. 7A-7C, the assembly is generally shaped cylindrically. However, embodiments can be practiced with other geometries as well without departing from the scope of the invention.

[0029] FIG. 8 is a diagrammatic cutaway view of heating assembly 700 in accordance with an embodiment of the present invention. Heating assembly 700 is shown with a number of fins 714 removed and cutaway in order to expose the internal components of heating assembly 700. As shown, a heater, such as an electric cartridge heater 720 is disposed within central portion 706 of assembly 700 within metal bore 722. The metal bore 722 is also in thermal contact with each of fins 714 in order to provide robust heat flow. Additionally, a thermal cutoff switch 724 is also provided within central portion 706 of assembly 700. Thermal cutoff switch 724 may be any structure that is configured to generate an open circuit when a particular temperature is achieved. In one example, thermal cutoff switch 724 may include an internal bi-metallic structure that deforms in response to temperature and generates the open circuit (cutoff) at a selected temperature. However, any suitable structure that is able to interrupt the flow of electrical current to heater 720 at a selected or prescribed temperature can be used. As shown in FIG. 8, a heat pipe 726 is coupled to metal bore 722 proximate heater 720. Heat pipe 726 is also coupled to thermal cutoff switch 724. Heat pipe 726 utilizes known heat pipe technology to generate highly efficient heat flow from metal bore 722 to thermal cutoff switch 724. In this way, as the temperature of metal bore 722 rises, heat pipe 726 ensures that thermal cutoff switch 724 is quickly and efficiently brought to the same temperature. This provides enhanced thermal control for a relatively simple thermal element (thermal cutoff switch 724). However, those skilled in the art will recognize that other structures and techniques can be used to thermally couple thermal cutoff switch 724 to the

internal temperature of heating assembly 700. For example, heat pipe 726 could simply be a solid metal rod formed of a relatively high thermal conductivity metal such as copper or aluminum.

[0030] FIG. 8 also shows a number of air supply apertures 712 disposed on a surface 728 of air distribution block 710. In one embodiment, air supply apertures 712 are positioned such that they are aligned between individual heatsink fins 714. Additionally, as shown in the embodiment in FIG. 8, the apertures 712 are positioned such that their centers are generally along a circle that is smaller than the outside diameter of air distribution block 710. However, it is expressly contemplated that there may be multiple air supply apertures disposed in the gap between each set of heat sink fins 714. For example, a second set of apertures could be similarly aligned with the heatsink fins 714 but be positioned such that their centers are along a circle having a larger diameter than the alignment circle for apertures 712. Additionally, while apertures 712 are shown as circles, it is also expressly contemplated that these may be machined as slots, ellipses, or any suitable shape that facilitates airflow.

[0031] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A heating assembly, comprising:
 - a heater extending in a longitudinal direction from a first end to a second end;
 - a plurality of heat transfer fins thermally coupled to the heater and extending in a direction transverse to the longitudinal direction;
 - an airflow component positioned proximate one of the first and second end and configured to generate airflow along the plurality of heat transfer fins toward the other of the first and second end.
2. The heating assembly of claim 1, wherein the airflow component is an air distribution block coupleable to a source of air and configured to generate the airflow using a plurality of air apertures.
3. The heating assembly of claim 2, wherein each air aperture is disposed between a pair of heat transfer fins.
4. The heating assembly of claim 1, wherein the heater includes at least one electric cartridge heater.
5. The heating assembly of claim 4, wherein the electric cartridge heater is disposed within a metal bore.
6. The heating assembly of claim 5, and further comprising a thermal control component operably coupled to the heater.
7. The heating assembly of claim 6, wherein the thermal control component is a thermal cutoff switch.
8. The heating assembly of claim 7, wherein the thermal cutoff switch is thermally coupled to the heater by a heat pipe.
9. A method of heating a device, the method comprising:
 - coupling an air distribution block to a source of air to receive input air from the source of air;
 - providing a heating assembly having a heater and a plurality of heatsink fins extending from the heater; and
 - generating air flow from a plurality of air apertures in the air distribution block along the heatsink fins.

10. The method of claim 9, and further comprising controlling the heater using a thermal cutoff switch.
11. The method of claim 10, and further comprising coupling the heater to the thermal cutoff switch using a heat pipe.
12. A process gas chromatograph, comprising:
 - an analyzer oven configured to receive at least one sample, the analyzer oven including:
 - a heating assembly configured to heat the at least one sample, the heating assembly having a heating component disposed within a central portion having a first end and a second end, the central portion having a plurality of heatsink fins coupled thereto; and
 - an airflow component positioned proximate one of the first and second end and configured to generate airflow along the plurality of heatsink fins toward the other of the first and second end.
13. The process gas chromatograph of claim 12, and further comprising at least one chromatographic column disposed within the analyzer oven.
14. The process gas chromatograph of claim 12, wherein the airflow component is an air distribution block coupleable to a source of air and configured to generate the airflow using a plurality of air apertures.
15. The process gas chromatograph of claim 14, wherein each air aperture is disposed between a pair of heatsink fins.
16. The process gas chromatograph of claim 12, wherein the heating component includes at least one electric cartridge heater.
17. The process gas chromatograph of claim 16, wherein the electric cartridge heater is disposed within a metal bore.
18. The process gas chromatograph of claim 17, and further comprising a thermal control component operably coupled to the heater.
19. The process gas chromatograph of claim 18, wherein the thermal control component is a thermal cutoff switch.
20. The process gas chromatograph of claim 19, wherein the thermal cutoff switch is thermally coupled to the heater by a heat pipe.

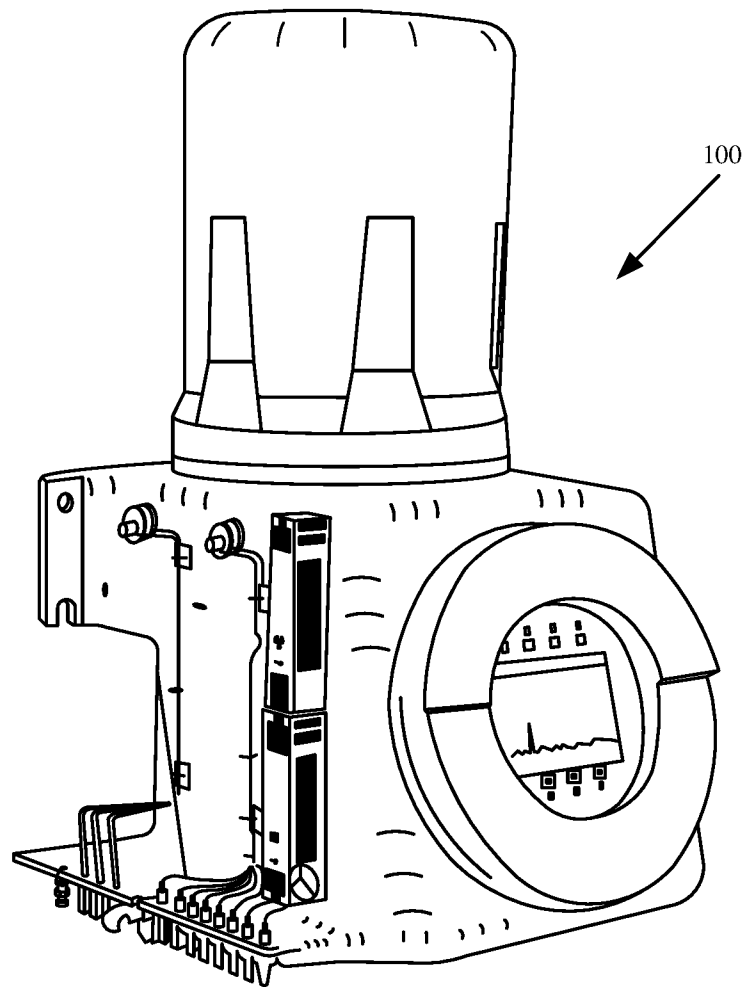


FIG. 1

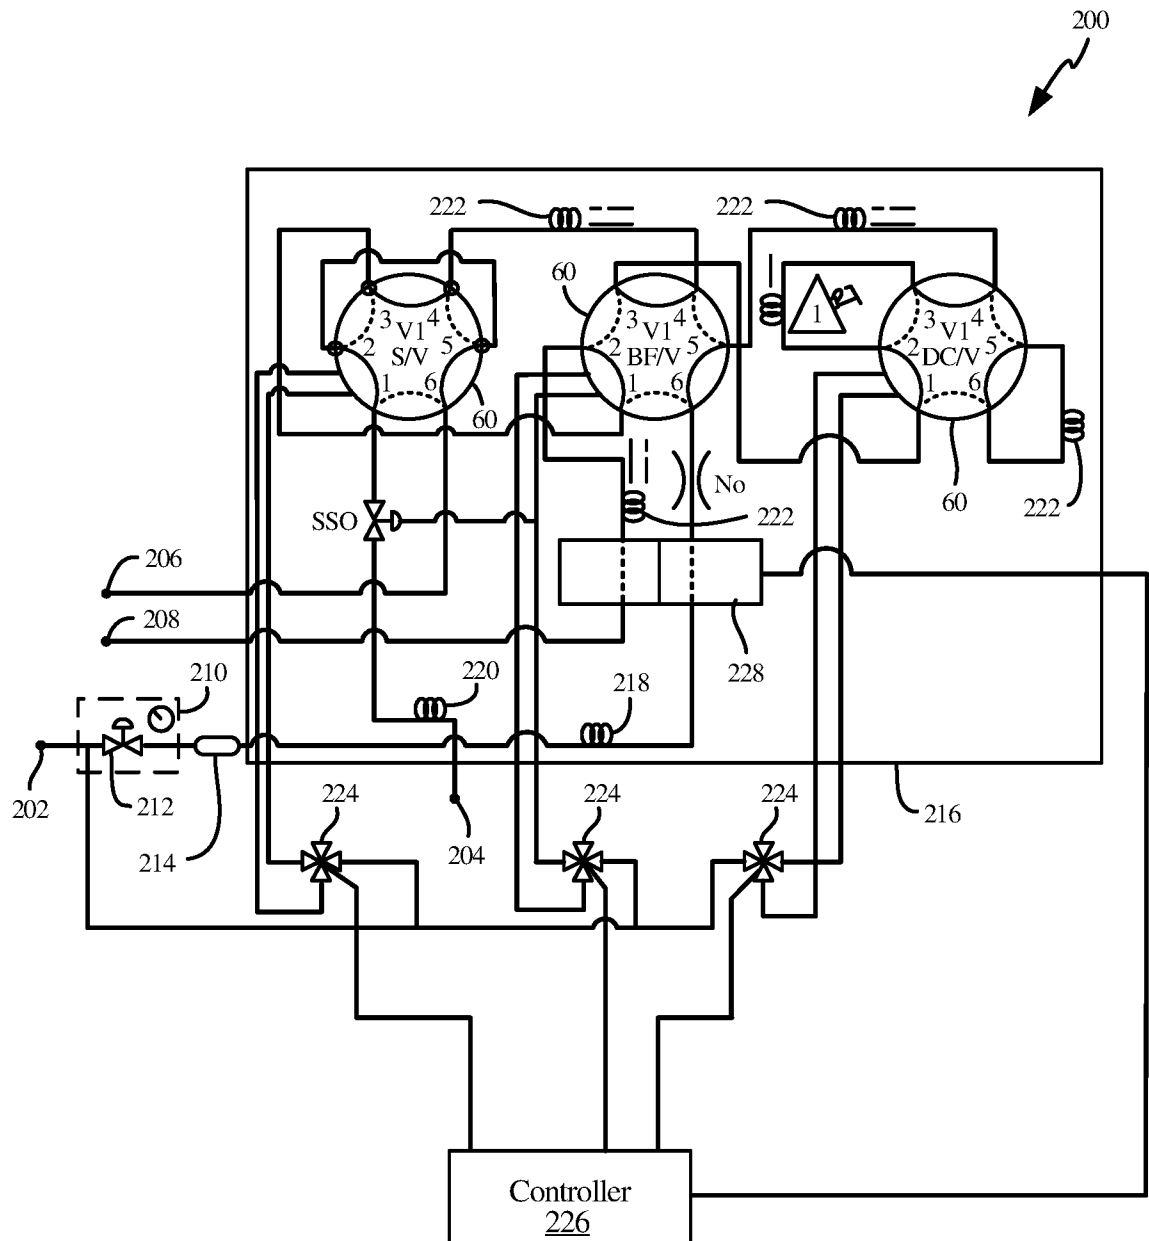
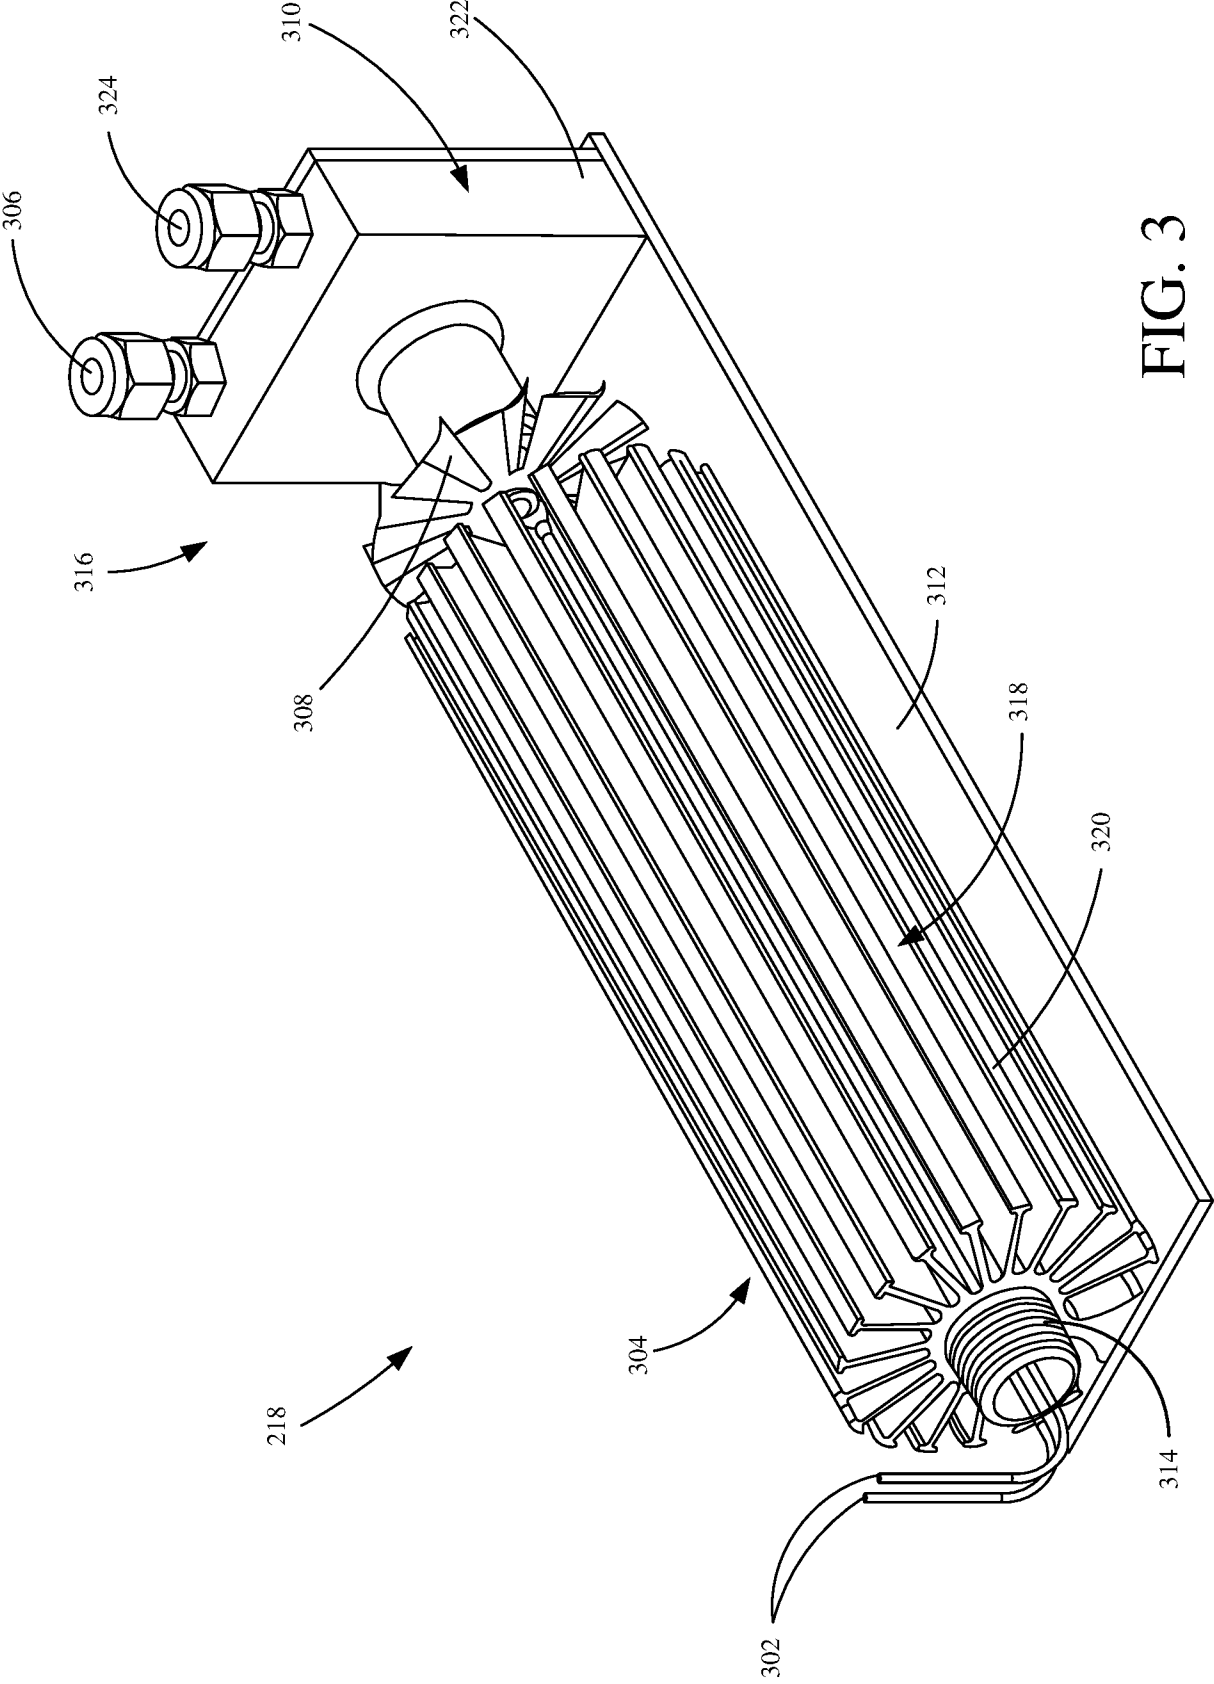


FIG. 2



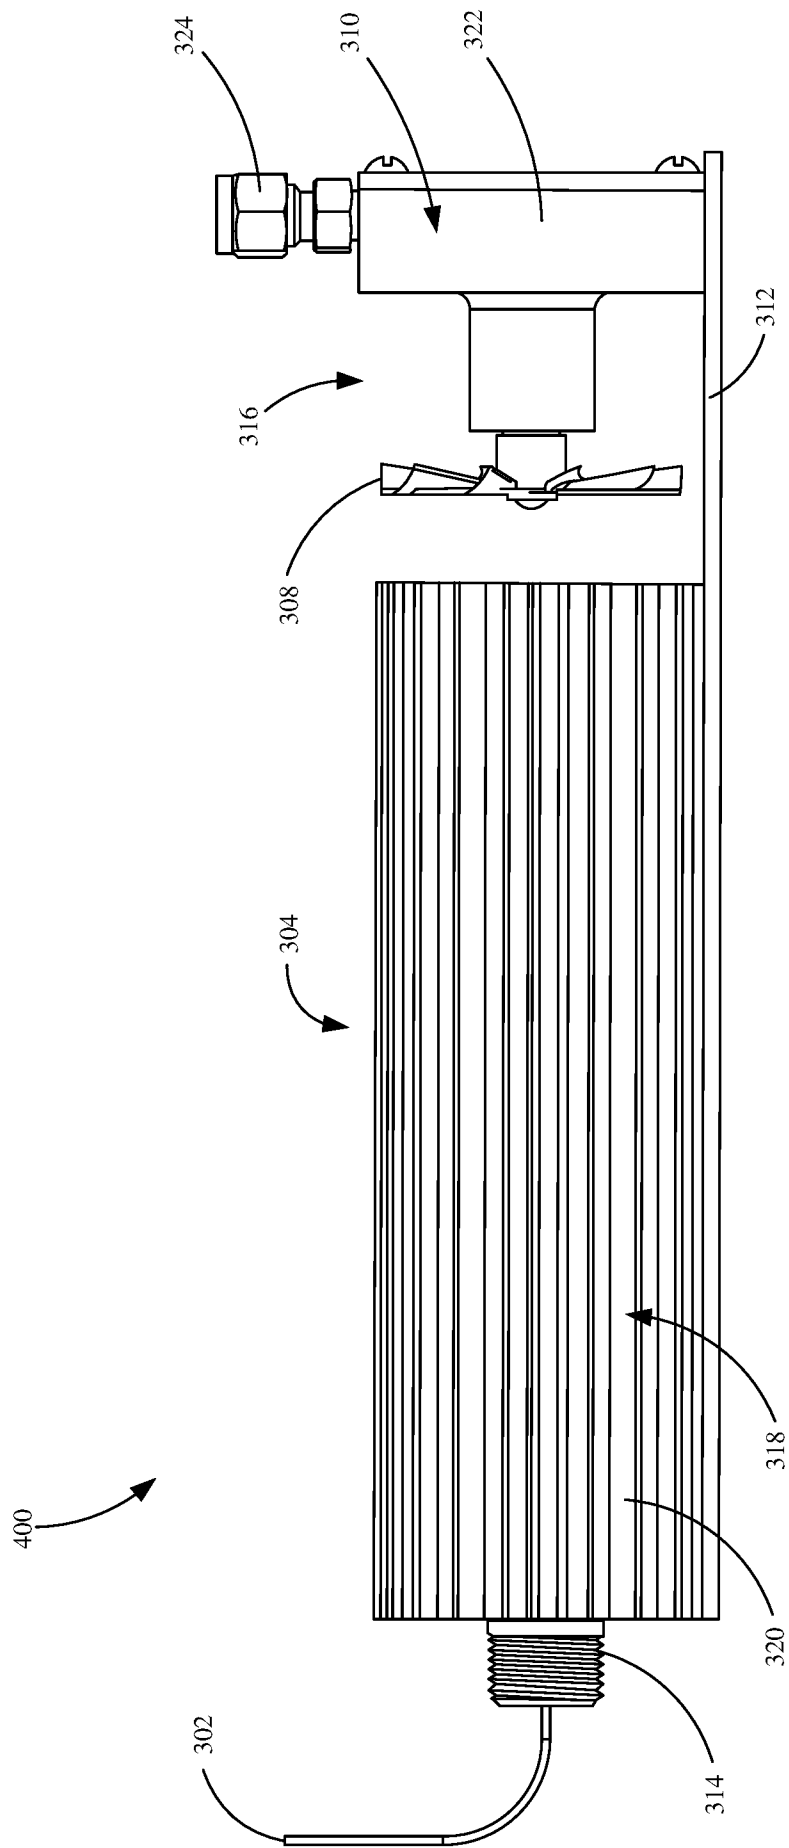


FIG. 4

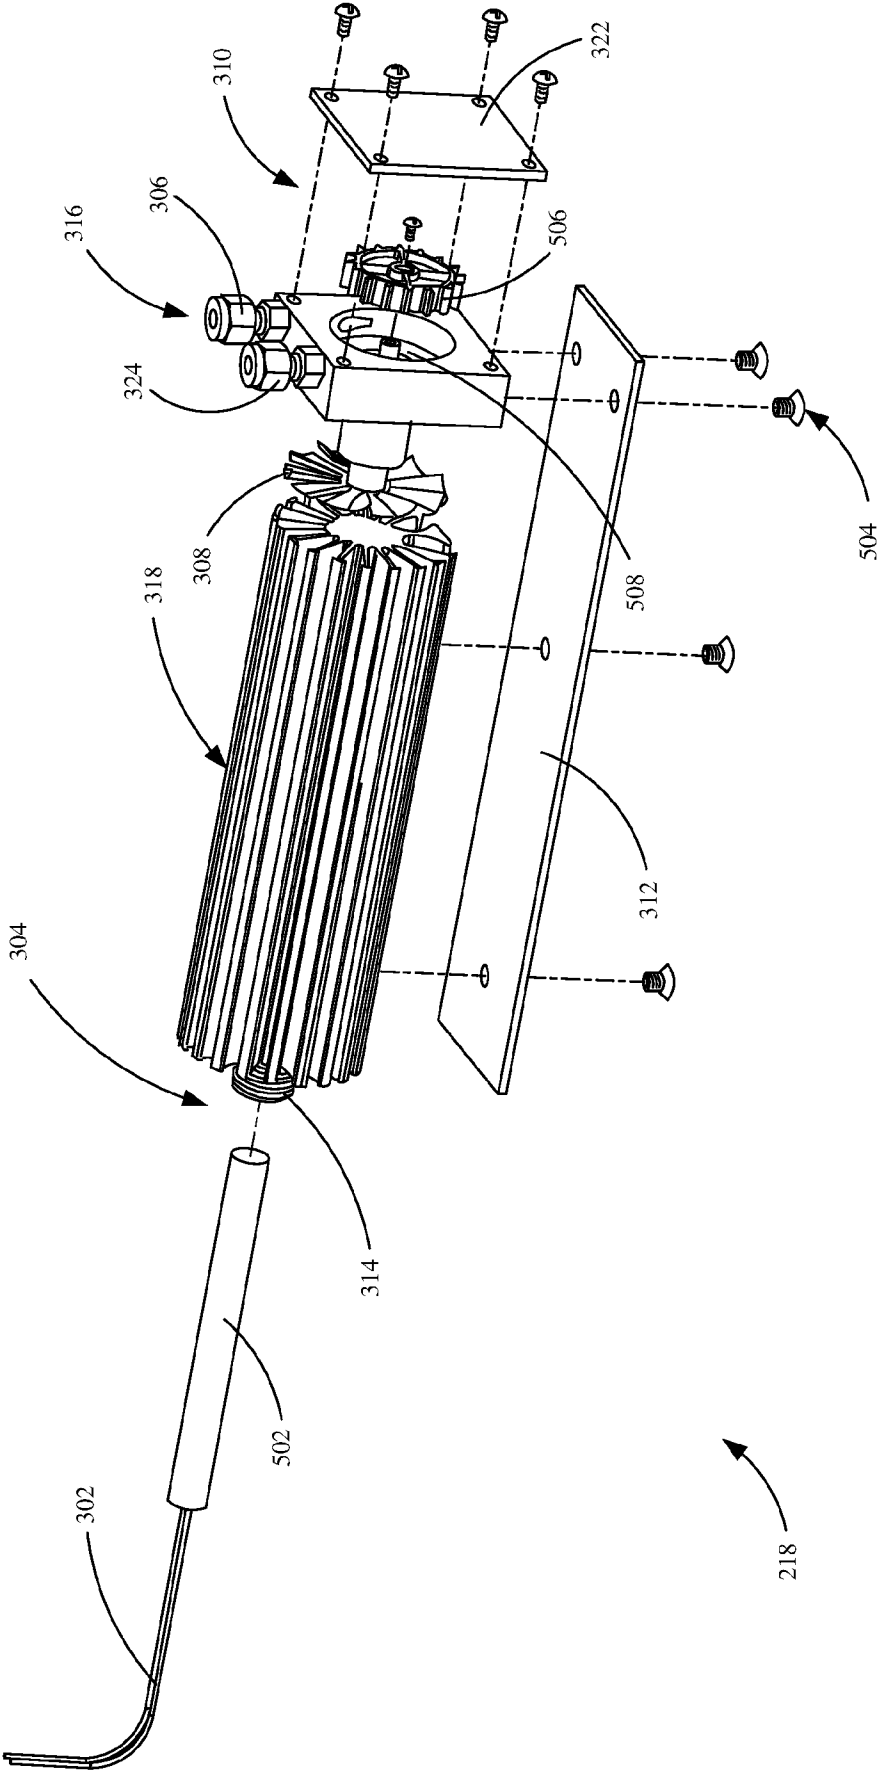


FIG. 5

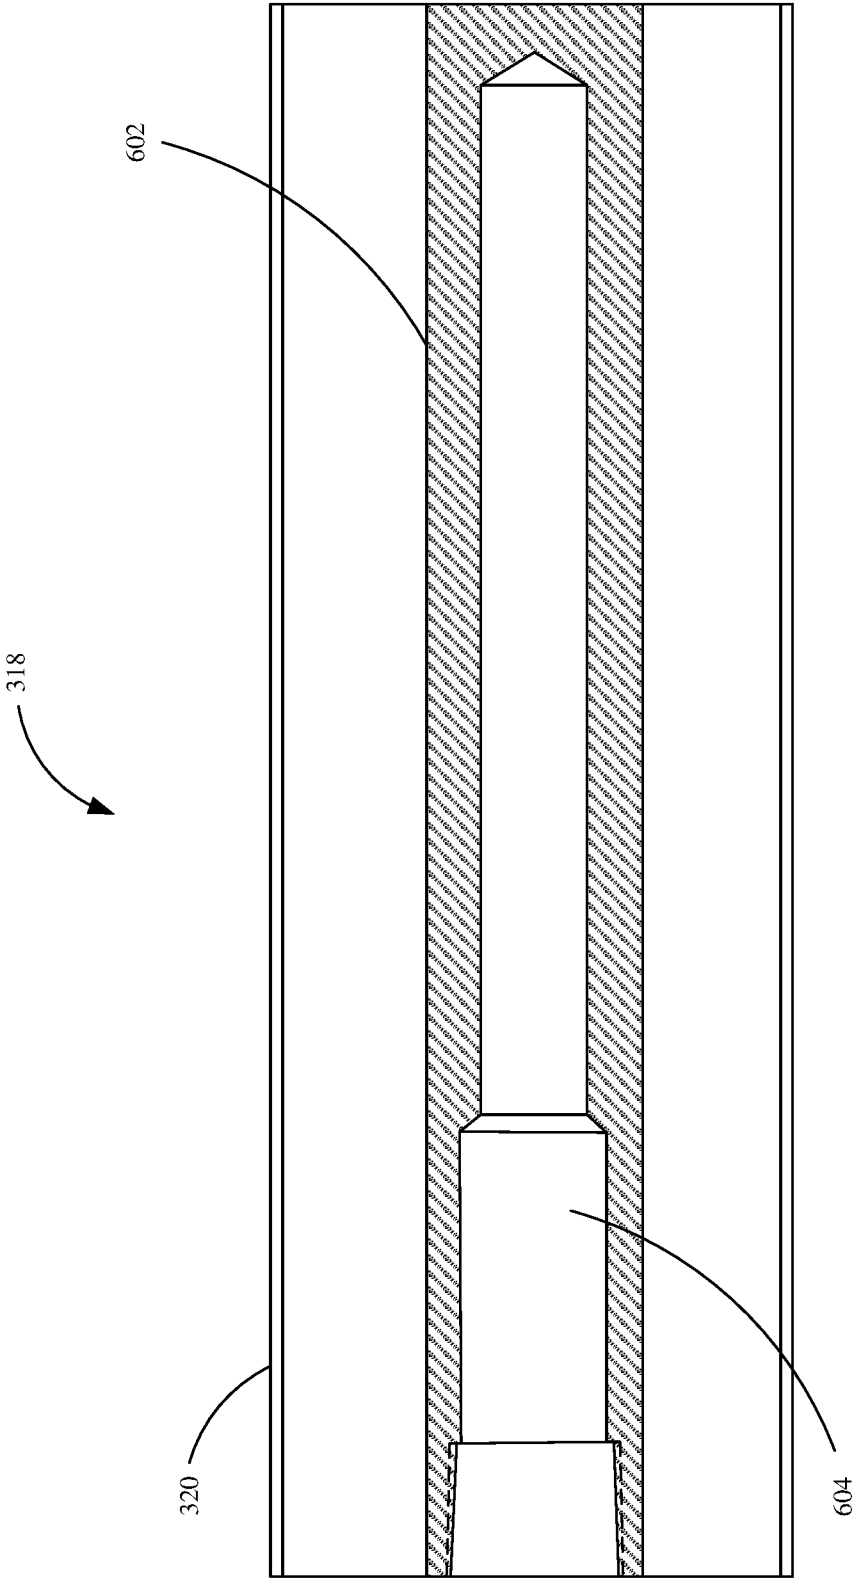


FIG. 6

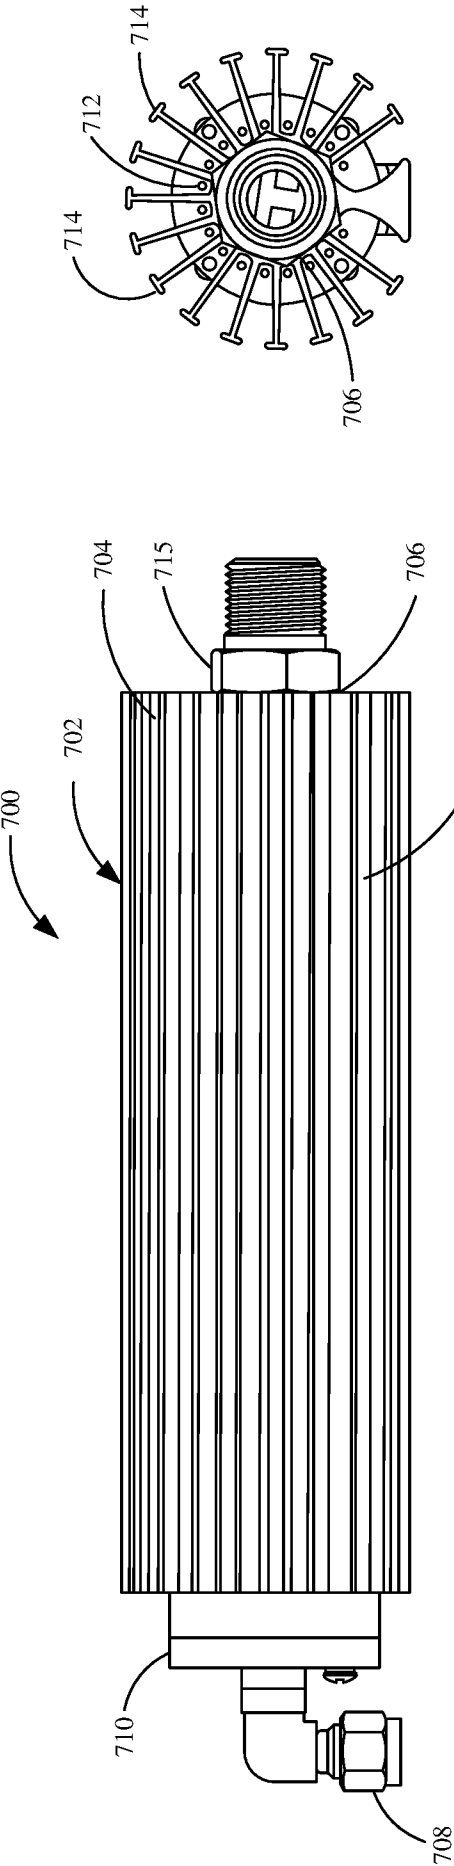


FIG. 7A

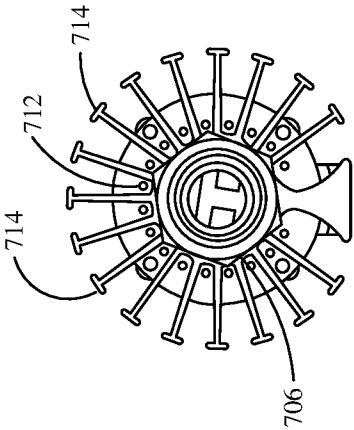


FIG. 7B

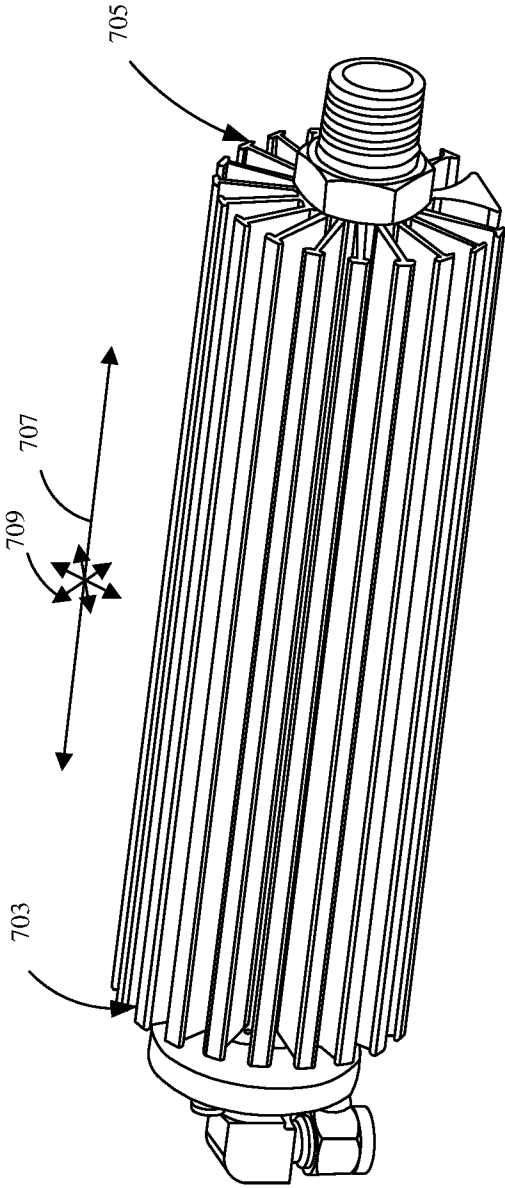


FIG. 7C

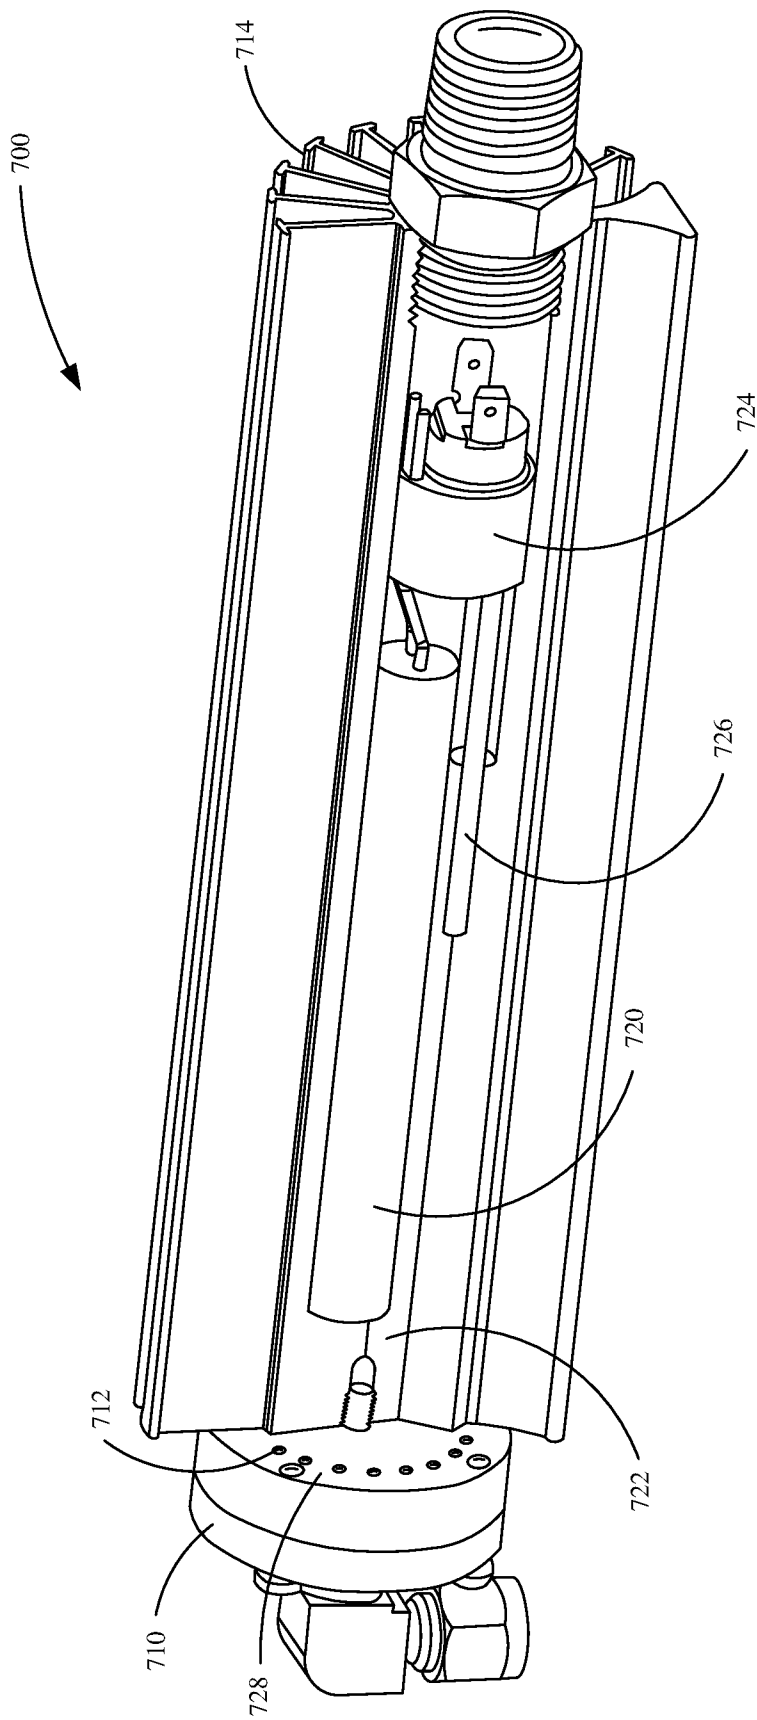


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2019/051476**A. CLASSIFICATION OF SUBJECT MATTER****F24H 3/06(2006.01)i, F24H 9/18(2006.01)i, G01N 30/30(2006.01)i, G01N 30/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F24H 3/06; B60H 1/00; F24H 001/10; F24H 9/00; G01N 30/02; F24H 9/18; G01N 30/30

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: gas chromatography, heater, heatsink fins, apertures, switch

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2007-136702 A2 (ABB INC. et al.) 29 November 2007 See paragraphs [0028]-[0049]; claim 1; and figures 1, 4-6, 9.	1-20
Y	JP 61-213441 A (DIESEL KIKI CO., LTD.) 22 September 1986 See pages 222-224; and figures 1-5.	1-20
Y	US 2013-0052083 A1 (KIRBY et al.) 28 February 2013 See paragraphs [0047]-[0068]; and figures 5, 9, 15B.	4-8, 10-11, 16-20
A	US 2003-0138244 A1 (LONG et al.) 24 July 2003 See claims 1-34; and figures 1-2, 3A-3C, 4-8.	1-20
A	KR 10-2003-0032717 A (HYUNDAI MOTOR COMPANY) 26 April 2003 See claims 1-4; and figure 3.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

03 January 2020 (03.01.2020)

Date of mailing of the international search report

03 January 2020 (03.01.2020)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

HWANG, Chan Yoon

Telephone No. +82-42-481-3347



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/051476

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2007-136702 A2	29/11/2007	WO 2007-136702 A3	20/03/2008
JP 61-213441 A	22/09/1986	JP 1665112 C	19/05/1992
		JP 2059387 B2	12/12/1990
US 2013-0052083 A1	28/02/2013	EP 2524571 A1	21/11/2012
		EP 2524571 A4	29/06/2016
		US 2016-0363564 A1	15/12/2016
		US 9453824 B2	27/09/2016
		US 9714926 B2	25/07/2017
		WO 2011-085359 A1	14/07/2011
US 2003-0138244 A1	24/07/2003	AU 2002-367507 A1	02/09/2003
		CN 1623067 A	01/06/2005
		CN 1623067 C	01/10/2008
		EP 1468225 A1	20/10/2004
		JP 2005-515397 A	26/05/2005
		US 6944394 B2	13/09/2005
		WO 2003-062714 A1	31/07/2003
KR 10-2003-0032717 A	26/04/2003	KR 10-0405483 B1	14/11/2003