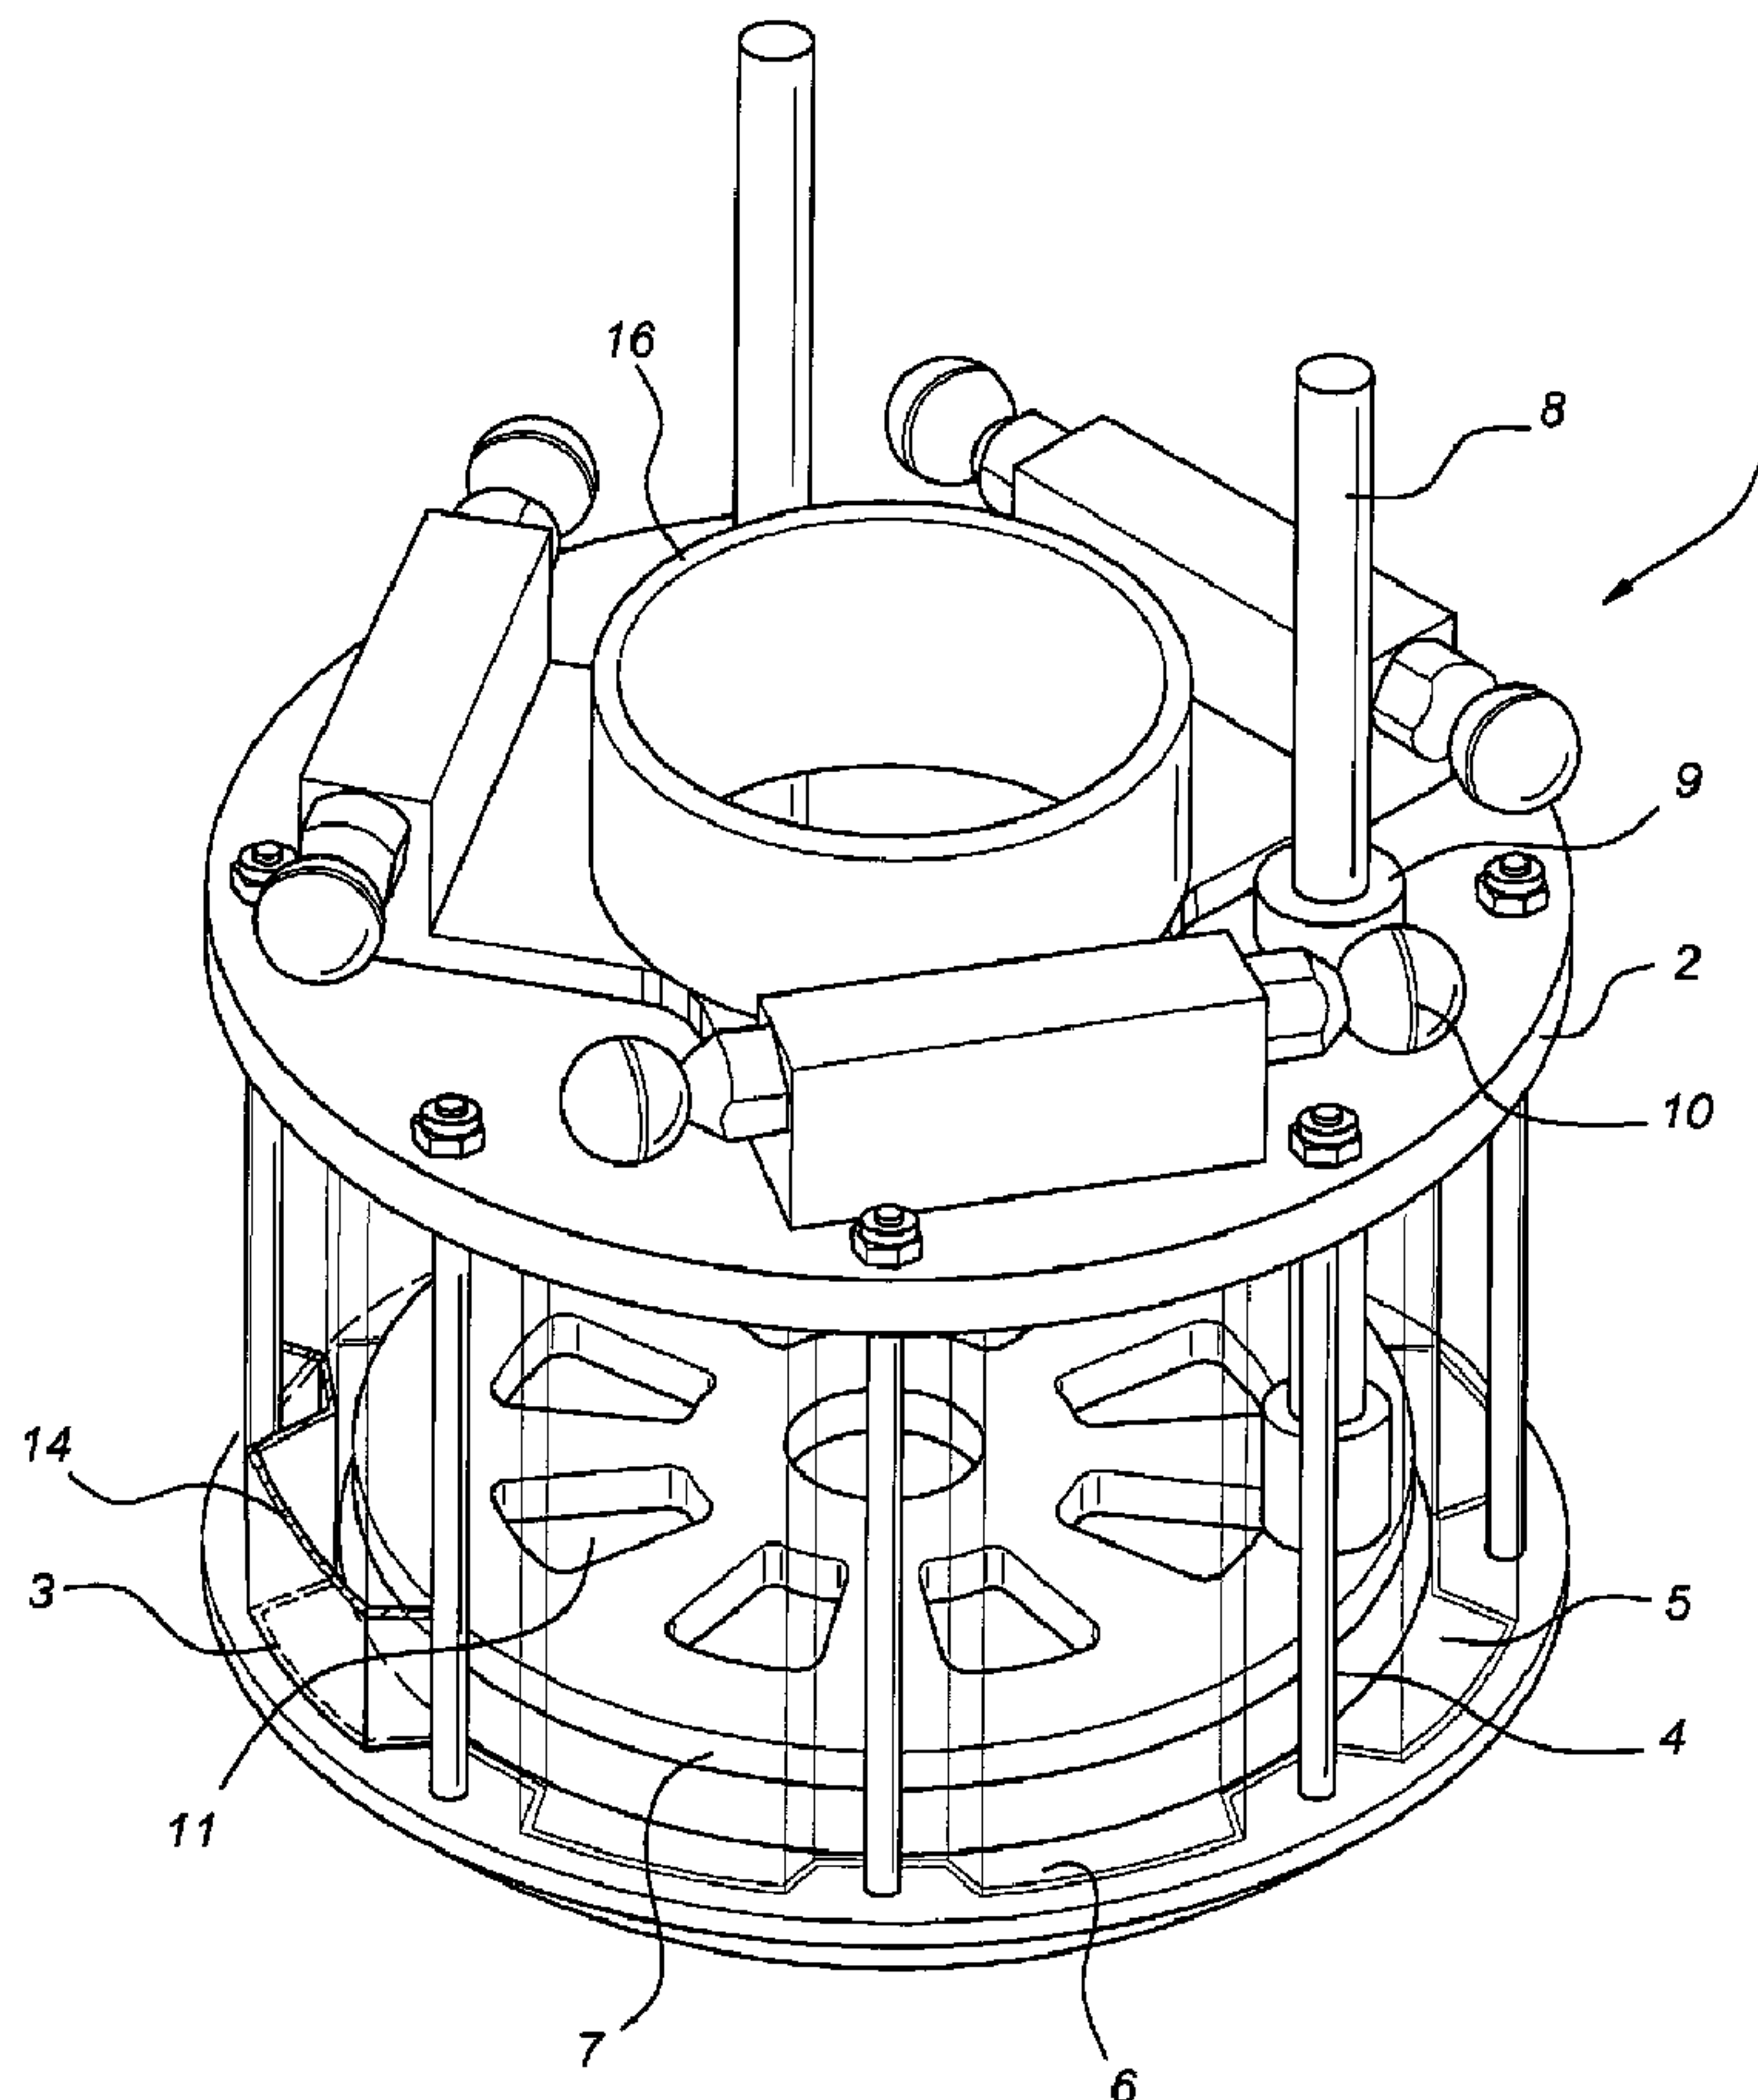




(86) Date de dépôt PCT/PCT Filing Date: 2005/06/20
(87) Date publication PCT/PCT Publication Date: 2005/12/29
(45) Date de délivrance/Issue Date: 2013/05/07
(85) Entrée phase nationale/National Entry: 2006/12/18
(86) N° demande PCT/PCT Application No.: NL 2005/000447
(87) N° publication PCT/PCT Publication No.: 2005/123554
(30) Priorité/Priority: 2004/06/18 (US10/869,927)

(51) Cl.Int./Int.Cl. *B65G 47/91* (2006.01),
B65G 57/30 (2006.01)
(72) Inventeur/Inventor:
RENOUX, GERALD E., US
(73) Propriétaire/Owner:
BLUEPRINT AUTOMATION B.V., NL
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : TETE D'ASPIRATION
(54) Title: SUCTION HEAD



(57) Abrégé/Abstract:

Suction head (1) and method for picking articles (20). The suction head comprises a sleeve-like (14) body having a connection (16) to an under pressure source at one end and an opening for picking up particles (20) at the other end thereof. Along side the

(57) **Abrégé(suite)/Abstract(continued):**

sleeve channels (5) are provided being connected to the under pressure source an opening near the lower end (3) of the sleeve. The lower end (3) of the sleeve (14) is delimited by a circumferential edge so that the article is picked with only a small clearance between the article and the inner circumference of the circumferential ring (6). A platen (7) is provided against which the article is placed. This platen can be moved relative to the sleeve.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2005 (29.12.2005)

PCT

(10) International Publication Number
WO 2005/123554 A1

(51) International Patent Classification⁷: **B65G 47/91,**
57/30

E. [US/US]; 2057 Spring Gulch Drive, Lyons, CO 80540
(US).

(21) International Application Number:
PCT/NL2005/000447

(74) Agent: **VAN WESTENBRUGGE, Andries**; Nederland-
sch Octrooibureau, P.O. Box 29720, NL-2502 LS The
Hague (NL).

(22) International Filing Date: 20 June 2005 (20.06.2005)

(81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/869,927 18 June 2004 (18.06.2004) US

(71) Applicant (*for all designated States except US*):
BLUEPRINT AUTOMATION B.V. [NL/NL]; Oost-
zee 26, NL-3446 CH Woerden (NL).

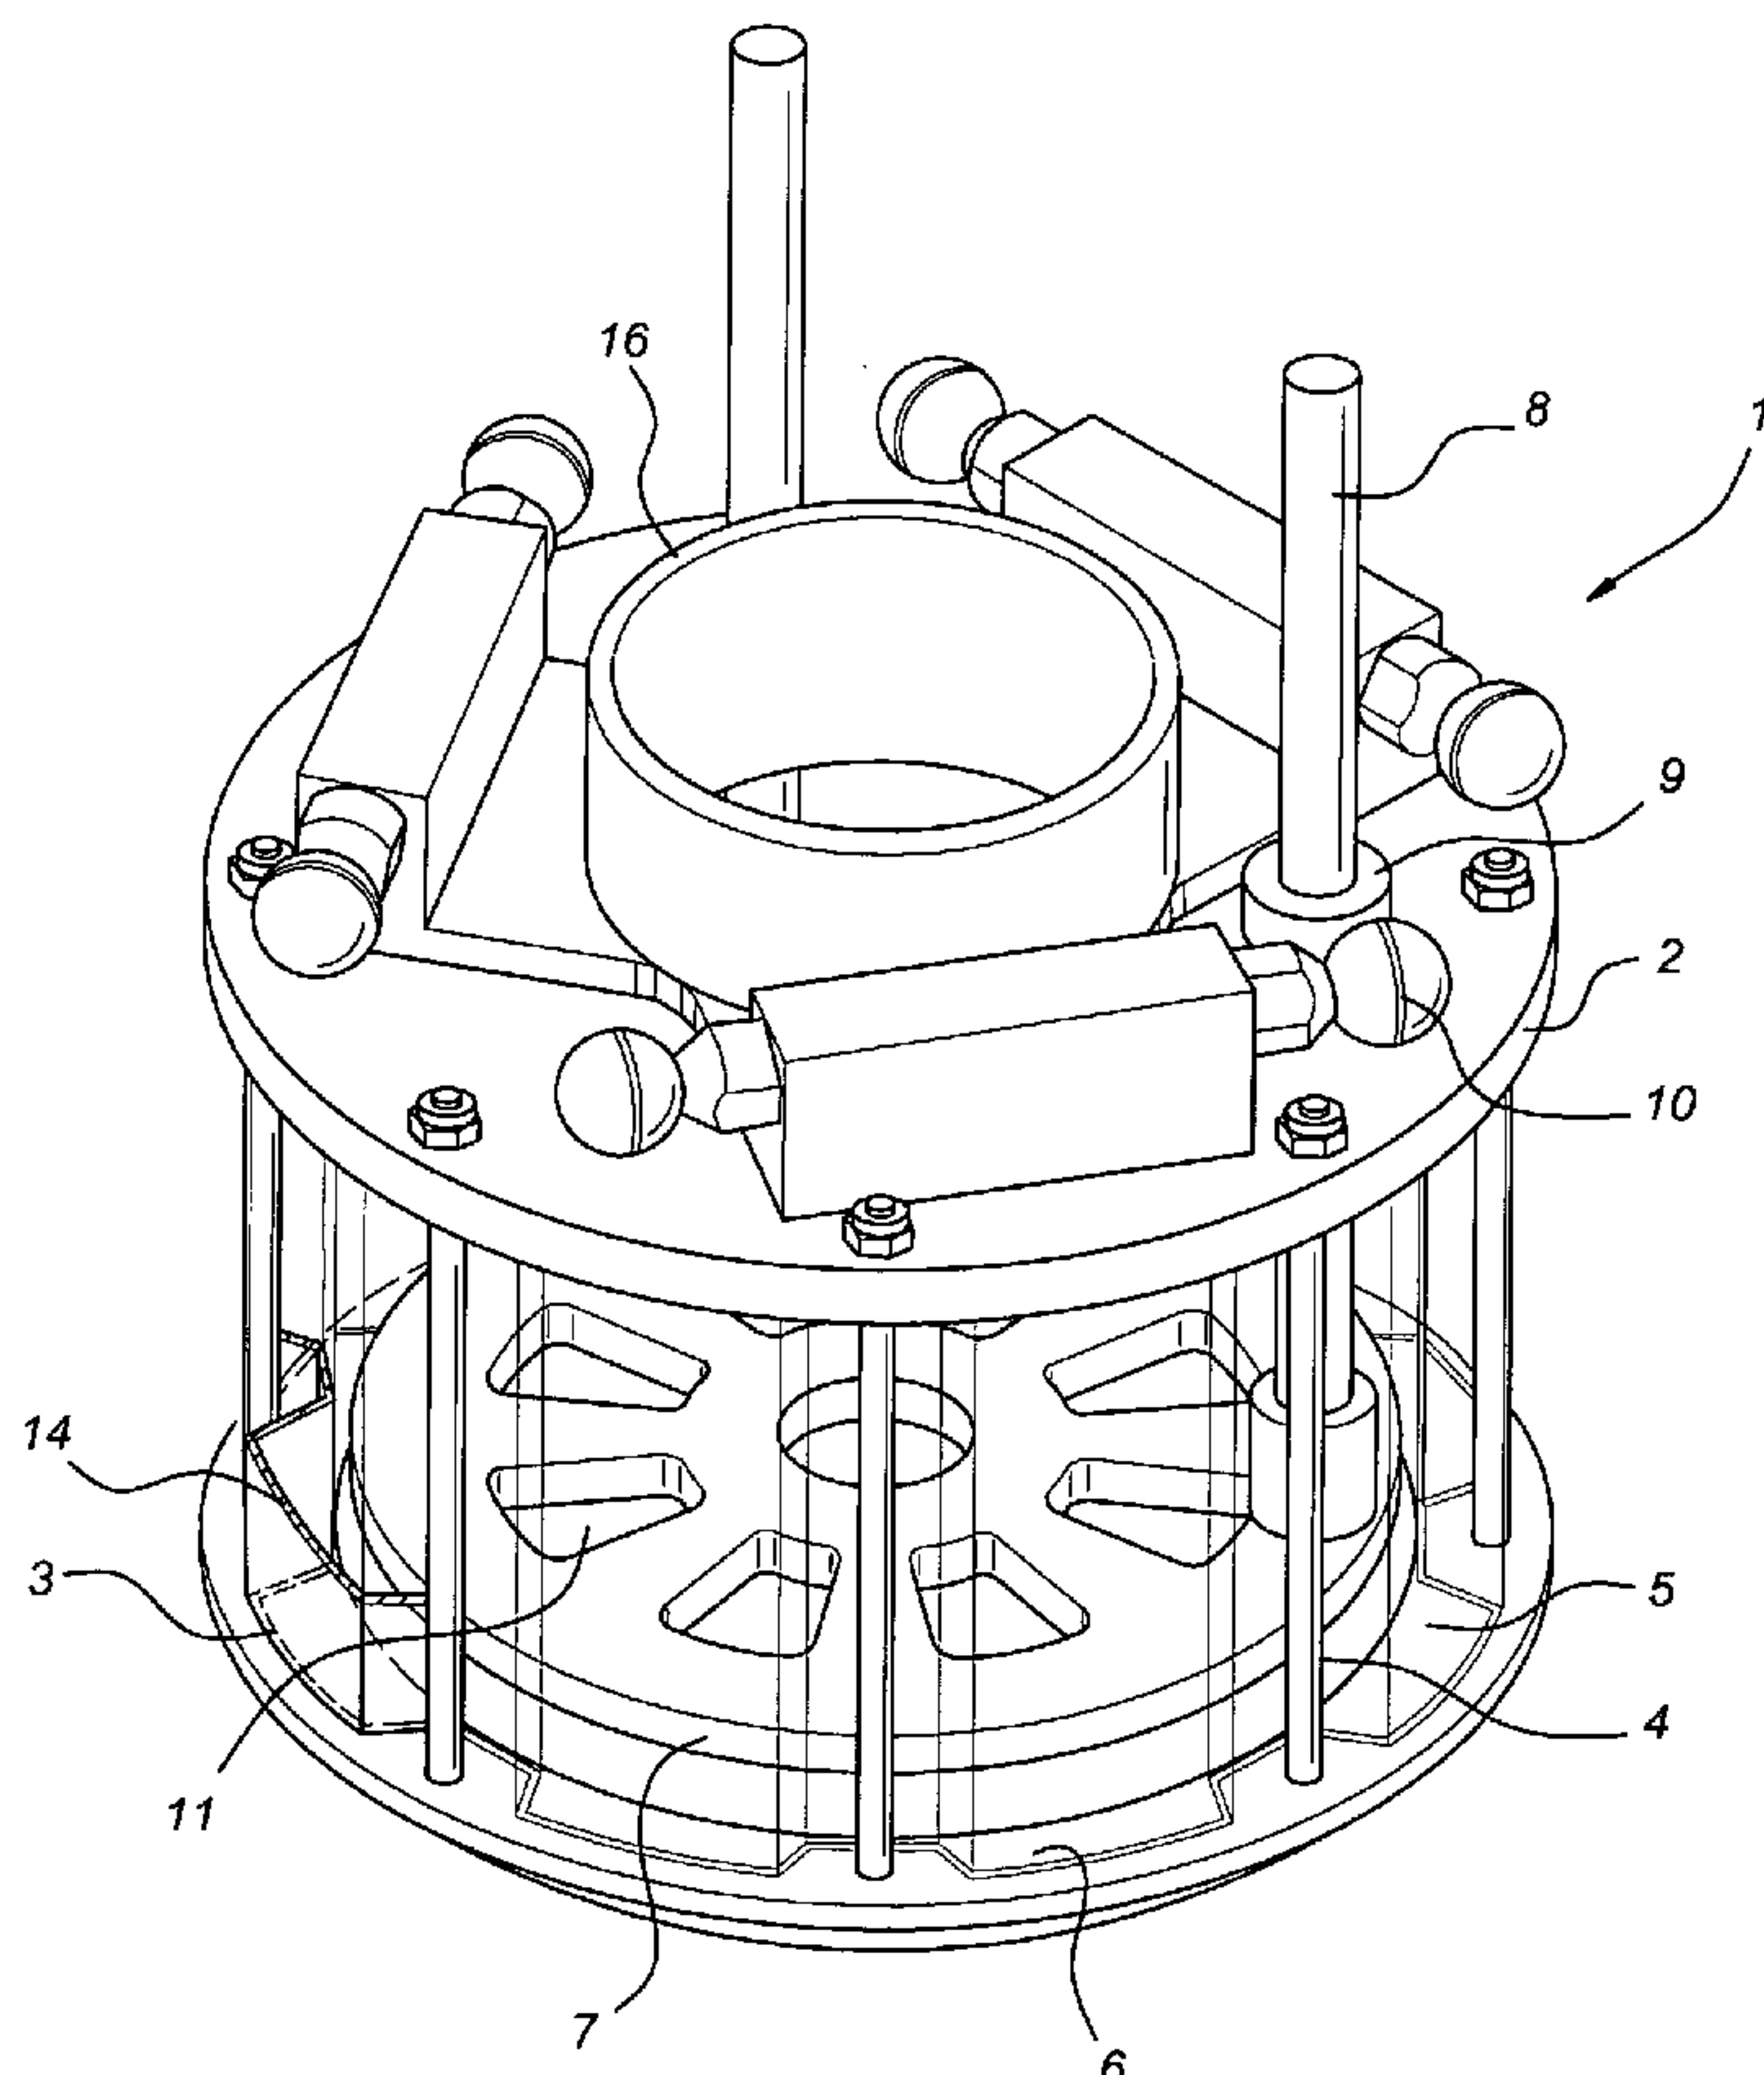
(84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **RENOUX, Gerald,**

[Continued on next page]

(54) Title: SUCTION HEAD



(57) **Abstract:** Suction head (1) and method for picking articles (20). The suction head comprises a sleeve-like (14) body having a connection (16) to an under pressure source at one end and an opening for picking up particles (20) at the other end thereof. Along side the sleeve channels (5) are provided being connected to the under pressure source an opening near the lower end (3) of the sleeve. The lower end (3) of the sleeve (14) is delimited by a circumferential edge so that the article is picked with only a small clearance between the article and the inner circumference of the circumferential ring (6). A platen (7) is provided against which the article is placed. This platen can be moved relative to the sleeve.

WO 2005/123554 A1

WO 2005/123554 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Title: Suction head.

The subject invention relates to a suction head for gripping a number of articles according to the preamble of claim 1. Such a suction head can be used to pick or grip a number of waver-like articles such as food stuff products. An example of such a suction head is disclosed in US 6,554,336 A. This suction head is used for picking up articles and comprises a sleeve having an upper plate to which a platen is mounted through spacers. This platen is in a fixed position relative to the upper plate and sleeve.

The invention aims to provide a suction head to smoothly grip more than one article in order to provide a stack of articles.

The aim is realized in a suction head for gripping a number of articles having a longitudinal axis, a first end for receiving the articles and a second end having a connection to an under pressure source and connections for connecting to a manipulating arm, wherein an abutment platen is provided between the first and second ends, the platen having an outer circumferential shape smaller than the inner circumferential shape of the sleeve, the platen being displaceable in the sleeve in the direction of the longitudinal axis, wherein the first end of the sleeve is provided with a circumferential ring extending between the outer and inner circumferential shape of the sleeve and defining an inner circumference corresponding substantially to the outer circumference of the platen.

To control the movement of the articles within the suction head and to prevent tilting of disc-shaped articles in the suction head according to the invention the platen is displaceable in the sleeve. In the starting position preferably the platen is positioned somewhat above the upper surface of the circumferential ring. The article which is picked up will then be suctioned through the opening of the circumferential ring and be positioned against the platen. Before a second article is picked up the platen can be moved one position higher providing space for a second article. In this way a controlled stacking of articles within the suction head can be realized.

However, such a displaceable provision of said platen also allows controlled discharge of the suction head. If the suction head is filled as required with articles and displaced to a discharging position except from releasing the vacuum, also the platen can be pushed outwardly such that the articles are discharged in a controlled way in for example a package for food stuff.

According to a preferred embodiment of the invention the first end of said sleeve is provided with a circumferential ring extending between said outer and inner

circumferential shape of said sleeve and defining an inner circumference corresponding substantially to the outer circumference of said platen.

According to this embodiment a circumferential ring or lower plate is provided at the bottom of the sleeve. If an article is suctioned after passing the circumferential ring the flow of air will be between the top of the circumferential ring and the lower part of the article. In this way the article will float at a slight distance above the circumferential ring. After a further second article is picked up the first article will be moved one position in upward direction whilst the second article with the first article resting thereon will be in the same position as the original position of the first article i.e. at some distance above the upper surface of the circumferential ring. In this way high speed upward movement of the articles after entering the suction head is prevented as well as damage as consequence thereof.

Basically the platen can have a larger outer circumference than the inner circumference of the circumferential ring. However, according to a preferred embodiment of the invention there is some clearance between the outer circumference of the platen and the inner circumference of the circumferential ring such that the platen can move in or even through the circumferential ring.

20

According to a further embodiment of the invention the sleeve is provided at its inner circumference with guiding channels which function on the other hand to connect the under pressure from an under pressure source at the top of the sleeve to the lower end of the sleeve. It is possible to provide suction both at the lower end of the sleeve and in the area wherein the articles are stacked. Such guiding channels can be obtained by corrugating the sleeve.

25

Preferably the platen is shaped to be positioned adjacent to the channels described above.

30

The invention also relates to a method for picking a number of articles and forming a stack, comprising positioning a suction head above a first article to be picked, applying under pressure in said suction head and moving said first article by said under pressure

against an abutment platen provided in said suction head, picking a second article by said suction head and moving said second article against said first article to form a stack, wherein before picking said second article said platen together with said first article is further moved into said suction head.

5

The invention will be further elucidated referring to preferred embodiments of the invention shown in the drawings, wherein:

Fig. 1 shows in perspective view a first embodiment of the suction head according to
10 the invention;

Fig. 2 shows the suction head according to fig. 1 of the gripping articles.

Fig. 3 schematically shows the air flow in the gripping head according to fig.1 and 2;
15 and

Fig. 4 shows an alternative of the suction head according to the invention.

In fig. 1 the suction head according to the invention is generally referred to by 1. The
20 suction head comprises a corrugated sleeve 14 having a lower edge 3. An upper plate 2 is provided on top of the sleeve 14. A lower plate or circumferential ring 6 is connected to the lower edge 3 and protrudes perpendicular from the sleeve 14.

The upper plate 2 and circumferential 6 are connected through spacer rods 4. Channels
25 5 are defined by the corrugations of the sleeve and provide flow communication between the connection 16 coupled to a source of under pressure and the lower edge 3.

The upper plate 2 is provided with guiding bushes 9 for guiding a slide bar 8 connected to platen 7. However, it should be noted that platen 7 can be guided/operated in any other way from upper plate 2.

30 15 indicates the longitudinal axis of the sleeve 14. Openings 11 can be provided in the platen. Channels 5 provide flow connection between the inlet opening of the circumferential ring or lower plate and connection 16. The suction head is connected to an arm not shown to coupling balls 10. Other connecting means can be used.

This device functions as follows. Through an arm not shown the suction head 1 is positioned above a surface from which the articles such as food stuff and more particular frozen pancakes, have to be picked. The platen 7 is in a low position and there is a continuous flow of air to the under pressure source. As soon as the suction head is above an article to be picked it is lowered and the related article is moved through the lower plate 6 and contacts the lower surface of the platen 7. In this position the article is just above the lower plate 6. Because the main flow of air is from below the article through the corrugations the article will be in a semi-floating condition against the platen 7. Subsequently the suction head is indexed in upward direction.

If the next article to be gripped is found, the suction head is lowered and the platen 7 is moved one position in upward direction. The next second article is positioned in the original position of the first article. After three articles have been picked this way the position of fig. 2 is realized. After receiving an article the platen is indexed upwardly and the next article is taken away from the related surface. After the desired number of articles is formed the suction head is moved to a discharge position. After removal of the under pressure and possibly using over pressure and through downward movement of the platen, the stack of articles is conveyed to a further desired position.

In the room above the platen 7 there is some under pressure. This under pressure is transferred to the first article.

In fig. 4 a further embodiment of the invention is shown. The suction head is generally referred to by 21 and comprises an upper platen 22, lower edge 23 as well as separate air flow channels 25. However, these channels are closed all around and only function for guidance of the articles and fluid connection for under pressure. The lower plate has reference number 26 whilst platen 27 can be moved in upward and downward direction through actuating of a slide bar 28. The actuating mechanism for the slide bar is not shown.

30

The sleeve of the suction head is referred to by 34 whilst the axis of movement of the slide bar 28 has reference 35. 36 is the vacuum connection. In this embodiment there are openings 33 between the lower plate 26 and the channels or inner sleeve 32. In this

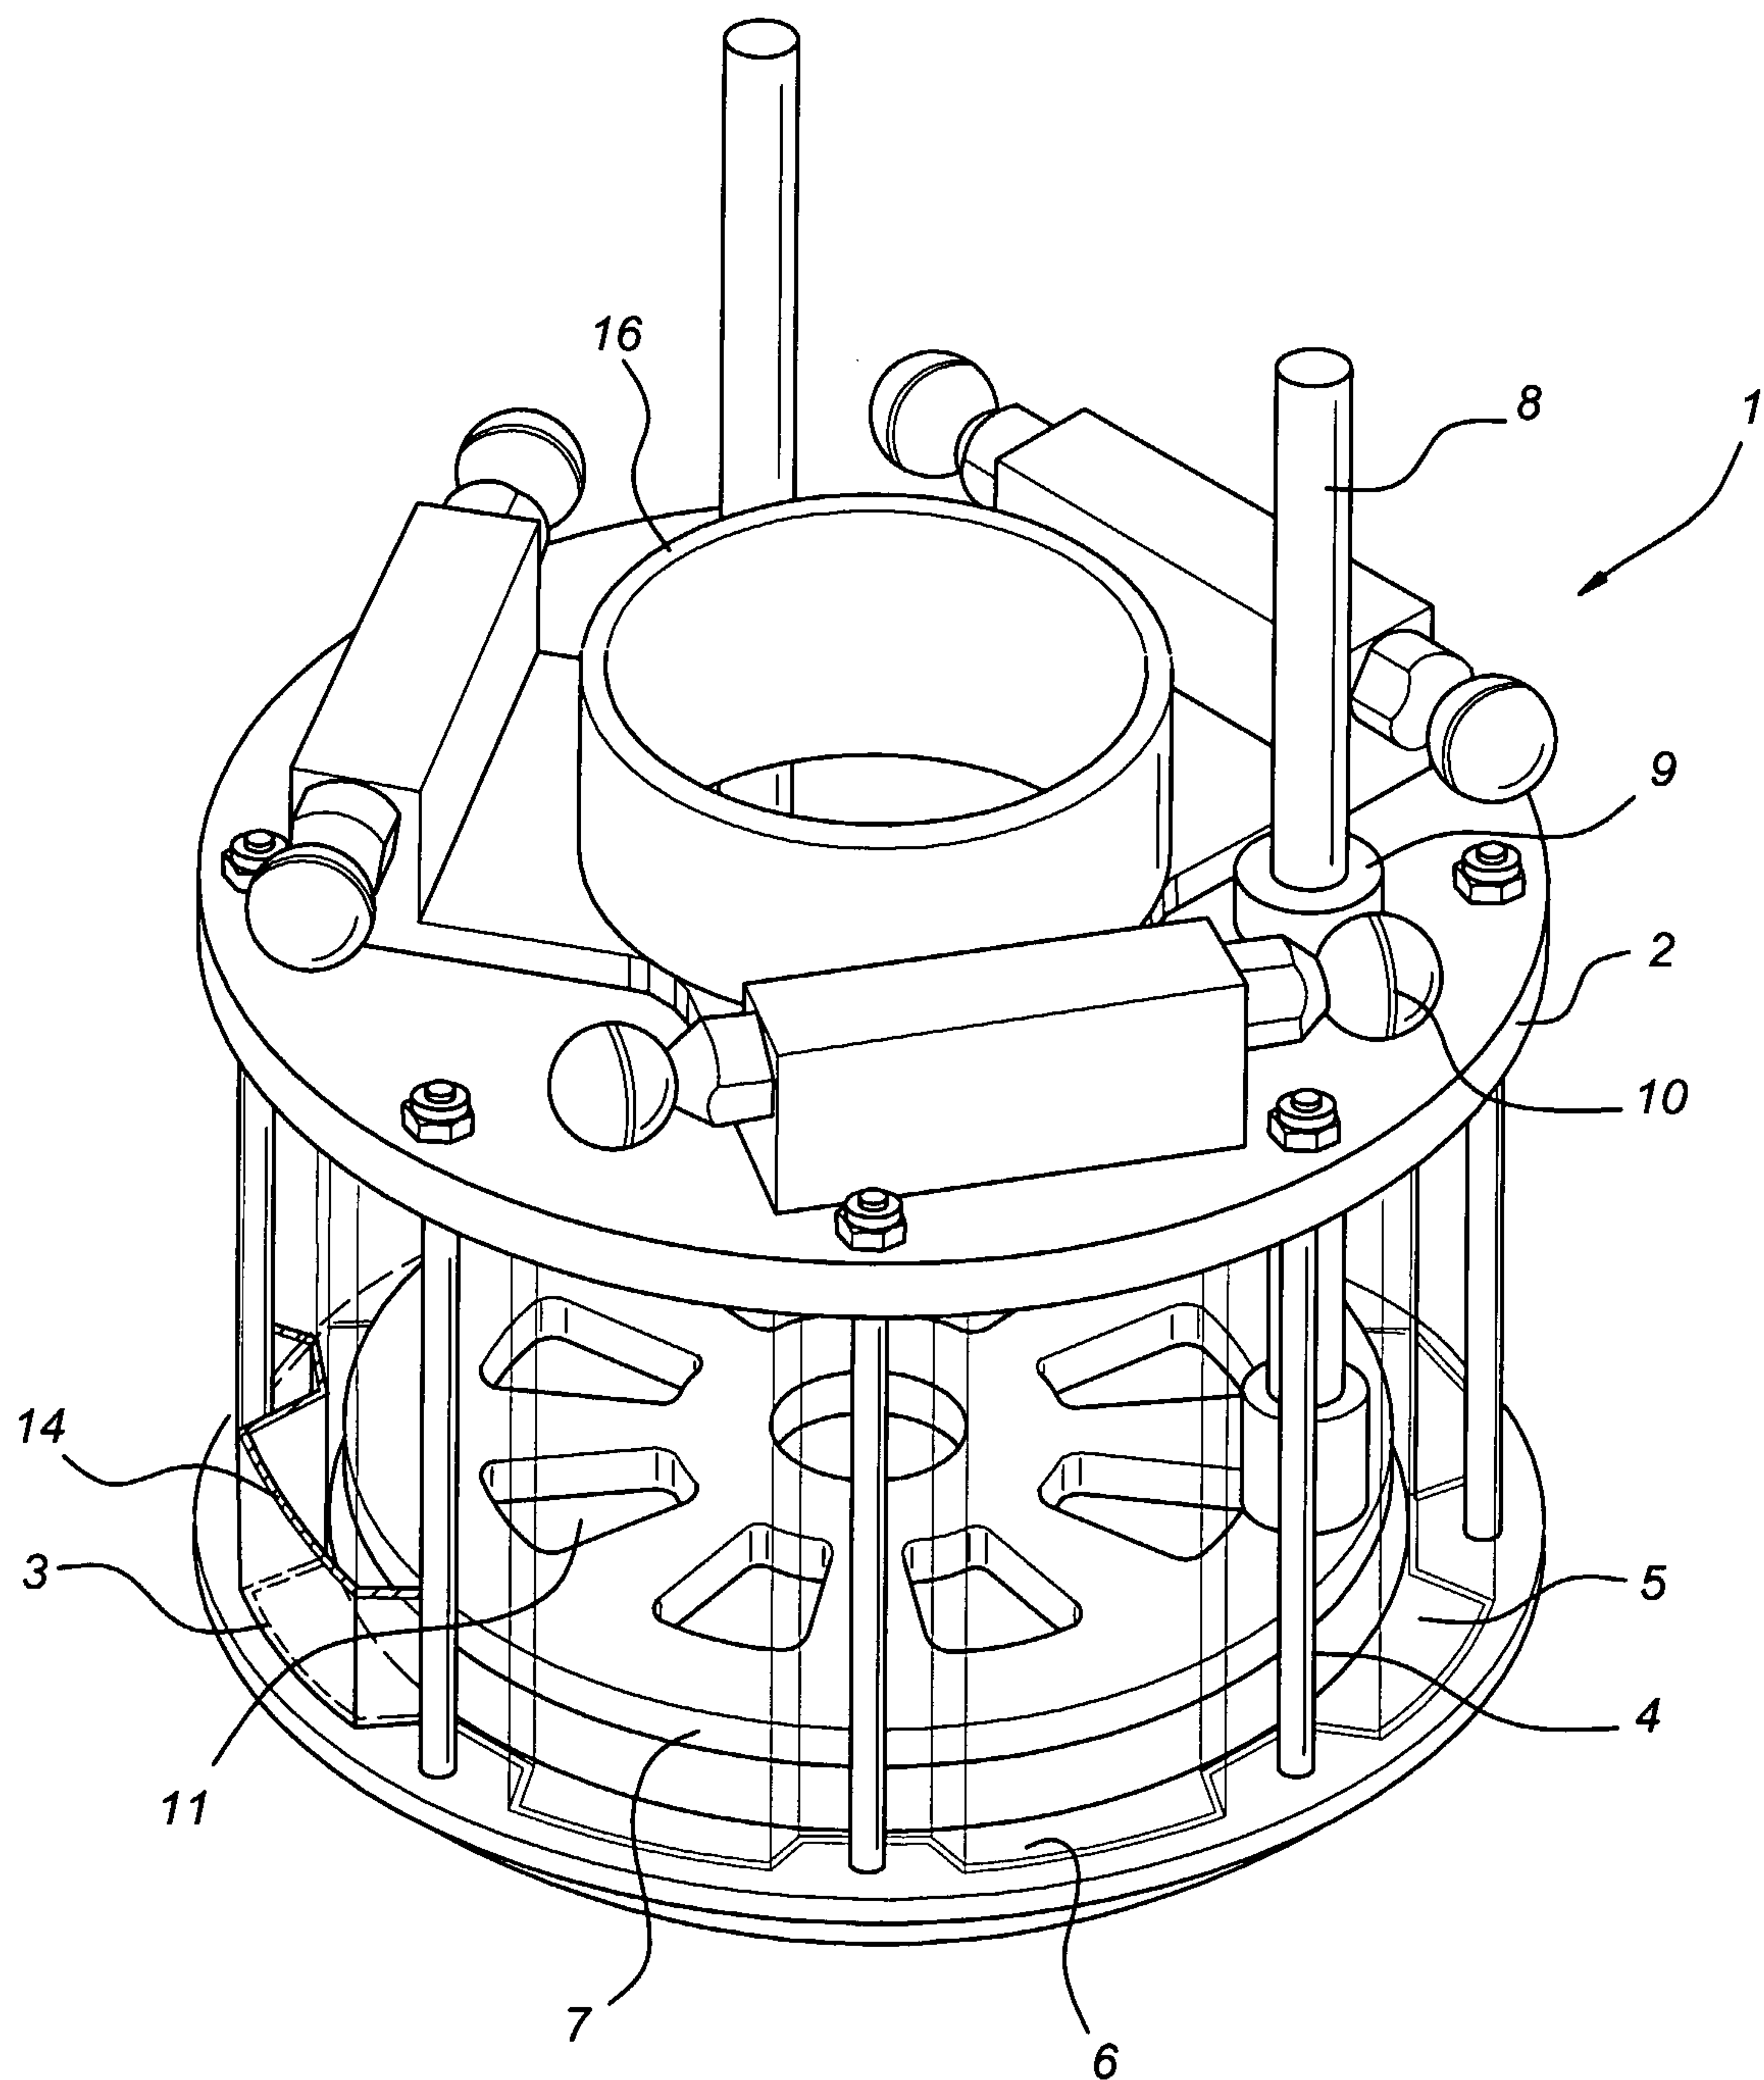
case if a group of articles is picked up the lowest article will pressurize the articles there above against the platen 27. The platen 27 is indexed upward as the articles are accumulated.

- 5 The device as described above allows for gripping a large number of articles such as wafer shaped articles having a size substantially corresponding to the size of the platen. The articles are gripped in a fast and gentle way which allows for a high throughput without the risk of damaging the articles.
- 10 After reading the above the person skilled in the art will immediately be able to effect other embodiments which are obvious after the above and within the range of the appended claims.

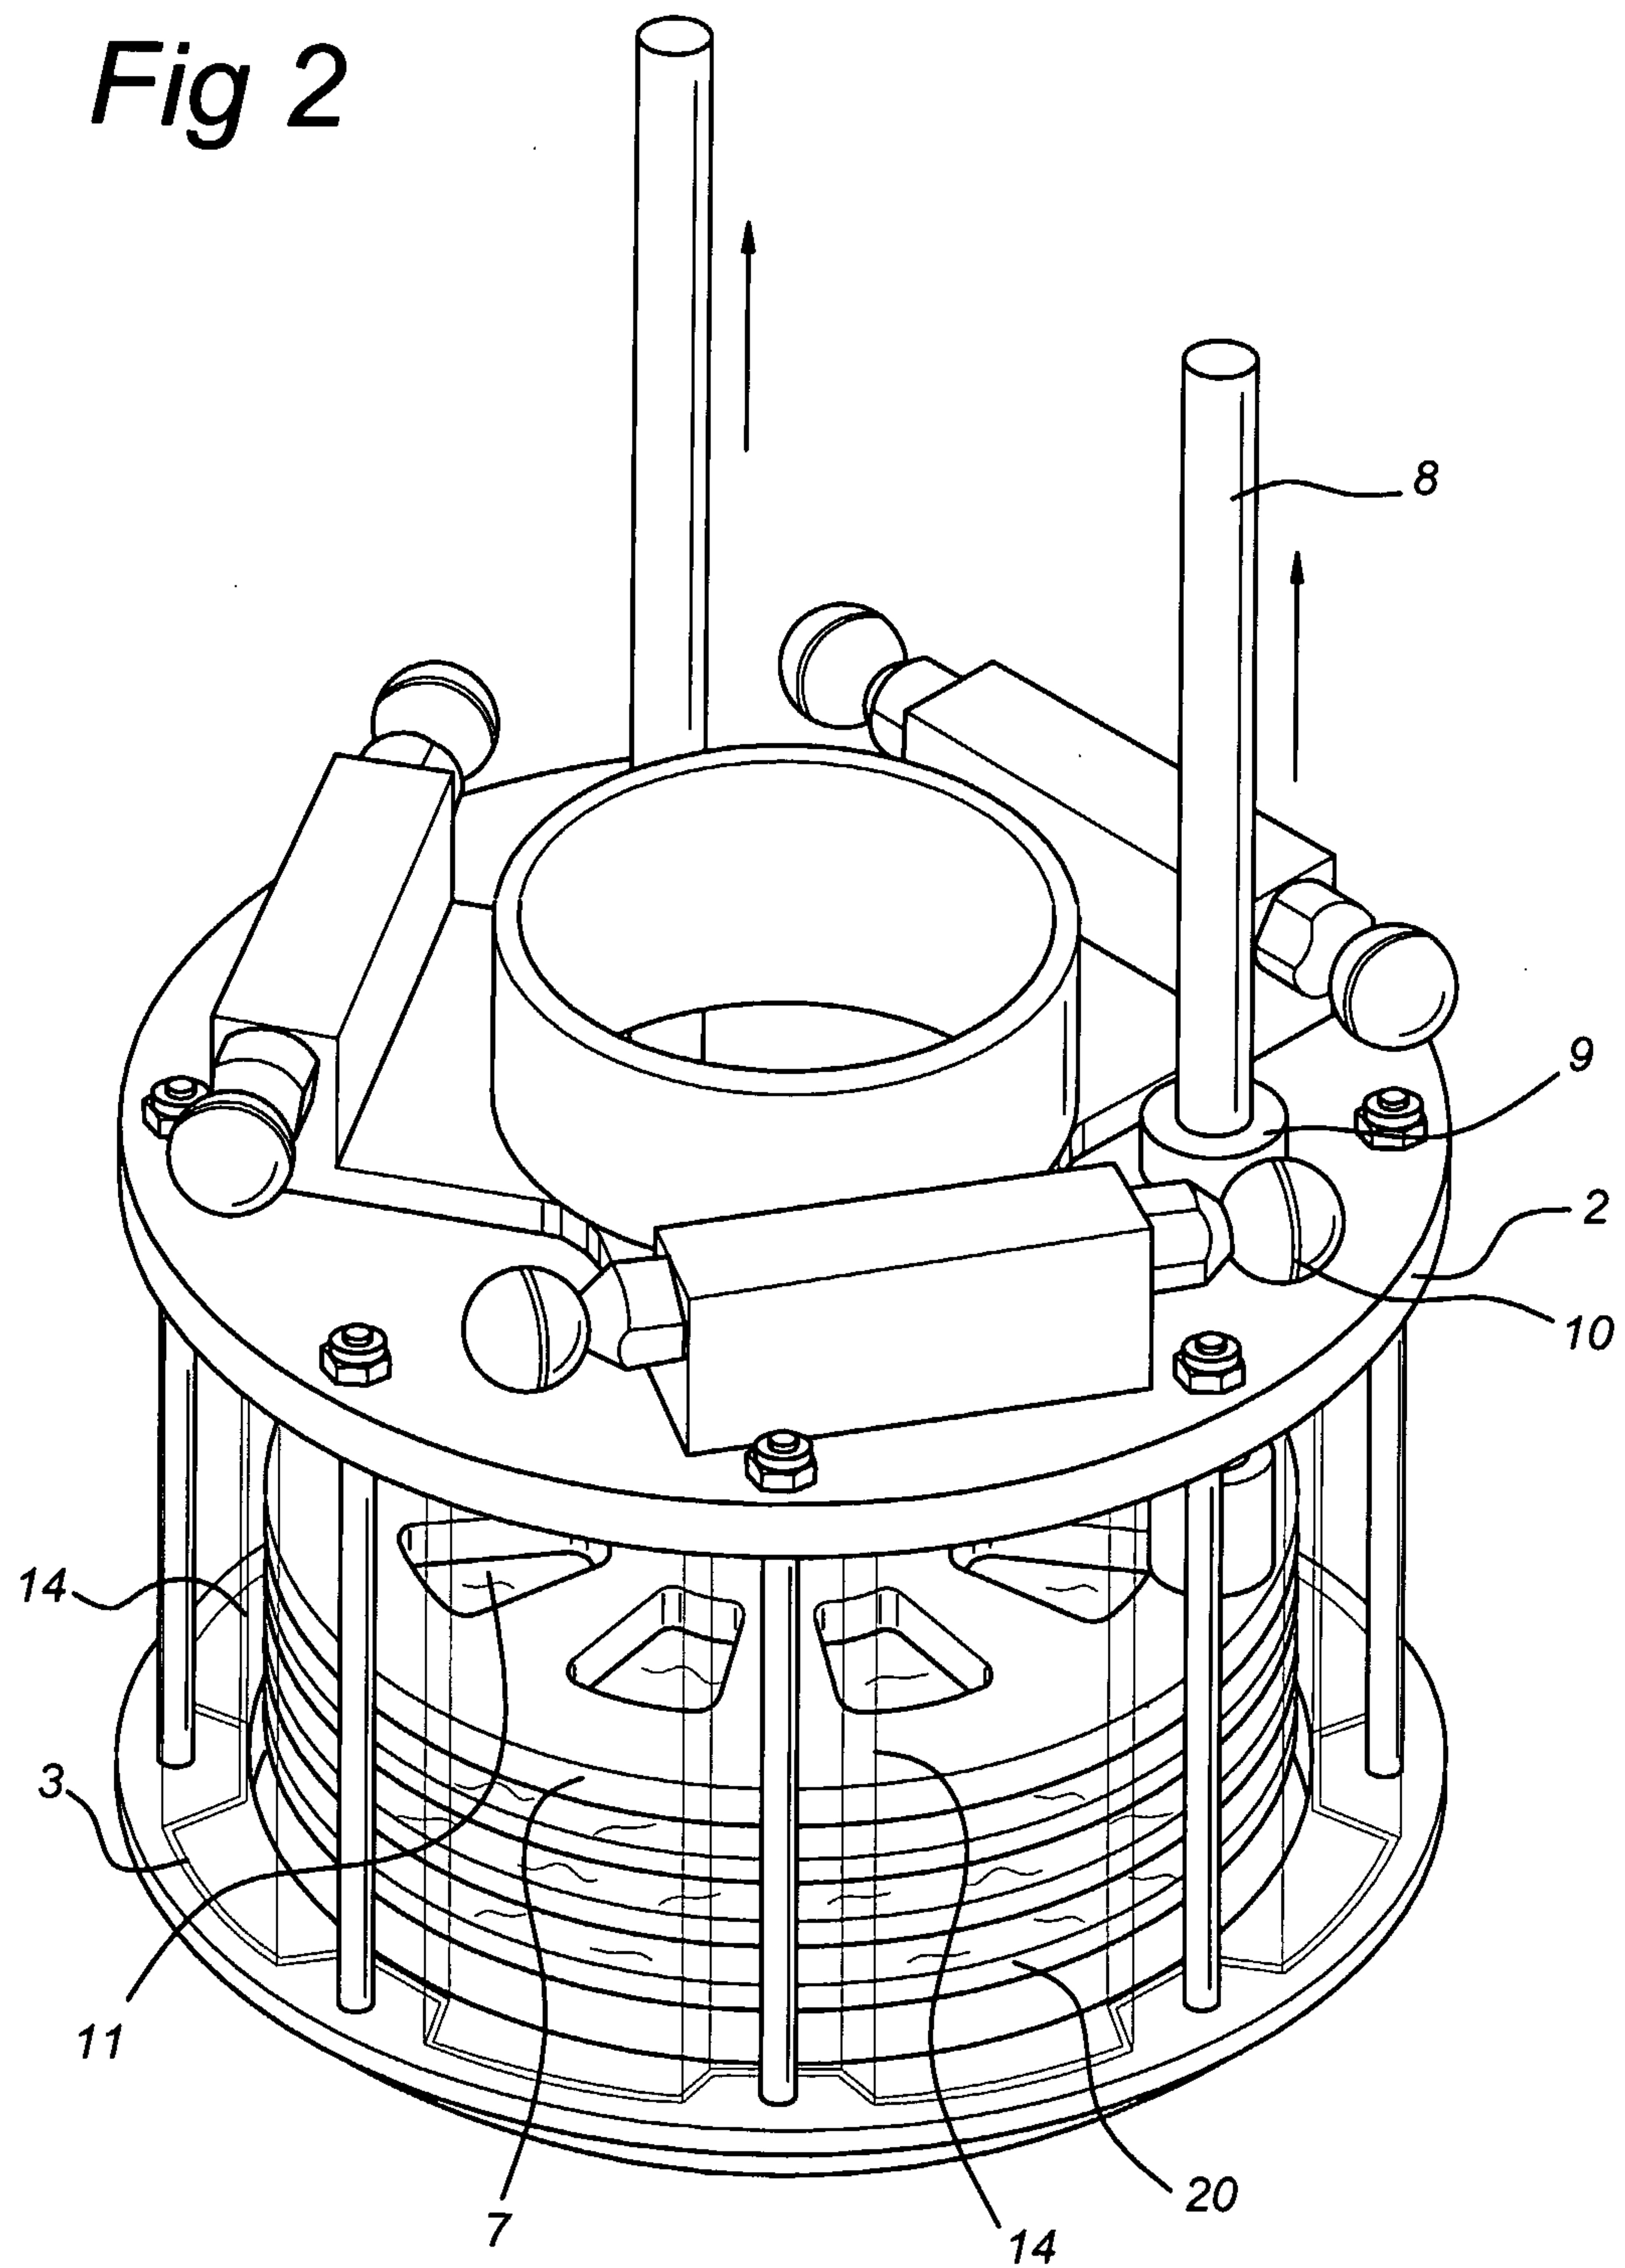
WE CLAIM:

1. Suction head (1, 21) for gripping a number of articles (20) comprising a sleeve (14, 34) having a longitudinal axis (15, 35), a first end (3, 23) for receiving said articles and a second end (2, 22) having a connection (16, 36) to an under pressure source and connections (10) for connecting to a manipulating arm, wherein an abutment platen (7, 27) is provided between said first and said second end, said platen having an outer circumferential shape smaller than the inner circumferential shape of said sleeve, said platen being displaceable in said sleeve in the direction of said longitudinal axis, wherein the first end of said sleeve is provided with a circumferential ring (6, 26) extending between said outer and inner circumferential shape of said sleeve (14, 34) and defining an inner circumference corresponding substantially to the outer circumference of said platen.
2. Suction head according to claim 1, wherein a clearance is provided between said platen and said circumferential ring.
3. Suction head according to claim 1, wherein said second end (2) comprises a guide bore (9) for receiving a bar (8) connected to said platen.
4. Suction head according to any one of claims 1 to 3, wherein said sleeve (14, 34) is provided at its inner circumference with an under pressure channel (5, 25) being 25 connected to the under pressure source connection (16, 36) at one end and opening near said circumferential ring (6, 26) at the other end.
5. Suction head according to claim 4, wherein said under pressure connection (16, 36) is only connected to said channel.
6. Suction head according to claim 4 or 5, wherein the outer surface of said platen (7, 27) is adjacent to the inner surface of said channel.
7. Method for picking a number of articles (20) and forming a stack, comprising positioning a suction head above a first article to be picked, applying under pressure in said suction head and moving said first article by said under pressure against an abutment platen provided in said suction head, picking a second article by said suction head and moving said second article against said first article to form a stack, wherein before picking said second article said platen together with said first article is further moved into said suction head.
8. Method according to claim 7, wherein after forming said stack, said stack is 10 discharged by releasing said under pressure and moving said platen together with said stack of articles outwardly from said suction head.
9. Method according to claim 7 or 8, wherein only said second article is subjected to said under pressure.

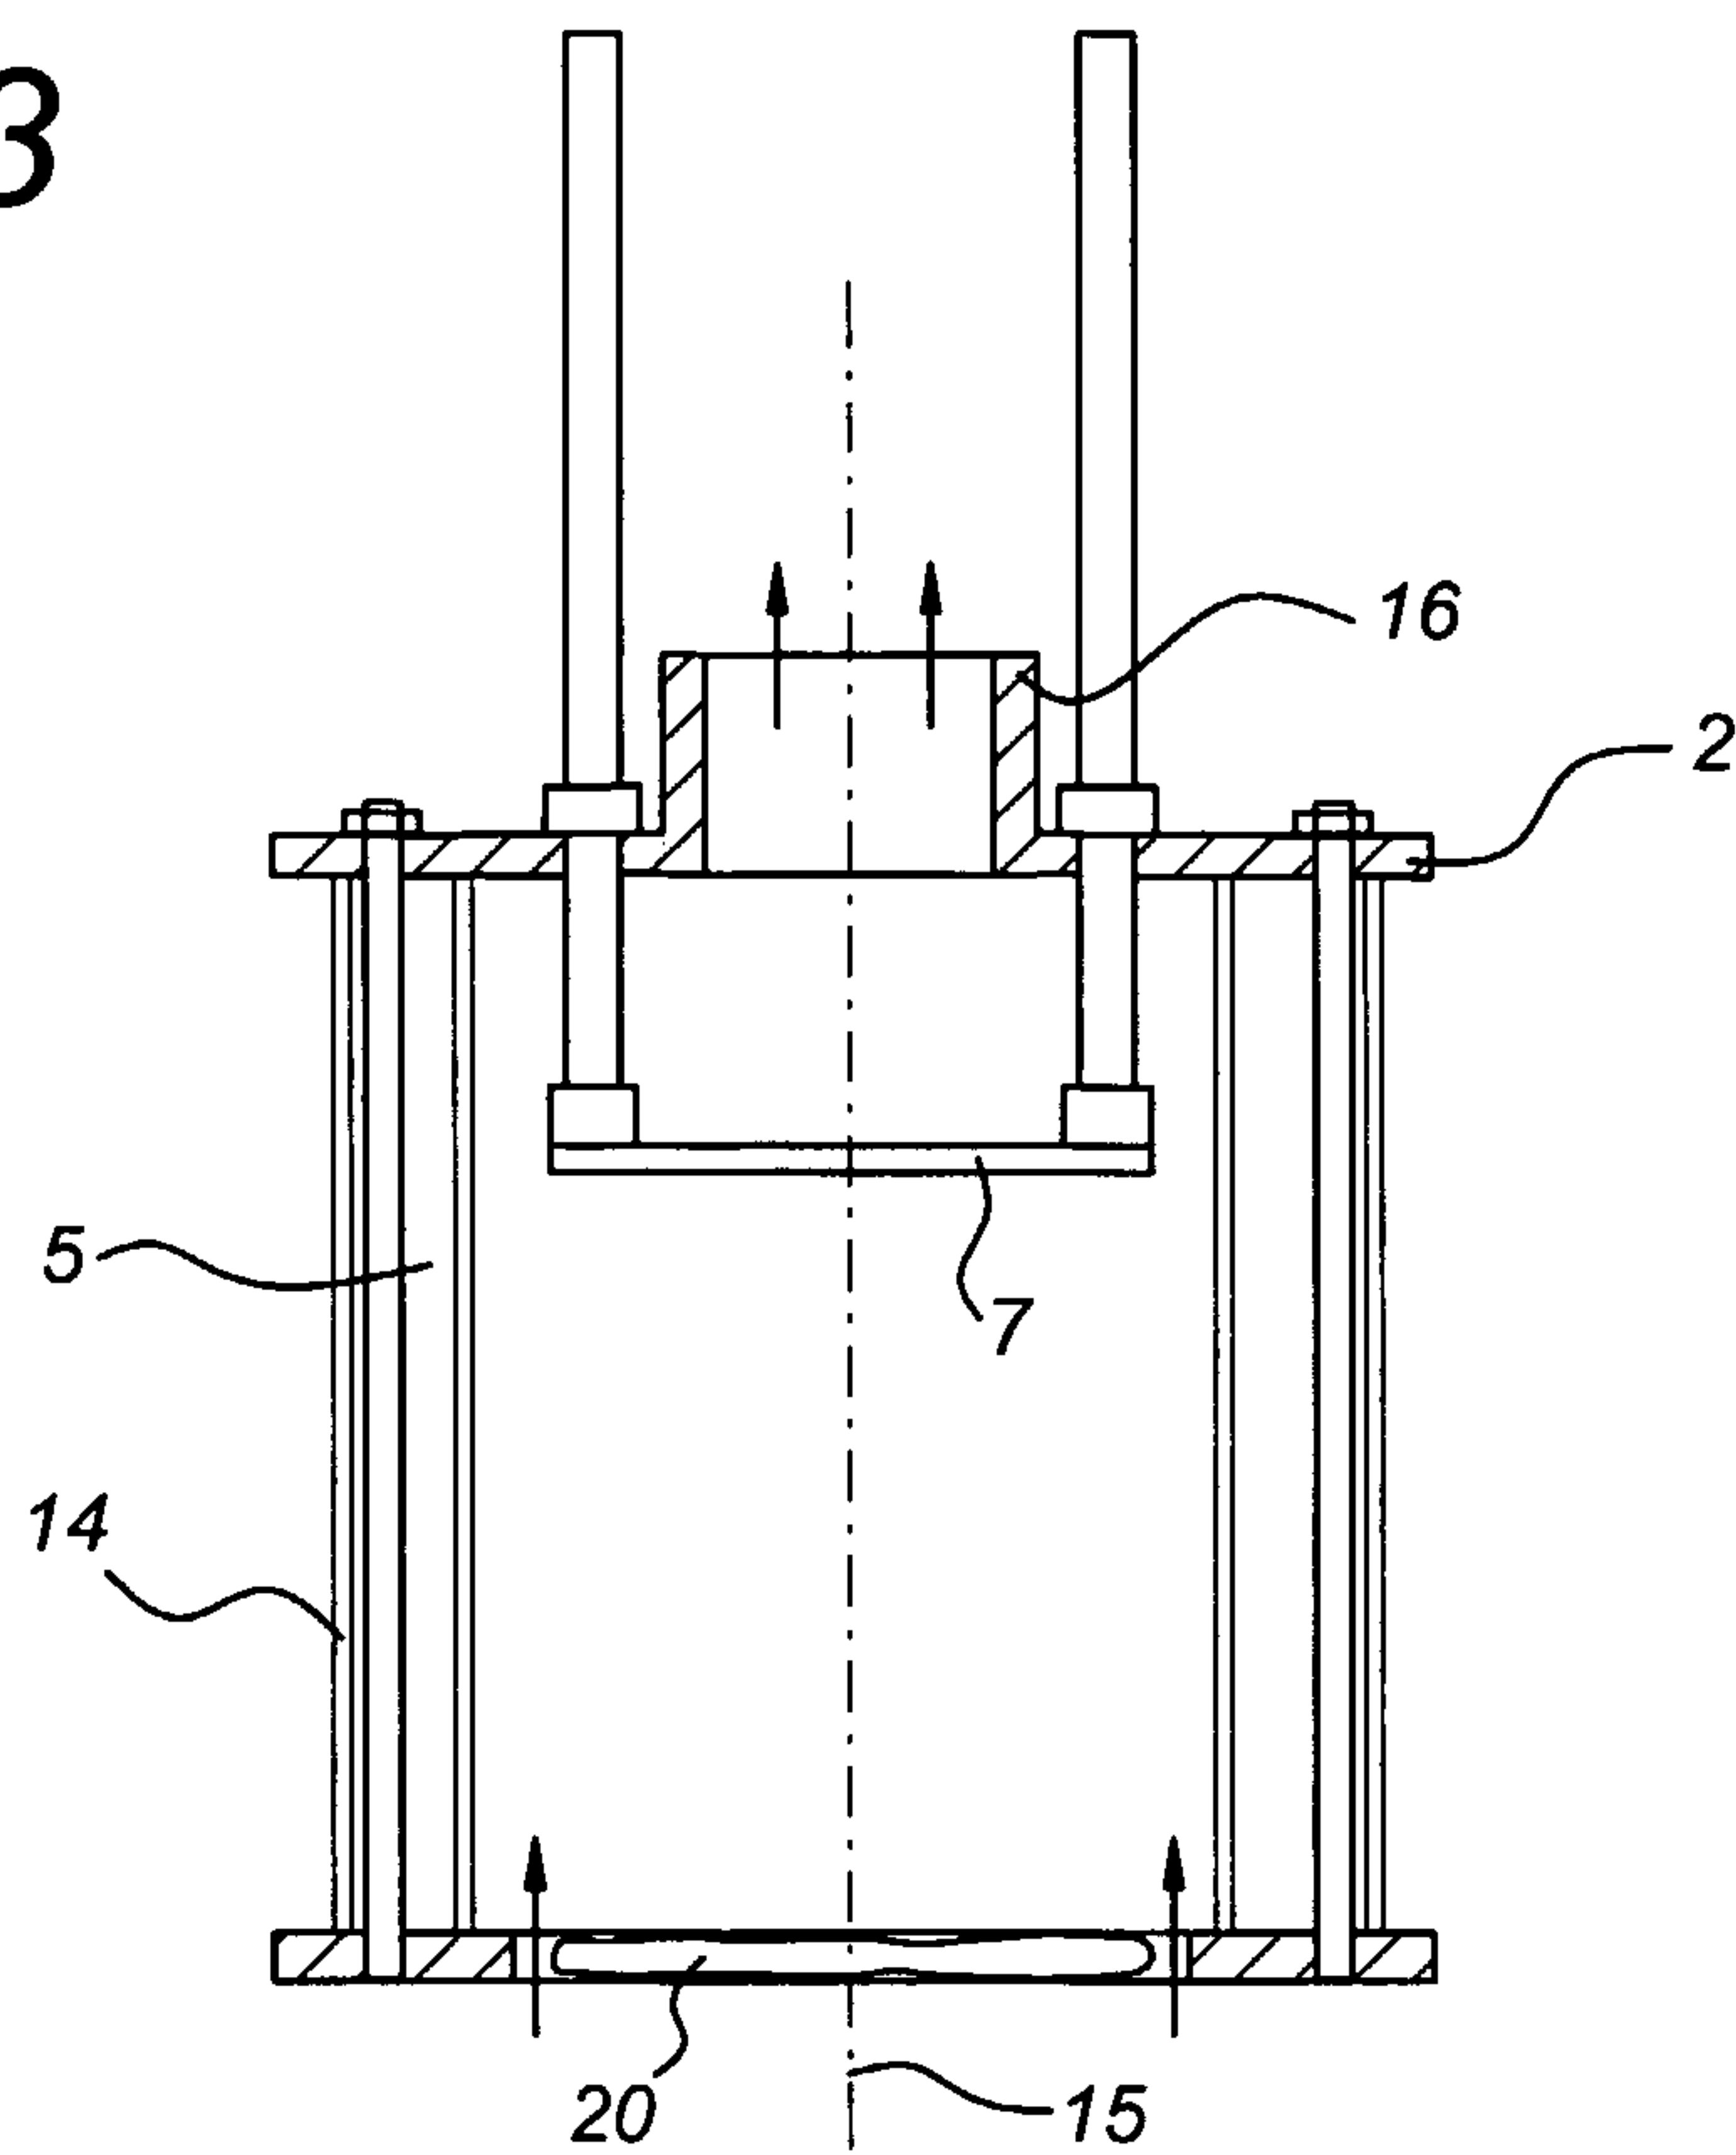
1/3

Fig 1

2/3

Fig 2

3/3

Fig 3*Fig 4*