



Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2680070 C 2016/09/20

(11)(21) **2 680 070**

(12) **BREVET CANADIEN**  
**CANADIAN PATENT**

(13) **C**

(86) **Date de dépôt PCT/PCT Filing Date:** 2008/03/26  
(87) **Date publication PCT/PCT Publication Date:** 2008/10/09  
(45) **Date de délivrance/Issue Date:** 2016/09/20  
(85) **Entrée phase nationale/National Entry:** 2009/09/04  
(86) **N° demande PCT/PCT Application No.:** US 2008/058260  
(87) **N° publication PCT/PCT Publication No.:** 2008/121649  
(30) **Priorité/Priority:** 2007/03/28 (US11/692,835)

(51) **Cl.Int./Int.Cl. A61F 9/00 (2006.01),**  
**A61F 2/14 (2006.01)**


(72) **Inventeurs/Inventors:**  
DISHLER, JON, US;  
SCHNEIDER, NED, US;  
LE, ALAN NGOC, US

(73) **Propriétaire/Owner:**  
REVISION OPTICS, INC., US

(74) **Agent:** BORDEN LADNER GERVAIS LLP

(54) **Titre : SYSTEME D'INSERTION POUR IMPLANTS CORNEENS**

(54) **Title: INSERTION SYSTEM FOR CORNEAL IMPLANTS**

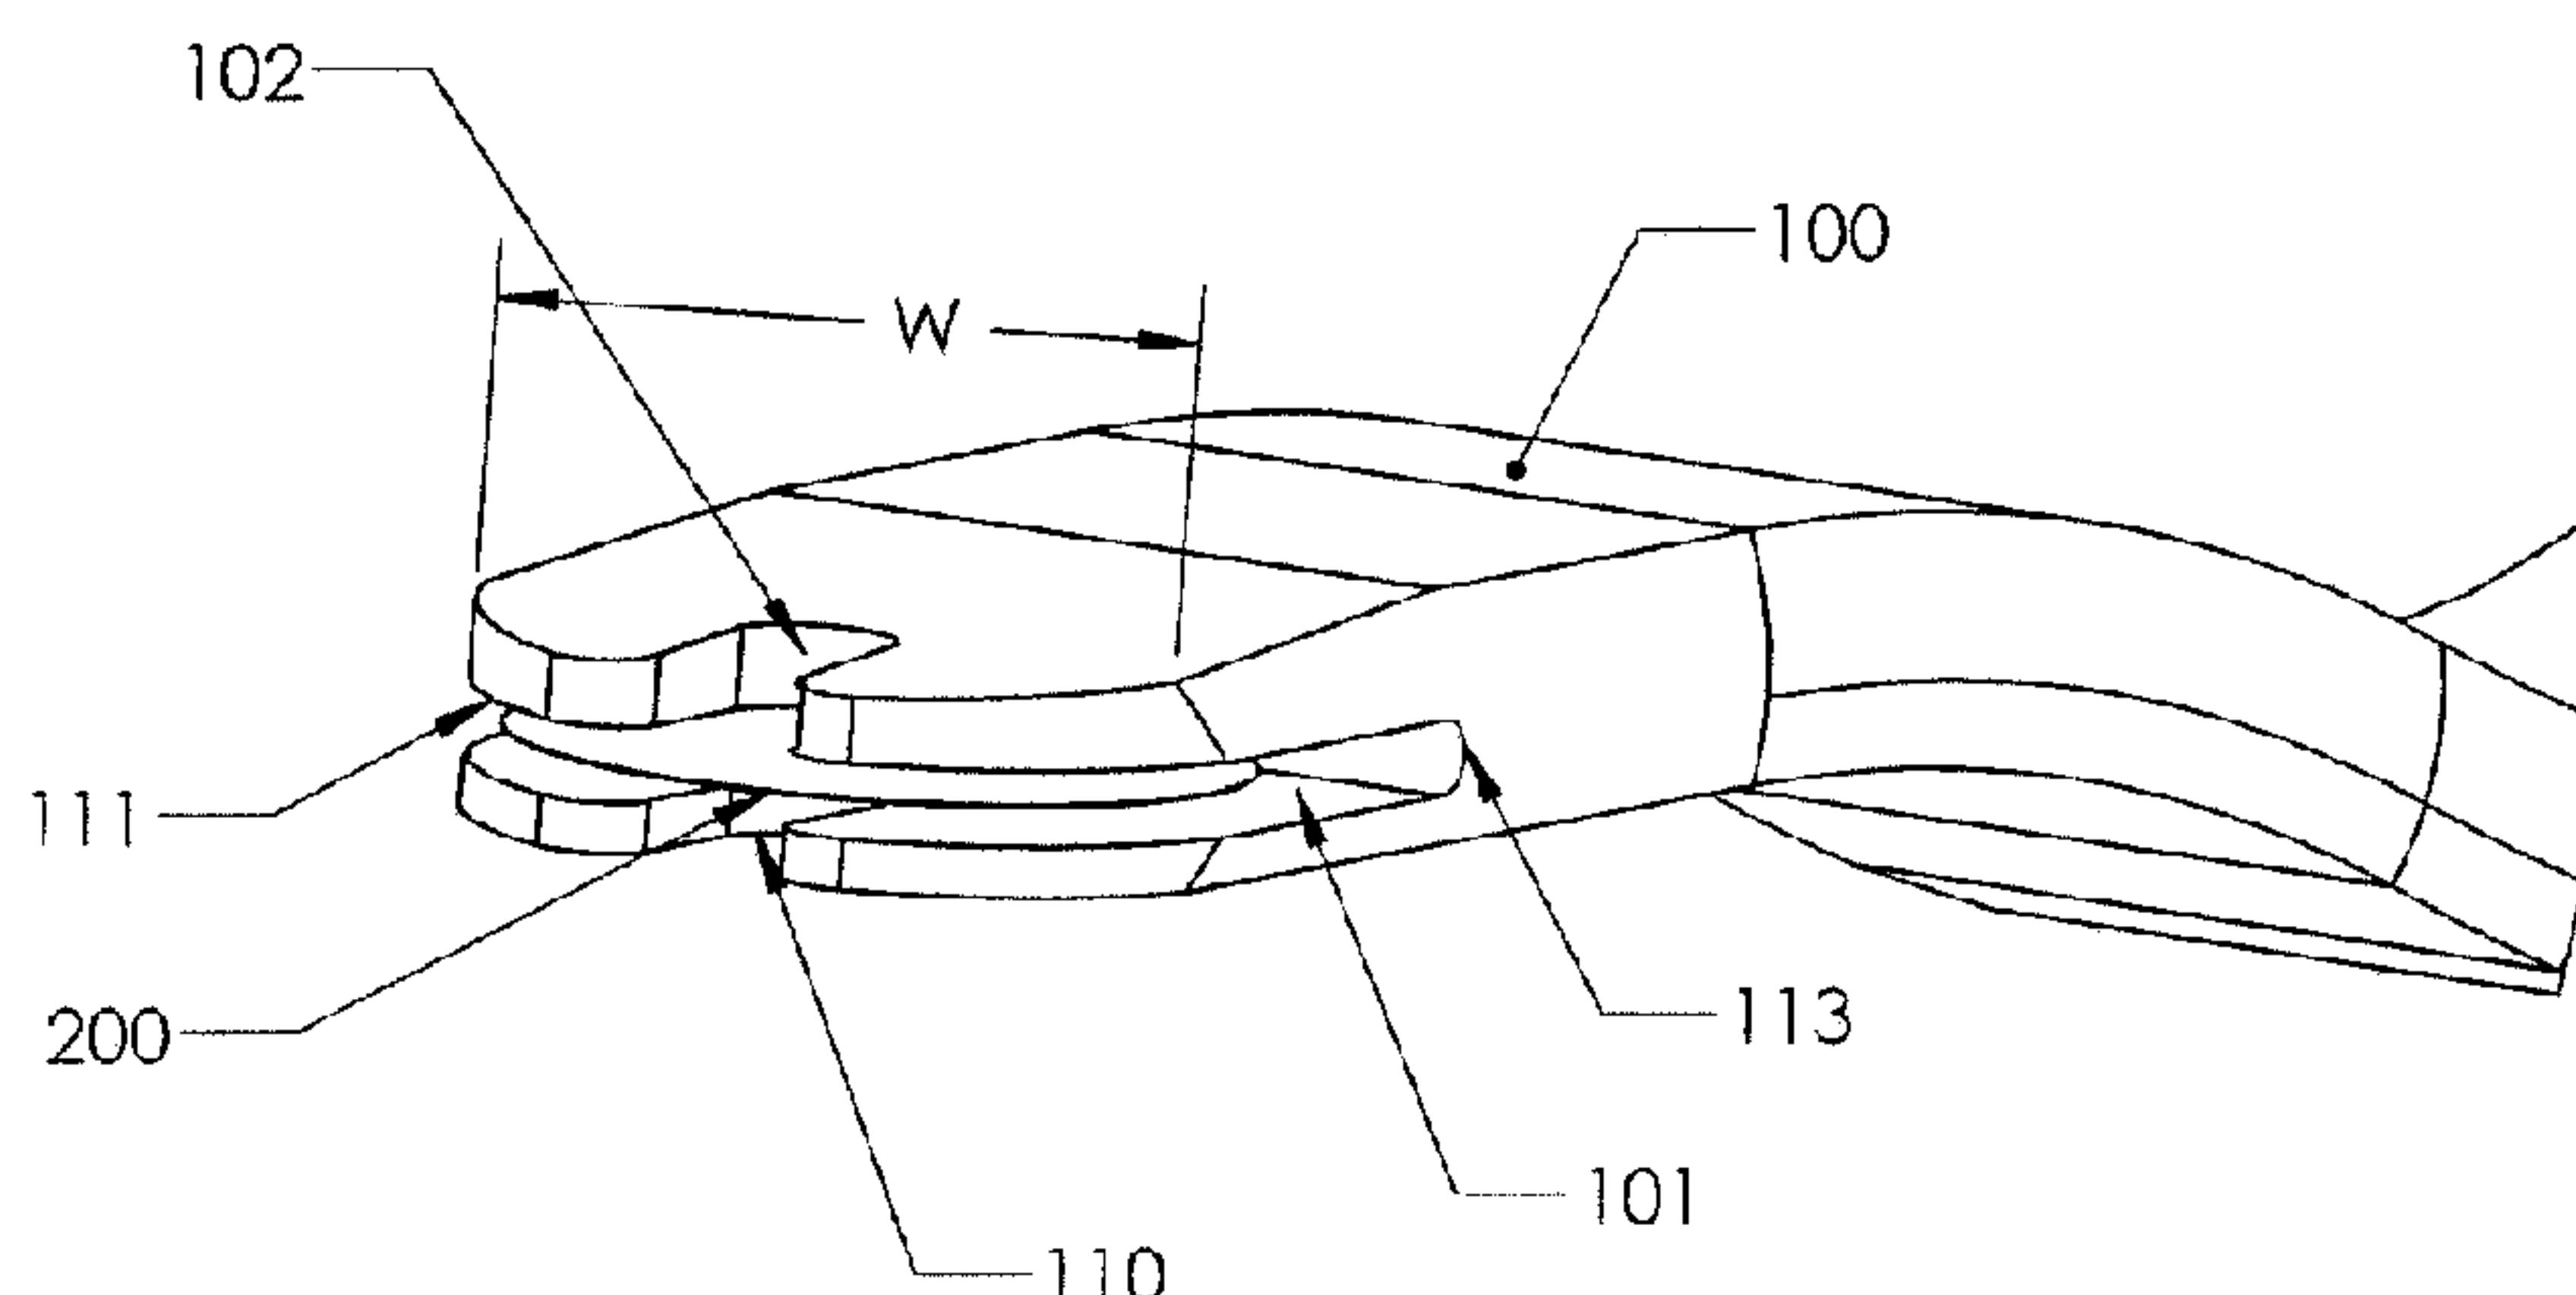

**(57) Abrégé/Abstract:**

Provided therein are apparatuses, systems and methods for storing and retrieving a corneal implant and for delivering the corneal implant in or on the cornea. In an embodiment, a insertion system comprises an inserter for delivering a corneal implant to a desired location in or on the cornea. The inserter has a holding space at its distal end for holding a corneal implant therein. A solution may substantially fill the holding space with the corneal implant to keep the implant hydrated and to hold the implant in the holding space by the surface tension of the solution. The corneal implant may be preloaded in the holding space of the inserter and stored in a storage container filled with storage fluid, e.g., saline, until use. To deliver the corneal implant, the inserter is positioned at the desired location, and the corneal implant released from the holding space of the inserter.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
9 October 2008 (09.10.2008)

PCT

(10) International Publication Number  
WO 2008/121649 A1(51) International Patent Classification:  
A61F 9/00 (2006.01) A61F 2/14 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:  
PCT/US2008/058260

(22) International Filing Date: 26 March 2008 (26.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/692,835 28 March 2007 (28.03.2007) US

(71) Applicant (for all designated States except US): REVISION OPTICS, INC. [US/US]; 25651 Atlantic Ocean Drive, Suite A-1, Lake Forest, CA 92630 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DISHLER, Jon [US/US]; 25651 Atlantic Ocean Drive, Suite A-1, Cherry Hills Village, CO 80113 (US). SCHNEIDER, Ned [US/US]; 25651 Atlantic Ocean Drive, Suite A-1, Aliso Viejo, CA 92656 (US). LE, Alan, Ngoc [US/US]; 25651 Atlantic Ocean Drive, Suite A-1, Lake Forest, CA 92630 (US).

(74) Agents: ZLOGAR, Thomas, M. et al.; Shay Glenn Llp, 2755 Campus Drive, Suite 210, San Mateo, CA 94403 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: INSERTION SYSTEM FOR CORNEAL IMPLANTS

FIGURE 5A

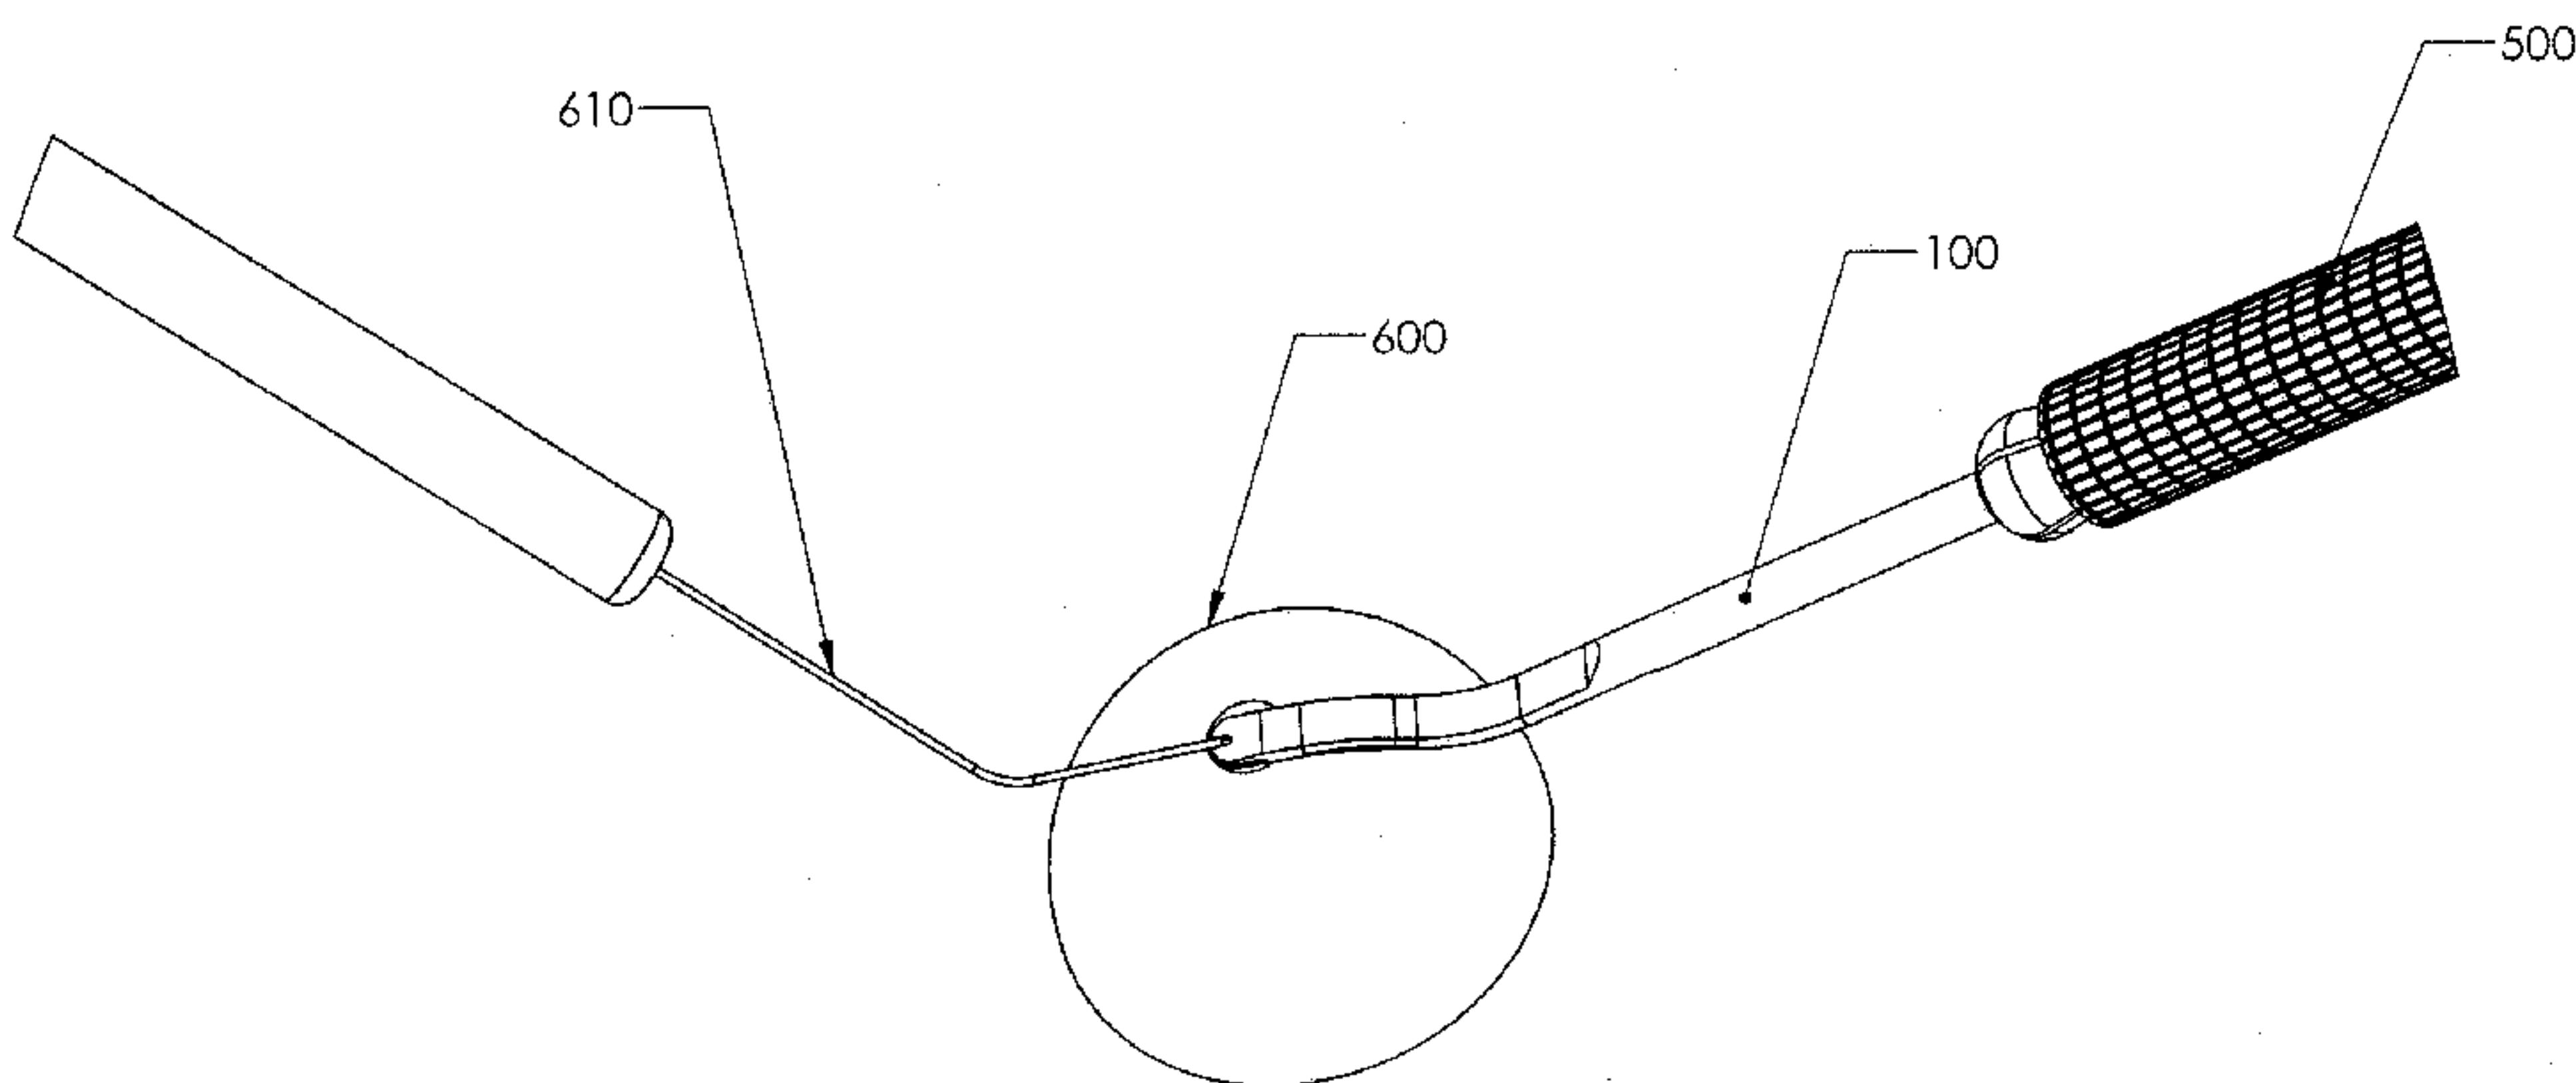

(57) Abstract: Provided therein are apparatuses, systems and methods for storing and retrieving a corneal implant and for delivering the corneal implant in or on the cornea. In an embodiment, an insertion system comprises an inserter for delivering a corneal implant to a desired location in or on the cornea. The inserter has a holding space at its distal end for holding a corneal implant therein. A solution may substantially fill the holding space with the corneal implant to keep the implant hydrated and to hold the implant in the holding space by the surface tension of the solution. The corneal implant may be preloaded in the holding space of the inserter and stored in a storage container filled with storage fluid, e.g., saline, until use. To deliver the corneal implant, the inserter is positioned at the desired location, and the corneal implant released from the holding space of the inserter.

WO 2008/121649 A1

# INSERTION SYSTEM FOR CORNEAL IMPLANTS

## FIELD OF THE INVENTION

**[0001]** The field of the invention relates generally to corneal implants, and more particular, to insertion systems for corneal implants.

## BACKGROUND INFORMATION

**[0002]** As is well known, abnormalities in the human eye can lead to vision impairment. Some typical abnormalities include variations in the shape of the eye, which can lead to myopia (near-sightedness), hyperopia (far-sightedness) and astigmatism as well as variations in the tissue present throughout the eye, such as a reduction in the elasticity of the lens, which can lead to presbyopia. A variety of technologies have been developed to try and address these abnormalities, including corneal implants.

**[0003]** Corneal implants can correct vision impairment by altering the shape of the cornea. Corneal implants can be classified as an onlay or an inlay. An onlay is an implant that is placed over the cornea such that the outer layer of the cornea, e.g., the epithelium, can grow over and encompass the implant. An inlay is an implant that is surgically implanted into the cornea beneath a portion of the corneal tissue by, for example, cutting a flap in the cornea and inserting the inlay beneath the flap. Both inlays and outlays can alter the refractive power of the cornea by changing the shape of the anterior cornea, by having a different index of refraction than the cornea, or both. Since the cornea is the strongest refracting optical element in the human ocular system, altering the cornea's anterior surface is a particularly useful method for correcting vision impairments caused by refractive errors.

**[0004]** There is a need for improved apparatuses, systems and methods for storing a corneal implant prior to use and for retrieving the corneal implant from storage during a surgical procedure. There is also a need for improved apparatuses, systems and methods for delivering a corneal implant to the cornea and for precisely depositing the corneal implant at a desired location in or on the cornea without damaging the corneal implant.

## SUMMARY

**[0005]** Provided herein are apparatuses, systems and methods for storing and retrieving a corneal implant and for delivering the corneal implant in or on the cornea.

**[0006]** In an embodiment, an insertion system comprises an inserter for delivering a corneal implant to a desired location in or on the cornea. The inserter comprises an elongated body having a distal end and a proximal end. The elongated body has a holding space at its distal end for holding the corneal implant to be delivered. The holding space is formed between a top distal portion and a bottom distal portion of the elongated body. In a preferred embodiment, a solution, e.g., saline, substantially fills the holding space with the corneal implant to keep the implant hydrated and to hold the implant in the holding space by the surface tension of the solution. The elongated body of the inserter may also have a curved portion that follows the curvature of the cornea and a clearance bend that provides clearance between the inserter and a facial feature, e.g., nose, of the patient.

**[0007]** In an embodiment, the corneal implant is preloaded in the holding space of the inserter and the preloaded inserter is stored in a storage container filled with storage fluid, e.g., saline, until use. In one embodiment, a cap is placed on the distal end of the inserter after the implant is preloaded. The cap encloses the holding space of the inserter to prevent the corneal implant from moving out of the holding space in the storage fluid during storage. By preloading the implant in the inserter, the surgeon does not have to separately retrieve the implant and place the implant in the inserter, which is difficult due to the small size and delicate nature of the implant.

**[0008]** A method of delivering a corneal implant according to an embodiment includes positioning an inserter with the corneal implant at a desired location in or on the cornea. At the desired location, the corneal implant is held down in the holding space of the inserter by a surgical tool, e.g., cannula. The surgical tool accesses the implant in the holding space through a slot in the inserter. While the corneal implant is held down by the surgical tool, the inserter is retracted to release the corneal implant from the inserter and deposit the corneal implant at the desired location. By holding down the implant at the desired location and retracting the inserter to release the implant, the surgeon is able to precisely deposit the implant at the desired location.

**[0009]** Other systems, methods, features and advantages of the invention will be or will become apparent to one with skill in the art upon examination of the following figures and detailed description. The scope of the claims should not be limited by particular embodiments set forth herein, but should be construed in a manner consistent with the specification as a whole.

BRIEF DESCRIPTION OF THE FIGURES

[0010] FIG. 1 shows a perspective view of an insertion system comprising an inserter and a cap according to an embodiment of the present invention.

[0011] FIG. 2 shows a perspective view of the cap placed on the inserter according to an embodiment of the present invention.

[0012] FIG. 3 shows a side view of the distal end of the inserter according to an embodiment of the present invention.

[0013] FIG. 4 shows a close-up perspective view of the distal end of the inserter according to an embodiment of the present invention.

[0014] FIG. 5A shows the inserter depositing a corneal implant on the cornea according to an embodiment of the present invention.

[0015] FIG. 5B shows a close-up of the inserter depositing the corneal implant on the cornea.

[0016] FIG. 5C shows the inserter depositing a corneal implant on an interior surface of the cornea exposed by forming a flap in the cornea according to an embodiment of the invention.

[0017] FIG. 5D shows the inserter depositing a corneal implant within a pocket formed in the cornea according to an embodiment of the present invention.

[0018] FIG. 6 shows the inserter and cap stored in a container filled with storage fluid according to an embodiment of the present invention.

[0019] FIG. 7 shows a perspective view of the inserter with a luer lock attached to the proximal end of the inserter according to an embodiment of the present invention.

[0020] FIG. 8 shows a perspective view of the inserter with a syringe connected to the proximal end of the inserter according to an embodiment of the present invention.

[0021] FIG. 9 shows a perspective view of an inserter according to another embodiment of the present invention.

[0022] FIG. 10 shows a back view of the distal end of the inserter according to an embodiment of the present invention.

[0023] FIG. 11 shows the inserter depositing a corneal implant on the cornea according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0024] Figures 1-5 show an insertion system according to an embodiment that is particular suited for delivering a corneal implant, e.g., inlay, in or on the cornea. The

insertion system is also suited for storing the implant prior to its use. The insertion system includes an inserter 100 having an elongated body, which may be made of titanium, stainless steel, plastic, or other biocompatible material. The inserter 100 comprises a distal portion having generally flat top and bottom surfaces. The distal portion of the inserter 100 includes a clearance bend 104 where the inserter is bent to provide clearance between the inserter and a patient's facial features (e.g., nose, cheeks, etc.) as explained further below. The distal portion of the inserter 100 also includes a curved portion 103 that is contoured to follow the shape of a patient's cornea as explained further below. The curved portion 103 is concaved on the bottom surface of the inserter 100.

**[0025]** The inserter 100 further includes a holding space 101 for holding a corneal implant 200 to be delivered by the inserter. Preferably, saline, BSS or other solution (not shown) is placed in the holding space 101 to hold the implant 200 therein due to surface tension of the saline. The saline stays in the holding space 101 due to capillary forces, thereby keeping the implant hydrated. The inserter also includes top and bottom inserter slots 102 and 110 as shown in Figure 4. As explained below, the inserter slots 102 and 110 allow a surgeon to view the patient's cornea through the slots for precise placement of the implant 200. In addition, the top inserter slot 102 allows the surgeon to hold down the implant 200 in the holding space 101 at a desired position while the surgeon retracts the inserter 100 to release the implant 200. The surgeon may hold down the implant 200 with a surgical tool, such as a cannula, Sinskey hook or other tool that can fit through the top inserter slot 102. The top inserter slot 102 extends to the leading edge 111 of the inserter 100 so that the tool can hold down the implant 200 as the inserter 100 is retracted. The leading edge 111 of the inserter is preferably rounded to prevent damage to the cornea.

**[0026]** In the preferred embodiment, the width "w" of the holding space 101 is slightly larger than the diameter of the implant 200 to be delivered by the inserter 100 as shown in Figure 3. In an exemplary embodiment, the implant 200 has a diameter of about 1.5 mm and the width "w" of the holding space 101 is between 1.6 and 1.7 mm. The rounded leading edge 111 of the inserter 100 follows the perimeter of the implant 200. The center length "l" of the holding space 101 is slightly larger than the diameter of the implant 200. As shown in Figure 3, the center length "l" extends from the center of the leading edge 111 to the back wall 113 of the holding space 101. The geometry of the holding space 101 and the surface tension of the saline in the holding space 101 keep the implant 200 substantially centered in the inserter 100. The height of the holding space 101

may be several times larger than the center thickness of the implant 200 to ensure that enough saline is in the holding space 101 to keep the implant sufficiently hydrated.

**[0027]** The inserter 100 may be manufactured from a rod that is cut and bent to form the inserter 100. In one embodiment, a cylindrical titanium rod is cut and bent to form the inserter 100. In this embodiment, the proximal portion of the inserter 100 is generally cylindrical with angled portions that taper down to the distal portion of the inserter 100.

**[0028]** The inserter system further includes an inserter cap 300, which may be made of Teflon (PTFE). In an embodiment, the inserter cap 300 is generally cylindrical and can be fitted snugly on the distal end of the inserter 100 by engaging the sides of the inserter 100 as shown in Figure 2.

**[0029]** In a preferred embodiment, the implant 200 is preloaded in the inserter 100 and packaged for later use by the surgeon during an implantation procedure. In this embodiment, the implant 200 is preloaded into the holding space 101 of the inserter 100 with the top surface of the implant 200 orientated to face the top surface of the inserter 100. The implant 200 may be preloaded by submerging both the implant 200 and the holding space 101 of the inserter 100 in a solution, e.g., saline, and inserting the implant 200 into the holding space 101 while they are both submerged. After the implant 200 is preloaded in the inserter 100, the inserter cap 300 is placed on the distal end of the inserter 100. The cap 300 may be placed on the inserter 100 while the holding space 101 is still submerged in the solution. The preloaded inserter 100 assembled with the inserter cap 300 is placed into a vial 400 or other storage container filled with saline 410 or other suitable solution as shown in Figure 6. The inserter cap 300 prevents the implant 200 from moving out of the inserter 100 when placed in the vial 400 filled with saline 410. The vial 400 is capped and placed in an outer package 420, which is sterilized to store the insertion system until use.

**[0030]** An implantation procedure using an insertion system according to an embodiment will now be given. In this embodiment, the preloaded inserter 100 is removed from the outer package 420 and the vial 400 filled with saline 410. The saline within the space between the inserter cap 300 and the inserter 101 is then removed by placing a sterile surgical sponge (not shown) or other absorbent material on the open end on the inserter cap 300. The sponge draws out the saline from the interior of the cap 300 by capillary action through the opening between the cap 300 and the inserter 101. In the embodiment in which the cap 300 has a generally cylindrical shape, the opening is formed

between the cylindrical cap 300 and the flat top and bottom surfaces of the inserter 100. The saline is removed from the spaced between the cap 300 and the inserter 100 while the cap 300 is still on the inserter 100. This is done to prevent the cap 300 from pulling the implant 200 out of the inserter 100 by capillary action when the cap 300 is removed from the inserter 100. After the saline is removed, the cap 300 is removed from the inserter 100. At this point, a small amount of saline or BSS may be applied to the holding space 101 of the inserter 100 to keep the implant 200 hydrated. The saline stays in the holding space 101 due to capillary forces, thereby keeping the implant 200 hydrated during the procedure. Further, the surface tension of the saline holds the implant 200 in the holding space 101 of the inserter 100 so that the implant 200 does not fall out of the inserter 100 during the procedure. This surface tension and the geometry of the holding space 101 keep the implant 200 centered in the inserter 100. To enable a surgeon to better hold the inserter 100, a handle 500 may be attached to the proximal end of the inserter 100 as shown in Figure 5A. The handle may be similar to handles that attach to disposable blades. Further, the surgeon may determine the proper orientation of the implant based on features of the inserter 100. For example, when the top of the inserter 100, and hence the implant 200, are facing upward, the concaved bottom surface of the curved portion 103 of the inserter 100 is facing downward.

**[0031]** The surgeon may then implant the corneal implant 200 in the patient's cornea. To access the interior of the cornea, a flap may be cut into the cornea and lifted to expose the cornea's interior, e.g., stroma bed of the cornea. An example of this is shown in Figure 5C, in which a flap 1120 is cut into the cornea 600 and pulled back to expose the stroma bed 1100 of the cornea. The flap 1120 is attached to the cornea 600 by a flap hinge 1110. The flap 1120 may be cut using a laser, e.g., femtosecond laser, a mechanical keratome or manually. Several methods for forming flaps in corneal tissue, and other related information, are described in further detail in co-pending U.S. Patent Application Serial No. 10/924,152, filed August 23, 2004, entitled "Method for Keratophakia Surgery". Once the interior is exposed, the surgeon positions the inserter 100 so that implant 200 is at the desired location on the cornea 600, e.g., the patient's pupil or visual axis as shown in Figure 5A. Prior to positioning the inserter 100, the surgeon may use a surgical sponge to remove excess fluid on the outer surface of the inserter 100 being careful not to remove the saline from the holding space 101. The clearance bend 104 allows the inserter to clear the patient's facial features (e.g., nose) as the surgeon manipulates the inserter 100. To precisely position the implant 200 the surgeon may view the cornea 600 through

the inserter slots 102 and 110 and the implant 200, which is transparent. When the implant 200 is at the desired location, the surgeon holds down the implant 200 on the cornea 600 using a surgical cannula, Sinskey Hook or other tool 610 such that implant 200 gently touches the stroma bed of the cornea 600 through the bottom slot 110. This tool 610 holds down the implant 200 through the top inserter slot 102 as shown in Figure 5B. The surgeon then retracts the inserter 100 from the cornea 600 to release the implant 200 from the inserter 100 and deposit the implant 200 at the desired location. If the implant 200 is not precisely at the desired location, then the surgeon may gently move the implant 200 into position using a surgical sponge, rounded-tip tool, or other tool. In the example shown in Figure 5C, the implant 200 is centered on the patient's pupil 1130. After the implant 200 is correctly positioned, the surgeon places the flap 1120 over the implant 200.

**[0032]** The implant 200 may be implanted concurrent with a LASIK procedure or post-LASIK. Since a flap is cut into the cornea during a LASIK procedure, the same flap may be used to implant the implant 200. If the implant 200 is implanted post-LASIK, then the LASIK flap may be re-opened or the inserter 100 may be advanced between the flap and the underlying corneal tissue to the desired position. In this example, the LASIK procedure may be used to correct distance vision while the implant is used to provide near vision. Additional details can be found, for example, in U.S. Patent Application Serial No. 11/554,544, entitled "Small Diameter Inlays," filed on October 30, 2006.

**[0033]** The implant 200 may also be implanted through a closed flap instead of an open flap. In this embodiment, the distal portion of the inserter 100 may be inserted between the flap and the underlying corneal tissue and advanced between the flap and underlying corneal tissue to the desired position in the cornea. The distal portion of the inserter 100 preferably has a thin cross-section so that the inserter 100 does not induce corneal wound stretching. The curved portion 103 of the inserter 100 follows the curvature of the cornea allowing the inserter to more easily move between the flap and underlying corneal tissue while minimizing stress on the cornea. Further, the top surface of the inserter 100 preferably a downward sloping portion 115 that slopes downward to the leading edge 111 of the inserter 100 as shown in Figure 3. In this embodiment, a surgical cannula or other tool may also be inserted between the flap and the underlying corneal tissue to hold down the implant 200 at the desired location and release the implant 200 from the inserter 100.

[0034] The implant 200 may also be implanted using different methods to access the interior of the cornea. For example, the interior of the cornea may be accessed through a lamellar pocket, channel, or pathway cut into the cornea. Additional details may be found, for example, in U.S. Patent Application Serial No. 11/421,597, entitled "Ocular Tissue Separation Areas With Barrier Regions For Inlays Or Other Refractive Procedures," filed on June 1, 2006. Methods for creating pockets in the cornea are described in United States Patent Application Publication No. 2003/0014042, published January 16, 2003, entitled "Method of Creating Stromal Pockets for Corneal Implants". For example, the inserter may be inserted into a channel or pocket cut into the cornea and advanced through the channel to position the implant at the desired location in the cornea. A second channel may also be cut into the cornea to provide access for the surgical cannula or other tool used to hold down the implant at the desired location. A pocket is a recess formed within the corneal tissue for receiving the corneal implant and may be accessed through a channel formed in the cornea. Figure 5D shows an example of the inserter 100 placing the implant 200 within a pocket 700 formed in the cornea 600 through an opening 710.

[0035] In another embodiment, the inserter 100 may include a channel running through the inserter 100 and extending from the proximal end of the inserter 100 to the holding space 101. The proximal end of the inserter 100 may be connected to a syringe filled with fluid, e.g., saline, for delivering fluid to the holding space 101 through the channel. In this embodiment, the channel may deliver fluid at the back of the holding space 101. This allows a surgeon to deliver a small amount of fluid into the holding space 101 to hydrate the implant 200 and/or gently push the implant 200 out of the holding space 101 for releasing the implant 200 from the inserter 100. For example, when the implant 200 is at the desired location on the cornea, the surgeon may deliver fluid through the channel to help release the implant 200 from the inserter 101. This may be done instead of or in conjunction with the tool used to hold down the implant 200. Figure 7 shows an inserter 100 according one embodiment comprising a luer lock 810 at the proximal end of the inserter 100 that is configured to mate with a corresponding luer lock of a syringe or other fluid delivering device. Figure 8 shows an embodiment in which a syringe 820 is connected to the proximal end of the inserter 100 via the luer lock 810 for delivering fluid through the channel.

[0036] Figures 9 and 10 show a distal portion of an inserter 900 according to another embodiment. In this embodiment, the inserter 900 comprises a cannula 910 or tube configured to hold the implant 1000 therein for delivery to the cornea. The cannula 910 preferably has a width slightly larger than the width of the implant 1000 to be delivered by the inserter 900. The cannula 910 also preferably has a height that is slightly larger than the thickness of the implant 1000. The distal end 920 of the cannula 910 is preferably shaped to hold the implant 1000 in an unstressed state. The cannula 910 may be slightly curved along its width and/or length to follow the curvature of the cornea. Fluid, e.g., saline or BSS, may be delivered to the implant 1000 through a channel in the inserter 900 to ensure that the implant 1000 is hydrated prior to use and/or to release the implant 1000 from the inserter 900.

[0037] The inserter 900 also includes a top inserter slot 930 through which a surgical cannula, Sinskey Hook or other tool can be used to hold down the implant 1000 at the desired location in the cornea. The inserter 900 also includes a bottom opening 940 through which the implant 1000 can contact the cornea when the implant is held down as shown in Figure 10. Preferably, the edges and corners at the tip of the cannula 910 are smooth and rounded to prevent cutting by the cannula 910 and damage to the cornea or implant from the tip of the cannula. A handle may be attached to the proximal end of the inserter for easier handling by the surgeon. Further, a syringe or other fluid delivering device may be connected to the inserter 900 for delivering fluid to the implant through the channel in the inserter 900. Figure 11 shows the entire inserter 910, which includes a clearance bend 945 and an elongated portion 950 with an optional luer lock 960 at the proximal end of the inserter 910 for connecting, e.g., a fluid delivering device to the inserter 910.

[0038] The implant 1000 may be implanted in the cornea using procedures similar to the ones discussed above. For example, a flap may be cut into the cornea and lifted to expose a stroma bed of the cornea. The surgeon may then position the implant 1000 at the desired location using the inserter 900. When the implant 1000 is at the desired position, the surgeon may use a surgical cannula or other tool to hold the implant 1000 through the top inserter slot 930. The surgeon may hold down the implant 1000 such that the bottom surface of the implant 1000 contacts the cornea through the bottom opening 940 of the inserter 900. While the implant 1000 is held down at the desired location, the surgeon retracts the inserter 900 to deposit the implant 1000 on the cornea. The surgeon may also deliver fluid to the implant 1000 through the channel in the inserter to release the implant

1000 from the inserter 900. After the implant 1000 is correctly positioned, the surgeon places the flap over the implant 1000. Figure 11 shows an example of the inserter 900 positioned over the desired location of the cornea for depositing the implant 1000 at the desired location.

**[0039]** The implant 1000 may also be implanted using other procedures including implantation through a channel, pocket or pathway cut into the cornea for access to the desired position in the cornea. In these procedures, the inserter 900 may be moved to the desired position through the channel, pocket or pathway. The thin cross section of the inserter 900 minimizes stress on the cornea as the inserter 900 is advanced through the channel, pocket or pathway. A second channel may also be cut into the cornea to provide access for the surgical tool used to hold down the implant 1000 at the desired location.

**[0040]** The inserter systems described herein may be used to implant various types of corneal implant. For example, the inserter systems may be used to implant corneal implants deep within the cornea such as intraocular lenses or at lower depths such as inlays. The inserter systems may also be used to place an onlay on the surface of the cornea. Thus, the inserter systems may be used to implant corneal implants of various rigidity, sizes and properties at various depths in the cornea. The corneal implant may be an inlay, lens, or the like.

**[0041]** In the foregoing specification, the invention has been described with reference to specific embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto. The scope of the claims should not be limited by particular embodiments set forth herein, but should be construed in a manner consistent with the specification as a whole. As another example, each feature of one embodiment can be mixed and matched with other features shown in other embodiments. As yet another example, the order of steps of method embodiments may be changed. Features and processes known to those of ordinary skill may similarly be incorporated as desired. Additionally and obviously, features may be added or subtracted as desired. Accordingly, the invention is not to be restricted except in light of the attached claims construed in light of the specification as a whole.

**CLAIMS:**


1. A corneal implant insertion system comprising:
  - an elongated body having a distal end and a proximal end;
  - a holding space at the distal end of the elongated body, wherein the holding space is defined between a top distal portion having a width and a bottom distal portion having a width, wherein the top distal portion is generally flat across its width and the bottom distal portion is generally flat across its width;
  - a slot through the top distal portion of the elongated body, wherein the slot extends to a leading edge of the elongated body;
  - a corneal implant retained within the holding space; and
  - a fluid disposed in the holding space such that the corneal implant is retained within the holding space in an unstressed configuration due to the surface tension of the fluid.
2. The insertion system of claim 1, wherein the holding space has a width that is between a diameter of the corneal implant and 20 percent larger than the diameter of the corneal implant.
3. The insertion system of claim 1 or 2, wherein a top surface of the top distal portion of the elongated body slopes downward relative to the bottom distal portion to the leading edge.
4. The insertion system of claim 1, 2, or 3, wherein the leading edge is semicircular.
5. The insertion system of any one of claims 1 to 4, further comprising a bottom slot through the bottom distal portion of the elongated body.
6. The insertion system of claim 5, wherein the bottom slot extends to the leading edge of the elongated body and is substantially aligned with the slot through the top distal portion.


7. The insertion system of any one of claims 1 to 6, wherein the elongated body is made from a single piece of material.
8. The insertion system of claim 7, wherein the material comprises titanium.
9. The insertion system of any one of claims 1 to 8, wherein the elongated body has a bend proximal the distal end.
10. The insertion system of claim 9, wherein the bend of the elongated body is contoured to follow the curvature of a patient's cornea.
11. The insertion system of claim 9, wherein the bend is a first bend, and the elongated body also has a second bent portion proximal to the first bend.
12. The insertion system of any one of claims 1 to 11, wherein the corneal implant has a diameter of between 1 mm and 7 mm.
13. The insertion system of claim 12, wherein the holding space has a width that is no more than 20 percent larger than a diameter of the corneal implant.
14. The insertion system of any one of claims 1 to 13, further comprising a cap placed on the distal end of the elongated body, wherein the cap substantially encloses the holding space of the elongated body.
15. The insertion system of claim 14, further comprising a storage container at least partially filled with the fluid, wherein the cap and the holding space of the elongated body are submerged in the fluid.
16. The insertion system of claim 15, wherein the fluid comprises saline.


17. The system of any one of claims 1 to 16, wherein the generally flat top distal portion and the generally flat bottom distal portion are substantially parallel.
18. The system of claim 17, wherein the corneal implant has an anterior surface and a posterior surface, and wherein the corneal implant is held in the holding space such that the anterior surface is adjacent the top distal portion and the posterior surface is adjacent the bottom distal portion.
19. The system of any one of claims 1 to 18, wherein the holding space is also defined by a first side wall and a second side wall, wherein the first and second side walls have slots therein.
20. The system of any one of claims 1 to 19, further comprising an implant removal tool adapted to fit through the slot and engage the corneal implant in order to remove the corneal implant from the holding space.
21. A corneal inlay insertion system, comprising
  - an elongate body comprising
    - a holding space configured to retain a corneal inlay in an unstressed configuration due to the geometry of the holding space and surface tension, a distal port out of which the corneal inlay passes when deployed from the holding space, the distal port having a width greater than a diameter of the corneal inlay, and a fluid channel extending from the holding space to a proximal end of the elongate body to provide fluid communication from the proximal end to the holding space; and
    - the corneal inlay retained at the holding space in an unstressed configuration, and wherein the holding space includes a top portion disposed on top of the corneal inlay, the top portion having a width that is greater than a diameter of the corneal inlay, and a bottom portion disposed below the corneal inlay, the bottom portion having a width that is greater than a diameter of the corneal inlay.


22. The corneal inlay insertion system of claim 21 further wherein the proximal end is configured to be secured to a fluid delivery device adapted to deliver fluid from the fluid delivery device, through the channel, and to the holding space to release the corneal inlay from the holding space.

FIGURE 1

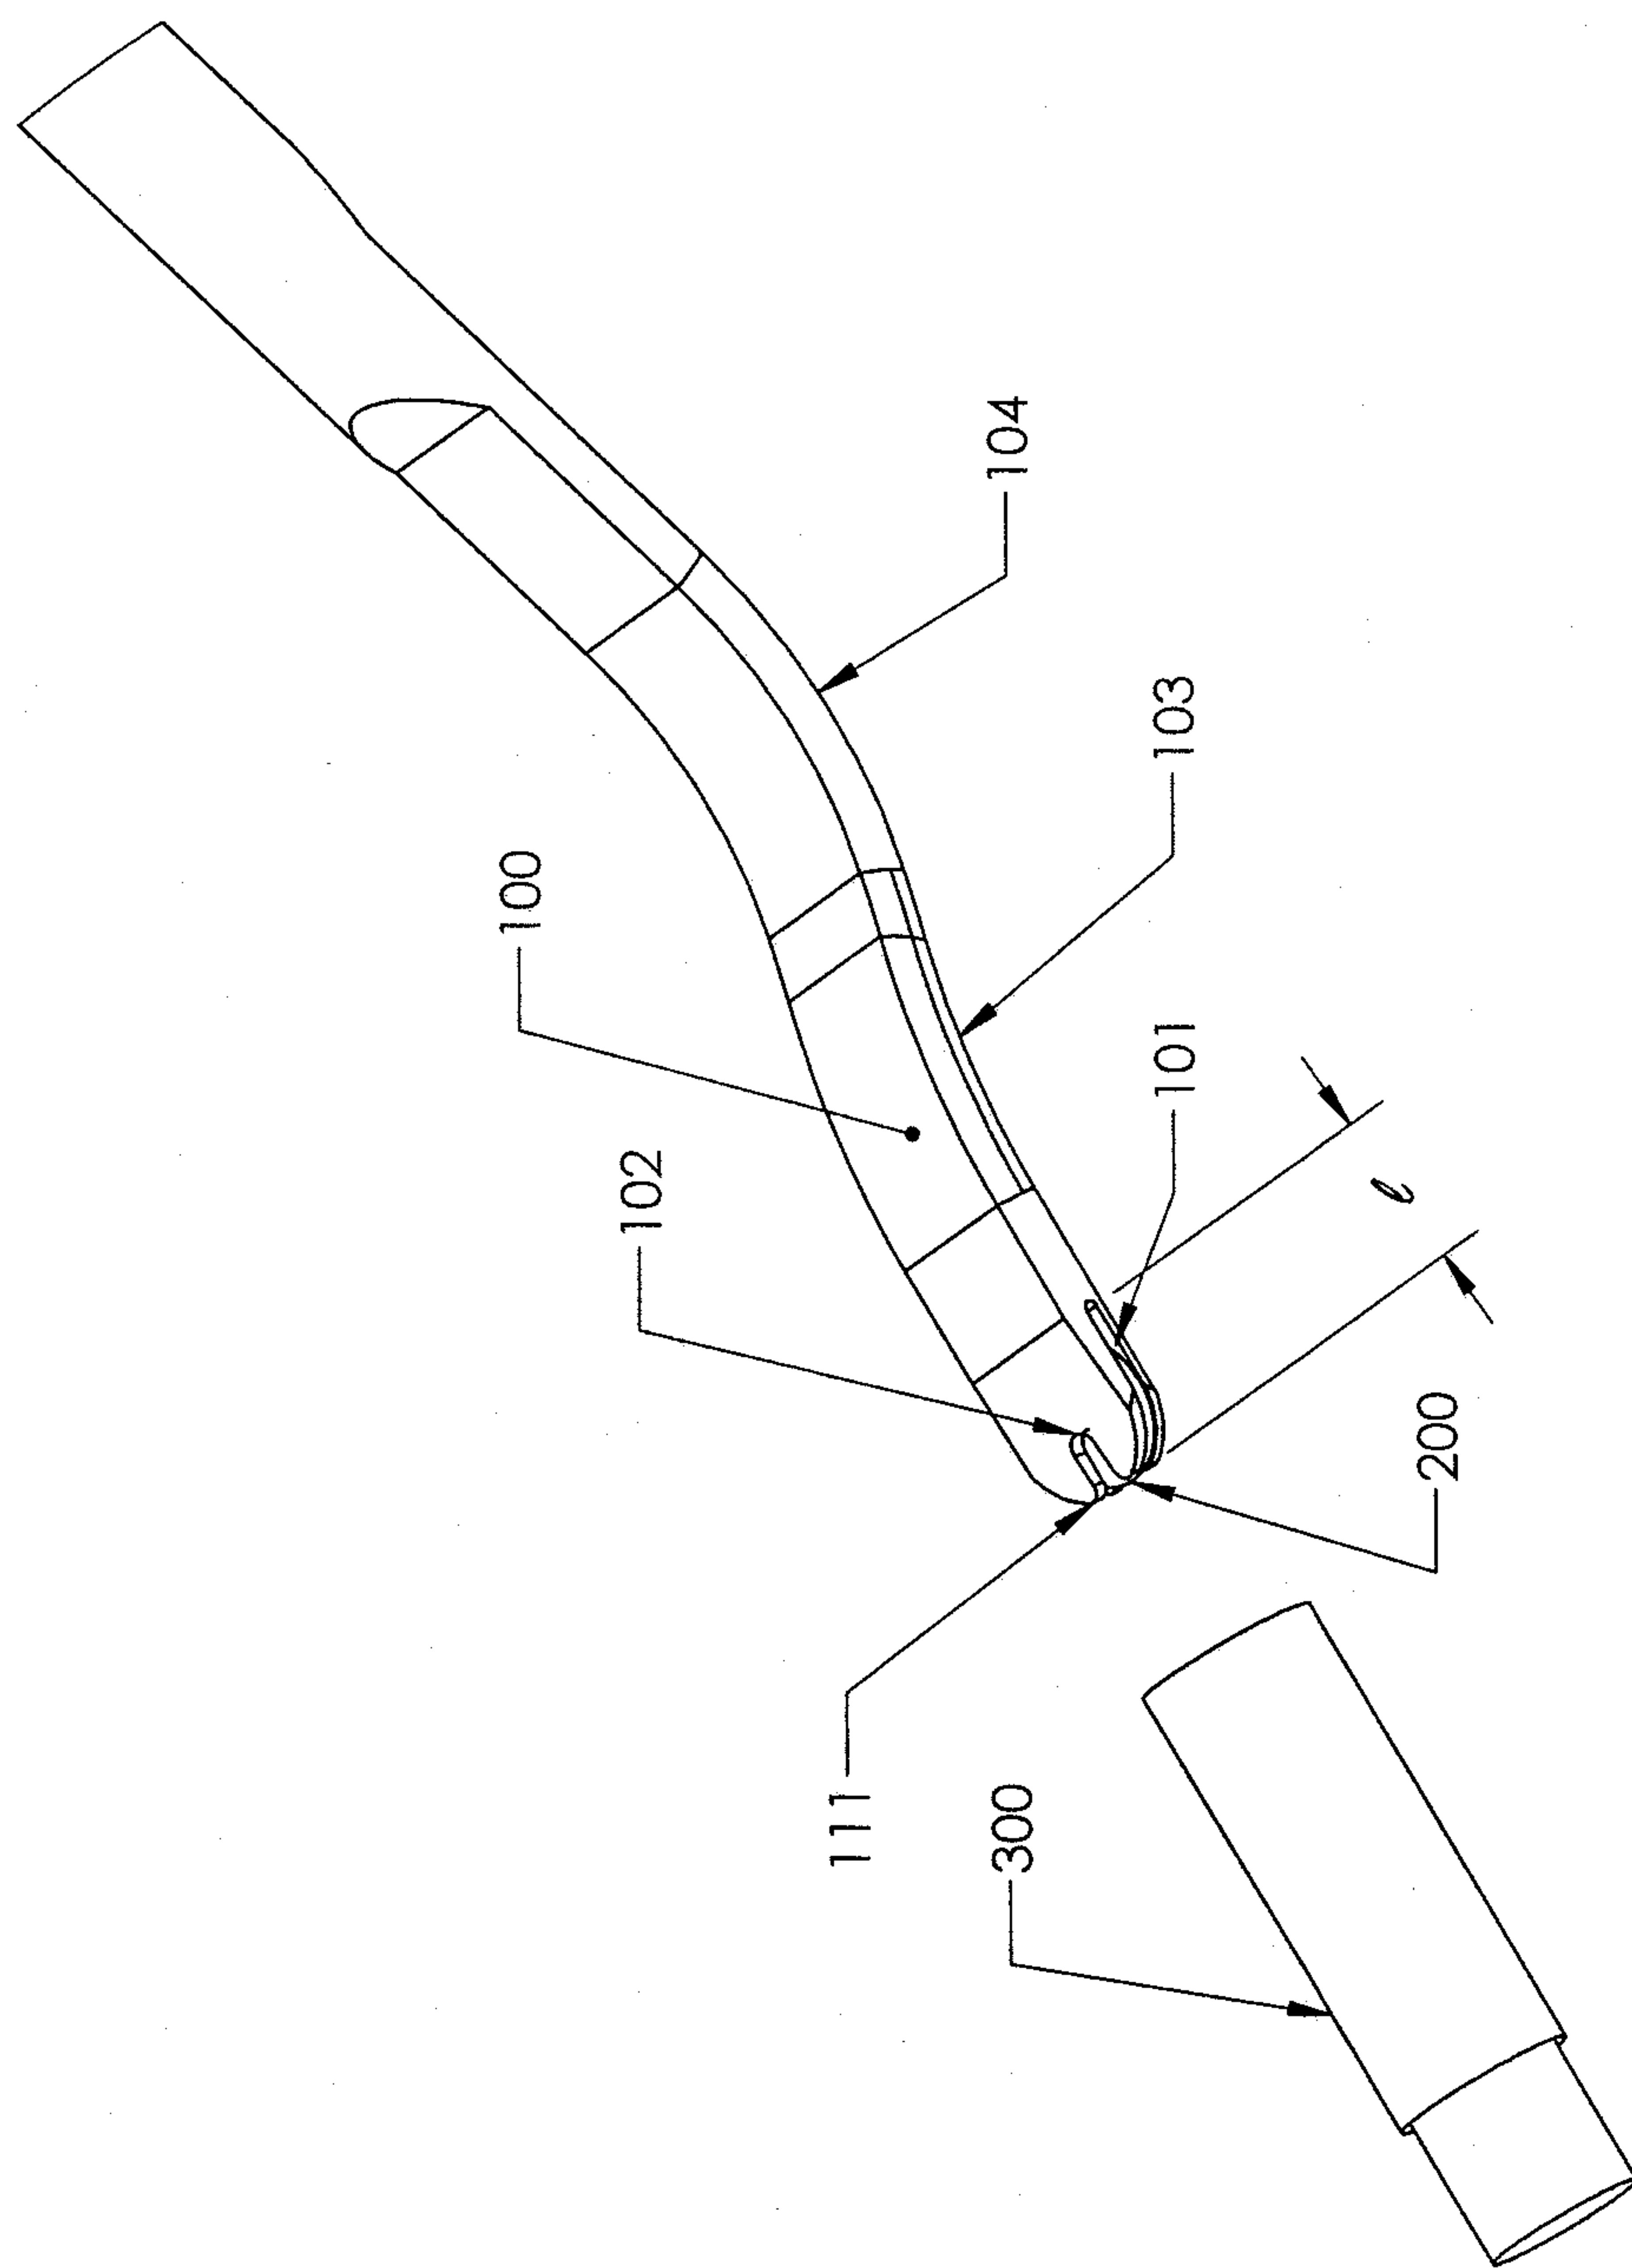

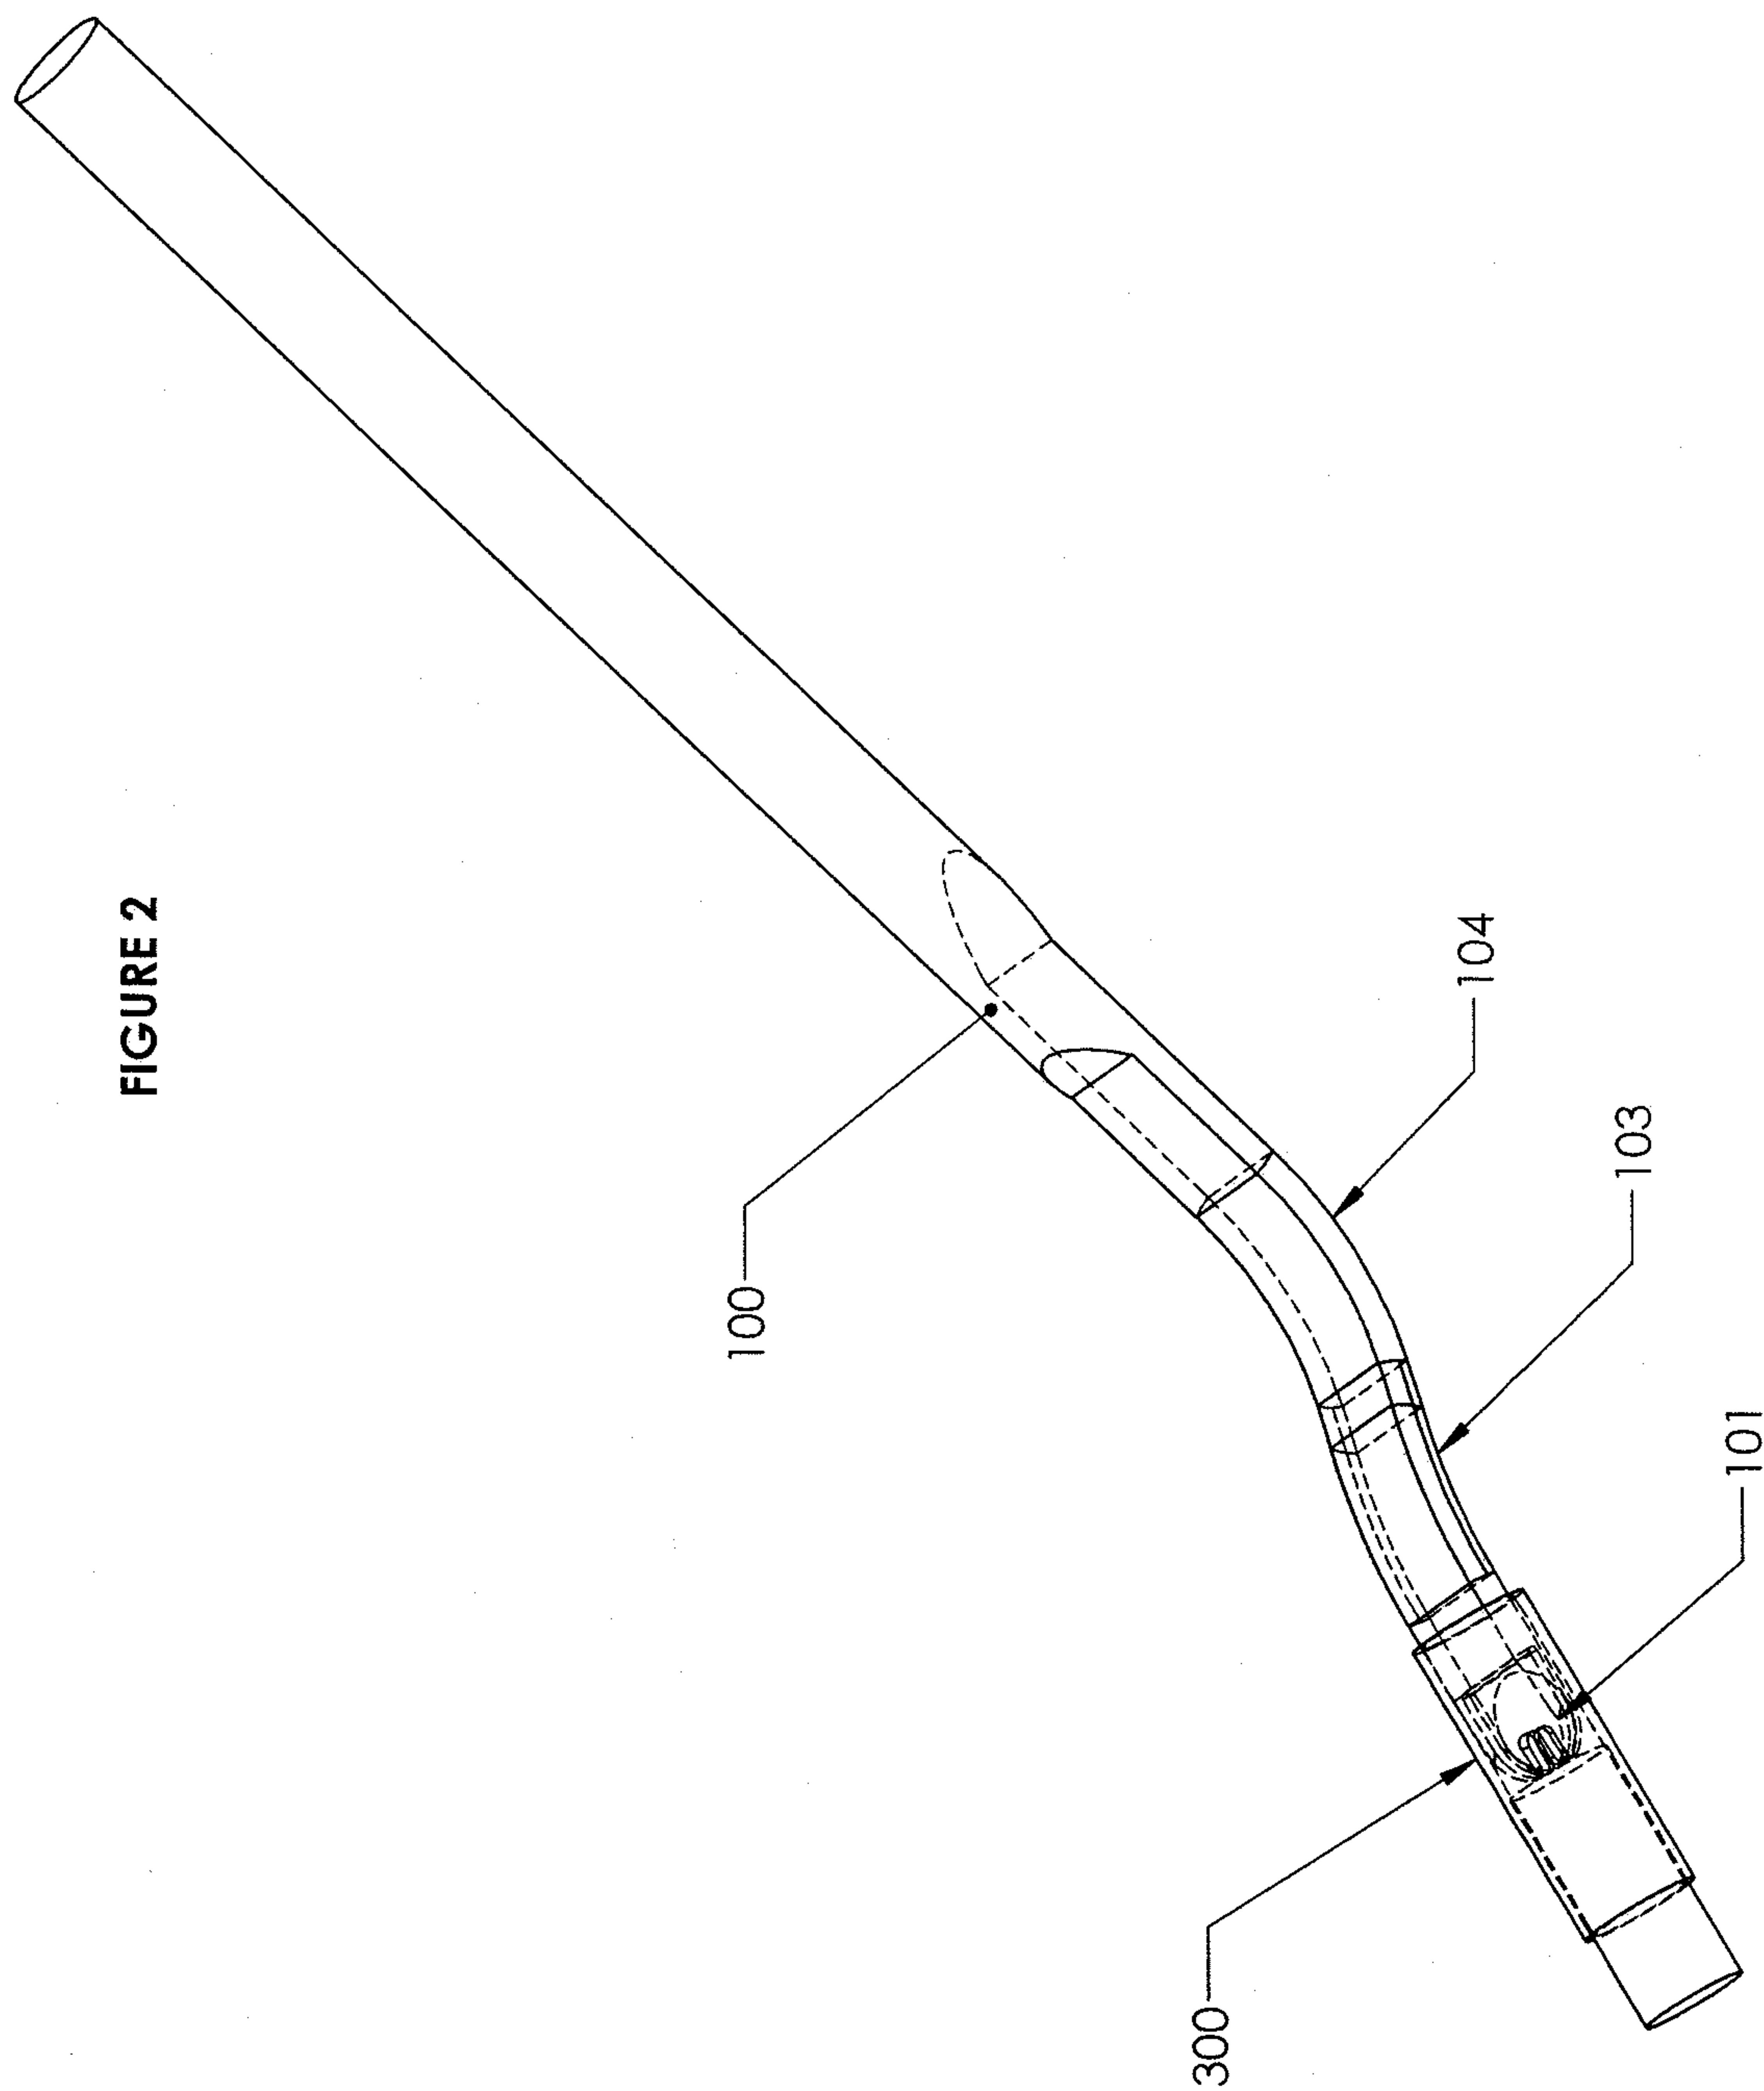


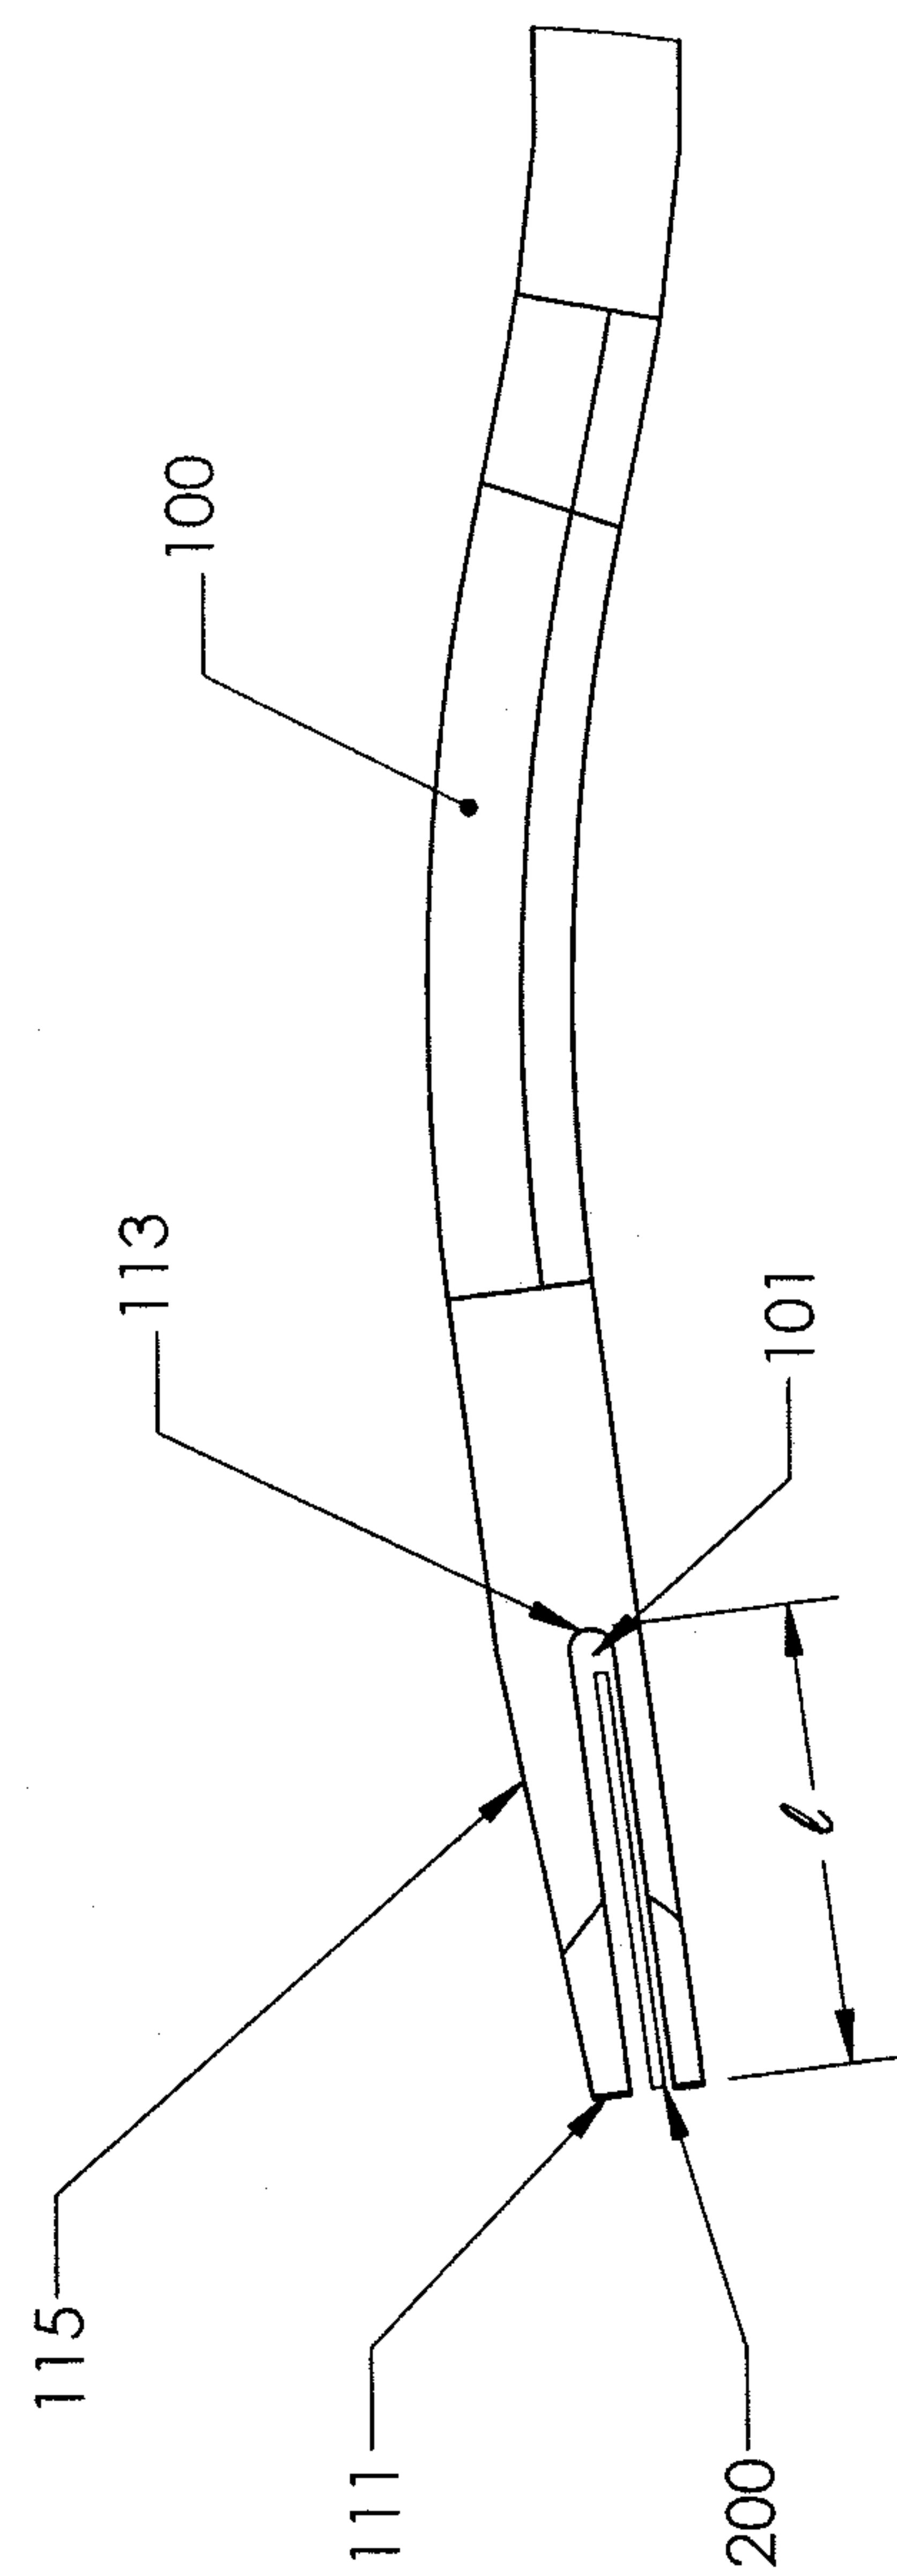**FIGURE 3**

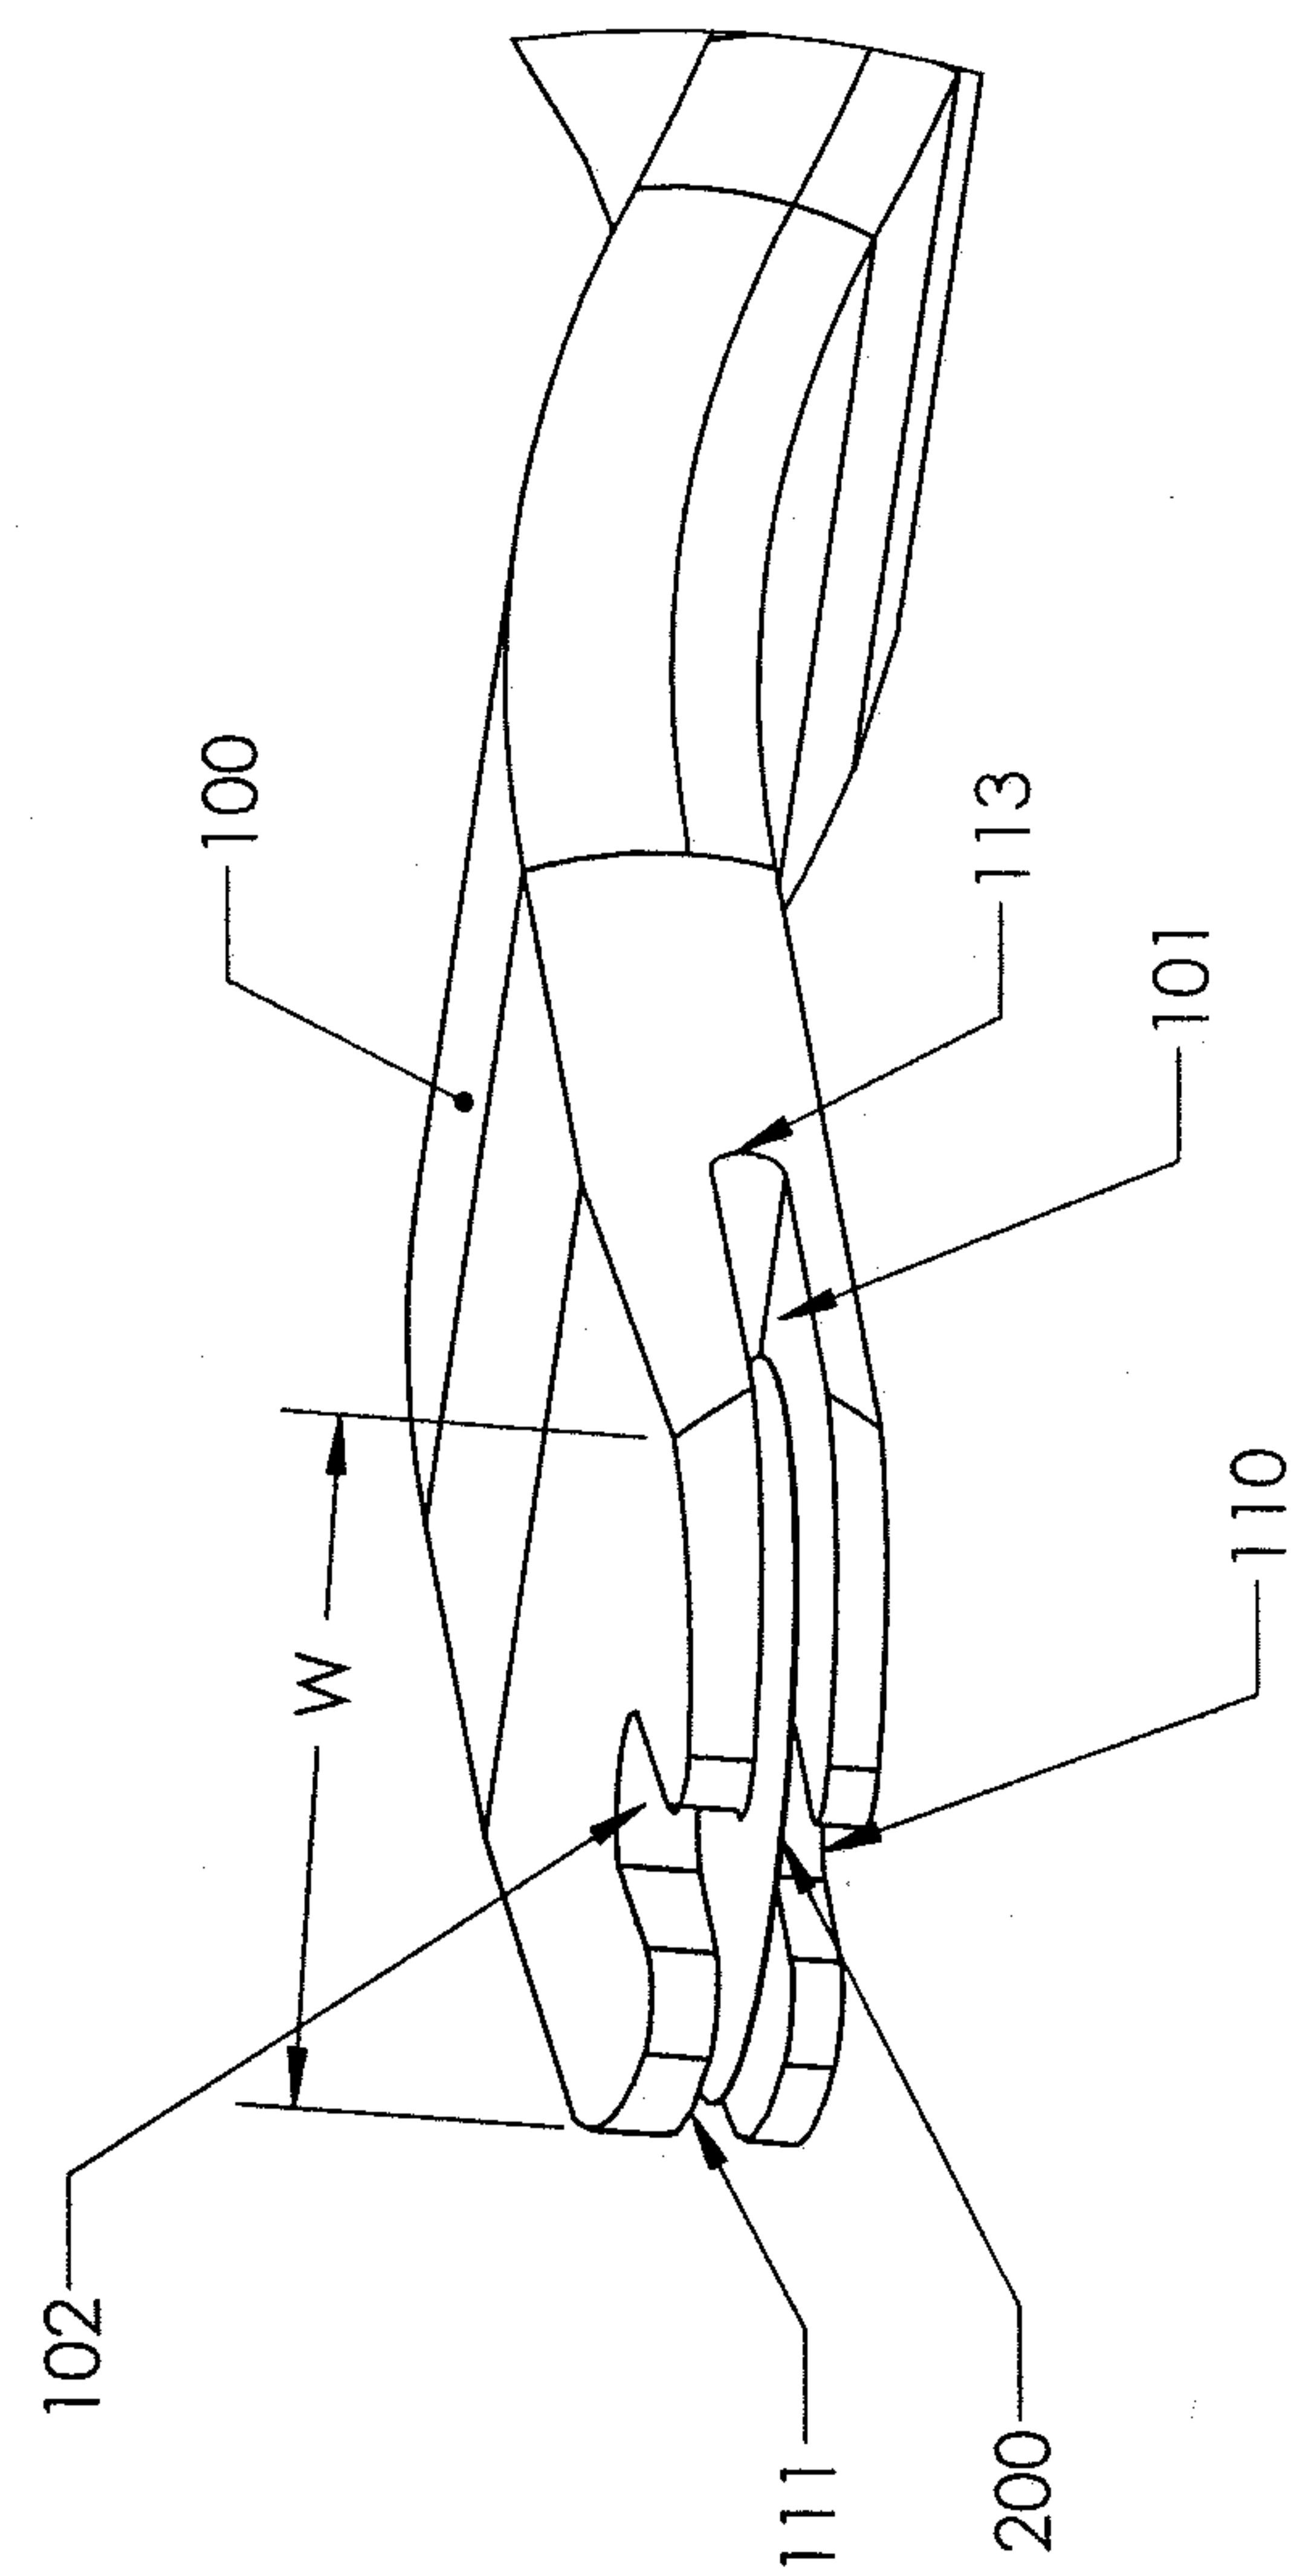**FIGURE 4**

5 / 14

FIGURE 5A

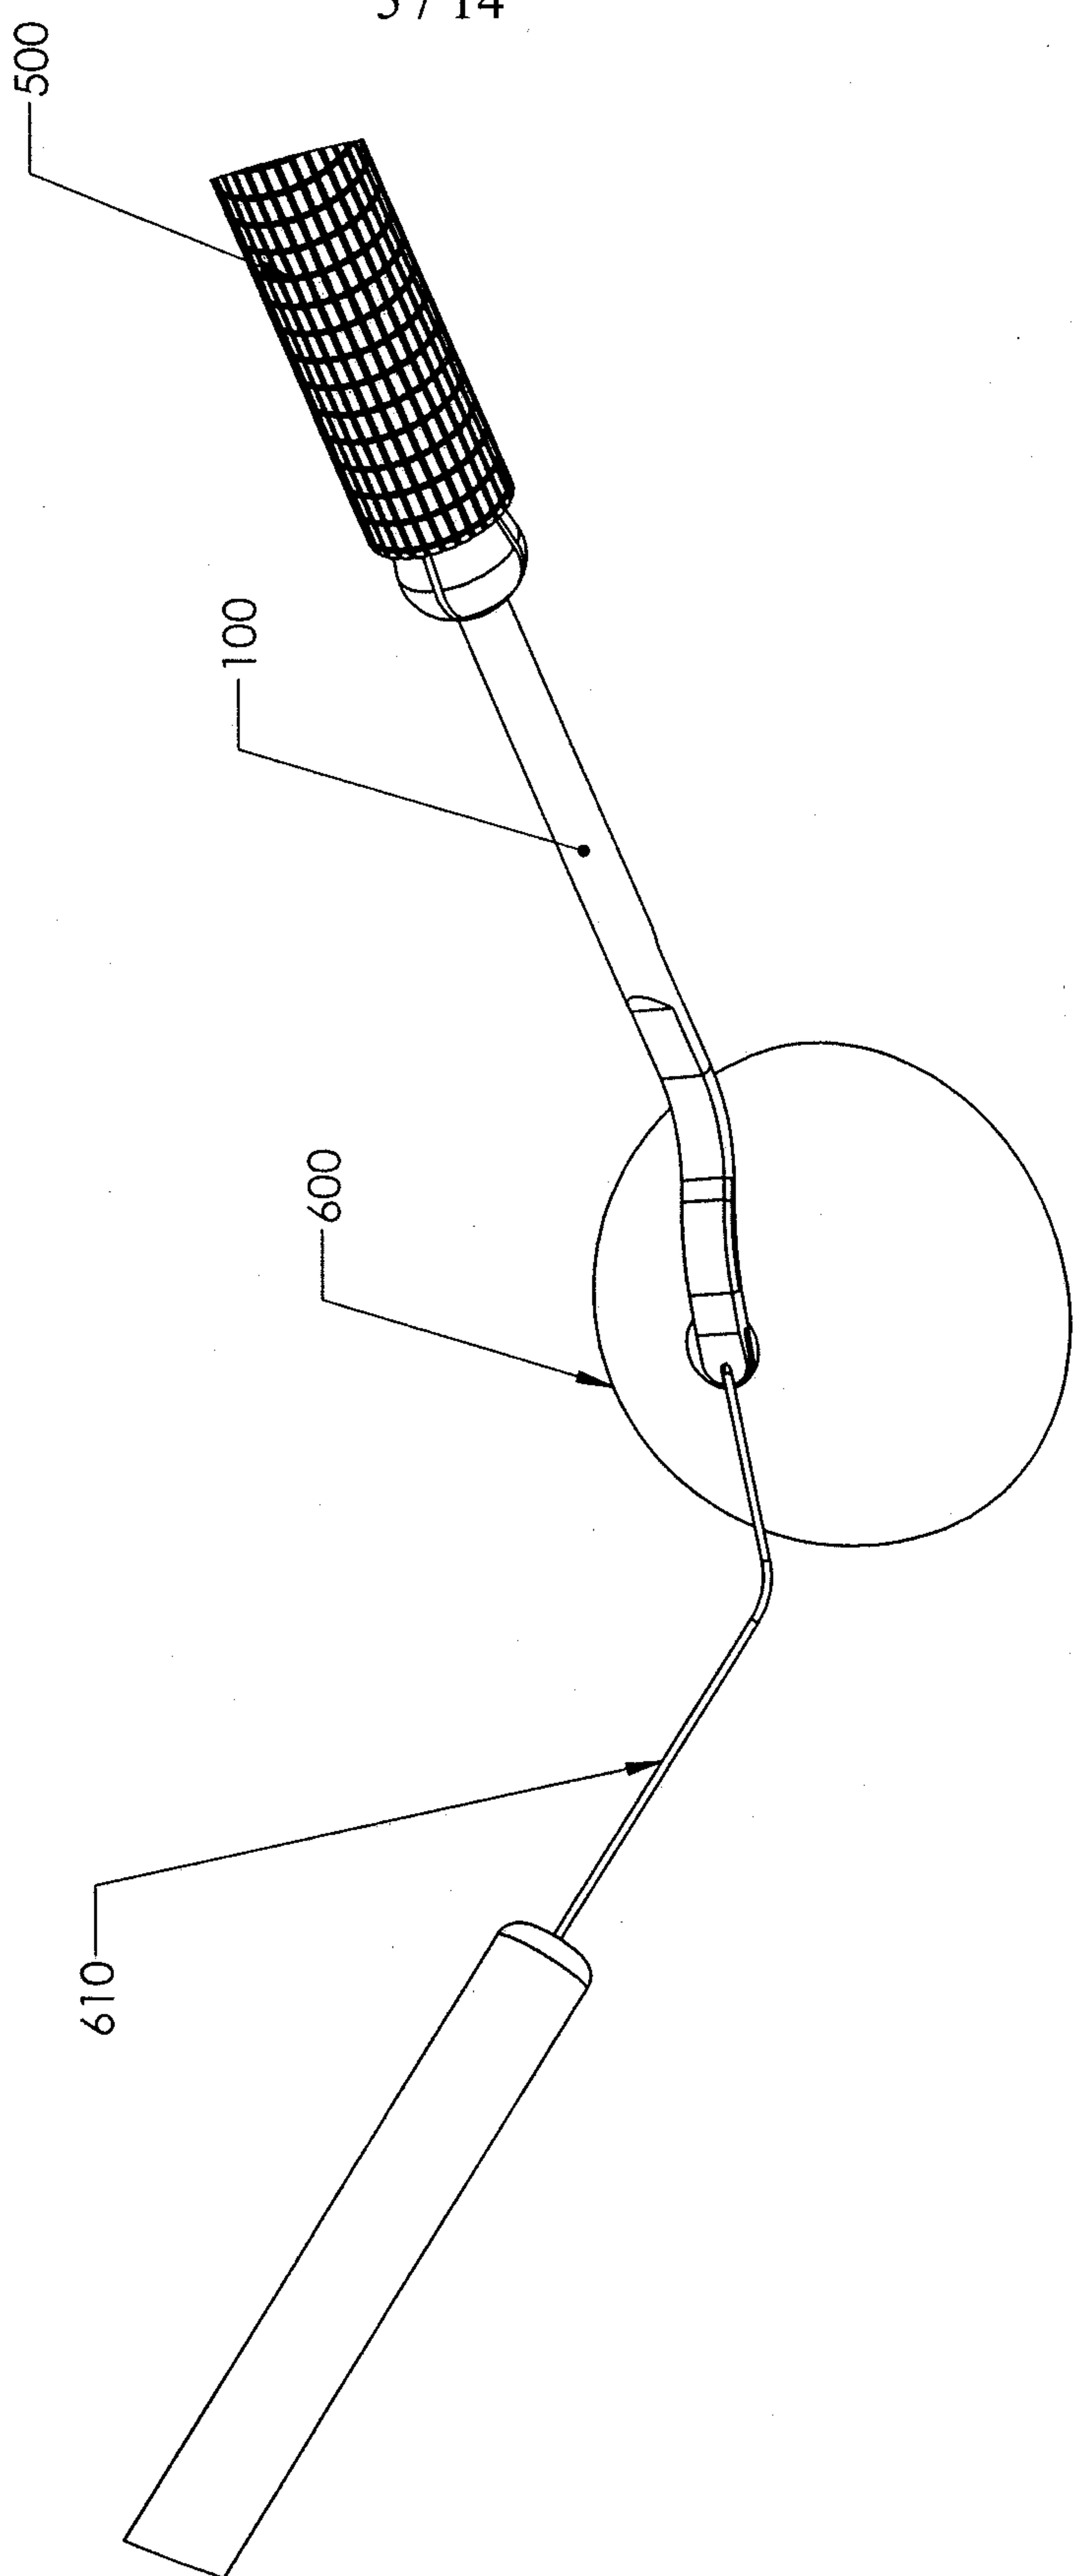

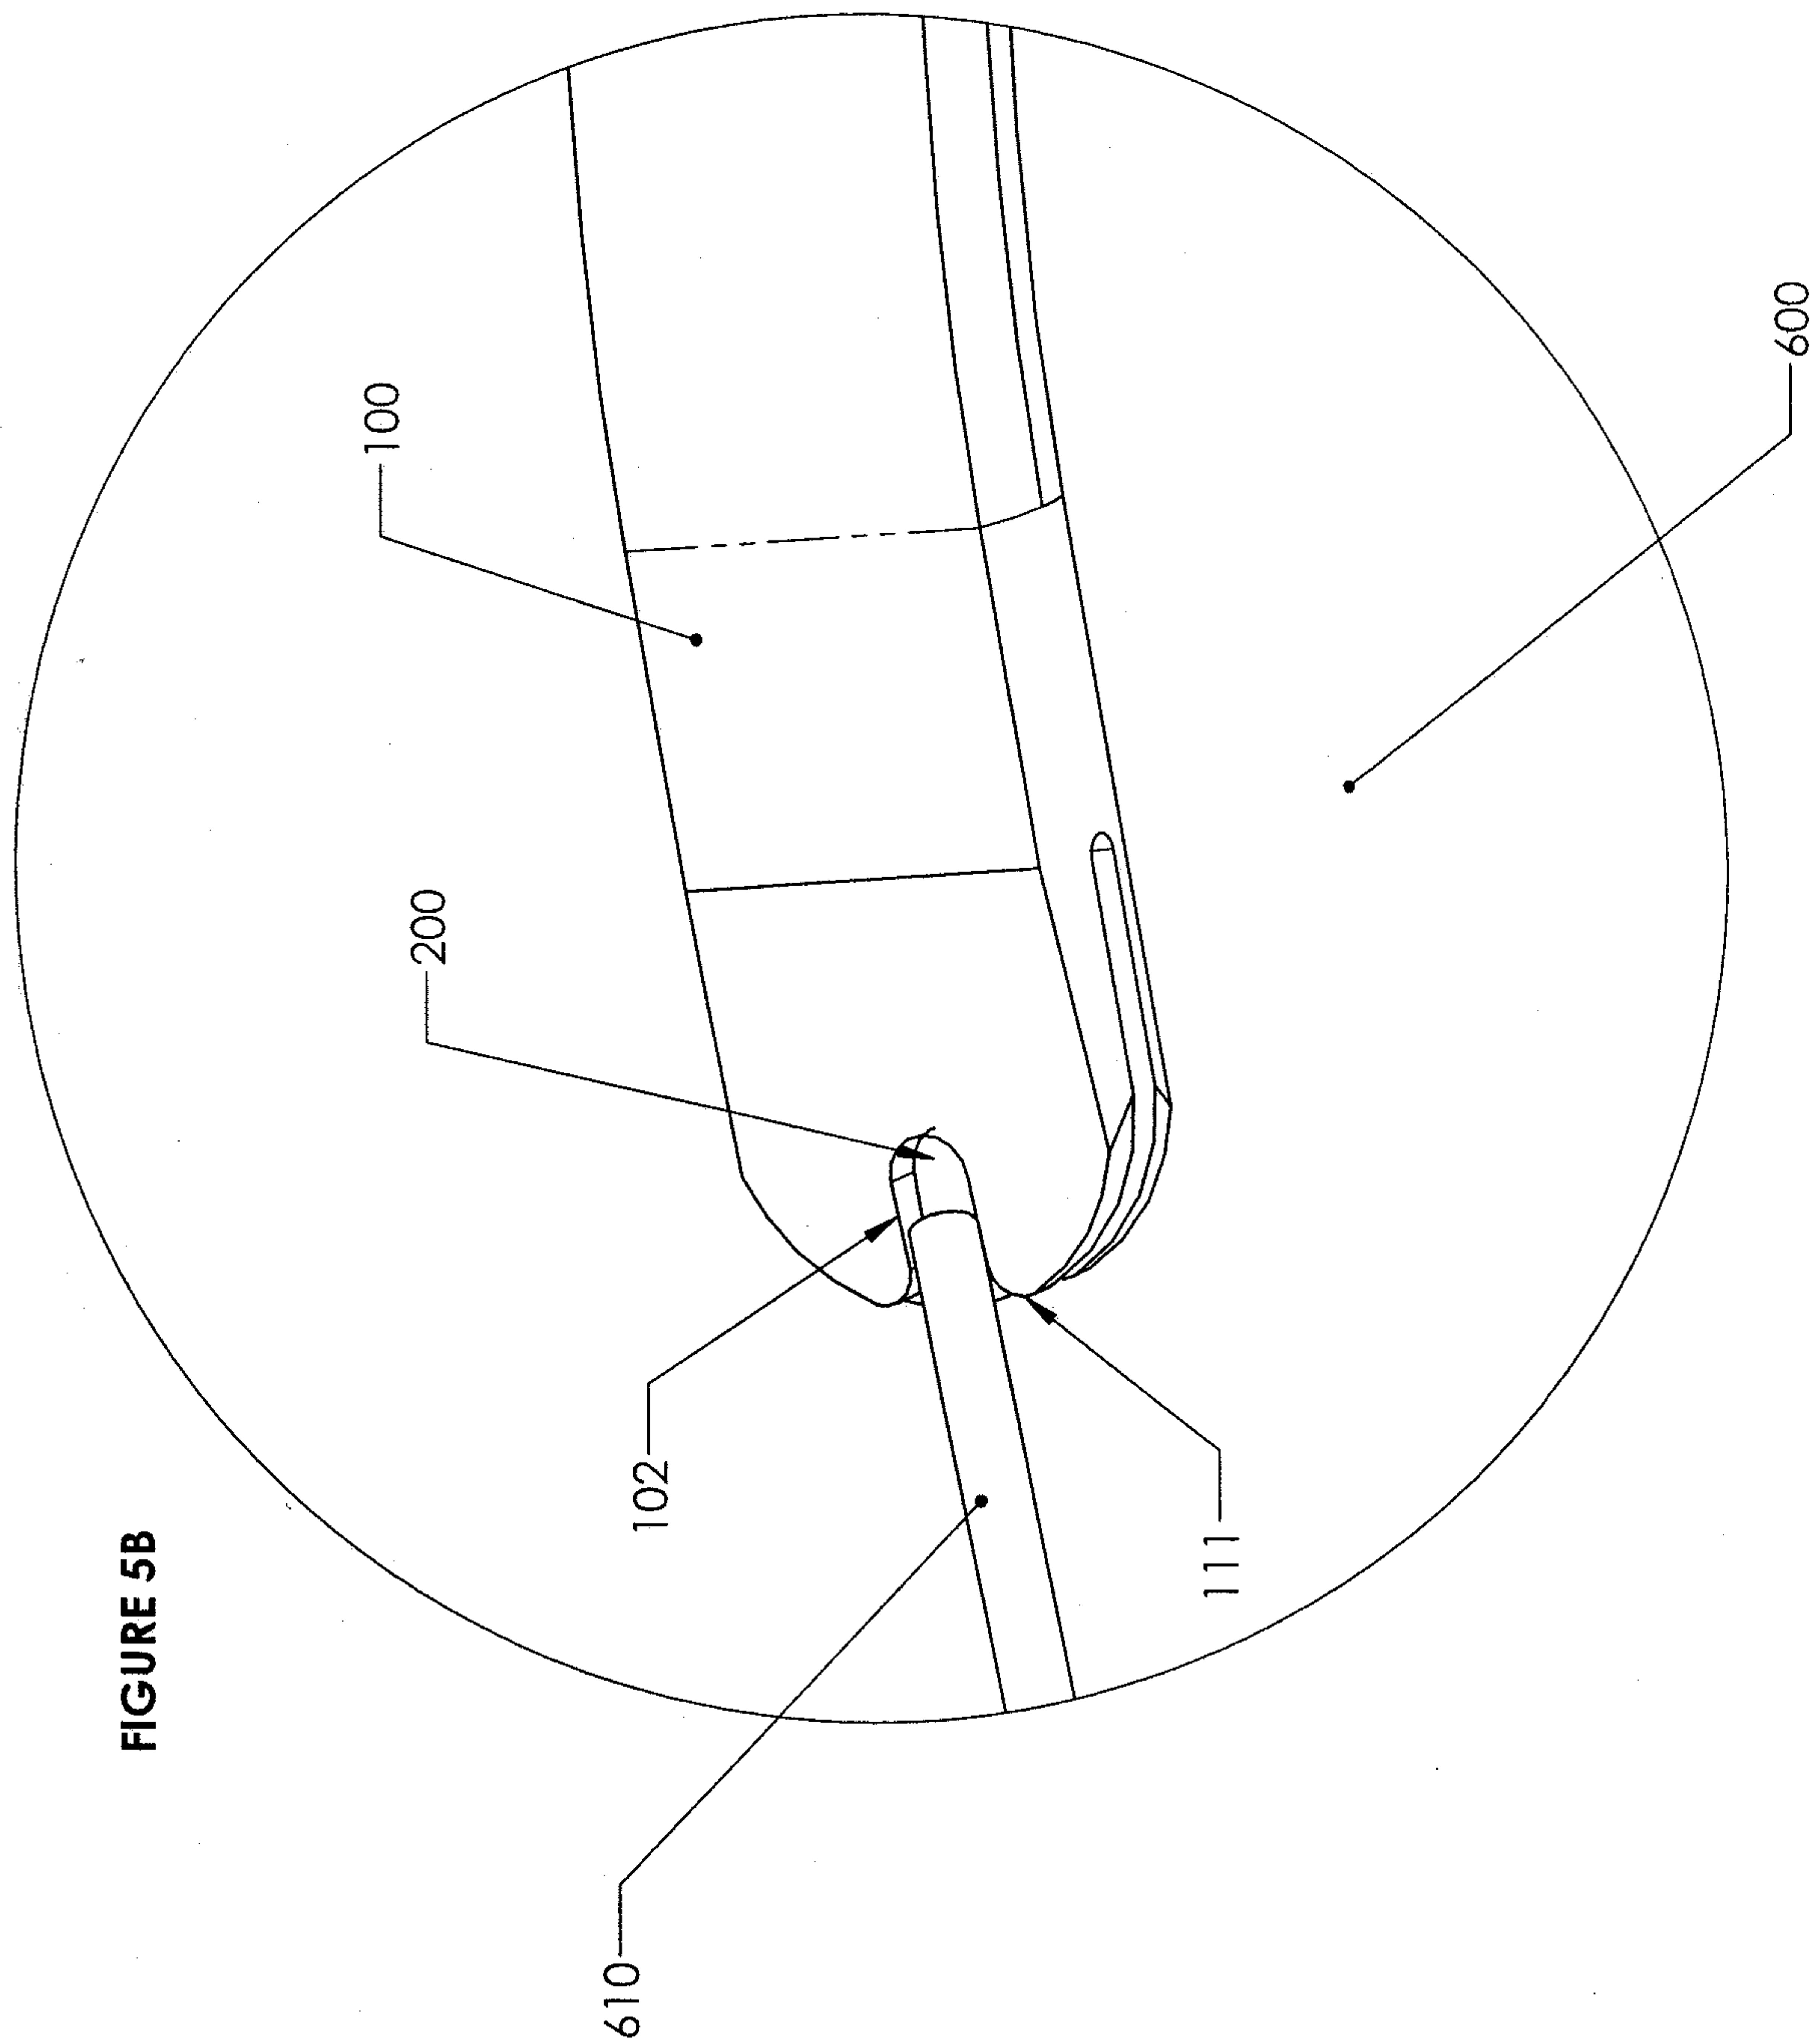


FIGURE 5B

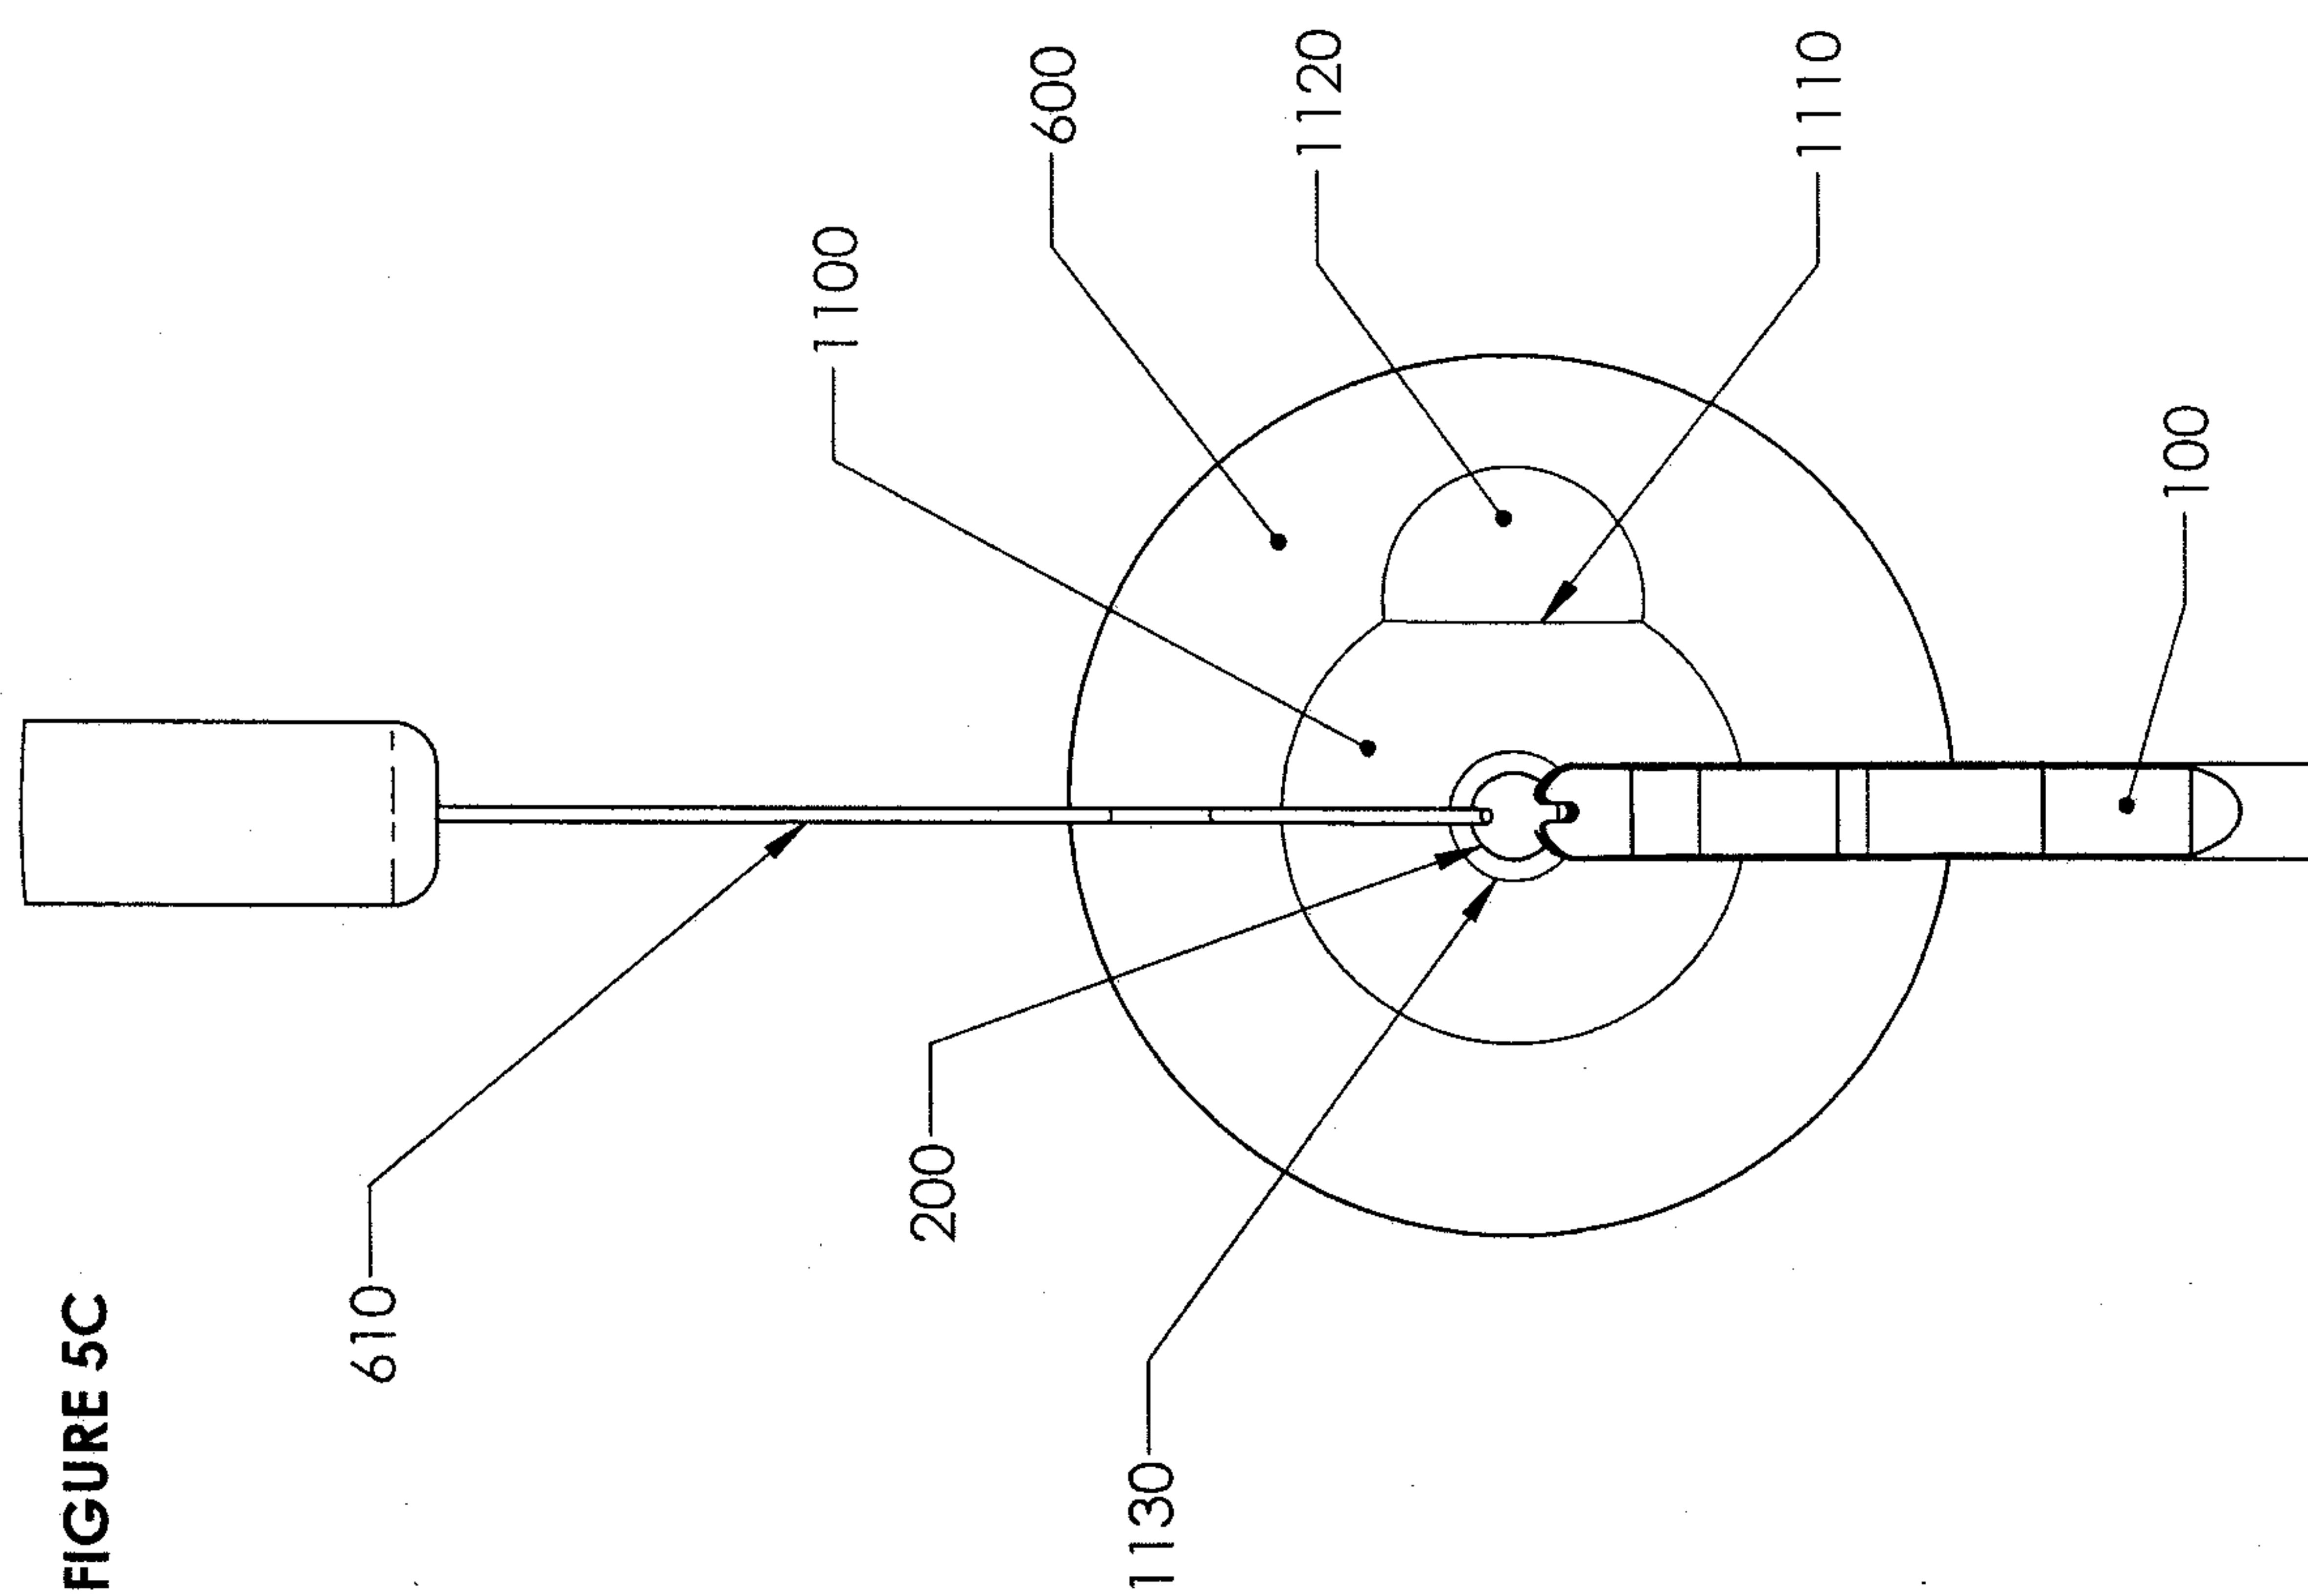
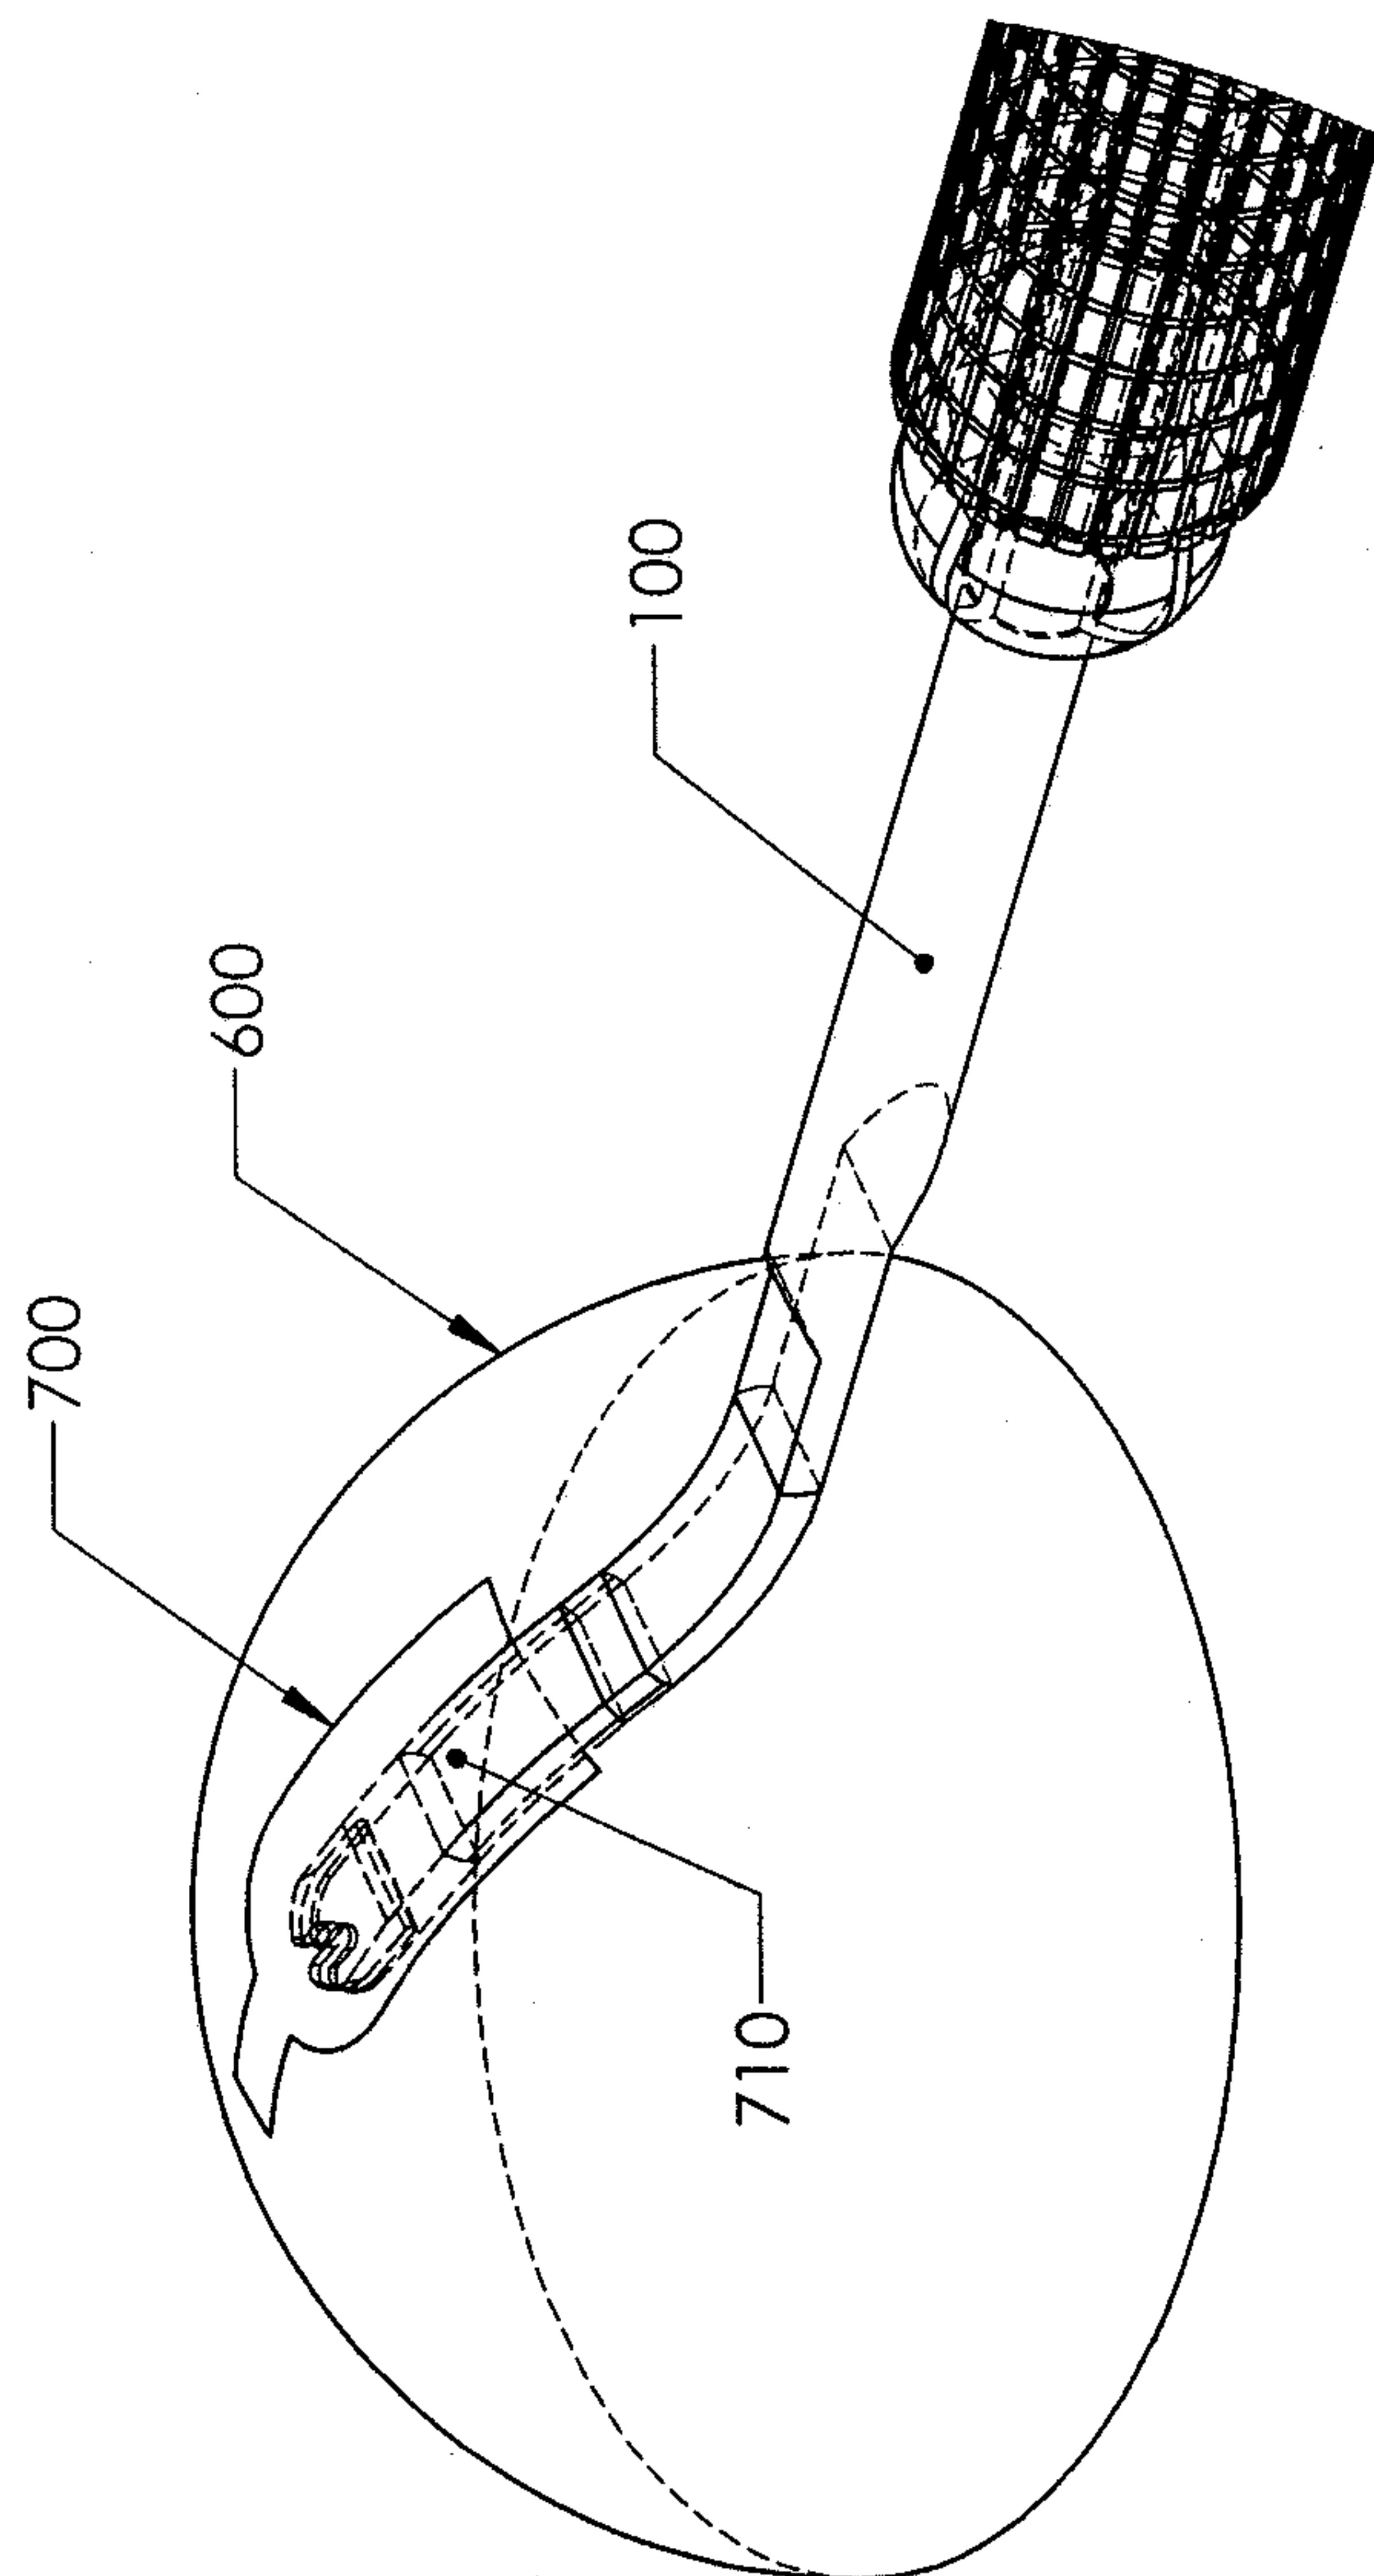


FIGURE 5C

FIGURE 5D



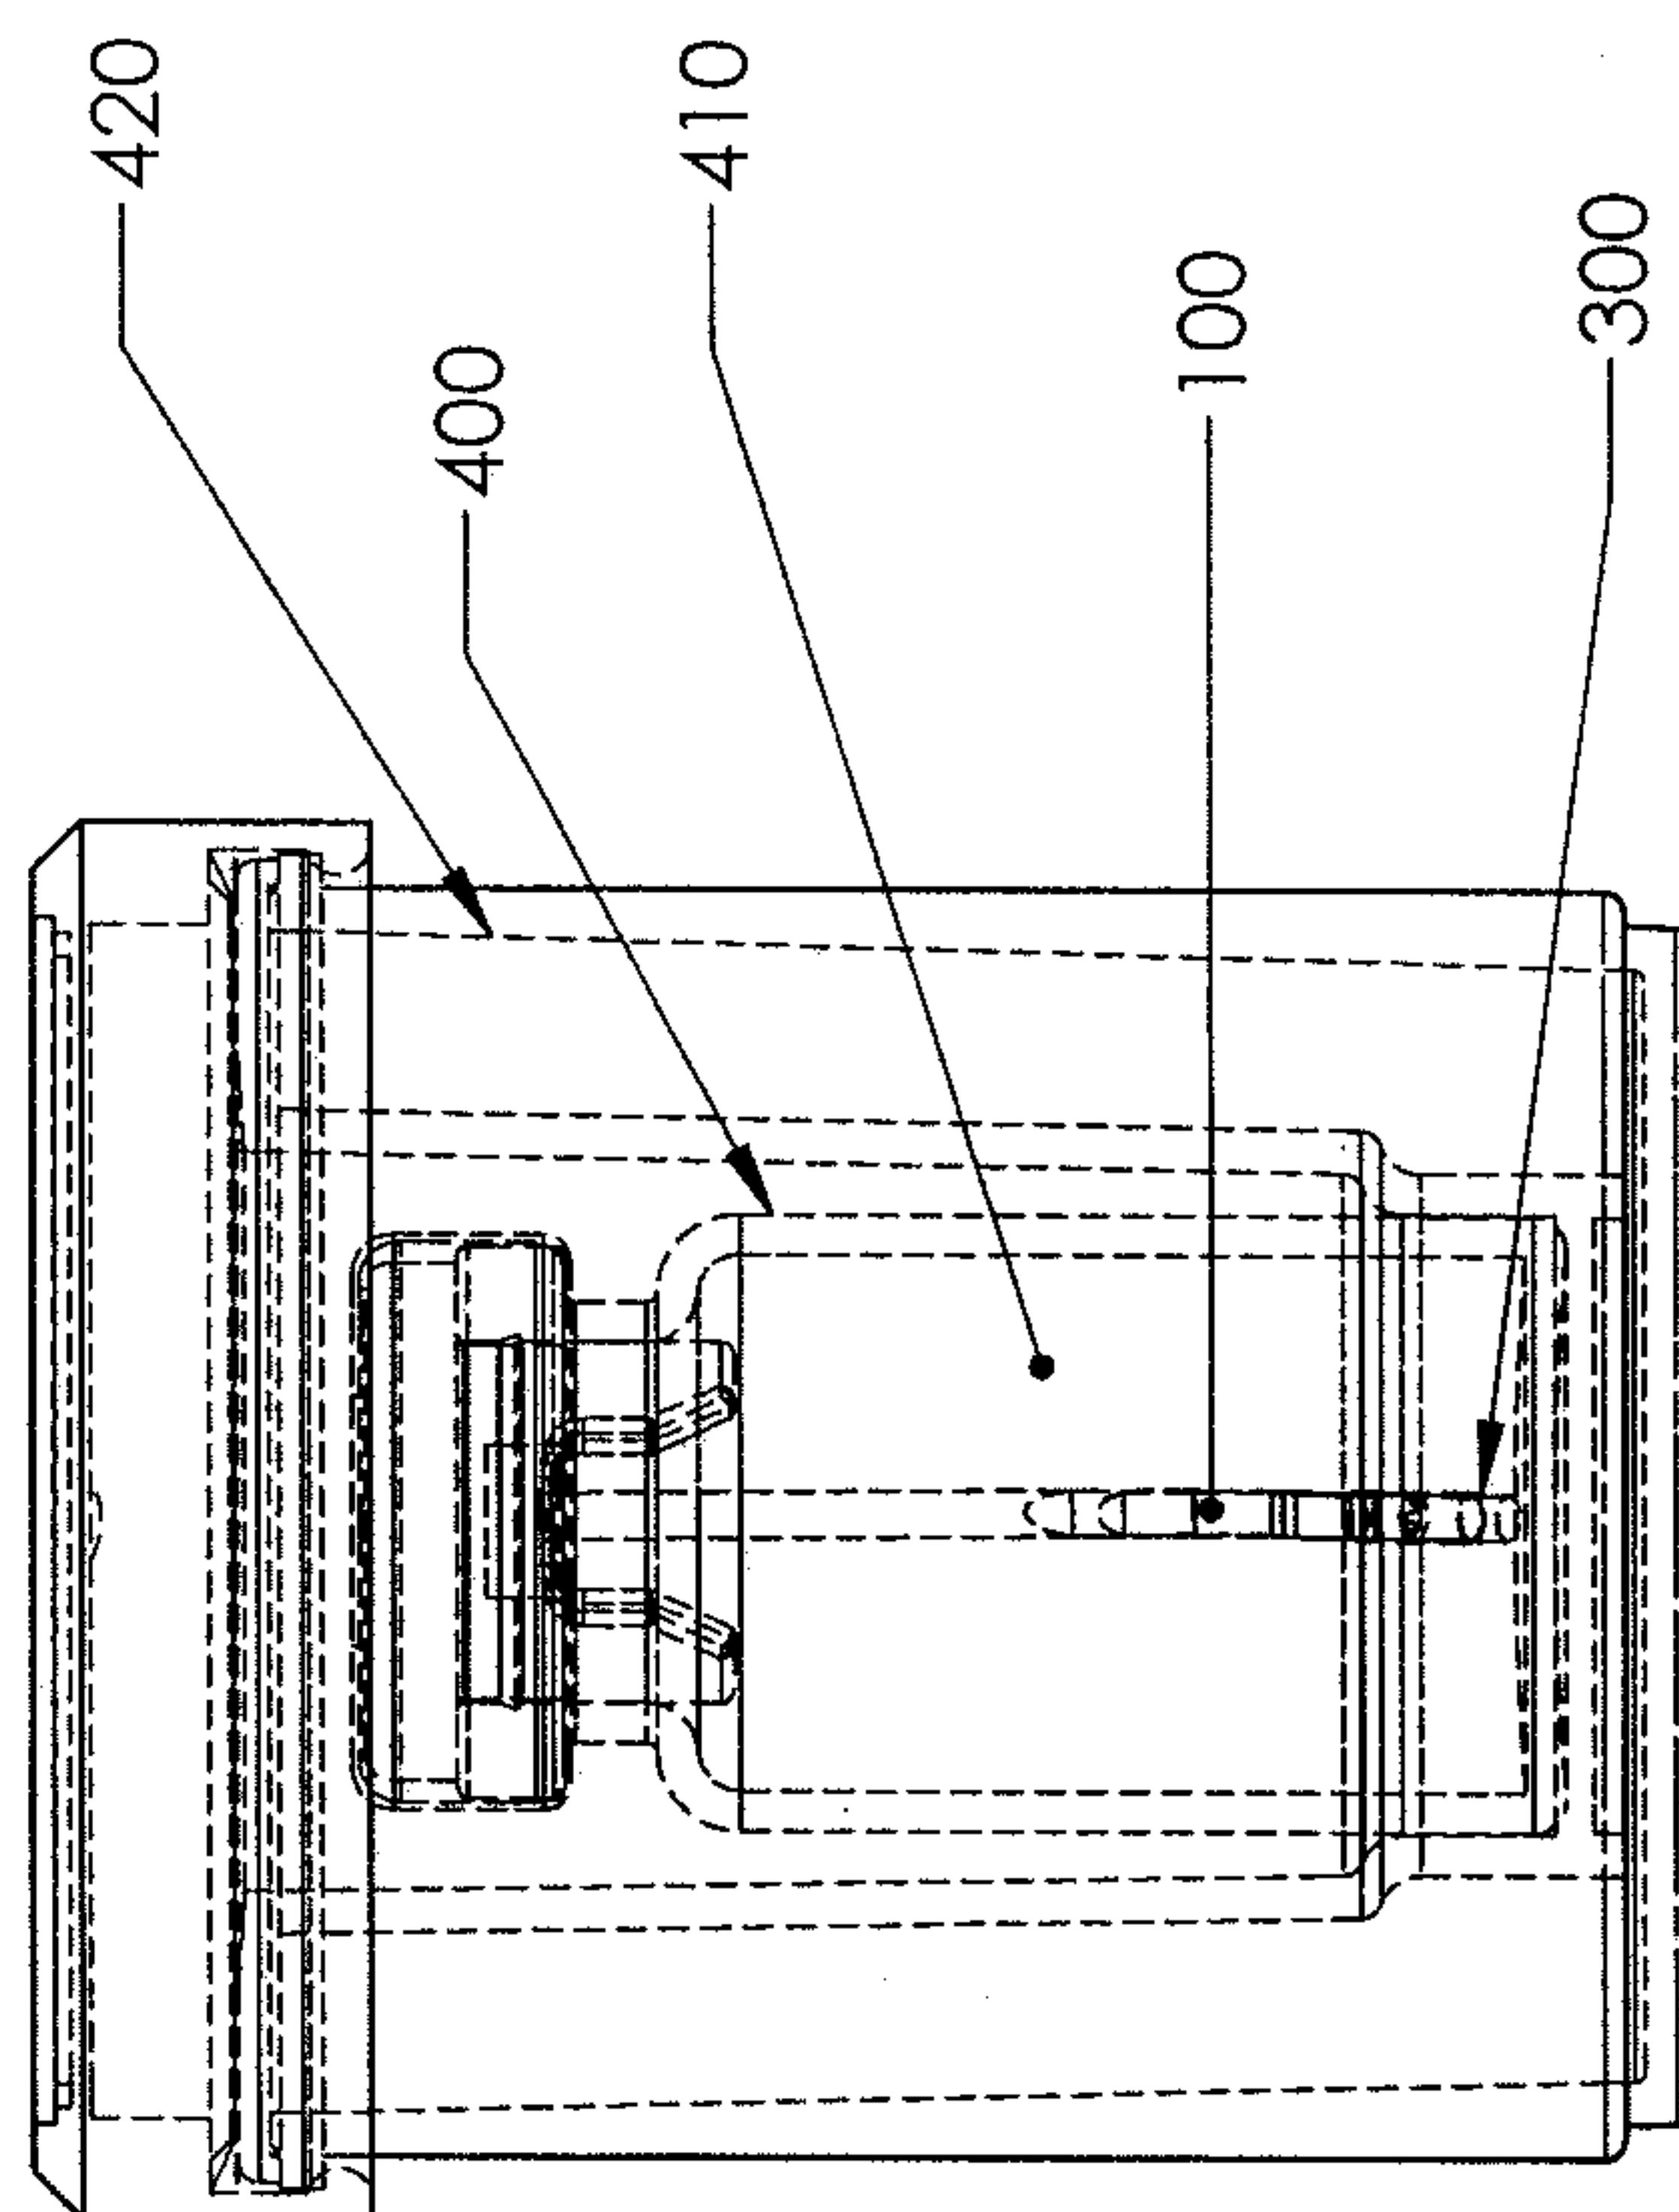
**FIGURE 6**

FIGURE 7





FIGURE 8





**FIGURE 9**

FIGURE 10

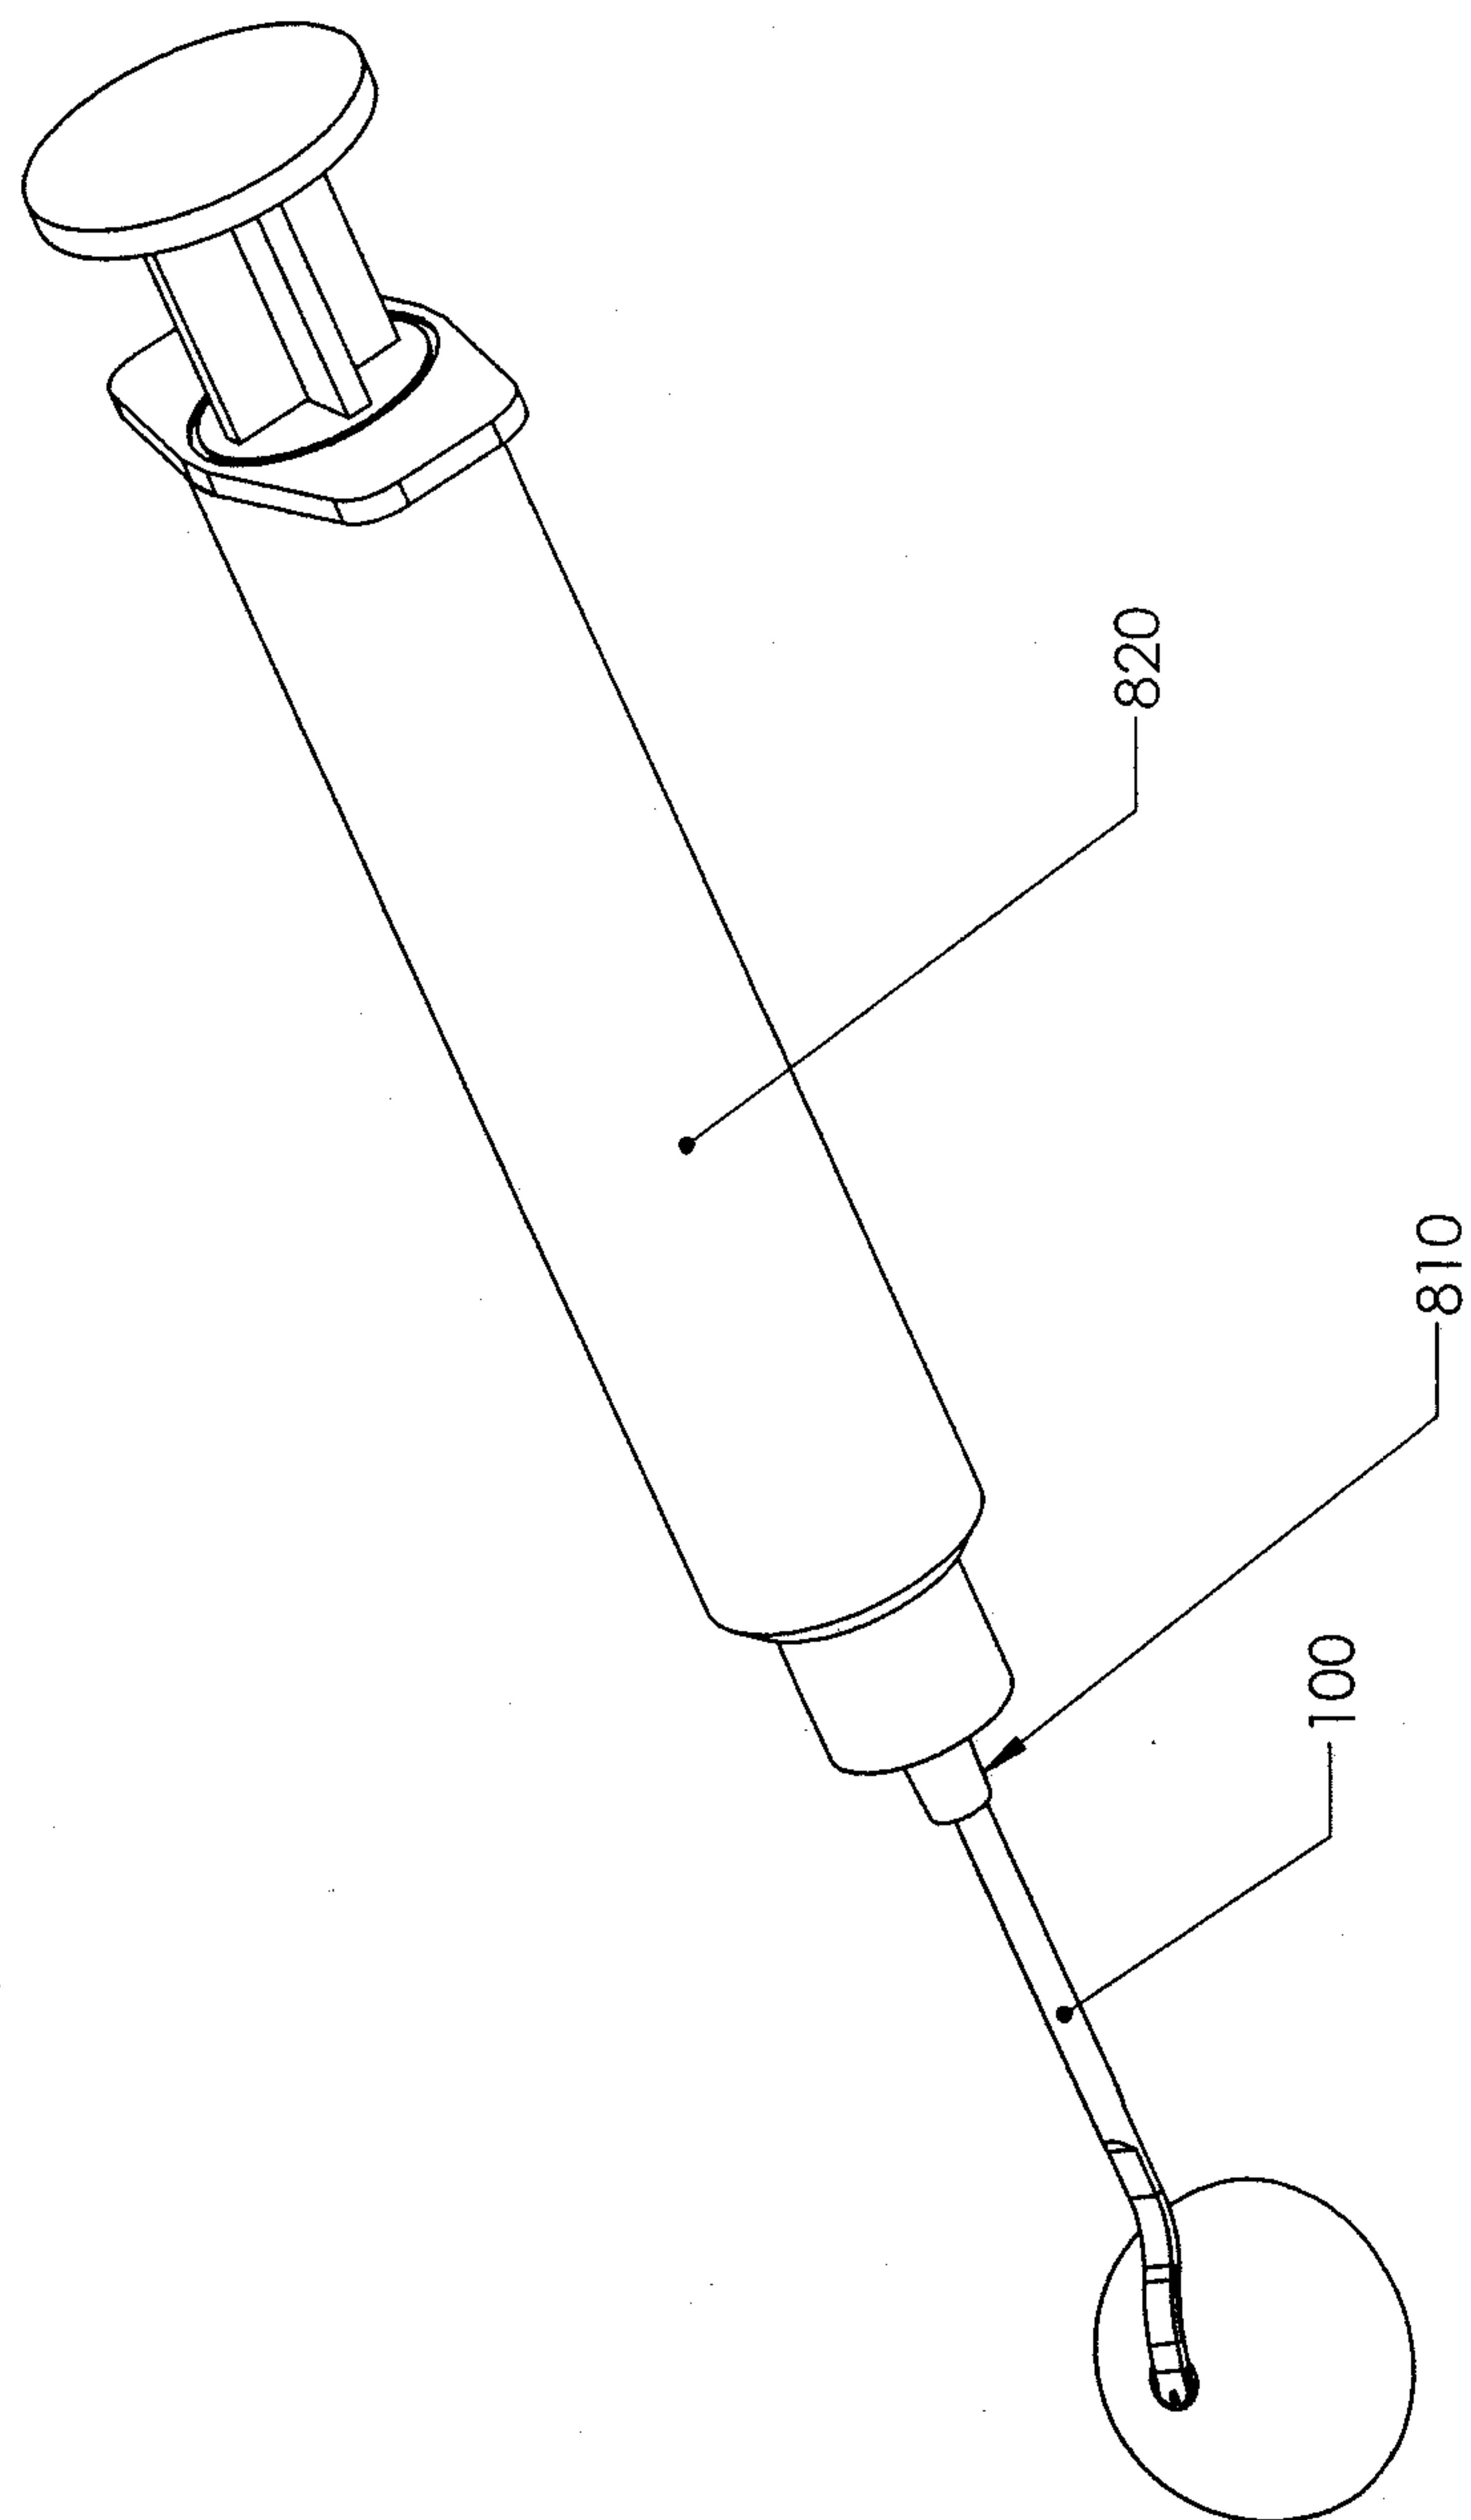

14 / 14

FIGURE 11

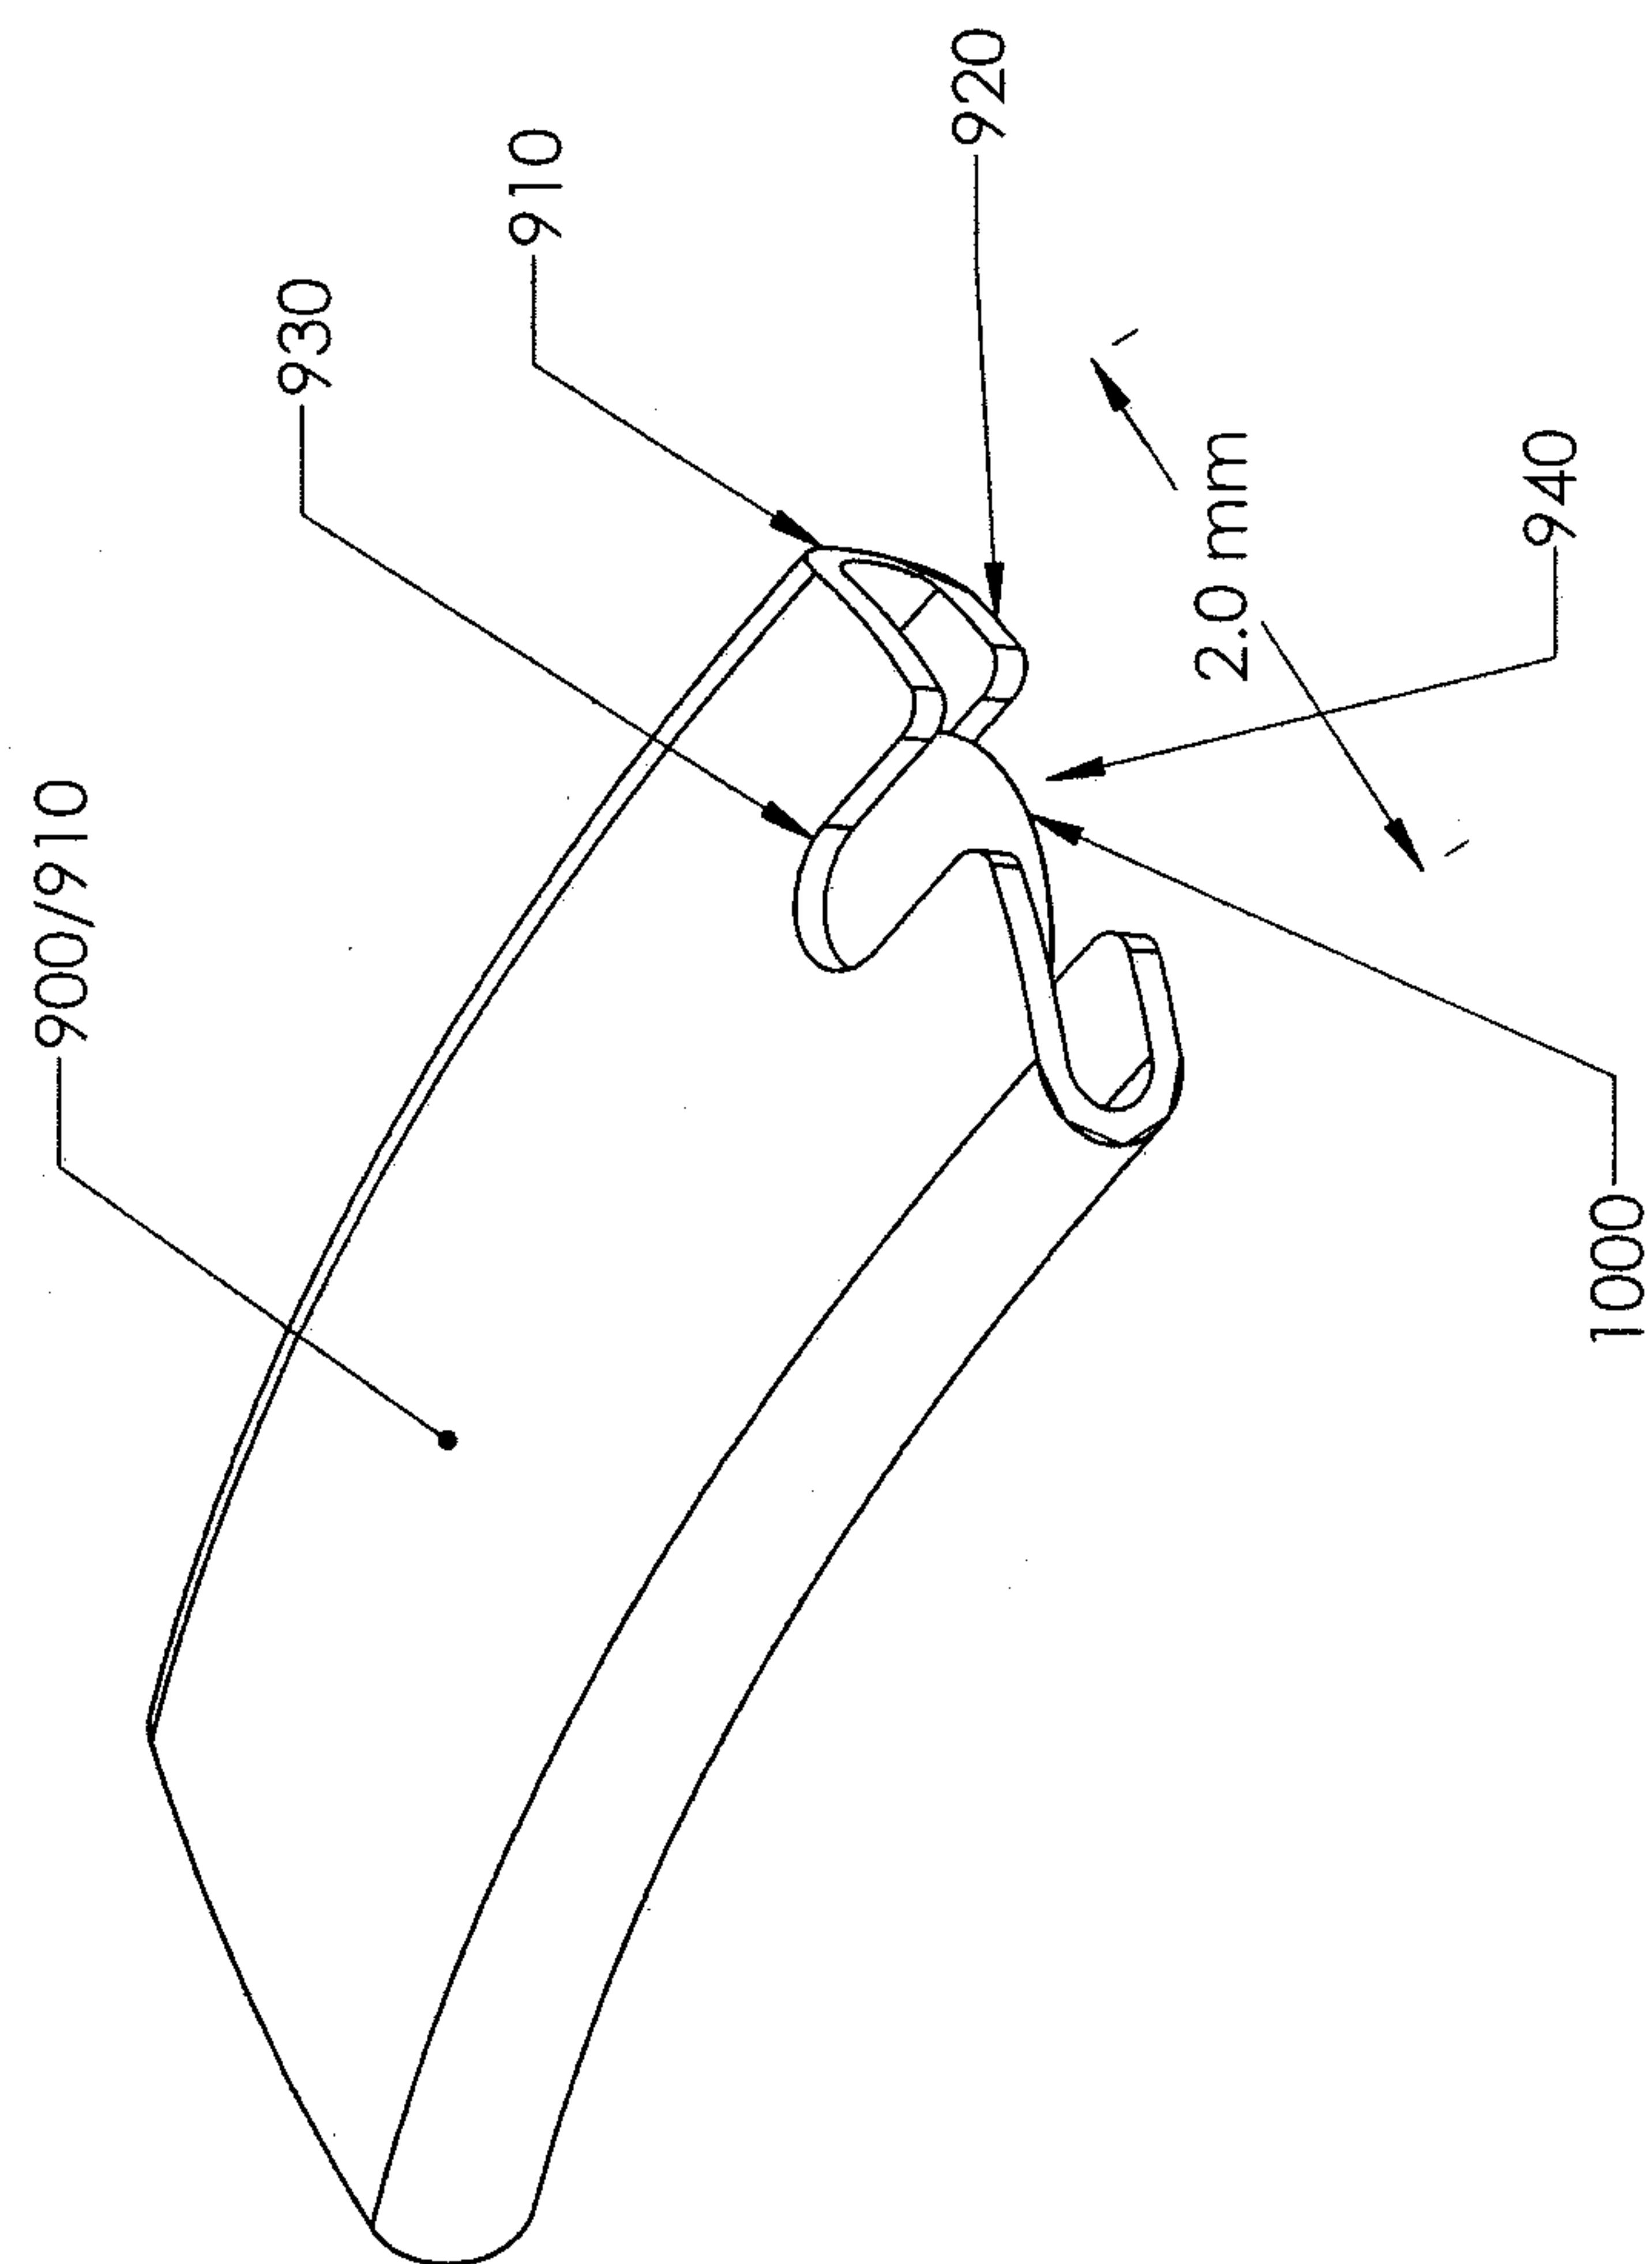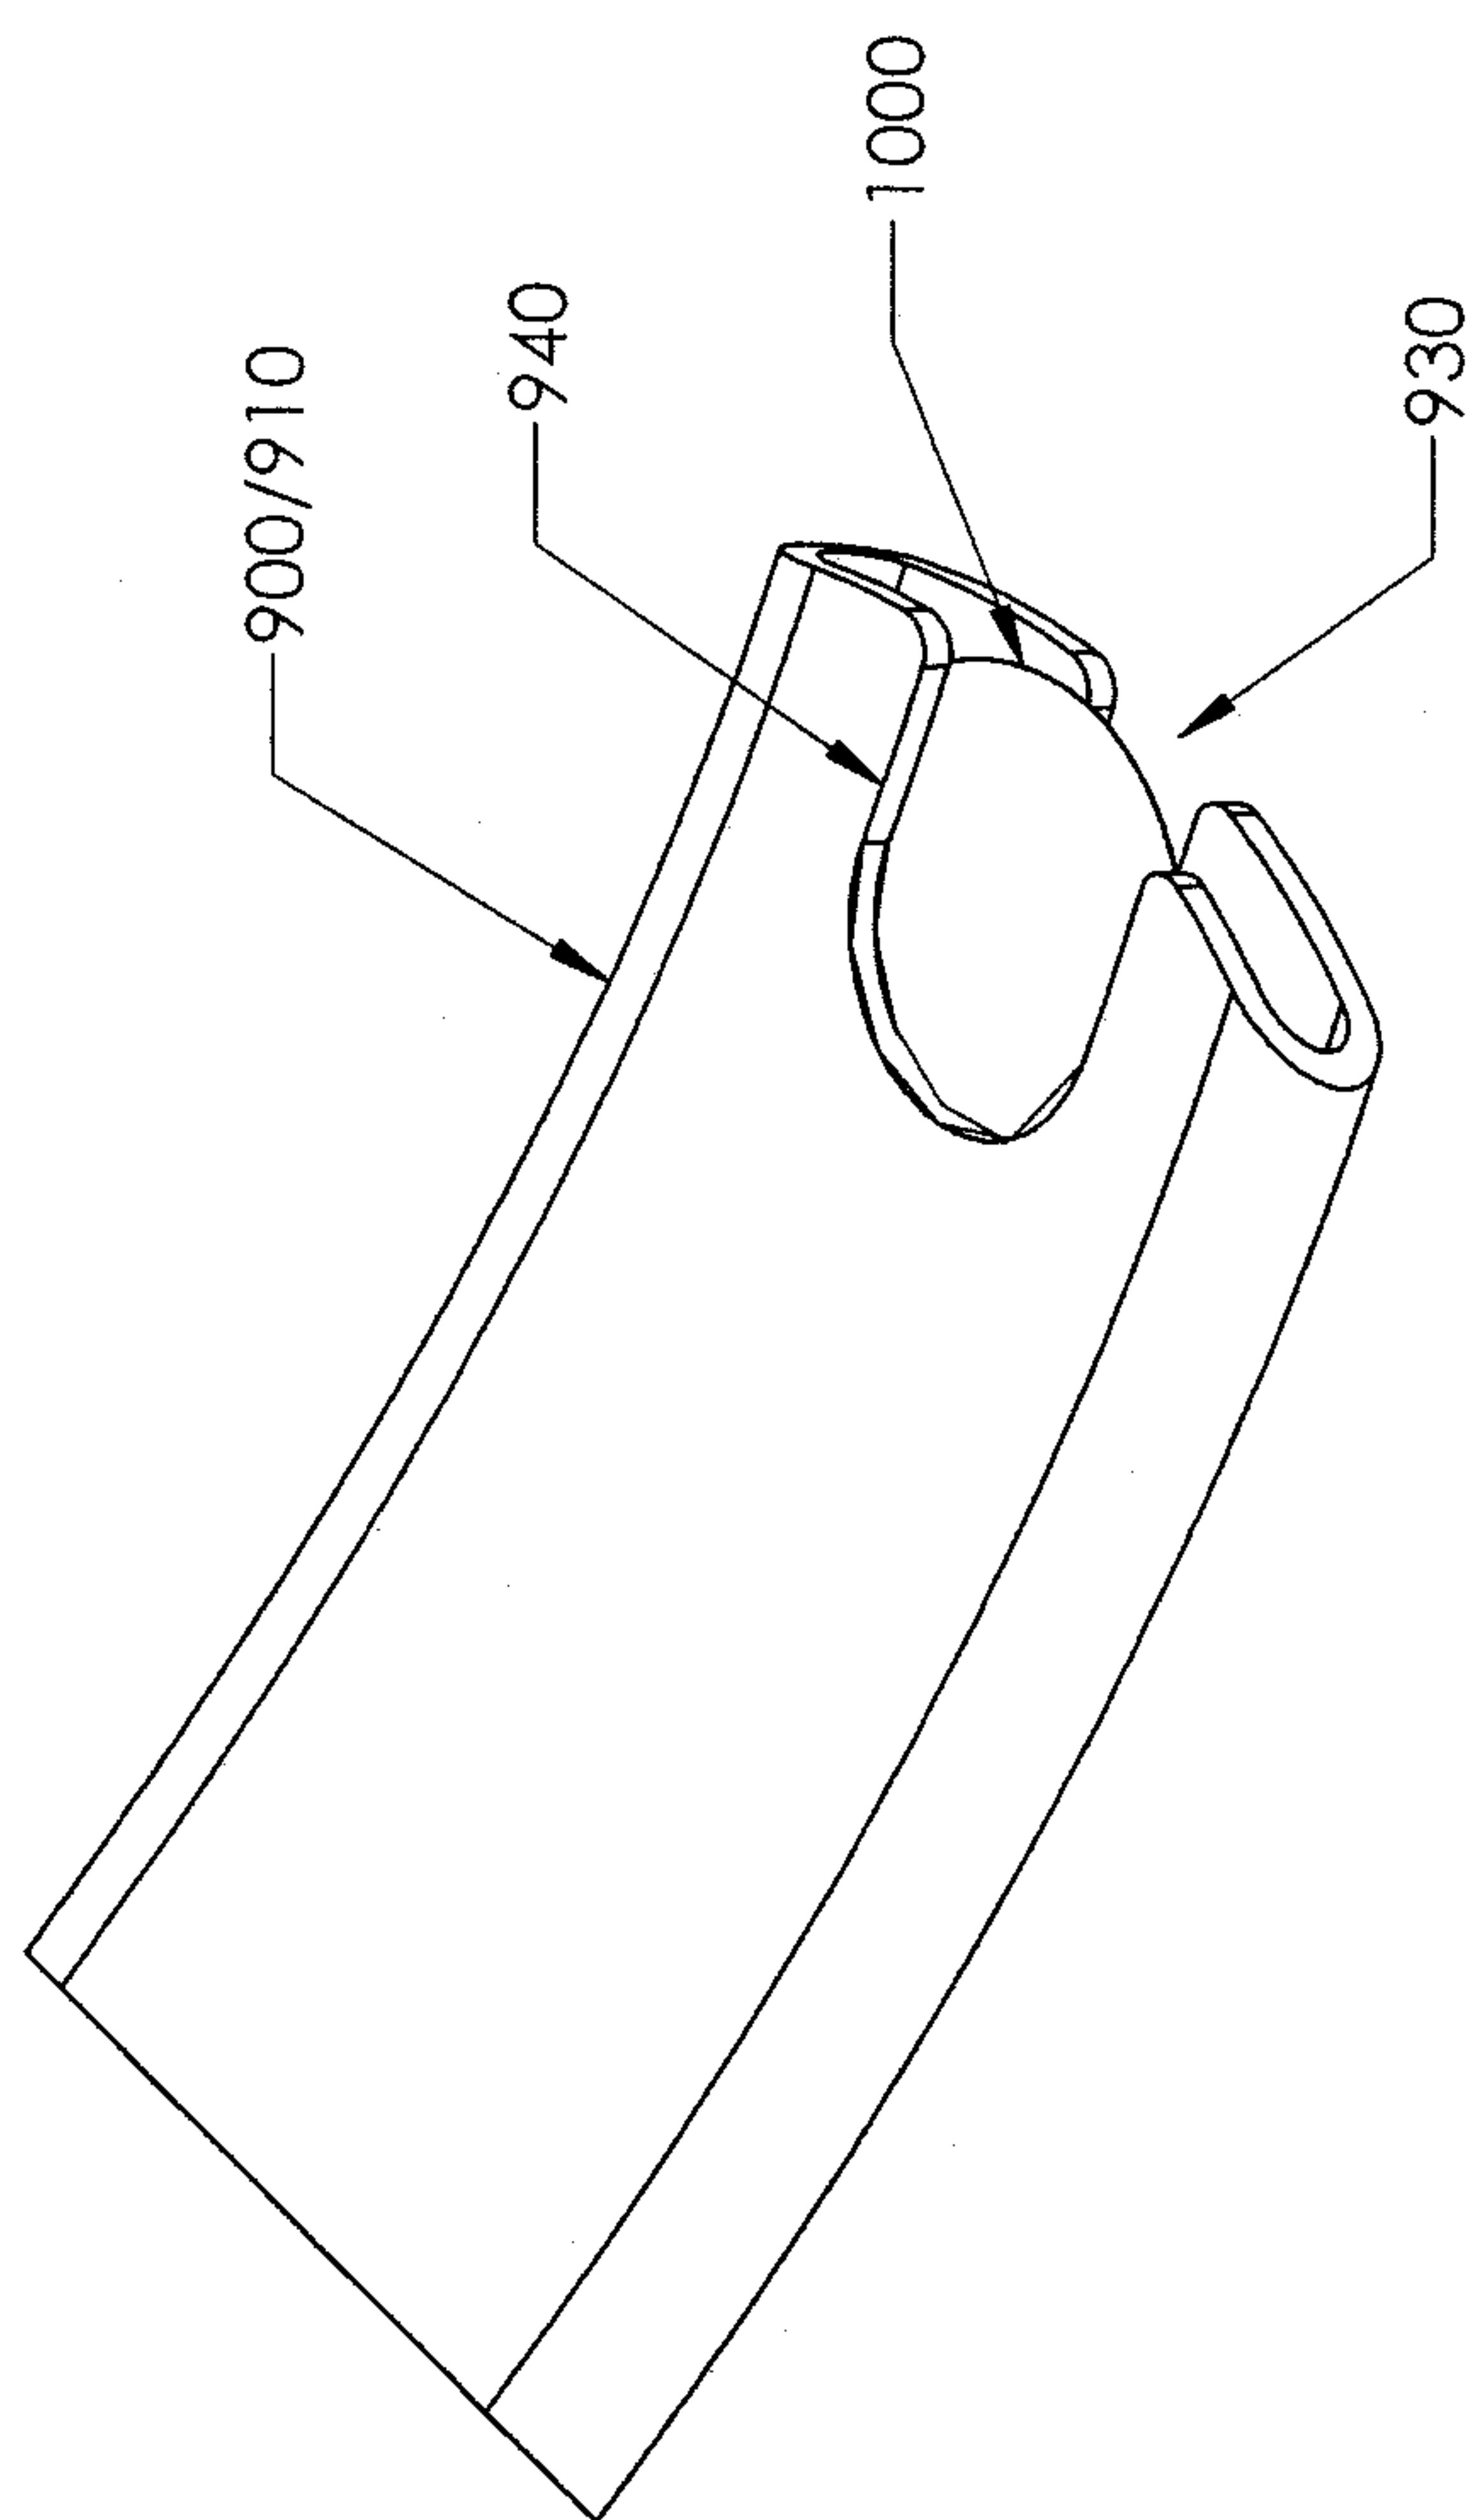