


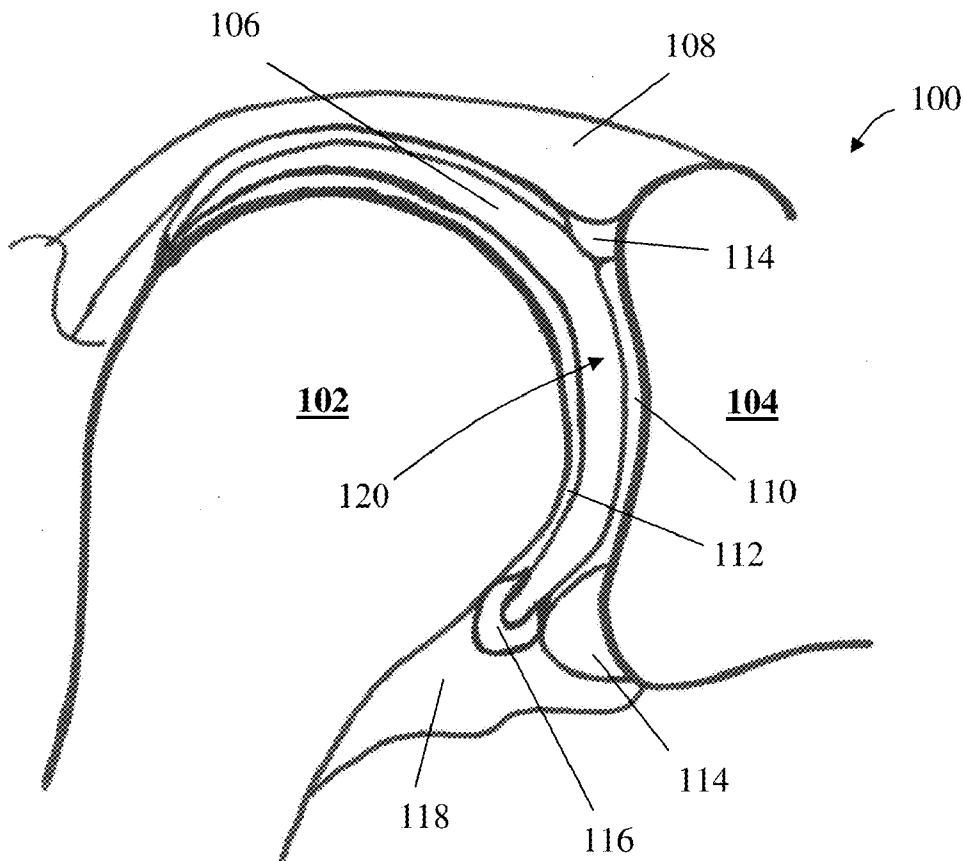

US 20130116794A1

(19) **United States**(12) **Patent Application Publication**
Shohat et al.(10) **Pub. No.: US 2013/0116794 A1**(43) **Pub. Date: May 9, 2013**(54) **SHOULDER IMPLANT****Publication Classification**(76) Inventors: **Shaul Shohat**, Kfar HaOranim (IL);
Assaf Dekel, Or Yehuda (IL); **Ronny**
Winshtein, Ramat-HaSharon (IL)(51) **Int. Cl.**
A61F 2/40 (2006.01)(52) **U.S. Cl.**
CPC **A61F 2/40** (2013.01)
USPC **623/19.11**(21) Appl. No.: **13/811,069**(22) PCT Filed: **Aug. 4, 2011**(86) PCT No.: **PCT/IL11/00637**§ 371 (c)(1),
(2), (4) Date: **Jan. 18, 2013****Related U.S. Application Data**(60) Provisional application No. 61/370,525, filed on Aug.
4, 2010.(57) **ABSTRACT**

Apparatus and method for a shoulder implant, for example, for the glenohumeral joint. Optionally, The implant is expandable and deflatable during implantation. Optionally the implant is sized for the gelnoid fossa. In an exemplary embodiment of the invention, the selection and/or implantation of the implant include adapting the implant by size and function to a particular patient's need.



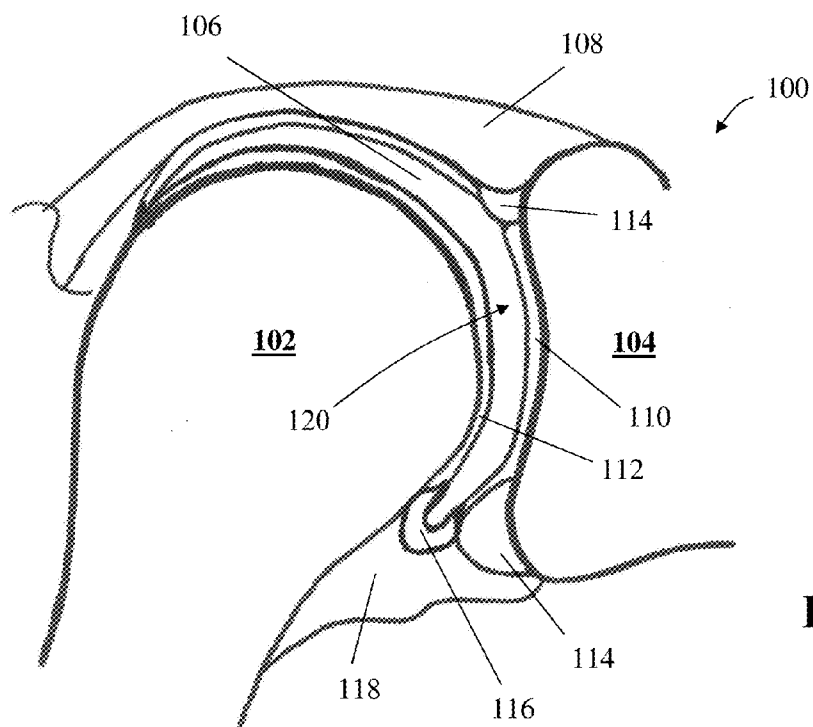


FIG. 1A

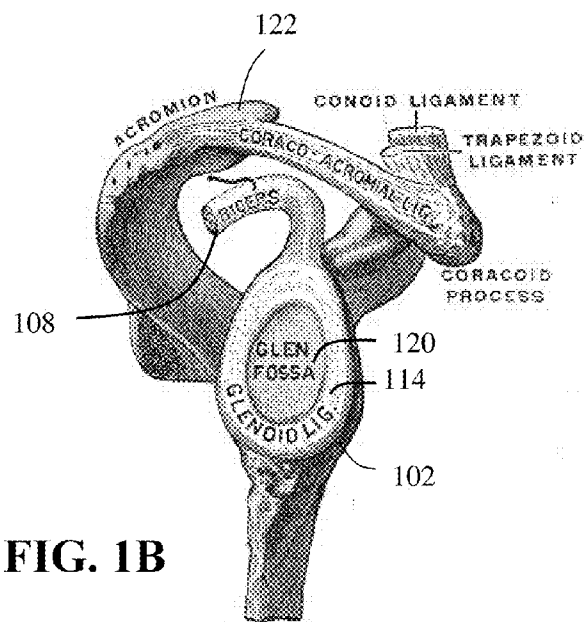


FIG. 1B

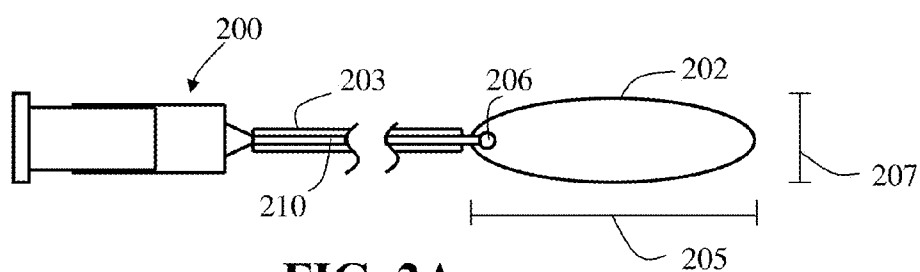


FIG. 2A

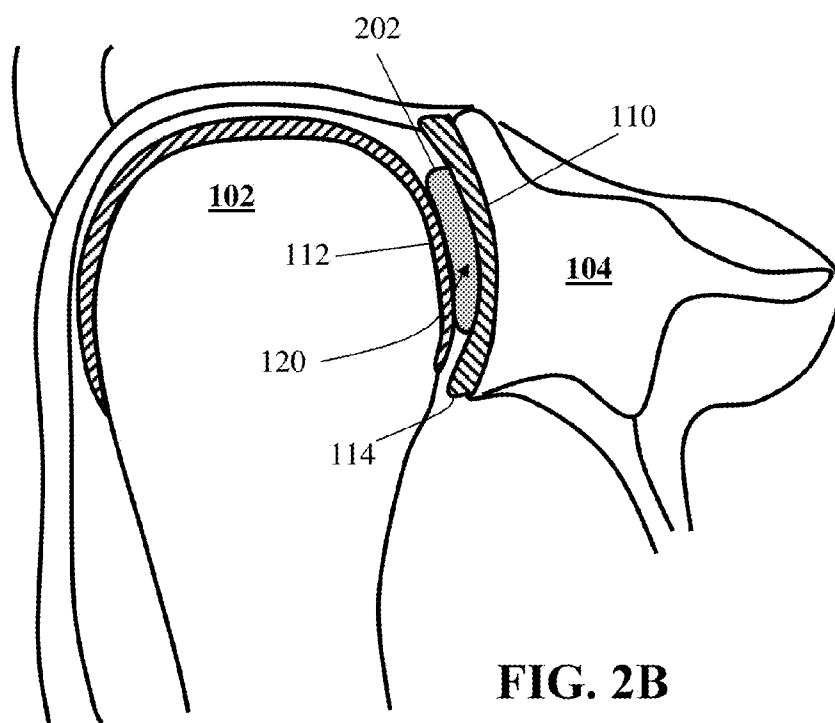


FIG. 2B

FIG. 3A

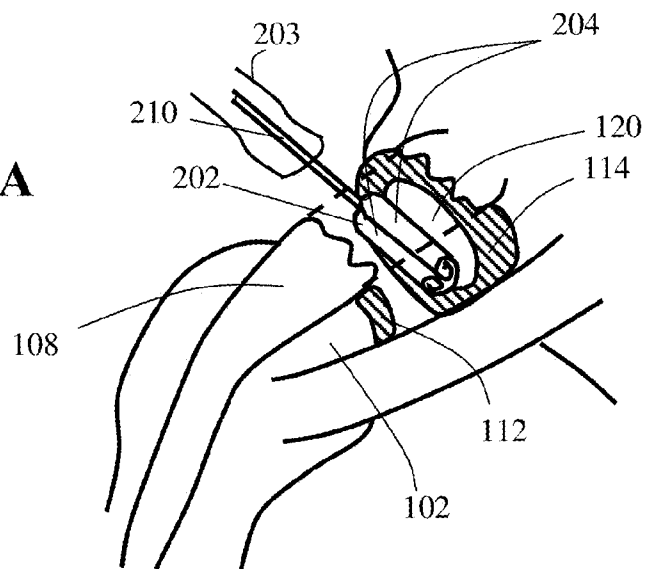


FIG. 3B

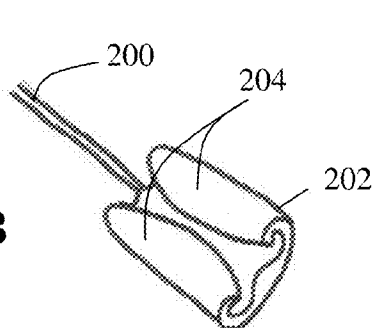



FIG. 3C



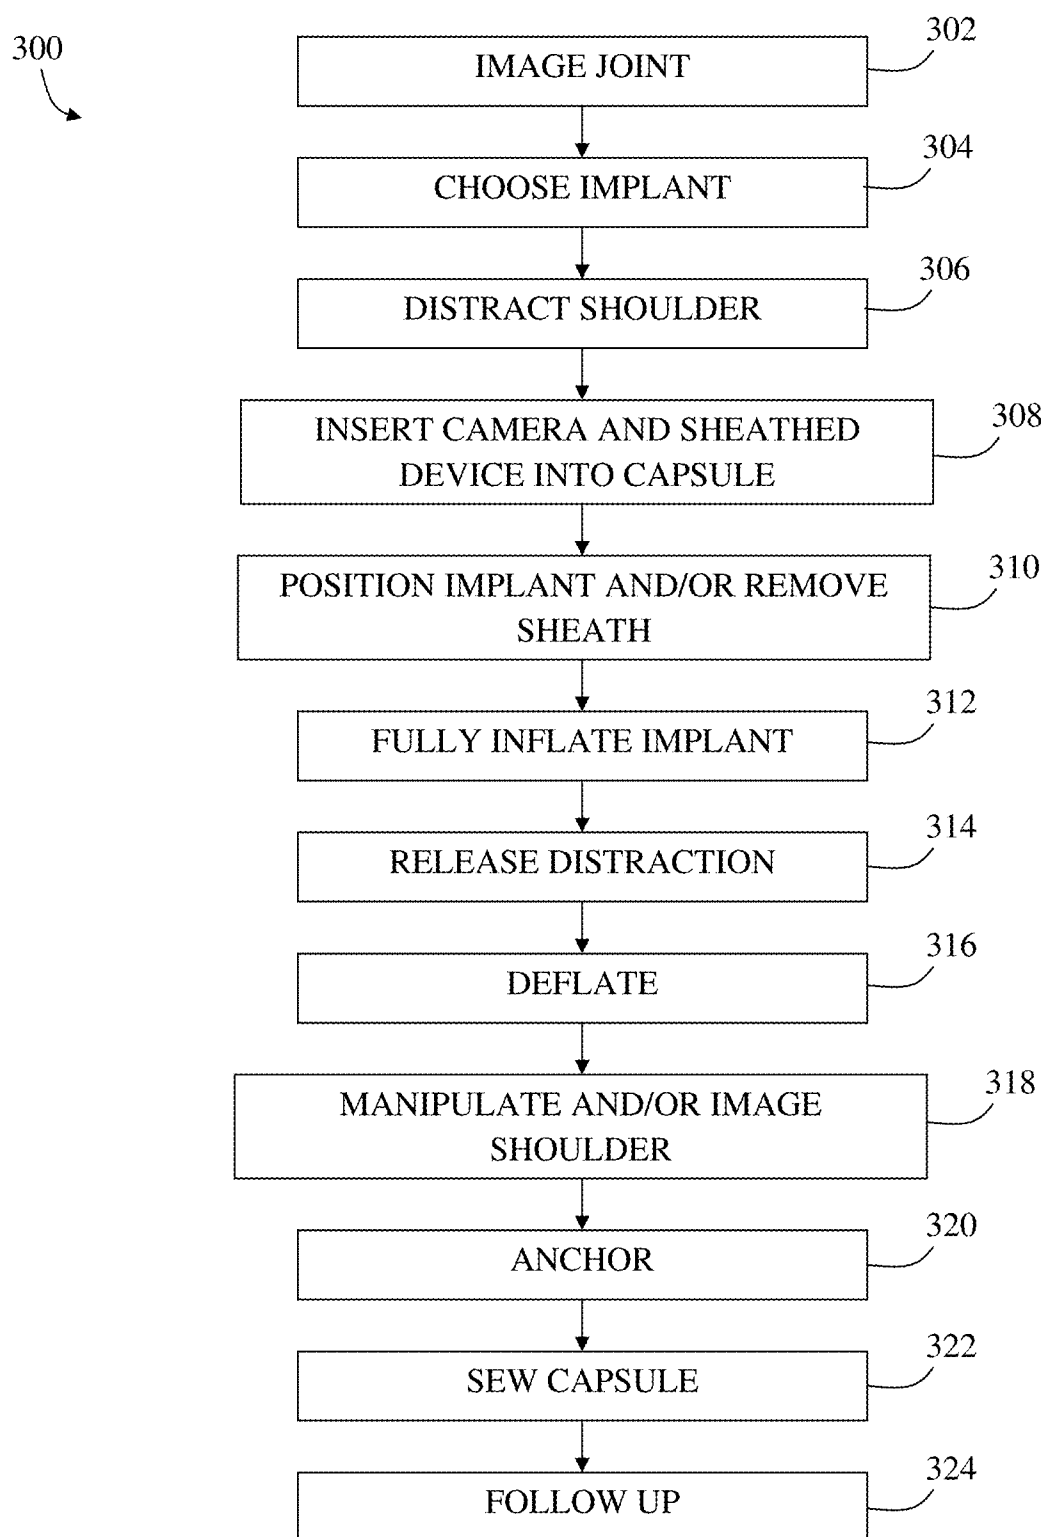
**FIG. 3D**

FIG. 4A

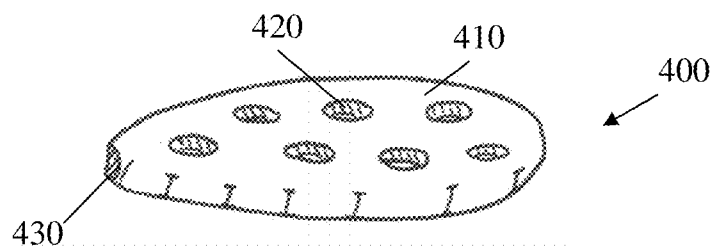


FIG. 4B

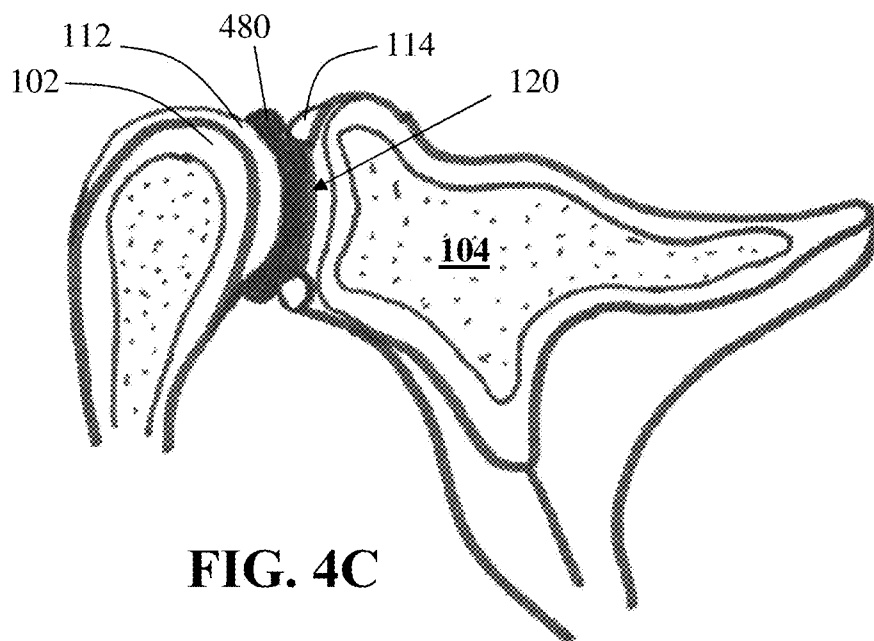
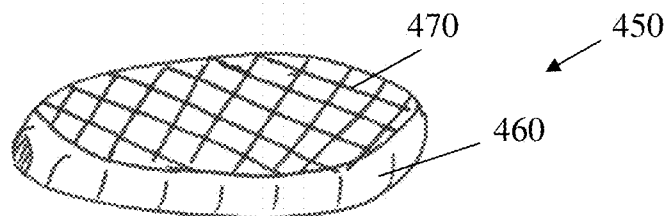


FIG. 4C

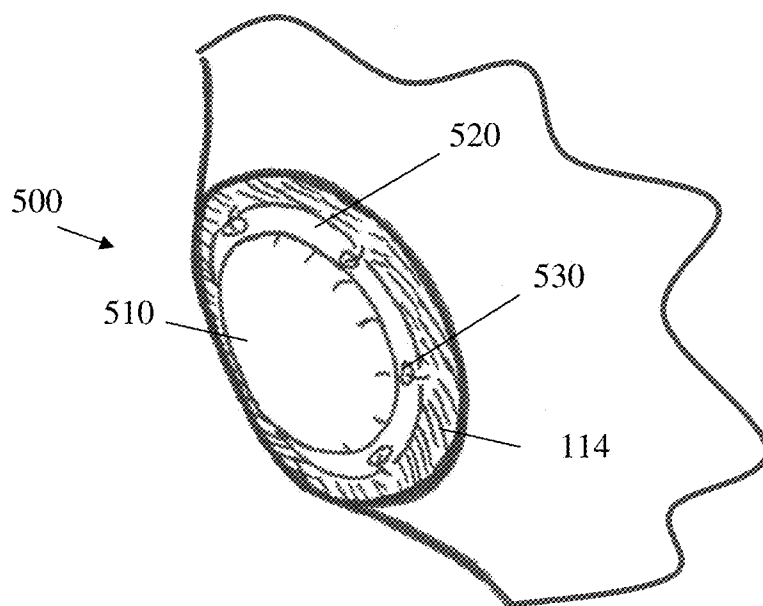


FIG. 5A

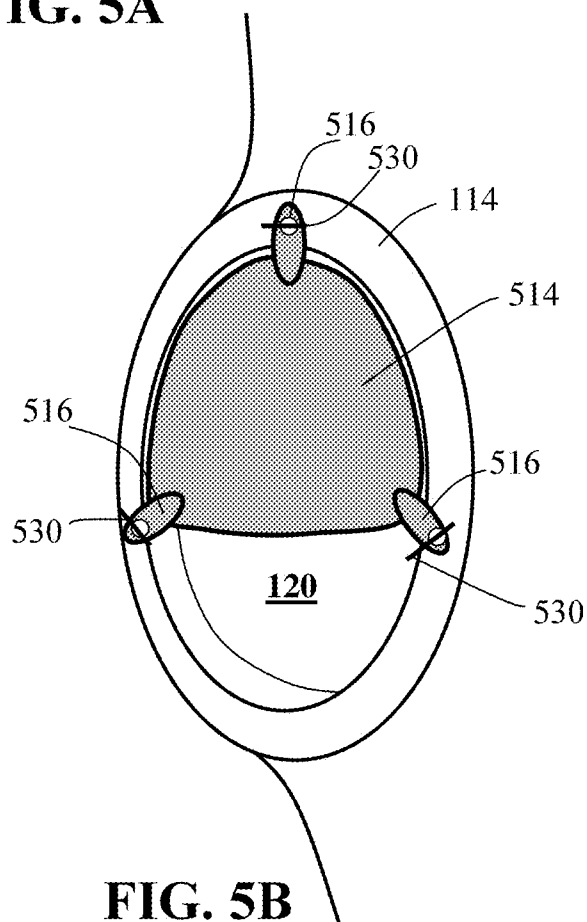


FIG. 5B

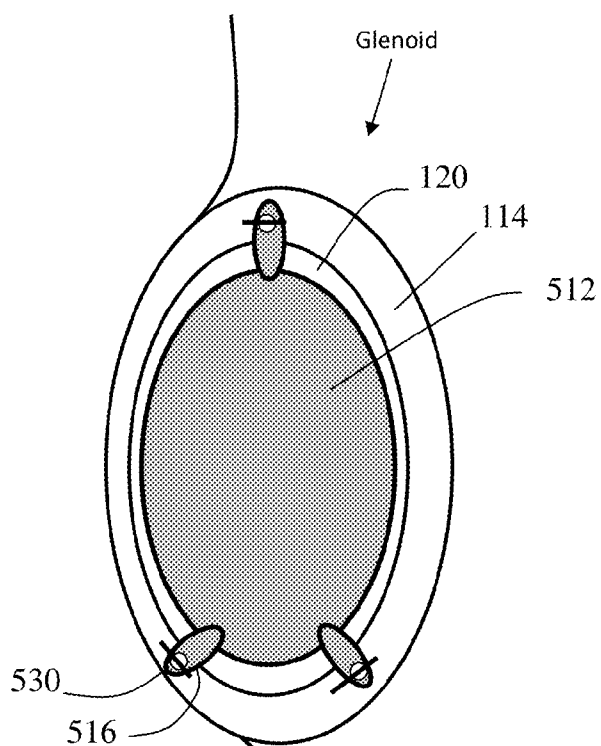


FIG. 5C

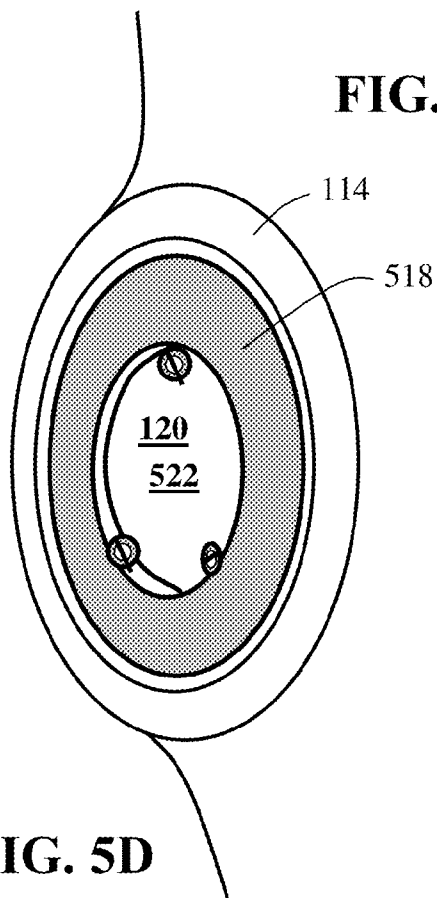


FIG. 5D

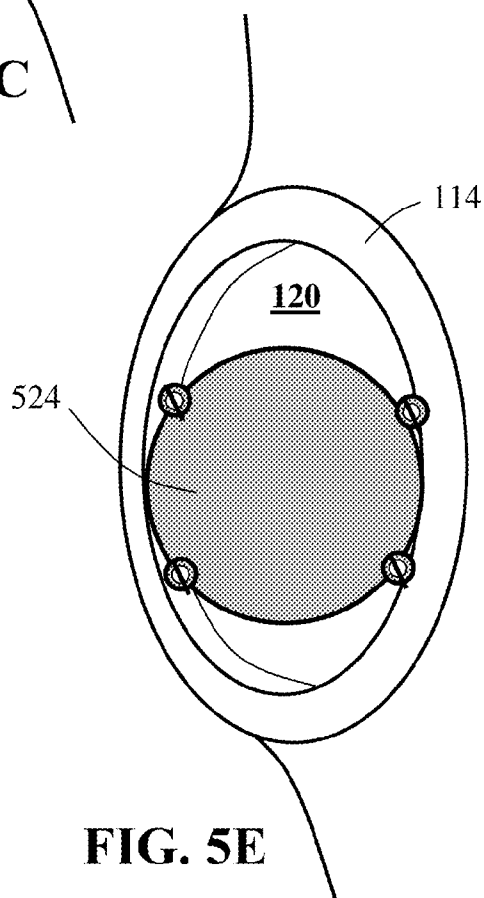
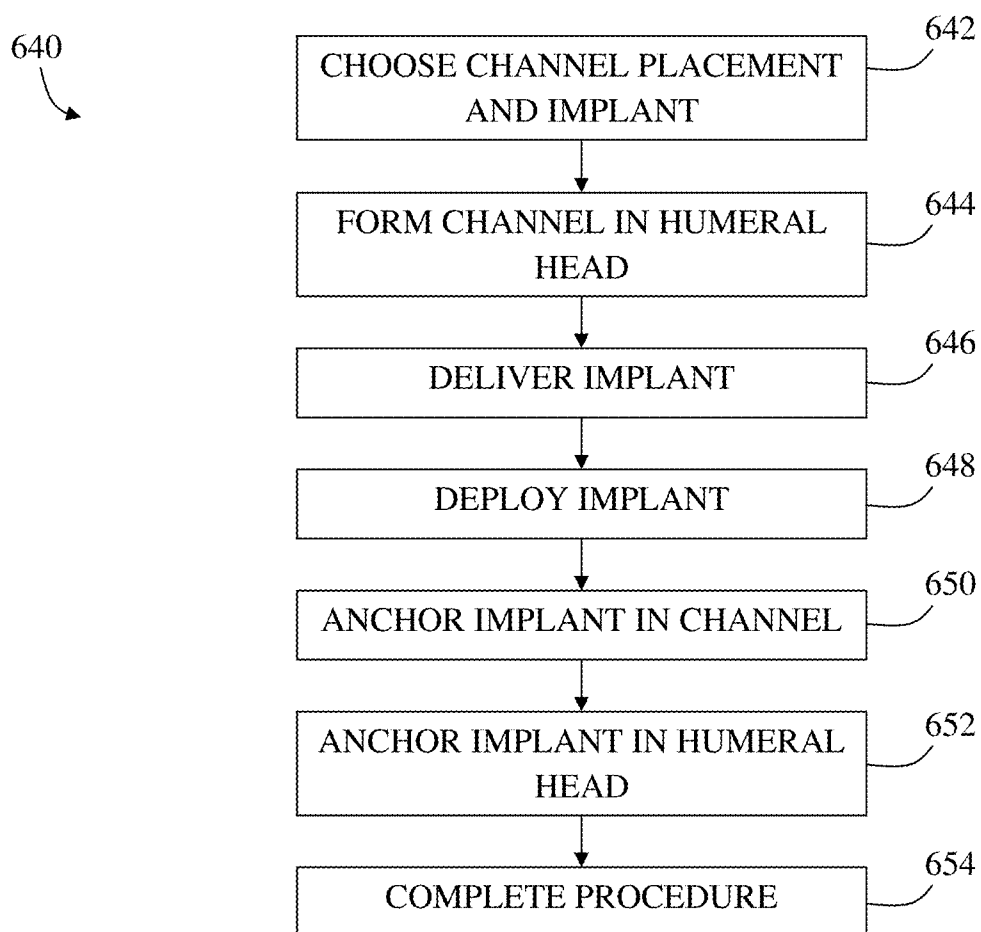


FIG. 5E

**FIG. 6A**

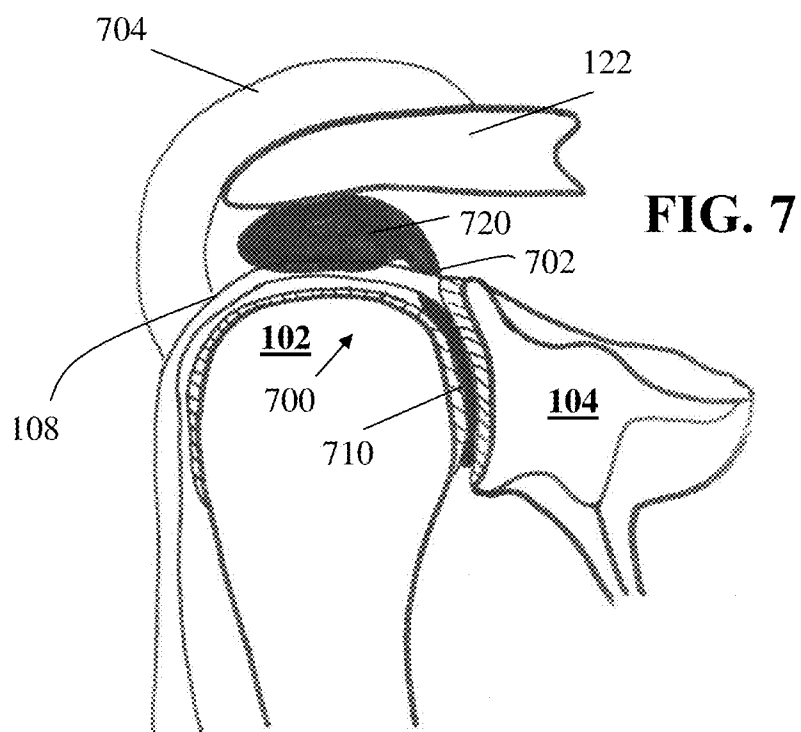
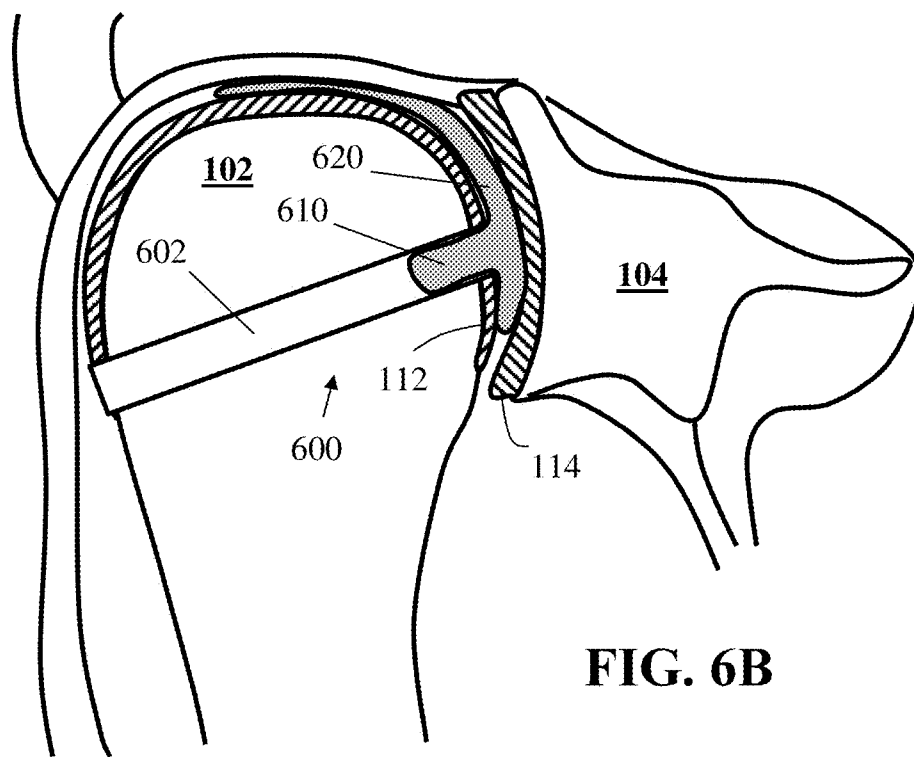


FIG. 8A

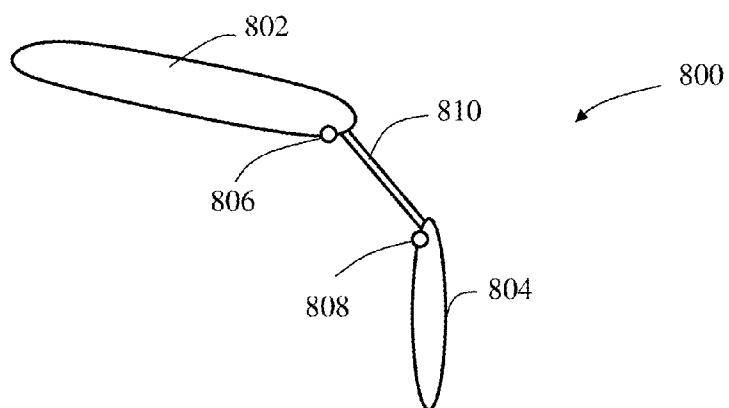


FIG. 8B

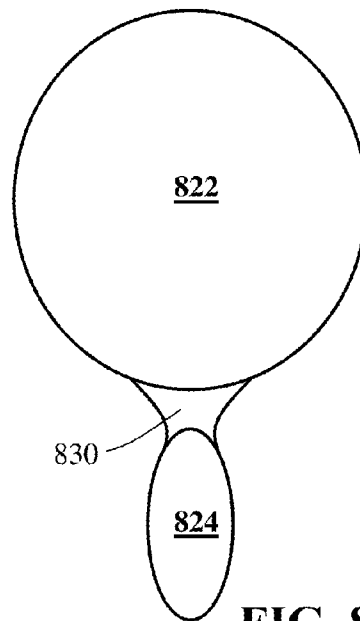
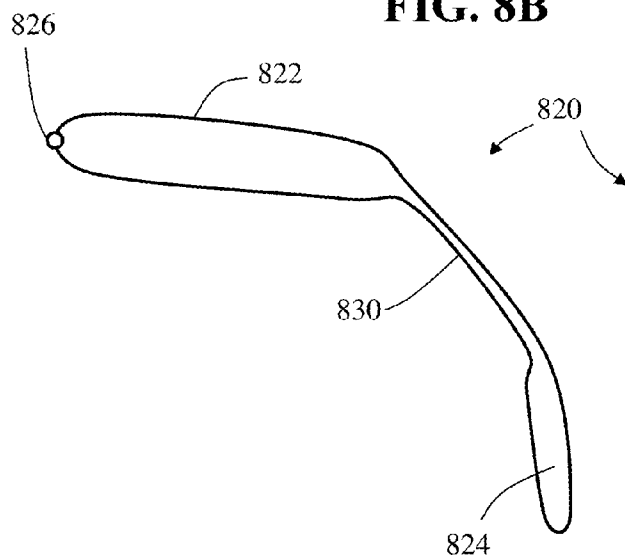


FIG. 8C

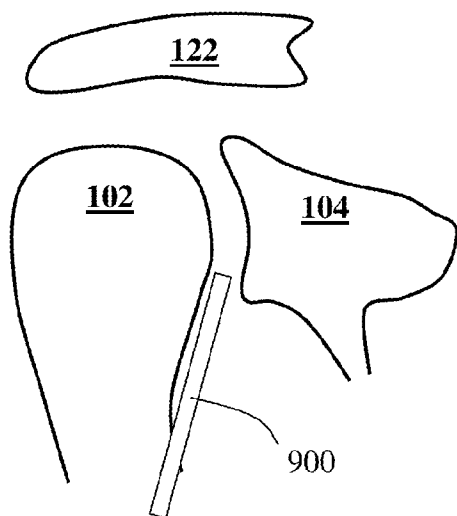


FIG. 9A

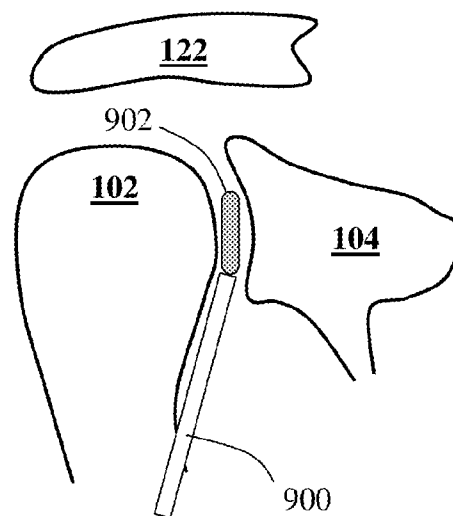


FIG. 9B

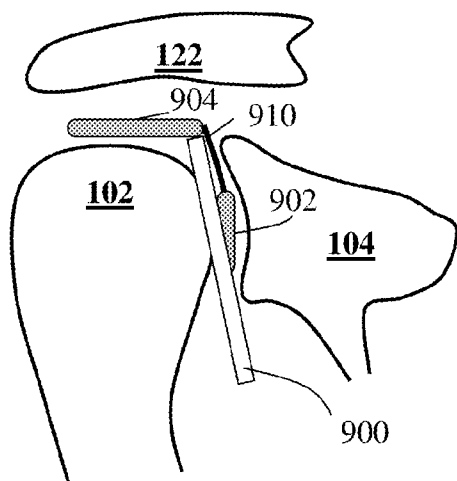


FIG. 9C

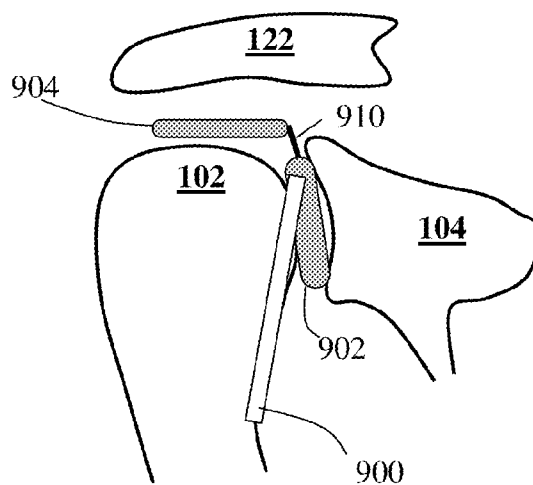


FIG. 9D

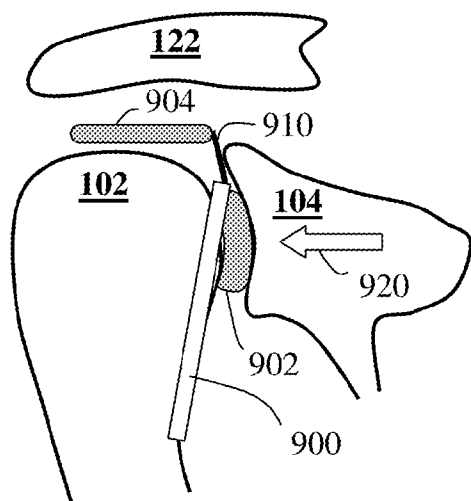


FIG. 9E

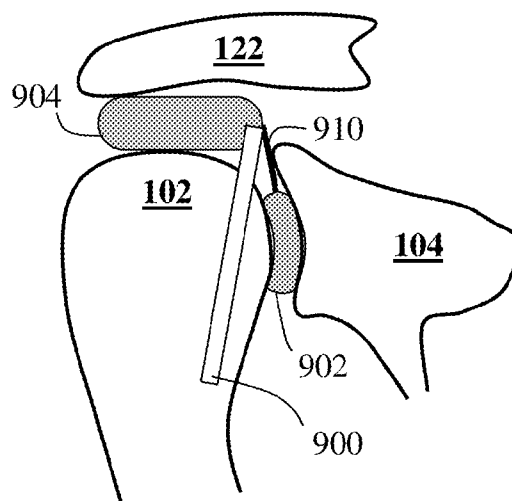


FIG. 9F

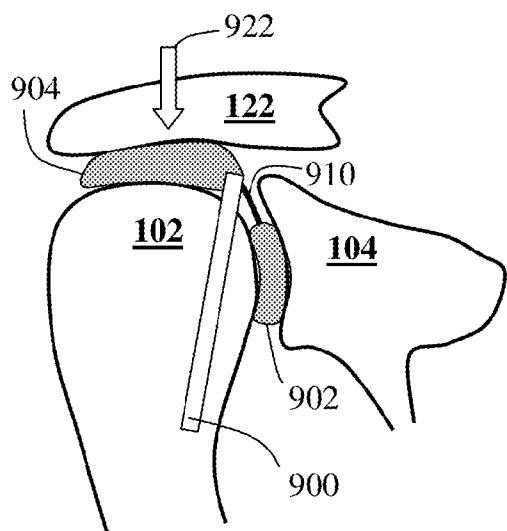


FIG. 9G

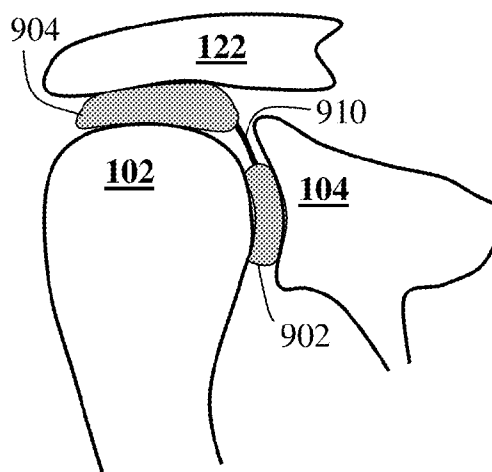
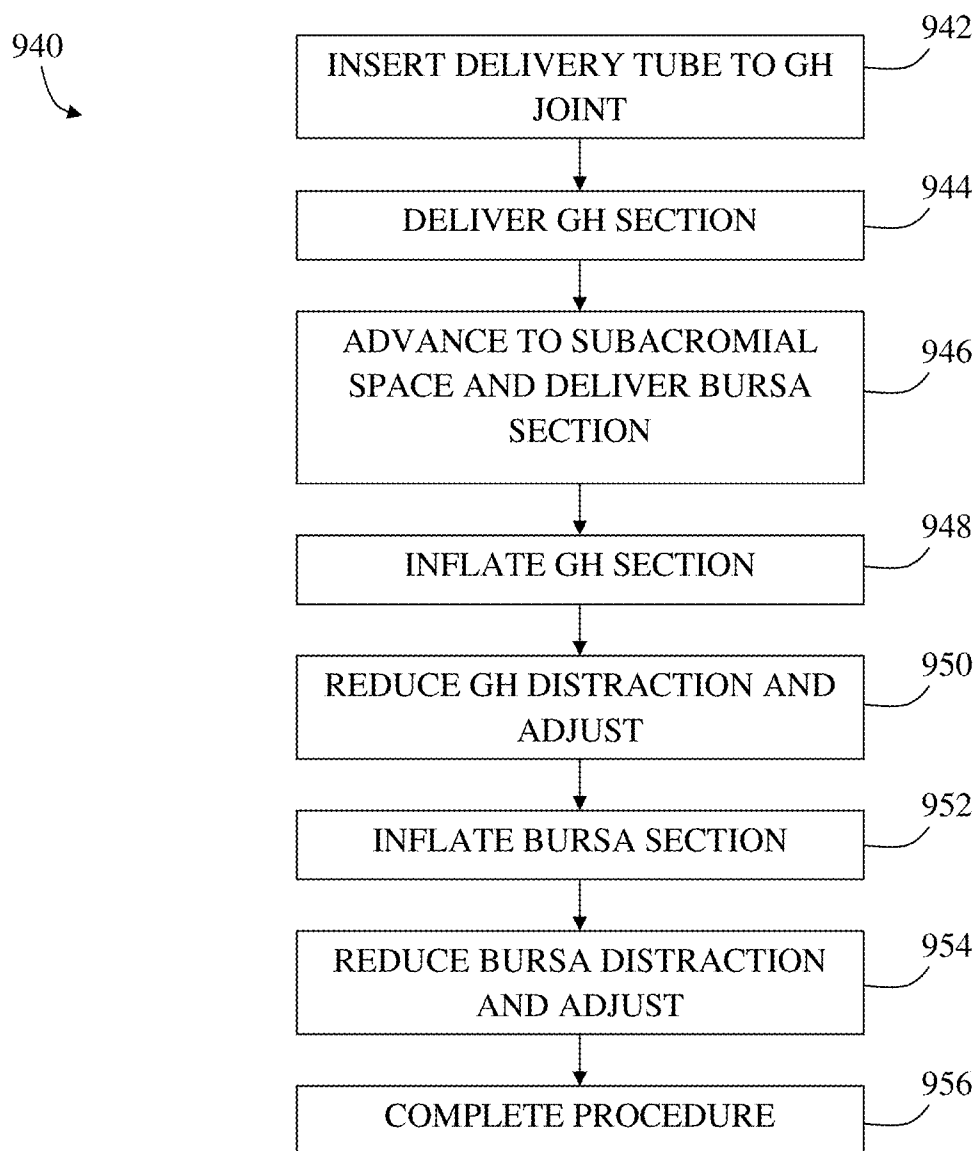


FIG. 9H

**FIG. 9I**

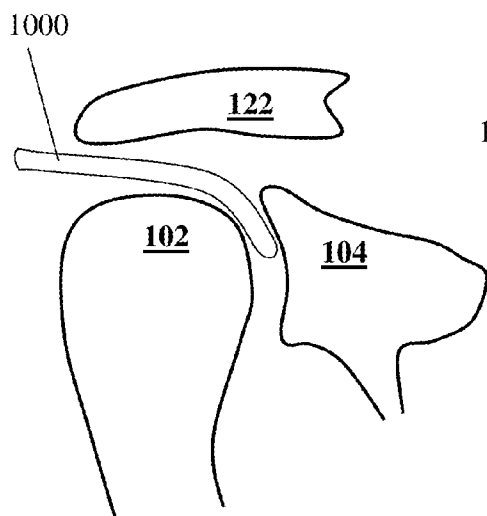


FIG. 10A

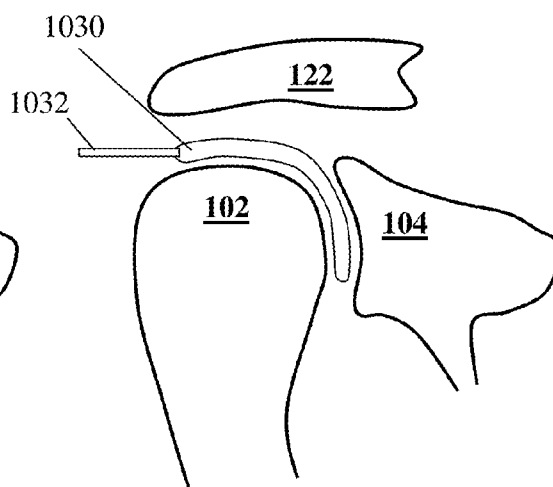


FIG. 10B

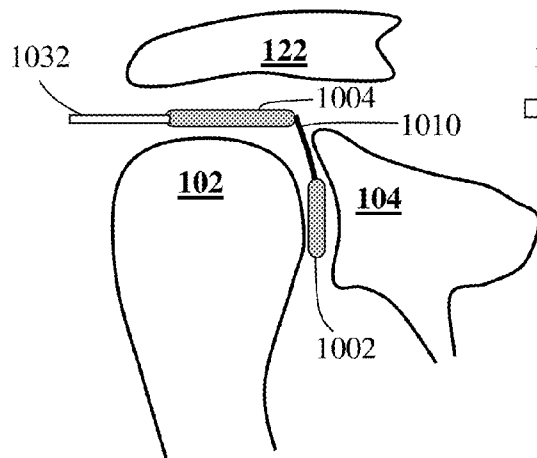


FIG. 10C

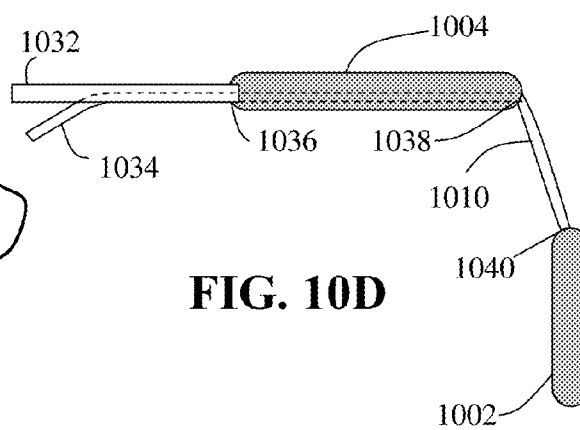


FIG. 10D

SHOULDER IMPLANT

RELATED APPLICATION/S

[0001] This application claims the benefit of priority under 35 USC 119(e) of a U.S. provisional application Ser. No. 61/370,525, filed Aug. 4, 2010 and having the title "SHOULDER IMPLANT".

[0002] The contents of the above document are incorporated by reference as if fully set forth herein.

FIELD OF THE INVENTION

[0003] The present invention generally relates to orthopaedic implants and related methods of treatment, for example, to methods and devices for preventing or treating glenohumeral joints disorders.

BACKGROUND OF THE INVENTION

[0004] The shoulder is a very unique joint in the human body having the greatest range of motion while being least stable than other large articular joints. FIGS. 1A-B show different aspects of a human shoulder joint anatomy. There are four separate joints that make up the shoulder; the main one is the glenohumeral joint formed by the humerus head or "ball" **102** and a socket on the scapula denoted as the glenoid **104**. The glenoid itself defines a glenoid fossa **120** which is very shallow and small (covering at most only a third of the humerus ball), also relative to other joints in the body, and fitting is accomplished by the presence of the glenoidal labrum **114**, a fibrocartilaginous rim attached around the margins of the glenoid fossa/cavity **120** which substantially deepens the glenoid cavity and protects the edges of the bone. The labrum is triangular-like in cross section with its base fixed to the circumference of the cavity. Articular cartilage **110** covers the end extension of the humerus ball (as well as, **112**, in the glenoid cavity), a thin layer of a slippery material having a stiff rubbery consistency, mainly serving as a shock absorber (or cushion) and provides an exceptionally smooth surface for an easy relative motion between the ball and socket members. In one aspect the glenohumeral joint differs from the hip joint (the second ball-and-socket type joint in the human body) by the fact that the articular cartilage is substantially thinner and the shocks and impulses and forces applied to it have different amplitudes and different temporal profiles. The glenohumeral joint is maintained in-place by a joint capsule **118** formed by a group of enveloping ligaments. The synovial membrane **116**, or synovium, is the inner layer or lining of the joint capsule. It is composed of connective tissue, and secretes a lubricating fluid named synovial, a viscous non-Newtonian fluid which reduces friction to facilitate motion between the joint members in a synovial cavity **106**.

[0005] The unique combination and correlating configuration of the glenohumeral joint members, namely the capsule, the cartilage and the synovium, allows these incomparable characteristics of the shoulder with respect to other articular joints in the human body. Any disorder of at least one of the joint members may cause dysfunction and at least severe discomfort and pain sensation to the patient. A common disorder is the glenohumeral joint osteoarthritis, or degenerative joint disease, where the cartilage gradually thinned and eventually completely worn out. Besides osteoarthritis, which is the most common type of arthritis, there are also other related illnesses such as rheumatoid arthritis. Synovium can also become irritated and thickened in conditions such as rheuma-

toid arthritis. Adhesive capsulitis, also known as "frozen shoulder", is a disorder in which the shoulder capsule becomes inflamed and stiff, greatly restricting motion and causing chronic pain. Frozen shoulder may be caused by trauma or injury, and probably involves an autoimmune component and/or indicated in lack of synovial fluid.

[0006] The more severe cases of glenohumeral joint disorders are usually treated with surgical intervention known as shoulder arthroplasty, in which the glenohumeral joint or only the humerus head is partially or completely removed and replaced with prosthesis. Arthroscopic introduction of healing regenerative substances and matrixes (such as the Graft-jacket®, an acellular dermal matrix allograft manufactured by Wright Medical Group, Inc.) was also tested and found efficient in some cases.

[0007] The following examples describe several initiatives to treat general articular joints disorders, though not specifically specified or adapted for the shoulder glenohumeral joint.

[0008] European patent publication number 0507645 to Bouvet, the disclosure of which is fully incorporated herein by reference, describes an implant comprising a leak tight envelope made of a flexible, non-elastic material and a fluid incompressibly filling up the envelope, the envelope is capable of being interposed between the two parts of a joint which are to move with respect to each other, and it is in contact with both these parts. According to this document, the implant is intended for reducing production of particles due to wear of joint prostheses after full or partial arthroplasty. Its incompressible character is especially intended for maintaining the two parts of the joint (for example, the "ball" and "socket" members) at a constant distance while allowing natural joint movements without friction of the surfaces in contact. The proposed exemplary embodiment was focused on the coxo-femoral or "hip" joint, which, it should be noted, is mechanically, anatomically, medically and functionally different from the shoulder joint.

[0009] U.S. patent application Ser. No. 10/865,238 to Ku et al., the disclosure of which is fully incorporated herein by reference, describes a prosthesis for placement into a joint space between two or more bones. The prosthesis includes a body formed from a pre-formed solid one piece elastomer, wherein the elastomer is formed from a synthetic organic polymer that is biocompatible and has a modulus of elasticity and a mechanical strength between 0.5 MPa and 75 MPa. The body having a shape contoured to fit within a joint space between the femoral condyle, tubercle, and tibial plateau without any means of attachment.

[0010] U.S. patent application Ser. No. 12/259,907 to Philippon et al., the disclosure of which is fully incorporated herein by reference, describes a device for accessing and distending a joint comprises a distraction structure having a generally tapered distal portion adapted to penetrate a tissue region and create an access space within a joint. The distraction structure also includes a lumen extending from a proximal surface to a distal portion. The device further includes a distention structure deployable through the lumen and adapted to exert a force between a first joint surface and a second joint surface and create a working space. The distention structure may, in some embodiments, include an elongate member having a proximal end, a distal end, and a lumen extending along at least a portion of the length of the elongate member, a first expandable region deployable from a first substantially collapsed position to a second substantially

expanded position, the first expandable region adapted to exert a force between the first joint surface from the second joint surface.

[0011] US patent publication 2009/0187252 describes an implant for relieving damaged areas of the surfaces of hip or shoulder joints from stress. The implant is cup-shaped or cap-shaped, rests in the socket by means of a convex external face and sits in the condyle by means of a convex external face in the implanted state. The implant comprises at least two articulation layers which are movable relative to each other and encompass articulation surfaces that face one another in the implanted state. Also described is an implantation method where the implant is pushed, using fluid through a channel that is drilled in the trochanter and femoral head, in to a joint space of a hip joint.

SUMMARY OF THE INVENTION

[0012] In a broad aspect of some embodiments there is provided a biodegradable inflatable glenohumeral joint prosthesis, optionally adapted to prevent or treat osteoarthritis.

[0013] There is provided in accordance with some exemplary embodiments of the invention a method for implanting and deploying an implant in a glenohumeral joint to achieve a desired function, comprising minimally invasively inserting an expandable implant into a joint capsule of said glenohumeral joint and then controlling the expansion of said implant to a desired amount such that said desired function is achieved.

[0014] Optionally, said desired function comprises one or more of implant stability, shoulder stability, pain reduction and amelioration of osteoarthritis. Optionally or alternatively, said desired function is a normal unhindered multiaxial motion of a human shoulder under loads of up to 100 Kg that is stabilized only by soft tissues.

[0015] In an exemplary embodiment of the invention, controlling the expansion comprises first expanding to assist deployment of the implant and then contracting to said desired amount.

[0016] In an exemplary embodiment of the invention, inserting comprises inserting an implant that fits within a glenoid fossa and is maintained in place, at least in part by a Labrum of said glenohumeral joint.

[0017] In an exemplary embodiment of the invention, the method comprises anchoring said implant to cartilage of said joint. Optionally, said anchoring comprises anchoring to a single point at the glenoid apex or to at least 3 points on a glenoid cartilage.

[0018] In an exemplary embodiment of the invention, the method comprises determining a correctness of said inserting and said controlling by manipulating said joint to ensure a separation between bone faces in said joint, over a range of useful motion thereof.

[0019] In an exemplary embodiment of the invention, said implanting is in response to an illness of the joint and wherein said illness is osteoarthritis.

[0020] In an exemplary embodiment of the invention, said expandable implant is inflatable and provided detachably connected to inflation means, and wherein said inflation means are detached from said expandable corrective and withdrawn after said controlling.

[0021] In an exemplary embodiment of the invention, said controlling comprises controlling said expansion until reaching a maximally allowed parameter including at least one of a pressure, a volume, a diameter and a consistency.

[0022] In an exemplary embodiment of the invention, the method comprises:

[0023] creating a passage into said glenohumeral joint capsule for said implanting; and

[0024] increasing a gap between a humerus head and a glenoid fossa of said glenohumeral joint, before said implanting.

[0025] In an exemplary embodiment of the invention, the method comprises:

[0026] creating a second passage, to a sub-acromial space; and

[0027] inserting a second portion of said collapsed expandable implant into said space.

[0028] In an exemplary embodiment of the invention, the method comprises:

[0029] forming a channel in the humeral head; and

[0030] delivering said implant through said channel.

Optionally, the method comprises anchoring said implant to said channel. Optionally or alternatively, the method comprises covering at least 40% of a surface of a bone-bone contact surface said humeral head by said implant.

[0031] There is provided in accordance with some exemplary embodiments of the invention an expandable implantable device sized and shaped to include at least a section which fits in a synovial joint capsule such that it sits in a fossa, when in an expanded, deployed form, between and selectively formable from a minimally invasive delivery form to a chosen expanded form smaller in at least one dimension than said deployed expanded form.

[0032] Optionally, said device is sized to fit within a glenoid fossa. Optionally or alternatively, said device has a body which fits within a glenoid fossa and one or more anchoring elements which extend onto a Labrum.

[0033] In an exemplary embodiment of the invention, said device has a main body shaped to sit in a glenoid fossa and one or more elements which extend out of said fossa, and are thinner over a Labrum than at said main body.

[0034] In an exemplary embodiment of the invention, said one or more anchoring element comprises a lip. Optionally or alternatively, said one or more anchoring element comprises a plurality of ears adapted to have anchors attached thereto.

[0035] In an exemplary embodiment of the invention, said device is ellipse-like to match a glenoid fossa shape. Optionally or alternatively, said device is circular with a diameter to match an inner diameter of a glenoid fossa.

[0036] In an exemplary embodiment of the invention, said device has at least one aperture therethrough.

[0037] In an exemplary embodiment of the invention, said device is non-planar to comply, at least in part, with a curvature of said glenoid fossa. Optionally, said device has two faces, each adapted to conform to a bone face and wherein the two faces have different spatial curvatures.

[0038] In an exemplary embodiment of the invention, said device is constructed to endure compressive forces of at least 100 Kg over a period of at least 3 years without mechanical failure.

[0039] In an exemplary embodiment of the invention, said device can be inflated and deflated during implantation to have a chosen consistency. Optionally, said chosen consistency resembles at least one of a natural healthy bone consistency, a natural healthy articular cartilage consistency, and a natural healthy synovium consistency.

[0040] In an exemplary embodiment of the invention, said device is formed of a biodegradable material.

[0041] In an exemplary embodiment of the invention, the device comprises at least one connection between two sides of the device other than at its edge, the connection defining a maximum expansion volume of said device. Optionally or alternatively, the device comprises a mesh or other surface adapted to adhere or cause adherence to a joint face.

[0042] In an exemplary embodiment of the invention, said device comprises a smooth surface adapted to allow a humeral head to slide on. Optionally or alternatively, said device comprises a smooth surface adapted to allow a glenoid to slide on.

[0043] In an exemplary embodiment of the invention, the device comprises an anti-adhesive layer adapted to prevent bone adhesion.

[0044] In an exemplary embodiment of the invention, the device comprises at least one anchor adapted for attaching said device to a joint portion. Optionally, said at least one anchor comprises an anchor adapted for attaching said device to a labrum section.

[0045] In an exemplary embodiment of the invention, the device comprises a sleeve for surrounding said implant during implantation and a deployment tube incorporating at least one of a seal and a valve for passage of fluid into said device during implantation thereof.

[0046] In an exemplary embodiment of the invention, the device comprises a second section, connected to said device by a bridge, which second section is adapted to provide a bursa function to a shoulder joint. Optionally, said bridge comprises a valve.

[0047] There is provided in accordance with some exemplary embodiments of the invention an implantable shoulder corrective comprising:

[0048] (a) an expandable chamber, enclosing a reservoir, sized and configured to fit in a glenohumeral joint capsule in an expanded form and provide slidability therein;

[0049] (b) an extension, sized and shaped to protrude out of said glenohumeral joint capsule when said expandable chamber is in said expanded form, comprising:

[0050] a body with at least one smooth surface allowing unhindered movement of a first tissue relative to other tissues;

[0051] (c) a bridge connecting said chamber and said extension. Optionally, said bridge and said extension are sized and shaped to provide a bursa function by said extension. Optionally or alternatively, said extension is inflatable. Optionally or alternatively, said extension is in fluid communication with said reservoir. Optionally or alternatively, said extension includes a second smooth surface opposing said first smooth surface.

[0052] In an exemplary embodiment of the invention, said expandable chamber defines a peripheral diameter substantially unchangeable by chamber expansion, once deployed, and a height changeable by said chamber expansion.

[0053] In an exemplary embodiment of the invention, said chamber comprises a substantially seamless outer surface except for a port and said bridge.

[0054] The present invention, in some embodiments thereof, further provides a method for preventing or treating glenohumeral joint osteoarthritis, including:

[0055] (a) providing a collapsed inflatable prosthesis releasably attached to an inflation device into a glenohumeral joint capsule;

[0056] (b) inflating the inflatable prosthesis via the inflation device until a chosen consistency is met; and

[0057] (c) detaching the inflation device from the inflatable prosthesis.

[0058] In a broad aspect of some embodiments there is provided an expandable implantable device sized to fit inside a synovial joint capsule and selectively formable from a minimally invasive delivery form to an expanded form indicatable by a chosen consistency of the device, wherein the device includes a first smooth surface on which a first cartilage portion may slide. In some embodiments, the synovial joint is a glenohumeral joint. In some embodiments, the chosen consistency resembles a natural healthy bone consistency, a natural healthy articular cartilage consistency, or a natural healthy synovium consistency.

[0059] In some embodiments, the device includes an inflatable cavity. Optionally, the cavity is selectively inflatable with a fluid material to the chosen consistency of the device. In some embodiments, the fluid material includes saline, bio-compatible gel, synovial fluid, glucosamine, chondroitin, anti-inflammatory agent, or any combination thereof.

[0060] In some embodiments, the device includes a biodegradable material. Optionally, the biodegradable material includes PLA, PLGA, caprolactone, polycaprolactone, polydioxane, or any combination thereof. In some embodiments, the device is designed to rupture within a time period of 1 to 30 weeks, optionally 6 to 10 or 12 weeks, following expansion. Optionally, the device is designed to completely biodegrade within a time period of 3-30 months, optionally 6-12 months, following expansion.

[0061] In some embodiments, the device includes at least one passage extending from a first side to a second side of the device for promoting fibrotic development therein. Optionally, at least one passage defines a maximum expansion volume of the device.

[0062] In some embodiments, the device includes a mesh.

[0063] In some embodiments, the device is configured to cushion between a ball-like bone portion and a socket-like bone portion. Optionally, the first smooth surface is located on a proximal side of the device. Optionally, the first cartilage portion is associated to a humerus. In some embodiments, the device includes a distal side with a second smoothed surface on which a second cartilage portion may slide. Optionally, the second cartilage portion is associated to a glenoid. Alternatively or additionally, the device includes an anti-adhesive applied to the smooth surface on the proximal side and/or on the distal side to prevent bone adhesion.

[0064] In some embodiments, the device includes an anchor, or plurality of anchors, adapted for attaching the device to an articular capsule. Optionally, the anchor adapted for attaching the device to a bone and/or to a labrum.

[0065] In some embodiments, the device includes a sleeve incorporating at least one of a seal and a valve.

[0066] In some embodiments, the device expansion is irreversible.

[0067] Unless otherwise defined, all technical and/or scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention pertains. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of embodiments of the invention, exemplary methods and/or materials are described below. In case of conflict, the patent specification, including definitions, will control. In addition, the materials, methods, and examples are illustrative only and are not intended to be necessarily limiting.

BRIEF DESCRIPTION OF THE DRAWINGS

[0068] Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this regard, the description taken with the drawings makes apparent to those skilled in the art how embodiments of the invention may be practiced.

[0069] In the drawings:

[0070] FIGS. 1A-B illustrate different anatomical views of a glenohumeral joint;

[0071] FIG. 2A is a cutaway schematic view of a portion of a prosthesis implantation and/or inflation device and an inflatable expandable prosthesis for the shoulder, in accordance with an exemplary embodiment of the invention;

[0072] FIG. 2B is a cutaway view of an expandable prosthesis deployed in a glenohumeral joint, in accordance with an exemplary embodiment of the invention;

[0073] FIGS. 3A-C illustrate different deployment stages of a prosthesis, in accordance with an exemplary embodiment of the invention;

[0074] FIG. 3D is a flowchart of a method of implantation of a shoulder implant, in accordance with an exemplary embodiment of the invention;

[0075] FIGS. 4A-C illustrate various prosthesis designs, in accordance with exemplary embodiments of the invention;

[0076] FIGS. 5A-5E illustrates various prosthesis shapes and anchoring methods, in accordance with exemplary embodiments of the invention;

[0077] FIG. 6A is a flowchart of a method of implantation in a shoulder, including forming a channel in the bone, in accordance with an exemplary embodiment of the invention;

[0078] FIG. 6B is a cutaway view of an exemplary prosthesis delivered through a passage crossing the humerus head, in accordance with an exemplary embodiment of the invention;

[0079] FIG. 7 is a cutaway view of an implantation of an exemplary prosthesis both a bursa simulating section and a glenohumeral section, in accordance with an exemplary embodiment of the invention;

[0080] FIGS. 8A-8C are side, side and top views of two-section prostheses, in accordance with exemplary embodiments of the invention;

[0081] FIGS. 9A-9H illustrate various stages in a process of implanting a two section implant, in accordance with an exemplary embodiment of the invention;

[0082] FIG. 9I is a flowchart of a method of implantation of a two section prosthesis, in accordance with an exemplary embodiment of the invention; and

[0083] FIGS. 10A-10D illustrate various stages in a process of implanting a two section implant, in accordance with an alternative exemplary embodiment of the invention.

DETAILED DESCRIPTIONS OF EXEMPLARY EMBODIMENTS

[0084] The present invention generally relates to orthopaedic implants and related methods of treatment, for example, to methods and devices for preventing or treating glenohumeral joints disorders.

[0085] An aspect of some embodiments of the invention relates to a method of providing an implant in the shoulder, between two bones, in which the implant is implanted and

then inflated such that it is suitable for use in the shoulder joint, for example, the glenohumeral joint portion thereof.

[0086] In an exemplary embodiment of the invention, the implant is sized and shaped to fit in the glenoid fossa and is optionally held in place also or only by the surrounding Labrum. In an exemplary embodiment of the invention, the implant covers at least 30%, 50%, 70%, 90% or intermediate or greater percentages of the surface area of the Glenoid Fossa. Optionally, the implant is selected to match the shape of the fossa (e.g., be oval or elliptical in shape with an optional sharper edge) and/or its diameter. Optionally or alternatively, the implant is selected so it cannot rotate and/or move transversally within the fossa. Optionally or alternatively, the implant includes one or more recesses and/or opening therein, for example, being donut shaped. In some embodiments, the entire implant (e.g., excepting anchoring) fits within the fossa. In others, the implant includes a section or body shaped to sit in the fossa but has anatomically functional sections (e.g., other than anchoring or inflation) which extend onto or past the labrum.

[0087] In an exemplary embodiment of the invention, one or more anchoring elements are used. Optionally at least one anchor is adapted for fixating the implant to a labrum portion. Optionally or alternatively, at least one of the implant faces or surfaces is curved, to match a shape of the Humerus and/or of a Glenoid. Optionally, the implant has different curvatures on two opposing surfaces thereof.

[0088] In an exemplary embodiment of the invention, the implant is provided at a location and/or anchored in a manner which matches rotation positions where friction and/or pain are expected. Optionally, the thickness of the implant is non-uniform at one or more edges thereof, for example, tapering, where movement of the joint may allow bone to slide past other bone without an intermediate implant section.

[0089] In an exemplary embodiment of the invention, the selection and implantation process include a personalization to the patient. Optionally, the implementation includes a fine-tuning process where fit of, for example, implant inflation, is matched to dynamic properties of the patients joint. In an exemplary embodiment of the invention, the inflation matching includes first over inflating to deploy the implant and then reducing inflation amount to a functionally desired inflation of the implant. Optionally, alternatively or additionally, the selection process includes matching of the implant to the patient anatomy, for example, to the Glenoid Fossa and/or humeral head.

[0090] In an exemplary embodiment of the invention, the implant is made strong enough to withstand the high forces in the shoulder, for example, its wall is made thick enough to resist forces of at least 100-200 Kg. Alternatively or additionally, the implant wall is made thick enough to resist a pressure across its wall of at least 2-3 atm. Optionally, the implant has a wall thickness of between 0.1 and 0.5 mm, for example, about 0.25 mm

[0091] In an exemplary embodiment of the invention, the implant includes one or more extensions. For example, the implant may include an extension to lie between a tendon and the bone and/or to occupy a volume in a subacromial space.

[0092] In an exemplary embodiment of the invention, the implant is configured to cover a humeral head, optionally anchoring to the humeral head.

[0093] In an exemplary embodiment of the invention, the implant is selected and/or manipulated to match a particular

patient. In one example, during implantation, the implant is overinflated to ensure its deployment and then deflated to a working state.

[0094] In an exemplary embodiment of the invention, the shoulder is distracted during implantation, optionally by manual manipulation and/or by the over-inflation, and then the distraction removed, for example, to test the implant and/or determine a desired inflation amount.

[0095] In an exemplary embodiment of the invention, the shoulder joint is manipulated to determine that the implant is in a correct place and/or does not move.

[0096] In an exemplary embodiment of the invention, implanting (and/or optionally manipulation or other acts of tuning) includes making sure that there is no contact between the Humerus and the Glenoid over a desired range of motion.

[0097] An aspect of some embodiments of the invention relates to a method of implantation of an implant in a shoulder joint, in which a channel is formed in the bone and the implant is inserted through the channel. In an exemplary embodiment of the invention, the channel is a hole drilled through the Humerus head. Optionally, the implant is inflated and/or deflated through the channel. Optionally or alternatively, the implant includes at least one protrusion which anchors in the channel after deployment of the implant.

[0098] In an exemplary embodiment of the invention, the implant is used to cover at least 30%, 50%, 80% or intermediate percentages of the area of the cartilage covered portion of a humeral head. In an exemplary embodiment of the invention, the implant is provided at a location and/or anchored in a manner which matches rotation positions where friction and/or pain are expected. Optionally, the thickness of the implant is non-uniform at one or more edges thereof, for example, tapering, where movement of the joint may allow bone to slide past other bone without an intermediate implant section.

[0099] An aspect of some embodiments of the invention relates to a two section shoulder implant. In an exemplary embodiment of the invention, the implant is implanted in a shoulder so it both separates a Humerus from a Glenoid and between the Humerus and a tendon and/or in subacromial space. In an exemplary embodiment of the invention, this provides for treating multiple shoulder disorders, such as rotator cuff problems and osteoarthritis. In some embodiments, one section serves to help anchor or limit the motion of another section. In some embodiments, the use of multiple sections improves the stability of the shoulder joint.

[0100] Optionally, the two sections include a fluid communication channel so they can both be expanded and/or deflated via a single port. Optionally, the two sections have different wall thicknesses, for example, the subacromial section having a wall thickness of less than 50%, 20% or smaller percentages of the wall thickness of the Glenohumeral section.

[0101] In an exemplary embodiment of the invention, the two sections are connected by a bridge which is narrower than the two sections. Alternatively, one section is an extension that extends away from the other section.

[0102] In an exemplary embodiment of the invention, any of the implants used is seamless. Optionally or alternatively, the implant includes a port which self-seals when an inflation tube is retracted therefrom. Optionally or alternatively, the implant includes means, such as connecting sections, which limits a maximum thickness of the implant, for example, to less than 4 mm, less than 3 mm, less than 2 mm or intermediate thicknesses. Optionally, the implant has a final thickness

of at least 1 mm, at least 2 mm or more. Optionally or alternatively, the implant includes one or more through passages between its two main faces, for example, to assist in controlling the shape of the implant during use and/or inflation.

[0103] In an exemplary embodiment of the invention, the implant comprises two walls with a cavity defined thereby in between with its total thickness set by the amount of inflation. Optionally, more than two layers are provided, for example, three, four or more layers. Optionally, some or all of the adjacent layers define isolated cavities therebetween. In some embodiments, two or more of the cavities do have fluid communication there between. Optionally different cavities have different liquids therebetween.

[0104] In an exemplary embodiment of the invention, the implant includes a mesh or other surface which is adapted to adhere to one part of the joint. Optionally or alternatively, the implant includes a surface which is adapted to not adhere to a part of the joint.

[0105] In an exemplary embodiment of the invention, the implant includes one or more anchors, for example, one or more anchors adapted to attach to bone and/or one or more anchors adapted to attach to cartilage.

[0106] In some embodiments of the invention, some or all of the implant is configured to allow a sliding motion between two surfaces thereof.

[0107] In an exemplary embodiment of the invention, the implant is pre-formed to have curved surfaces, for example, conforming to spherical surfaces expected in a joint.

[0108] Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not necessarily limited in its application to the details set forth in the following description or exemplified by the Examples. The invention is capable of other embodiments or of being practiced or carried out in various ways.

[0109] Exemplary Shoulder Implant

[0110] Referring to FIG. 2A, a cutaway view of a portion of a prosthesis implantation and/or inflation device **200** and an expandable/inflatable prosthesis **202** is shown, in accordance with an exemplary embodiment of the invention. Similar or alternative designs of expandable prostheses and implantable balloons are described in PCT applications number PCT/IL2008/000347 and PCT/IL2005/000672, the disclosures of which are fully incorporated herein by reference. In an exemplary embodiment of the invention, however, the implant is specifically adapted for the glenohumeral joint, for example, by size, shape, consistency, strength and/or anchoring mechanism.

[0111] In an exemplary embodiment of the invention, inflatable expandable prosthesis **202** is circular or oval in shape when deflated, possibly delivered rolled or coiled, and when inflated resembles a cylindrical disc or ovoid. It should be understood, however, that many shapes may be chosen instead, in exemplary embodiments of the invention, for example, to match a particular shoulder geometry and/or dynamics. In some embodiments of the invention, prosthesis **202** is adapted to be inserted deflated into a patient's body through a cannula and/or covered by a flexible sheath **203**. Optionally, the cannula is selected from cannulas of sizes of between 5 mm and 10 mm cannula. In an embodiment of the invention, a long axis **205** (x-axis) of inflatable expandable prosthesis **202** is approximately 1, 1.5 or 2 cm to 10 cm, optionally 3 cm to 6 cm in length when inflated. In some embodiments of the invention, the width **207** (y-axis) of inflatable expandable prosthesis **202** is approximately 0.5

mm to 20 mm when inflated. Optionally, inflatable expandable prosthesis **202** is 1.1, 1.5 or 2 mm to 9 mm in thickness. It should be understood that the deflated and/or inflated size of prosthesis **202** is adapted to fit for a patient's particular needs or to simulate the size and/or shape of the natural interior of a joint capsule, glenoid fossa and/or of a natural synovial membrane, in an embodiment of the invention, and therefore, prosthesis **202** does not necessarily conform to the size ranges given above.

[0112] In an exemplary embodiment of the invention, the implant is sized for the glenoid fossa and is provided, for example, in one of three sizes: 40×50, 50×60 and 60×70 (measurements in mm), with the shape being elliptical. For example, the ratio between the major and minor axes of the implant may be, for example, between 1:1.2 and 1:2.

[0113] In an exemplary embodiment of the invention, the size and/or thickness of the implant are selected according to a progression of the disease. For example, some diseases will narrow the glenohumeral space so that a thinner implant may be desired. Other diseases may cause the creation of bone spikes which may or may not be removed during implantation. In such cases, a thicker implant may be used, to ensure a greater thickness than such spikes. Optionally, a plurality of implants are provided, each one with a thickening at a different part corresponding to a greater thickness for different parts of the Glenoid Fossa, according to the need at that part. Alternatively, for example, as shown below, the implant be selected to not cover all the fossa, but rather only needed parts thereof and/or parts of the labrum. Optionally, the implant is selected after and/or matched to a joint configuration after damaged cartilage and/or bone are removed. For example an implant of thickness (after inflation) of 0.5 to 6 mm may be chosen based on need. It is noted that the inflation/deflation can form a part of implant selection, with an implant chosen which can be fine-tuned by the inflation. Optionally, the implant includes two or more side by side chambers, optionally with separate inflation ports, whose separate inflation allows personalization of the implant thickness at different parts thereof.

[0114] In an exemplary embodiment of the invention, inflatable expandable prosthesis **202** is manufactured by dip molding and/or investment casting. In some embodiments of the invention, inflatable expandable prosthesis **202** is a seamless balloon-like structure made from biocompatible and/or biodegradable synthetic materials such as, but not limited to, PCL, PGA, PHB, plastarch material, PEEK, zein, PLA, PDO and PLGA, or any combination and/or family members thereof. Additionally, optionally and/or alternatively, inflatable expandable prosthesis **202** is manufactured from natural, biocompatible and/or biodegradable materials such as collagen and/or methyl cellulose. In some exemplary embodiments of the invention, the inflatable prosthesis **202** is manufactured from at least one non-biodegradable material such as polyethylene, polyurethane, silicon, and/or Kevlar®. In an embodiment of the invention, prosthesis **202** is comprised of a material which is about 100-200 microns in thickness, although, as with the other dimensions, the thickness dimension of the material is adapted depending on the intended use and/or the needs of the patient. In an exemplary embodiment of the invention, the thickness and/or material and/or a reinforcing feature (e.g., fibers) is selected to withstand the forces in the glenohumeral joint which may be, for example, 20 Kg, 50 Kg, 70 Kg, 100 Kg, 150 Kg, 200 Kg or intermediate or greater forces.

[0115] In some exemplary embodiments of the invention, inflatable expandable prosthesis **202** is adapted to elute pharmaceuticals such as anti-inflammatory drugs and/or antibiotics and/or pro-angiogenesis factors to promote healing. In some embodiments, inflatable expandable prosthesis is configured to release (for example by diffusion (e.g., through micropores in its wall) from an internal chamber and/or as external wall layers degrade and/or from pores in such walls) materials such as glucosamine and/or chondroitin. Optionally or alternatively, the implant elutes an anti-adhesive and/or a slippery material.

[0116] In an exemplary embodiment of the invention, inflatable expandable prosthesis **202** is releasably attached to prosthesis implantation and/or inflation device **200**. Optionally, prosthesis implantation and/or inflation device **200** (e.g., a manual syringe or pump) is adapted to inflate and/or deflate prosthesis **202** to a specific fill amount, which can determine an overall consistency, allow prosthesis **202** to be positioned in vivo. Optionally, device **200** is adapted to be separated (e.g., by retracting or by unscrewing, for example, with the device **200** detachable from port **206** by reverse screwing thereof) from prosthesis **202** after implantation, leaving prosthesis **202** at the implantation site. In some exemplary embodiments of the invention, prosthesis implantation and/or inflation device **200** includes a tube or catheter type structure **210** which interfaces with prosthesis **202** in the proximity of a sealing mechanism **206** which is located at the end of tube **210** nearest prosthesis **202**. In an exemplary embodiment of the invention, mechanism **206** is a self-sealing port, for example, a duckbill valve or a ball valve. Optionally or alternatively, port **206** is simply a portion which elastically self seals when an inflation syringe is removed therefrom. Optionally or alternatively, other sealing methods, for example, such as known in the art, self-sealing or manual sealing, may be used.

[0117] In an exemplary embodiment of the invention, inflation is described for expansion. Optionally, other expanding mechanisms are used, for example, absorption of fluids from the surrounding into an absorbent wall or filling of the implant. Such an implant may be solid and not include a cavity. However, an advantage of an inflatable implant is that it can be deflated to reach a desired inflation amount.

[0118] Exemplary Placement and Consistency

[0119] In an exemplary embodiment of the invention, inflatable expandable prosthesis **202** is introduced in the glenohumeral joint capsule between the humerus and glenoid cartilage surfaces to prevent injury thereof and/or to permit relatively unhindered or free shoulder movement. Optionally, alternatively and/or additionally, an expandable prosthesis comprises an inflatable structure and a sponge-like structure in combination. For example, one or both of the walls may include a sponge-like layer on the outside, or in a cavity defined by the implant walls. FIG. 2B is a cutaway view of inflatable expandable prosthesis **202** deployed in a glenohumeral joint capsule, in accordance with an exemplary embodiment of the invention. In some embodiments, a first surface of prosthesis **202** is at least occasionally and/or partially in contact with an external surface of a cartilage portion **112** of the humerus head/ball. Alternatively or additionally, a second surface of prosthesis **202** is at least occasionally and/or partially in contact with an external surface of a glenoid cartilage portion **110** and or with the labrum **114**. In some embodiments, at least one of prosthesis **202** surfaces is smooth and allows gliding and/or frictionless motion of a

cartilage portion in contact. Alternatively or additionally, at least one surface is coarse and/or comprising a frictional element (e.g., a mesh) thereby avoiding relative motion and/or encouraging adhesion with respect to a cartilage portion in contact. In an exemplary embodiment of the invention, placement and/or inflation and/or size of the implant are selected and/or modified according to a mechanical criterion, such as no contact between bones and/or a separation of, for example, 2, 3, 4 or smaller or larger or intermediate spacing in mm between the bones.

[0120] In an exemplary embodiment of the invention, the implant is chosen to have a wall thickness and/or inflation medium volume and/or ratio therebetween which provides a needed strength for example, resistance to forces of 100 Kg or more. In an exemplary embodiment of the invention, the implant is sized to fill the glenoid fossa **120**, e.g., cover between 50% and 100% thereof, for example, between 70% and 90%. Optionally, the implant is selected and placed to abut against the labrum **114** at one or more locations, optionally being retained by the labrum **114**. Optionally, the thickness is about 2-4 mm, for example, 2-3 mm, with wall of, for example, about 0.25 mm and a filling of saline.

[0121] In some embodiments, prosthesis **202** is configured to change its overall consistency to a specific chosen degree. "Consistency" will be considered herein as any property or combination of properties that directly relate to the prosthesis ability to maintain its shape under external stresses and/or retain it when these are removed, and for example, to the point of transfer from a rigid resistance to an elastic or plastic resistance under an applied force. Consistency may be the element density, softness, firmness, viscosity or any combination thereof. Prosthesis **202** consistency may be altered by the degree of relative inflation (vol. of actual inflation medium divided by vol. in maximal inflation) and/or by the properties (e.g., viscosity) of the inflation medium. In some embodiments, prosthesis **202** is deployed in a consistency that is similar, identical or equivalent to that of a synovial membrane or synovium, optionally the ones of the glenohumeral joint. It should be noted that a viscosity of normal synovial fluid is about 1 to 2 inch string (using a string test model: the max stretchable length of a measured fluid drop). Alternatively, the physician may choose another consistency according to need, which may or may not resemble a consistency of a cartilage or a bone. In an exemplary embodiment of the invention, prosthesis **202** has non-elastic wall.

[0122] In some embodiments, prosthesis **202** is fully inflated so it may be applied to firmly occupy a space, be incompressible under unyielding forces and/or separate the two adjacent joint surfaces. In some embodiments, prosthesis **202** is not fully inflated at end of procedure so it is compressible under inward pressures. In some embodiments, the inflation device **200** and/or prosthesis **202** are configured and equipped to allow selective inflation/deflation and/or adjustments to a chosen volume and/or relative inflation. In some embodiments, prosthesis **202** is filled with Newtonian fluid (e.g., water or saline). Alternatively or additionally, the inflation medium includes a non-Newtonian fluid (e.g., hyaluronic acid) having a determined and/or variable viscosity. Alternatively or additionally, the inflation medium includes a lubricating material, either fluidic or non-fluidic, optionally a non-polar fluid such as lipid or oil. In some embodiments, only a minute quantity of material is introduced into prosthesis **202** inner volume, optionally inefficient to provide expansion, but still sufficient to reduce friction between the inner surfaces of

the implant. In some embodiments, prosthesis **202** wall is sized and configured to have a chosen consistency when inflated partially and/or fully, optionally by combining specific wall thickness and wall material.

[0123] As will be noted below, inflation and/or placement and/or selection of the implant are optionally performed and/or modified to achieve certain desired functional and/or structural effects in a patient and are optionally personalized to that patient, for example, before or during and/or after implantation.

[0124] Exemplary Implantation Process

[0125] Reference is now made to FIGS. 3A-C which illustrate different deployment stages of prosthesis **202**, in accordance with an exemplary embodiment of the invention. FIG. 3D is a flowchart **300** of a method of implantation, in accordance with an exemplary embodiment of the invention.

[0126] At **302**, the shoulder joint (e.g., including the glenohumeral joint) is optionally imaged. For example, MRI, CT, ultrasound, fluoroscopy and/or X-ray imaging may be used. Optionally or alternatively, invasive imaging using a camera on an arthroscope, may be used.

[0127] At **304**, an implant (e.g., size, shape, inflation medium type, wall thickness and/or materials) is selected for the glenohumeral joint.

[0128] At **306**, the shoulder is optionally distracted, for example, using methods known in the art.

[0129] At **308**, a camera is optionally inserted into the joint, to image the procedure. Optionally or alternatively, the implant device is inserted, for example, using a separate cannula and/or covered by a flexible sheath **203**. Optionally or alternatively, the device is uncovered when inserted into the capsule.

[0130] At **310**, the implant is positioned, for example, adjacent the Glenoid Fossa **120**. This can be seen, for example, in FIG. 3A, where a rolled up prosthesis **202**, with two rolled up edges **204** is shown inserted into a glenohumeral joint. In other embodiments, the prosthesis is provided folded up in another manner or partly or completely expanded. Optionally, prosthesis **202** is maintained rolled up using a flexible sheath **203** and is allowed to- or caused to- unroll when the sheath is removed. In an exemplary embodiment of the invention, the implant is positioned, optionally under CCD imaging, ultrasound imaging or x-ray imaging, by manipulating delivery system **200** and/or an inflation and/or manipulation tube **210**.

[0131] At **312**, the implant is optionally inflated fully, optionally gradually, optionally to a fully deployed form and/or to another desired form. As shown in FIGS. 3B and 3C, progressive inflation causes the unrolling of wings **204**, so prosthesis **202** is fully deployed. Optionally or alternatively, full inflation is used to provide distraction of the glenohumeral joint.

[0132] Optionally, once wings **204** are unfolded (or device otherwise unfolded), prosthesis **202** may not be re-folded for example when deflated. For example if portions of its wall irrecoverably (e.g., plastically) deform (e.g., including a metal insert therein) and/or if portions of its wall regain elastic properties once past a certain expansion.

[0133] At **314**, the distraction is optionally released, partly and/or in full, for example, so that the functionality and/or positioning of prosthesis **202** can be assessed.

[0134] At **316**, the implant is optionally deflated, for example, to reach a desired thickness and/or consistency, for example, a desired stiffness or a desired slippage behavior.

Optionally or alternatively, the deflation is selected to maintain stability of the shoulder and/or of the implant. Optionally, act 314 is performed during or after 316.

[0135] At 318, the shoulder is optionally imaged and/or manipulated, for example to assess a functionality of the implant. In response to such imaging and/or manipulation, the implant may be repositioned, inflated and/or deflated, or possibly removed and/or a different material inserted therein. Acts 310-318 or any selective acts thereof may be repeated as needed, as part of a fine-tuning procedure whereby the implant characteristics are matched to the particular patient's need. The shoulder may also be distracted, as needed.

[0136] In an exemplary embodiment of the invention, a target of the fine tuning is prevention of contact between bones (or damaged cartilage) over a desired range of motion of the shoulder. Optionally or alternatively, a target of the fine tuning is ensuring a distance of, for example, between 2 and 4 mm between bone faces under a certain magnitude of an applied force or under no external stresses. Optionally or alternatively, a target of the fine tuning is that the shoulder move smoothly and/or that there is no dislocation. Optionally or alternatively, a target of the fine tuning is that the implant location is stable. Optionally or alternatively, a target of the fine tuning is to replace or modify functionality of a synovia between a humerus head and a glenoid fossa, at least for a period of time. The inflation tube and/or delivery system are optionally removed only after fine tuning is completed. In some embodiments, the tube is removed before final undistraction of the shoulder. Optionally, the inflation tube is thin and/or soft and/or flexible, to prevent damage thereby to the cartilage.

[0137] In an exemplary embodiment of the invention, the functional assessment is over a useful range of motion, which can include angular extents and/or arm positions. Optionally or alternatively, the motion is defined according to planned activities. Optionally or alternatively, reduction of pain by at least 50% or 70 (using a pain scale) is a target, for at least a certain range of angles. Optionally, restoration to a normal range of motion is provided. In an exemplary embodiment of the invention, a useful range of motion includes a range of angular motion that is at least 50% (in each direction) of a normal range. Optionally, the range is at least 70% of a normal range in each direction. Optionally or alternatively to estimating based on angular position, estimation is based on ability to move and/or not have pain, under conditions of loading of the joint by a weight, for example, 1 Kg, 5 Kg or 10 Kg or intermediate or greater forces.

[0138] Optionally, the desired function is a normal unhindered multiaxial motion of a human shoulder under loads of up to, for example, 10 Kg, 50 Kg or 100 Kg that is stabilized only by soft tissues.

[0139] In an exemplary embodiment of the invention, the tube removal causes and/or is accompanied by a sealing of port 206.

[0140] At 320, the implant is optionally anchored in place. While in some embodiments the implant naturally stays in place and in others, part of the implant adheres to tissue over time, optionally, anchoring is provided as part of the implantation procedure. Optionally, anchoring comprises providing a tissue adhesive between the implant and tissue. Optionally or alternatively, anchoring comprises sewing of a part of the implant, for example, an extension "ear" or "lip" thereof. Optionally or alternatively, anchoring comprises attaching a bone or cartilage anchor, for example screw-type, curved barb

type, changing-cross-section type and/or linear bone anchor types. Some embodiments, for example, are self anchoring without a separate anchor or adhesive layer. Anchoring may also be performed earlier, for example, during or before any of 312, 316 or 316. For example, anchoring may be by pushing the implant against a surface so a barb thereon engages the surface.

[0141] At 322, the capsule is optionally sewed shut and the procedure completed.

[0142] At 324 follow up is optionally performed, for example, to assess implant functionality, for example, after a few days, weeks or months. Optionally, an additional implant is inserted if needed. Optionally or alternatively, an existing implant is removed and/or its level of inflation changed. Optionally, an implant is inflated by inserting a syringe into the joint and into the implant and inflating or deflating, as desired. Optionally, follow-up includes assessing the decomposition of a biodegradable implant.

[0143] Exemplary Implant and Anchoring Variations

[0144] FIGS. 4A-C and 5A-5E illustrate different prosthesis designs and anchoring configurations, in accordance with exemplary embodiments of the invention.

[0145] An exemplary prosthesis 400 is illustrated in FIG. 4A and includes a body 410 having an inflatable inner cavity sealed with a valve (optionally one-way valve) or plug 430. Optionally valve or plug 430 is to be deployed fixedly in-place (automatically or manually) in an inflation port after inflating prosthesis 400, for example by or after disconnecting an inflation device such as device 200. FIG. 4A illustrates an optionally feature of providing one or more connections 420 between opposite faces of the implant, optionally through openings. Through-hole(s) 420 provides a passage between two different, optionally opposing, surfaces of prosthesis 400, and optionally allows inward migration and/or buildup of fibrosis therein. Additionally or alternatively, the presence of at least one through-hole 420 stiffens an adjacent local portion of prosthesis 400 surface and/or limits its expansion to a predetermined size (e.g., in width or in height).

[0146] FIG. 4B illustrates a second exemplary prosthesis 450 which may have a body 460 similar in at least some characteristics to prostheses 202 or 400, while differing by at least having at least one surface covered with a mesh 470 or other adhesion encouraging or causing surface. In some embodiments, mesh 470 establishes at least one of: greater friction characteristics to the surface in-contact, anchoring to at least one joint surface, size or shape expansion limiting, improved fibrosis generation and/or fixation and/or changed overall prosthesis consistency.

[0147] FIG. 4C illustrates a third exemplary prosthesis 480 deployed in position in a glenohumeral joint, according to an exemplary embodiment of the invention. In some embodiments, prosthesis 480 is sized and configured to enlarge the contact surface with the humerus ball, to establish a deepened "socket" than the one formed by the glenoid cavity and surrounding labrum and/or to cover the labrum. In some embodiments, prosthesis 480 is substantially flexible in at least one axis so it can take a general curvature between the humerus ball and glenoid socket. Alternatively or additionally, at least one wall portion or surface of prosthesis 480 is substantially pre-shaped. Optionally, the "socket" surface of prosthesis 480 (as suggested in FIG. 4C) is sized to fit inside the glenoid cavity and labrum, so it is substantially fixed in-place. Optionally or alternatively, one face of prosthesis 480 has a greater curvature than its opposite face. Optionally or alter-

natively, the portion of prosthesis **480** that lies over the labrum is thinner and/or is a non-inflating portion, than portions in the glenoid fossa.

[0148] Reference is now made to FIG. **5A** showing yet another exemplary prosthesis **500** having a body **510** that may be similar to the above mentioned prostheses and/or an inflatable bladder or envelope. Optionally, prosthesis **500** further include a ring or a collar **520** that surrounds its circumference, which includes (e.g., pre-provided or added after insertion) at least one anchoring member **530**, connecting it to the labrum **114**. Similarly to prosthesis **480**, prosthesis **500** is also optionally snugly-fit into the glenoid cavity, whereby anchor (s) **530** facilitates a more substantial fixation in-position. Anchoring can be made by any anchors types known to art, including but not limited to surgical stitching, stapling, gluing, etc. Optionally or alternatively, rim/lip **520** may include a resilient member, such as a metal ring, to maintain its shape.

[0149] FIG. **5B** shows an implant **514** which fills only part of glenoid fossa **120**, for example, an upper or lower half. Optionally, the thickness of the implant is tapered towards the edge which meets the revealed fossa. This edge may be, for example, straight, concave, convex or wavy. Also shown is the use of three ears/extensions **516**, each including an anchor **530** (e.g., a barb, a clip, a suture or a screw) for attachment to labrum **114**. A smaller or greater number of ears may be used. Optionally, the implant includes more ears and some are removed prior to or during implantation, for example, to match angular locations along the labrum where such anchoring will be less problematic. In an exemplary embodiment of the invention, for example, 1, 2 or 4 anchors are used. The anchors may be uniformly or non-uniformly located along the labrum, depending, for example, on medical and/or mechanical considerations.

[0150] Optionally, fewer than 7 or 6 anchors are used.

[0151] FIG. **5C** shows an implant **512** which fills substantial all of glenoid fossa **120**. Anchor may not be needed.

[0152] FIG. **5D** shows an implant **518** in the shape of a ring with a central aperture **522**. As shown, anchoring may be in the aperture, optionally using anchoring extensions (not shown). While the ring is shown to be ellipsoid, it may be round or have other shapes.

[0153] FIG. **5E** shows an implant **524** which is circular or at least more circular than glenoid fossa **120**. Optionally, the implant is held in place, at least in part by matching one of the radii of glenoid fossa **120**. Alternatively, the implant may be smaller in radius than that radius. Optionally or alternatively, the implant may be ellipse-like with a main axis perpendicular to that of fossa **120**.

[0154] In some embodiments, the port (e.g., **206**) is positioned on the implant so it also lies within the fossa. In other embodiments, the port extends past the labrum **114** (e.g., like extensions **516**). In some embodiments, the access and/or port is at an anterior superior or inferior portal to the joint and/or using the rotator interval portal.

[0155] Through Bone Delivery and Humeral Attachment

[0156] A glenohumeral implant may be inserted also in other ways, for example, via a channel formed in the humeral head. Optionally, such an implant is the same as described above, once deployed. Alternatively, such an implant is anchored to the humeral head, rather than the glenoid. Optionally, such an implant may be greater in surface area.

[0157] FIG. **6B** is a cutaway view of a prosthesis **600** delivered through a passage or channel **602** crossing the humerus ball, in accordance with an exemplary embodiment of the

invention. FIG. **6A** is a flowchart **640** of a method of implantation thereof, in accordance with an exemplary embodiment of the invention.

[0158] Prosthesis **600** (FIG. **6B**) includes a body **620** and an optional anchoring portion **610** that protrudes into and is optionally coupled to the distal end of channel **602**. The glenohumeral joint is optionally distracted.

[0159] At **642**, A channel location and size and an implant are chosen, for example, according to considerations such as health of the humeral head, preexisting medical condition, and/or anatomical limitations.

[0160] At **644**, channel **602** is formed in the humeral head. Optionally, channel **602** is drilled through the humerus head using known drilling means. Optionally, drilling is performed under imaging. Optionally, drilling is made according to a chosen path which is predetermined according to initial analysis and/or which is taken while drilling. Optionally, any debris formed during drilling is cleaned out of the joint, for example, by washing, suction and/or using a tweezers.

[0161] At **646**, once channel **602** is formed, prosthesis **600** can be delivered in a collapsed form therein and expand, optionally self-expand and/or be inflated until reaching a chosen shape and/or size.

[0162] At **648**, the implant is deployed, for example, by expansion. Optionally or alternatively, a tool or stylet is inserted into the implant and used to spread it out. Optionally or alternatively, the implant includes a rim ring (not shown) of a resilient material to spread it out and/or maintain its spreading. Fine tuning and adjustment may be carried out, for example, as described with respect to FIG. **3D**.

[0163] At **650**, implant **620** is optionally anchored in channel **602**. Optionally, such anchoring is via an expanding protrusion **610** thereof. Optionally or alternatively, the protrusion is anchored using an anchor, for example as described above. In some embodiments, the implant is anchored or rests in the glenoid fossa and/or labrum, and slides freely with respect to the humeral head **102**. Optionally, the implant is tethered to channel **602**, for example, with a tight tether or with a tether which gives some freedom of motion. Optionally, the tether is attached to a part of the bone away from the surface of the humeral head. Optionally or alternatively, two implants are provided, one that is stable relative to humeral head and one that is stable relative to the glenoid fossa, which two implants slide over each other. In an exemplary embodiment of the invention, the inflation of implant **620** is via a port (not shown) in protrusion **610**. Optionally, a plug used to seal the port also causes anchoring of protrusion **610**, for example, by expansion thereof.

[0164] At **652** (which may be carried out before **650**), the implant is anchored on the humeral head, for example, using an adhesive layer or barbs on the side of the implant that is near the humeral head (not shown). As shown in FIG. **6B**, a significant portion of humeral head **102** may be covered by the implant, for example, over 50% of a surface area thereof. Implant **620** is optionally designed to taper at its edges. Also as shown, the location of protrusion **610** need not be symmetric with respect to implant **620**.

[0165] At **654** the procedure may be completed (e.g., deployment means withdrawal, sewing, etc).

[0166] Two Section Implant

[0167] Many patients have more than one problem with the shoulder, which problem could be treated using an orthopaedic implant. Sometimes, osteoarthritis or other shoulder joint illnesses or trauma effects, affects several locations of

the shoulder joint, for example, both the glenohumeral joint and the rotator cuff. A potential benefit of providing two therapies with one implant (besides reduction in cost and/or trauma) may also be the increased stability of the implant and/or shoulder. In an exemplary embodiment of the invention, a two section implant is used for treating, for example, rotator cuff injuries and glenohumeral joint problems.

[0168] Reference is now made to FIG. 7 showing a cutaway view of a prosthesis 700 which includes a synovium simulating portion 710 (or for otherwise treating a glenohumeral joint) and a bursa simulating portion 720 (or for otherwise protecting a tendon from contact with bone), located and allowing frictionless movement between a hard tissue and a soft tissue (such as between the acromion and the biceps tendon) and/or between two hard tissues (such as between the acromion and the humerus), in accordance with an exemplary embodiment of the invention. More details about the need and possible applications of a bursa simulating prostheses are described in international patent application number PCT/IL2008/000347, the disclosure of which is fully incorporated herein by reference. The mechanical properties of the two sections may be different, for example, being different wall thicknesses, different inflation properties, different biodegradability and/or permanency properties and/or different adherence properties. For example, one section may be inflatable and the other not or one section may be deflatable and the other not.

[0169] In an exemplary embodiment of the invention, one section has a pre-inflation thickness which is a factor of between 1 and 5 of the other section, for example, between 1.2 and 2. Optionally or alternatively, such factors are for an inflated implant.

[0170] In an exemplary embodiment of the invention, the two implant sections different in surface area by a factor of between 1 and 10, for example, between 2 and 5.

[0171] In an exemplary embodiment of the invention, the two implant sections different in thickness by a factor of between 1 and 10, for example, between 2 and 5.

[0172] In an exemplary embodiment of the invention, the two implant sections different in wall thickness by a factor of between 1 and 10, for example, between 2 and 5.

[0173] Section 720 may be provided for other uses as well. In one example, section 720 is provided in the subacromial space, for example, to increase shoulder stability, for example, by preventing uplift of the humeral head. In another example, section 720 is placed outside the glenohumeral joint capsule. In another example, section 720 is attached to a part of the humeral head. In another example, section 720 serves as a fluid reservoir for section 710, for example, providing medication and/or friction reducing fluid thereto, for example, for elution from section 710. Optionally or alternatively, section 720 is provided as a general drug eluting implant. Optionally or alternatively, section 720 serves as an anchor for section 710.

[0174] In an exemplary embodiment of the invention, section 720 is outside of the glenohumeral joint and generally outside of the capsule thereof, but optionally within the shoulder joint.

[0175] In an exemplary embodiment of the invention, section 720 has at least one smooth surface on which a tissue may continuously move in a non-hindered manner. Optionally or alternatively, section 720 acts as a shock absorbing and/or spring cushioning implant. Optionally or alternatively, section 720 acts as a filler occupying a subacromial space thereby

restoring shoulder shape and/or avoiding inadvertent shoulder dislocation under normative motions.

[0176] FIG. 8A shows an example prosthesis 800 comprising a bursa section 802 and a glenoid section 804, connected by a bridge 810. In the example, shown, separate inflation ports 806 and 808 are provided for each section. Optionally, as noted above, one of the sections may be non-inflatable. Optionally, bridge 810 can serve to carry fluid. Optionally, bridge 810 includes a one way valve which prevents over-inflation of the bursa simulating portion by fluid from the glenohumeral section. The two sections may have a natural angle between them, or bridge 810 may be flexible enough to provide such an angle as needed. In an exemplary embodiment of the invention, bridge 810 is non-expandable and lies substantially flat where it crosses the labrum 114, for example, at a thickness of less than 1 mm or 0.5 mm. In an exemplary embodiment of the invention, the bridge (e.g., portion narrower and/or thinner than either sections and/or non-expandable section) has a length of between 2 and 30 mm.

[0177] FIG. 8B is a side view of an alternative two-section implant design 820 and FIG. 8C a top view of such a design. In this embodiment, bridge 830 is used for fluid flow and a single port 826 is provided in a bursa section 822 and also serves to inflate a glenohumeral section 824. As can be seen in FIG. 8C, the bridge may have a width, for example, selected to reduce sharp edges and/or improve the relative stability of location of the two sections.

[0178] FIGS. 9A-9H illustrate an exemplary implantation method of a two section implant and FIG. 9I is a flowchart 940 of such a method, in accordance with an exemplary embodiment of the invention. In patients where the rotator cuff is torn it may be preferable to approach the bursa area also via the glenohumeral joint. In patients with no tear, it may be desirable to provide separate implants or to create a channel between the rotator cuff and the humeral head and/or through the rotator cuff. Alternatively, the bridge is provided to the side of the glenohumeral joint, rather than at its apex (near the rotator cuff).

[0179] At 942 (FIG. 9A), a delivery tube 900 is inserted into the glenohumeral joint.

[0180] At 944 (FIG. 9B), a glenohumeral section 902 is delivered into the joint, optionally rolled up and/or in a sheath.

[0181] At 946 (FIG. 9C) the delivery tube is advanced and/or retracted and a bursa section 904 is delivered to the subacromial space. In one example, the subacromial section is delivered to the capsule and then pushed into the subacromial section.

[0182] Optionally, the glenohumeral section is manipulated, for example, rotated, for this action, for example, so that the bridge points towards the subacromial space. In an alternative embodiment, first the bursa section 904 is delivered and then tube 900 is advanced and/or retracted and glenohumeral section 902 is delivered. In another embodiment, tube 900 is inserted to the capsule of the glenohumeral joint at a point between the joint and the subacromial space and then one section of the implant is delivered to one side of that point and one section to the other. Optionally, a curved or bendable delivery system is used to bypass muscles, ligaments, nerves, bones and/or vessel and/or articulate a tip of the delivery system.

[0183] Optionally, in case of a non-torn rotator-cuff, in which the glenohumeral capsule may be considered a sepa-

rate space to the subacromial space, the introducer first enters the glenohumeral capsule and deploys section **902**, is then pulled out and pushed over to surround the capsule and/or ligaments and/or bone and/or the joint itself (optionally, a curved introducer able to surround the capsule, for example, by 180 degrees, is used) and then enter the subacromial space. Optionally, the introducer travels inside the capsule, optionally bypassing the joint itself and a new opening is made in capsule to enter the subacromial space therefrom.

[0184] At **948** (FIG. 9D), section **902** is inflated, for example, to cause deployment thereof. Optionally, deployment is provided before act **946**. Optionally, deflation and/or inflation is by attachment of an inflation tube to a port on section **902**. Optionally, the sheath is removed from both sections prior to inflation of section **902**. Alternatively, the sheath is only removed from sections which are being inflated.

[0185] At **950** (FIG. 9E) distraction of the glenohumeral joint is optionally reduced (e.g., in direction of arrow **920**) and inflation is adjusted, for example, as described above with reference to FIG. 3D. Reduction in distraction and/or deflation may be performed after acts **952-954** and/or during such acts.

[0186] At **952** (FIG. 9F), bursa section **904** is expanded. Optionally, a separate inflation port is used. Alternatively, a valve in bridge **910** and/or a sheath on section **904** physically prevents inflation of bursa section **904** until glenohumeral section **902** is inflated. For example, such a valve may be a pressure sensitive valve (e.g., opens only above a certain pressure), or be a three-way valve. Alternatively, inflation is via a port on the bursa section, but a sheath prevents its expansion until after glenohumeral section **902** is deployed.

[0187] In an exemplary embodiment of the invention, the subacromial section of the implant is distally located in the delivery system. In others, the glenohumeral section is more distal. When deploying, a tubular expansion-prevention sheath may be provided over the section which is more proximal and is to be inflated later (or over both and then partially retracted). In embodiments where inflation of the proximal section is to be done first, the sheath may be replaced by a ring, mounted on an elongate element (e.g., flexible or rigid), with the ring mounted on and used to prevent expansion of only one section of the implant and the elongate section manipulated to remove the ring from that section when desired and/or to move it to another section. Optionally, the ring section is a flexible segment of a tube and a portion of the tube axially corresponding to the other implant section is apertures at its side so it does not interfere with expansion of that other implant section.

[0188] At **954** (FIG. 9G) the distraction of a subacromial space is optionally reduced (e.g., in direction of arrow **922**) and the bursa section **904** adjusted, as needed.

[0189] At **956** (FIG. 9H) the procedure is completed, for example, by sealing the ports, removal of tools and/or sewing of the capsule and/or incisions.

[0190] FIGS. 10A-10D illustrate an alternative implantation approach, which may also be use for one section implants (e.g., by not delivering a bursa/subacromial section).

[0191] FIG. 10A shows inserting a delivery system **1000**, for example a tube or a sheath through a subacromial space and into a glenohumeral joint. A curved or flexible delivery system may be used. In other embodiments (e.g., FIGS. 9A-9I) a rigid and/or straight system may be used.

[0192] FIG. 10B shows the retraction of the delivery tube leaving an implant sheathed in a sheath **1030** and an inflation tube **1032** attached to a port thereon.

[0193] FIG. 10C shows the sheath removed, leaving a section **1002** in the glenohumeral space and a section **1004** in the subacromial space. Inflation, deflation and distraction may be as described above. Optionally, a valve is provided in bridge **1010**, so that inflation of section **1004** above a certain pressure leaks into section **1002**.

[0194] In an exemplary embodiment of the invention, shown in FIG. 10D, inflation tube **1032** encloses or is provided with an inflation tube **1034** which is dedicated for inflation of section **1002**. Optionally, a valve is provided at point **1038** or at point **1040**, or at any point in-between, to prevent leakage of pressure from section **1002** to section **1004** or from section **1004** to section **1002**. Optionally, tube **1032** is attached at a valve/port **1036** and tube **1034** passes along or through tube **1032** to attach to a port **1038**, **1040** or any port in-between, and/or directly to bridge **1010**. The use of such separate inflation tubes can allow the independent inflation and/or deflation of the two sections **1002** and **1004**. This type of separate inflation tubes may also be used with other embodiments described herein that include multiple cavities.

[0195] Optionally or alternatively, relative inflation of the two sections is controlled by providing height-limiters in one or both sections, which prevent over extension in a height direction of the inflated and limited section.

[0196] Kits

[0197] It should be appreciated that while the description has focused on methods and tools which may be used to carry out such methods, kits may be provided. One example of a kit is a set of one or more implants (e.g., of different sizes and/or shapes), instructions for use and a delivery cannula and/or sheath. Optionally, one or more anchors are provided. Another example of a kit includes in addition a bone drill. Another example of a kit includes multiple inflation tubes for multiple sections of an implant.

[0198] While the above has focused on implants for the glenohumeral joint, similar designs and/or methods may be used for other parts of the body (e.g., absent the particular adaptations to the glenohumeral joint, for example), such as an implant for other joints, an implant used only in a subacromial space, an implant separating two tissues from contact with each other, for example, ligament and bone, bone and bone soft tissue with soft tissue, or for space filling implants, such as to replace bones, bone section, soft tissue and/or generally urge one tissue against another or to prevent movement of a tissue. Such implants may be provided in accordance with some embodiments of the invention.

[0199] General

[0200] It is expected that during the life of a patent maturing from this application many relevant expansion technologies will be developed and the scope of the expansion is intended to include all such new technologies a priori.

[0201] As used herein the term "about" refers to $\pm 10\%$.

[0202] The terms "comprises", "comprising", "includes", "including", "having" and their conjugates mean "including but not limited to". This term encompasses the terms "consisting of" and "consisting essentially of".

[0203] The phrase "consisting essentially of" means that the composition or method may include additional ingredients and/or steps, but only if the additional ingredients and/or steps do not materially alter the basic and novel characteristics of the claimed composition or method.

[0204] As used herein, the singular form “a”, “an” and “the” include plural references unless the context clearly dictates otherwise. For example, the term “a compound” or “at least one compound” may include a plurality of compounds, including mixtures thereof.

[0205] The word “exemplary” is used herein to mean “serving as an example, instance or illustration”. Any embodiment described as “exemplary” is not necessarily to be construed as preferred or advantageous over other embodiments and/or to exclude the incorporation of features from other embodiments.

[0206] The word “optionally” is used herein to mean “is provided in some embodiments and not provided in other embodiments”. Any particular embodiment of the invention may include a plurality of “optional” features unless such features conflict.

[0207] Throughout this application, various embodiments of this invention may be presented in a range format. It should be understood that the description in range format is merely for convenience and brevity and should not be construed as an inflexible limitation on the scope of the invention. Accordingly, the description of a range should be considered to have specifically disclosed all the possible subranges as well as individual numerical values within that range. For example, description of a range such as from 1 to 6 should be considered to have specifically disclosed subranges such as from 1 to 3, from 1 to 4, from 1 to 5, from 2 to 4, from 2 to 6, from 3 to 6 etc., as well as individual numbers within that range, for example, 1, 2, 3, 4, 5, and 6. This applies regardless of the breadth of the range.

[0208] Whenever a numerical range is indicated herein, it is meant to include any cited numeral (fractional or integral) within the indicated range. The phrases “ranging/ranges between” a first indicate number and a second indicate number and “ranging/ranges from” a first indicate number “to” a second indicate number are used herein interchangeably and are meant to include the first and second indicated numbers and all the fractional and integral numerals therebetween.

[0209] As used herein the term “method” refers to manners, means, techniques and procedures for accomplishing a given task including, but not limited to, those manners, means, techniques and procedures either known to, or readily developed from known manners, means, techniques and procedures by practitioners of the chemical, pharmacological, biological, biochemical and medical arts.

[0210] As used herein, the term “treating” includes abrogating, substantially inhibiting, slowing or reversing the progression of a condition, substantially ameliorating clinical or aesthetical symptoms of a condition or substantially preventing the appearance of clinical or aesthetical symptoms of a condition.

[0211] It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination or as suitable in any other described embodiment of the invention. Certain features described in the context of various embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

[0212] Although the invention has been described in conjunction with specific embodiments thereof, it is evident that

many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

[0213] All publications, patents and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention. To the extent that section headings are used, they should not be construed as necessarily limiting.

1-16. (canceled)

17. An expandable implantable device sized to fit within a glenoid fossa, when in an expanded, deployed form, between and selectively formable from a minimally invasive delivery form to a chosen expanded form smaller in at least one dimension than said deployed expanded form.

18. (canceled)

19. An expandable implantable device sized and shaped to include at least a section which fits in a synovial joint capsule such that it sits in a fossa, when in an expanded, deployed form, between and selectively formable from a minimally invasive delivery form to a chosen expanded form smaller in at least one dimension than said deployed expanded form, wherein said device has a body which fits within a glenoid fossa and one or more anchoring elements which extend onto a Labrum.

20. An expandable implantable device sized and shaped to include at least a section which fits in a synovial joint capsule such that it sits in a fossa, when in an expanded, deployed form, between and selectively formable from a minimally invasive delivery form to a chosen expanded form smaller in at least one dimension than said deployed expanded form, wherein said device has a main body shaped to sit in a glenoid fossa and one or more elements which extend out of said fossa, and are thinner over a Labrum than at said main body.

21. A device according to claim 19, wherein said one or more anchoring element comprises a lip.

22. A device according to claim 19, wherein said one or more anchoring element comprises a plurality of ears adapted to have anchors attached thereto.

23. A device according to claim 17, wherein said device is ellipse-like to match a glenoid fossa shape.

24. A device according to claim 17, wherein said device is circular with a diameter to match an inner diameter of a glenoid fossa.

25. A device according to claim 23, wherein said device has at least one aperture therethrough.

26. A device according to claim 17, wherein said device is non-planar to comply, at least in part, with a curvature of said glenoid fossa.

27. A device according to claim 26, wherein said device has two faces, each adapted to conform to a bone face and wherein the two faces have different spatial curvatures.

28. A device according to claim 17, wherein said device is constructed to endure compressive forces of at least 100 Kg over a period of at least 3 years without mechanical failure.

29. A device according to claim **17**, wherein said device can be inflated and deflated during implantation to have a chosen consistency.

30. The device of claim **29**, wherein said chosen consistency resembles at least one of a natural healthy bone consistency, a natural healthy articular cartilage consistency, and a natural healthy synovium consistency.

31. The device of claim **17**, wherein said device is formed of a biodegradable material.

32. The device of claim **17**, comprising at least one connection between two sides of the device other than at its edge, the connection defining a maximum expansion volume of said device.

33. The device of claim **17**, comprising a mesh or other surface adapted to adhere or cause adherence to a joint face.

34. The device of claim **17**, wherein said device comprises a smooth surface adapted to allow a humeral head to slide on.

35. The device of claim **17**, wherein said device comprises a smooth surface adapted to allow a glenoid to slide on.

36. The device of claim **17**, comprising an anti-adhesive layer adapted to prevent bone adhesion.

37. The device of claim **17**, comprising at least one anchor adapted for attaching said device to a joint portion.

38. The device of claim **37**, wherein said at least one anchor comprises an anchor adapted for attaching said device to a bone.

39. The device of claim **37**, wherein said at least one anchor comprises an anchor adapted for attaching said device to a labrum section.

40. The device of claim **17**, comprising a sleeve for surrounding said implant during implantation and a deployment tube incorporating at least one of a seal and a valve for passage of fluid into said device during implantation thereof.

41. A device according to claim **17**, comprising a second section, connected to said device by a bridge, which second section is adapted to provide a bursa function to a shoulder joint.

42. A device according to claim **41**, wherein said bridge comprises a valve.

43-49. (canceled)

50. The device of claim **20**, comprising a smooth surface adapted to allow a humeral head to slide on.

51. The device of claim **20**, comprising a smooth surface adapted to allow a glenoid to slide on.

* * * * *