



(12) **United States Patent**
Qi et al.

(10) **Patent No.:** **US 11,917,373 B2**
(45) **Date of Patent:** **Feb. 27, 2024**

(54) **SYSTEMS AND METHODS FOR SUPPRESSING SOUND LEAKAGE**

(71) Applicant: **SHENZHEN SHOKZ CO., LTD.**,
Guangdong (CN)

(72) Inventors: **Xin Qi**, Shenzhen (CN); **Fengyun Liao**,
Shenzhen (CN); **Jinbo Zheng**,
Shenzhen (CN); **Qian Chen**, Shenzhen
(CN); **Hao Chen**, Shenzhen (CN)

(73) Assignee: **SHENZHEN SHOKZ CO., LTD.**,
Shenzhen (CN)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/187,693**

(22) Filed: **Mar. 22, 2023**

(65) **Prior Publication Data**

US 2023/0232167 A1 Jul. 20, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/807,154, filed on
Jun. 16, 2022, now Pat. No. 11,632,637, which is a
(Continued)

(30) **Foreign Application Priority Data**

Jan. 6, 2014 (CN) 201410005804

(51) **Int. Cl.**

H04R 25/00 (2006.01)
H04R 1/28 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **H04R 25/05** (2013.01); **G10K 9/13**
(2013.01); **G10K 9/22** (2013.01); **G10K 11/175**
(2013.01);

(Continued)

(58) **Field of Classification Search**

CPC H04R 1/1016; H04R 1/44; H04R 2420/07;
H04R 1/02; H04R 1/26; H04R 1/1075;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,075,196 A 3/1937 Hand
2,327,320 A 8/1943 Shapiro

(Continued)

FOREIGN PATENT DOCUMENTS

CN 201616895 U 10/2010
CN 201690580 U 12/2010

(Continued)

OTHER PUBLICATIONS

Paula Henry et al., Bone Conduction: Anatomy, Physiology, and
Communication, Army Research Laboratory, 2007, 206 pages.

(Continued)


Primary Examiner — Amir H Etesam

(74) *Attorney, Agent, or Firm* — METIS IP LLC

(57) **ABSTRACT**

A speaker comprises a housing, a transducer residing inside
the housing, and at least one sound guiding hole located on
the housing. The transducer generates vibrations. The vibra-
tions produce a sound wave inside the housing and cause a
leaked sound wave spreading outside the housing from a
portion of the housing. The at least one sound guiding hole
guides the sound wave inside the housing through the at least
one sound guiding hole to an outside of the housing. The
guided sound wave interferes with the leaked sound wave in
a target region. The interference at a specific frequency
relates to a distance between the at least one sound guiding
hole and the portion of the housing.

20 Claims, 25 Drawing Sheets

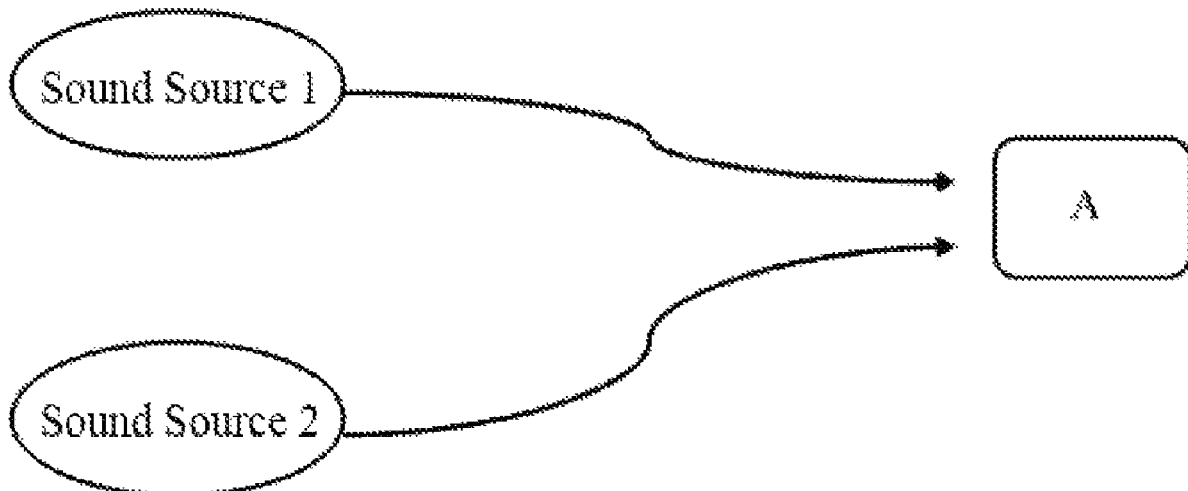

Related U.S. Application Data

continuation of application No. 17/170,913, filed on Feb. 9, 2021, now Pat. No. 11,368,800, which is a continuation-in-part of application No. 17/074,762, filed on Oct. 20, 2020, now Pat. No. 11,197,106, which is a continuation-in-part of application No. 16/813,915, filed on Mar. 10, 2020, now Pat. No. 10,848,878, which is a continuation of application No. 16/419,049, filed on May 22, 2019, now Pat. No. 10,616,696, which is a continuation of application No. 16/180,020, filed on Nov. 5, 2018, now Pat. No. 10,334,372, which is a continuation of application No. 15/650,909, filed on Jul. 16, 2017, now Pat. No. 10,149,071, which is a continuation of application No. 15/109,831, filed as application No. PCT/CN2014/094065 on Dec. 17, 2014, now Pat. No. 9,729,978, said application No. 17/170,913 is a continuation-in-part of application No. 16/833,839, filed on Mar. 30, 2020, now Pat. No. 11,399,245, which is a continuation of application No. 15/752,452, filed as application No. PCT/CN2015/086907 on Aug. 13, 2015, now Pat. No. 10,609,496.

- (51) **Int. Cl.**
H04R 9/06 (2006.01)
G10K 9/13 (2006.01)
G10K 9/22 (2006.01)
G10K 11/26 (2006.01)
G10K 11/175 (2006.01)
G10K 11/178 (2006.01)
H04R 1/34 (2006.01)
H04R 17/00 (2006.01)
- (52) **U.S. Cl.**
 CPC *G10K 11/178* (2013.01); *G10K 11/26* (2013.01); *H04R 1/288* (2013.01); *H04R 1/2811* (2013.01); *H04R 1/2849* (2013.01); *H04R 1/345* (2013.01); *H04R 9/066* (2013.01); *G10K 2210/3216* (2013.01); *H04R 1/2876* (2013.01); *H04R 17/00* (2013.01); *H04R 2460/13* (2013.01)
- (58) **Field of Classification Search**
 CPC H04R 1/1091; H04R 1/1041; H04R 2460/13; H04R 1/1066; H04R 1/105
 See application file for complete search history.

2003/0012395	A1	1/2003	Fukuda	
2003/0048913	A1	3/2003	Lee et al.	
2004/0105566	A1	6/2004	Matsunaga et al.	
2004/0131219	A1	7/2004	Polk, Jr.	
2005/0251952	A1	11/2005	Johnson	
2006/0098829	A1	5/2006	Kobayashi	
2006/0165246	A1	7/2006	Lee et al.	
2007/0041595	A1	2/2007	Carazo et al.	
2007/0053536	A1	3/2007	Westerkull	
2009/0095613	A1	4/2009	Lin	
2009/0208031	A1	8/2009	Abolfathi	
2009/0209806	A1	8/2009	Hakansson	
2009/0245553	A1	10/2009	Parker	
2009/0285417	A1	11/2009	Shin et al.	
2009/0290730	A1	11/2009	Fukuda et al.	
2010/0054492	A1	3/2010	Eaton et al.	
2010/0322454	A1	12/2010	Ambrose et al.	
2010/0329485	A1	12/2010	Fukuda	
2011/0150262	A1*	6/2011	Nakama	H04R 1/1008 381/370
2012/0020501	A1	1/2012	Lee	
2012/0070022	A1	3/2012	Saiki	
2012/0177206	A1	7/2012	Yamagishi et al.	
2013/0163791	A1	6/2013	Qi et al.	
2013/0329919	A1	12/2013	He	
2014/0009008	A1	1/2014	Li et al.	
2014/0064533	A1	3/2014	Kasic, II	
2014/0185822	A1	7/2014	Kunimoto et al.	
2014/0185837	A1	7/2014	Kunimoto et al.	
2014/0274229	A1	9/2014	Fukuda	
2014/0355777	A1	12/2014	Nabata et al.	
2015/0030189	A1	1/2015	Nabata et al.	
2015/0208183	A1	7/2015	Bern	
2015/0256656	A1	9/2015	Horii	
2015/0264473	A1	9/2015	Fukuda	
2015/0326967	A1	11/2015	Otani	
2016/0037243	A1	2/2016	Lippert et al.	
2016/0127841	A1	5/2016	Hori	
2016/0150337	A1	5/2016	Nandy	
2016/0165357	A1	6/2016	Morishita et al.	
2016/0295328	A1	10/2016	Park	
2016/0329041	A1	11/2016	Qi et al.	
2017/0201823	A1	7/2017	Shetye et al.	
2017/0223445	A1	8/2017	Bullen et al.	
2018/0167710	A1	6/2018	Silver et al.	
2018/0182370	A1	6/2018	Hyde et al.	
2019/0014425	A1	1/2019	Liao et al.	
2019/0052954	A1	2/2019	Rusconi Clerici Beltrami et al.	
2019/0238971	A1	8/2019	Wakeland et al.	
2020/0367008	A1	11/2020	Walsh et al.	
2021/0099027	A1	4/2021	Larsson et al.	
2021/0219059	A1	7/2021	Qi et al.	

FOREIGN PATENT DOCUMENTS

- (56) **References Cited**
 U.S. PATENT DOCUMENTS
 4,987,597 A 1/1991 Haertl
 5,430,803 A 7/1995 Kimura et al.
 5,673,328 A 9/1997 Wandl et al.
 5,692,059 A 11/1997 Kruger
 5,757,935 A 5/1998 Kang et al.
 5,790,684 A 8/1998 Niino et al.
 6,850,138 B1 2/2005 Sakai
 7,639,825 B2 12/2009 Fukuda
 8,141,678 B2 3/2012 Ikeyama et al.
 8,340,334 B2 12/2012 Suyama
 8,345,915 B2 1/2013 Shin et al.
 9,226,075 B2 12/2015 Lee
 9,253,563 B2 2/2016 Fukuda
 9,729,978 B2 8/2017 Qi et al.
 10,149,071 B2 12/2018 Qi et al.
 10,334,372 B2 6/2019 Qi et al.
 10,616,696 B2 4/2020 Qi et al.
 10,631,075 B1 4/2020 Patil et al.
 10,897,677 B2 1/2021 Walraevens et al.
 11,197,106 B2 12/2021 Qi et al.

CN	102014328	A	4/2011
CN	102421043	A	4/2012
CN	202435600	U	9/2012
CN	103167390	A	6/2013
CN	103347235	A	10/2013
CN	204206450	U	3/2015
CN	105007551	A	10/2015
CN	105101019	A	11/2015
CN	105101020	A	11/2015
CN	105142077	A	12/2015
CN	204887455	U	12/2015
CN	205142506	U	4/2016
EP	1261232	A1	11/2002
EP	1404146	A1	3/2004
EP	1603362	A1	12/2005
EP	2779684	A1	9/2014
EP	2011367	B1	12/2014
JP	S5574290	A	6/1980
JP	07007797	A	1/1995
JP	2003264882	A	9/2003
JP	2004064457	A	2/2004
JP	2004158961	A	6/2004
JP	2005151183	A	6/2005
JP	2006025333	A	1/2006

(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP	2006332715	A	12/2006
JP	2007129384	A	5/2007
JP	2007251358	A	9/2007
JP	2008017398	A	1/2008
JP	2011160175	A	8/2011
JP	2013055571	A	3/2013
JP	2013243564	A	12/2013
JP	2014072555	A	4/2014
KR	20010111653	A	12/2001
KR	20050030183	A	3/2005
KR	20070122104	A	12/2007
KR	20090082999	A	8/2009
KR	20110037483	A	4/2011
KR	200476572	Y1	3/2015
WO	2004095878	A2	11/2004
WO	2006088410	A1	8/2006
WO	2007034739	A1	3/2007

OTHER PUBLICATIONS

Notice of Reasons for Rejection in Japanese Application No. 2020088413 dated Apr. 4, 2023, 8 pages.
 Office Action in Brazilian Application No. 112018002854-1 dated Feb. 24, 2023, 8 pages.
 Decision of Patent Grant in Korean Application No. 10-2016-7017110 dated Jun. 14, 2018, 3 pages.
 International Search Report in PCT/CN2014/094065 dated Mar. 17, 2015, 5 pages.
 First Office Action in Chinese application No. 201410005804.0 dated Dec. 17, 2015, 10 pages.
 Communication Pursuant to Article 94(3) EPC in European Application No. 14877111.6 dated Apr. 23, 2018, 6 pages.
 Notice of Reasons for Rejection in Japanese Application No. 2016-545828 dated Oct. 10, 2017, 6 pages.
 Decision to Grant a Patent in Japanese Application No. 2016-545828 dated Jan. 16, 2018, 5 pages.
 The Extended European Search Report in European Application No. 14877111.6 dated Mar. 17, 2017, 6 pages.
 First Examination Report in Indian Application No. 201617026062 dated Nov. 13, 2020, 6 pages.

Written Opinion in PCT/CN2014/094065 dated Mar. 17, 2015, 10 pages.
 International Search Report in PCT/CN2015/086907 dated May 6, 2016, 12 pages.
 The Extended European Search Report in European Application No. 15900793.9 dated May 17, 2018, 9 pages.
 Communication Pursuant to Article 94(3) EPC in European Application No. 15900793.9 dated Apr. 10, 2019, 6 pages.
 Notice of Reasons for Rejection in Japanese Application No. 2018146019 dated Jul. 23, 2019, 10 pages.
 Notice of Reasons for Rejection in Japanese Application No. 2018146021 dated Jul. 30, 2019, 11 pages.
 Notice of Reasons for Rejection in Japanese Application No. 2018-506985 dated Sep. 3, 2019, 10 pages.
 Decision of Final Rejection in Japanese Application No. 2018-146019 dated Jan. 21, 2020, 9 pages.
 Communication Pursuant to Article 94(3) EPC in European Application No. 15900793.9 dated Apr. 28, 2020, 9 pages.
 Decision to Grant a Patent in Japanese Application No. 2018-146021 dated Jul. 21, 2020, 6 pages.
 Notice of Reasons for Rejection in Japanese Application No. 2020-088413 dated Aug. 3, 2021, 7 pages.
 M. Gripper et al., Using the Callsign Acquisition Test (CAT) to Compare the Speech Intelligibility of Air Versus Bone Conduction, *International Journal of Industrial Ergonomics*, 37(7): 631-641, 2007.
 Martin L. Lenhardt et al., Measurement of Bone Conduction Levels for High Frequencies, *International Tinnitus Journal*, 8(1): 9-12, 2002.
 The Extended European Search Report in European Application No. 21186537.3 dated Nov. 9, 2021, 9 pages.
 Notice of Preliminary Rejection in Korean Application No. 10-2022-7003237 dated Apr. 13, 2022, 14 pages.
 Notice of Reasons for Rejection in Japanese Application No. 2020-088413 dated Sep. 6, 2022, 11 pages.
 Notice of Reasons for Rejection in Japanese Application No. 2021-179711 dated Oct. 18, 2022, 9 pages.
 Notice of Preliminary Rejection in Korean Application No. 10-2022-7003237 dated Oct. 11, 2022, 14 pages.

* cited by examiner

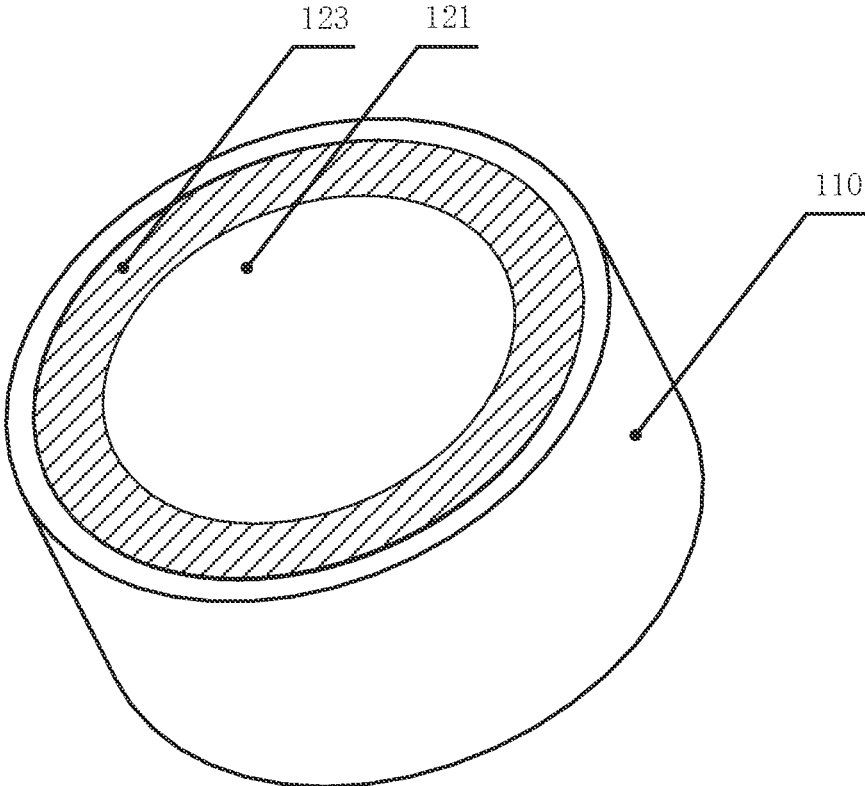


FIG. 1A

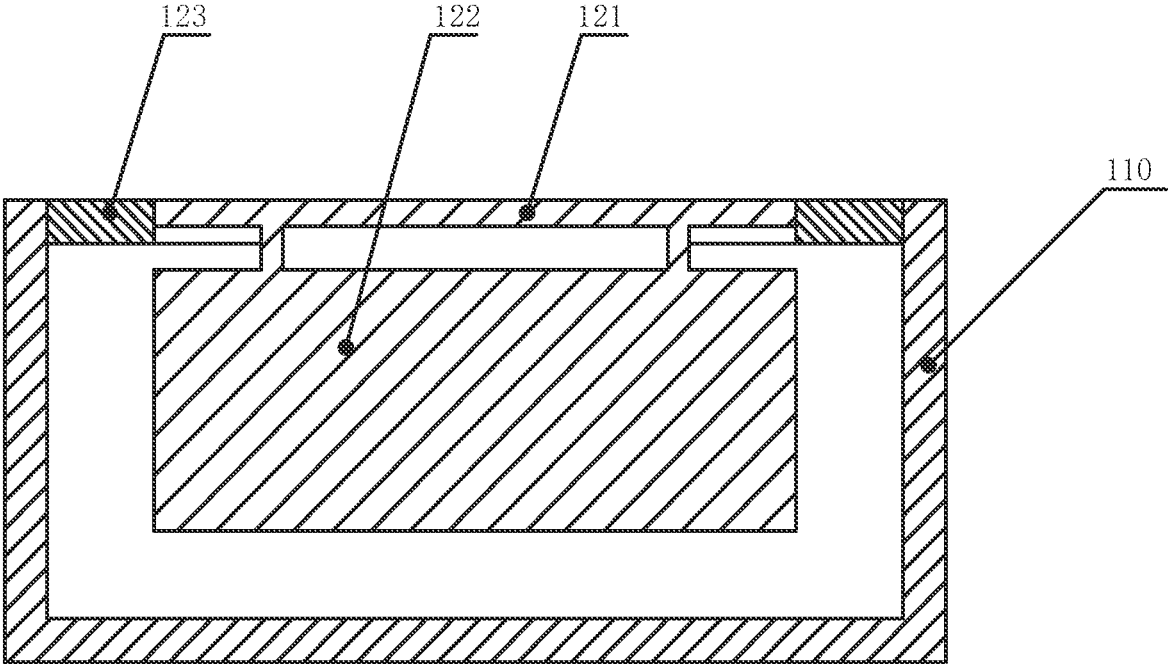


FIG. 1B

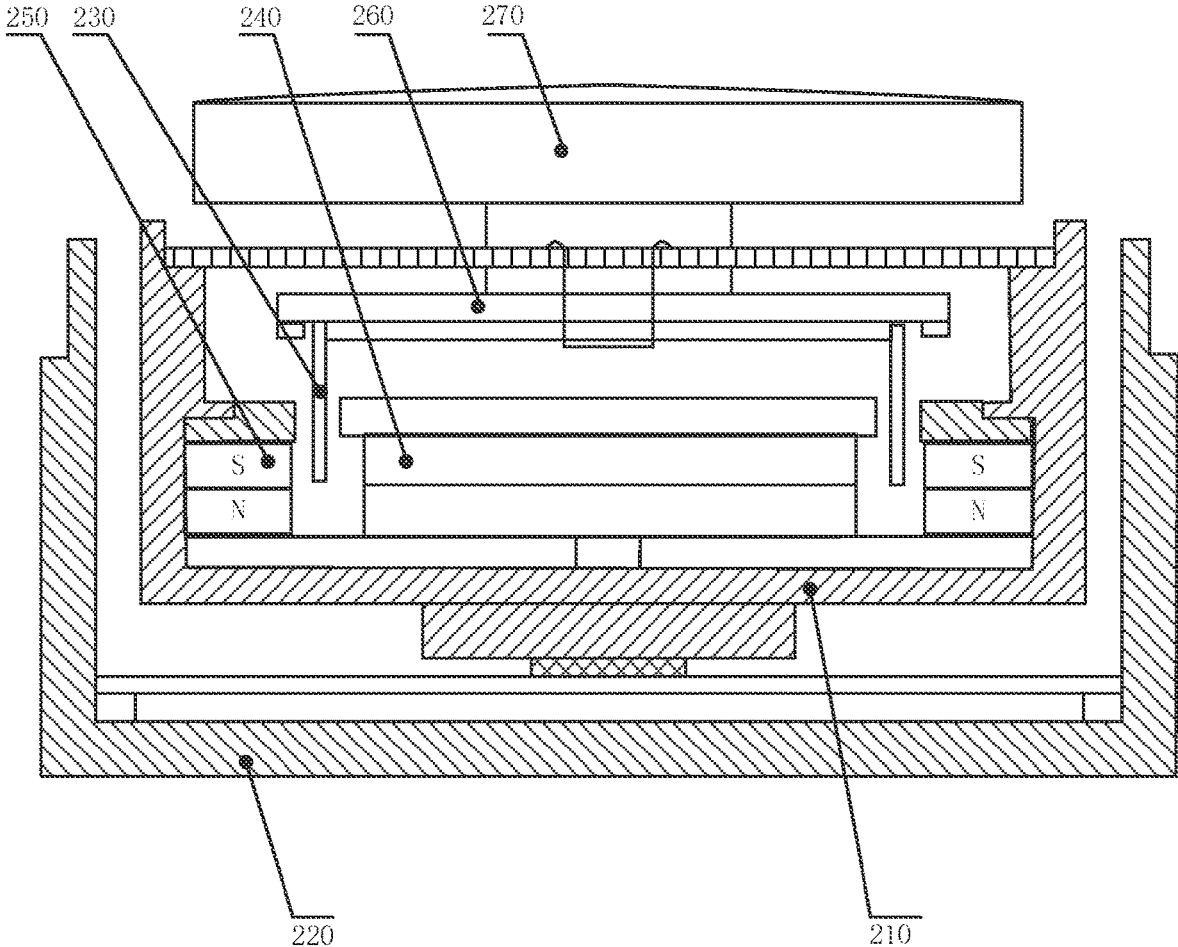


FIG. 2

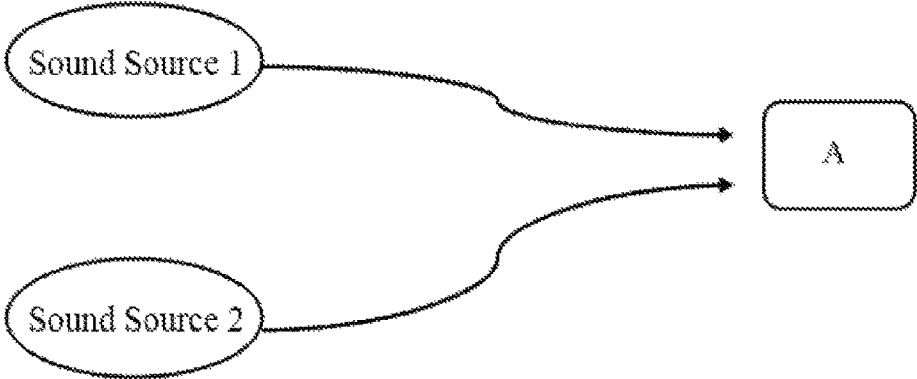


FIG. 3

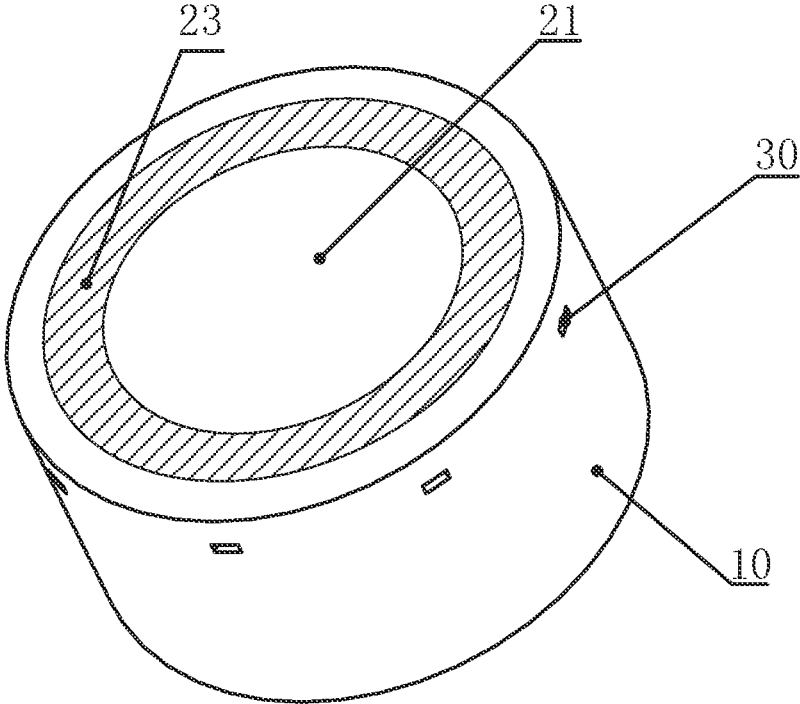


FIG. 4A

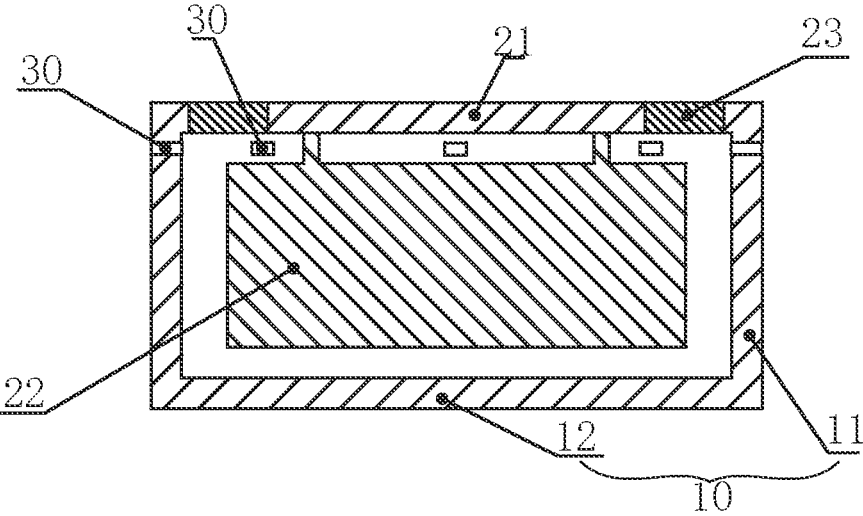


FIG. 4B

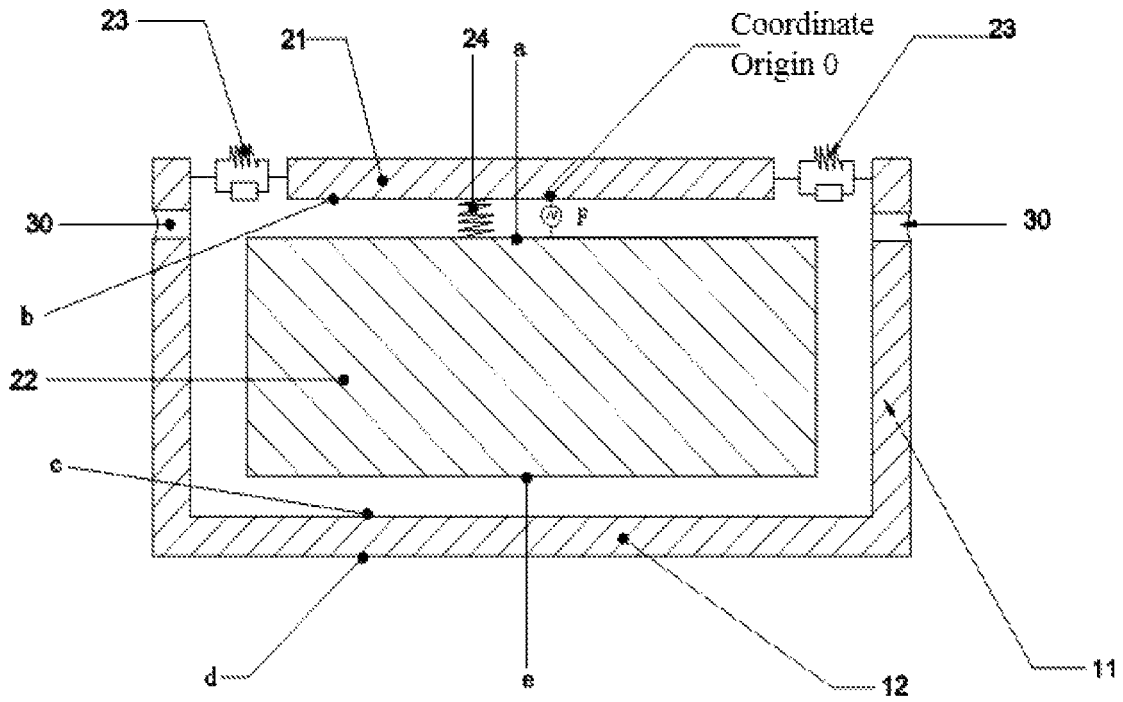


FIG. 4C

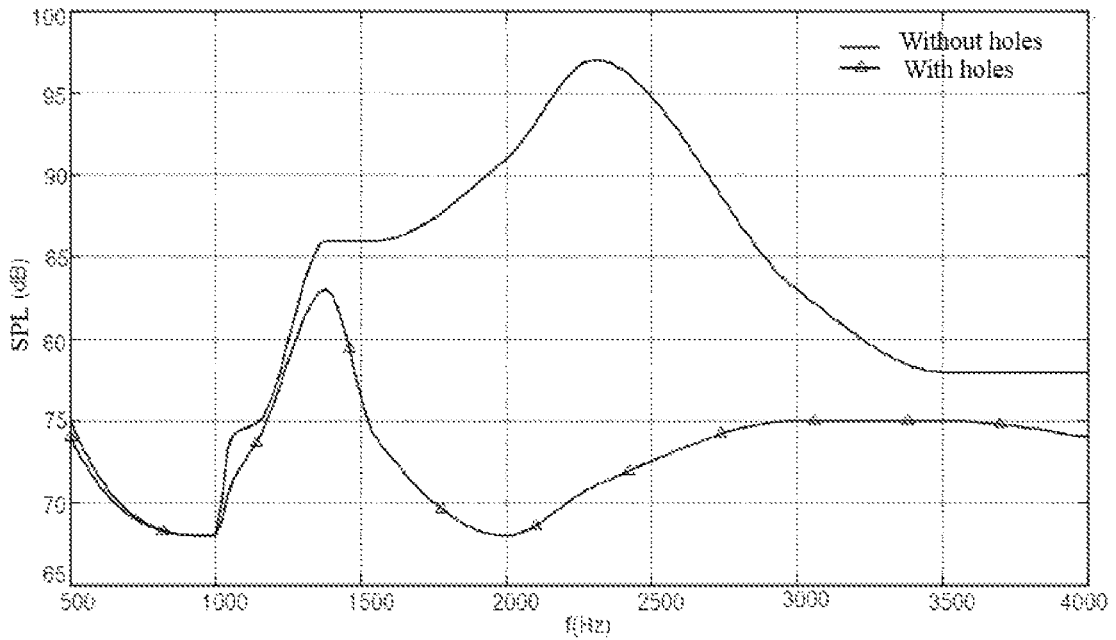


FIG. 4D

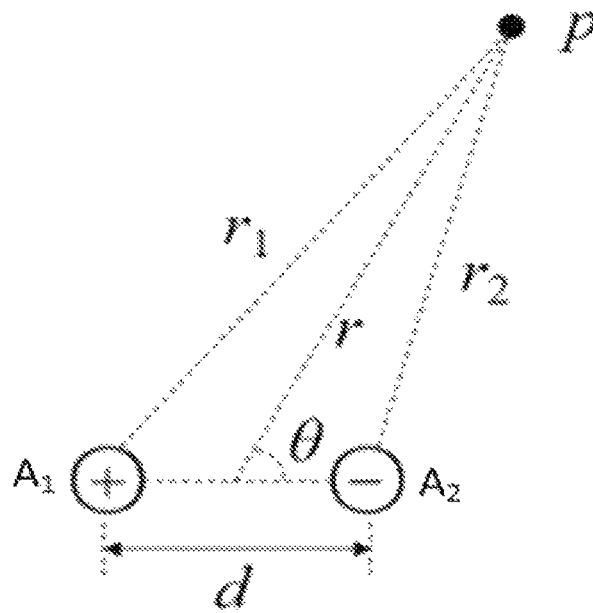


FIG. 4E

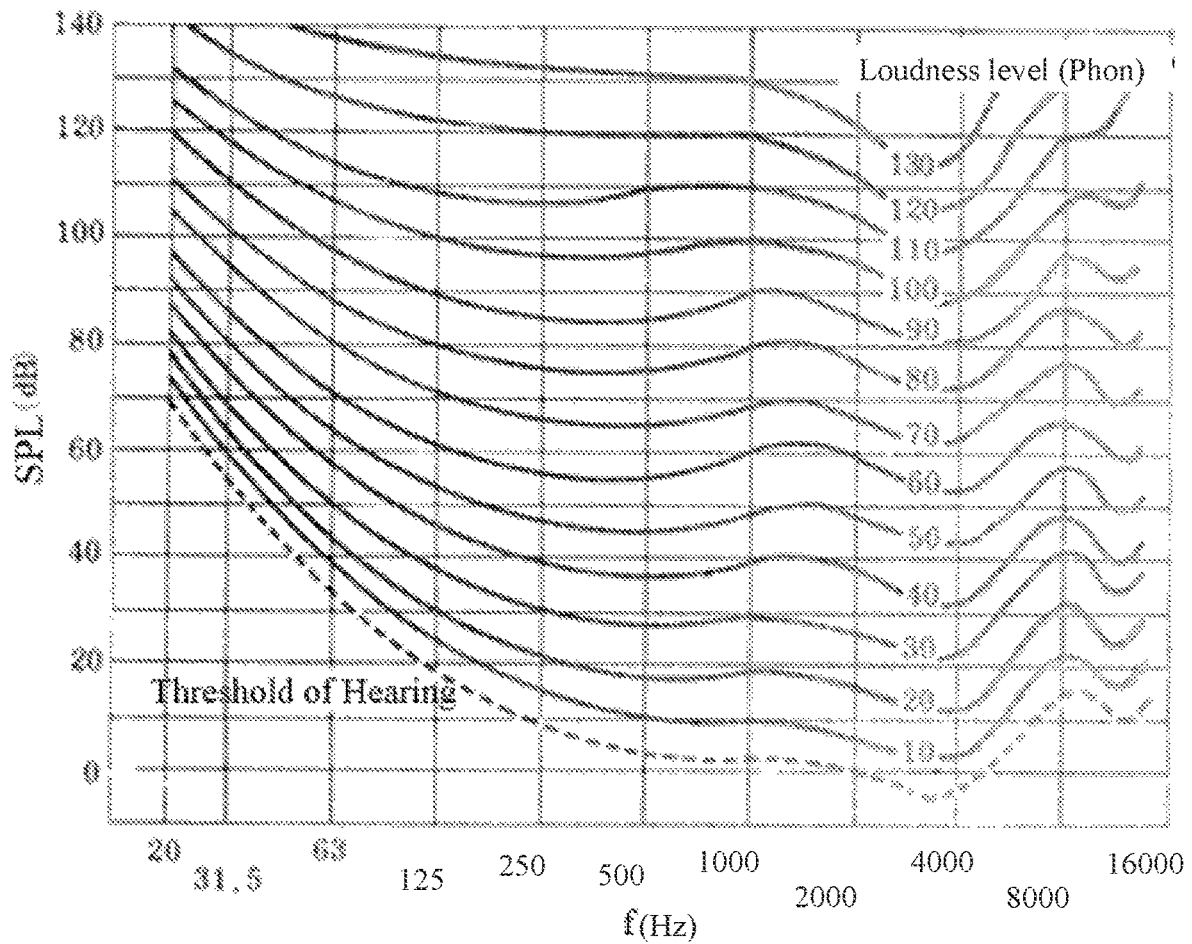


FIG. 5

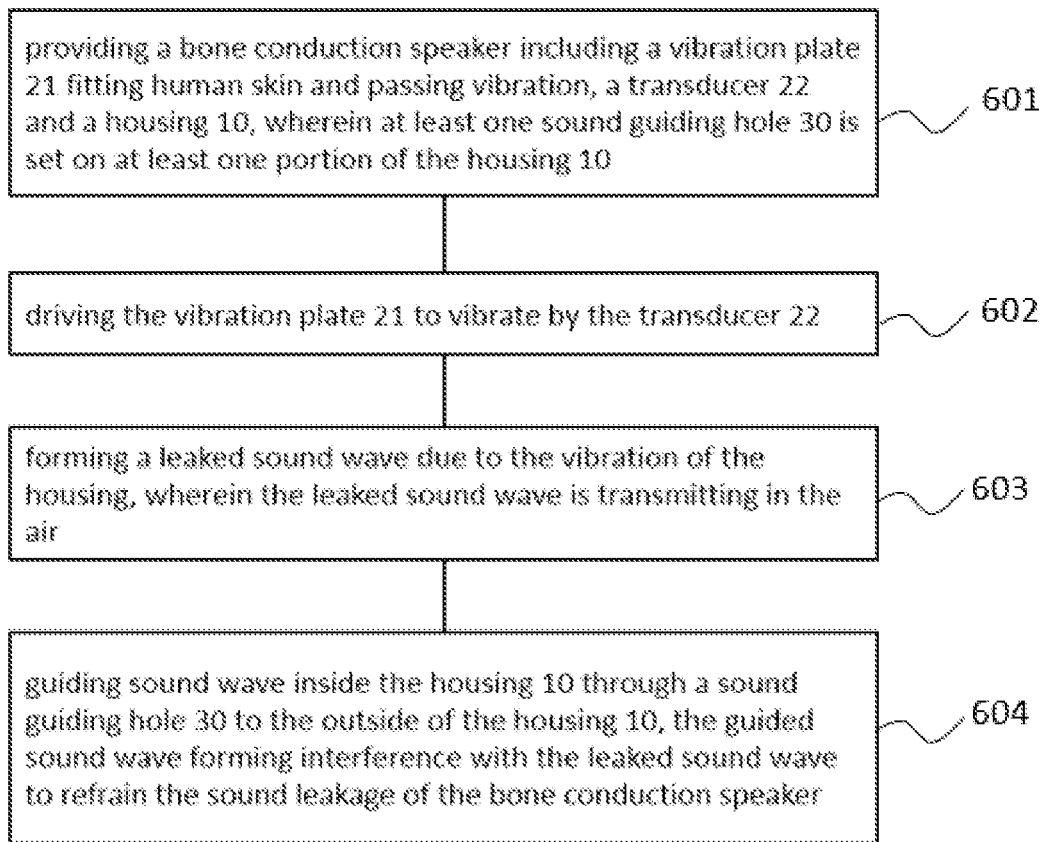


FIG. 6

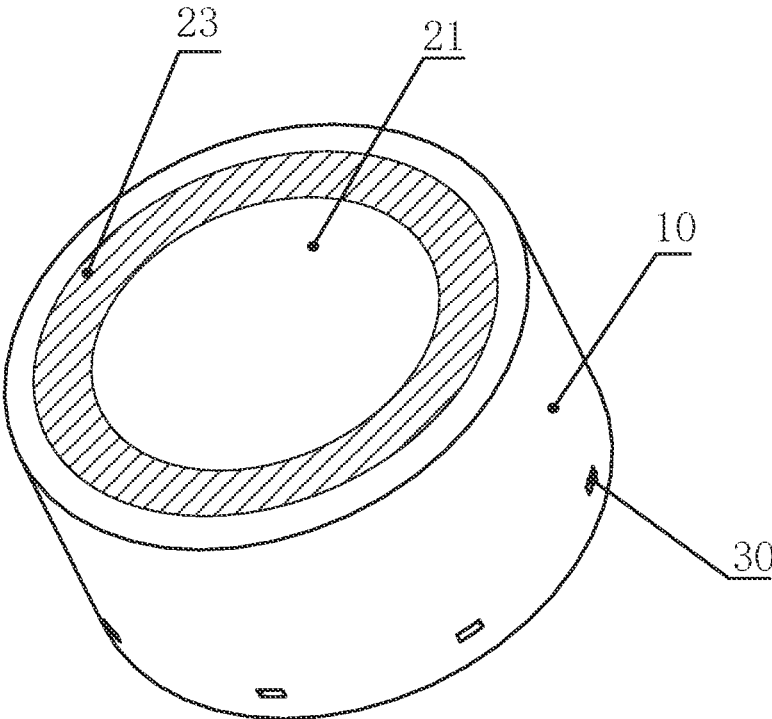


FIG. 7A

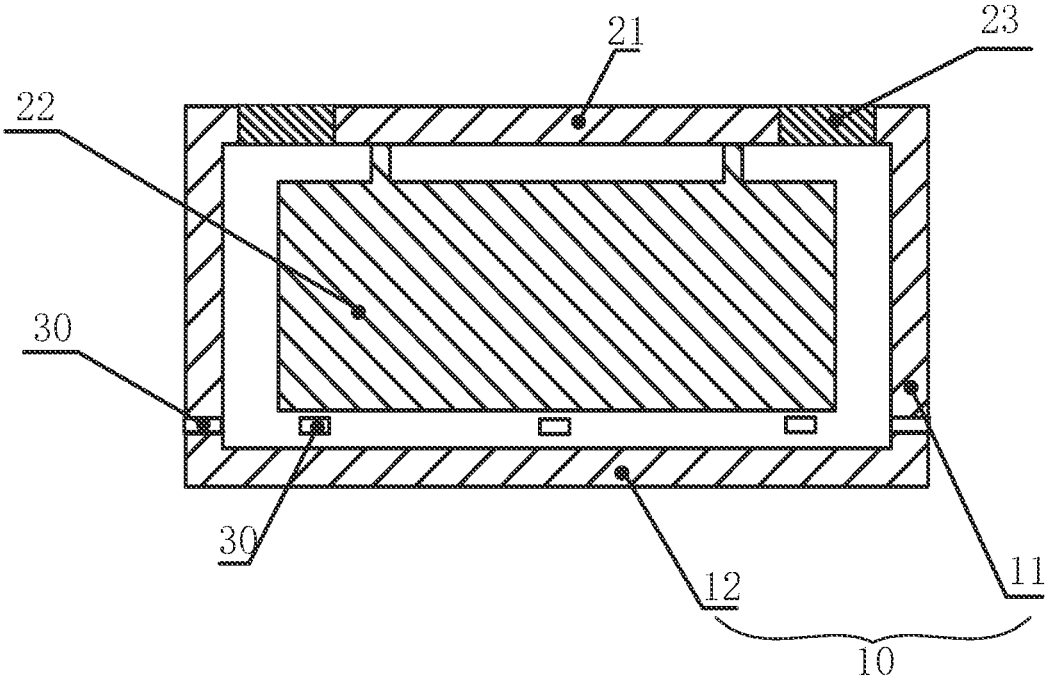


FIG. 7B

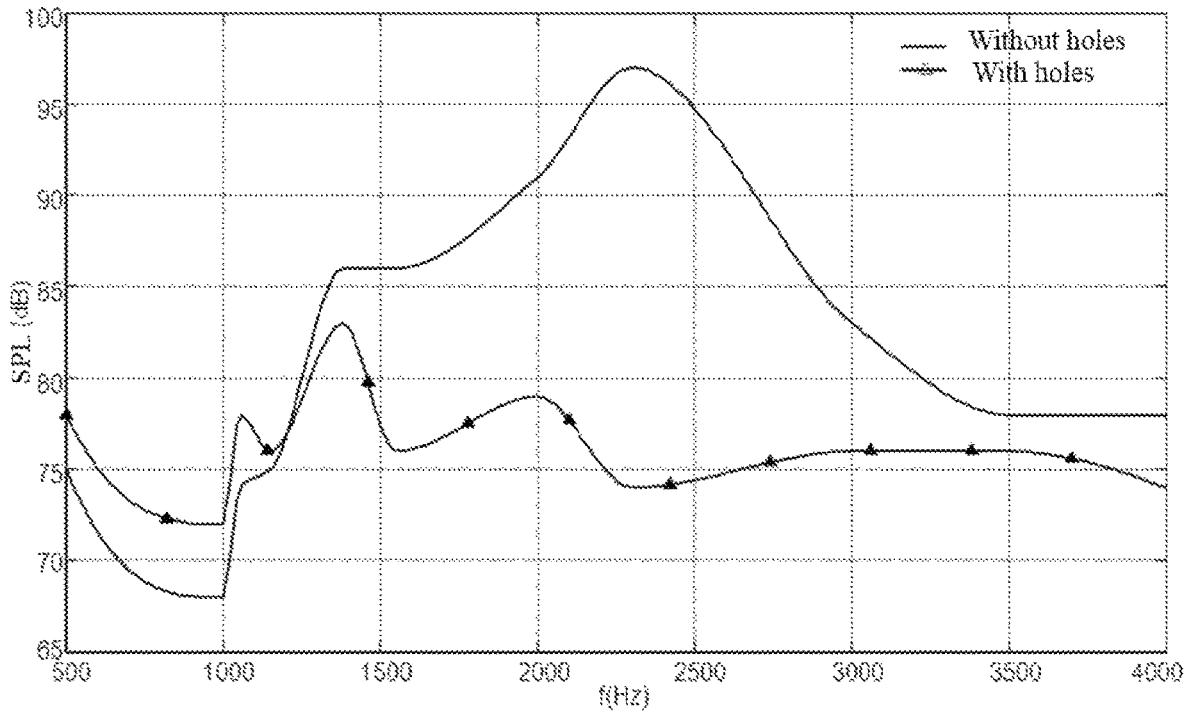


FIG. 7C

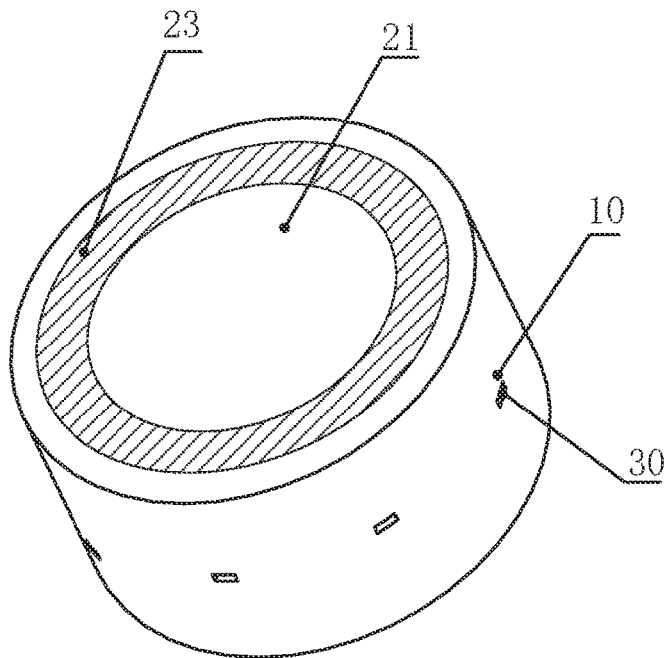


FIG. 8A

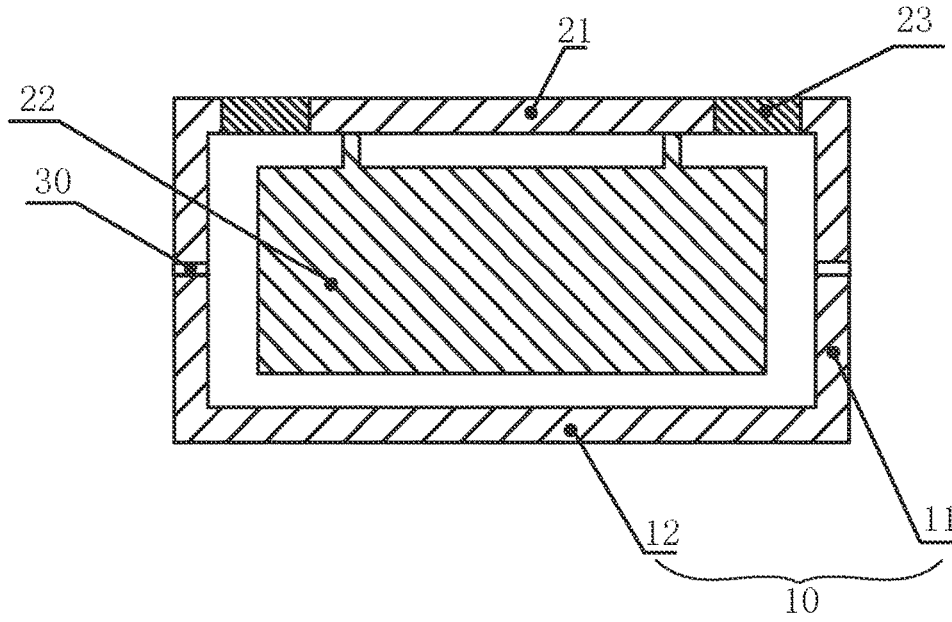


FIG. 8B

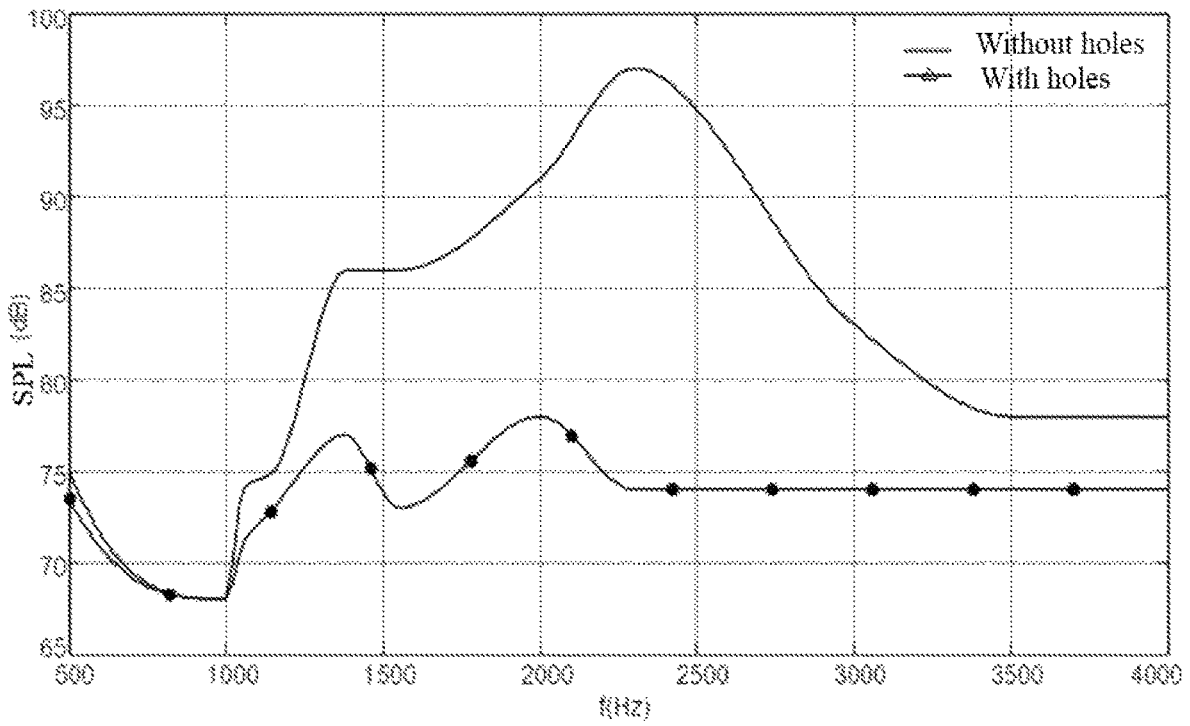


FIG. 8C

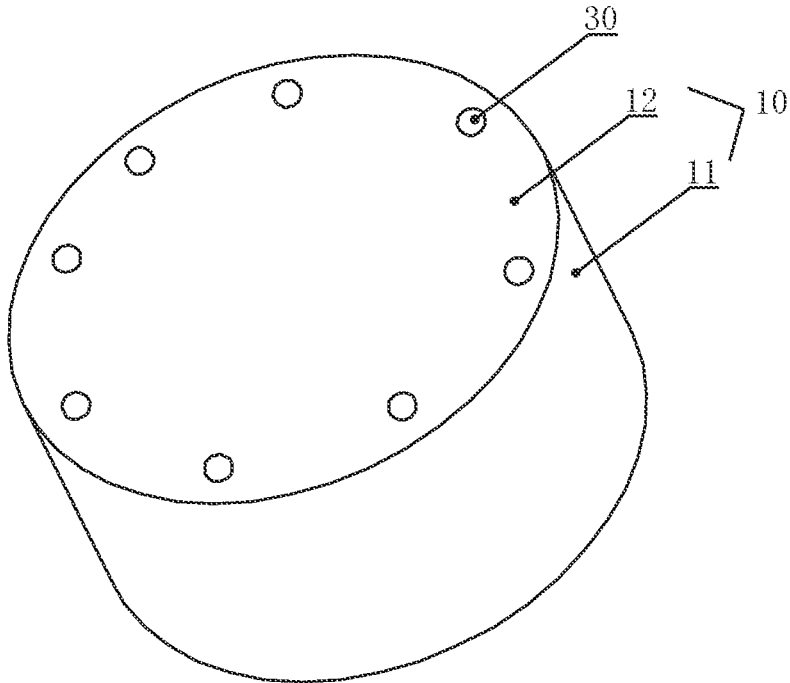


FIG. 9A

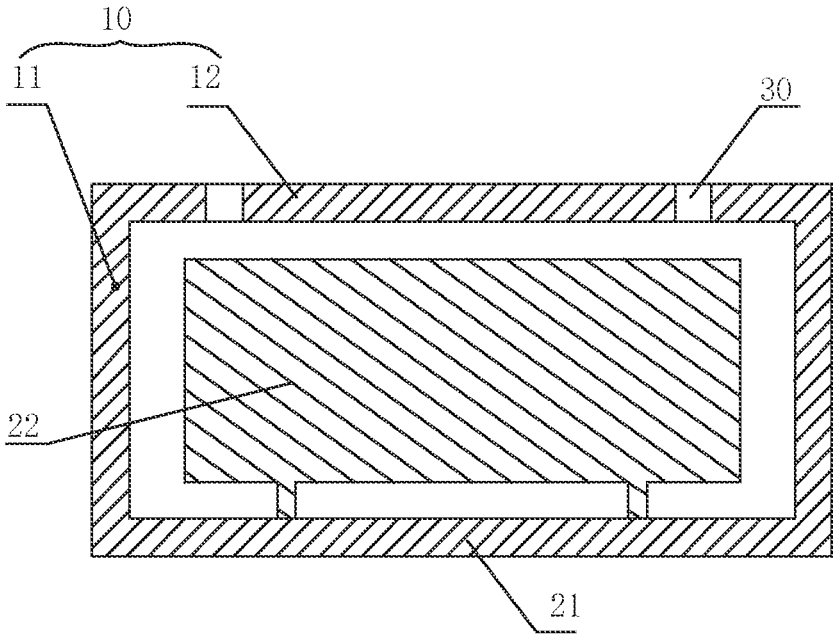


FIG. 9B

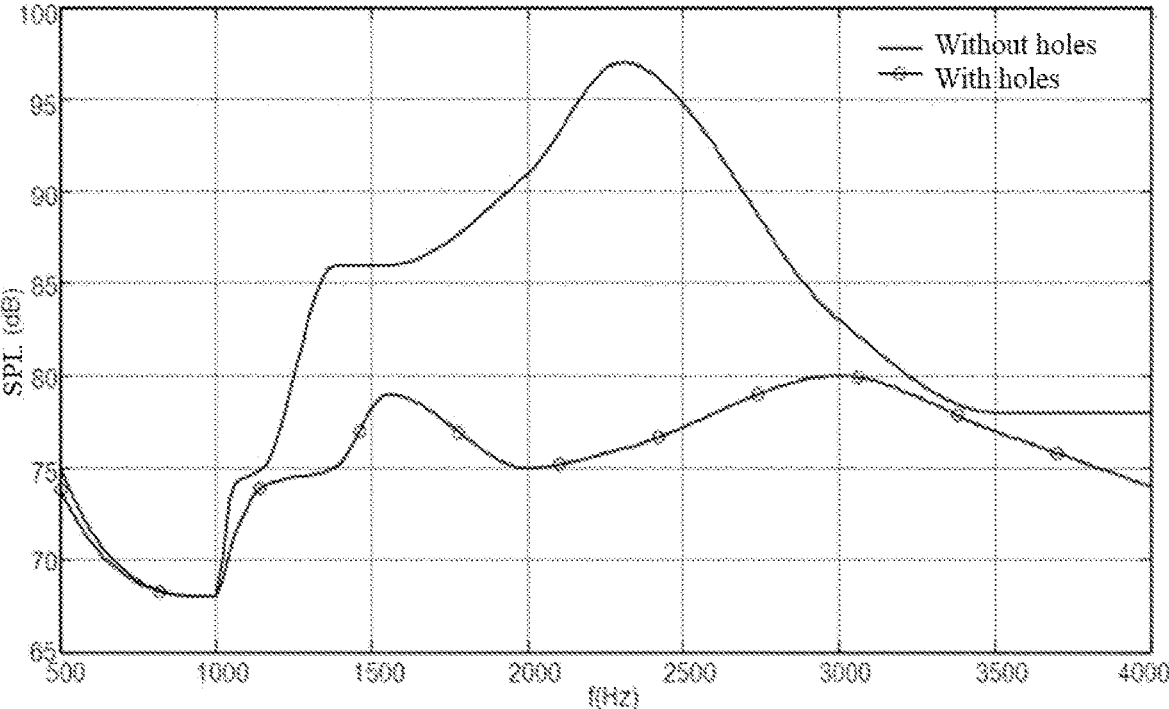


FIG. 9C

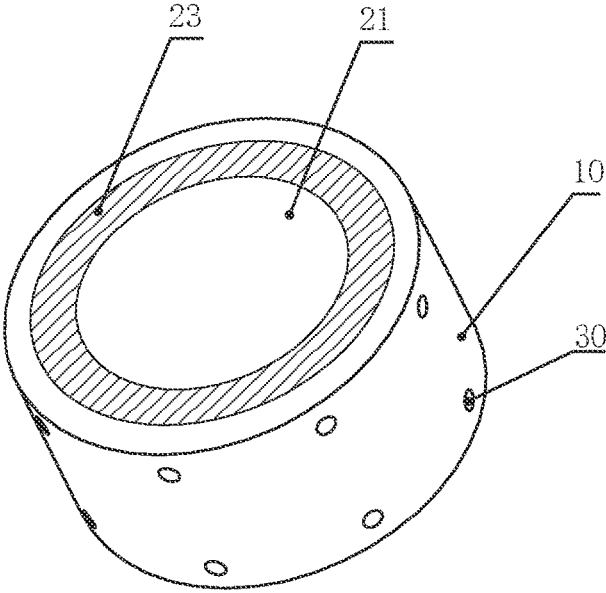


FIG. 10A

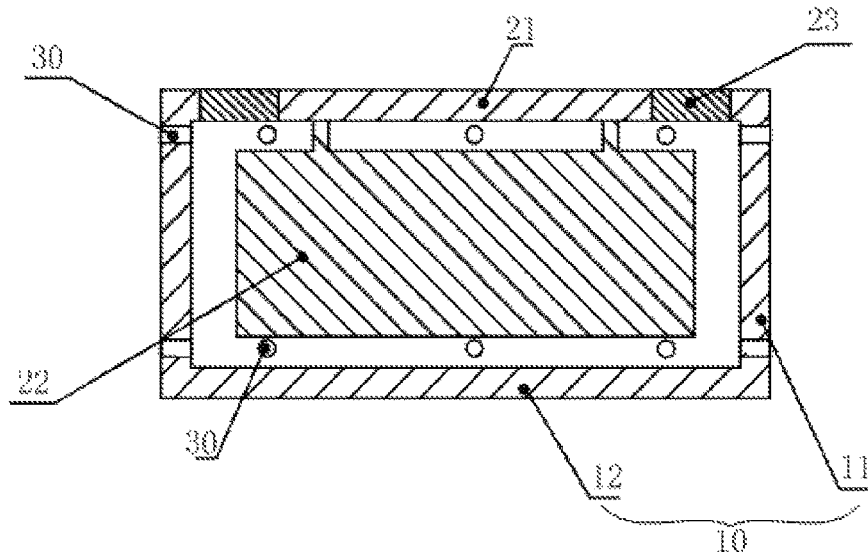


FIG. 10B

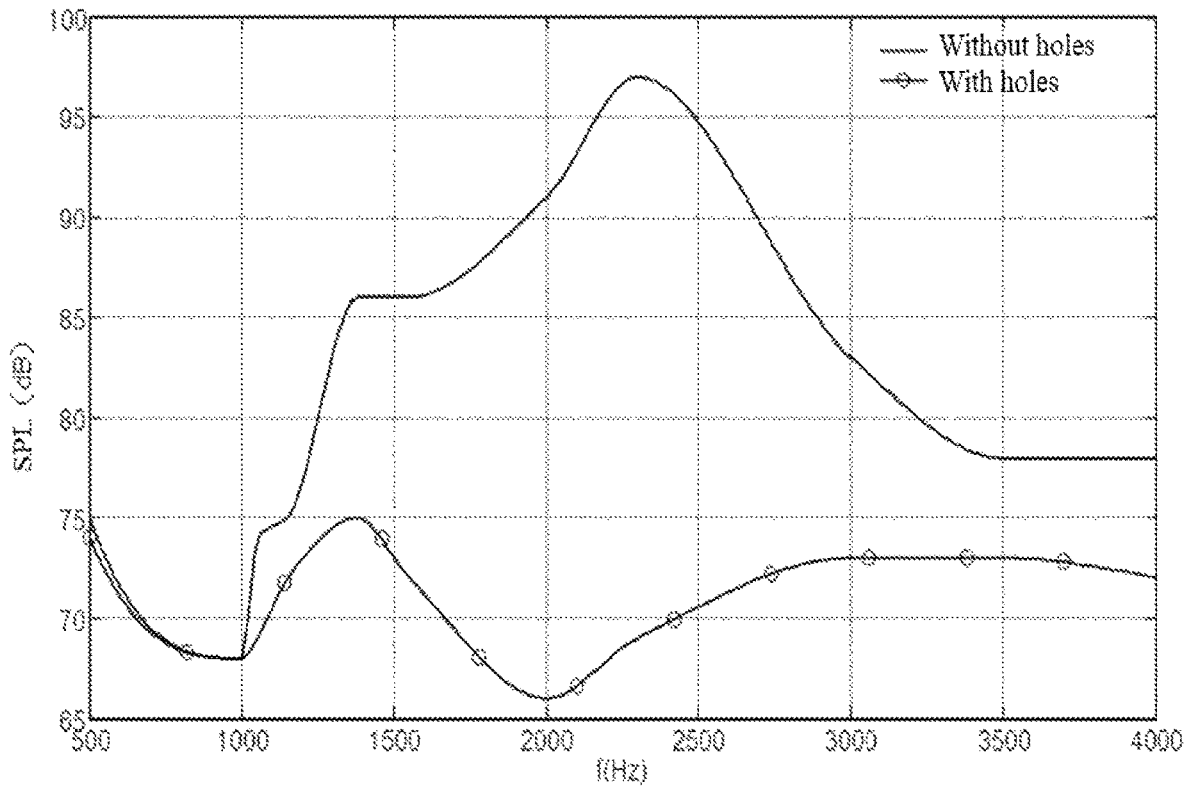


FIG. 10C

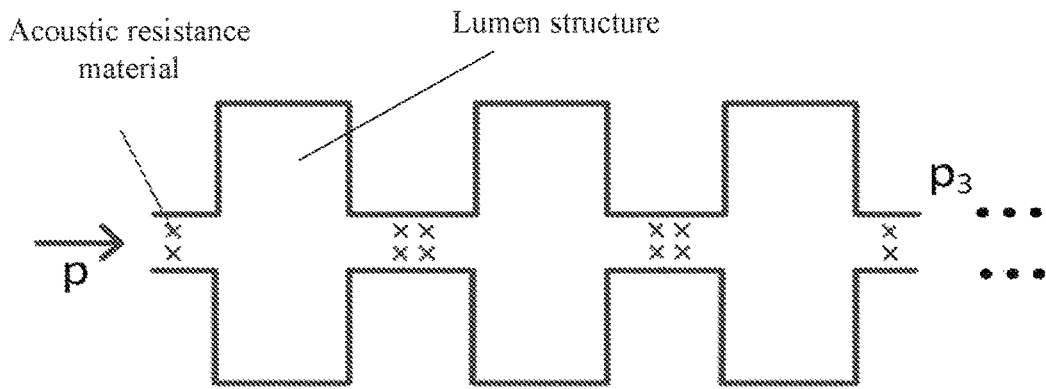


FIG. 10D

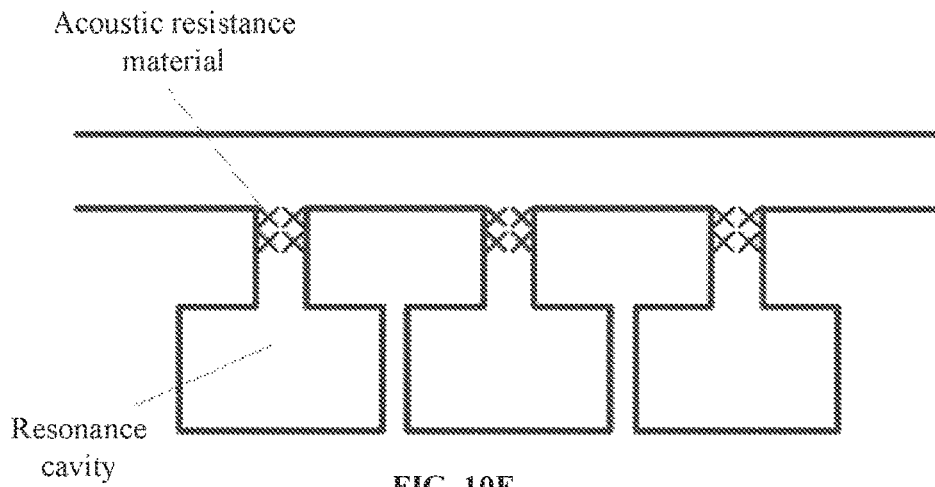


FIG. 10E

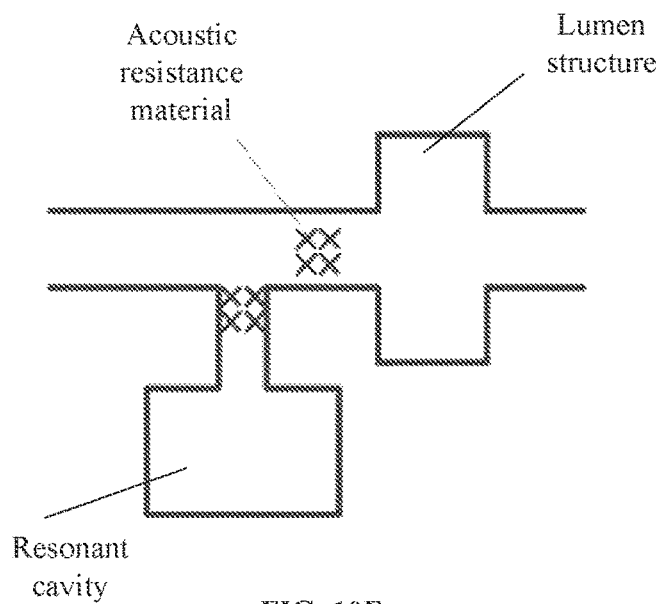


FIG. 10F

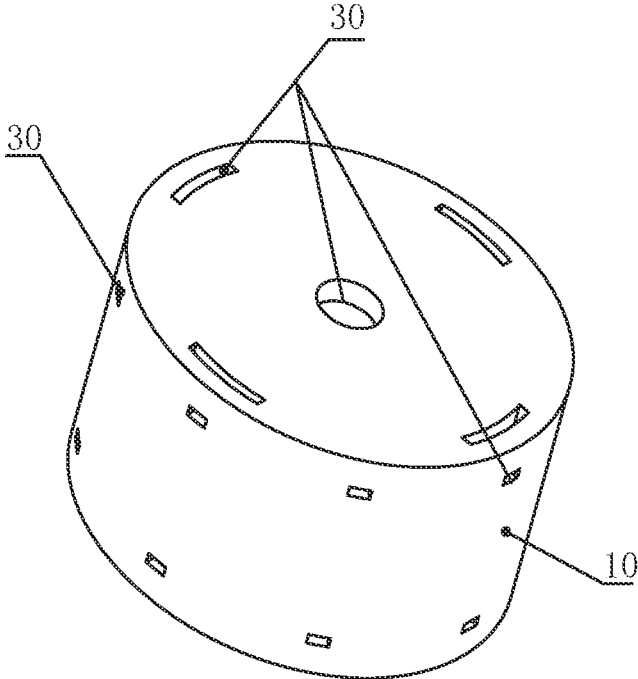


FIG. 11A

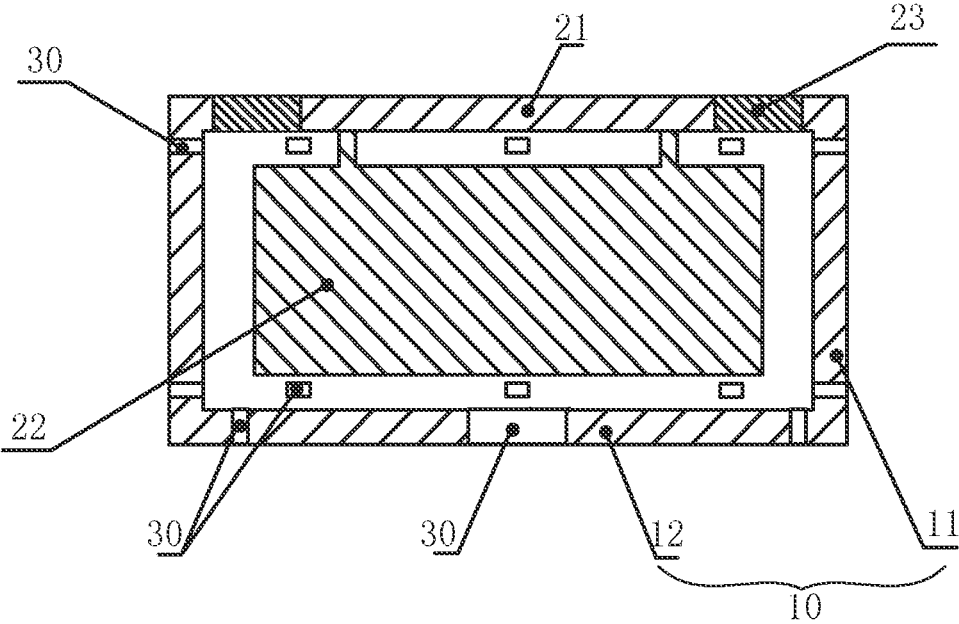


FIG. 11B

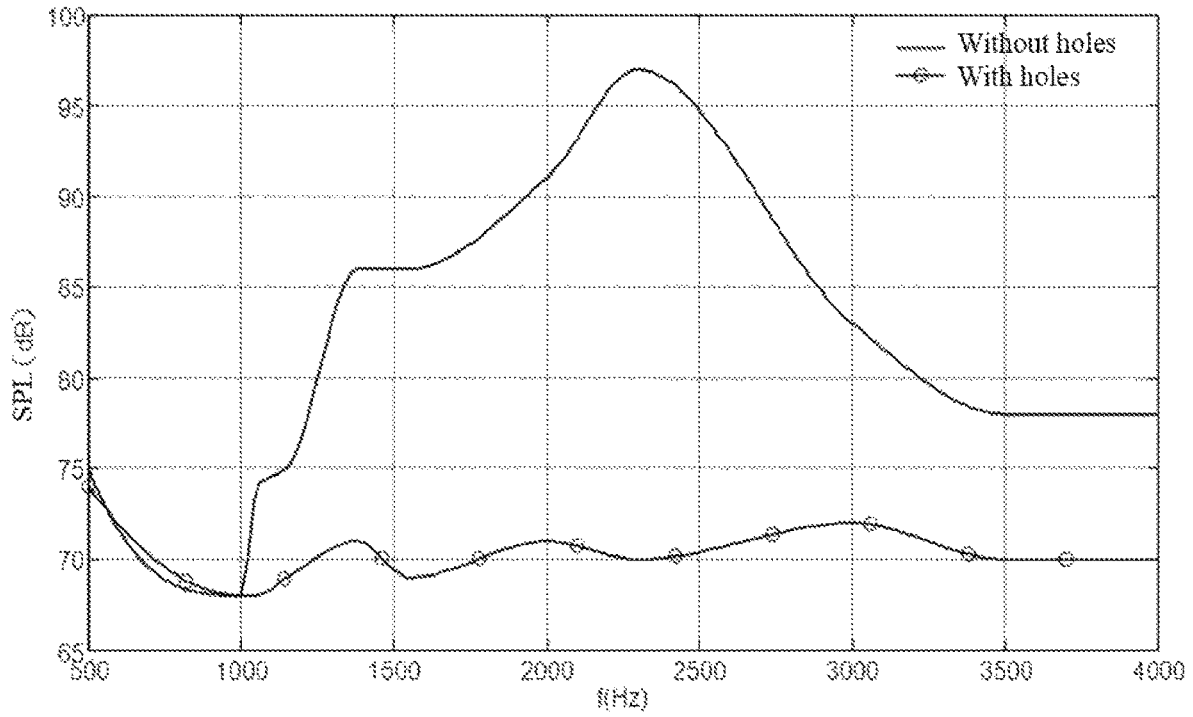


FIG. 11C

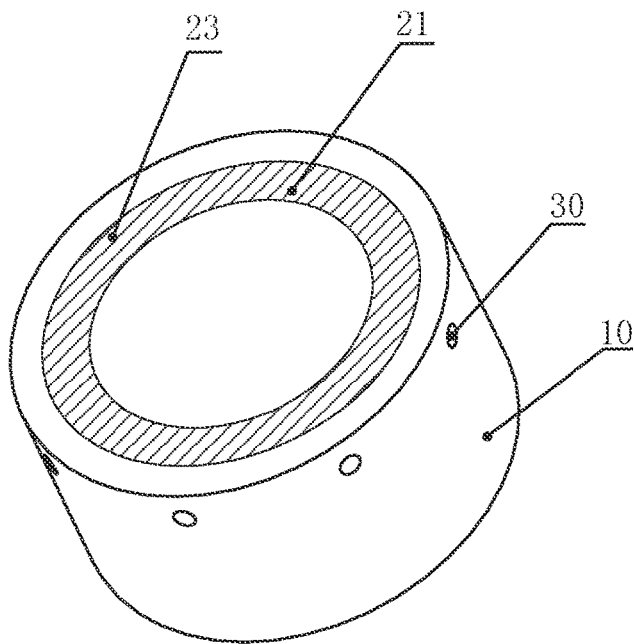


FIG. 12A

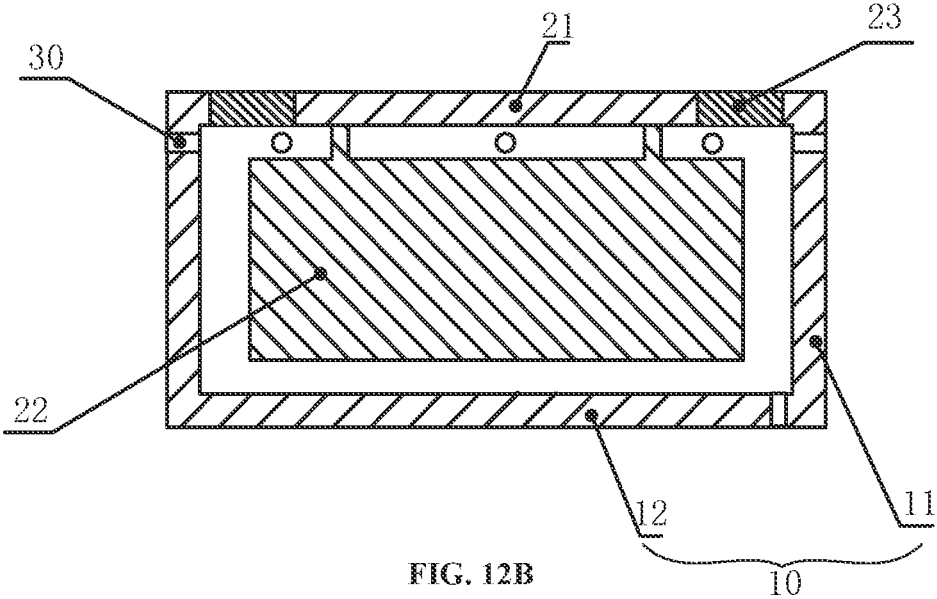


FIG. 12B

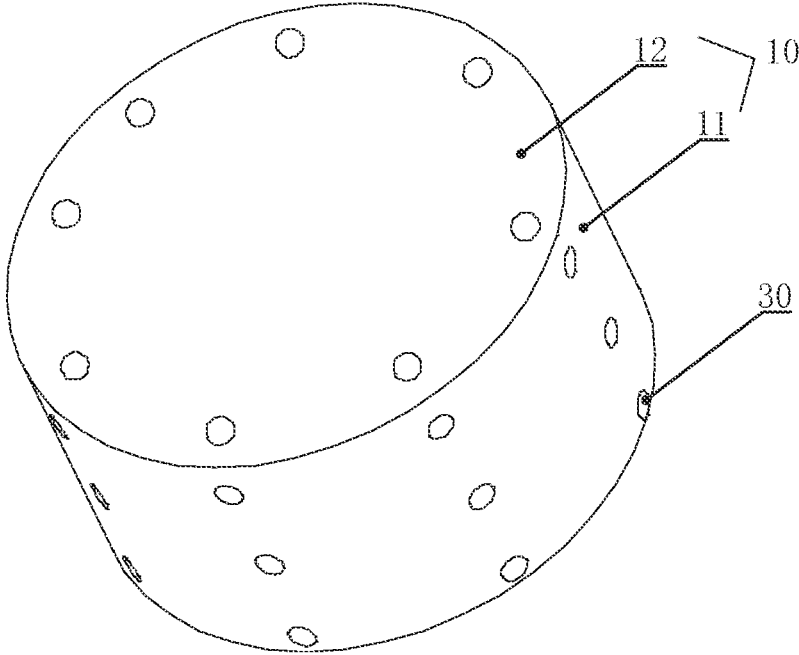


FIG. 13A

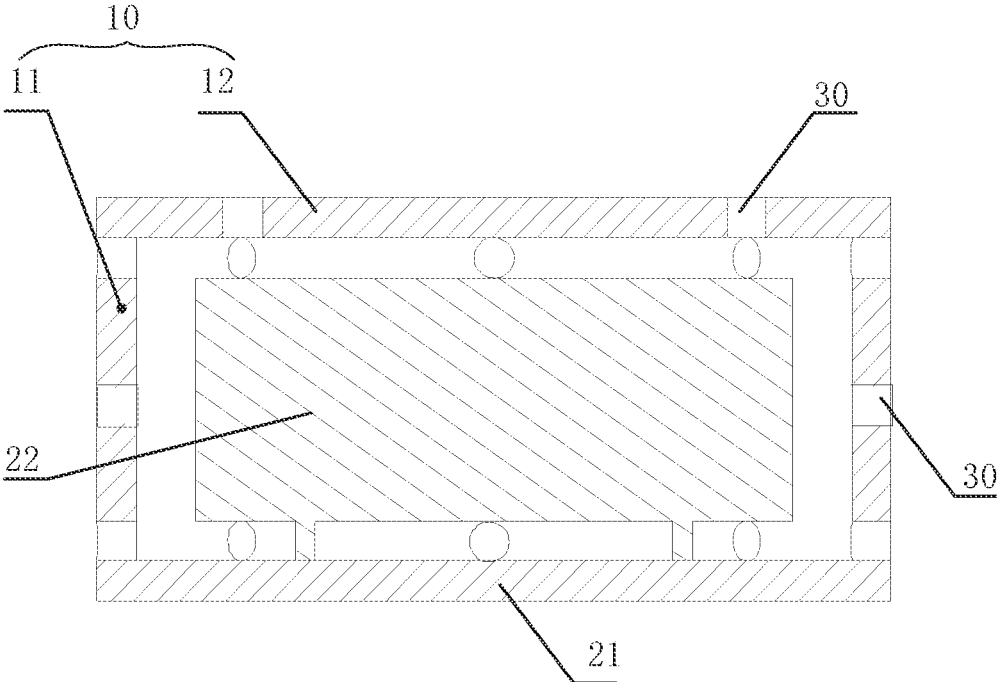


FIG. 13B

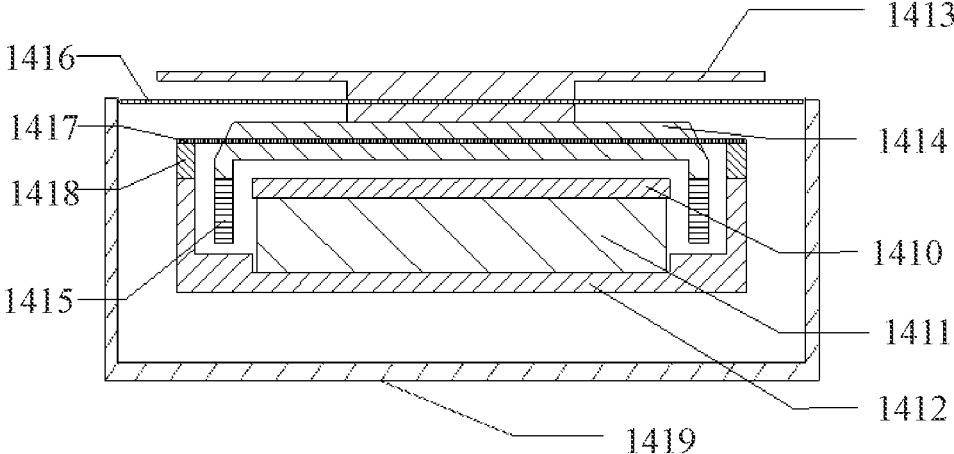


FIG. 14A

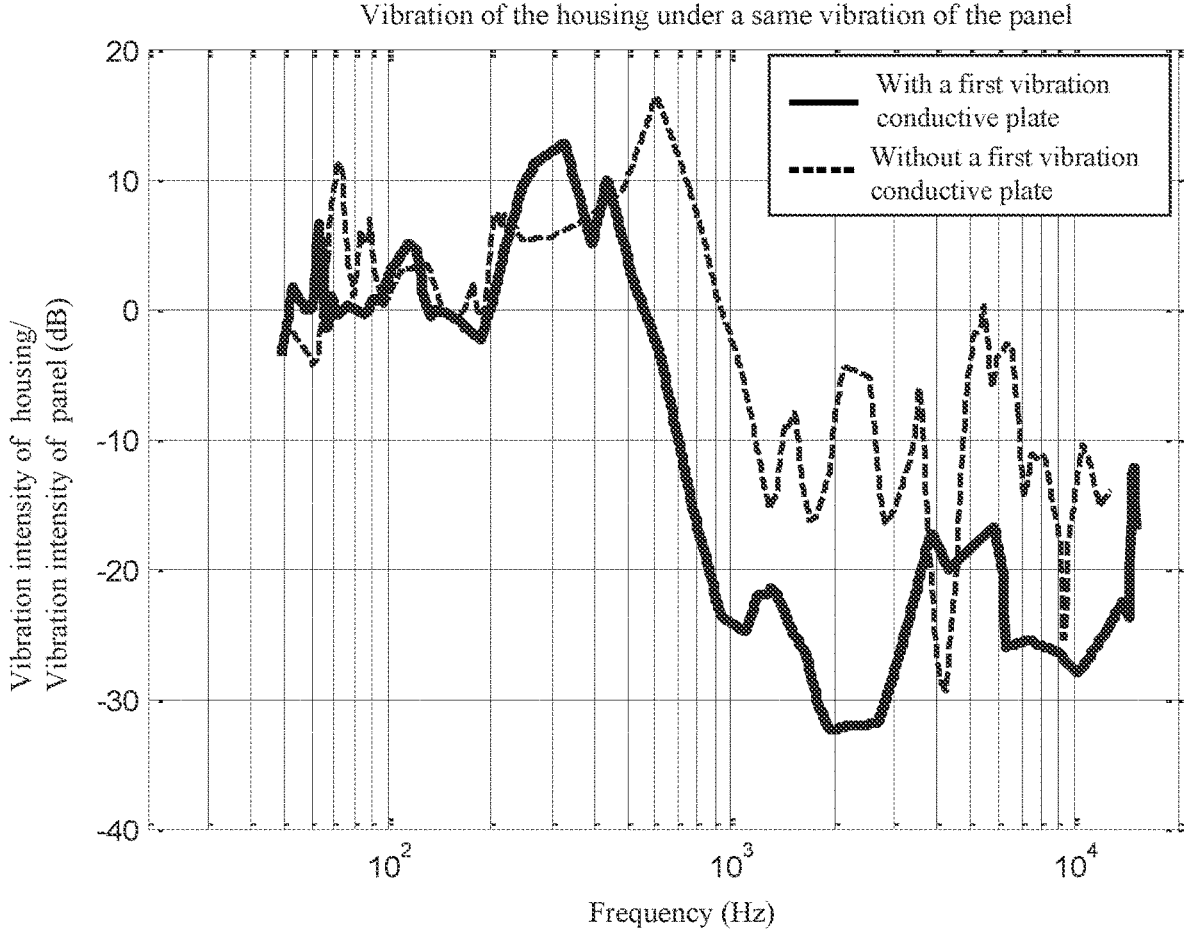


FIG. 14B

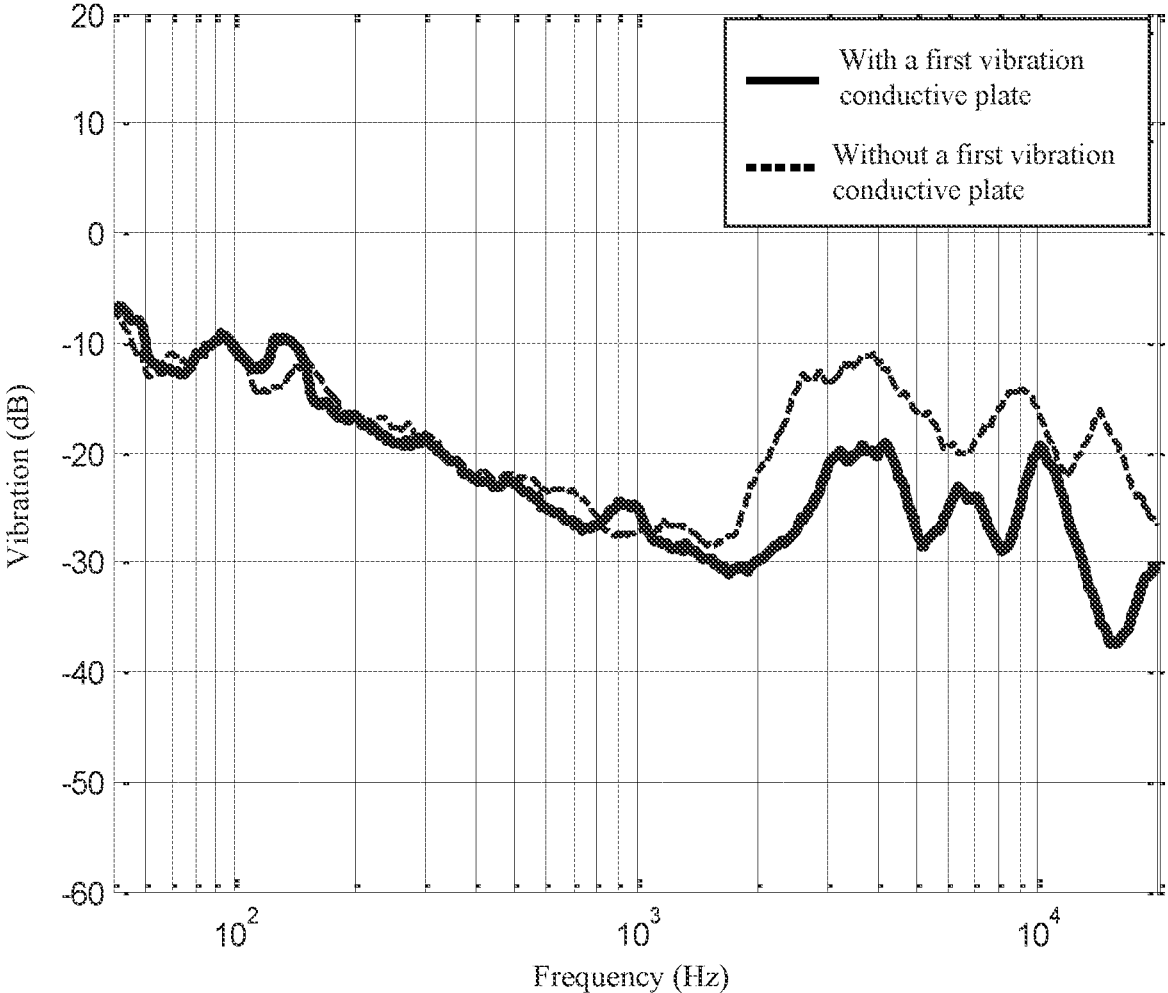


FIG. 14C

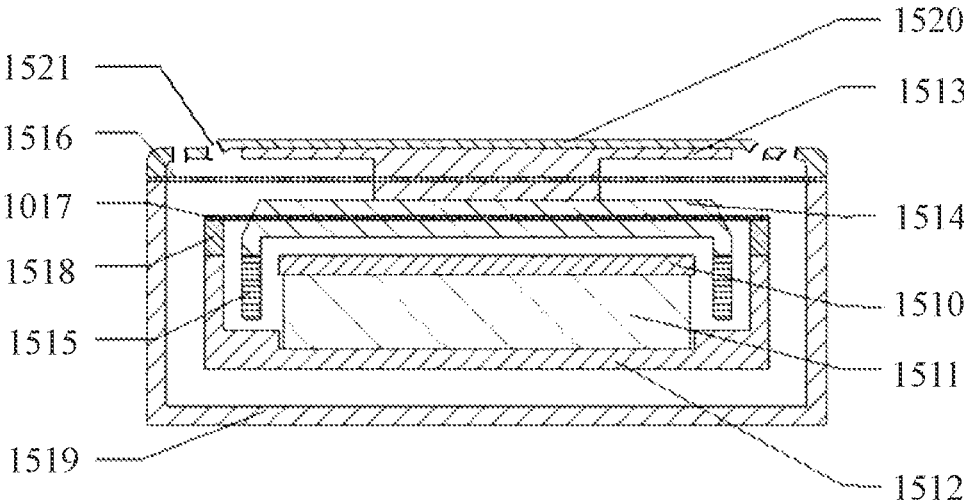


FIG. 15

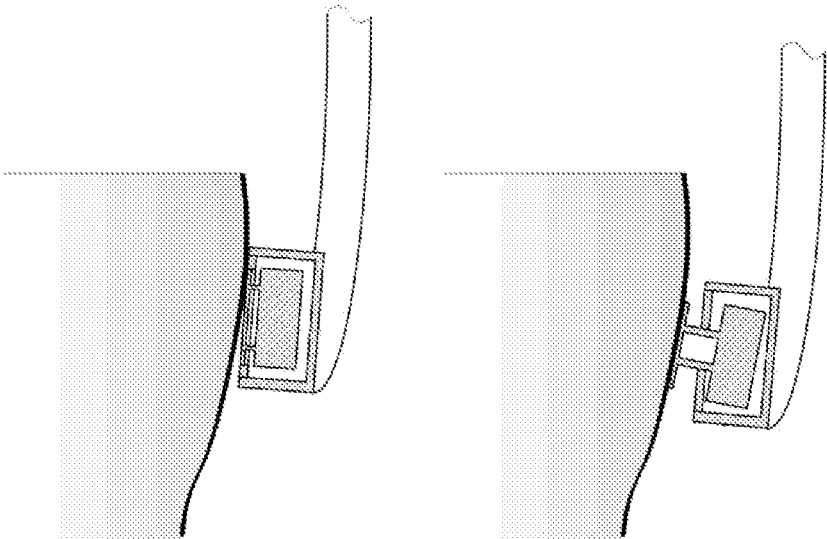


FIG. 16A

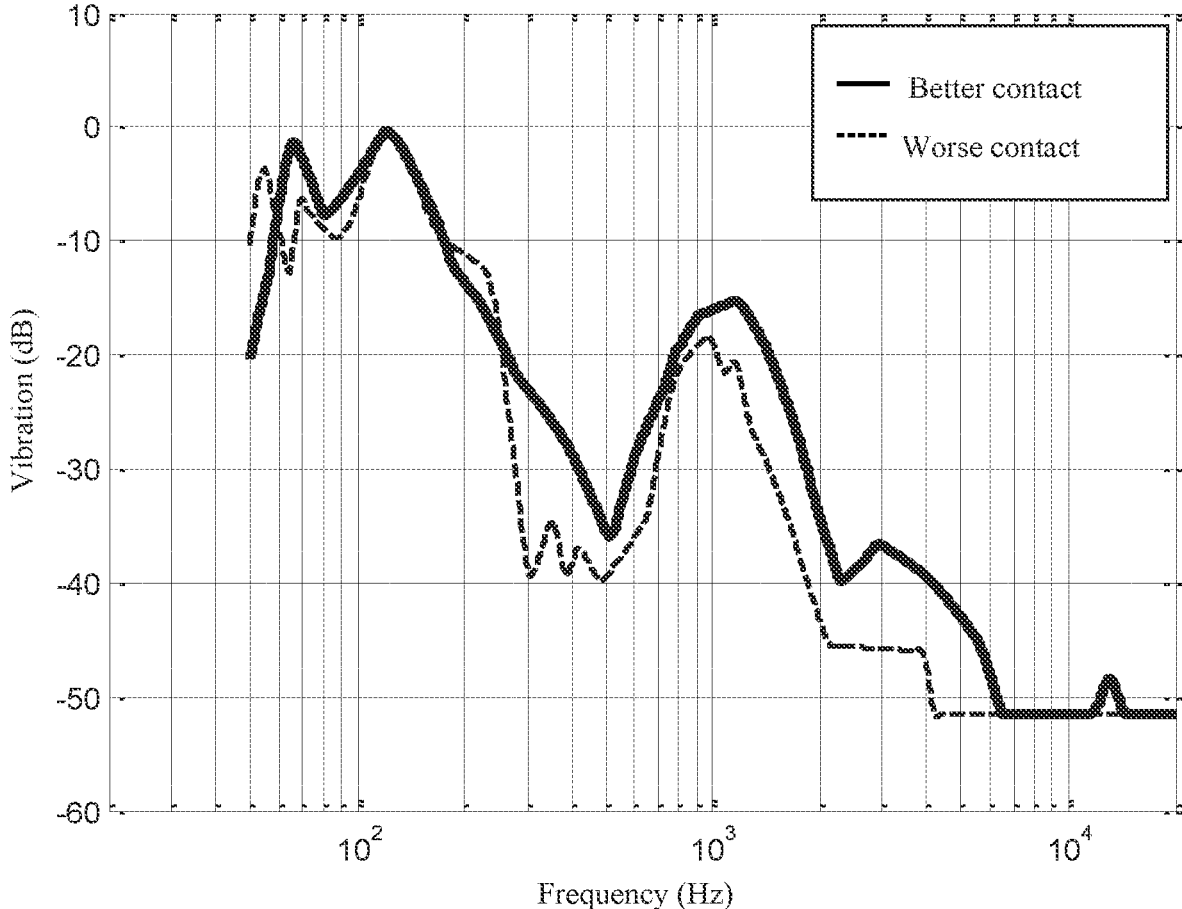


FIG. 16B

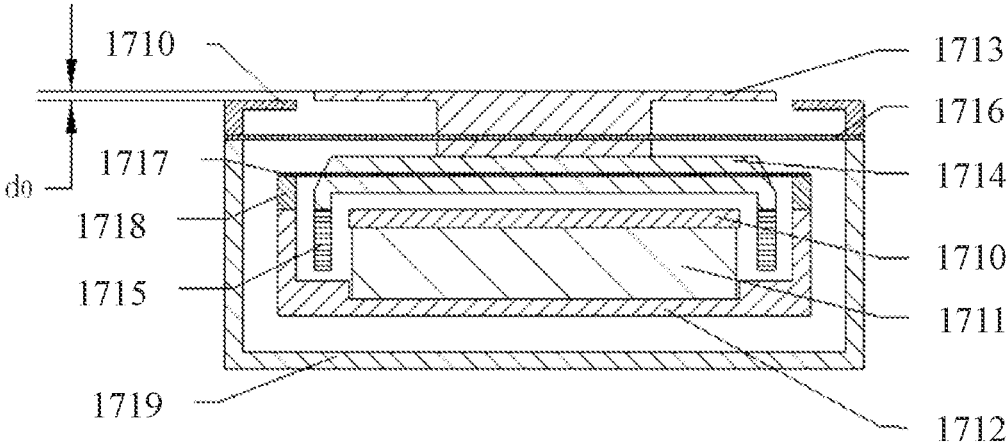


FIG. 17

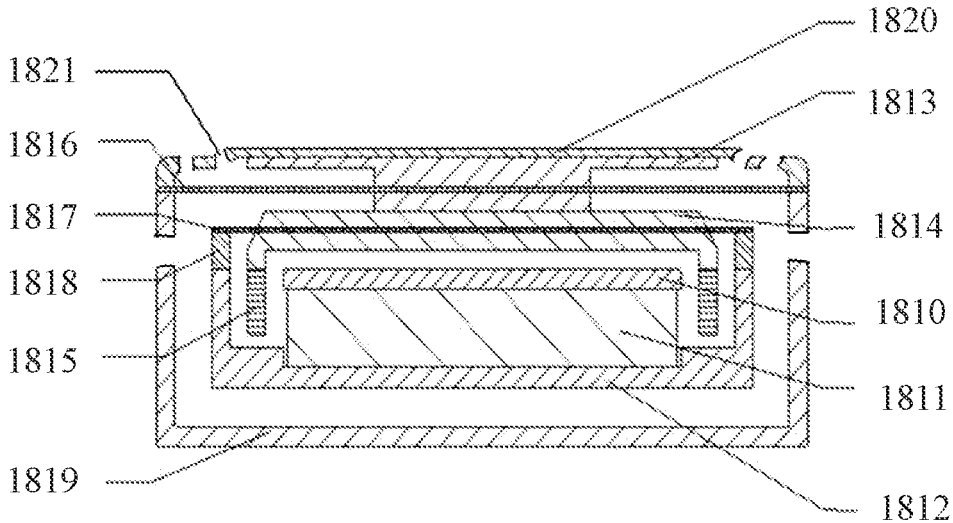


FIG. 18

SYSTEMS AND METHODS FOR SUPPRESSING SOUND LEAKAGE

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a continuation application of U.S. patent application Ser. No. 17/807,154, filed on Jun. 16, 2022, which is a continuation of U.S. patent application Ser. No. 17/170,913 (issued as U.S. Pat. No. 11,368,800), filed on Feb. 9, 2021, which is a continuation-in-part application of U.S. patent application Ser. No. 17/074,762 (issued as U.S. Pat. No. 11,197,106), filed on Oct. 20, 2020, which is a continuation-in-part of U.S. patent application Ser. No. 16/813,915 (issued as U.S. Pat. No. 10,848,878), filed on Mar. 10, 2020, which is a continuation of U.S. patent application Ser. No. 16/419,049 (issued as U.S. Pat. No. 10,616,696), filed on May 22, 2019, which is a continuation of U.S. patent application Ser. No. 16/180,020 (issued as U.S. Pat. No. 10,334,372), filed on Nov. 5, 2018, which is a continuation of U.S. patent application Ser. No. 15/650,909 (issued as U.S. Pat. No. 10,149,071), filed on Jul. 16, 2017, which is a continuation of U.S. patent application Ser. No. 15/109,831 (issued as U.S. Pat. No. 9,729,978), filed on Jul. 6, 2016, which is a U.S. National Stage entry under 35 U.S.C. § 371 of International Application PCT/CN2014/094065, filed on Dec. 17, 2014, designating the United States of America, which claims priority to Chinese Patent Application 201410005804.0, filed on Jan. 6, 2014; U.S. patent application Ser. No. 17/170,913 is also a continuation-in-part application of U.S. patent application Ser. No. 16/833,839 (issued as U.S. Pat. No. 11,399,245), filed on Mar. 30, 2020, which is a continuation of U.S. application Ser. No. 15/752,452 (issued as U.S. Pat. No. 10,609,496), filed on Feb. 13, 2018, which is a national stage entry under 35 U.S.C. § 371 of International Application PCT/CN2015/086907, filed on Aug. 13, 2015, the entire contents of each of which are hereby incorporated by reference.

FIELD OF THE INVENTION

This application relates to a bone conduction device, and more specifically, relates to methods and systems for reducing sound leakage by a bone conduction device.

BACKGROUND

A bone conduction speaker, which may be also called a vibration speaker, may push human tissues and bones to stimulate the auditory nerve in cochlea and enable people to hear sound. The bone conduction speaker is also called a bone conduction headphone.

An exemplary structure of a bone conduction speaker based on the principle of the bone conduction speaker is shown in FIGS. 1A and 1B. The bone conduction speaker may include an open housing **110**, a panel **121**, a transducer **122**, and a linking component **123**. The transducer **122** may transduce electrical signals to mechanical vibrations. The panel **121** may be connected to the transducer **122** and vibrate synchronically with the transducer **122**. The panel **121** may stretch out from the opening of the housing **110** and contact with human skin to pass vibrations to auditory nerves through human tissues and bones, which in turn enables people to hear sound. The linking component **123** may reside between the transducer **122** and the housing **110**, configured to fix the vibrating transducer **122** inside the housing **110**. To minimize its effect on the vibrations gen-

erated by the transducer **122**, the linking component **123** may be made of an elastic material.

However, the mechanical vibrations generated by the transducer **122** may not only cause the panel **121** to vibrate, but may also cause the housing **110** to vibrate through the linking component **123**. Accordingly, the mechanical vibrations generated by the bone conduction speaker may push human tissues through the bone board **121**, and at the same time a portion of the vibrating board **121** and the housing **110** that are not in contact with human issues may nevertheless push air. Air sound may thus be generated by the air pushed by the portion of the vibrating board **121** and the housing **110**. The air sound may be called "sound leakage." In some cases, sound leakage is harmless. However, sound leakage should be avoided as much as possible if people intend to protect privacy when using the bone conduction speaker or try not to disturb others when listening to music.

Attempting to solve the problem of sound leakage, Korean patent KR10-2009-0082999 discloses a bone conduction speaker of a dual magnetic structure and double-frame. As shown in FIG. 2, the speaker disclosed in the patent includes: a first frame **210** with an open upper portion and a second frame **220** that surrounds the outside of the first frame **210**. The second frame **220** is separately placed from the outside of the first frame **210**. The first frame **210** includes a movable coil **230** with electric signals, an inner magnetic component **240**, an outer magnetic component **250**, a magnet field formed between the inner magnetic component **240**, and the outer magnetic component **250**. The inner magnetic component **240** and the out magnetic component **250** may vibrate by the attraction and repulsion force of the coil **230** placed in the magnet field. A vibration board **260** connected to the moving coil **230** may receive the vibration of the moving coil **230**. A vibration unit **270** connected to the vibration board **260** may pass the vibration to a user by contacting with the skin. As described in the patent, the second frame **220** surrounds the first frame **210**, in order to use the second frame **220** to prevent the vibration of the first frame **210** from dissipating the vibration to outsides, and thus may reduce sound leakage to some extent.

However, in this design, since the second frame **220** is fixed to the first frame **210**, vibrations of the second frame **220** are inevitable. As a result, sealing by the second frame **220** is unsatisfactory. Furthermore, the second frame **220** increases the whole volume and weight of the speaker, which in turn increases the cost, complicates the assembly process, and reduces the speaker's reliability and consistency.

SUMMARY

The embodiments of the present application disclose methods and system of reducing sound leakage of a bone conduction speaker.

In one aspect, the embodiments of the present application disclose a method of reducing sound leakage of a bone conduction speaker, including:

- providing a bone conduction speaker including a panel fitting human skin and passing vibrations, a transducer, and a housing, wherein at least one sound guiding hole is located in at least one portion of the housing;
- the transducer drives the panel to vibrate;
- the housing vibrates, along with the vibrations of the transducer, and pushes air, forming a leaked sound wave transmitted in the air;

the air inside the housing is pushed out of the housing through the at least one sound guiding hole, interferes with the leaked sound wave, and reduces an amplitude of the leaked sound wave.

In some embodiments, one or more sound guiding holes may locate in an upper portion, a central portion, and/or a lower portion of a sidewall and/or the bottom of the housing.

In some embodiments, a damping layer may be applied in the at least one sound guiding hole in order to adjust the phase and amplitude of the guided sound wave through the at least one sound guiding hole.

In some embodiments, sound guiding holes may be configured to generate guided sound waves having a same phase that reduce the leaked sound wave having a same wavelength; sound guiding holes may be configured to generate guided sound waves having different phases that reduce the leaked sound waves having different wavelengths.

In some embodiments, different portions of a same sound guiding hole may be configured to generate guided sound waves having a same phase that reduce the leaked sound wave having same wavelength. In some embodiments, different portions of a same sound guiding hole may be configured to generate guided sound waves having different phases that reduce leaked sound waves having different wavelengths.

In another aspect, the embodiments of the present application disclose a bone conduction speaker, including a housing, a panel and a transducer, wherein:

the transducer is configured to generate vibrations and is located inside the housing;

the panel is configured to be in contact with skin and pass vibrations;

At least one sound guiding hole may locate in at least one portion on the housing, and preferably, the at least one sound guiding hole may be configured to guide a sound wave inside the housing, resulted from vibrations of the air inside the housing, to the outside of the housing, the guided sound wave interfering with the leaked sound wave and reducing the amplitude thereof.

In some embodiments, the at least one sound guiding hole may locate in the sidewall and/or bottom of the housing.

In some embodiments, preferably, the at least one sound guiding sound hole may locate in the upper portion and/or lower portion of the sidewall of the housing.

In some embodiments, preferably, the sidewall of the housing is cylindrical and there are at least two sound guiding holes located in the sidewall of the housing, which are arranged evenly or unevenly in one or more circles. Alternatively, the housing may have a different shape.

In some embodiments, preferably, the sound guiding holes have different heights along the axial direction of the cylindrical sidewall.

In some embodiments, preferably, there are at least two sound guiding holes located in the bottom of the housing. In some embodiments, the sound guiding holes are distributed evenly or unevenly in one or more circles around the center of the bottom. Alternatively or additionally, one sound guiding hole is located at the center of the bottom of the housing.

In some embodiments, preferably, the sound guiding hole is a perforative hole. In some embodiments, there may be a damping layer at the opening of the sound guiding hole.

In some embodiments, preferably, the guided sound waves through different sound guiding holes and/or different portions of a same sound guiding hole have different phases or a same phase.

In some embodiments, preferably, the damping layer is a tuning paper, a tuning cotton, a nonwoven fabric, a silk, a cotton, a sponge, or a rubber.

In some embodiments, preferably, the shape of a sound guiding hole is circle, ellipse, quadrangle, rectangle, or linear. In some embodiments, the sound guiding holes may have a same shape or different shapes.

In some embodiments, preferably, the transducer includes a magnetic component and a voice coil. Alternatively, the transducer includes piezoelectric ceramic.

The design disclosed in this application utilizes the principles of sound interference, by placing sound guiding holes in the housing, to guide sound wave(s) inside the housing to the outside of the housing, the guided sound wave(s) interfering with the leaked sound wave, which is formed when the housing's vibrations push the air outside the housing. The guided sound wave(s) reduces the amplitude of the leaked sound wave and thus reduces the sound leakage. The design not only reduces sound leakage, but is also easy to implement, doesn't increase the volume or weight of the bone conduction speaker, and barely increase the cost of the product.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A and 1B are schematic structures illustrating a bone conduction speaker of prior art;

FIG. 2 is a schematic structure illustrating another bone conduction speaker of prior art;

FIG. 3 illustrates the principle of sound interference according to some embodiments of the present disclosure;

FIGS. 4A and 4B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIG. 4C is a schematic structure of the bone conduction speaker according to some embodiments of the present disclosure;

FIG. 4D is a diagram illustrating reduced sound leakage of the bone conduction speaker according to some embodiments of the present disclosure;

FIG. 4E is a schematic diagram illustrating exemplary two-point sound sources according to some embodiments of the present disclosure;

FIG. 5 is a diagram illustrating the equal-loudness contour curves according to some embodiments of the present disclosure;

FIG. 6 is a flow chart of an exemplary method of reducing sound leakage of a bone conduction speaker according to some embodiments of the present disclosure;

FIGS. 7A and 7B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIG. 7C is a diagram illustrating reduced sound leakage of a bone conduction speaker according to some embodiments of the present disclosure;

FIGS. 8A and 8B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIG. 8C is a diagram illustrating reduced sound leakage of a bone conduction speaker according to some embodiments of the present disclosure;

FIGS. 9A and 9B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIG. 9C is a diagram illustrating reduced sound leakage of a bone conduction speaker according to some embodiments of the present disclosure;

5

FIGS. 10A and 10B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIG. 10C is a diagram illustrating reduced sound leakage of a bone conduction speaker according to some embodiments of the present disclosure;

FIG. 10D is a schematic diagram illustrating an acoustic route according to some embodiments of the present disclosure;

FIG. 10E is a schematic diagram illustrating another acoustic route according to some embodiments of the present disclosure;

FIG. 10F is a schematic diagram illustrating a further acoustic route according to some embodiments of the present disclosure;

FIGS. 11A and 11B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIG. 11C is a diagram illustrating reduced sound leakage of a bone conduction speaker according to some embodiments of the present disclosure;

FIGS. 12A and 12B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIGS. 13A and 13B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure;

FIG. 14A illustrates a structure of a vibration generation portion of a bone conduction speaker according to some embodiments of the present disclosure;

FIG. 14B illustrates a vibration response curve of a bone conduction speaker according to some embodiments of the present disclosure;

FIG. 14C illustrates a sound leakage curve of a bone conduction speaker according to some embodiments of the present disclosure;

FIG. 15 illustrates a structure of a vibration generation portion of a bone conduction speaker according to some embodiments of the present disclosure;

FIG. 16A illustrates an application scenario of a bone conduction speaker according to some embodiments of the present disclosure;

FIG. 16B illustrates a vibration response curve of a bone conduction speaker according to some embodiments of the present disclosure;

FIG. 17 illustrates a structure of a vibration generation portion of a bone conduction speaker according to some embodiments of the present disclosure; and

FIG. 18 illustrates a structure of a vibration generation portion of a bone conduction speaker according to some embodiments of the present disclosure.

The meanings of the mark numbers in the figures are as followed:

110, open housing; 121, panel; 122, transducer; 123, linking component; 210, first frame; 220, second frame; 230, moving coil; 240, inner magnetic component; 250, outer magnetic component; 260, panel; 270, vibration unit; 10, housing; 11, sidewall; 12, bottom; 21, panel; 22, transducer; 23, linking component; 24, elastic component; 30, sound guiding hole.

DETAILED DESCRIPTION

Followings are some further detailed illustrations about this disclosure. The following examples are for illustrative purposes only and should not be interpreted as limitations of the claimed invention. There are a variety of alternative

6

techniques and procedures available to those of ordinary skill in the art, which would similarly permit one to successfully perform the intended invention. In addition, the figures just show the structures relative to this disclosure, not the whole structure.

To explain the scheme of the embodiments of this disclosure, the design principles of this disclosure will be introduced here. FIG. 3 illustrates the principles of sound interference according to some embodiments of the present disclosure. Two or more sound waves may interfere in the space based on, for example, the frequency and/or amplitude of the waves. Specifically, the amplitudes of the sound waves with the same frequency may be overlaid to generate a strengthened wave or a weakened wave. As shown in FIG. 3, sound source 1 and sound source 2 have the same frequency and locate in different locations in the space. The sound waves generated from these two sound sources may encounter in an arbitrary point A. If the phases of the sound wave 1 and sound wave 2 are the same at point A, the amplitudes of the two sound waves may be added, generating a strengthened sound wave signal at point A; on the other hand, if the phases of the two sound waves are opposite at point A, their amplitudes may be offset, generating a weakened sound wave signal at point A.

This disclosure applies above-noted the principles of sound wave interference to a bone conduction speaker and disclose a bone conduction speaker that can reduce sound leakage.

Embodiment One

FIGS. 4A and 4B are schematic structures of an exemplary bone conduction speaker. The bone conduction speaker may include a housing 10, a panel 21, and a transducer 22. The transducer 22 may be inside the housing 10 and configured to generate vibrations. The housing 10 may have one or more sound guiding holes 30. The sound guiding hole(s) 30 may be configured to guide sound waves inside the housing 10 to the outside of the housing 10. In some embodiments, the guided sound waves may form interference with leaked sound waves generated by the vibrations of the housing 10, so as to reducing the amplitude of the leaked sound. The transducer 22 may be configured to convert an electrical signal to mechanical vibrations. For example, an audio electrical signal may be transmitted into a voice coil that is placed in a magnet, and the electromagnetic interaction may cause the voice coil to vibrate based on the audio electrical signal. As another example, the transducer 22 may include piezoelectric ceramics, shape changes of which may cause vibrations in accordance with electrical signals received.

Furthermore, the panel 21 may be connected to the transducer 22 and configured to vibrate along with the transducer 22. The panel 21 may stretch out from the opening of the housing 10, and touch the skin of the user and pass vibrations to auditory nerves through human tissues and bones, which in turn enables the user to hear sound. The linking component 23 may reside between the transducer 22 and the housing 10, configured to fix the vibrating transducer 122 inside the housing. The linking component 23 may include one or more separate components, or may be integrated with the transducer 22 or the housing 10. In some embodiments, the linking component 23 is made of an elastic material.

The transducer 22 may drive the panel 21 to vibrate. The transducer 22, which resides inside the housing 10, may vibrate. The vibrations of the transducer 22 may drives the

7

air inside the housing **10** to vibrate, producing a sound wave inside the housing **10**, which can be referred to as “sound wave inside the housing.” Since the panel **21** and the transducer **22** are fixed to the housing **10** via the linking component **23**, the vibrations may pass to the housing **10**, causing the housing **10** to vibrate synchronously. The vibrations of the housing **10** may generate a leaked sound wave, which spreads outwards as sound leakage.

The sound wave inside the housing and the leaked sound wave are like the two sound sources in FIG. **3**. In some embodiments, the sidewall **11** of the housing **10** may have one or more sound guiding holes **30** configured to guide the sound wave inside the housing **10** to the outside. The guided sound wave through the sound guiding hole(s) **30** may interfere with the leaked sound wave generated by the vibrations of the housing **10**, and the amplitude of the leaked sound wave may be reduced due to the interference, which may result in a reduced sound leakage. Therefore, the design of this embodiment can solve the sound leakage problem to some extent by making an improvement of setting a sound guiding hole on the housing, and not increasing the volume and weight of the bone conduction speaker.

In some embodiments, one sound guiding hole **30** is set on the upper portion of the sidewall **11**. As used herein, the upper portion of the sidewall **11** refers to the portion of the sidewall **11** starting from the top of the sidewall (contacting with the panel **21**) to about the $\frac{1}{3}$ height of the sidewall.

FIG. **4C** is a schematic structure of the bone conduction speaker illustrated in FIGS. **4A-4B**. The structure of the bone conduction speaker is further illustrated with mechanics elements illustrated in FIG. **4C**. As shown in FIG. **4C**, the linking component **23** between the sidewall **11** of the housing **10** and the panel **21** may be represented by an elastic element **23** and a damping element in the parallel connection. The linking relationship between the panel **21** and the transducer **22** may be represented by an elastic element **24**.

Outside the housing **10**, the sound leakage reduction is proportional to

$$\left(\iint_{S_{hole}} P_{ds} - \iint_{S_{housing}} P_{ds}\right), \quad (1)$$

wherein S_{hole} is the area of the opening of the sound guiding hole **30**, $S_{housing}$ is the area of the housing **10** (e.g., the sidewall **11** and the bottom **12**) that is not in contact with human face.

The pressure inside the housing may be expressed as $P = P_a + P_b + P_c + P_e$, (2) wherein P_a , P_b , P_c and P_e are the sound pressures of an arbitrary point inside the housing **10** generated by side a, side b, side c and side e (as illustrated in FIG. **4C**), respectively. As used herein, side a refers to the upper surface of the transducer **22** that is close to the panel **21**, side b refers to the lower surface of the panel **21** that is close to the transducer **22**, side c refers to the inner upper surface of the bottom **12** that is close to the transducer **22**, and side e refers to the lower surface of the transducer **22** that is close to the bottom **12**.

The center of the side b, 0 point, is set as the origin of the space coordinates, and the side b can be set as the $z=0$ plane, so P_a , P_b , P_c and P_e may be expressed as follows:

$$P_a(x, y, z) = -j\omega\rho_0 \iint_{S_a} W_a(x'_a, y'_a) \cdot \frac{e^{jkR(x'_a, y'_a)}}{4\pi R(x'_a, y'_a)} dx'_a dy'_a - P_{aR}, \quad (3)$$

$$P_b(x, y, z) = -j\omega\rho_0 \iint_{S_b} W_b(x', y') \cdot \frac{e^{jkR(x', y')}}{4\pi R(x', y')} dx' dy' - P_{bR}, \quad (4)$$

8

-continued

$$P_c(x, y, z) = -j\omega\rho_0 \iint_{S_c} W_c(x'_c, y'_c) \cdot \frac{e^{jkR(x'_c, y'_c)}}{4\pi R(x'_c, y'_c)} dx'_c dy'_c - P_{cR}, \quad (5)$$

$$P_e(x, y, z) = -j\omega\rho_0 \iint_{S_e} W_e(x'_e, y'_e) \cdot \frac{e^{jkR(x'_e, y'_e)}}{4\pi R(x'_e, y'_e)} dx'_e dy'_e - P_{eR}, \quad (6)$$

wherein $R(x', y') = \sqrt{(x-x')^2 + (y-y')^2 + z^2}$ is the distance between an observation point (x, y, z) and a point on side b $(x', y', 0)$; S_a , S_b , S_c and S_e are the areas of side a, side b, side c and side e, respectively;

$R(x'_a, y'_a) = \sqrt{(x-x'_a)^2 + (y-y'_a)^2 + (z-z'_a)^2}$ is the distance between the observation point (x, y, z) and a point on side a (x'_a, y'_a, z'_a) ;

$R(x'_c, y'_c) = \sqrt{(x-x'_c)^2 + (y-y'_c)^2 + (z-z'_c)^2}$ is the distance between the observation point (x, y, z) and a point on side c (x'_c, y'_c, z'_c) ;

$R(x'_e, y'_e) = \sqrt{(x-x'_e)^2 + (y-y'_e)^2 + (z-z'_e)^2}$ is the distance between the observation point (x, y, z) and a point on side e (x'_e, y'_e, z'_e) ;

$k = \omega/u$ (u is the velocity of sound) is wave number, ρ_0 is an air density, ω is an angular frequency of vibration;

P_{aR} , P_{bR} , P_{cR} and P_{eR} are acoustic resistances of air, which respectively are:

$$P_{aR} = A \cdot \frac{z_a \cdot r + j\omega \cdot z_a \cdot r'}{\varphi} + \delta, \quad (7)$$

$$P_{bR} = A \cdot \frac{z_b \cdot r + j\omega \cdot z_b \cdot r'}{\varphi} + \delta, \quad (8)$$

$$P_{cR} = A \cdot \frac{z_c \cdot r + j\omega \cdot z_c \cdot r'}{\varphi} + \delta, \quad (9)$$

$$P_{eR} = A \cdot \frac{z_e \cdot r + j\omega \cdot z_e \cdot r'}{\varphi} + \delta, \quad (10)$$

wherein r is the acoustic resistance per unit length, r' is the sound quality per unit length, z_a is the distance between the observation point and side a, z_b is the distance between the observation point and side b, z_c is the distance between the observation point and side c, z_e is the distance between the observation point and side e.

$W_a(x, y)$, $W_b(x, y)$, $W_c(x, y)$, $W_e(x, y)$ and $W_d(x, y)$ are the sound source power per unit area of side a, side b, side c, side e and side d, respectively, which can be derived from following formulas (11):

$$F_a = F_a = F - k_1 \cos \omega t - \iint_{S_a} W_a(x, y) dx dy - \iint_{S_d} W_d(x, y) dx dy - f \quad (11)$$

$$F_b = -F + k_1 \cos \omega t + \iint_{S_b} W_b(x, y) dx dy - \iint_{S_e} W_e(x, y) dx dy - L$$

$$F_c = F_d = F_b - k_2 \cos \omega t - \iint_{S_c} W_c(x, y) dx dy - f - \gamma$$

$$F_d = F_b - k_2 \cos \omega t - \iint_{S_d} W_d(x, y) dx dy$$

wherein F is the driving force generated by the transducer **22**, F_a , F_b , F_c , F_d , and F_e are the driving forces of side a, side b, side c, side d and side e, respectively. As used herein, side d is the outside surface of the bottom **12**. S_d is the region of side d, f is the viscous resistance formed in the small gap of the sidewalls, and $f = \eta \Delta s (dv/dy)$.

L is the equivalent load on human face when the panel acts on the human face, γ is the energy dissipated on elastic element **24**, k_1 and k_2 are the elastic coefficients of elastic element **23** and elastic element **24** respectively, η is the fluid

viscosity coefficient, dv/dy is the velocity gradient of fluid, Δs is the cross-section area of a subject (board), A is the amplitude, ϕ is the region of the sound field, and δ is a high order minimum (which is generated by the incompletely symmetrical shape of the housing).

The sound pressure of an arbitrary point outside the housing, generated by the vibration of the housing **10** is expressed as:

$$P_d = -j\omega\rho_0 \iint W_d(x'_d, y'_d) \cdot \frac{e^{j\mathbf{R}(x'_d, y'_d)}}{4\pi R(x'_d, y'_d)} dx'_d, dy'_d, \quad (12)$$

wherein $R(x'_d, y'_d) = \sqrt{(x-x'_d)^2 + (y-y'_d)^2 + (z-z_d)^2}$ is the distance between the observation point (x, y, z) and a point on side d (x'_d, y'_d, z_d) .

P_a, P_b, P_c and P_e are functions of the position, when we set a hole on an arbitrary position in the housing, if the area of the hole is S_{hole} , the sound pressure of the hole is $\iint_{S_{hole}}$.

In the meanwhile, because the panel **21** fits human tissues tightly, the power it gives out is absorbed all by human tissues, so the only side that can push air outside the housing to vibrate is side d , thus forming sound leakage. As described elsewhere, the sound leakage is resulted from the vibrations of the housing **10**. For illustrative purposes, the sound pressure generated by the housing **10** may be expressed as $\iint_{S_{housing}} P_d ds$.

The leaked sound wave and the guided sound wave interference may result in a weakened sound wave, i.e., to make $\iint_{S_{hole}} P_d ds$ and $\iint_{S_{housing}} P_d ds$ have the same value but opposite directions, and the sound leakage may be reduced. In some embodiments, $\iint_{S_{hole}} P_d ds$ may be adjusted to reduce the sound leakage. Since $\iint_{S_{hole}} P_d ds$ corresponds to information of phases and amplitudes of one or more holes, which further relates to dimensions of the housing of the bone conduction speaker, the vibration frequency of the transducer, the position, shape, quantity and/or size of the sound guiding holes and whether there is damping inside the holes. Thus, the position, shape, and quantity of sound guiding holes, and/or damping materials may be adjusted to reduce sound leakage.

Additionally, because of the basic structure and function differences of a bone conduction speaker and a traditional air conduction speaker, the formulas above are only suitable for bone conduction speakers. Whereas in traditional air conduction speakers, the air in the air housing can be treated as a whole, which is not sensitive to positions, and this is different intrinsically with a bone conduction speaker, therefore the above formulas are not suitable to an air conduction speaker.

According to the formulas above, a person having ordinary skill in the art would understand that the effectiveness of reducing sound leakage is related to the dimensions of the housing of the bone conduction speaker, the vibration frequency of the transducer, the position, shape, quantity and size of the sound guiding hole(s) and whether there is damping inside the sound guiding hole(s). Accordingly, various configurations, depending on specific needs, may be obtained by choosing specific position where the sound guiding hole(s) is located, the shape and/or quantity of the sound guiding hole(s) as well as the damping material.

FIG. 5 is a diagram illustrating the equal-loudness contour curves according to some embodiments of the present disclosure. The horizontal coordinate is frequency, while the vertical coordinate is sound pressure level (SPL). As used herein, the SPL refers to the change of atmospheric pressure

after being disturbed, i.e., a surplus pressure of the atmospheric pressure, which is equivalent to an atmospheric pressure added to a pressure change caused by the disturbance. As a result, the sound pressure may reflect the amplitude of a sound wave. In FIG. 5, on each curve, sound pressure levels corresponding to different frequencies are different, while the loudness levels felt by human ears are the same. For example, each curve is labeled with a number representing the loudness level of said curve. According to the loudness level curves, when volume (sound pressure amplitude) is lower, human ears are not sensitive to sounds of high or low frequencies; when volume is higher, human ears are more sensitive to sounds of high or low frequencies. Bone conduction speakers may generate sound relating to different frequency ranges, such as 1000 Hz-4000 Hz, or 1000 Hz-4000 Hz, or 1000 Hz-3500 Hz, or 1000 Hz-3000 Hz, or 1500 Hz-3000 Hz. The sound leakage within the above-mentioned frequency ranges may be the sound leakage aimed to be reduced with a priority.

FIG. 4D is a diagram illustrating the effect of reduced sound leakage according to some embodiments of the present disclosure, wherein the test results and calculation results are close in the above range. The bone conduction speaker being tested includes a cylindrical housing, which includes a sidewall and a bottom, as described in FIGS. 4A and 4B. The cylindrical housing is in a cylinder shape having a radius of 22 mm, the sidewall height of 14 mm, and a plurality of sound guiding holes being set on the upper portion of the sidewall of the housing. The openings of the sound guiding holes are rectangle. The sound guiding holes are arranged evenly on the sidewall. The target region where the sound leakage is to be reduced is 50 cm away from the outside of the bottom of the housing. The distance of the leaked sound wave spreading to the target region and the distance of the sound wave spreading from the surface of the transducer **20** through the sound guiding holes **30** to the target region have a difference of about 180 degrees in phase. As shown, the leaked sound wave is reduced in the target region dramatically or even be eliminated.

According to the embodiments in this disclosure, the effectiveness of reducing sound leakage after setting sound guiding holes is very obvious. As shown in FIG. 4D, the bone conduction speaker having sound guiding holes greatly reduce the sound leakage compared to the bone conduction speaker without sound guiding holes.

In the tested frequency range, after setting sound guiding holes, the sound leakage is reduced by about 10 dB on average. Specifically, in the frequency range of 1500 Hz-3000 Hz, the sound leakage is reduced by over 10 dB. In the frequency range of 2000 Hz-2500 Hz, the sound leakage is reduced by over 20 dB compared to the scheme without sound guiding holes.

A person having ordinary skill in the art can understand from the above-mentioned formulas that when the dimensions of the bone conduction speaker, target regions to reduce sound leakage and frequencies of sound waves differ, the position, shape and quantity of sound guiding holes also need to adjust accordingly.

For example, in a cylinder housing, according to different needs, a plurality of sound guiding holes may be on the sidewall and/or the bottom of the housing. Preferably, the sound guiding hole may be set on the upper portion and/or lower portion of the sidewall of the housing. The quantity of the sound guiding holes set on the sidewall of the housing is no less than two. Preferably, the sound guiding holes may be arranged evenly or unevenly in one or more circles with respect to the center of the bottom. In some embodiments,

11

the sound guiding holes may be arranged in at least one circle. In some embodiments, one sound guiding hole may be set on the bottom of the housing. In some embodiments, the sound guiding hole may be set at the center of the bottom of the housing.

The quantity of the sound guiding holes can be one or more. Preferably, multiple sound guiding holes may be set symmetrically on the housing. In some embodiments, there are 6-8 circularly arranged sound guiding holes.

The openings (and cross sections) of sound guiding holes may be circle, ellipse, rectangle, or slit. Slit generally means slit along with straight lines, curve lines, or arc lines. Different sound guiding holes in one bone conduction speaker may have same or different shapes.

A person having ordinary skill in the art can understand that, the sidewall of the housing may not be cylindrical, the sound guiding holes can be arranged asymmetrically as needed. Various configurations may be obtained by setting different combinations of the shape, quantity, and position of the sound guiding. Some other embodiments along with the figures are described as follows.

In some embodiments, the leaked sound wave may be generated by a portion of the housing **10**. The portion of the housing may be the sidewall **11** of the housing **10** and/or the bottom **12** of the housing **10**. Merely by way of example, the leaked sound wave may be generated by the bottom **12** of the housing **10**. The guided sound wave output through the sound guiding hole(s) **30** may interfere with the leaked sound wave generated by the portion of the housing **10**. The interference may enhance or reduce a sound pressure level of the guided sound wave and/or leaked sound wave in the target region.

In some embodiments, the portion of the housing **10** that generates the leaked sound wave may be regarded as a first sound source (e.g., the sound source **1** illustrated in FIG. **3**), and the sound guiding hole(s) **30** or a part thereof may be regarded as a second sound source (e.g., the sound source **2** illustrated in FIG. **3**). Merely for illustration purposes, if the size of the sound guiding hole on the housing **10** is small, the sound guiding hole may be approximately regarded as a point sound source. In some embodiments, any number or count of sound guiding holes provided on the housing **10** for outputting sound may be approximated as a single point sound source. Similarly, for simplicity, the portion of the housing **10** that generates the leaked sound wave may also be approximately regarded as a point sound source. In some embodiments, both the first sound source and the second sound source may approximately be regarded as point sound sources (also referred to as two-point sound sources).

FIG. **4E** is a schematic diagram illustrating exemplary two-point sound sources according to some embodiments of the present disclosure. The sound field pressure p generated by a single point sound source may satisfy Equation (13):

$$p = \frac{j\omega\rho_0}{4\pi r} Q_0 \exp j(\omega t - kr), \quad (13)$$

where ω denotes an angular frequency, ρ_0 denotes an air density, r denotes a distance between a target point and the sound source, Q_0 denotes a volume velocity of the sound source, and k denotes a wave number. It may be concluded that the magnitude of the sound field pressure of the sound field of the point sound source is inversely proportional to the distance to the point sound source.

12

It should be noted that, the sound guiding hole(s) for outputting sound as a point sound source may only serve as an explanation of the principle and effect of the present disclosure, and the shape and/or size of the sound guiding hole(s) may not be limited in practical applications. In some embodiments, if the area of the sound guiding hole is large, the sound guiding hole may also be equivalent to a planar sound source. Similarly, if an area of the portion of the housing **10** that generates the leaked sound wave is large (e.g., the portion of the housing **10** is a vibration surface or a sound radiation surface), the portion of the housing **10** may also be equivalent to a planar sound source. For those skilled in the art, without creative activities, it may be known that sounds generated by structures such as sound guiding holes, vibration surfaces, and sound radiation surfaces may be equivalent to point sound sources at the spatial scale discussed in the present disclosure, and may have consistent sound propagation characteristics and the same mathematical description method. Further, for those skilled in the art, without creative activities, it may be known that the acoustic effect achieved by the two-point sound sources may also be implemented by alternative acoustic structures. According to actual situations, the alternative acoustic structures may be modified and/or combined discretionarily, and the same acoustic output effect may be achieved.

The two-point sound sources may be formed such that the guided sound wave output from the sound guiding hole(s) may interfere with the leaked sound wave generated by the portion of the housing **10**. The interference may reduce a sound pressure level of the leaked sound wave in the surrounding environment (e.g., the target region). For convenience, the sound waves output from an acoustic output device (e.g., the bone conduction speaker) to the surrounding environment may be referred to as far-field leakage since it may be heard by others in the environment. The sound waves output from the acoustic output device to the ears of the user may also be referred to as near-field sound since a distance between the bone conduction speaker and the user may be relatively short. In some embodiments, the sound waves output from the two-point sound sources may have a same frequency or frequency range (e.g., 800 Hz, 1000 Hz, 1500 Hz, 3000 Hz, etc.). In some embodiments, the sound waves output from the two-point sound sources may have a certain phase difference. In some embodiments, the sound guiding hole includes a damping layer. The damping layer may be, for example, a tuning paper, a tuning cotton, a nonwoven fabric, a silk, a cotton, a sponge, or a rubber. The damping layer may be configured to adjust the phase of the guided sound wave in the target region. The acoustic output device described herein may include a bone conduction speaker or an air conduction speaker. For example, a portion of the housing (e.g., the bottom of the housing) of the bone conduction speaker may be treated as one of the two-point sound sources, and at least one sound guiding holes of the bone conduction speaker may be treated as the other one of the two-point sound sources. As another example, one sound guiding hole of an air conduction speaker may be treated as one of the two-point sound sources, and another sound guiding hole of the air conduction speaker may be treated as the other one of the two-point sound sources. It should be noted that, although the construction of two-point sound sources may be different in bone conduction speaker and air conduction speaker, the principles of the interference between the various constructed two-point sound sources are the same. Thus, the equivalence of the two-point sound

sources in a bone conduction speaker disclosed elsewhere in the present disclosure is also applicable for an air conduction speaker.

In some embodiments, when the position and phase difference of the two-point sound sources meet certain conditions, the acoustic output device may output different sound effects in the near field (for example, the position of the user's ear) and the far field. For example, if the phases of the point sound sources corresponding to the portion of the housing **10** and the sound guiding hole(s) are opposite, that is, an absolute value of the phase difference between the two-point sound sources is 180 degrees, the far-field leakage may be reduced according to the principle of reversed phase cancellation.

In some embodiments, the interference between the guided sound wave and the leaked sound wave at a specific frequency may relate to a distance between the sound guiding hole(s) and the portion of the housing **10**. For example, if the sound guiding hole(s) are set at the upper portion of the sidewall of the housing **10** (as illustrated in FIG. 4A), the distance between the sound guiding hole(s) and the portion of the housing **10** may be large. Correspondingly, the frequencies of sound waves generated by such two-point sound sources may be in a mid-low frequency range (e.g., 1500-2000 Hz, 1500-2500 Hz, etc.). Referring to FIG. 4D, the interference may reduce the sound pressure level of the leaked sound wave in the mid-low frequency range (i.e., the sound leakage is low).

Merely by way of example, the low frequency range may refer to frequencies in a range below a first frequency threshold. The high frequency range may refer to frequencies in a range exceed a second frequency threshold. The first frequency threshold may be lower than the second frequency threshold. The mid-low frequency range may refer to frequencies in a range between the first frequency threshold and the second frequency threshold. For example, the first frequency threshold may be 1000 Hz, and the second frequency threshold may be 3000 Hz. The low frequency range may refer to frequencies in a range below 1000 Hz, the high frequency range may refer to frequencies in a range above 3000 Hz, and the mid-low frequency range may refer to frequencies in a range of 1000-2000 Hz, 1500-2500 Hz, etc. In some embodiments, a middle frequency range, a mid-high frequency range may also be determined between the first frequency threshold and the second frequency threshold. In some embodiments, the mid-low frequency range and the low frequency range may partially overlap. The mid-high frequency range and the high frequency range may partially overlap. For example, the mid-high frequency range may refer to frequencies in a range above 3000 Hz, and the mid-low frequency range may refer to frequencies in a range of 2800-3500 Hz. It should be noted that the low frequency range, the mid-low frequency range, the middle frequency range, the mid-high frequency range, and/or the high frequency range may be set flexibly according to different situations, and are not limited herein.

In some embodiments, the frequencies of the guided sound wave and the leaked sound wave may be set in a low frequency range (e.g., below 800 Hz, below 1200 Hz, etc.). In some embodiments, the amplitudes of the sound waves generated by the two-point sound sources may be set to be different in the low frequency range. For example, the amplitude of the guided sound wave may be smaller than the amplitude of the leaked sound wave. In this case, the interference may not reduce sound pressure of the near-field sound in the low-frequency range. The sound pressure of the

near-field sound may be improved in the low-frequency range. The volume of the sound heard by the user may be improved.

In some embodiments, the amplitude of the guided sound wave may be adjusted by setting an acoustic resistance structure in the sound guiding hole(s) **30**. The material of the acoustic resistance structure disposed in the sound guiding hole **30** may include, but not limited to, plastics (e.g., high-molecular polyethylene, blown nylon, engineering plastics, etc.), cotton, nylon, fiber (e.g., glass fiber, carbon fiber, boron fiber, graphite fiber, graphene fiber, silicon carbide fiber, or aramid fiber), other single or composite materials, other organic and/or inorganic materials, etc. The thickness of the acoustic resistance structure may be 0.005 mm, 0.01 mm, 0.02 mm, 0.5 mm, 1 mm, 2 mm, etc. The structure of the acoustic resistance structure may be in a shape adapted to the shape of the sound guiding hole. For example, the acoustic resistance structure may have a shape of a cylinder, a sphere, a cubic, etc. In some embodiments, the materials, thickness, and structures of the acoustic resistance structure may be modified and/or combined to obtain a desirable acoustic resistance structure. In some embodiments, the acoustic resistance structure may be implemented by the damping layer.

In some embodiments, the amplitude of the guided sound wave output from the sound guiding hole may be relatively low (e.g., zero or almost zero). The difference between the guided sound wave and the leaked sound wave may be maximized, thus achieving a relatively large sound pressure in the near field. In this case, the sound leakage of the acoustic output device having sound guiding holes may be almost the same as the sound leakage of the acoustic output device without sound guiding holes in the low frequency range (e.g., as shown in FIG. 4D).

Embodiment Two

FIG. 6 is a flowchart of an exemplary method of reducing sound leakage of a bone conduction speaker according to some embodiments of the present disclosure. At **601**, a bone conduction speaker including a panel **21** touching human skin and passing vibrations, a transducer **22**, and a housing **10** is provided. At least one sound guiding hole **30** is arranged on the housing **10**. At **602**, the panel **21** is driven by the transducer **22**, causing the vibration **21** to vibrate. At **603**, a leaked sound wave due to the vibrations of the housing is formed, wherein the leaked sound wave transmits in the air. At **604**, a guided sound wave passing through the at least one sound guiding hole **30** from the inside to the outside of the housing **10**. The guided sound wave interferes with the leaked sound wave, reducing the sound leakage of the bone conduction speaker.

The sound guiding holes **30** are preferably set at different positions of the housing **10**.

The effectiveness of reducing sound leakage may be determined by the formulas and method as described above, based on which the positions of sound guiding holes may be determined.

A damping layer is preferably set in a sound guiding hole **30** to adjust the phase and amplitude of the sound wave transmitted through the sound guiding hole **30**.

In some embodiments, different sound guiding holes may generate different sound waves having a same phase to reduce the leaked sound wave having the same wavelength. In some embodiments, different sound guiding holes may

generate different sound waves having different phases to reduce the leaked sound waves having different wavelengths.

In some embodiments, different portions of a sound guiding hole 30 may be configured to generate sound waves having a same phase to reduce the leaked sound waves with the same wavelength. In some embodiments, different portions of a sound guiding hole 30 may be configured to generate sound waves having different phases to reduce the leaked sound waves with different wavelengths.

Additionally, the sound wave inside the housing may be processed to basically have the same value but opposite phases with the leaked sound wave, so that the sound leakage may be further reduced.

Embodiment Three

FIGS. 7A and 7B are schematic structures illustrating an exemplary bone conduction speaker according to some embodiments of the present disclosure. The bone conduction speaker may include an open housing 10, a panel 21, and a transducer 22. The housing 10 may cylindrical and have a sidewall and a bottom. A plurality of sound guiding holes 30 may be arranged on the lower portion of the sidewall (i.e., from about the $\frac{2}{3}$ height of the sidewall to the bottom). The quantity of the sound guiding holes 30 may be 8, the openings of the sound guiding holes 30 may be rectangle. The sound guiding holes 30 may be arranged evenly or evenly in one or more circles on the sidewall of the housing 10.

In the embodiment, the transducer 22 is preferably implemented based on the principle of electromagnetic transduction. The transducer 22 may include components such as a magnetic circuit system (e.g., a magnetizer), a set of coils (e.g., a voice coil), and etc., and the components may locate inside the housing and may generate synchronous vibrations with a same frequency.

FIG. 7C is a diagram illustrating reduced sound leakage according to some embodiments of the present disclosure. In the frequency range of 1400 Hz-4000 Hz, the sound leakage is reduced by more than 5 dB, and in the frequency range of 2250 Hz-2500 Hz, the sound leakage is reduced by more than 20 dB.

In some embodiments, the sound guiding hole(s) at the lower portion of the sidewall of the housing 10 may also be approximately regarded as a point sound source. In some embodiments, the sound guiding hole(s) at the lower portion of the sidewall of the housing 10 and the portion of the housing 10 that generates the leaked sound wave may constitute two-point sound sources. The two-point sound sources may be formed such that the guided sound wave output from the sound guiding hole(s) at the lower portion of the sidewall of the housing 10 may interfere with the leaked sound wave generated by the portion of the housing 10. The interference may reduce a sound pressure level of the leaked sound wave in the surrounding environment (e.g., the target region) at a specific frequency or frequency range.

In some embodiments, the sound waves output from the two-point sound sources may have a same frequency or frequency range (e.g., 1000 Hz, 2500 Hz, 3000 Hz, etc.). In some embodiments, the sound waves output from the first two-point sound sources may have a certain phase difference. In this case, the interference between the sound waves generated by the first two-point sound sources may reduce a sound pressure level of the leaked sound wave in the target region. When the position and phase difference of the first two-point sound sources meet certain conditions, the acous-

tic output device may output different sound effects in the near field (for example, the position of the user's ear) and the far field. For example, if the phases of the first two-point sound sources are opposite, that is, an absolute value of the phase difference between the first two-point sound sources is 180 degrees, the far-field leakage may be reduced.

In some embodiments, the interference between the guided sound wave and the leaked sound wave may relate to frequencies of the guided sound wave and the leaked sound wave and/or a distance between the sound guiding hole(s) and the portion of the housing 10. For example, if the sound guiding hole(s) are set at the lower portion of the sidewall of the housing 10 (as illustrated in FIG. 7A), the distance between the sound guiding hole(s) and the portion of the housing 10 may be small. Correspondingly, the frequencies of sound waves generated by such two-point sound sources may be in a high frequency range (e.g., above 3000 Hz, above 3500 Hz, etc.). Referring to FIG. 7C, the interference may reduce the sound pressure level of the leaked sound wave in the high frequency range.

Embodiment Four

FIGS. 8A and 8B are schematic structures illustrating an exemplary bone conduction speaker according to some embodiments of the present disclosure. The bone conduction speaker may include an open housing 10, a panel 21, and a transducer 22. The housing 10 is cylindrical and have a sidewall and a bottom. The sound guiding holes 30 may be arranged on the central portion of the sidewall of the housing (i.e., from about the $\frac{1}{3}$ height of the sidewall to the $\frac{2}{3}$ height of the sidewall). The quantity of the sound guiding holes 30 may be 8, and the openings (and cross sections) of the sound guiding hole 30 may be rectangle. The sound guiding holes 30 may be arranged evenly or unevenly in one or more circles on the sidewall of the housing 10.

In the embodiment, the transducer 21 may be implemented preferably based on the principle of electromagnetic transduction. The transducer 21 may include components such as magnetizer, voice coil, etc., which may be placed inside the housing and may generate synchronous vibrations with the same frequency.

FIG. 8C is a diagram illustrating reduced sound leakage. In the frequency range of 1000 Hz-4000 Hz, the effectiveness of reducing sound leakage is great. For example, in the frequency range of 1400 Hz-2900 Hz, the sound leakage is reduced by more than 10 dB; in the frequency range of 2200 Hz-2500 Hz, the sound leakage is reduced by more than 20 dB.

It's illustrated that the effectiveness of reduced sound leakage can be adjusted by changing the positions of the sound guiding holes, while keeping other parameters relating to the sound guiding holes unchanged.

Embodiment Five

FIGS. 9A and 9B are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure. The bone conduction speaker may include an open housing 10, a panel 21 and a transducer 22. The housing 10 is cylindrical, with a sidewall and a bottom. One or more perforative sound guiding holes 30 may be along the circumference of the bottom. In some embodiments, there may be 8 sound guiding holes 30 arranged evenly of unevenly in one or more circles on the

bottom of the housing **10**. In some embodiments, the shape of one or more of the sound guiding holes **30** may be rectangle.

In the embodiment, the transducer **21** may be implemented preferably based on the principle of electromagnetic transduction. The transducer **21** may include components such as magnetizer, voice coil, etc., which may be placed inside the housing and may generate synchronous vibration with the same frequency.

FIG. **9C** is a diagram illustrating the effect of reduced sound leakage. In the frequency range of 1000 Hz-3000 Hz, the effectiveness of reducing sound leakage is outstanding. For example, in the frequency range of 1700 Hz-2700 Hz, the sound leakage is reduced by more than 10 dB; in the frequency range of 2200 Hz-2400 Hz, the sound leakage is reduced by more than 20 dB.

Embodiment Six

FIGS. **10A** and **10B** are schematic structures of an exemplary bone conduction speaker according to some embodiments of the present disclosure. The bone conduction speaker may include an open housing **10**, a panel **21** and a transducer **22**. One or more perforative sound guiding holes **30** may be arranged on both upper and lower portions of the sidewall of the housing **10**. The sound guiding holes **30** may be arranged evenly or unevenly in one or more circles on the upper and lower portions of the sidewall of the housing **10**. In some embodiments, the quantity of sound guiding holes **30** in every circle may be 8, and the upper portion sound guiding holes and the lower portion sound guiding holes may be symmetrical about the central cross section of the housing **10**. In some embodiments, the shape of the sound guiding hole **30** may be circle.

The shape of the sound guiding holes on the upper portion and the shape of the sound guiding holes on the lower portion may be different; One or more damping layers may be arranged in the sound guiding holes to reduce leaked sound waves of the same wave length (or frequency), or to reduce leaked sound waves of different wave lengths.

FIG. **10C** is a diagram illustrating the effect of reducing sound leakage according to some embodiments of the present disclosure. In the frequency range of 1000 Hz-4000 Hz, the effectiveness of reducing sound leakage is outstanding. For example, in the frequency range of 1600 Hz-2700 Hz, the sound leakage is reduced by more than 15 dB; in the frequency range of 2000 Hz-2500 Hz, where the effectiveness of reducing sound leakage is most outstanding, the sound leakage is reduced by more than 20 dB. Compared to embodiment three, this scheme has a relatively balanced effect of reduced sound leakage on various frequency range, and this effect is better than the effect of schemes where the height of the holes are fixed, such as schemes of embodiment three, embodiment four, embodiment five, and so on.

In some embodiments, the sound guiding hole(s) at the upper portion of the sidewall of the housing **10** (also referred to as first hole(s)) may be approximately regarded as a point sound source. In some embodiments, the first hole(s) and the portion of the housing **10** that generates the leaked sound wave may constitute two-point sound sources (also referred to as first two-point sound sources). As for the first two-point sound sources, the guided sound wave generated by the first hole(s) (also referred to as first guided sound wave) may interfere with the leaked sound wave or a portion thereof generated by the portion of the housing **10** in a first region. In some embodiments, the sound waves output from the first two-point sound sources may have a same frequency (e.g.,

a first frequency). In some embodiments, the sound waves output from the first two-point sound sources may have a certain phase difference. In this case, the interference between the sound waves generated by the first two-point sound sources may reduce a sound pressure level of the leaked sound wave in the target region. When the position and phase difference of the first two-point sound sources meet certain conditions, the acoustic output device may output different sound effects in the near field (for example, the position of the user's ear) and the far field. For example, if the phases of the first two-point sound sources are opposite, that is, an absolute value of the phase difference between the first two-point sound sources is 180 degrees, the far-field leakage may be reduced according to the principle of reversed phase cancellation.

In some embodiments, the sound guiding hole(s) at the lower portion of the sidewall of the housing **10** (also referred to as second hole(s)) may also be approximately regarded as another point sound source. Similarly, the second hole(s) and the portion of the housing **10** that generates the leaked sound wave may also constitute two-point sound sources (also referred to as second two-point sound sources). As for the second two-point sound sources, the guided sound wave generated by the second hole(s) (also referred to as second guided sound wave) may interfere with the leaked sound wave or a portion thereof generated by the portion of the housing **10** in a second region. The second region may be the same as or different from the first region. In some embodiments, the sound waves output from the second two-point sound sources may have a same frequency (e.g., a second frequency).

In some embodiments, the first frequency and the second frequency may be in certain frequency ranges. In some embodiments, the frequency of the guided sound wave output from the sound guiding hole(s) may be adjustable. In some embodiments, the frequency of the first guided sound wave and/or the second guided sound wave may be adjusted by one or more acoustic routes. The acoustic routes may be coupled to the first hole(s) and/or the second hole(s). The first guided sound wave and/or the second guided sound wave may be propagated along the acoustic route having a specific frequency selection characteristic. That is, the first guided sound wave and the second guided sound wave may be transmitted to their corresponding sound guiding holes via different acoustic routes. For example, the first guided sound wave and/or the second guided sound wave may be propagated along an acoustic route with a low-pass characteristic to a corresponding sound guiding hole to output guided sound wave of a low frequency. In this process, the high frequency component of the sound wave may be absorbed or attenuated by the acoustic route with the low-pass characteristic. Similarly, the first guided sound wave and/or the second guided sound wave may be propagated along an acoustic route with a high-pass characteristic to the corresponding sound guiding hole to output guided sound wave of a high frequency. In this process, the low frequency component of the sound wave may be absorbed or attenuated by the acoustic route with the high-pass characteristic.

FIG. **10D** is a schematic diagram illustrating an acoustic route according to some embodiments of the present disclosure. FIG. **10E** is a schematic diagram illustrating another acoustic route according to some embodiments of the present disclosure. FIG. **10F** is a schematic diagram illustrating a further acoustic route according to some embodiments of the present disclosure. In some embodiments, structures such as a sound tube, a sound cavity, a sound resistance, etc., may be set in the acoustic route for adjusting frequencies for

the sound waves (e.g., by filtering certain frequencies). It should be noted that FIGS. 10D-10F may be provided as examples of the acoustic routes, and not intended be limiting.

As shown in FIG. 10D, the acoustic route may include one or more lumen structures. The one or more lumen structures may be connected in series. An acoustic resistance material may be provided in each of at least one of the one or more lumen structures to adjust acoustic impedance of the entire structure to achieve a desirable sound filtering effect. For example, the acoustic impedance may be in a range of 5MKS Rayleigh to 500MKS Rayleigh. In some embodiments, a high-pass sound filtering, a low-pass sound filtering, and/or a band-pass filtering effect of the acoustic route may be achieved by adjusting a size of each of at least one of the one or more lumen structures and/or a type of acoustic resistance material in each of at least one of the one or more lumen structures. The acoustic resistance materials may include, but not limited to, plastic, textile, metal, permeable material, woven material, screen material or mesh material, porous material, particulate material, polymer material, or the like, or any combination thereof. By setting the acoustic routes of different acoustic impedances, the acoustic output from the sound guiding holes may be acoustically filtered. In this case, the guided sound waves may have different frequency components.

As shown in FIG. 10E, the acoustic route may include one or more resonance cavities. The one or more resonance cavities may be, for example, Helmholtz cavity. In some embodiments, a high-pass sound filtering, a low-pass sound filtering, and/or a band-pass filtering effect of the acoustic route may be achieved by adjusting a size of each of at least one of the one or more resonance cavities and/or a type of acoustic resistance material in each of at least one of the one or more resonance cavities.

As shown in FIG. 10F, the acoustic route may include a combination of one or more lumen structures and one or more resonance cavities. In some embodiments, a high-pass sound filtering, a low-pass sound filtering, and/or a band-pass filtering effect of the acoustic route may be achieved by adjusting a size of each of at least one of the one or more lumen structures and one or more resonance cavities and/or a type of acoustic resistance material in each of at least one of the one or more lumen structures and one or more resonance cavities. It should be noted that the structures exemplified above may be for illustration purposes, various acoustic structures may also be provided, such as a tuning net, tuning cotton, etc.

In some embodiments, the interference between the leaked sound wave and the guided sound wave may relate to frequencies of the guided sound wave and the leaked sound wave and/or a distance between the sound guiding hole(s) and the portion of the housing 10. In some embodiments, the portion of the housing that generates the leaked sound wave may be the bottom of the housing 10. The first hole(s) may have a larger distance to the portion of the housing 10 than the second hole(s). In some embodiments, the frequency of the first guided sound wave output from the first hole(s) (e.g., the first frequency) and the frequency of second guided sound wave output from second hole(s) (e.g., the second frequency) may be different.

In some embodiments, the first frequency and second frequency may associate with the distance between the at least one sound guiding hole and the portion of the housing 10 that generates the leaked sound wave. In some embodiments, the first frequency may be set in a low frequency range. The second frequency may be set in a high frequency

range. The low frequency range and the high frequency range may or may not overlap.

In some embodiments, the frequency of the leaked sound wave generated by the portion of the housing 10 may be in a wide frequency range. The wide frequency range may include, for example, the low frequency range and the high frequency range or a portion of the low frequency range and the high frequency range. For example, the leaked sound wave may include a first frequency in the low frequency range and a second frequency in the high frequency range. In some embodiments, the leaked sound wave of the first frequency and the leaked sound wave of the second frequency may be generated by different portions of the housing 10. For example, the leaked sound wave of the first frequency may be generated by the sidewall of the housing 10, the leaked sound wave of the second frequency may be generated by the bottom of the housing 10. As another example, the leaked sound wave of the first frequency may be generated by the bottom of the housing 10, the leaked sound wave of the second frequency may be generated by the sidewall of the housing 10. In some embodiments, the frequency of the leaked sound wave generated by the portion of the housing 10 may relate to parameters including the mass, the damping, the stiffness, etc., of the different portion of the housing 10, the frequency of the transducer 22, etc.

In some embodiments, the characteristics (amplitude, frequency, and phase) of the first two-point sound sources and the second two-point sound sources may be adjusted via various parameters of the acoustic output device (e.g., electrical parameters of the transducer 22, the mass, stiffness, size, structure, material, etc., of the portion of the housing 10, the position, shape, structure, and/or number (or count) of the sound guiding hole(s) so as to form a sound field with a particular spatial distribution. In some embodiments, a frequency of the first guided sound wave is smaller than a frequency of the second guided sound wave.

A combination of the first two-point sound sources and the second two-point sound sources may improve sound effects both in the near field and the far field.

Referring to FIGS. 4D, 7C, and 10C, by designing different two-point sound sources with different distances, the sound leakage in both the low frequency range and the high frequency range may be properly suppressed. In some embodiments, the closer distance between the second two-point sound sources may be more suitable for suppressing the sound leakage in the far field, and the relative longer distance between the first two-point sound sources may be more suitable for reducing the sound leakage in the near field. In some embodiments, the amplitudes of the sound waves generated by the first two-point sound sources may be set to be different in the low frequency range. For example, the amplitude of the guided sound wave may be smaller than the amplitude of the leaked sound wave. In this case, the sound pressure level of the near-field sound may be improved. The volume of the sound heard by the user may be increased.

Embodiment Seven

FIGS. 11A and 11B are schematic structures illustrating a bone conduction speaker according to some embodiments of the present disclosure. The bone conduction speaker may include an open housing 10, a panel 21 and a transducer 22. One or more perforative sound guiding holes 30 may be set on upper and lower portions of the sidewall of the housing 10 and on the bottom of the housing 10. The sound guiding holes 30 on the sidewall are arranged evenly or unevenly in

21

one or more circles on the upper and lower portions of the sidewall of the housing 10. In some embodiments, the quantity of sound guiding holes 30 in every circle may be 8, and the upper portion sound guiding holes and the lower portion sound guiding holes may be symmetrical about the central cross section of the housing 10. In some embodiments, the shape of the sound guiding hole 30 may be rectangular. There may be four sound guiding holds 30 on the bottom of the housing 10. The four sound guiding holes 30 may be linear-shaped along arcs, and may be arranged evenly or unevenly in one or more circles with respect to the center of the bottom. Furthermore, the sound guiding holes 30 may include a circular perforative hole on the center of the bottom.

FIG. 11C is a diagram illustrating the effect of reducing sound leakage of the embodiment. In the frequency range of 1000 Hz-4000 Hz, the effectiveness of reducing sound leakage is outstanding. For example, in the frequency range of 1300 Hz-3000 Hz, the sound leakage is reduced by more than 10 dB; in the frequency range of 2000 Hz-2700 Hz, the sound leakage is reduced by more than 20 dB. Compared to embodiment three, this scheme has a relatively balanced effect of reduced sound leakage within various frequency range, and this effect is better than the effect of schemes where the height of the holes are fixed, such as schemes of embodiment three, embodiment four, embodiment five, and etc. Compared to embodiment six, in the frequency range of 1000 Hz-1700 Hz and 2500 Hz-4000 Hz, this scheme has a better effect of reduced sound leakage than embodiment six.

Embodiment Eight

FIGS. 12A and 12B are schematic structures illustrating a bone conduction speaker according to some embodiments of the present disclosure. The bone conduction speaker may include an open housing 10, a panel 21 and a transducer 22. A perforative sound guiding hole 30 may be set on the upper portion of the sidewall of the housing 10. One or more sound guiding holes may be arranged evenly or unevenly in one or more circles on the upper portion of the sidewall of the housing 10. There may be 8 sound guiding holes 30, and the shape of the sound guiding holes 30 may be circle.

After comparison of calculation results and test results, the effectiveness of this embodiment is basically the same with that of embodiment one, and this embodiment can effectively reduce sound leakage.

Embodiment Nine

FIGS. 13A and 13B are schematic structures illustrating a bone conduction speaker according to some embodiments of the present disclosure. The bone conduction speaker may include an open housing 10, a panel 21 and a transducer 22.

The difference between this embodiment and the above-described embodiment three is that to reduce sound leakage to greater extent, the sound guiding holes 30 may be arranged on the upper, central and lower portions of the sidewall 11. The sound guiding holes 30 are arranged evenly or unevenly in one or more circles. Different circles are formed by the sound guiding holes 30, one of which is set along the circumference of the bottom 12 of the housing 10. The size of the sound guiding holes 30 are the same.

The effect of this scheme may cause a relatively balanced effect of reducing sound leakage in various frequency ranges compared to the schemes where the position of the holes are fixed. The effect of this design on reducing sound leakage is relatively better than that of other designs where the heights

22

of the holes are fixed, such as embodiment three, embodiment four, embodiment five, etc.

Embodiment Ten

The sound guiding holes 30 in the above embodiments may be perforative holes without shields.

In order to adjust the effect of the sound waves guided from the sound guiding holes, a damping layer (not shown in the figures) may locate at the opening of a sound guiding hole 30 to adjust the phase and/or the amplitude of the sound wave.

There are multiple variations of materials and positions of the damping layer. For example, the damping layer may be made of materials which can damp sound waves, such as tuning paper, tuning cotton, nonwoven fabric, silk, cotton, sponge or rubber. The damping layer may be attached on the inner wall of the sound guiding hole 30, or may shield the sound guiding hole 30 from outside.

More preferably, the damping layers corresponding to different sound guiding holes 30 may be arranged to adjust the sound waves from different sound guiding holes to generate a same phase. The adjusted sound waves may be used to reduce leaked sound wave having the same wavelength. Alternatively, different sound guiding holes 30 may be arranged to generate different phases to reduce leaked sound wave having different wavelengths (i.e., leaked sound waves with specific wavelengths).

In some embodiments, different portions of a same sound guiding hole can be configured to generate a same phase to reduce leaked sound waves on the same wavelength (e.g., using a pre-set damping layer with the shape of stairs or steps). In some embodiments, different portions of a same sound guiding hole can be configured to generate different phases to reduce leaked sound waves on different wavelengths.

The above-described embodiments are preferable embodiments with various configurations of the sound guiding hole(s) on the housing of a bone conduction speaker, but a person having ordinary skills in the art can understand that the embodiments don't limit the configurations of the sound guiding hole(s) to those described in this application.

In the past bone conduction speakers, the housing of the bone conduction speakers is closed, so the sound source inside the housing is sealed inside the housing. In the embodiments of the present disclosure, there can be holes in proper positions of the housing, making the sound waves inside the housing and the leaked sound waves having substantially same amplitude and substantially opposite phases in the space, so that the sound waves can interfere with each other and the sound leakage of the bone conduction speaker is reduced. Meanwhile, the volume and weight of the speaker do not increase, the reliability of the product is not comprised, and the cost is barely increased. The designs disclosed herein are easy to implement, reliable, and effective in reducing sound leakage.

Embodiment Eleven

A vibration generation portion of a bone conduction speaker may be shown in FIG. 14A. A transducer of the bone conduction speaker may include a magnetic circuit system including a magnetic flux conduction plate 1410, a magnet 1411 and a magnetizer 1412, a vibration board 1414, a coil 1415, a first vibration conductive plate 1416, and a second vibration conductive plate 1417. The panel 1413 may protrude out of the housing 1419 and may be connected to the

vibration board **1414** by glue. The transducer may be fixed to the housing **1419** via the first vibration conductive plate **1416** forming a suspended structure.

A compound vibration system including the vibration board **1414**, the first vibration conductive plate **1416**, and the second vibration conductive plate **1417** may generate a smoother frequency response curve, so as to improve the sound quality of the bone conduction speaker. The transducer may be fixed to the housing **1419** via the first vibration conductive plate **1416** to reduce the vibration that the transducer is transferring to the housing, thus effectively decreasing sound leakage caused by the vibration of the housing, and reducing the effect of the vibration of the housing on the sound quality. FIG. **14B** shows frequency response curves of the vibration intensities of the housing of the vibration generation portion and the panel. The bold line refers to the frequency response of the vibration generation portion including the first vibration conductive plate **1416**, and the thin line refers to the frequency response of the vibration generation portion without the first vibration conductive plate **1416**. As shown in FIG. **14B**, the vibration intensity of the housing of the bone conduction speaker without the first vibration conductive plate **1416** may be larger than that of the bone conduction speaker with the first vibration conductive plate **1416** when the frequency is higher than 500 Hz. FIG. **14C** shows a comparison of the sound leakage between a bone conduction speaker includes the first vibration conductive plate **1416** and another bone conduction speaker does not include the first vibration conductive plate **1416**. The sound leakage when the bone conduction speaker includes the first vibration conductive plate may be smaller than the sound leakage when the bone conduction speaker does not include the first vibration conductive plate in the intermediate frequency range (for example, about 1000 Hz). It can be concluded that the use of the first vibration conductive plate between the panel and the housing may effectively reduce the vibration of the housing, thereby reducing the sound leakage.

The first vibration conductive plate **1416** may be made of the material, for example but not limited to stainless steel, copper, plastic, polycarbonate, or the like, and the thickness may be in a range of 0.01 mm-1 mm.

FIG. **15** illustrates a structure of a vibration generation portion of a bone conduction speaker according to some embodiments of the present disclosure. The vibration generation portion illustrated in FIG. **15** may be different with the vibration generation portion illustrated in FIG. **14A** in the following aspects. As shown in FIG. **15**, the panel **1513** may be configured to have a vibration transfer layer **1520** (for example but not limited to, silicone rubber) to produce a certain deformation to match a user's skin. A contact portion being in contact with the panel **1513** on the vibration transfer layer **1520** may be higher than a portion not being in contact with the panel **1513** on the vibration transfer layer **1520** to form a step structure. The portion not being in contact with the panel **1513** on the vibration transfer layer **1520** may be configured to have one or more holes **1521**. In some embodiment, the vibration generation portion may be located before or inside an ear of the user. The vibration transfer layer **1520** may contact the user's skin. In such cases, at least one of the one or more holes **1521** on the vibration transfer layer **1520** may face the user. Merely by way of example, the vibration transfer layer **1520** may contact the interior of the user's auricle such that the least one of the one or more holes **1521** may face an ear canal of the user. In some embodiment, the one or more holes **1521** may be configured to guide sound waves inside the housing

1519 of the bone conduction speaker through the one or more holes to an outside of the housing **1519**. In such cases, the bone conduction speaker may also be used as an air conduction speaker. In some embodiment, the holes on the vibration transfer layer **1520** may reduce the sound leakage: the connection between the panel **1513** and the housing **1519** via the vibration transfer layer **1520** may be weakened, and vibration transferred from panel **1513** to the housing **1519** via the vibration transfer layer **1520** may be reduced, thereby reducing the sound leakage caused by the vibration of the housing; the area of the vibration transfer layer **1520** configured to have holes on the portion without protrusion may be reduced, thereby reducing air and sound leakage caused by the vibration of the air; the vibration of air in the housing **1519** may be guided out, interfering with the vibration of air caused by the housing **1519**, thereby reducing the sound leakage.

FIG. **16A** illustrates an application scenario of a bone conduction speaker according to some embodiments of the present disclosure. In some embodiments, as the panel (e.g., the panel **1413** illustrated in FIG. **14A**) may protrude out of the housing (e.g., the housing **1419** illustrated in FIG. **14A**), meanwhile, the panel may be connected to the housing via the first vibration conductive plate (e.g., the first vibration conductive plate **1416**), the degree of coupling between the panel and the housing may be dramatically reduced, and the panel may be in contact with a user with a higher freedom to adapt complex contact surfaces (as shown in the right figure of FIG. **16A**) as the first vibration conductive plate provides a certain amount of deformation. The first vibration conductive plate may incline the panel relative to the housing with a certain angle. Preferably, the slope angle may not exceed 5 degrees.

The vibration efficiency may differ with contacting statuses. A better contacting status may lead to a higher vibration transfer efficiency. FIG. **16B** illustrates a vibration response curve of a bone conduction speaker according to some embodiments of the present disclosure. As shown in FIG. **16B**, the bold line shows the vibration transfer efficiency with a better contacting status, and the thin line shows a worse contacting status. It may be concluded that the better contacting status may correspond to a higher vibration transfer efficiency.

FIG. **17** illustrates a structure of a vibration generation portion of a bone conduction speaker according to some embodiments of the present disclosure. The difference between the vibration generation portion illustrated in FIG. **17** and the vibration generation portion illustrated in FIG. **14A** may include the following aspects. A boarder may be added to surround the housing. When the housing **1719** contacts a user's skin, the surrounding boarder **1710** may facilitate an even distribution of an applied force, and improve the user's wearing comfort. As shown in FIG. **17**, there may be a height difference d_0 between the surrounding border **1710** and the panel **1713**. The force from the skin to the panel **1713** may decrease the distance d between the panel **1713** and the surrounding border **1710**. When the force between the bone conduction speaker and the user is larger than the force applied to the first vibration conductive plate **1716** with a deformation of d_0 , the extra force may be transferred to the user's skin via the surrounding border **1710**, without influencing the clamping force of the vibration portion, with the consistency of the clamping force improved, thereby ensuring the sound quality.

FIG. **18** illustrates a structure of a vibration generation portion of a bone conduction speaker according to some embodiments of the present disclosure. As shown in FIG. **18**,

25

sound guiding holes may be located at the vibration transfer layer **1820** and the housing **1819**, respectively. As described in connection with FIG. **15**, the vibration generation portion may be located before or inside an ear of the user. The vibration transfer layer **1820** may contact the user's skin. In such cases, at least one of the sound guiding holes on the vibration transfer layer **1820** may face the user. Merely by way of example, the vibration transfer layer **1820** may contact the interior of the user's auricle such that the least one of the sound guiding holes on the vibration transfer layer **1820** may face an ear canal of the user. In some embodiment, the one or more sound guiding holes may be configured to guide sound waves inside the housing **1819** through the one or more sound guiding holes to an outside of the housing **1819**. In such cases, the bone conduction speaker may also be used as an air conduction speaker. In some embodiments, the sound waves inside the housing **1819** may also be guided to the outside of the housing **1819** through the one or more sound guiding holes (e.g., the one or more sound guiding holes located on a side wall of the housing), and interferes with the leaked acoustic wave due to the vibration of the air out of the housing, thus reducing the sound leakage.

It's noticeable that above statements are preferable embodiments and technical principles thereof. A person having ordinary skill in the art is easy to understand that this disclosure is not limited to the specific embodiments stated, and a person having ordinary skill in the art can make various obvious variations, adjustments, and substitutes within the protected scope of this disclosure. Therefore, although above embodiments state this disclosure in detail, this disclosure is not limited to the embodiments, and there can be many other equivalent embodiments within the scope of the present disclosure, and the protected scope of this disclosure is determined by following claims.

What is claimed is:

1. A method, comprising:
 - providing a speaker including:
 - a housing;
 - a transducer residing inside the housing and configured to generate vibrations, the vibrations producing a sound wave inside the housing and causing a leaked sound wave spreading outside the housing;
 - at least one sound guiding hole located on the housing and configured to guide the sound wave inside the housing through the at least one sound guiding hole to an outside of the housing, the guided sound wave having a phase different from a phase of the leaked sound wave; and
 - at least one acoustic route coupled to the at least one sound guiding hole, wherein the guided sound wave is propagated to the at least one sound guiding hole along the acoustic route, wherein
 - the at least one acoustic route being configured to reduce a sound pressure level of the guided sound wave in a first frequency range in a target region, and
 - the guided sound wave interferes with the leaked sound wave in a second frequency range in a target region, the interference reducing a sound pressure level of the leaked sound wave in the second frequency range in the target region.
 2. The method of claim 1, wherein a frequency in the second frequency range is less than a frequency in the first frequency range.
 3. The method of claim 2, wherein the first frequency range is larger than 3000 Hz.

26

4. The method of claim 2, wherein the at least one acoustic route is configured to absorb the guided sound wave in the first frequency range such that the sound pressure level of the sound waves in the first frequency range in the target region is reduced.

5. The method of claim 1, wherein a tuning net or tuning cotton is disposed in the acoustic route.

6. The method of claim 1, wherein the acoustic route includes one or more lumen structures.

7. The method of claim 6, wherein at least one of the one or more lumen structures includes an acoustic resistance material for adjusting acoustic impedance of the acoustic route.

8. The method of claim 7, wherein the acoustic impedance of the acoustic route is in a range of 5MKS Rayleigh to 500MKS Rayleigh.

9. The method of claim 7, wherein the acoustic resistance material includes at least one of: plastic, textile, metal, permeable material, woven material, screen material, mesh material, porous material, particulate material, or polymer material.

10. The method of claim 1, wherein the acoustic route includes one or more resonance cavities.

11. The method of claim 10, wherein at least one of the one or more resonance cavities includes a Helmholtz cavity.

12. The method of claim 10, wherein at least one of the one or more resonance cavities includes an acoustic resistance material.

13. The method of claim 1, wherein the acoustic route includes at least one lumen structure and at least one resonance cavity.

14. The method of claim 1, wherein:

- the housing includes a bottom or a sidewall; and
- at least one of the at least one sound guiding hole is located on the bottom or the sidewall of the housing.

15. The method of claim 1, wherein a location of the at least one sound guiding hole is determined based on at least one of: a vibration frequency of the transducer, a shape of the at least one sound guiding hole, the target region, or the second frequency range.

16. The method of claim 1, wherein the at least one sound guiding hole includes a damping layer, the damping layer being configured to adjust the phase of the guided sound wave in the target region.

17. The method of claim 1, wherein at least a portion of the second frequency range is 1500 Hz to 3000 Hz.

18. The method of claim 17, wherein the sound pressure level of the leaked sound wave in the at least a portion of the second frequency range is reduced by more than 10 dB on average.

19. A speaker, comprising:

- a housing;
- a transducer residing inside the housing and configured to generate vibrations, the vibrations producing a sound wave inside the housing and causing a leaked sound wave spreading outside the housing;
- at least one sound guiding hole located on the housing and configured to guide the sound wave inside the housing through the at least one sound guiding hole to an outside of the housing, the guided sound wave having a phase different from a phase of the leaked sound wave; and

at least one acoustic route coupled to the at least one sound guiding hole, wherein the guided sound wave is propagated to the at least one sound guiding hole along the acoustic route, wherein

the at least one acoustic route being configured to reduce a sound pressure level of the guided sound wave in a first frequency range in a target region, and the guided sound wave interferes with the leaked sound wave in a second frequency range in a target region, 5 the interference reducing a sound pressure level of the leaked sound wave in the second frequency range in the target region.

20. The speaker of claim 19, wherein a frequency in the second frequency range is less than a frequency in the first 10 frequency range.

* * * * *