

AUSTRALIA
Patents Act 1990

PATENT REQUEST: STANDARD PATENT

I/We, being the person(s) identified below as the Applicant(s), request the grant of a patent to the person(s) identified below as the Nominated Person(s), for an invention described in the accompanying standard complete specification.

Full application details follow.

[71] **Applicant:** KONE Elevator GmbH

Applicant's Address: Rathausstrasse 1, CH-6340 Baar, Switzerland

[70] **Nominated Person:** KONE Elevator GmbH

Address: Rathausstrasse 1, CH-6340 Baar, Switzerland

[54] **Invention Title:** DOUBLE-SIDED SAFETY GEAR

[72] **Name(s) of actual inventor(s):** Johannes De Jong


Address(es): Kauhajoenkuja 1
SF-04430 Järvenpää
FINLAND

[74] **Address for service in Australia**
COLLISON & CO., 117 King William Street, Adelaide, S.A. 5000
Attorney Code CO

BASIC CONVENTION APPLICATION(S) DETAILS

[31] Application Number [33] Country Country [32] Date of Application
915429 Finland Code FI 18.11.1991

KONE Elevator GmbH


Kimmo Laukas
(Signature of Applicant)


Tuomo Erola

15th May 1992
(Date)

AUSTRALIA
Patents Act 1990
NOTICE OF ENTITLEMENT
(To be filed before acceptance)

I/We..... KONE Elevator GmbH
of..... Rathausstrasse 1, CH-6340 Baar, Switzerland
.....
.....

being the Applicant(s) in respect of the Application *filed herewith/*No. _____, state the following:

Part 1 - Must be completed for all applications

The person(s) nominated for the grant of the patent:

~~*is/*are the actual inventor(s)~~

or *has entitlement from the actual inventor(s) ...by..assignment..document..dated.....
...21.5.1991.....

(eg by assignment dated ..., by reason of normal employment of the inventors, as legal representative of ..., etc)

***Part 2 - Must be completed for all convention applications**

The person(s) nominated for the grant of the patent:

~~*is/*are the applicant(s) of the basic application(s) listed on the patent request form~~

or *has entitlement from the applicant(s) of the basic application(s) listed on the patent request form

..... KONE Elevator GmbH is fully owned subsidiary of KONE Corporation.....

..... who has assigned the invention to KONE ELEVATOR GmbH.....
(eg by assignment, by consent, etc)

The basic application(s) listed on the request form:

~~*is/*are the first application(s) made in a Convention country in respect of the invention~~

~~*was/*were not the first application(s) made in a Convention country in respect of the invention, and a
request has been made under Section 96 of the Patents Act 1990 (or Section 142AA of the Patents Act 1952)~~

~~to disregard the following application(s)~~

~~***Part 3 - Must be completed for PCT applications.**~~

~~The person(s) nominated for the grant of the patent:~~

~~*is/*are the applicant(s) of the application(s) listed in the declaration under Article 8 of the PCT~~

~~or *entitled to rely on the application(s) listed in the declaration under Article 8 of the PCT.~~

~~***Part 4 - Must be completed if the application relates to a microorganism and relies on Section 6 of the Act.**~~

~~The person(s) nominated for the grant of the patent *is/*are:~~

~~*the depositor(s) of the deposits listed hereafter (by number, depository institution and date)~~

~~or *entitled to rely on the deposits listed hereafter (by number, depository institution, date, and depositor's
name and address) for the following reasons:~~

*** Part 5 - Must be completed if the application is a Convention application, or the application was made under the PCT and the applicant made a declaration under Article 8 of the PCT in respect of the basic application.**

Except as stated in the next paragraph, the basic application(s) *listed on the patent request form/*referred to in the declaration under Article 8 of the PCT *is/*are the application(s) first made in a Convention country in respect of the invention.

A request has been made under Section 96 of the 1990 Act (or Section 142AA of the 1952 Act) to disregard the following application

19th Aug, 1992

Date

KONE Elevator GmbH

Insert full name: Kimmo Laukas Tuomo Erola
*Position: Managing Director of KONE
Elevator GmbH

By their/his/her Patent Attorneys
COLLISON & CO.

* delete as applicable


42480 GEH:PFB

646603

P/00/011
Regulation 3.2

AUSTRALIA
Patents Act 1990

COMPLETE SPECIFICATION
FOR A STANDARD PATENT
ORIGINAL



Name of Applicant:

.....: KONE ELEVATOR GmbH

.....: **Actual Inventor:**

.....: JOHANNES DE JONG

.....: **Address for Service:**

COLLISON & CO., 117 King William Street, Adelaide, S.A. 5000

Invention Title:

DOUBLE-SIDED SAFETY GEAR

The following statement is a full description of this invention, including the best method of performing it known to us:

The present invention relates to a safety gear e.g. for an elevator car or counterweight, said safety gear comprising at least one wedge chamber and at least one working wedge acting upon a guide rail of the elevator and activated by means of a transmission element.

In elevators having a rated car speed exceeding 1 m/s, sliding safety gears are normally used as precautions when the elevator speed for some reason increases too much. The sliding safety gears grip the guide rails, of which there are usually two or four. In cases where each guide rail has its own sliding safety gear, the safety gears are mutually synchronized via separate synchronizing levers. The sliding safety gear is provided with a sliding surface which has a high friction coefficient and is pressed against the guide rail when the safety gear is activated, thus decelerating or stopping the elevator car by means of friction.

Various elevator safety gear structures have been developed. One of the commonest is a large U-shaped spring made of spring steel, in which a wedge is thrust into the gap between the spring ends as it grips the guide rail. In addition, many safety gears have a separate release wedge by means of which the wedge is released from the guide rail after the safety gear action. The releasing is effected by raising the elevator car.

An example of the state of the art is also Finnish patent no. 74686, corresponding to German patent DE 3715098 and American patent US 4819765. To stop the elevator car unit, both the car unit and the counterweight can be provided with safety gears e.g. as presented in patent 74686 and, to ensure safe operation in door zones, the overspeed governor can be provided with an electrically operated triggering device for switch-over to low speed. However, this is an expensive solution and takes up plenty of room because a safety gear is needed for the counterweight as well. In a sliding elevator safety gear according to this patent, standard parts are used and the wedge chamber is

provided with a power means which imparts to the counter wedge a force acting substantially in the direction of the guide surface. The distance between the upper edges of the guide surfaces is equal to or greater than the distance between the lower edges of the corresponding guide surfaces. The force of the power means is generated by a spring. This patent does not accomplish compensation of the changes of friction on both sides but only on the side of the spring. Moreover, the clearances are relatively small.

10 In certain countries, the elevator regulations have been revised to prevent the occurrence of the following accidents:

- An elevator car hits the ceiling of the elevator shaft after running up at an overspeed.
- A passenger is crushed by the doorway structures of an elevator that has left a floor with doors open.

15 The new regulations also allow more freedom for the design of the safety equipment as they permit the use of non-mechanical solutions as well.

The double-sided safety gear of the invention is an improvement to the currently used safety gear, which was described above as an example of the state of the art. The object of the present invention is to eliminate the drawbacks mentioned. The safety gear of the invention has at least one counter wedge for each working wedge of the elevator, said counter wedge moving along a guide surface provided in the wedge chamber, and the counter wedge of the working wedge is on the same side of the guide rail as the working wedge in question.

The preferred embodiments of the invention are presented in the other claims.

30 The device of the invention has the advantages that

- the clearances are larger than in previously known solutions
- the variations in friction appearing on both sides of the guide rail can be eliminated, so the friction coefficient remains constant

35

- user safety is improved as well.

In the following, the safety gear of the invention is described in detail by referring to the drawings, in which

- Fig. 1 presents the safety gear of the invention
 5 Fig. 2 presents the same safety gear in top view
 Fig. 3 presents the safety gear of the invention in top view, showing a lever system, a synchronizing fork and a guide rail.

The safety gear has a frame 4 which is fixed to the elevator
 10 car unit 1 by means of bolts 2. The frame is provided with a wedge chamber 8, which houses working wedges 9 placed on either side of the guide rail. The upper and lower ends of the working wedges 9 differ in width because of their wedge-like shape. For each working wedge 9 there is a counter wedge 10, which also
 15 has a wedge-like shape, and these two counter wedges 10 are placed on either side of the guide rail 30. For lateral adjustment of the wedge chamber 8, the safety gear is provided with adjusting screws 7 seated in the safety gear frame 4. The working wedges 9 are attached by their upper ends with synchro-
 20 nizing forks 31 via levers 37 to ropes or other lifting means. This safety gear can only grip during downward travel of the elevator car. The wedge chamber 8 is provided with guide surfaces 14 and 39, along which the counter wedge 10 moves so that the guide surfaces 14 and 39 are parallel to each other. The
 25 counter wedge 10 has a guide surface 13 provided with balls 15 on which the working wedge 9 moves. The distance of guide surface 13 from the guide rail 30 diminishes as you trace the guide surface by moving upwards along it, and, similarly, the distance of guide surface 15 from the guide rail 30 increases
 30 as you follow it in the upward direction. Correspondingly, the counter wedge 10 moves along guide surface 14. The wedge chamber 8 is centered relative to the guide rail by means of screws 7. The friction between the guide surface of the wedge chamber and the counter wedge is reduced by means of balls 15, which
 35 convert the friction into rolling friction. To hold the balls 15 in place, the guide surfaces are provided with rolling slots

16. The guide surface between wedges 9 and 10 is provided with similar rolling slots 16. To ensure that the balls will not come out of their rolling slots, the wedge chamber is provided with retaining cotters 12 placed at the lower ends of the

5 slots. At the upper ends the corresponding retaining cotters 11 are attached to the wedges 9. Balls 15 and 42 in slots 14 and 39 keep wedges 10 at the right distance from the wedge chamber. The rolling slots 17 and the guide pins 41 keep the wedges 9 at the right distance from the surface of the counter wedge 10.

10 The vertical surface of the wedges 9 travelling along the elevator guide rail 30 are provided with separate braking surfaces 18 with friction characteristics that are better than those of the wedge material itself. The lower part of the working wedge 9 is provided with an adjusting screw 32, whose stop face is

15 the bottom surface 33 of the counter wedge 10. Attached to the upper ends of the working wedges 9 are synchronizing rods 34, which are further attached to the synchronizing forks 31 and the levers 37. Between the wedge chamber 8 and the upper ends of the counter wedges 10 are pressure springs 40 which push the

20 counter wedges 10 obliquely downwards. The pressure springs 40 are attached to the counter wedges 10 by retention screws 35. The stop faces 36 of the pressure springs 40 in the wedge chamber 8 are so inclined as to direct the spring force applied to the counter wedges 10 so that it will act in a direction paral-

25 lel to guide surfaces 14 and 39. Furthermore, the wedge chamber 8 is provided with protecting plates 38 to prevent the wedges from moving sideways out of the wedge chamber 8. At the same time, they protect the wedge chamber 8 against dirt and rubbish.

30 Below is a brief description of the operation of the safety gear of the invention. When the speed of the elevator car during downward travel increases too much, the overspeed governor (not shown in the figure) is activated, causing the working wedges 9 of the safety gear to rise. The working wedges 9 act

35 simultaneously in the same direction. As the elevator car and, along with it, the wedge chamber 8 travel downwards in relation to the wedges 9, the braking surfaces 18 of the working wedges 9 engage the elevator guide rail 30 and the working wedges 9

continue moving upwards in relation to the wedge chamber 8. The relative upward motion of the working wedge 9 in relation to the wedge chamber 8 also causes the counter wedges 10 to move upwards against the springs 40. The upward motion of the counter wedge 10 is less than that of the working wedge 9 because the total angle β of the counter wedge 10, i.e. the angle between surfaces 13 and 14, is larger than the angle α of the working wedge 9. This angle is the angle between surface 13 and the vertical direction. The magnitude of the difference between the motions of the counter wedge 10 and the working wedge 9 depends on the angle between the guide surfaces 13 and 14. During this motion, the spring force of the spring 40 increases and also the friction between surface 18 and the guide rail 30 increases. The adjusting screw 32 hits the bottom 33 of the counter wedge 10, causing the upward motion to stop and the frictional force to remain constant. The motion stops because otherwise the counter wedge 10 would come clear of the guide surface 14, whereupon the normal force would disappear and so would the friction. The spring will then return the counter wedge 10 back against the guide surface 14. After the safety gear action, when the elevator is released by raising the car, a motion in the opposite direction occurs and the springs 40 push the wedges back into place. The safety gear is so constructed that the working wedges 9 touch the elevator guide rail 30 before the counter wedges 10 are stopped in their upper position. As the working wedges 9 rise due to friction towards the limit of their upper position, the counter wedge 10 is also pushed up due to friction against the spring force F . By virtue of the wedge action, the frictional force obtained with spring force F between the wedges and the elevator guide rail 30 is very large, allowing a high braking power to be achieved. Because of angle α , only a small spring force is needed and therefore a sufficient gripping power is achieved with a small spring. In the future, when the regulations permit, the data indicating the need for safety gear action may be obtained e.g. from a tachometer monitoring the car motion. The wedges can be moved e.g. using electromagnets.

It is obvious to a person skilled in the art that different embodiments of the invention are not restricted to the examples described above, but that they may instead be varied within the scope of the following claims.

5 LIST OF PARTS

- 1 elevator car
- 2 bolt
- 3 lifting means (not shown)
- 4 safety gear frame
- 10 5 supporting shaft
- 7 adjusting screw
- 8 wedge chamber
- 9 working wedge
- 10 counter wedge
- 15 11 retaining cotter (at the upper end)
- 12 retaining cotter (at the lower end)
- 13 guide surface (on the side of the working wedge)
- 14 guide surface (on the side of the wedge chamber)
- 15, 42 balls
- 20 16 rolling slot (on the side of the working wedge)
- 17 rolling slot (on the side of the wedge chamber)
- 18 braking surface
- 30 guide rail
- 31 synchronizing fork
- 25 32 adjusting screw (in the working wedge)
- 33 bottom surface of the counter wedge
- 34 synchronizing rod
- 35 fising screws (pressure spring)
- 36 stop face
- 30 37 lever system
- 38 protecting plates in the wedge chamber (not shown)
- 39 guide surface (on the side of the wedge chamber)
- 40 pressure springs
- 41 guide pin (not shown)

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS.

1. Safety gear e.g. for an elevator car or counterweight, comprising at least one wedge chamber (8) and at least one working wedge (9) acting on an elevator guide rail (30) and
 5 activated by means of a transmission element, characterized in that the safety gear has for each working wedge (9) at least one counter wedge (10) moving along guide surfaces (14 and 39) provided in the wedge chamber (8), and
 10 that the counter wedge (10) of the working wedge (9) is on the same side of the guide rail as the working wedge (9) in question.

2. Safety gear according to claim 1, characterized in that the angle (β) between the guide surface (14) provided in the wedge chamber (8) to guide the counter wedge
 15 (10) and the guide surface (13) on the side facing the working wedge (9) is larger than the angle (α) between the vertical direction and the working wedge surface facing the counter wedge (10), so that the upward motion of the counter wedge (10) is less than that of the working wedge (9).

20 3. Safety gear according to claim 1 or 2, characterized in that it has two working wedges (9), which are placed on opposite sides of the guide rail (30) and are symmetrical relative to the guide rail, and that the working wedges (9) act simultaneously and in the same direction during gripping.


25 4. Safety gear according to claim 1, 2 or 3, characterized in that during safety gear action the adjusting screw (32) provided in the working wedge (9) hits the narrower bottom end of the counter wedge (10).

5. Safety gear according to any one of the preceding claims,
 30 characterized in that the safety gear is provided with pressure springs (40) attached with fixing screws (35) by their one end to the wider ends of the counter wedges (10) and by the other end to stop faces (36) in the wedge chamber (8).

6. Safety gear for an elevator car or counterweight substantially as hereinbefore described with reference to the accompanying drawings.


Dated this 12th day of November 1992

5 KONE ELEVATOR GmbH
By their Patent Attorneys
COLLISON & CO.



ABSTRACT

Safety gear e.g. for an elevator car or counterweight, comprising at least one wedge chamber (8) and at least one working wedge (9) acting on an elevator guide rail (30) and activated by means of a transmission element. For each working wedge (9), the safety gear has at least one counter wedge (10) moving along guide surfaces (14 and 39) provided in the wedge chamber (8). The counter wedge (10) of a working wedge (9) is on the same side of the guide rail as the working wedge (9) in question.



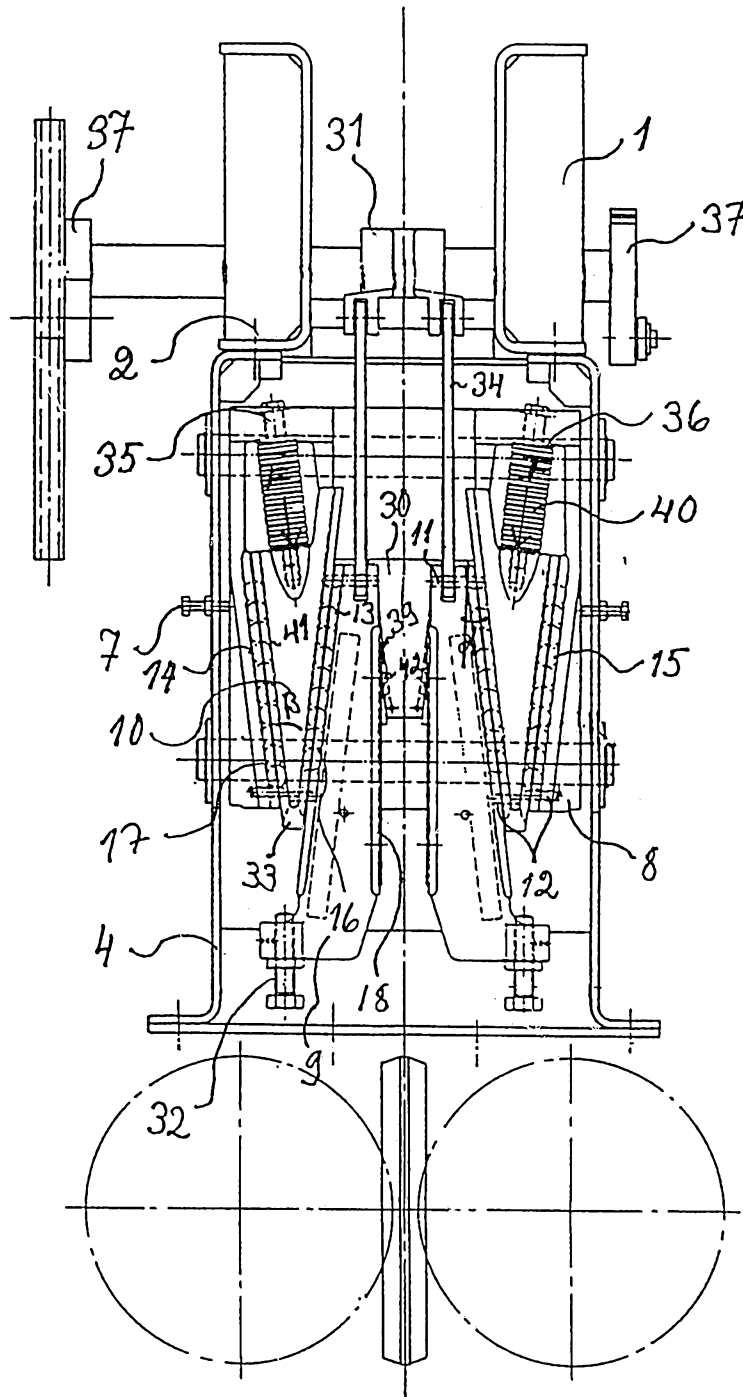


Fig. 1

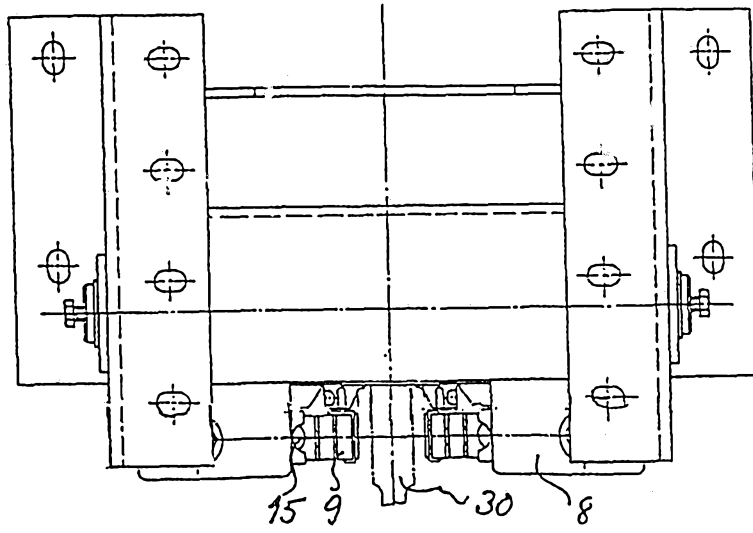


Fig. 2

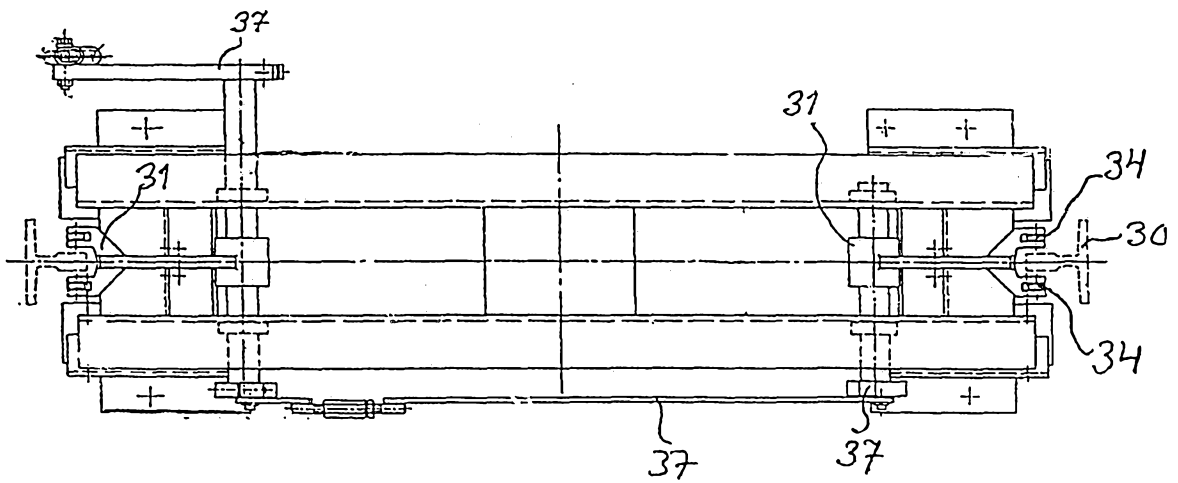


Fig. 3