



- (51) International Patent Classification:
B65D 51/28 (2006.01) *B65D 50/02* (2006.01)
- (21) International Application Number:
PCT/IB2017/050506
- (22) International Filing Date:
31 January 2017 (31.01.2017)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data:
102016000032998 31 March 2016 (31.03.2016) IT
- (71) Applicant: **BORMIOLI ROCCO S.P.A.** [IT/IT]; Via
Martiri della Libertà, 1, 43036 Fidenza (PR) (IT).
- (72) Inventor: **PAGANUZZI, Valerio**; Via Grassi, 12,
Frazione Vicofertile, 43126 Parma (IT).
- (74) Agent: **MONELLI, Alberto**; Bugnion S.p.A., Largo
Michele Novaro, 1/A, 43121 Parma (IT).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A CLOSURE CAPSULE

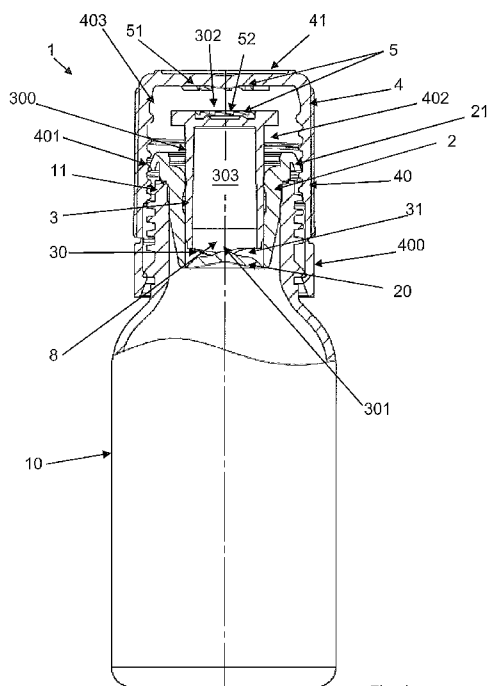


Fig. 1

- (57) Abstract: A closure capsule for closing a container, comprising:
- a cap (2) to be associated with a container and comprising a frangible mouth (20);
- a cutter (3) comprising a cutting edge (30) designed to open said frangible mouth (20);
at least the cap (2) and the cutter (3) in combination defining a reservoir (8) for containing a substance to be dropped into the container when the frangible mouth (20) is opened;
- a protective covering (4) for the cap (2) and the cutter (3), separate from the cutter (3) and, in turn, comprising:
i) a lateral wall (40) that encloses a zone (402) for at least partially housing the cutter (3);
ii) a base (41) from which said lateral wall (40) extends;
- transmitting means (5) for transmitting an opening torque, from the covering to the cutter, for opening the frangible mouth (20), said transmitting means (5) comprising a first and a second portion (51, 52) incorporated in the covering (4) and in the cutter (3), respectively; said first portion (51) being incorporated in the base (41).

DESCRIPTION

A closure capsule

Technical field

The present invention relates to a closure capsule for closing a container, a container with the capsule associated thereto and an opening method of the container.

5 Background art

A closure capsule for closing a container is known, comprising:

- a cap that can be associated with the container and comprising a frangible mouth;
- a cutter projecting internally of said cap and which is free to translate
10 along the cap; the cutter comprises a cutting edge designed to open the frangible mouth; the cap and the cutter in combination defining a reservoir for containing a substance to be dropped into the reservoir when the frangible mouth is opened;
- a covering having an overturned-beaker profiling that protects the cap
15 and the cutter. The covering is connected to the container by means of a threaded coupling.

The substance contained in the reservoir prior to opening must mix with the liquid present in the container following the rupturing action of the frangible mouth.

- 20 For this purpose the user, by exploiting this threaded coupling, screws the covering onto the container; consequently the covering roto-translates towards the container, axially pushing the cutter against the frangible mouth and causing the opening thereof.

- A drawback of this constructional solution is linked to the effort that has to
25 be applied on the covering so as to determine the effective cutting of the frangible mouth.

Disclosure of the invention

In this context an aim of the present invention is to make available a closure capsule which enables facilitating the mixing of the substance

present in the reservoir with the liquid present in the container and which at the same time is perfectly compatible with already-existing production lines.

The stated technical task and specified objects are substantially achieved
5 by a closure capsule comprising the technical features disclosed in one or more of the appended claims.

Brief description of drawings

Further characteristics and advantages of the present invention will become more apparent from the following indicative, and hence non-
10 limiting, description of a preferred, but not exclusive, embodiment of the closure capsule, as illustrated in the appended drawings, in which:

-figure 1 shows a section view of a container and a capsule according to the present invention;

- figures 2 and 3 show two partly-interrupted perspective views comprising
15 a capsule according to the present invention.

Detailed description of preferred embodiments of the invention

In the appended figures, reference number 1 denotes a closure capsule of a container.

The capsule 1 comprises a cap 2 that can be associated with a container
20 and comprising a frangible mouth 20.

The capsule 1 comprises a cutter 3. The cutter 3 comprises a cutting edge 30 designed to open said frangible mouth 20. At least the cap 2 and the cutter 3 define, in combination, a reservoir 8 for containing a substance destined to be dropped into the container, on the opening of the frangible
25 mouth 20 (in the solution given by way of example the reservoir 8 is defined by the combination of the cutter 3 and the cap 2). The substance is typically a powder, but might also be a liquid. When the substance falls into the container the mixing between the substance present in the reservoir 8 and the product present in the container takes place so that the
30 desired amount can be administered. As shown by way of example in the appended figures, the cutter 3 projects internally of the cap 2. The cap 2

thus defines an axial guide for the cutter. In particular the cap 2 surrounds at least a portion of the cutter 3 by 360°. When the frangible mouth 20 is intact, the cap 2 is shaped as an element defining a concavity partially housing the cutter 3.

- 5 The cutter 3 is appropriately shaped as a hollow body. It therefore comprises an internal cavity 303.

In particular the cutter 3 comprises a tank 300 at a first end 301 of which the cutting edge 30 is present. At the first end 301 the internal cavity 303 is placed in communication with the outside of the cutter 3. At the second
10 end 302 of the tank 300 the cutter 3 comprises a wall 304 which occludes the cavity 303.

The capsule 1 comprises a covering 4 that protects the cap 2 and the cutter 3. The covering 4 is distinct from the cutter 3. The covering 4 in turn comprises:

- 15 i) a lateral wall 40 that encloses a zone 402 for at least partially housing the cutter 3; the lateral wall 40 is preferably substantially cylindrical;
ii) a base 41 from which said lateral wall 40 extends.

The capsule 1 comprises transmitting means 5 for transmitting an opening torque from the covering to the cutter 3 for opening the frangible mouth 20.

- 20 The opening torque is exerted by a user at the moment when it is desired to mix the substance present in the reservoir 8 and the liquid present in the container. This occurs before first use. The transmitting means 5 when enmeshed enables a solidly rotational-translational movement of the covering 4 and of the cutter 3.

- 25 The transmitting means 5, if enmeshed, thus enables the transmission of the opening torque of the frangible mouth 20 without relative sliding to between the covering 4 and the cutter 3. This facilitates the transmission of the torque between the covering 4 and the cutter 3.

- 30 The cap 2 appropriately comprises a circumferential flexible lip 21 which tends to spontaneously open in a radial direction, anchoring in a seating 403 of the covering 4 at the end of an inserting run of the cutter 3 in the

cap 2.

The transmitting means 5 comprises a first and a second portion 51, 52 located one in front of another and respectively incorporated in the covering 4 and in the cutter 3. In particular the first portion 51 is
5 incorporated in the base 41 of the covering 4.

The first and second portions 51, 52 are movable between a first position, in which they are engaged to each other so as to enable transmission of the opening torque, from the covering 4 to the cutter 3, for opening the frangible mouth 20, and a position in which they are set apart from each
10 other and in which the transmitting means 5 is disengaged.

In the preferred solution, initially the first and the second portion 51, 52 are disengaged (see for example figures 1, 2, 3). The user applies a screwing torque of the capsule 1 on the container and this leads the transmitting means 5 to engage to one another. At this point a further screwing torque
15 defines the above-indicated opening torque of the mouth 20.

The transmitting means 5 comprises a first set 510 of teeth fashioned in said first portion 51 and a second set 520 of teeth fashioned in said second portion 52. By way of example, the teeth of the first and/or the second set 510, 520 have a triangular prism shape. The triangular prism
20 preferably has a right-angled triangle as a base.

The teeth of the first and/or the second set 510, 520 are arranged in a crown-fashion (in particular they follow one another along a circumference).

With reference to the foregoing, the second portion 52 is located at the
25 second end 302 of the tank 300 of the cutter 3.

The covering 4 is connectable to a container by means of a thread.

For this purpose the covering 4 comprises a thread 401 having a pitch.

The height of the cutting edge 30 is lower than the pitch of the thread 401 of the covering 4. This enables preventing a small disc deriving from the opening of the frangible mouth 20 from dropping internally of the
30 container. In fact in this mode the cutting edge will open the frangible

mouth 20 along an arc of less than 360°, in particular comprised between 250° and 300°. This prevents complete detachment of the small disc, which thus remains connected to the remaining parts of the cap 2.

The cutting edge comprises two strips converging in a pointed zone. The cutting edge 30 (in particular one of the two strips mentioned in the foregoing) defines a concavity 31, which, upon completion of the opening of the frangible mouth 20, partly receives a small disc that projects in a cantilever fashion and that results from the partial opening of the frangible mouth 20. This detail also causes the cutting edge to receive the already-cut portion of the frangible mouth 20 and not interfere with it. This further reduces the risk that the small disc might entirely detach, creating an obstacle that might compromise correct functioning. One of the two strips is advantageously profiled in an arc of circle shape, having a radius that differs from the radius of the small disc by less than 10%.

It is important that the first and the second set 510, 520 of teeth reciprocally engage prior to an axial thrust of the second set 520 on the cutter 3. To obtain the above, the height of the second set 520 of teeth is advantageously greater than the pitch of the thread 401.

The covering 4 advantageously comprises an intactness band 400 that is made of a first plastic material which is more deformable with respect to a second plastic material of which said cutter 3 is made. This enables, during the application of a screwing torque of the covering 4 on the container, the breaking of the intactness band 400 without damaging the cutter 3.

The capsule 1 appropriately comprises anti-rotation teeth 12 destined to interact with a container on which the cap is applied. This is to prevent the cap 2 from being drawn in rotation by the cutter 3 due to friction.

The intactness band 400 is located at an opposite end with respect to the base 41.

The object of the present invention is also a system comprising:

-a container 10 comprising a mouthpiece 11;

-a capsule 1 having one or more of the characteristics described above.

The cap 2 of the capsule 1 is applied to a mouth 11 of the container 10.

The cap 2 further comprises anchoring means of the mouthpiece which opposes the drawing in rotation of the cap 2 by action of the cutter 3. For

5 example the anchoring means comprises a plurality of anti-rotation teeth 12 which interlock in corresponding seats 110 fashioned in said mouthpiece 11. The anchoring means might however comprise, additionally or alternatively, seats destined to receive projections fashioned on the mouthpiece 11.

10 The container 10 advantageously comprises a broadening located downstream of a neck in which the mouthpiece is fashioned. This broadening determines the rupture of the intactness band 400 following a thrust thereon exerted by the screwing of the covering 4 on the container 10.

15 A further object of the present invention is a method for opening a container 10 having a mouthpiece 11 occluded by a capsule 1 having one or more of the characteristics described hereinabove. The method conveniently comprises the steps of:

-screwing the covering 4 on the container 10, drawing the cutter 3 into
20 rotational-translational movement so as to open the frangible mouth 20 and drop the substance present in the reservoir 8 into the container 10;
-unscrewing the covering 4 from the container 10.

The step of unscrewing the covering 4 from the container 10 is achieved by drawing the extraction of the cutter 3 and the cap 2 from the container

25 10.

A method for producing a capsule according to the present invention comprises following steps:

- inserting a substance internally of the cavity 303 afforded in the cutter 3;
- inserting the cutter 3 and the substance contained in the cavity 303

30 internally of the cap 2;

- inserting the cutter 3 and the cap 2 internally of the covering 4.

This method for producing includes the use of assembly plants of known type and this enables recycling a plant of known type used for realising a capsule of the type described in WO2012/153206.

5 The invention thus conceived makes it possible to achieve multiple advantages.

Firstly it enables reducing the force necessary for a user to determine the dropping of the substance present in the reservoir 8 internally of the container. Secondly, it enables using, for the assembly of the capsule, plants already in use by many users without any need to make fresh
10 investments so as to modify the plants.

The invention as it is conceived is susceptible to numerous modifications, all falling within the scope of the inventive concept characterising it. Further, all the details can be replaced with other technically-equivalent elements. In practice, all the materials used, as well as the dimensions,
15 can be any according to requirements.

CLAIMS

1. A closure capsule for closing a container, comprising:
 - a cap (2) that can be associated with a container and comprising a frangible mouth (20);
 - 5 - a cutter (3) comprising a cutting edge (30) designed to open said frangible mouth (20); at least said cap (2) and said cutter (3) in combination defining a reservoir (8) for containing a substance to be dropped into the container when the frangible mouth (20) is opened;
 - a covering (4) that protects the cap (2) and the cutter (3); said covering
 - 10 (4) being separate from the cutter (3) and, in turn, comprising:
 - i) a lateral wall (40) that encloses a zone (402) for at least partially housing the cutter (3);
 - ii) a base (41) from which said lateral wall (40) extends;
 - characterized in that it comprises means for transmitting an opening
 - 15 torque, from the covering to the cutter, for opening the frangible mouth (20), said transmitting means (5) comprising a first and a second portion (51, 52) incorporated in the covering (4) and in the cutter (3), respectively; said first portion (51) being incorporated in the base (41).
2. The capsule according to claim 1, characterized in that said first and
- 20 second portions (51, 52) are movable between a first position, in which they are engaged to each other so as to enable transmission of the opening torque, from the covering (4) to the cutter (3), for opening the frangible mouth (20), and a position in which they are set apart from each other and in which the transmitting means (5) is disengaged.
- 25 3. The capsule according to claim 1 or 2, characterized in that the transmitting means (5) comprises a first set (510) of teeth afforded in said first portion (51) and a second set (520) of teeth afforded in said second portion (52).
4. The capsule according to any one of the preceding claims,
- 30 characterized in that the cutting edge (30) defines a concavity (31), which, upon completion of the opening of the frangible mouth (20), partly receives

a small disc that projects in a cantilever fashion and that results from the partial opening of the frangible mouth (20).

5 5. The capsule according to any one of the preceding claims, characterized in that the covering (4) comprises a thread (401) having its own pitch and that is suitable for connecting the covering (4) to a container; the height of the cutter (30) being lower with respect to the pitch of the thread (401) of the covering (4).

6. The capsule according to claim 5, when directly or indirectly dependent upon claim 3, characterized in that the height of the second set (520) of
10 teeth is higher with respect to the pitch of the thread (401).

7. The capsule according to any one of the preceding claims, characterized in that the covering (4) comprises an intactness band (400) that is made of a first plastic material which is more deformable with respect to a second plastic material of which said cutter (3) is made.

15 8. A system comprising:

- a container (10) comprising a mouthpiece (11);

- a capsule according to any one of claims 1 to 7, said cap (2) of said capsule (1) being applied to a mouthpiece (11) of the container (10).

9. The system according to claim 8, characterized in that said cap (2)
20 comprises a plurality of anti-rotation teeth (12) that interlock in respective seats (110) afforded in said mouthpiece (11).

10. A method for opening a container having a mouthpiece occluded by a capsule according to any one of claims 1 to 7, characterized in that it comprises the steps of:

25 -screwing the covering (4) on the container, drawing the cutter (3) into rotational-translational movement so as to open the frangible mouth (20) and drop the substance present in the reservoir (8) into the container.

-unscrewing the covering (4) from the container (10), the step of unscrewing the covering (4) from the container (10), thus drawing and
30 thereby bringing about the extraction of the cutter (3) and the cap (2) from the container (10).

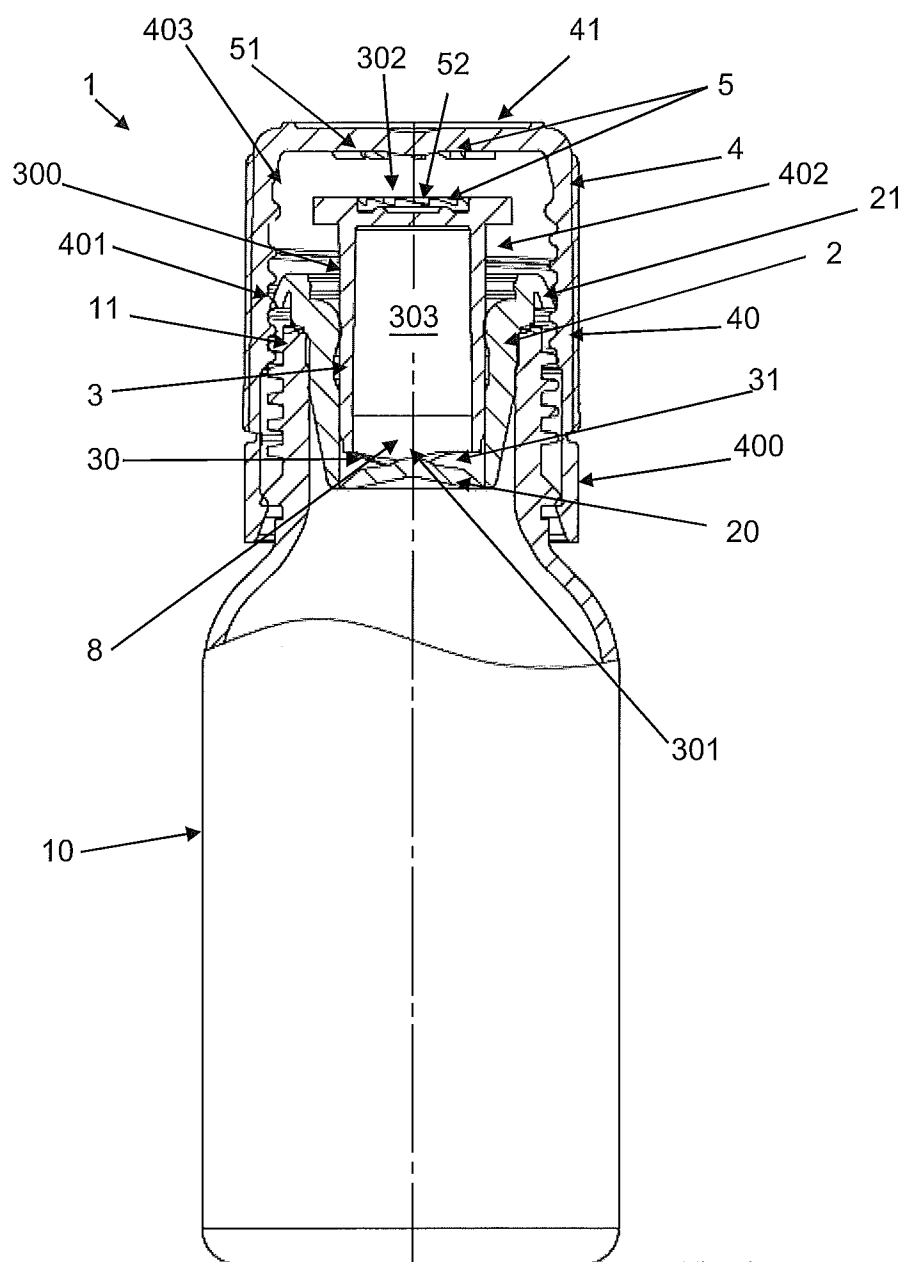


Fig. 1

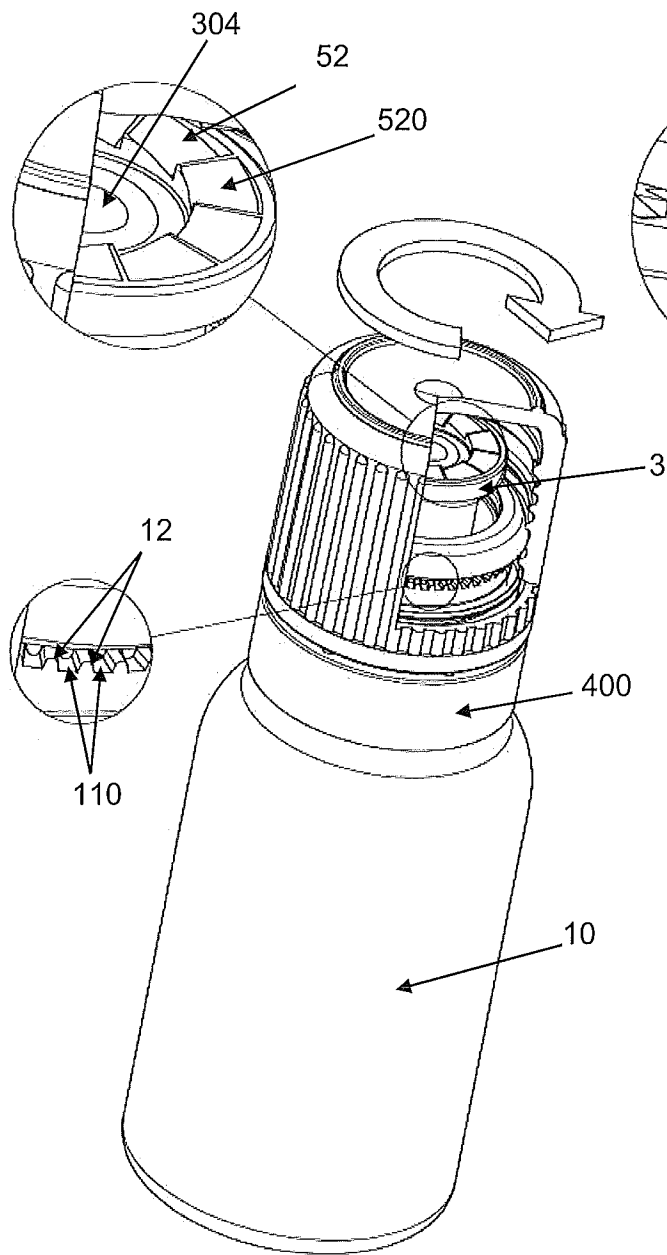


Fig. 2

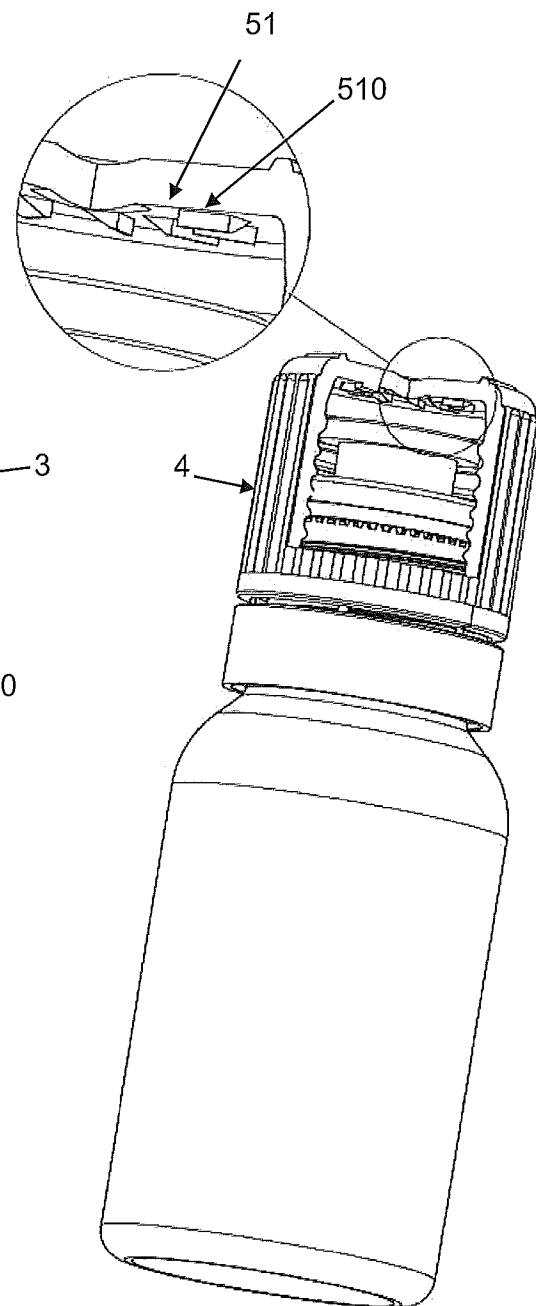


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2017/050506

A. CLASSIFICATION OF SUBJECT MATTER INV. B65D51/28 B65D50/02 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B65D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/071000 A1 (WEIST MARIO [DE] ET AL) 6 April 2006 (2006-04-06)	1-4,6-8
A	the whole document	5,9,10
X	----- WO 2009/031864 A2 (CHO YOUNG-KOOK [US]; PARK JEONG-OOG [KR]) 12 March 2009 (2009-03-12) Different design (ramps for transmitting opening torque); anti-rotation means between bottle mouth and cap; claims; figures 4-14	1,7-9
A	----- WO 2012/153206 A1 (BORMIOLI ROCCO & FIGLIO SPA [IT]; BRAMBILLA FRANCESCO [IT]; MALORI ANN) 15 November 2012 (2012-11-15) cited in the application the whole document	1-10
	----- -/-	
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 22 March 2017	Date of mailing of the international search report 30/03/2017	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Dederichs, August	

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2017/050506

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2015/101925 A1 (MOLTENI & C [IT]) 9 July 2015 (2015-07-09) the whole document coupling teeth 14, 15 operable between covering and cap for removing closure capsule from container; no effect on cutter -----	1-10
A	US 6 148 996 A (MORINI EMILIO [IT]) 21 November 2000 (2000-11-21) the whole document no cutter rotation mentioned although the covering and the cutter are drawn in one piece -----	1-10
A	US 2007/280042 A1 (YAMANAKA NOBUO [JP]) 6 December 2007 (2007-12-06) the whole document exchangeable substance capsule 41 tooth-coupled 42, 38 to covering 31 for rotational movement against cutter 17 fixed within cap 14 -----	1-10
A	US 2008/223485 A1 (NYAMBI SAMUEL OMBAKU [US] ET AL) 18 September 2008 (2008-09-18) the whole document Rotation of covering translates via ramps into displacement of separate (exchangeable) capsule against cutter fixed within the cap -----	1-10
A	WO 2008/123750 A2 (LEE JEONG-MIN [KR]; LEE SEONG-JAE [KR]) 16 October 2008 (2008-10-16) abstract; figures -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2017/050506

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2006071000	A1	06-04-2006	AT 318765 T	15-03-2006
			AU 2003233906 A1	06-01-2004
			BR 0311973 A	29-03-2005
			CA 2485495 A1	31-12-2003
			CN 1662422 A	31-08-2005
			EA 200401371 A1	25-08-2005
			EG 23441 A	03-09-2005
			EP 1513732 A1	16-03-2005
			ES 2261936 T3	16-11-2006
			HK 1078840 A1	09-05-2008
			HR P20041162 A2	30-04-2005
			IL 165881 A	04-05-2009
			JP 4755417 B2	24-08-2011
			JP 2005533725 A	10-11-2005
			KR 20050012251 A	31-01-2005
			MX PA04012340 A	25-02-2005
			TW I289531 B	11-11-2007
			US 2006071000 A1	06-04-2006
			WO 2004000667 A1	31-12-2003

WO 2009031864	A2	12-03-2009	KR 20090025416 A	11-03-2009
			WO 2009031864 A2	12-03-2009

WO 2012153206	A1	15-11-2012	BR 112013028512 A2	10-01-2017
			CA 2833823 A1	15-11-2012
			DK 2704962 T3	16-01-2017
			EP 2704962 A1	12-03-2014
			HR P20161747 T1	10-02-2017
			SI 2704962 T1	28-02-2017
			US 2014048507 A1	20-02-2014
			WO 2012153206 A1	15-11-2012

WO 2015101925	A1	09-07-2015	EP 3089924 A1	09-11-2016
			WO 2015101925 A1	09-07-2015

US 6148996	A	21-11-2000	AT 209591 T	15-12-2001
			AU 4396597 A	18-09-1998
			BR 9714624 A	28-03-2000
			CA 2279893 A1	03-09-1998
			DE 69708687 D1	10-01-2002
			DE 69708687 T2	01-08-2002
			EP 0963325 A1	15-12-1999
			ES 2165627 T3	16-03-2002
			IT M0970029 A1	28-08-1998
			MX 216044 B	27-08-2003
			PT 963325 E	31-05-2002
			US 6148996 A	21-11-2000
			WO 9838104 A1	03-09-1998

US 2007280042	A1	06-12-2007	CN 101027223 A	29-08-2007
			EP 1795457 A1	13-06-2007
			EP 2298664 A1	23-03-2011
			JP 4970040 B2	04-07-2012
			KR 20070058511 A	08-06-2007
			US 2007280042 A1	06-12-2007
			US 2014203043 A1	24-07-2014
			WO 2006035558 A1	06-04-2006

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2017/050506

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008223485 A1	18-09-2008	CN 101631725 A	20-01-2010
		US 2008223485 A1	18-09-2008
		ZA 200906431 B	27-10-2010

WO 2008123750 A2	16-10-2008	JP 5450379 B2	26-03-2014
		JP 2010523427 A	15-07-2010
		WO 2008123750 A2	16-10-2008
