United States Patent [19]

Swander, Jr.

[11] **3,842,716**

[45] **Oct. 22, 1974**

[54] **DOUBLE DIAPHRAGM BRAKE OPERATOR IMPROVEMENTS**

[75] Inventor: **Kenneth D. Swander, Jr.**, Prairie Village, Kans.

[73] Assignee: **Certain-Teed Products Corporation**, Valley Forge, Pa.

[22] Filed: **Jan. 12, 1973**

[21] Appl. No.: **323,197**

Related U.S. Application Data

[62] Division of Ser. No. 148,942, June 14, 1971, Pat. No. 3,730,056.

[52] **U.S. Cl.** **92/63**, 92/64, 92/130, 92/113

[51] **Int. Cl.** **F01b 7/00**

[58] **Field of Search** 92/62, 63, 64, 130

[56] **References Cited**

UNITED STATES PATENTS

3,065,997	11/1962	Frankhouser et al.	92/64 X
3,446,241	5/1969	Skoli	92/64 X
3,508,470	4/1970	Swander, Jr. et al.	92/64 X
3,712,181	1/1973	Swander, Jr. et al.	92/64 X
3,759,147	9/1973	Johnsson et al.	92/64 X

FOREIGN PATENTS OR APPLICATIONS


986,537	3/1965	Great Britain	92/62
1,148,603	4/1969	Great Britain	92/64

Primary Examiner—Edgar W. Geoghegan
Assistant Examiner—Abraham Hershkovitz
Attorney, Agent, or Firm—Edward J. Sites

[57] **ABSTRACT**

An improved air brake diaphragm chamber, having two diaphragms placed close to each other therewithin and held in position inside the chamber by a clamp band, the outer or outboard (with respect to the axle or brake) one of said diaphragms having a separate air pressure input on the outer shell of the chamber, a perforated ring spacing said two diaphragms with an air inlet connected to said perforation for feeding air between said diaphragms and means for effectively sealing the peripheral zones of said diaphragms with respect to said ring and clamp band, particularly including means preventing extrusion of the diaphragms at the connection points of the clamp band halves.

5 Claims, 14 Drawing Figures

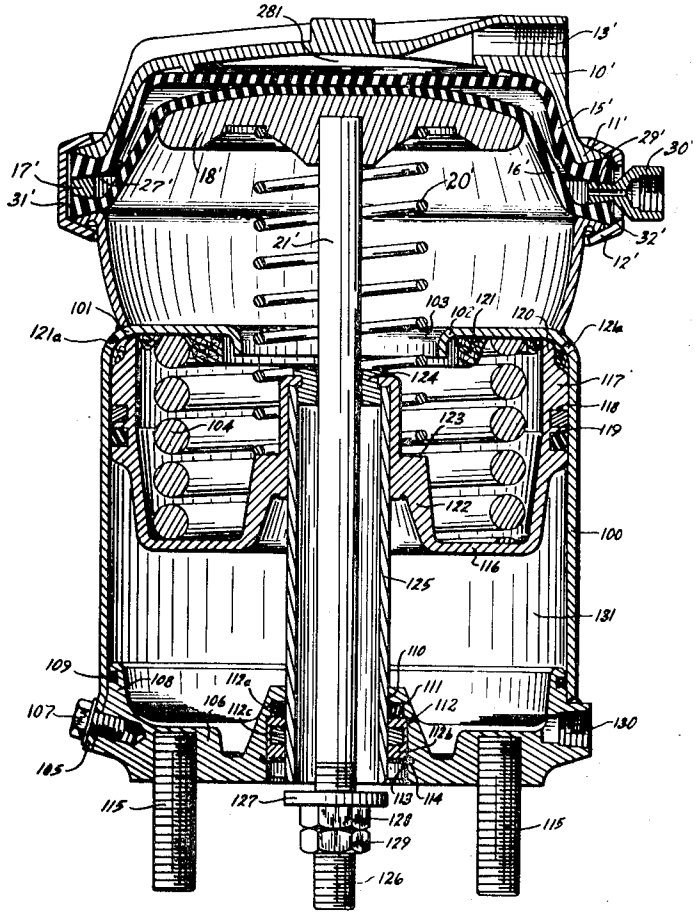

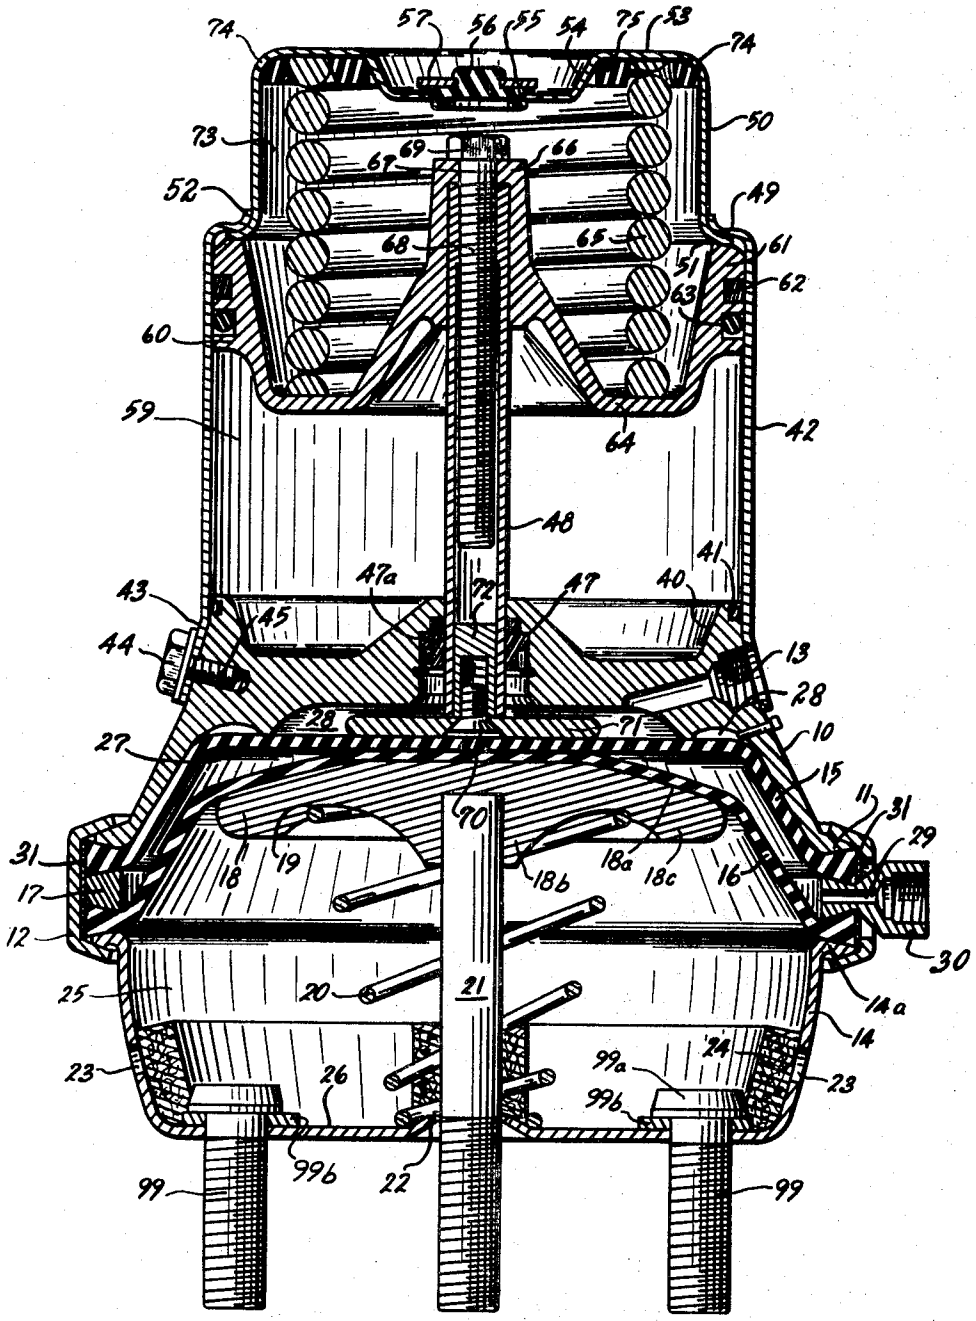

74
57
56
55
54
75
53
74
50
73
69
67
66
52
49
68
65
61
51
62
63
60
59
64
42
48
41
43
47a
72
47
40
45
44
13
28
28
71
10
27
15
11
31
29
31
18
19
70
18a
18c
16
17
18b
12
30
25
20
21
14a
14
24
99a
23
26
23
99b
99b
22
99
99

Fig. 1.

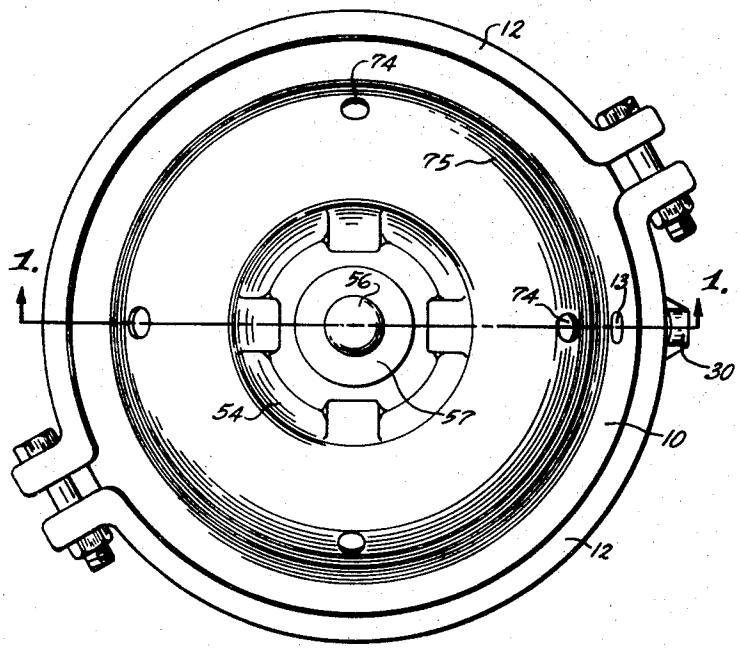


Fig. 2.

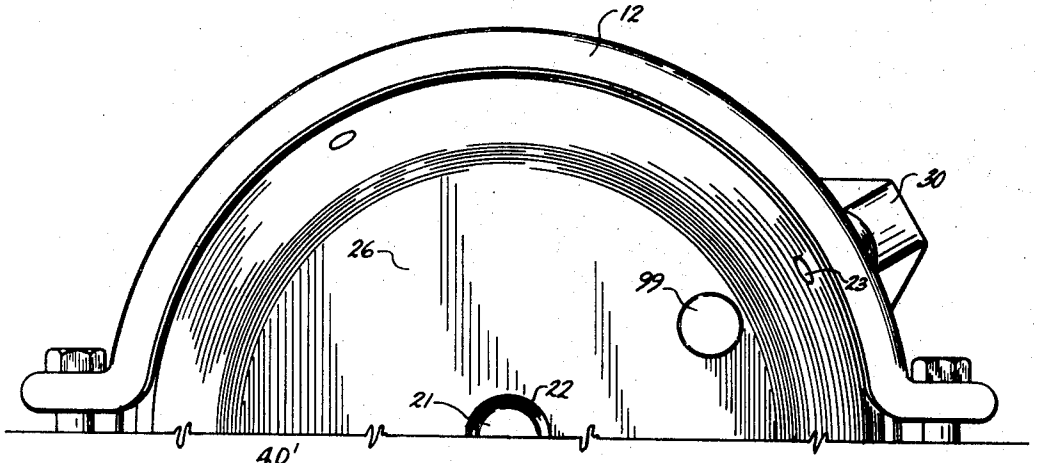


Fig. 3.

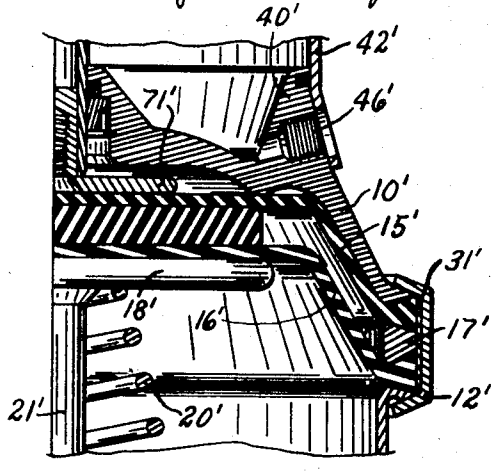


Fig. 4b.

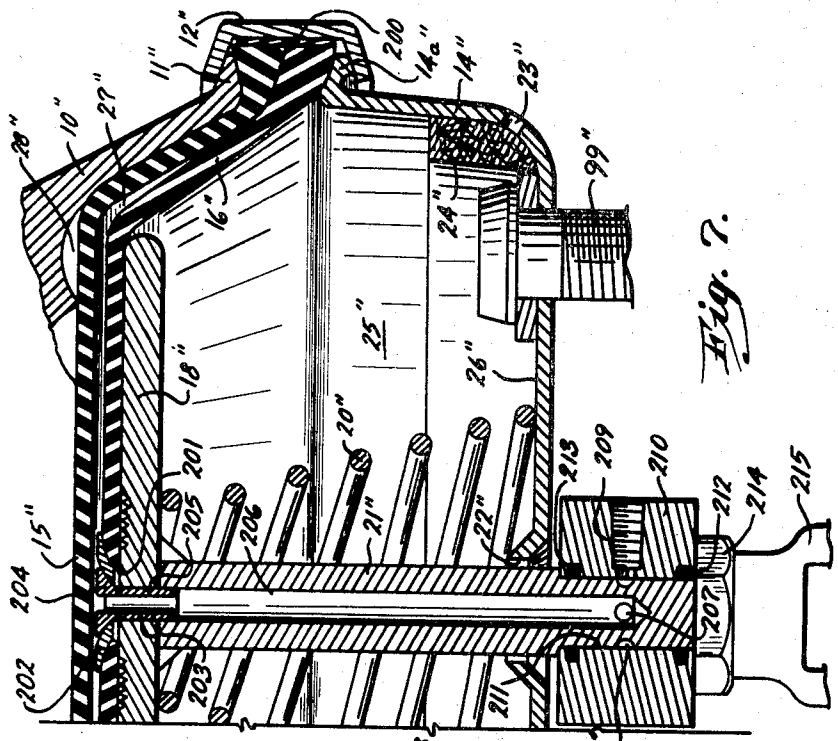


Fig. 7.

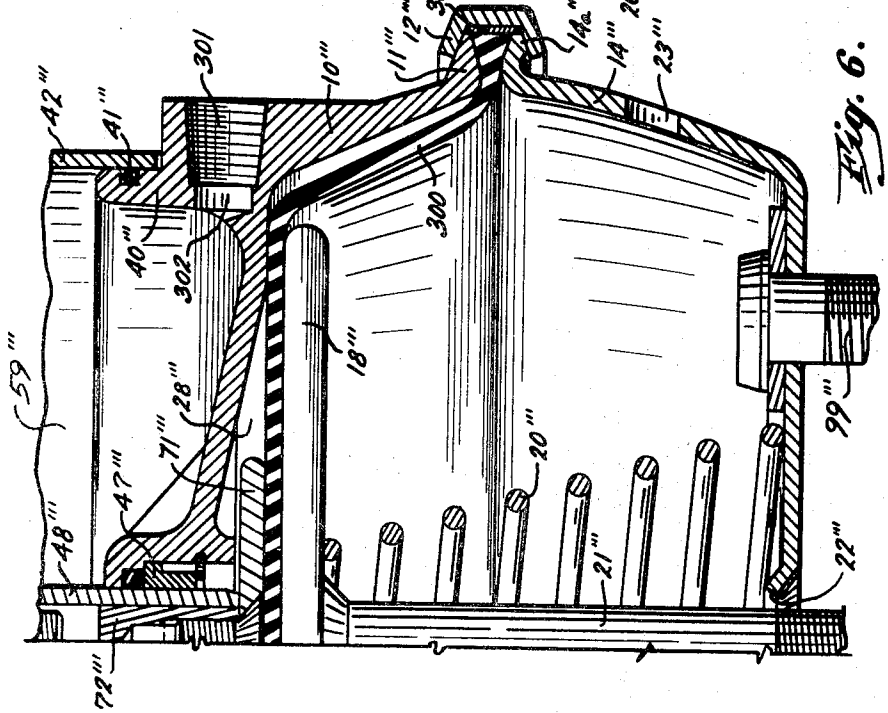


Fig. 6.

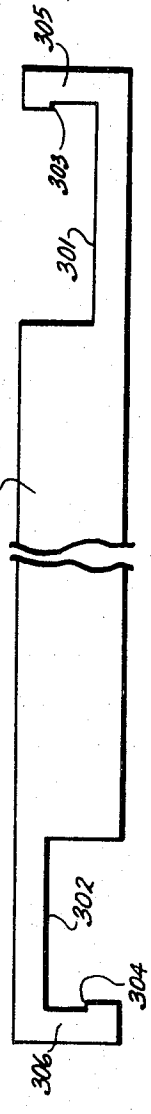


Fig. 4a.

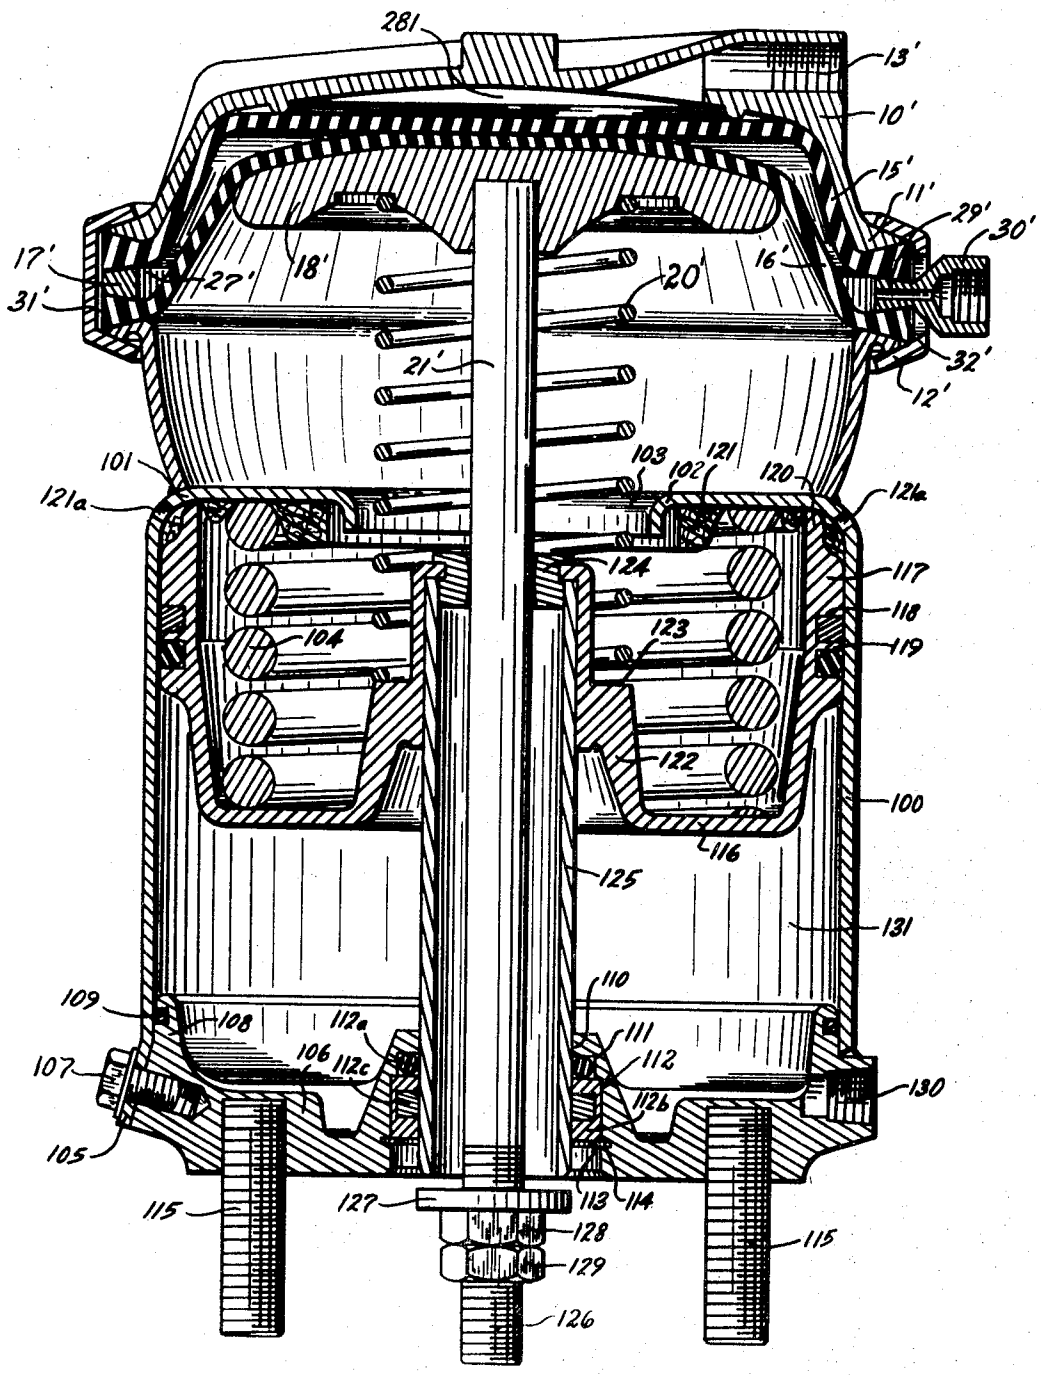

281
13'
10'
15'
11'
29'
30'
17'
27'
18'
20'
16'
31'
21'
32'
12'
101
103
102
121
120
121a
124a
124
117
118
104
123
119
122
100
116
125
131
110
109
108
112a
111
106
112c
112
107
112b
130
105
115
127
113
114
128
115
129
126

Fig. 5.

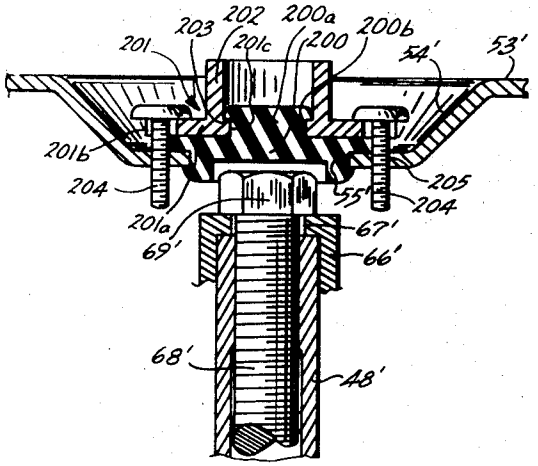


Fig. 8.

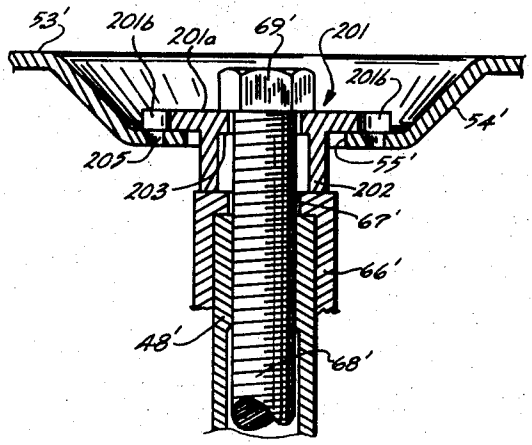


Fig. 9.

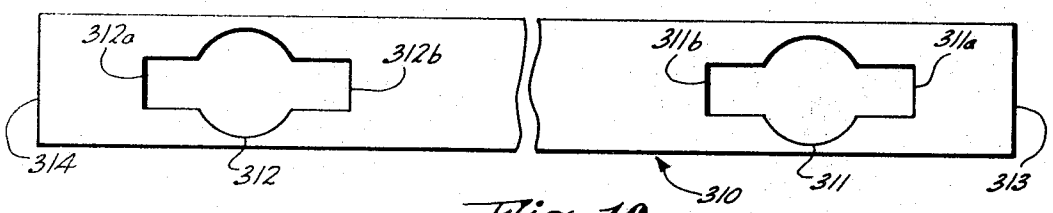


Fig. 10.

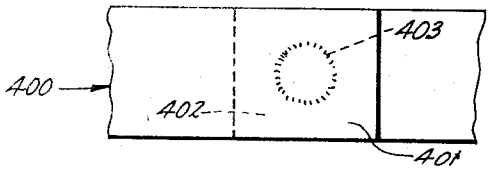


Fig. 11.

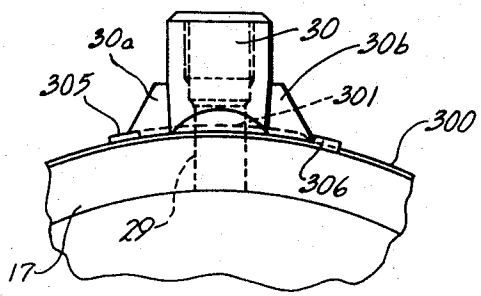


Fig. 12.

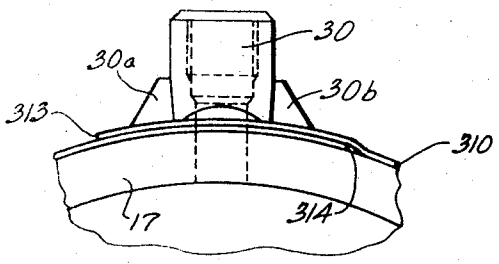


Fig. 13.

DOUBLE DIAPHRAGM BRAKE OPERATOR IMPROVEMENTS

This is a division of application Ser. No. 148,942, filed June 14, 1971 now U.S. Pat. No. 3,730,056.

The combination of the air brake diaphragm chamber with two diaphragms and the air feed means therebetween with, as a first option, an outboard spring brake unit of minimum size and, as a second option, an inboard spring brake power unit, in all cases access readily provided to both the power spring unit and the diaphragm chamber.

An improved air brake diaphragm chamber, having two diaphragms placed close to each other therewithin and held in position inside the chamber by a clamp band, the outer or outboard (with respect to the axle or brake) one of said diaphragms having a separate air pressure input on the outer shell of the chamber, the inboard one of said diaphragms having a central opening or perforation therethrough, the brake actuating rod in operative connection with said diaphragm and connected thereto, said brake operating rod hollow whereby fluid pressure may be input between said diaphragm through said brake operating rod, and means for effectively sealing the peripheral zones of said diaphragms with respect to said clamp band, particularly including means preventing extrusion of the diaphragms at the connection points of the clamp bands halves.

An improved air brake diaphragm chamber, having a single diaphragm therewithin held in position inside the chamber by a clamp band, and means for effectively sealing the peripheral zones of said diaphragm with respect to said clamp band, particularly including means preventing extrusion of the diaphragm at the connection points of the clamp band halves.

THE PRIOR ART

The prior art has typically shown numerous examples of brake chambers utilizing a plurality of chamber diaphragms. Typically, these involve the two enclosing sections of the chamber, disc-like or arcuate in cross-section (or truncated cone), with the two diaphragms retained peripherally at their edges between the two halves and an intermediate central ring member therebetween, with fastening means provided to couple the two chamber halves and the intermediate ring into a single sealed assembly. An air pressure inlet is provided into the outboard disc of the chamber and the second air inlet into the ring member being the two diaphragms. A push rod connecting to a brake or the work is attached to or abutted against the diaphragm which is adjacent the side of the chamber not penetrated by the outboard air inlet means.

Thus, see Holman, Jr., U.S. Pat. No. 2,649,169, issued 8-18-53; Horn, U.S. Pat. No. 2,770,799, issued Nov. 13, 1956; Euga, U.S. Pat. No. 3,011,832, issued Dec. 5, 1961; Washnock et al., U.S. Pat. No. 3,064,685, issued Nov. 20, 1962.

There are additionally known devices of the sort immediately described which incorporate, in addition, mechanical locking means to hold in abeyance a provided spring function. Examples of these are seen in Berg et al., U.S. Pat. No. 3,182,566, issued May 11, 1965; Leighton, U.S. Pat. No. 3,282,169, issued Nov. 1, 1966; Valentine et al., U.S. Pat. No. 3,267,819, issued Aug. 23, 1966, and Cumming, U.S. Pat. No. 3,453,030, issued July 1, 1969.

Analogous to the first described type above, but providing a locking means for retaining the brake in applied position, is Schubert, U.S. Pat. No. 3,228,729, issued Jan. 11, 1966.

DESCRIPTION OF THE INVENTION

The conventional mode of operation of a double diaphragm brake chamber is as follows. In a normal brake application, air is delivered between the two diaphragms, forcing the inward diaphragm (inboard) toward the brake and the outboard or outward diaphragm outwardly (maintaining its stationary position), thus applying the brakes through a push rod inboard of and driven by the inboard diaphragm. In a secondary brake application, or if the inboard diaphragm fails, air is delivered to the space between the outboard diaphragm and the brake chamber outer wall, thus forcing the outboard diaphragm inwardly to apply the brakes.

In the brake chamber construction shown in FIGS. **1**, **5** and **7**, with respect to the spring device associated with the double diaphragm chamber, there is additionally provided a third circuit. This circuit feeds air into the space between the power piston and the inboard wall of the spring whereby to normally keep the spring backed off.

THE DRAWINGS

FIG. **1** is a sectional view through a combined air brake chamber and spring brake chamber, the former utilizing a double diaphragm arrangement in the chamber, the latter positioned outboard of the chamber and taken along the lines **1**—**1** of FIG. **2** in the direction of the arrows.

FIG. **2** is a partial view of the top of the device of FIG. **1** (in the view of FIG. **1** looking downwardly), showing the directions in which the drawing of FIG. **1** is taken.

FIG. **3** is a fragmentary section showing essentially the lower righthand side of FIG. **1** including the double diaphragm unit (service) utilizing a spacer between the two diaphragms which couples with a functional configuration of the outboard chamber inner wall in a manner to be described; also notable is that the section is rotated about 15° from that of the lower righthand portion of FIG. **1** so that the air feed between the diaphragms is visible.

FIG. **4A** is a fragmentary view of the portion of the diaphragm retainer ring outboard of the paired diaphragms and spacing ring therebetween (FIGS. **1** and **5**) which permit the passage of the air input therebetween (this is a preferred form).

FIG. **4B** is a sectional view of a combined service and spring brake unit, the chamber positioned inboard of the spring unit and involving the improved double diaphragm chamber construction and function.

FIG. **5** is a sectional view through a combined brake chamber and spring chamber, the former utilizing a double diaphragm arrangement in the brake chamber, the latter positioned inboard of the brake chamber.

FIG. **6** is a fragmentary sectional view through a brake chamber at the diaphragm-clamp band intermediate portion thereof utilizing the inventive diaphragm retaining ring in a single diaphragm application. (spring chamber outboard of the chamber.)

FIG. **8** is a side, sectional, fragmentary view of a modified construction adapted to be inserted in the upper-

most central portion of the add-on unit of FIG. 1. The improvement is a device to be used in the mechanical release of the power spring of the device of FIG. 1, the improvement shown in stored position, not in use in FIG. 8.

FIG. 9 is a view like that of FIG. 8, but with the improvement for use in mechanical release of the power spring of the device of FIG. 1 in operating position or in use.

FIG. 10 is a view of a modified form of elongate band usable as a ring inside the clamp band in the structures of, particularly, FIGS. 1 and 5.

FIG. 11 is a fragmentary view of a ring adapted to be used in the construction of FIG. 6 and 7 within the clamp band to retain the diaphragm or diaphragms therewithin, the view showing the fastening of the ends of an elongate band to form a ring.

FIG. 12 is a fragmentary plan section of the diaphragm spacer seen in the upper portion of FIG. 5 and the lower portion of FIG. 1 with the detachable ring member of FIG. 4*a* in utilization therewith.

FIG. 13 is a view like that of FIG. 12, but showing the removable ring member of FIG. 10 associated with the diaphragm spacer.

OBJECTS OF THE INVENTION

An object of the invention is to improve dual circuit air brake systems, particularly those involving the use of a pair of diaphragms in the brake chamber.

Another object of the invention is to provide an improved air brake chamber (constructions of FIGS. 1, 5 and 7) where one always has an intact and working, or acting, secondary brake (at full effect) due to the assumption that "only a single failure will occur at one time and cumulative failures are not expected."

Another object of the invention is to provide an improved double diaphragm air chamber which is provided with a secondary and parking brake by virtue of combination therewith of a power spring unit, options being provided of the power spring unit being either outboard or inboard of the double diaphragm brake chamber.

Another object of the invention is to provide an improved brake chamber construction utilizing a pair of ordinary or standard diaphragms, wherein a clamp band may be employed, together with an air inlet carrying spacer ring between the diaphragms, further means being provided to effectively seal this combination of structure completely around the periphery thereof.

Another object of the invention is to provide means for sealing the outboard diaphragm of a pair of diaphragms in a chamber against the inside surface of the outer chamber during normal operation of the inboard diaphragm without additional structure applied to the outboard diaphragm (FIGS. 1, 4B, 5 and 7 modifications) so that, even if the outboard emergency diaphragm is ruptured, an effective seal is provided so air pressure is not lost in the brake chamber.

Another object of the invention is to provide peripheral sealing means to be employed at the juncture of the two halves of the brake chamber receiving a single diaphragm therebetween and utilizing a clamp band (joining the two halves of the chamber together and compressing the periphery of the diaphragm therebetween) said means continuously and effectively containing the diaphragm periphery within the clamp band and preventing extrusion thereof at the clamp band bolt or connection points.

Another object of the invention is to provide a combined double diaphragm chamber with a ring spacing the diaphragms and air input penetrating said ring whereby the chamber outer diameter is relatively greater than normal, yet with an add-on type power spring unit of very minimum outer diameter.

Another object of the invention is to provide a double diaphragm chamber with an outboard spring brake unit where the outboard wall of the chamber comprises the inboard wall of the spring chamber, the spring cylinder or housing being separately and readily removable both from the said inboard wall thereof and outboard wall of the chamber whereby to provide ready and separate access to both the piston of the spring chamber and the diaphragms of the chamber.

Another object of the invention is to provide a double diaphragm chamber in combination with a spring brake unit, the latter inboard of the chamber yet there being provided separate and ready access through an removability of both the inboard wall of the spring chamber and the utboard wall of the chamber.

Another object of the invention is to provide an improved brake chamber construction utilizing a pair of ordinary or standard diaphragms, wherein a clamp band may be employed therewith, means being provided to effectively seal both diaphragms within the clamp band completely around the periphery thereof, further means being provided to input air between the diaphragms via the brake operating rod inboard (toward the brake) of both diaphragms.

Another object of the invention is to provide a variety of band or ring diaphragm sealing means adapted to be employed within the clamp band of a brake chamber wherein the brake chamber may utilize various combinations (for various functional purposes) of diaphragms, namely, a single diaphragm, a pair of diaphragms, a pair of diaphragms having a ring spacer therebetween utilizing an air input through the said ring spacer, and the like all of these band and ring sealing means effectively and continuously containing the diaphragm (or diaphragms) periphery (or peripheries) within the clamp band and effectively preventing extrusion thereof at the clamp band bolt or connection point (or points).

Another object of the invention is to provide ring and band sealing and guide means for brake chambers utilizing one or more diaphragms (for various functional purposes) in connection therewith, said means, in addition to its diaphragm sealing purposes, effectively guiding the various parts of the brake chamber in assembly, namely: the brake chamber half flanges, the diaphragm or diaphragms, and the spacing ring between the diaphragms (if same is employed). Further, said means strongly aid in keeping these parts concentric in assembly of said chamber.

Another object of the invention is to provide sealing and guide means usable with brake chambers employing one or more resilient diaphragms therewithin (for various functional purposes), which sealing and guide means strongly aids in providing a leakfree brake unit). Thus, for example, the assembler of a brake chamber must preload and squeeze the diaphragm or diaphragms to a certain radial loading for successful assembly. (If the diaphragm or diaphragms is (are) out of concentricity, one will not attain a leak-free unit.) The

improved ring or band sealing and guide means disclosed herein aid strongly in attainment of concentricity, when used in assembly, and further operates to prevent "blow-in," that is, losing the seal at the periphery of the diaphragm with the latter pulling into the center of the chamber upon use.

A further object of the invention is to provide, with respect to a brake unit having an outboard chamber and an inboard spring chamber, an improved sealing means and system for the spring chamber at the inboard (with respect to the vehicle axle) end thereof whereby a leak-free unit may be provided for a much longer time than theretofore, in a situation where the seal is preventing communication between a corrosive outside-unit atmosphere and a sealed inner zone of the unit which is periodically and cyclically pressurized and exhausted.

Yet a further object of the invention is to provide, in a combination brake unit (utilizing an inboard brake chamber having one or more diaphragms therewithin and an outboard spring chamber) means which provide a much improved diaphragm return spring installation resulting in far greater diaphragm return spring life and effectiveness providing all of (1) a standard stroke for the diaphragm return spring, (2) a spring which effectively takes up the space between multiple diaphragms, when same are present, and (3) a larger closed height provided for the diaphragm return spring, so that it is not necessary to put said spring into said solid spring heights with high spring counterloads. Furthermore, this construction and improvement provide the desired return spring strength in order to release the brakes at conditions such as a 40° F. below zero external temperature.

Another object of the invention is to solve all of the immediately above described problems with respect to the diaphragm return spring utilized in a different form of combination brake unit construction, namely, that wherein the spring unit is inboard and the brake chamber is outboard of the said unit.

Another object of the invention is to provide an improved housing structure for a combined brake unit wherein a spring chamber is provided inboard of an outboard brake chamber, the improvement in the housing of the inboard spring chamber permitting an integral, annular power retainer spring member outboard of said spring chamber and an improved inboard wall of the spring chamber the latter integrally applicable and removable to the spring housing, whereby to improve the sealing characteristics of the spring chamber both peripherally, at the connection of the end wall with the housing proper, and centrally, with respect to the passage of the power piston drive shaft through the said end wall.

Another object of the invention is to provide an improved means for mechanically releasing the power spring in an add-on type spring brake unit, namely, a device which prevents the operator rupturing the piston casting by backing off the power spring too far in the mechanical releasing operation.

Another object of the invention is to provide improved means within an air brake chamber utilizing at least two diaphragms therewithin consistently provides means and methods of obtaining a warning signal in the case of rupture of one of the diaphragms.

Other and further objects of the invention will appear in the course of the following description thereof.

FIG. 1 CONSTRUCTION

Referring first to FIG. **1**, at **10** is generally designated the outboard (bulkhead) pressure plate, or member of an air brake chamber. This outboard pressure plate, as will be described, also serves as the inboard wall for the spring unit, to be described. Member **10** has an inboard circumferential flange **11** adapted to be gripped by a clamp band **12.** Outer cap **10** has air input opening **13,** which is internally threaded for attachment of an air pressure fitting. (Inboard and outboard are with respect to the vehicle axle)

The inboard plate, member or portion **14** of the air brake chamber has an outboard peripheral flange **14***a* also received within the clamp band **12** in conjunction with flange **11,** the peripheral edges of a pair of standard diaphragms **15** and **16** also being gripped in air sealing fashion circumferentially between the flanges **11** and **14***a*, spaced by a ring generally designated **17** to be later described and removably fixed by clamp band **12.** Diaphragm **16** is the inboard or normally operating (in brake applications) diaphragm of the pair. Diaphragm **15** is the outbaord and secondary diaphragm.

Inboard diaphragm **16** abuts, in its inboard or inner face, a circular pad or plate **18** which has a spring retainer groove **19** circumferentially formed in the inboard face thereof. Plate **18** receives diaphragm return spring **20** thereagainst, the latter encircling a push rod **21** fixedly mounting plate **18.** Rod **21** extends through an opening **22** in the inboard wall of inboard chamber plate **14,** centrally thereof, whereby to pass out of the brake chamber toward the axle or braking member or means. Air exhaust openings **23,** covered inboard by filter material **24,** (so that dirt and moisture will be excluded from the unit), are provided spaced around the lower shell **14** of the brake chamber.

The brake chamber has basically three zones. These comprise the inboard zone or space **25** defined between the inboard face of the inboard diaphragm **16** and the inboard or inner wall **26** of chamber plate or member **14.** Zone **25** breathes through openings **23** as the diaphragms or one of them, more toward and away from the inner face **26** of chamber member **14** in service (or secondary) applications of the brakes and releasings thereof. The second zone of the chamber is that space numbered **27** between diaphragms **15** and **16** and which is served by an air input (to be described) through spacer ring **17.** The third zone of the air brake chamber is numbered **28** and comprises that space outboard of or above (in the view of FIG. **1**) the outboard diaphragm **15.**

Turning to the zone of the clamp band **12,** flanges **11** and **14**a, diaphragms **15** and **16** (the peripheries thereof) and spacer ring **17,** the following is noted. An input passage **29** is provided through ring **17** connecting to an enlarged intenally threaded air input connection means **30.** There is further provided, outboard of all of spacer ring **17,** diaphragm peripheries **15** and **16** and flanges **11** and **14***a*, a continuous circumferential sealing guide band or ring **31.** The width of the ring **31** is preferably greater than the space between the opposing outer faces of flanges **11** and **14***a*, whereby the peripheries of the diaphragms **15** and **16** are continuously maintained at a uniform radius and do not extrude under pressure at the clamp band bolt joint or connec-

tion points. Ring **31** preferably lies against the inner face of clamp band **12.**

FIG. **4A** shows a first and preferred option of the sealing and guide band or ring **31,** in that figure designated **300.** This comprises an elongate, preferably metal such as copper or steel, but optionally plastic as, for example, molded nylon ring. Provided at each end of the band **300** is a notch **301** (or **302**), the notches opposing one another, that is, opening out of opposite edges of the strip or band **300.** The end portion of the notch is provided with an engaging flange or edge **303** (or **304**). The length of such a band **300** must be such that the end portions or legs **305** and **306** of the band will overreach or go past the portion of the fitting **30** which is within the clamp band **12** to engage on each side thereof, from above and below. When the legs **305** and **306** are linked at each side of fitting **30** and band **300** is tightly and snugly engaged around the assembly of flanges **11** and **14***a*, diaphragm peripheries **15** and **16** and spacer **17,** tightening down of the clamp band will cause the diaphragm peripheries to extrude against the inner face of the ring **300** and form a seal thereagainst. The depth of the notches **301** and **302** must be sufficient that the band is centered with respect to the fitting **30** and within the clamp band with respect to the respective diaphragms above and below the spacing ring **17** and the two flanges **11** and **14**a.

The width of the band may be greater than its bottom-out width in the clamp band or the width of the space of the base of the clamp band, provided the band or strip **300** is thin enough to flex in cross section. One important purpose of the band is to guide the various parts in assembly: the chamber flanges, the paired diaphragms, the spacer ring and the clamp band. The problem of keeping the parts concentric in assembly is very important.

It is also very important to have a leak-free unit. The assembly must preload and squeeze the diaphragms to a certain radial loading. If one or both of the diaphragms is out of concentricity, the assembler will not attain this, namely a leak-free unit. The employment of the band **300,** or its equivalent, also aids in preventing "blow-in," that is, losing the seal at the peripheries of the diaphragms with one or both of them pulling into the center of the chamber. When used in assembly of the brake chamber, it aids in providing a more uniform displacement of the diaphragm.

It is desired to have a wide band to guide the parts mentioned in assembly. If the band is wide, it then can be relatively thin. As mentioned, materials can be copper, steel, a molded nylon ring or the like. Hoop strength principles are involved of a banded element. Thus, this band must not elongate, it must have a low yield and a high modulus with respect to rubber. The element must have a low elongation in hoop strength.

The maximum width is the inner cavity width of the clamp band as closed down to the flanges. The minimum width feasible would be from one edge abutting against the inboard or outboard edge of the clamp band up to approximately one-half of the diaphragm away from the clamp band abutment. The more band present, the better backup is provided.

Referring to FIG. **10,** therein is shown a modified form of elongate strip or band generally designated **310,** but differing from the form seen in FIG. **4** in that two circular openings **311** and **312** are provided closely adjacent the ends **313** and **314** of the band **310.** The openings have elongate slots **311**a and b and **312**a and b on each side thereof whereby a facilitate engagement with the fitting **30** of FIG. **1.** The orifice size of the openings **311** and **312** must be sufficient to pass over the fitting **30** and the width of the slots **311***a* and *b* and **312***a* and *b* must closely fit the width of the portion of fitting **30** which attaches to spacer ring **17** within the clamp band **12.** All other characteristics of this ring are the same as those of ring **300.** Generally speaking, however, as may be seen, this band is usually of slightly greater length than ring **300.** Band **300** also usually provides a tighter fit, which is preferable.

Referring now to FIG. **1** to the inboard side of the chamber and particularly the diaphragm return means, the following are noted. In the first place, washers or bolt receiving bases **99***b* are provided, whereby to space upwardly the relatively enlarged, relatively thick heads of attachment bolts **99** (heads **99***a*) from inboard wall **26.** The circular pad or plate **18** which abuts the inboard diaphragm **16** is arcuately formed on its upper or outboard face thereof, **18***a*, whereby the central portion of diaphragm **16,** when diaphragm return spring **20** has returned pad **18** to the position of FIG. **1,** is markedly further outboard of wall **26** than the more peripheral portions of diaphragm **16** at the periphery of pad **18.** There is further provided a spring retainer groove **19** circumferentially formed up into the underside or inboard face of pad **18.** A boss **18***b* extends inboard whereby to receive and secure the outboard end of push rod **21.** The diaphragm return spring **20** itself is of such structure, first, that its coils deverge outwardly outboard, and, secondly, the coils are so spaced that, when diaphragm pad **18** is in the opposite position to that of FIG. **1,** namely, to the most inboard position, the spring coils are not in solid contact with one another.

The structure of this combination is that the outer inboard periphery **18***c* of pad **18** will contact the bolt heads **99***a* well before pad **18,** in any portion thereof, approaches wall **26.** This arcuate pad construction, the spring groove (circumferential) in the inboard face of the pad and the bolt heights all cooperate to permit the following. In the first place, the required standard stroke is achieved, namely, that stroke which is required by the service chamber from the position of FIG. **1** with diaphragm **16** (or **15**), at the outboard confines of the chamber half **10** to the inboardmost position of the pad **18.** This is also the stroke of the spring emergency chamber where pad **71** moves from the most outboard position shown in FIG. **1** to its most inboard position.

Referring to FIG. **1** and the space **25** below diaphragm **16,** the diaphragm return spring **20** is working essentially in a nonsealed space with respect to the corrosive atmosphere under the truck. One expects the life of diaphragm **16** to last around a million cycles. It is a severe problem obtaining a diaphragm return spring that provides all of the desired functional features and yet can reach the same cycle lift. By virtue of the three elements above recited, or the combination of structures shown, this is achievable. A larger closed height for the spring is provided so that the spring does not get into solid spring height with high spring counterloads. Return spring strength sufficient to deapply the brakes at 40° F. below zero may further be provided. All space

within the inboard portion of the service chamber is effectively consumed.

(It must be remembered, in normal parking, that every time the vehicle engine goes off, the pair pressure goes out of chamber **59** and power spring **65**, acting as a parking brake, sets the brake through push rod **48**, pad **71**, diaphragm **16**, pad **18** and push rod **21**.)

FIG. 1 OPERATION (SERVICE)

Referring then, to the operation of the chamber of the brake in FIG. **1**, in ordiary service applications of the brake, air is input through fitting **30** and passage **29** to the space **27** between diaphragms **15** and **16**. This actuates push rod **21** downwardly in the view of FIG. **1** or toward the observer or inboard toward the brake. The action of this air pressure is two-fold. In the first place, it acts to maintain diaphragm **15** in the position shown in the view and, secondly, it drives diaphragm **16** inboard against the force of return spring **20** to extrude the push rod **21** through opening **22** and, through whatever linkage is employed, actuate the brakes. As the air pressure rises in the space **27** between the diaphragms, this relationship remains true, namely, diaphragm **15** in the position shown in FIG. **1** and diaphragm **16** working inwardly (and outwardly - as pressure falls) to actuate and release the brake to a greater or lesser degree as the vehicle operator applies and releases the brakes.

In the event of rupture or perforation of inboard diaphragm **16**, or alternatively, in the event of an emergency application of the brakes, air pressure is input through opening **13** (via a conventional fitting attached to an air supply hose) (not shown) whereby to force the outboard diaphragm **15** downwardly in the view of FIG. **1** or toward the viewer or inboard to effect actuation of the brakes.

THE SPRING UNIT OUTBOARD OF THE SERVICE CHAMBER IN FIG. 1

Formed integral with or attached to the peripheral upper or outboard surface of the outer wall **10** of the brake chamber is a circumferential flange **40** having a circumferential groove **41** in the outer upper face thereof with sealing means of resilient character positioned therewithin. A cylindrical can or container **42** having an outwardly flared inward end **43** is fixedly connected to said flange **40** by means of suitable screws or bolts **44** received in internally threaded or tapped holes **45**. The outward flanging of the cylindrical can **42** serves to make a sealed sliding fit, particularly with respect to the material in the groove **41**. An air input passage **46** (see FIG. **2**) (analogous to that in FIG. **4**) feeds air through the lower portion of flange **40**. Centrally of outer wall **10** of the brake chamber there is provided an opening **47** having piston rod sealing means **47a** removably received in the grooved side wall thereof. A hollow piston rod **48** passes in sliding sealing fashion through said opening **47**. The outermost portion of can **42** is radially inwardly formed at substantial right angles as at **49** (circumferentially) to receive inboard thereof the outwardly flanged inward end **51** of upper spring housing or can **50**. Upwardly flared portion **52** centrally of radially inwardly flanged portion **49** of cylinder portion **42** permits the inward and outward sliding of can portion **50** under certain circumstances to be described.

The latter cylinder mating structure is that seen in application Ser. No. 812,538, inventors Swander-Wearden, filed on Mar. 10, 1969, for "Brake Actuator."

The center portion of the outer wall **53** of cylinder portion **50** is preferably dished as at **54** with a central opening **55**. A resilient plug **56** is removably received within opening **55** and carries washer **57** of greater outer diameter than the inner diameter of opening **55** thereon.

Received within the inward cylinder portion **42** is a piston generally designated **64** having an outer (radially) peripheral wall **60** of relatively lesser outer diameter surmounted by a wall engaging or abutting portion **61** having circumferential grooves **62** and **63** therein with suitable sealing rings of synthetic rubber, felt or the like. The innermost wall portion of the piston **64** receives the inward end of a power spring **64**, the outer end of the power spring abutting the outer wall **53** of the outer portion of the can or cylinder **50**.

The central hub **66** has an opening **67** out the upper portion thereof which communicates with the internally threaded portion **68** of piston rod **48**. A threaded bolt **69** with an enlarged head is threadably and removably engaged with the said internally threaded portion **68** of piston rod **48**.

Bolt **69** cooperates with metal washer **57** in a backoff function cooperating with the threaded portion **68** of piston rod **48** and opening **67**. The mechanism of such action is simple and previously disclosed in other patents, consisting of (1) removing plug **56**, (2) unscrewing bolt **69**, (3) passing bolt **69** through the central opening of washer **57** with the latter lying outside opening **55**, (4) threading the end of bolt **69** back into threaded portion **68** through opening **67** and (5) withdrawing piston **59** toward wall **53** by the screw action of the mechanical release. (See U.S. Pat. No. 3,376,623.)

Fixed to the inward end of piston rod **48** by screw **70** is plate **71**. Screw **70** is threadably received in an internally threaded plug **72** fixed within the lower hollow end of piston rod **48**. Plate **71** operates to abut in force transmitting fashion diaphragm **15**.

FIG. 1 OPERATION (OVERALL)

The mode of operation of the device in FIG. **1** is as follows. In the first place, air pressure through passage **29** passes between the diaphragms **15** and **16**. This forces push rod **21**, via plate **18** and against the action of diaphragm return spring **20** out the inward end of service chamber housing **14** to apply the brake via mechanism connected to the inward end of push rod **21** of conventional type. Likewise, should diaphragm **16** perforate or rupture or there be an emergency brake application, air is input through passage **13** into space **28** above the outboard diaphragm whereby to also apply or aid in application of the brake.

During all service and secondary brake applications via the diaphragms **15** and **16** in the brake chamber, air pressure is maintained in chamber **59** between piston **64** and wall **10**. Thus, plate **71** and piston rod **48** are in the outward position shown with power spring **65** compressed. Chamber **73** breathes through openings **74** filtered by ring filter **75**. Should the air supply into passages **29** and **13** fail or, under certain circumstances, deliberately upon decision of the operator, or in a parking situation, air is exhausted from chamber **59** through the passage (not seen) analogous to the passage **46** or FIG. **4**. Power spring **65**, through piston rod **48**, plate

71 and via plate 18, as well as push rod 21, applies the brake. The vehicle may not be moved until air pressure is restored into chamber 59 or the mechanical backoff function described is exercised.

The resilience of the power spring 65 permits correction or movement of piston rod 48, plate 71, plate 18 and push rod 21 against return forces and brake drum contraction upon cooling and and like.

BRAKE UNIT OF FIG. 5

Referring to FIG. 5, the portions thereof which are essentially identical to the structure of FIG. 1 will be numbered the same as the parts in that view, but primed. To be more specific, with respect to FIG. 5, essentially the outer half of the figure (the upper half of the drawing or upper smaller half thereof), comprising the double diaphragm chamber, is identical in structure and function to the double diaphragm air brake chamber of FIG. 1 (inboard thereof).

Referring to FIG. 5, in this brake construction, the spring unit is inboard of the double diaphragm brake chamber. A cylindrical can 100 is inwardly formed at the outward end 101 thereof with central inwardly extending portion 102 defining opening 103 centrally thereof. Thus, outer wall portion 101 of cylinder or can 100 serves as a spring retainer for power spring 104. The inward end 105 of can 100 is circumferentially outwardly tapered or flanged and received circumferentially on an inner wall portion (bulkhead) 106. Cylinder portion 105 is fixed at a plurality of points to inner wall 106 by screws or bolts 107. An upwardly standing peripheral flange 108 has, on the outer upper surface thereof, groove 109 with sealing means, such as rubber rings therein. This effects an air seal against the inner surface of the cylindrical wall of the can 100. Centrally of the inner wall 106 is provided opening 110 radially recessed as at 111 to receive therewithin shaft sealing means including O-ring 112*a*, bushing 112*b*, and felt lubricating ring 112*c* located in the latter) retained by ring 113 in groove 114. Studs 115 serve to attach the entire housing assembly to an automotive frame, axle or the like. (The same is true of studs 99 (bolts welded in) in FIG. 1 at the inward side 14 of the service chamber.)

A piston generally designated 116 has an outer greater diameter wall portion 117 containing grooves 118 and 119 with sealing nylon rings or the like. The upper portion of the piston is provided with extensions 120 to act as a stop. Central hub 122 of the piston has a shelf or ledge 123 formed thereon whereby to receive the lower end of brake chamber diaphragm return spring 20°. The inner central portion of the piston fixedly engages a bushing 124 which also is fixed to the outer end of hollow piston rod 125. Push rod 21′ extends through push rod bushing 124 in slidable sealing fashion, within hollow piston rod 125. At the lower end of (inward end of) rod 21°, there is a threaded portion 126 upon which a washer 127 is threadably received, same locked thereon but nuts 128 and 129 which adjust the position of washer 127 of rod 21′. The outer diameter of washer 127 is greater than the outer diameter of tube 125.

There is additionally provided an air input passage 130 in the inner wall 106 which passes air into the cavity 131 between piston 116 and inner wall 106.

Referring to the seal system at 112 in FIG. 5, 112*a* is a rubber O-ring seal. Member 112*b* is a guide bushing or bearing which takes the load (may be nylon). Element 112*c* is a saturated oil felt ring. There is a clearance between piston rod 125 and the lower wall at 110 which is of the order of thirty thousandths of an inch. O-ring 112*a* sits on the outboard bushing ledge and does not require a formed groove.

In previous analogous seal constructions, with the working of a piston rod through an opening like that at 110 with respect to an O-ring, there is typically D-type wear on the O-ring. In cold weather, one thus tends to lose the sealing effect. In this novel seal assembly and construction of FIG. 5, the oil soaked felt 112c provides an oil film on the piston rod 125 which is carried to the O-ring in its reciprocation through the opening 110 whereby to markedly reduce wear. The length of time that a manufacturer can keep the unit (zone 131) leak-free comprises a basic specification. This is markedly improved in this situation.

If one compares the seal at 47 in FIG. 1 with the seal at 112 just described, it may be seen that a less elaborate seal (of relatively conventional type) is employed. In the example of FIG. 1, the novel seal construction of FIG. 5 is not required because one is working between a pair of sealed atmospheres. That is, the atmosphere in zone 59 and that of zone 28 above diaphragm 15 are sealed with respect to the outside and may be operated with filtered air. On the other hand, at 112, the piston rod 125 is working out of a sealing atmosphere (at 131) into the corrosive atmosphere under the truck.

Further with respect to FIG. 5, and referring to housing 100, the structure thereof, per se, should be noted. In the first place, the spring retainer 101 is integral with and part of the cylindrical housing 100. That is, the outward end 101 of the cylinder 100 has centrally inwardly extending portion 102 defining opening 103 centrally thereof, portions 101 and 102 serving as a spring retainer for power spring 104. The inboard portion of the cylinder or can as at 105 is circumferentially outwardly tapered or flanged and received circumferentially on the upwardly standing peripheral flange 108 of inner wall bulkhead 106. The counter tapers of the flange 108 and bulkhead 106 with the seal in groove 109 effects an air seal and greatly aids assembly and disassembly of the inner wall member 106.

FIG. 5 OPERATION

In the operation of the device seen in FIG. 5, air pressure through passage 130 into chamber 131 normally retains the piston 116 in the precise position shown in the view, namely, with extensions 120 rammed against wall member 101, thus totally compressing power spring 104. In the meantime, an air is normally input into fitting 30′ through passage 29′ in service operation of the brake, inward diaphragm 16′ acts upon plate 18′ and push rod 21′ to actuate and release the brake to a greater or lesser degree. Tube 125 does not move during this normal operation.

In the case of an emergency actuation of the brake or in case the inward diaphragm 16′ perforates, air is input into passage 13′, thus forcing diaphragm 15′ inwardly toward the brake actuating it via plate 18′ and 21′.

In the case of loss of pressure in the passage 29′ and 18′, a diaphragm return spring 20′ returns the diaphragms to the position shown. Under certain circumstances, at operator's option, air pressure, however, would simultaneously be lost through passage 130 from

chamber **131**, thus permitting power spring **104** to drive piston **116** down until the lower portion of piston wall **116** abuts wall **106**, thus applying the brake via tube **125** abutting washer **127** and picking up rod **21'**. This occurs in a parking situation when pressure goes out of chamber **131**.

Thus, it is seen that the operation of the brakes of FIGS. **1** and **5** are the same, but utilizing different mechanisms due to the fact that, in one, FIG. **1**, the power spring chamber is outboard of the chamber and, in FIG. **5**, the other, the opposite is true.

FIG. 7 CONSTRUCTION

Referring to FIG. **7**, aside from an omission (to be described) at the periphery of the diaphragm, and an addition (to be described) with respect to the brake operating rod, the structure of the chamber and the parts thereof of FIG. **7** is substantially identical to that of FIG. **1**. Accordingly, like numbers will be employed to indicate like parts between the two figures, save in the case of FIG. **7**, those numbers will be double primed. If there are minor structural variations, the parts will be described.

Referring, then, to FIG. **7**, at **10''** is generally designated the outboard pressure plate or member of an air brake chamber. This outboard pressure plate also serves as the inboard wall, if desired, for a spring unit. Alternatively, the outboard pressure plate may be integral and serve as a closure wall simply for a vehicle brake chamber. Member **10''** has an inboard circumferential flange of **11''** adapted to be grippped by a clamp band **12''**. An air input opening, not seen, is provided to input air into the space **28''** between the outer cap and the outboard diaphragm **15''**.

The inboard plate, member or portion **14''** of the air brake chamber has an outboard peripheral flange **14*a''***, the latter also received within clamp band **12''** in conjunction with flange **11''**. The peripheral edges of a pair of standard diaphragms **15''** and **16''** also are gripped in air sealing fashion circumferentially between flanges **11''** and **14*a''***, removably fixed by clamp band **12''**. Diaphragm **16''** is the inboard or normally operating (in service brake applications) diaphragm of the pair. Diaphragm **15''** is the outboard (secondary) diaphragm.

Inboard diaphragm **16''** abuts, on its inboard or inner face, a circular pad or plate **18''**. Plate **18''** receives diaphragm return spring **20''** thereagainst, the latter encircling push rod **21''** fixedly mounting plate **18''**. Rod **21''** extends through an opening **22''** in the inboard wall of inboard service chamber plate **14''**, centrally thereof, whereby to pass out of the brake chamber toward the axle of braking member or means. Air exhaust openings **23''**, covered inboard by filter material **24''**, are provided spaced around the lower shell **14''** of the brake chamber.

The brake chamber has basically three zones. These comprise the inboard zone or space **25''** to fine between the inboard face of the inboard diaphragm **16''** and the inboard or inner wall **26''** of service chamber plate or member **14''**. Zone **25''** breathes through openings **23''** as the diaphragms, or one of them, move toward and away from the inner face **26''** of chamber member **14''** in service (or secondary) applications of the brakes and releasings thereof. The second zone of the chamber is that space number **27''** between diaphragms **15''** and **16''** and which is served by an air input (to be described) through rod **21''**. The third zone of the air brake chamber is numbered **28''** and comprises that space outboard of or above (in the view of FIG. **7**) the outboard diaphragm **15''**.

That which has been immediately above described is substantially identical to, at least functionally, the structure of the chamber of FIG. **1**, supra. I now turn to the description of thos features of this Figure which differ from the chamber illustrated in FIG. **1**.

Turning to the zone of clamp band **12''**, flanges **11''** and **14*a''*** and diaphragms **15''** and **16''** (the peripheries thereof) there is further provided, outboard of all of diaphragms peripheries **15''** and **16''** and flanges **11''** and **14*a''***, a continuous circumferential steel band or ring **200** which has no opening therethrough. The width of ring **200** is greater than the space between the opposing outer faces of flanges **11''** and **14a''**, whereby the peripheries of diaphragm **15''** and **16''** are continuously maintained at a uniform radius and do not extrude under pressure at the clamp band bolt joints or connection points. Ring **200** lies against the inner face of clamp band **12''**.

Diaphragm **16''** has opening **201** centrally thereof. A centrally dished washer **202** is provided with a central opening therein. A hollow push rod **203** having an outwardly flanged outboard end **204** is removably (threadably) received in an opening **205** through plate **18**. Rod **21''** has a central passage **206** therewithin with inboard outlet port communicating with circumferential groove **208** which likewise connects with air input passage **209** which is internally threaded in its radially outboard portions. Passage **209** is received within cylindrical block **210** slidably and frictionally fitted on a lesser diameter portion **211** of rod **21''**. Grooves with O-rings are provided at **212** and **213** in block **210**, same sealing against the outer surface of lesser diameter rod portion **211**. The inboard end of rod **21''** is externally threaded to removably receive locknut **214** and yoke **215** thereon.

Referring then, to the operation of the chamber of the brake in FIG. **7**, in ordinary service applications of the brake, air is input through passage **206** via passage **209**, groove **208** and openings **207** and numbered **203** to the space **27''** between diaphragms **15''** and **16''**. This actuates push rod **21''** downwardly in the view of FIG. **7** or toward the observer or inboard toward the brake. The action of this air pressure is two-fold. In the first place, it acts to maintain diaphragm **15''** in the position shown in the view and, secondly, it drives diaphragm **16''** inboard against the force of return spring **20''** to extrude push rod **21''** through opening **22''** and, through whatever linkage is employed, actuate the brakes. As air pressure rises in the space **27''** between the diaphragms, this relationship remains true, namely, diaphragm **15''** in the position shown and diaphragm **16''** working inwardly (and outwardly — as the pressure falls) to actuate and release the brake to a greater or lesser degree as the vehicle operator applies and releases the brakes.

In the event of rupture of perforation of inboard disphragm **16''**, or alternatively, in the event of a secondary or emergency application of the brakes, air pressure is input to the space **28''** (via a conventional fitting attached to an air supply hose not shown) whereby to force the outboard diaphragm **15''** downwardly in the view of FIG. **7** or toward the viewer or inward to effect actuation of the brakes.

FIG. 6 CONSTRUCTION

The FIG. 6 construction is extremely like, in structure and function, the structure and function of the brake chamber of FIG. 1, as well as the spring brake chamber outboard of the chamber of FIG. 1. Therefore, all of the parts which are essentially the same in structure and function as the parts in FIG. 1 will be numbered the same, but triple primed. These will not be redescribed, as the description of the double primed parts in FIG. 7 are even more closely analogous to the structure involved.

The sole substantial differences between the chamber of FIG. 6 and that of FIG. 1 lies in the provision of that a single diaphragm **300**, in the chamber, as well as the showing of the air input opening **301** in number **10'''** passing air via passage **302** into the zone **72'''** to illustrate this passage structure. There is a passage peripherally and angularly removed from passage **300** to flow pressurization fluid into space **28'''** outboard of the single diaphragm **300**. There is a single continuous metal band or ring **303**, without a passage therethrough, positioned outboard of flanges **11'''** and **14a'''**, as well as the periphery of diaphragm **300** and within clamp band **12'''** so as to continuously and peripherally seal the outer rim of the diaphragm against extrusion under pressure. Ring **303** lies against the clamp **12'''** on its outer face.

The function of the device of FIG. 6 is simple. In service actuations, with air pressure flowed into space **28'''**, diaphragm **300** moves downwardly in the view of FIG. 6, thus applying the brakes through plate **18'''** and rod **21'''**. When air pressure is released from the space **28'''**, diaphragm return spring **20'''** returns the diaphragm to the position of the view. In the case of operator choice or secondary application of the brakes, or in the case pressure is lost from space **28'''** by rupture of diaphragm **300**, the spring unit (not seen in FIG. 6, but the same as that of FIG. 1) applies the brakes via push rod **48'''** acting through plate **71'''** on plate **18'''** and rod **21'''**.

FIGS. 8 and 9

Referring to FIGS. 8 and 9, this improvement relates to the upper portion of FIG. 1, namely, the spring chamber and the mechanical release or backoff therefor. Those parts which are the same as the parts of the spring chamber of FIG. 1 are numbered the same, but primed.

Turning to the unique structure of FIGS. 8 and 9, a resilient plug **200** is removably received within opening **55'**. Plug **200** has outwardly protruding body portion **200a** with circumferential groove **200b** therearound. Removably mounted on the plug **200** is adaptor **201** (so generally designated) having a circular flange **201a** at one end thereof, a pair of opposed (180°) notches or slots formed in the edges thereof as at **201b**. Centrally of the flange **201a** is an opening **201c**. This receives the body portion **200a** of the resilient member **200**. Fixed centrally around opening **201c** is cylindrical portion **202**, there being provided a shelf **203** within same to permit the outer portion of resilient member **200a** to overlie same. Screws or bolts **204** are removably engageable in internally threaded holes **205** which are formed through wall portion **54'** immediately outwardly of opening **55'** therewithin.

FIG. 8 shows the member **201** in stored position. FIG. 9 shows the member **201** in operating position.

In the latter position, the member **201** is inverted from the position of FIG. 8 and the cylindrical extension **202** thereof extends downwardly within the opening **55'**. The internal diameter of the cylindrical extension **202** must be greater than the outer diameter of the threaded portion **68'** of the bolt **69'**.

The bolts or screws **204** have been unthreaded from internally threaded openings **205** and the resilient member **200** unsnapped from its connection with member **201**. The flange **201a** lies against the inner dished portion **54'** of the outer housing and, being of greater outer diameter than the opening **55'** circumferentially overlies the edge thereof. The cylindrical extension **202** of member **201** is of sufficient length that, when the flange **201** is positioned as seen and bolt **69** is used in its backoff function as previously described with respect to FIG. 1, the lower edge of extension **202** will abut against the top of the cylindrical central piston extension **66'** before the peripheral portion of the piston skirt **61** abuts against the circumferential stop **51**.

Thus the piston **64** will not be fractured by excessive mechanical backoff against the spring **65** because of the positive abutment of central hub **66'** against the lower edge of the cylindrical extension **202**. This can be of considerable importance because it is not always possible to tell when the peripheral piston abutment has been made and added strain may be placed on the piston or even fracture thereof before the resistance becomes sufficiently great against the backing off action utilizing the bolt whereby to stop same. This device conclusively does away with that problem.

FIG. 11

FIG. 11 shows the sample connection of an elongate strip generally designated **400** having free ends **401** and **402**. These ends, spot welded as at **403**, form a continuous ring or band usable, for example, in the constructions of FIGS. 6 and 7.

FIGS. 12 and 13

FIG. 12 shows a plan view of a diaphragm spacer such as **17** in FIG. 1 utilized with the removable hook-ended band of FIG. 4a. It should be noted that nipple **30** is preferably provided with horizontal side flanges **30a** and **30b** over which hook ends **303** and **304** may engage.

FIG. 13 shows the utilization of band **310** of FIG. 10 with diaphragm spacer **17**. In this case, the enlarged central openings **311** and **312** fit over nipple **300** with slotted ends **311a** and *b* and **312a** and *b* removably engaging flanges **30a** and **30b**.

From the foregoing, it will be seen that this invention is one well adapted to attain all of the ends and objects hereinabove set forth, together with other advantages which are obvious and which are inherent to the structure.

It will be understood that certain features and subcombinations are of utility and may be employed without reference to other features and subcombinations. This is contemplated by and is within the scope of the claim.

As many possible embodiments may be made of the invention without departing from the scope thereof, it is to be understood that all matter herein set forth or

shown in the accompanying drawings is to be interpreted as illustrative and not in a limiting sense.

Having thus described my invention, I claim:

1. A brake actuating device having operable connection with the braking mechanism of a vehicle, comprising,

a closed housing divided into inner and outer compartments,

a pair of flexible diaphragms peripherally secured in the outer compartment,

a first pressurized fluid input between the outboard one of said diaphragms and the outboard end of the outer compartment,

a first spacing ring between said diaphragms,

a second pressurized fluid input between said two diaphragms through the spacing ring therebetween,

a brake operating rod surmounted by a diaphragm abutment plate extending axially through the inner and outer compartments and having attachement to the braking mechanism,

a movable wall mounted within the inner compartment equipped with a tubular axial extension surrounding and having abutting engagement at its inner end with said rod,

an annular member forming the partition between the inner and outer compartments,

a power compression spring unit between the said annular member and movable wall,

a rod return compression spring between the diaphragm abutment plate and movable wall,

an air inlet for introducing compressed air to the inner compartment between the movable wall and the inner end of the housing wherein the improvement comprises

a diaphragm retaining ring encircling the peripheries of said diaphragms and first ring spacing same,

the width of said retaining ring at least equal to the combined thickness of the two diaphragms, in clamped state, with the first spacing ring clamped therebetween, and said retaining ring positioned inward of a clamp band circumferentially gripping all of said diaphragms, said first spacing ring and said retaining ring therewithin.

2. A device as in claim 1 wherein the diaphragm abutment plate is arcuate in form over its outboard surface, and the rod return spring cooperates between the diaphragm abutment plate and the movable wall.

3. In combination,

a housing,

said housing having inner and other ends with respect to the vehicle brake mechanism,

one end of he housing closed by an inner wall member having a central opening therethrough,

the other end of said housing closed by an outer wall member,

a movable wall within said housing with the outer face thereof next the outer wall member of said housing,

a rod connected at one end thereof centrally of said movable wall, extending inwardly of the latter and having a sliding fit through the inner wall member central opening,

an air inlet into said housing between the inner wall member and the inner face of the movable wall, whereby to permit pressurization of the movable wall pressurization chamber defined between said movable wall and the inner wall member,

an air brake chamber inboard of said housing with the inner wall member of the housing constituting at least in part one of a pair of members defining said air brake chamber therebetween and having continuous, opposed, circumferential flanges thereon,

a pair of diaphragms peripherally engaged by said brake chamber defining member flanges,

a first pressurized fluid input into the space between the outboard one of said diaphragms and the outer air brake chamber defing member,

a second pressurized fluid input between the two diaphragms, and a diaphragm retainer ring encircling the peripheries of said diaphragms, said ring of width at least equal to the thickness of the two diaphragms when the latter are clamped between said flanges,

the flanges of said chamber and said diaphragms circumferentially and peripherally gripped by a clamp band,

said retainer ring positioned inward of the clamp band and outward of the said diaphragms and flanges.

4. A device as in claim 3 wherein a spacing ring is positioned between said paired diaphragms,

the second pressurized fluid input between the two diaphragms is through said spacing ring and said retainer ring encircles both said diaphragms and ring spacing same,

the width of said retainer ring at least equal to the combined thickness of the two diaphragms, in clamped state, with the spacing ring clamped therebetween.

5. In combination,

a housing

said housing having inner and outer ends with respect to a vehicle brake mechanism,

one end of the housing closed by a first inner wall member having a central opening therethrough,

the other end of said housing closed by an outer wall member,

a movable wall within said housing with the outer face thereof next the outer wall member of said housing,

a rod connected at one end thereof centrally of said movable wall, extending inwardly of the latter and having a sliding fit through the first inner wall member central opening,

an air inlet into said housing between the first inner wall member and the inner face of the movable wall, whereby to permit a pressurization of a movable wall pressurization chamber defined between said movable wall and the first inner wall member,

an air brake chamber inboard of said housing with the first inner wall member of the housing constituting at least in part one of a pair of members defining said air brake chamber therebetween and having continuous, opposed, circumferential flanges thereon;

a pair of diaphragms peripherally engaged by said chamber defining member flanges,

a first pressurized fluid input into the space between the outboard one of said diaphragms and the first inner wall member,

a second pressurized fluid input between the two diaphragms,

a brake operating push rod operably connected with the inboard diaphragm on the side thereof inboard of the chamber moving in and out corresponding to the action of the inboard diaphragm,

a diaphragm return spring within the non-pressurized inboard segment of the chamber,

the operable connection of the push rod with the inboard diaphragm comprising a circular diaphragm abutment plate, said plate arcuate outboard in transverse section and having a circumferential spring retainer groove formed in the inboard face thereof, and a second inner wall member constituting the other wall of the chamber and means on the outboard face of the second inner wall member adapted to contact the peripheral inboard face of the diaphragm abutment plate before same contacts the second inner wall member as the inboard diaphragm moves inwardly to operate the brake, wherein the improvement comprises a clamp band removably and substantially circumferentially gripping the flanges of the members defining the chamber and the peripheries of the diaphragms therebetween, and

a diaphragm retainer ring encircling the peripheries of said diaphragms, said ring of width at least equal to the thickness of the two diaphragms when the latter are clamped between said flanges, said ring positioned inboard of the clamp band and outboard of the diaphragms and flanges.

* * * * *