



(51) International Patent Classification:

H04N 21/4402 (2011.01) *H04N 21/442* (2011.01)
H04N 21/845 (2011.01) *H04N 21/438* (2011.01)

(21) International Application Number:

PCT/US2017/037234

(22) International Filing Date:

13 June 2017 (13.06.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/349,623 13 June 2016 (13.06.2016) US
15/621,467 13 June 2017 (13.06.2017) US

(71) Applicant: **ARRIS ENTERPRISES LLC** [US/US]; 3871 Lakefield Drive, Suwanee, Georgia 30024 (US).

(72) Inventors: **SCHMIDT, Mark S.**; 3285 Welmer Place, San Diego, California 92122 (US). **FRANKS, William P.**; 13295 Capstone Drive, San Diego, California 92130 (US). **MORONEY, Paul**; 5360 Chelsea Street, La Jolla, California 92037 (US).

(74) Agent: **WARD, Thomas A.** et al.; 3871 Lakefield Drive, Suwanee, Georgia 30024 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: REDUCTION OF STARTUP TIME IN REMOTE HLS CLIENTS

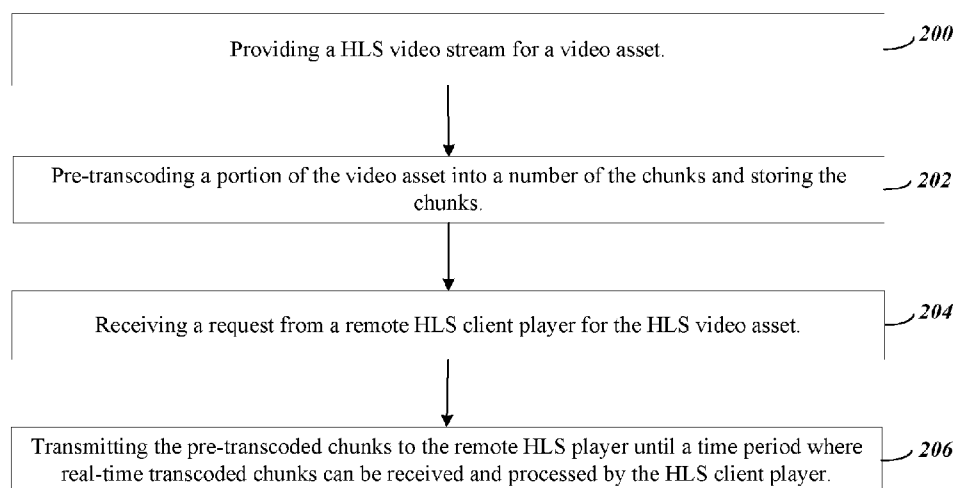


FIG. 2

(57) Abstract: A method is provided for streaming transcoded HLS video from a video asset to allow a minimum startup delay time. A method includes pre-transcoding a first number of the HLS chunks. Then, once a request is received from a remote HLS client for the HLS video asset, transmitting a number of the pre-transcoded chunks to the remote HLS player. The pre-transcoded chunks are transmitted during a startup period until real-time transcoded chunks can be received and processed by the remote HLS player at a time position to allow seamless transition from the pre-transcoded chunks.

Published:

— *with international search report (Art. 21(3))*

REDUCTION OF STARTUP TIME IN REMOTE HLS CLIENTS

CROSS REFERENCE TO RELATED APPLICATION

[0001] This Application claims priority under 35 U.S.C. §119(e) from earlier filed United States Provisional Application Serial No. 62/349,623 filed on June 13, 2016 and incorporated herein by reference in its entirety.

BACKGROUNDTECHNICAL FIELD

[0002] The present invention relates to transcoding of streaming video using the HTTP Live Streaming (HLS) protocol. More specifically, the present invention relates to transmission of transcoded HLS chunks to enable startup of the video with limited buffer delays.

RELATED ART

[0003] Conventional Set Top Boxes (STB) can provide delivery of transcoded Digital Video Recorder (DVR) content to tablets and phones remotely over the Internet using the HTTP Live Streaming (HLS) protocol. The STB transcodes the DVR content in real-time at the tablet or phone client's request but at bitrates that conform to the available channel bandwidth of the client. All of the content cannot be transcoded ahead of time or faster than real-time. Playback begins at the client once transcoding of initial chunks is done, and the timing for this is based on the channel characteristics and how quickly the client can receive, buffer and begin playback the HLS chunks. As a consequence of real-time transcoding and the buffer management that client tablets and phones incorporate, it can take multiple seconds for the

playback to begin. For example, an Apple iOS client typically waits until it has downloaded at least 2 secs of content and sees that at least 2 seconds more have been created and advertised by the server before it will begin playback, resulting in a minimum 4 second play startup time. This also allows for only a minimum 2 second Audio/Visual (A/V) buffer in the client to handle network variations.

[0004] It is desirable to have a larger buffer of A/V content in the client before playback begins in order to allow continued playback when channel conditions degrade and chunk downloads slow down. This can be accomplished by using longer chunk durations such as 3 or 4 secs. However, due to the iOS startup conditions described above, this lengthens the minimum startup of playback on the client to 6 to 8 secs, respectively. It is desirable to decrease the startup time for better user experience while allowing for larger network buffering.

SUMMARY

[0005] Embodiments of the present invention provide for a decreased startup time for remote HLS playback by pre-transcoding a number of HLS chunks for every DVR video asset recorded on the DVR and then serving some number of these pre-transcoded chunks immediately when the remote HLS client makes a request for that video asset. During this startup time, the transcoder is configured to begin real-time transcoding at a later position in the video asset that allows for seamless transition from the initial pre-transcoded chunks provided to the player.

[0006] Embodiments of the present invention provide a method for streaming transcoded HLS video to allow a minimum startup delay time. The method includes pre-transcoding a first number of the HLS chunks to allow transmission beginning at least at a first low bitrate. Then,

once a request is received from a remote HLS client for the HLS video asset, transmitting a number of the pre-transcoded chunks to the remote HLS player. The pre-transcoded chunks are transmitted during a startup time until real-time transcoded chunks can be received and processed by the remote HLS player at a time position to allow seamless transition from the pre-transcoded chunks provided to the remote HLS player.

[0007] In some embodiments, the chunks needed to initialize the player can be created in the background when the DVR has a spare transcoder available. Current DVRs can have up to four real-time simultaneous transcoders. Background pre-transcoded startup chunks can be prepared for transmission at a second or third higher bitrate to allow the DVR to send increasing bitrate chunks at higher video quality if it determines the channel bandwidth supports it.

[0008] In other embodiments, the bitrate of pre-transcoded chunks are ramped up for a smooth transition to the channel bandwidth. A current adaptive bitrate transcoding algorithm in a DVR starts up at a low bit rate, e.g., 300 kbps, since the channel bandwidth is unknown, and ramps up the video bitrate to support channel bandwidths of increasingly higher bitrates. For embodiments of the present invention, a similar startup bitrate that ramps up can be used for the pre-transcoded chunks to allow a receiving HLS player to download the chunks more efficiently to reach a maximum bitrate over the remote Internet connection.

[0009] A further embodiment of the present invention entails transcoding each DVR asset's startup chunks from any bookmarked timestamp that the client has created rather than just at the beginning of the video asset. The client can create the timestamps in partial playback sessions. The timestamps allow the client to start from the bookmark position and achieve

shorter playback starts with better blending from pre-transcoded chunks than currently encountered.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Further details of the present invention are explained with the help of the attached drawings in which:

[0011] Fig. 1 is a block diagram of a system for implementing embodiments of the present invention, including a DVR with transcoders that transmit streaming HLS chunks for video assets to components like tablets and cell phones;

[0012] Fig. 2 shows a flow chart for a method of pre-transcoding a number of HLS chunks for a streaming video asset that are transmitted at start up to allow a seamless transition to real-time transcoded chunks according to embodiments of the present invention;

[0013] Fig. 3 shows a flow chart illustrating an alternative embodiment with ramping up of a pre-transcoding bitrate from a low bitrate to a high bitrate for a better smooth transition to the channel bandwidth; and

[0014] Fig. 4 shows a flow chart illustrating designated timestamps provided in the video asset where pre-transcoding of chunks can occur other than at the beginning of the asset.

DETAILED DESCRIPTION

[0015] Fig. 1 is a block diagram of a system for implementing embodiments of the present invention. The system includes a set top box (STB) that includes a DVR 100. The STB and DVR 100 has the capability of streaming the recorded video assets of the DVR. The video assets are transcoded in transcoders 102 in the DVR 100 and streamed in HLS chunks to

external devices such as a cell phone 106 or a tablet 108. The DVR can include four or more transcoders 102 that can act independently to each transcode video from a different video asset, or act together to transcode video from a single asset.

[0016] Embodiments of the present invention provide for pre-transcoding a number of chunks of a video asset using the transcoders 102 to enable more efficient startup of playback of a video asset. The pre-transcoding can be performed for each video asset and stored in memory 104. The transcoders 102 can pre-transcode video for transmission at several different rates, or at rates that can be ramped up to make a smooth transition from pre-transcoded video chunks to real time transcoded chunks for the remainder of the video asset that are transmitted to devices such as cell phone 106 or tablet 108.

[0017] Although not specifically shown, the STB 100 further includes at least one processor and at least one memory for storing code that is executable by the processor to enable the STB 100 to perform processes according to embodiments of the present invention that are described subsequently. The STB 100 further includes an interface for transmission of the streaming HLS video assets, and the memory further stores code to enable the processor to control the interface to enable such transmission as well as to control the transcoders 102 and storage of pre-transcoded video in memory 104.

[0018] Fig. 2 shows a flow chart for one embodiment of pre-transcoding a number of HLS chunks for a streaming video asset that are transmitted at start up to allow a seamless transition from pre-transcoded chunks to real-time transcoded chunks. To start in step 200 a portion of the DVR recorded source video asset is read from memory and provided as input to a transcoder or multiple transcoders. In a subsequent step 202, one or more of the transcoders 102 are used to pre-transcode the portion of the DVR asset to a number of the chunks. The pre-

transcoded chunks are then stored back on the DVR and associated with the original source DVR asset. This pre-transcoding operation can be performed when transcoder resources are available, for example, not currently being used for live streaming sessions for mobile streaming clients.

[0019] In a next step 204 a request for the video asset is received from a remote HLS client player, such as the cell phone 106 or tablet 108. In step 206 at least a portion of the pre-transcoded chunks are transmitted to the HLS client player in response to the request. The pre-transcoded chunks are transmitted during a startup procedure until a period where real-time transcoded chunks making up the remainder of the asset can be received and processed by the HLS client player. In step 206, all of the pre-transcoded chunks can be transmitted, or a number of chunks less than all of the pre-transcoded chunks can be transmitted before the real-time transcoded chunks are transmitted to enable a smooth transition to the real-time transcoded chunks. With a higher bandwidth of the receiving device, all of the pre-transcoded chunks might be transmitted, while with a lower bandwidth only a portion of the pre-transcoded chunks will be needed before transition to the real-time transcoded chunks.

[0020] Fig. 3 shows an alternative to the embodiment of Fig. 2, with the transmission bitrate of the pre-transcoded chunks ramping up from a low bitrate to a high bitrate for a better smooth transmission to the channel bandwidth for the receiving device. As with the method of Fig. 2, Fig. 3 begins with the step 300 of providing an HLS video asset for streaming that is subsequently pre-transcoded and divided into chunks.

[0021] Fig. 3 differs from the method of Fig. 2 beginning in step 302. Step 302 differs by using the transcoders to pre-transcode the portion of the DVR source video asset into chunks for transmission at more than one bitrate. In one embodiment chunks can be pre-transcoded for

transmission at a predetermined number of bitrates, such as two or three. The chunks can also be pre-transcoded for transmission at a continuously variable bitrate that ramps up from an initial low bitrate to a higher bitrate that matches the channel bitrate of the receiving device. Alternatively, the pre-transcoded chunks can be transmitted and ramped up in bitrate to a rate just below the maximum channel bitrate, where the final channel bitrate will then be provided for the real-time transcoded chunks that are subsequently transmitted.

[0022] The channel bitrate or equivalently, the available channel bandwidth, can be measured by the STB server during the client's download of the first and following pre-transcoded chunks or it can be provided from the receiving device after transmission of some of the pre-transcoded chunks. Alternatively, the channel bitrate for the receiving device can be known in advance at the transmitting STB. Because the receiving bitrate of the receiving device may not be identified until after startup transmission of the pre-transcoded chunks, the variable rate beginning with a low bitrate will enable the transmission bitrate to not surpass the bitrate of receiving device.

[0023] In a next step 304 a request for the asset is received from a remote HLS client player, such as the cell phone 106 or tablet 108. In step 306 at least a portion of the pre-transcoded chunks are transmitted to the HLS client player in response to the request. As indicated with respect to step 302, the pre-transcoded chunks are transmitted to the remote HLS player at a bitrate ramped up from initial low bitrate to a higher bitrate. The high bitrate can be set to a value just below the maximum channel bitrate for the receiving asset. Alternatively, the high bitrate can be set to match the maximum channel bitrate. The bitrate may be ramped up in steps, or ramped up continuously. In step 306, the real-time transcoded chunks are

subsequently transmitted to the requesting HLS player, allowing a smooth transition from the pre-transcoded chunks for the remainder of the video asset.

[0024] Fig. 4 provides a flow chart illustrating another alternative embodiment of the present invention differing from Figs. 2 and 3 where designated timestamps are provided in the video asset where pre-transcoding of chunks can occur other than at the beginning of the asset. As with the method of Figs. 2 and 3, Fig. 4 begins with the step 400 of providing an HLS video asset for streaming that is divided into chunks.

[0025] Fig. 4 differs beginning at step 402. Step 402 differs by providing one or more timestamps at a point in the chunks allowing pre-transcoding to begin at the timestamps. With a timestamp, a designated portion of the video can be transcoded rather than starting transcoding from the beginning. The one or more timestamps can be included in the video asset by the DVR upon recording to enable transcoding only of designated segments. The timestamps can alternatively be designated at one or more points in the video asset by the requesting video player.

[0026] In a next step 404 a request for the asset chunks beginning at a timestamp is received from a remote HLS client player. In step 406 the pre-transcoded chunks are transmitted to the HLS client player beginning at the timestamp in response to the request. The real-time transcoded chunks are subsequently transmitted to the requesting HLS player, allowing a smooth transition from the pre-transcoded chunks.

[0027] In one example, an iOS Server and an HLS Player are provided and the server provides to the HLS Player a live, sliding-window manifest that initially contains 3 segments. The player will download all 3 segments as fast as the network supports and begins playback after at least 2 seconds of content has been successfully downloaded, given the network

bandwidth is higher than the chunk bitrate by a scale factor of typically 3x. The player will then request the next manifest at the HLS target duration which can be set to the chunk duration in seconds.

[0028] So for example, it is expected that a conventional sliding-window manifest advertising three chunks, e.g., 2 second chunks at 300 kbps over a network that supports approximately 900 kbps bandwidth, could allow a startup time of just $(300\text{kbps}/900\text{kbps}) \times 2 \text{ sec} = 667 \text{ msec}$ s. The download of all 3 chunks would require 2 secs and in that time the player would acquire 6 secs of content and have been playing for 1.33 secs to have a buffer of 4.67 seconds that would reach a minimum of $4.67 - 2$ seconds over the next live chunk production duration. Conversely, the implementation of the present invention embodiments of advertising each chunk as it is produced in real-time would have a minimum startup time of 4 seconds (2 chunks available with one fully downloaded) while building a buffer of minimum 2 seconds in depth. So the benefits of the method according to embodiments of the present invention are shorter startup but with potentially larger buffers.

[0029] In another example for the reduction of startup time for remote HLS, the method described for embodiments of the present invention is accomplished by the following five steps.

[0030] In a first step 1, for every DVR asset on the STB, the STB will pre-transcode T_{startup} seconds from the start and/or bookmarked position of the content to a low video bitrate and resolution, e.g., 236 kbps AVC at 384x216 plus HE-AAC stereo audio at 64 kbps. Additionally, the STB will pre-transcode the same T_{startup} seconds of content to higher video bitrates, e.g., 448x232 at 336 kbps, 512x288 at 436 kbps, etc. when background CPU/transcoder resources and disk space permit. For each transcoded asset, the STB will save

transcoder state metadata to facilitate the restarting of any future live transcode session at the point T_{startup} seconds into the source file in a seamless or near seamless manner.

[0031] In a second step 2, the STB will create HLS chunk files of duration T_{chunk} seconds from the T_{startup} seconds of transcoded content.

[0032] In a third step 3, When an asset is requested by a remote HLS client, the STB server will create a manifest consisting of N chunks created from the T_{startup} seconds of content at the lowest bitrate. N might typically be 3 and T_{chunk} could typically be 2 or 3 seconds. The transcoder of the STB will be reconfigured to start transcoding the remainder of the asset in real-time from T_{startup} position using the stored state metadata.

[0033] In a fourth step 4, the as the player downloads the N chunks, the server measures the download bandwidth achieved and may advertise, at the next HLS target duration interval, a manifest with a new chunk at a higher bitrate from the T_{startup} seconds of pre-transcoded content, if the bandwidth will support it.

[0034] In a fifth step 5, when the T_{startup} duration has been achieved, the live transcoded output begins to be accumulated for creation of future chunks. The last bandwidth measured by the server to the player is used to dynamically configure the live transcoder video bitrate. New chunks will be created from the real-time transcoder output operating on the remainder of the STB DVR content.

[0035] In summary, the embodiments of the present invention provide a significant time savings for startup of streaming HLS video. The current (prior) solution to remote HLS startup entailed transcoding the content in real-time from the desired start location (bookmark or start of asset) and creating and advertising a manifest with one chunk when the first chunk had been created. Typically, the time to startup up the transcoder and produce the first chunk was longer

than T_{chunk} by a few hundred milliseconds. To create a second chunk required exactly T_{chunk} seconds. The total startup time in this prior solution exceeded the chunk duration by hundreds of milliseconds. Embodiments of the present invention will reduce that startup contingent on the network bandwidth available to the client.

[0036] Although the present invention has been described above with particularity, this was merely to teach one of ordinary skill in the art how to make and use the invention. Many additional modifications will fall within the scope of the invention as that scope is defined by the following claims.

CLAIMS

What Is Claimed:

1. A method of streaming video comprising:
providing a portion of a recorded video asset to a transcoder or transcoders;
pre-transcoding the portion of the video asset into a number of the chunks and storing the chunks to allow transmission beginning at least at a first low bitrate;
receiving a request from a remote HLS client for the HLS video asset; and
transmitting at least a portion of the stored pre-transcoded chunks to the remote HLS until at least a time period when real-time transcoded chunks are provided to the remote HLS client.
2. The method of claim 1, further comprising:
pre-transcoding the chunks at multiple increasing bitrates;
transmitting at least a first one of the pre-transcoded chunks at said first low bitrate;
measuring a bandwidth available to the remote HLS player; and
transmitting subsequent ones of the pre-transcoded chunks at a higher bitrate until a startup time has ended for the transmission of the pre-transcoded chunks.
3. The method of claim 2, wherein the higher bitrate is chosen to be less than an available bandwidth receivable by the remote player by a predetermined margin.

4. The method of claim 2, wherein the higher bitrate is chosen to match the bandwidth of the remote player.
5. The method of claim 2, wherein the higher bitrate includes two or more higher bitrates.
6. The method of claim 2, wherein the higher bitrate includes continually increasing bitrates.
7. The method of claim 1, wherein the pre-transcoding of the chunks begins at a bookmarked timestamp.
8. The method of claim 1, further comprising during a startup time when the pre-transcoded chunks are transmitted, beginning transcoding and transmission of the remaining chunks at a time position to allow seamless transition from the pre-transcoded chunks provided to the remote HLS player.
9. The method of claim 8,
wherein the pre-transcoded chunks include a first number of chunks of the video asset,
and the real-time transcoded chunks include chunks after the first number of chunks of the video asset,
wherein the real-time transcoding begins at the time of transmission of the pre-transcoded chunks, and

wherein the transmission of the real-time transcoding begins after a predetermined number of pre-transcoded chunks are transmitted.

10. The method of claim 9, wherein all of the first number of pre-transcoded chunks are transmitted before the real-time transmitted chunks are transmitted.

11. The method of claim 9, wherein not all of the first number of pre-transcoded chunks are transmitted before the real-time transmitted chunks are transmitted.

12. A Digital Video Recorder (DVR) for streaming HLS video to at least one remote HLS device, the DVR comprising:

an interface for transmitting the streaming HLS video to the remote HLS;

a processor connected to control the interface;

a memory storing processor executable code to cause the processor to provide the HLS video stream through the interface and to perform the following steps:

provide a portion of a recorded video asset to a transcoder or transcoders;

pre-transcode the portion of the recorded asset into a number of the chunks and storing these chunks in the memory to allow transmission beginning at least at a first low bitrate;

receive a request from the remote HLS client through the interface for the HLS video asset; and

transmit at least a portion of the stored pre-transcoded chunks to the remote HLS through the interface until at least a time period when real-time transcoded chunks are provided to the remote HLS client.

13. The DVR of claim 12, wherein the memory stores processor executable code to cause the processor to perform the following additional steps:

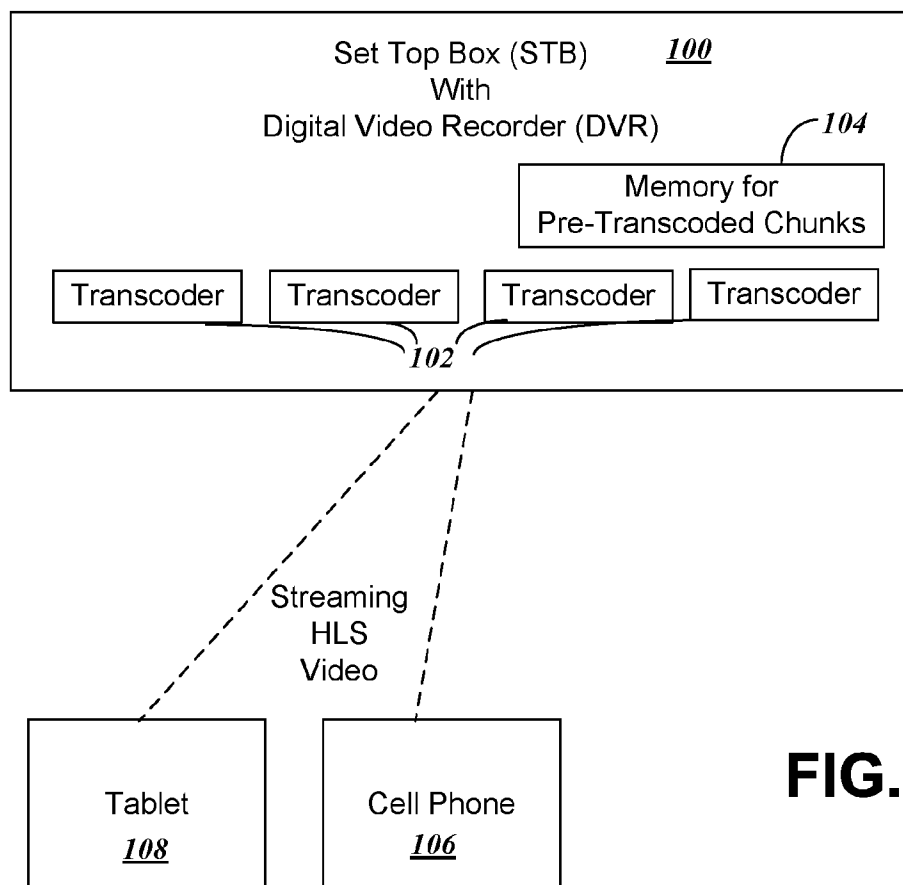
pre-transcode the chunks at multiple increasing bitrates;
transmit at least a first one of the pre-transcoded chunks through the interface at said first low bitrate;
measure a bandwidth available to the remote HLS player; and
transmit subsequent ones of the pre-transcoded chunks through the interface at a higher bitrate until a startup time has ended for the transmission of the pre-transcoded chunks.

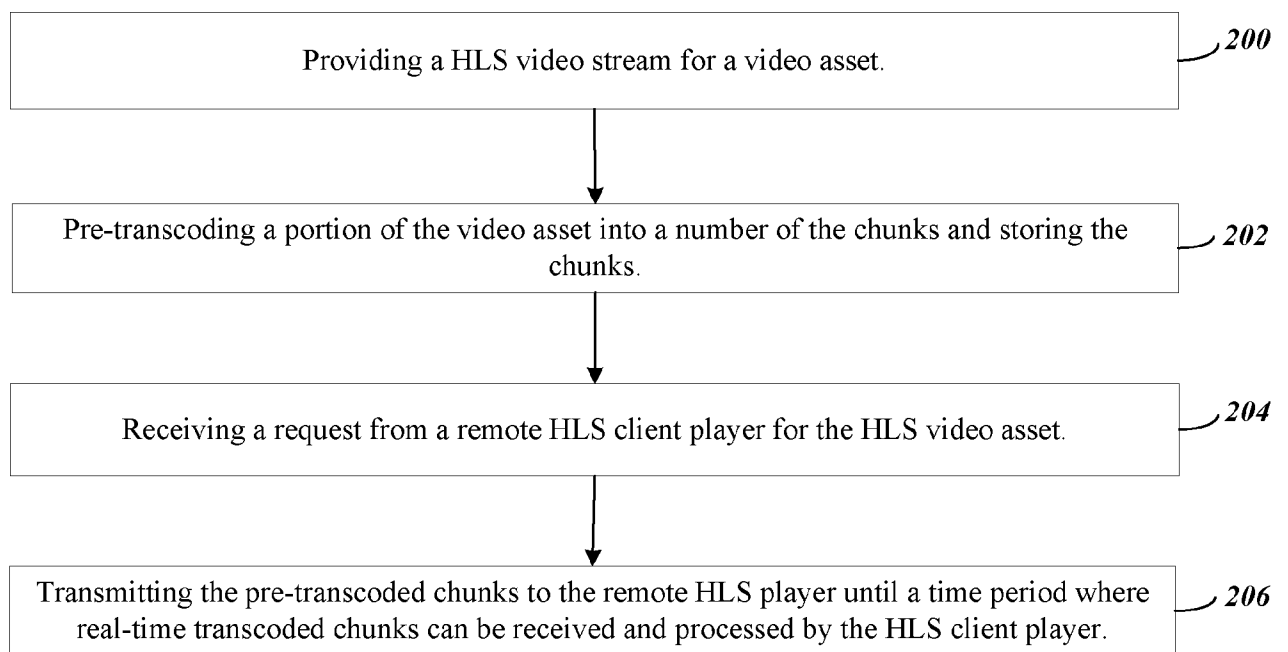
14. The DVR of claim 12, wherein the memory stores processor executable code to cause the processor during a startup time when the pre-transcoded chunks are transmitted, to begin transcoding and transmission of the remaining chunks through the interface at a time position to allow seamless transition from the pre-transcoded chunks provided to the remote HLS player.

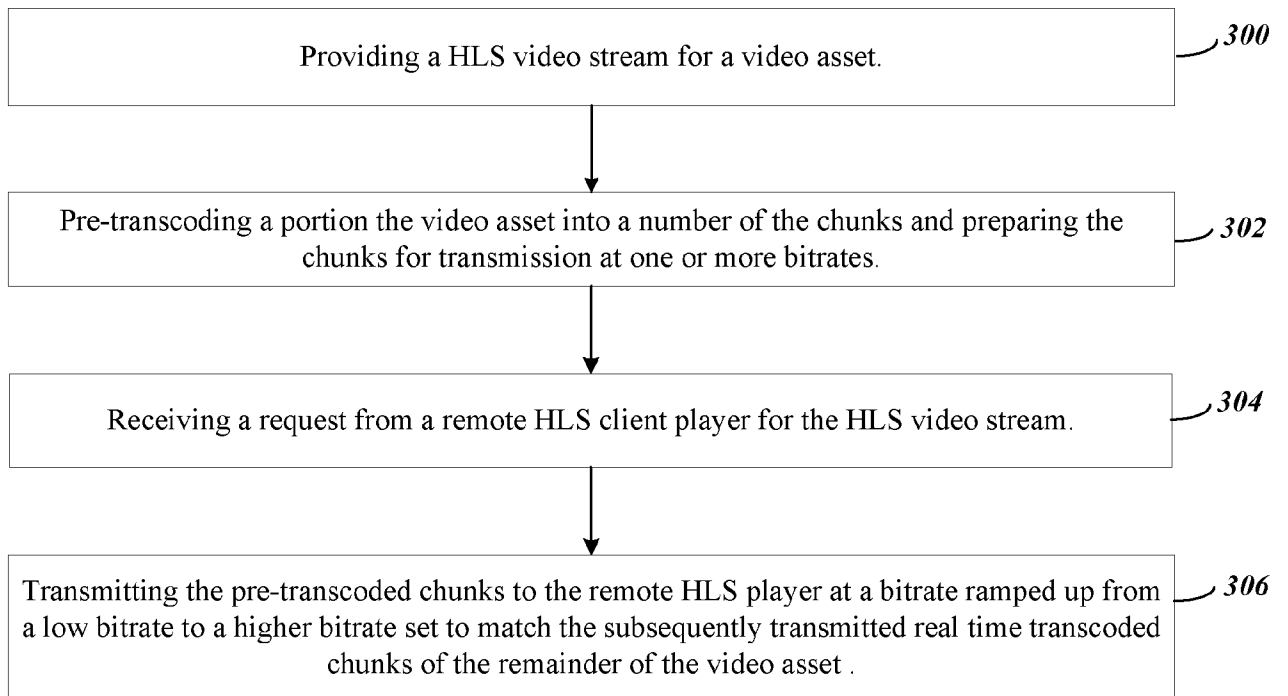
15. The DVR of claim 14,
wherein the pre-transcoded chunks include a first number of chunks of the video asset, and the real-time transcoded chunks include chunks after the first number of chunks of the video asset,

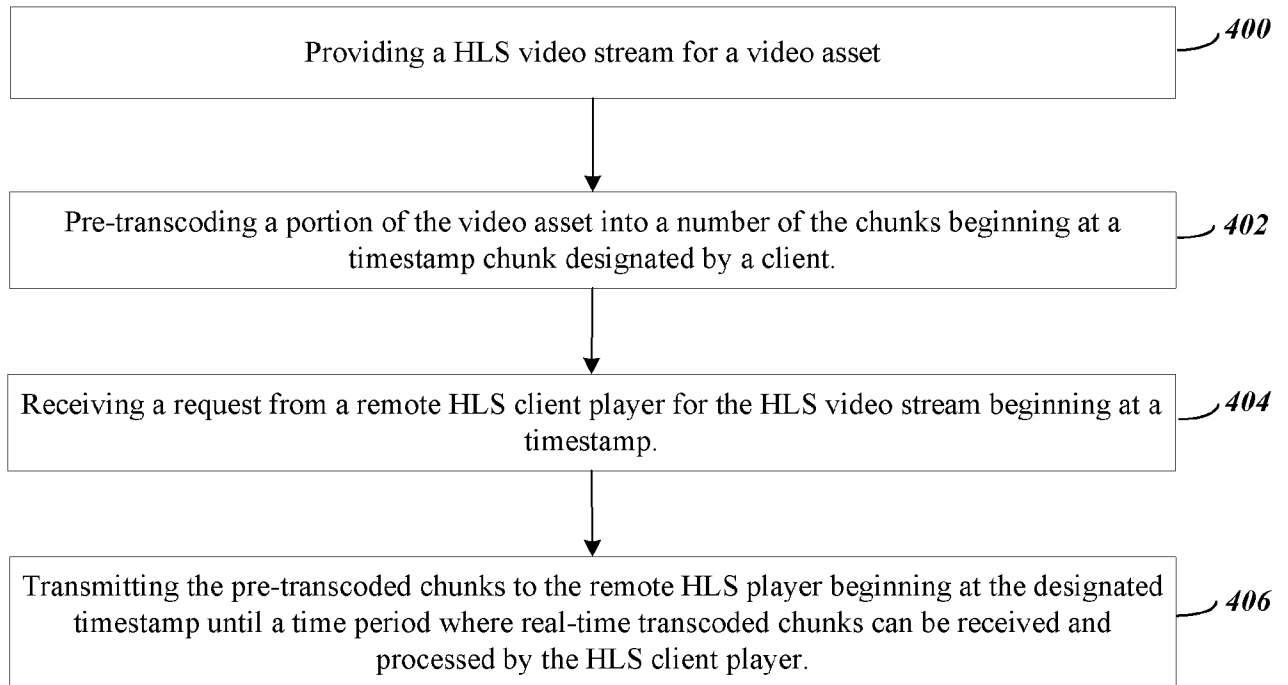
wherein the real-time transcoding begins at the time of transmission of the pre-transcoded chunks, and

wherein the transmission of the real-time transcoding begins after a predetermined number of pre-transcoded chunks are transmitted.

**FIG. 1**

**FIG. 2**

**FIG. 3**

**FIG. 4**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/037234

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04N21/4402 H04N21/845 H04N21/442 H04N21/438
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/164482 A1 (LOSEV EUGENE [CA] ET AL) 12 June 2014 (2014-06-12)	1,7-12,
Y	figures 1, 7-9	14,15
	paragraphs [0004], [0031], [0035], [0043], [0054]	2-6,13
	paragraph [0060] - paragraph [0084]	

Y	US 2015/089023 A1 (PHILLIPS CHRIS [US] ET AL) 26 March 2015 (2015-03-26)	2-6,13
	figures 1, 4, 10	
	paragraph [0026] - paragraph [0030]	
	paragraph [0037] - paragraph [0040]	
	paragraph [0045] - paragraph [0047]	

	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 July 2017

Date of mailing of the international search report

01/08/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Döttling, Martin

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/037234

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/337903 A1 (ZHU HONGTAO [US] ET AL) 13 November 2014 (2014-11-13)	1,12
Y	figures 1-3, 5, 6 paragraph [0016] - paragraph [0019] paragraph [0024] - paragraph [0035] -----	2,13
A	KIM KEUNSOO ET AL: "Server side, play buffer based quality control for adaptive media streaming", MULTIMEDIA TOOLS AND APPLICATIONS, KLUWER ACADEMIC PUBLISHERS, BOSTON, US, vol. 75, no. 10, 4 March 2015 (2015-03-04) , pages 5397-5415, XP035924454, ISSN: 1380-7501, DOI: 10.1007/S11042-015-2509-5 [retrieved on 2015-03-04] abstract sections 4, 5.5, 6.1 -----	1,2,12, 13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/037234

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014164482 A1	12-06-2014	US 2014164482 A1	12-06-2014
		US 2014164483 A1	12-06-2014
		US 2014165120 A1	12-06-2014

US 2015089023 A1	26-03-2015	CA 2925364 A1	02-04-2015
		CN 105814900 A	27-07-2016
		EP 3050307 A1	03-08-2016
		US 2015089023 A1	26-03-2015
		WO 2015044870 A1	02-04-2015

US 2014337903 A1	13-11-2014	US 2014337903 A1	13-11-2014
		US 2016192030 A1	30-06-2016
