




(86) Date de dépôt PCT/PCT Filing Date: 2003/10/31
(87) Date publication PCT/PCT Publication Date: 2004/05/13
(45) Date de délivrance/Issue Date: 2011/08/30
(85) Entrée phase nationale/National Entry: 2005/04/26
(86) N° demande PCT/PCT Application No.: NL 2003/000751
(87) N° publication PCT/PCT Publication No.: 2004/039676
(30) Priorité/Priority: 2002/10/31 (NL1021798)

(51) Cl.Int./Int.Cl. *B65B 13/02* (2006.01)
(72) Inventeur/Inventor:
VAN DE SANDE, MARINUS LAMBERTUS
WILHELMUS, NL
(73) Propriétaire/Owner:
ENDRA B.V., NL
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : DISPOSITIF SERVANT A APPLIQUER AU MOINS DEUX FEUILLARDS AUTOUR D'UN PAQUET
(54) Title: DEVICE FOR APPLYING AT LEAST TWO STRAPS AROUND A PACKET

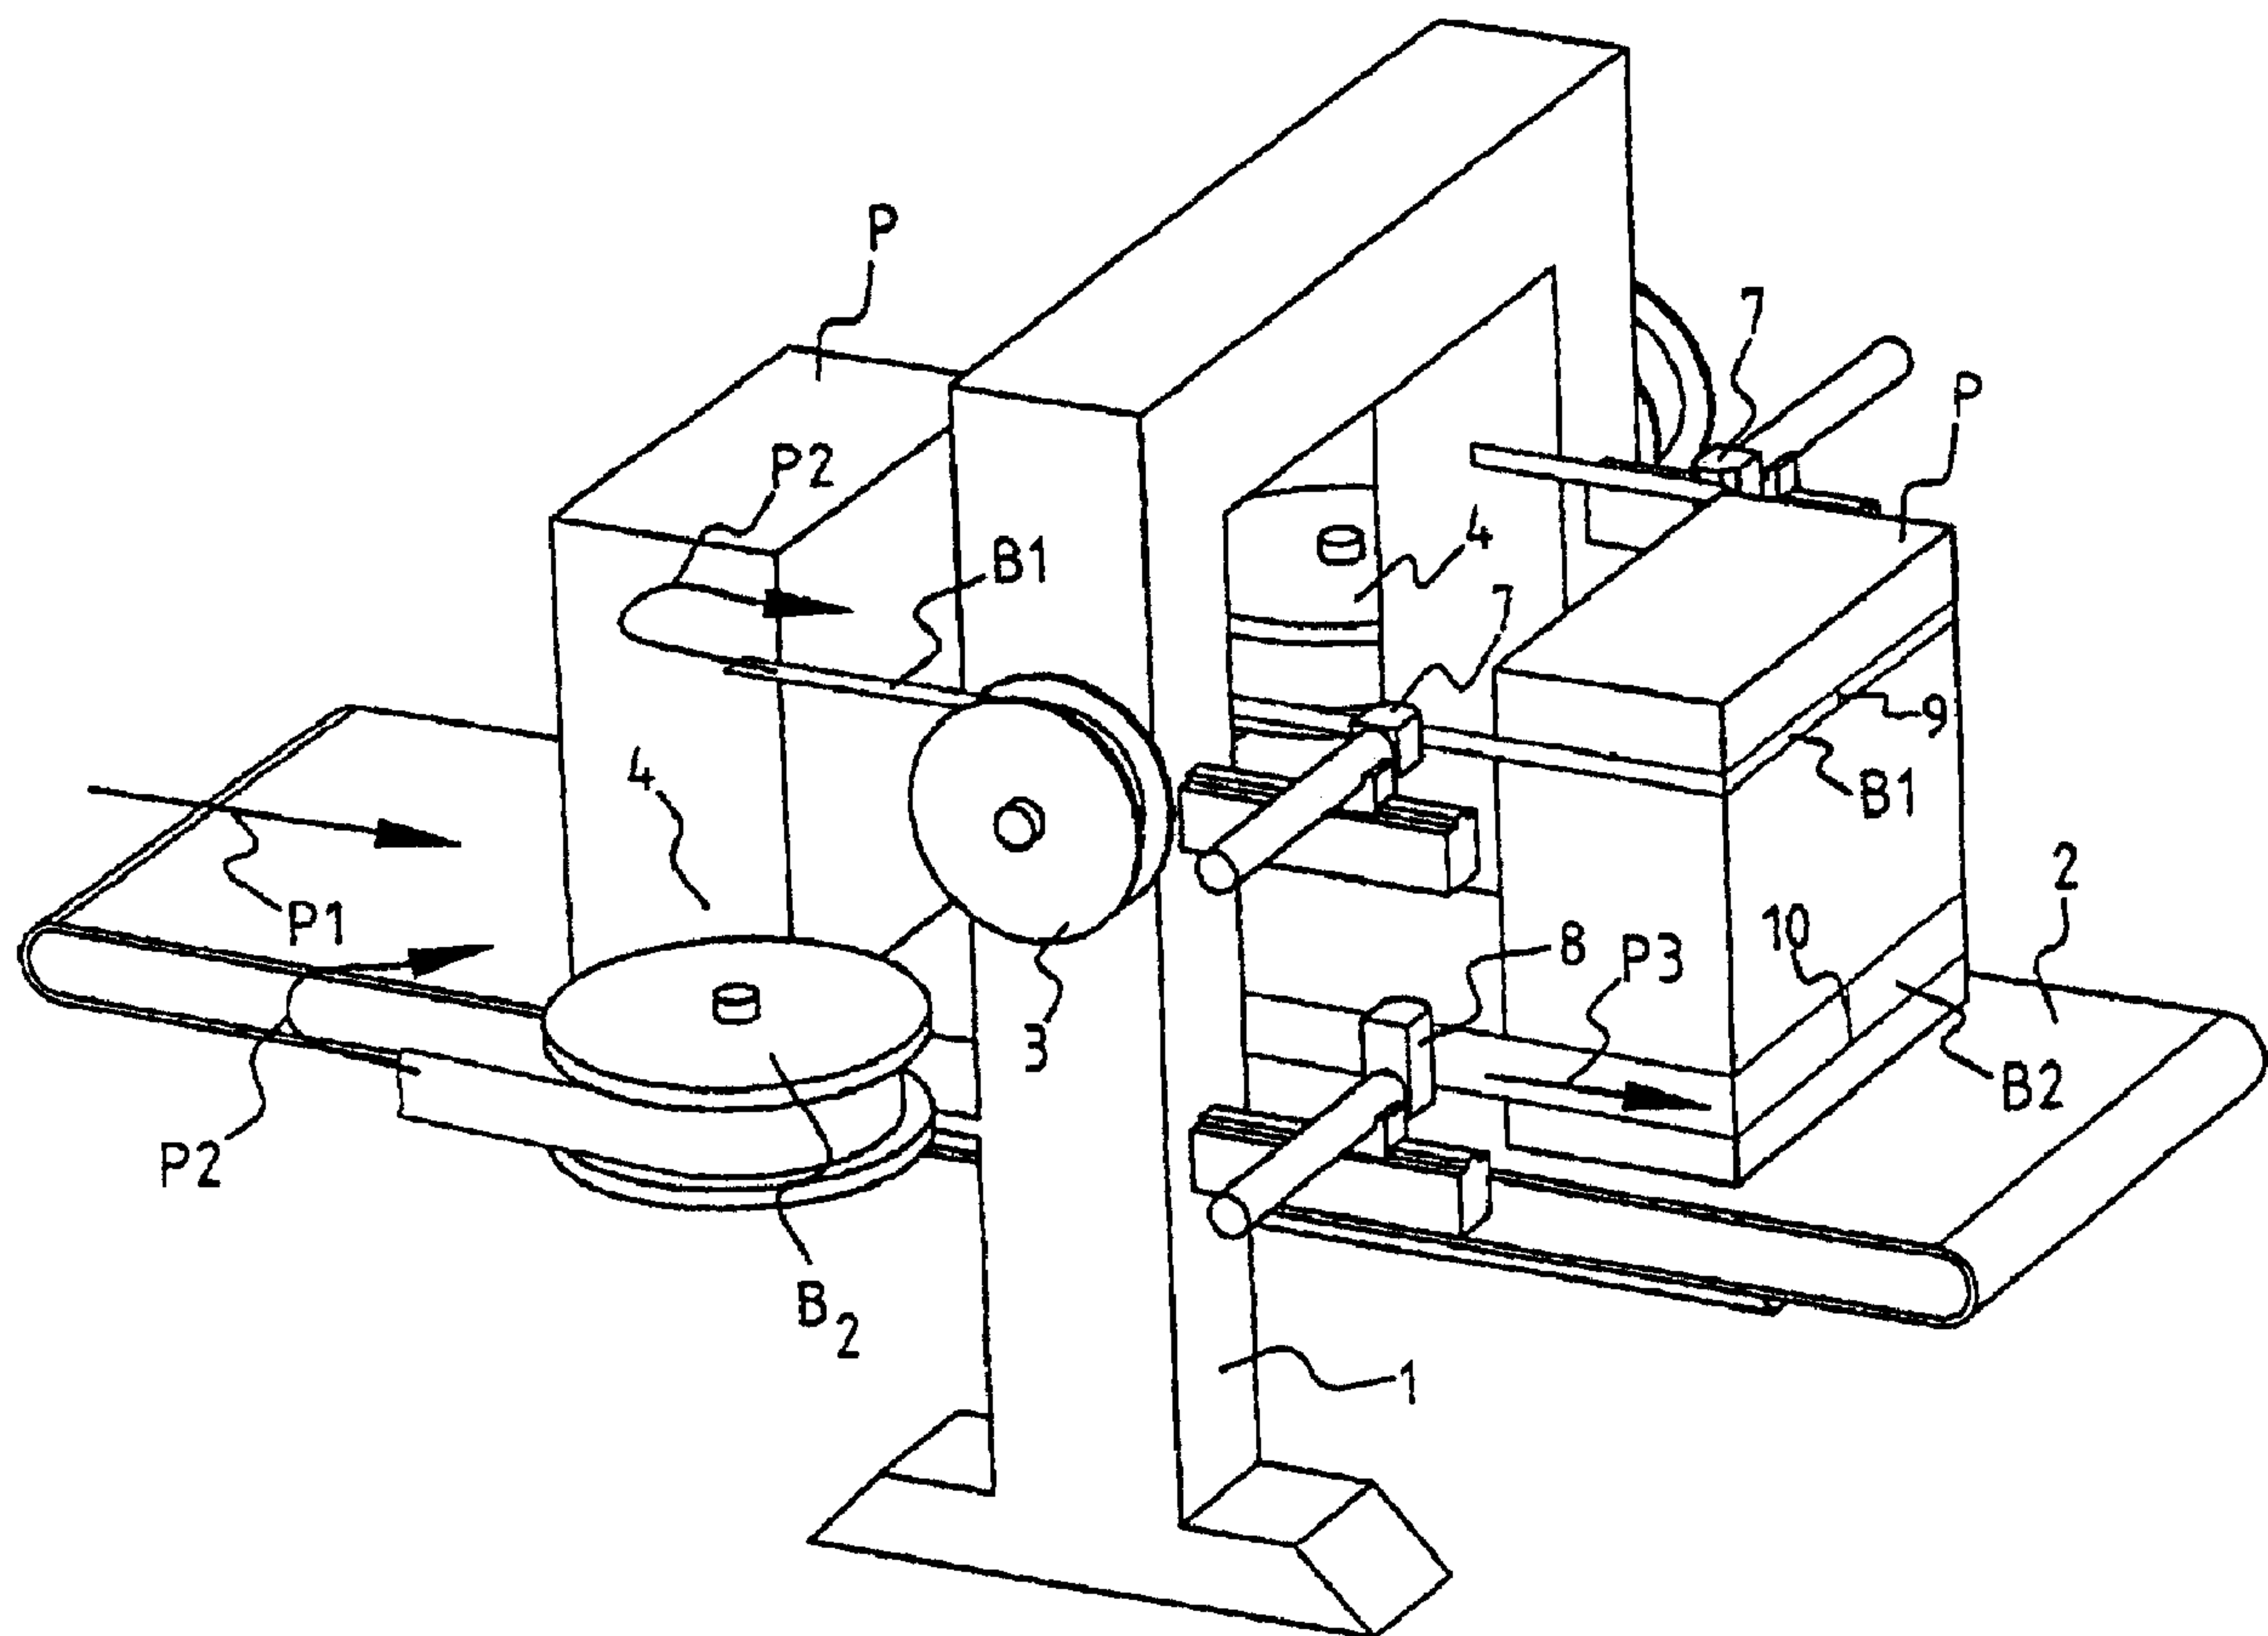

(57) Abrégé/Abstract:

Device for arranging at least two bands (B1, B2) around one or more packets (P), substantially consisting of a frame (1), a lying conveyor belt (2) supported by the frame for moving forward the packets, band clamping and guiding means which move

(57) **Abrégé(suite)/Abstract(continued):**

transversely of the conveyor belt away from and toward each other and which are connected to associated supply reels for the strapping band B1, B2), welding means (7, 8) for welding together the bands which have been moved toward each other, wherein a first group of band clamping and guiding means has a first pair of jaws (7) for a first band type, and a second group has second pair of jaws (8) for a second band type, which groups arranged one above the other. In this manner the one or more packets can be strapped with two or more band of a specific type, for instance subject to the required firmness, via one passage through the device according to the invention.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/039676 A1

(51) International Patent Classification⁷: **B65B 13/02**

(21) International Application Number:
PCT/NL2003/000751

(22) International Filing Date: 31 October 2003 (31.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1021798 31 October 2002 (31.10.2002) NL

(71) Applicant (for all designated States except US): **ENDRA B.V.** [NL/NL]; Voorste Groes 4, NL-5384 VJ Heesch (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VAN DE SANDE, Marinus, Lambertus, Wilhelmus** [NL/NL]; Vughterstraat 52C, NL-5211 's Hertogenbosch (NL).

(74) Agent: **HOORWEG, Petrus, Nicolaas;** Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Haag (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR APPLYING AT LEAST TWO STRAPS AROUND A PACKET

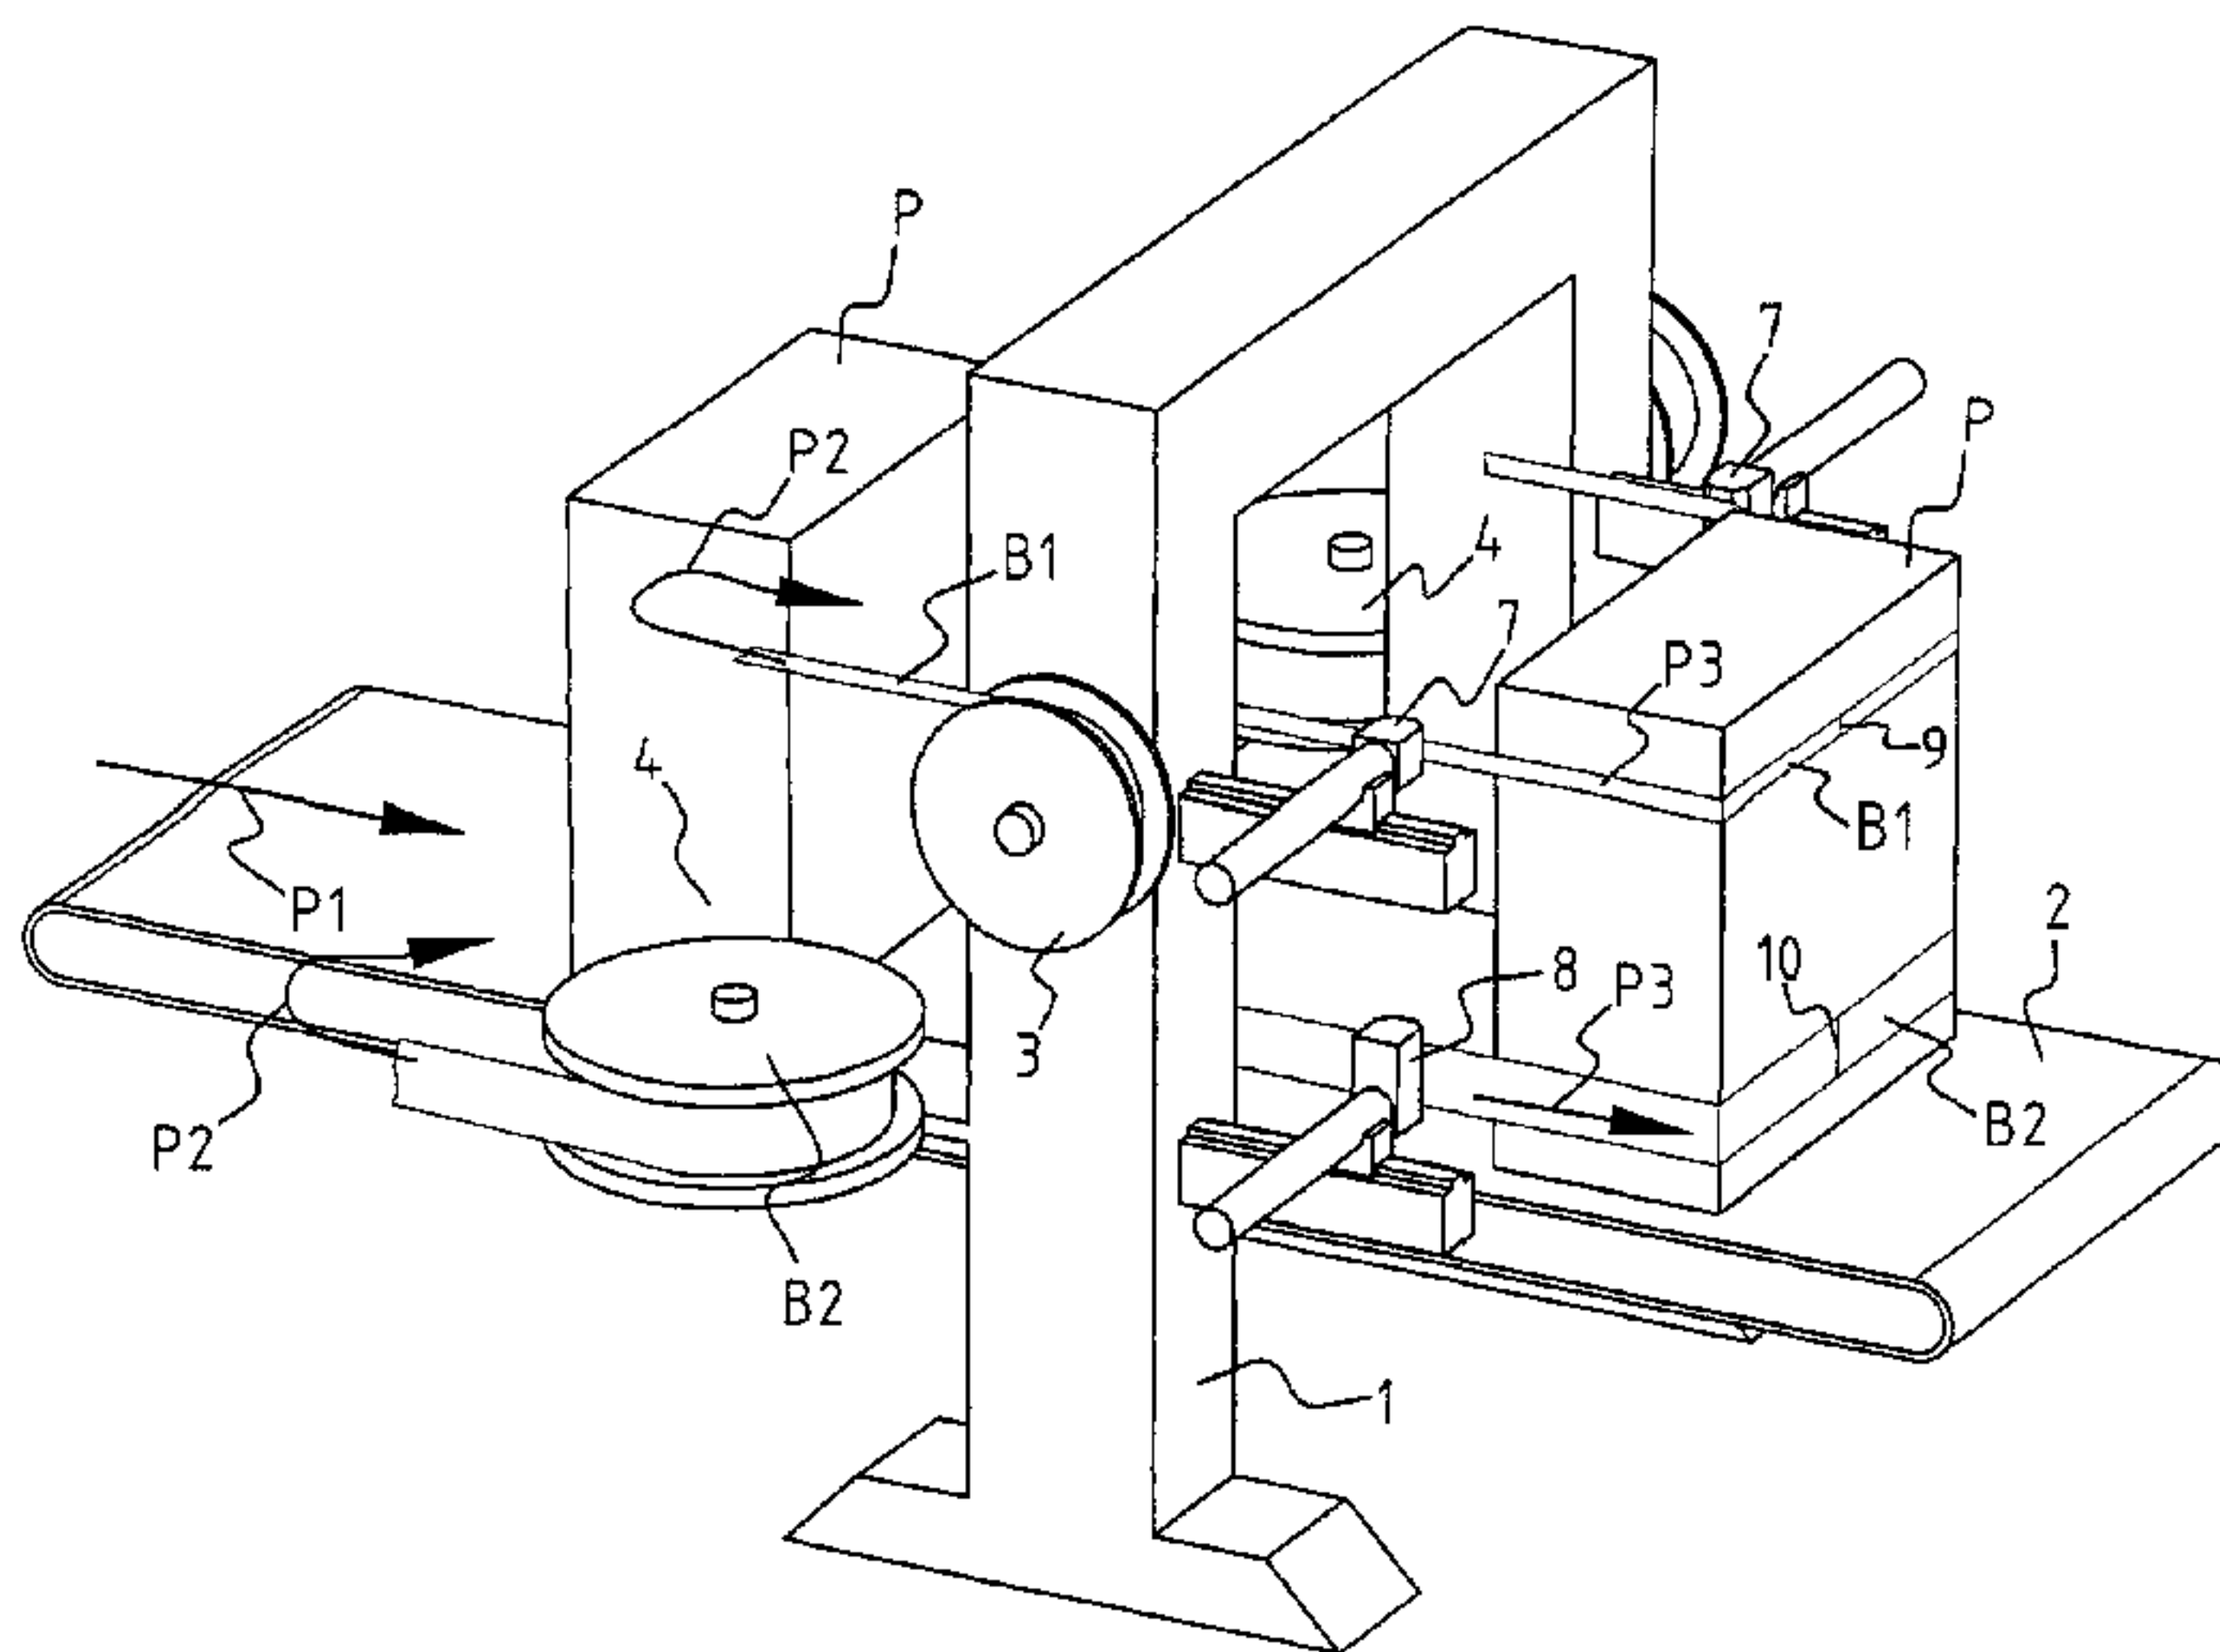

(57) Abstract: Device for arranging at least two bands (B1, B2) around one or more packets (P), substantially consisting of a frame (1), a lying conveyor belt (2) supported by the frame for moving forward the packets, band clamping and guiding means which move transversely of the conveyor belt away from and toward each other and which are connected to associated supply reels for the strapping band B1, B2), welding means (7, 8) for welding together the bands which have been moved toward each other, wherein a first group of band clamping and guiding means has a first pair of jaws (7) for a first band type, and a second group has second pair of jaws (8) for a second band type, which groups arranged one above the other. In this manner the one or more packets can be strapped with two or more band of a specific type, for instance subject to the required firmness, via one passage through the device according to the invention.

WO 2004/039676 A1

21766-1077

1

DEVICE FOR APPLYING AT LEAST TWO STRAPS AROUND A PACKET

The invention relates to a device for arranging at least
5 two bands around one or more packets, substantially
consisting of a frame, a lying conveyor belt supported by the
frame for moving forward the packets, band clamping and
guiding means which move transversely of the conveyor belt
away from and toward each other and which are connected to
10 associated supply reels for the strapping band, welding means
for welding together the bands which have been moved toward
each other.

Such devices for strapping a number of packets using a
band are for instance described in the patents NL 7314312 and
15 EP 98202234 in the name of applicant. These embodiments have
the drawback that the device is only suitable for arranging
one or more bands of the same type per passage of the one or
more packets. Particularly when high packets must be
strapped, according to the prior art the packet for strapping
20 must pass through different devices.

Some aspects of the invention provide
a device and a method whereby two or more bands, which can be of
different types, are arranged in one passage of the packets for
strapping and wherein the packet can be provided with a label.
25

For this purpose some embodiments of the invention are
distinguished by a first group of band clamping and guiding means
which has a first pair of jaws for a first band type and a second
group which has a second pair of jaws for a second band type,
30 which groups are arranged one above the other.

In this manner the one or more packets can be strapped
with two or more bands of a specific type, for instance

subject to the required firmness, via one passage through the device according to the invention.

According to a first embodiment relating to a strapping with two bands, the two lower and the two upper band portions are brought toward each other in one movement, whereupon both pairs of band portions are fixedly clamped and are then separated and welded in a known manner, as described for instance in NL 7314312.

According to a second embodiment relating to a strapping with two bands, the upper band parts are first moved toward each other, separated and welded, whereafter the carrier of the welding means is moved downward to the lower band portions, which are then separated and welded. This second embodiment has the advantage that only one carrier provided with welding means for any type of band is required.

It will further be apparent that both embodiments can be readily enlarged into devices for strapping with more than two bands.

One group of band clamping and guiding means is preferably suitable for a band of the film type. This type of band has the advantage that it can easily be provided with a means of identification, for instance by printing text or adhering a label thereto. On the other hand, this type of band is more expensive than the standard strapping bands, and since it generally suffices to arrange only labels on this type of band, a cheaper type can be chosen for the other band or bands.

According to an embodiment, the second band is wider than the first band, wherein the wider band can for instance then be provided in practical manner with a means of identification.

In a first preferred embodiment of the device according to the invention, each jaw of the first pair of jaws has a

clamping surface which runs transversely relative to the direction of movement and which co-acts with a counter-surface of an intermediate body carried by one of the jaws, wherein at least one of the surfaces is provided with tooth-like protrusions lying in a direction opposite to the pulling
5 direction.

According to another feature of the present invention, each jaw of the second pair of jaws, which is for instance suitable for arranging a band of the film type, has a guide
10 surface which runs transversely relative to the direction of movement and which co-acts in each case with a motor-driven supply roll. The setting of the speed of the conveyor belt and the speed of the rolls ensures that the film can be placed round the packet with a randomly adjustable tension.

15 The invention further relates to a method for arranging at least two bands one above the other around one or more packets, wherein each band, which is formed by fastening together at their outer ends two bands unrolled in each case from a supply roll, is trained in a U-shape round the or each
20 packet, whereupon each pair of band portions extending around the or each packet in a U-shape are pressed toward each other along the object, adhered to each other and severed such that a band again extends between each pair of supply rolls.

The method is distinguished in that the type of the at
25 least two bands is chosen according to the height on the one or more packets, and that for each band each of the two band portions pressed toward each other is fixedly clamped, moved toward each other, welded together and separated.

This method makes it possible to firmly strap the one or
30 more packets in one passage thereof with at least two bands, the type of which is related to the height position on the packets.

21766-1077

4

According to a first variant of the method according to the invention, each band of the bands to be arranged one above the other is fixedly clamped, welded together and separated simultaneously and in one movement.

According to another variant of the method according to the invention each band of the bands to be arranged one above the other is successively sought, fixedly clamped, welded together and separated. In this manner only one pair of clamping and welding jaws is required for arranging each band of the same type.

According to one aspect of the present invention, there is provided a device for simultaneously arranging at least two bands around one or more packets, substantially consisting of a frame, a lying conveyor belt supported by the frame for moving forward the packets, band clamping and guiding means which move transversely of the conveyor belt away from and toward each other and which are connected to associated supply reels for the at least two bands, welding means for welding together the bands which have been moved toward each other, wherein the at least two bands comprise a band of a strap type and a band of a film type, and that a first group of band clamping and guiding means has a first pair of welding and clamping jaws, said first group being arranged for the band of the strap type and a second group has a second pair of welding and clamping jaws, said second group being arranged for the band of the film type, which groups are arranged one above the other.

According to another aspect of the present invention, there is provided use of the device as described herein for arranging at least two bands around one or more packets.

The invention will be further elucidated with reference to the annexed drawing and the figure description hereinbelow, in which a number of embodiments of the device according to the invention are illustrated.

In the drawing:

figure 1 shows a perspective view of a first embodiment of the device according to the invention;

21766-1077

4a

figure 2 shows a perspective view of a second embodiment of the device according to the invention;

figure 3 shows a perspective detail view of the band clamping and guiding means of the embodiment shown in figure 2;

5 figures 4A to 4D and 5A to 5E show perspective views of the band clamping and guiding means of the embodiment shown in figure 2 during a possible embodiment of the method according to the invention.

According to a first embodiment, and as shown in figure 1, the device has a portal-like frame 1, although the skilled person will appreciate that
10 this frame can take a random form. Running below the portal is a conveyor belt 2 for moving the packets P for strapping in the direction of arrow P3.

21766-1077

5

The band B1 and film B2 for arranging are pulled respectively from supply reels 3 and 4 (see arrows P1 and P2) and guided to clamping and welding jaws 7 and 8 via resistance mechanisms and return pulleys (not shown). A corresponding
5 configuration can be found on the other side of the portal. In the drawing the welding jaws 7 and 8 are each provided with separate support frames, although it will be apparent that they can equally well be mounted on the same support frame when the two bands are moved towards each other in a
10 single movement.

Both ends of band B1 and film B2 respectively are in each case welded together at 9 and 10 respectively. The clamping and welding jaws 7, 8 are moved toward each other, wherein band B1 and film B2 are nestled under tension against the
15 rear side of the packets P for strapping.

Band B1 and film B2 are then clamped fixedly on either side, whereupon the band and the film are cut through on both sides and the corresponding band and film ends are welded together.

20 Each clamping jaw 7 of the band B1 which in this embodiment is of the strap type, is advantageously embodied with a clamping surface which is provided with teeth 7A protruding in a direction opposite to the pulling direction in order to prevent slippage resulting from the tensile
25 force. Such clamping jaws are described in detail in the European patent application EP 98202234 of applicant.

Each clamping jaw 8 of band B2, which in this embodiment is of the film type, has a guide surface which runs transversely relative to the direction of movement and which
30 co-acts in each case with a motor-driven supply reel 4. The setting of the speed of conveyor belt 2 and the speed of rolls 4 ensures that the film can be placed round the packet with a randomly adjustable tension.

21766-1077

6

A second embodiment is shown in figure 2. Frame 1 is provided on either side with a support frame 11 with clamping and welding means, which support frames are shown in detail in figure 3.

5 At the top of the support frame are arranged guiding and welding means 8 for a band B2 of the film type, while clamping and welding means 7 for a band B1 of the strap type are built in at the bottom. The latter has a left-hand and right-hand welding jaw 13, 13' which are built into a two-
10 part sleeve-like housing 14. Band portions B1 are guided over respective guide surfaces 15, 15'. For a detailed description of all components of these jaws reference is made to the patent EP 0 890 510 of applicant.

As shown in figure 2, frame 1 is provided with a
15 motorized beam 12 to which the support frames 11 are connected, which beam 12 can be moved up and downward using control means, as designated with arrow P4, such that the height of support frames 11 can be adjusted. Control means are likewise further provided for carrying support frames 11
20 towards each other in the direction of arrow P5.

The method of the invention wherein each band of the bands to be arranged one above the other is successively sought, fixedly clamped, welded together and separated, is illustrated with reference to figures 4A to 4D and 5A to 5D.
25 Figure 4A shows the step wherein a band B1 of the strap type has been sought and taken up by the guiding means. Both support frames are then moved towards each other until the lower pair of welding jaws are mutually engaging, as shown in figures 4B and 4C. In figure 4C the band portions are adhered to
30 each other and separated. The band of the strap type B1 is then sealed round the one or more packets and also separated from the band parts coming from supply rolls 3 with their ends fixed to each other, so that the support frames can move

21766-1077

7

back away from each other (figure 4D) and a subsequent band can be sought.

Figures 5A to 5E shows the different steps of the movement of support frames 11 when a band of the film type is taken up.

- 5 Both support frames 11 are moved toward each other until the lower pair of guiding and welding jaws are mutually engaging, as shown in figures 5B and 5C, whereupon the upper pair of guiding jaws 8 are moved toward each other, as shown in figure 5D. The band portions are then adhered to each other and
- 10 separated. The band of film type B2 is then closed round the one or more packets and also separated from the band parts coming from motorized supply rolls 4 with their ends fixed to each other, so that support frames 11 can be moved back away from each other (figure 5E) and a subsequent band can be
- 15 sought, or the strapped packets can be transported further when all bands B1, B2 have been arranged.

The invention is not limited to the above described embodiment; it is thus also possible for instance to provide the device with three groups of band clamping and guiding

20 means, with which three different band types can be arranged.


21766-1077

8


CLAIMS:

1. Device for simultaneously arranging at least two bands around one or more packets, substantially consisting of a frame, a lying conveyor belt supported by the frame for moving forward the packets, band clamping and
5 guiding means which move transversely of the conveyor belt away from and toward each other and which are connected to associated supply reels for the at least two bands, welding means for welding together the bands which have been moved toward each other, wherein the at least two bands comprise a band of a strap type and a band of a film type, and that a first group of band clamping and
10 guiding means has a first pair of welding and clamping jaws, said first group being arranged for the band of the strap type and a second group has a second pair of welding and clamping jaws, said second group being arranged for the band of the film type, which groups are arranged one above the other.
2. Device as claimed in claim 1, wherein the second band is wider than
15 the first band.
3. Device as claimed in claim 1 or 2, wherein each jaw of the first pair of jaws has a clamping surface which runs transversely relative to the direction of movement and which co-acts with a counter-surface of an intermediate body carried by one of the jaws, wherein at least one of the surfaces is provided with
20 tooth-like protrusions lying in a direction opposite to the pulling direction.
4. Device as claimed in any one of claims 1 to 3, wherein each jaw of the second pair of jaws has a guide surface which runs transversely relative to the direction of movement and which co-acts in each case with a motor-driven supply roll.
- 25 5. Device as claimed in any one of claims 1 to 4, wherein one of the band types is provided with a label.
6. Use of the device of any one of claims 1 to 5 for arranging at least two bands around one or more packets.


1/8


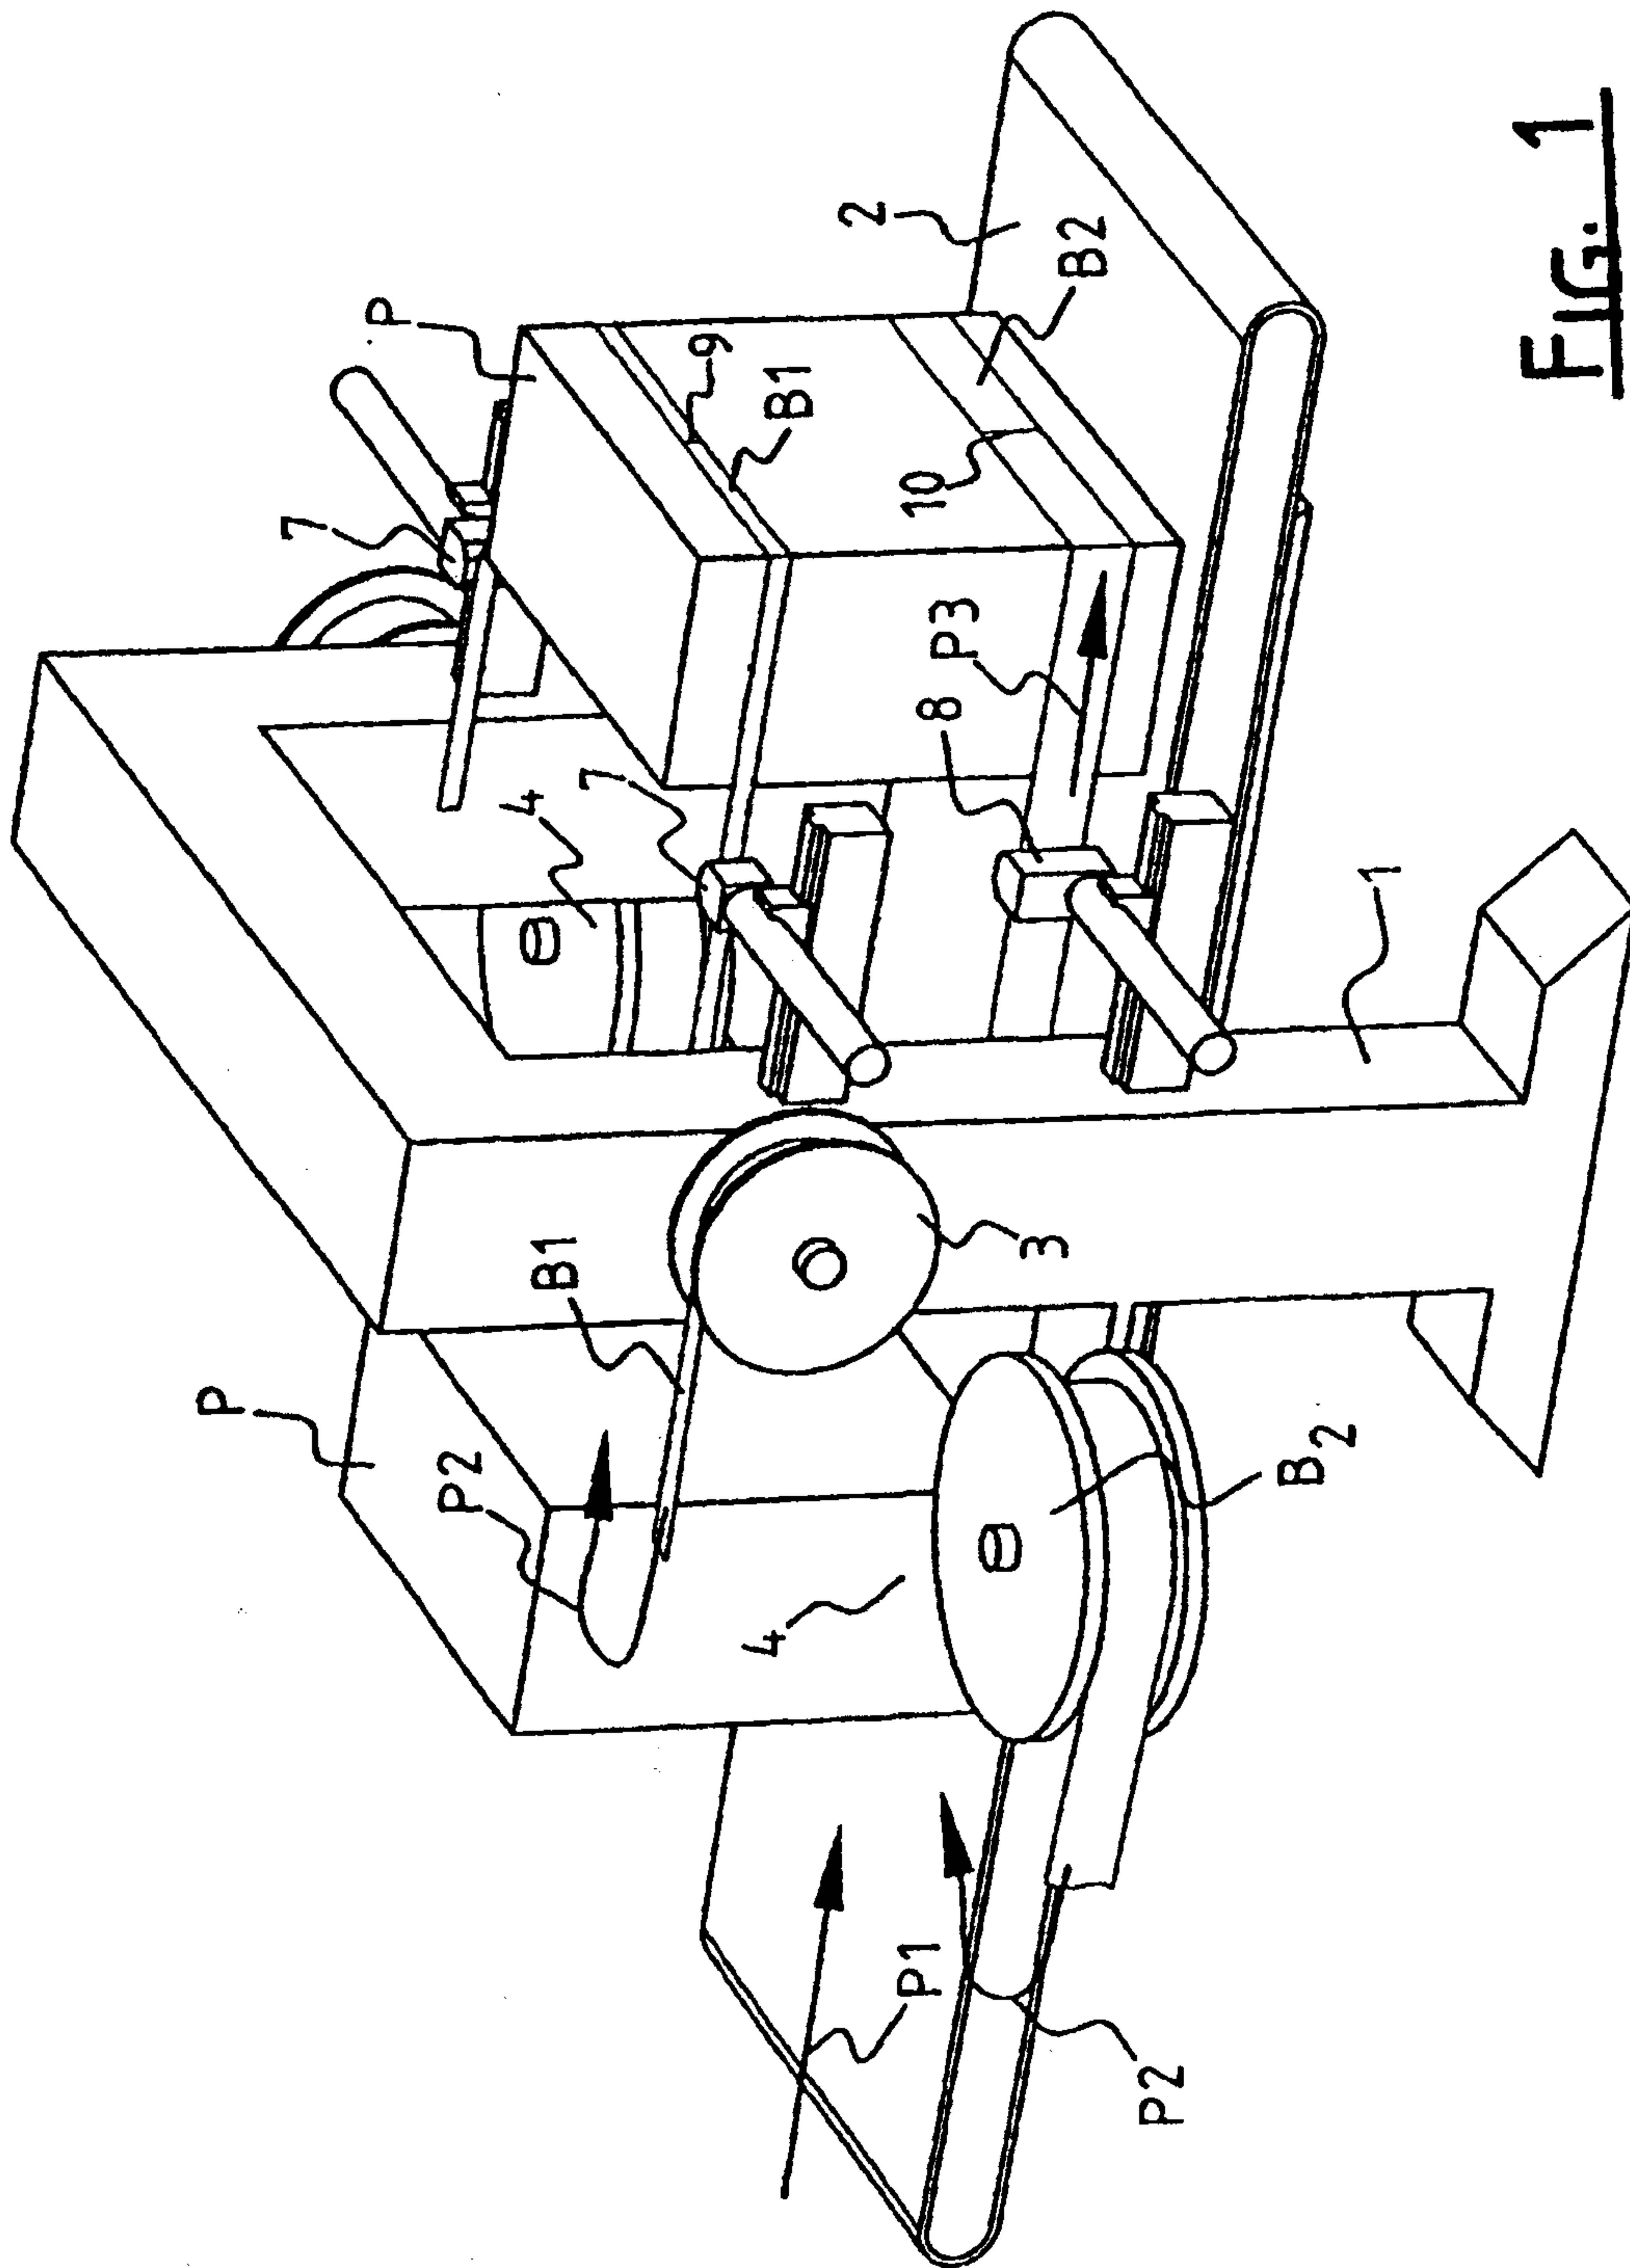




2/8

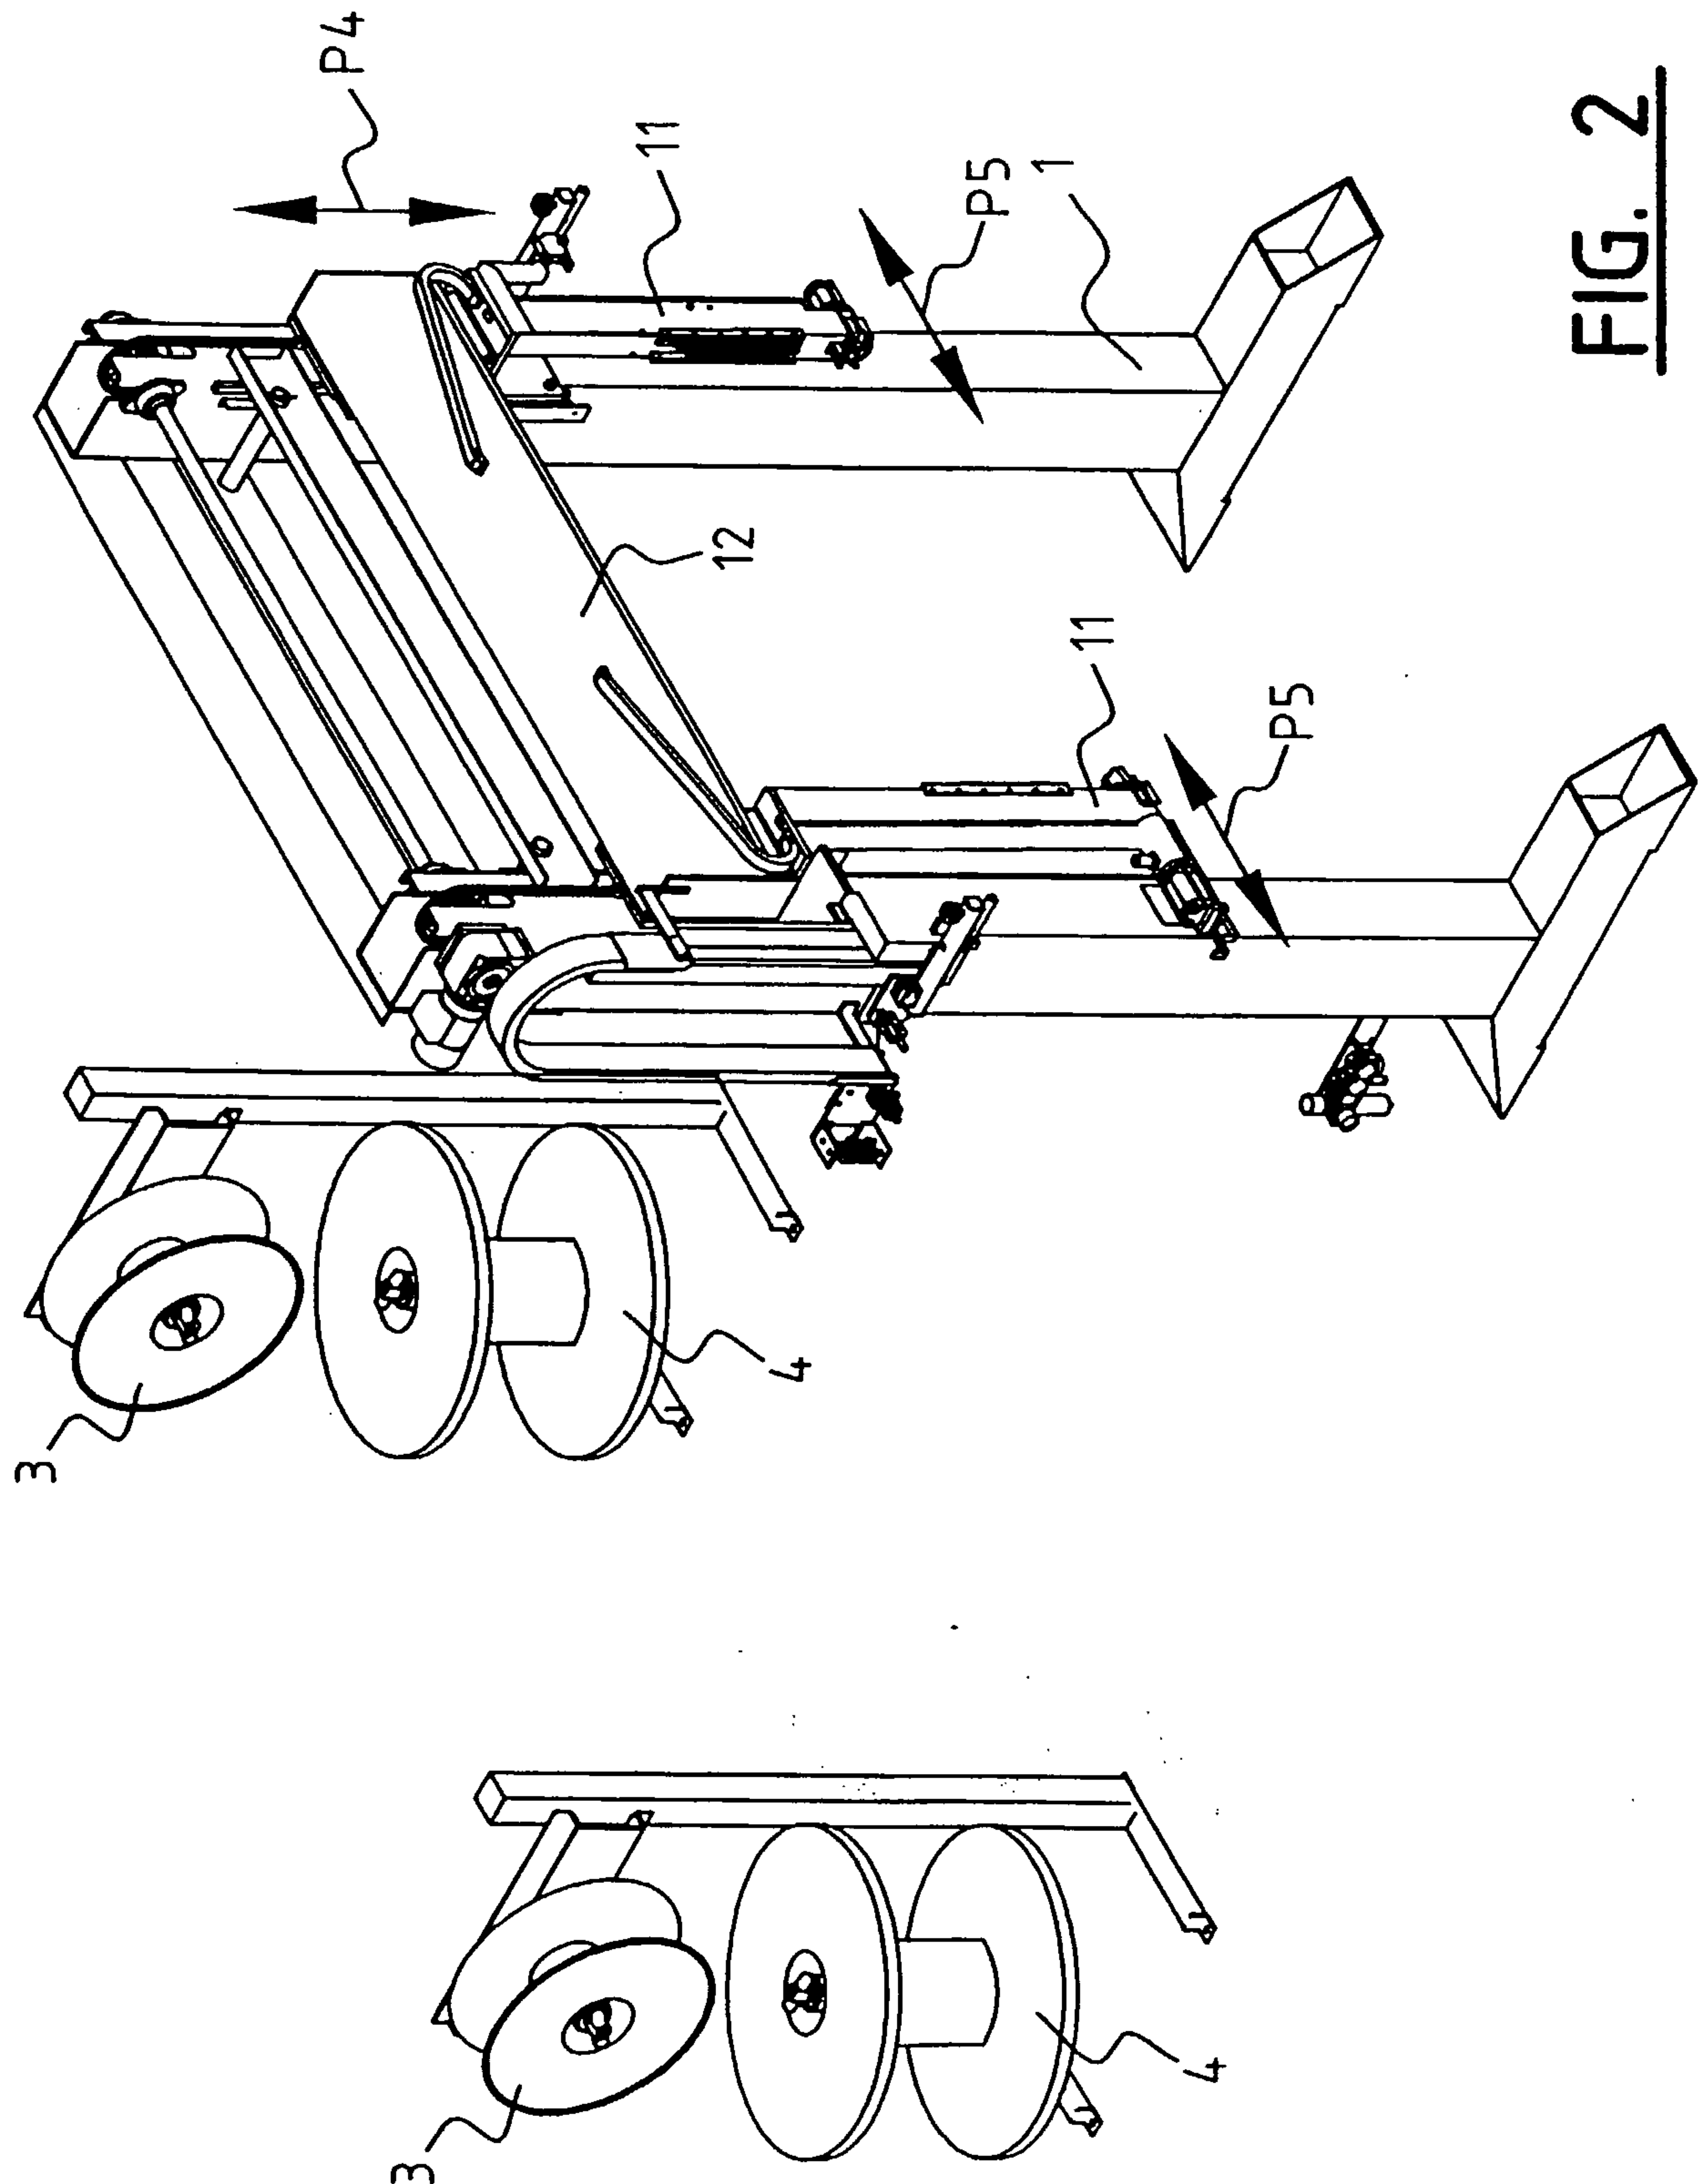FIG. 2



3/8

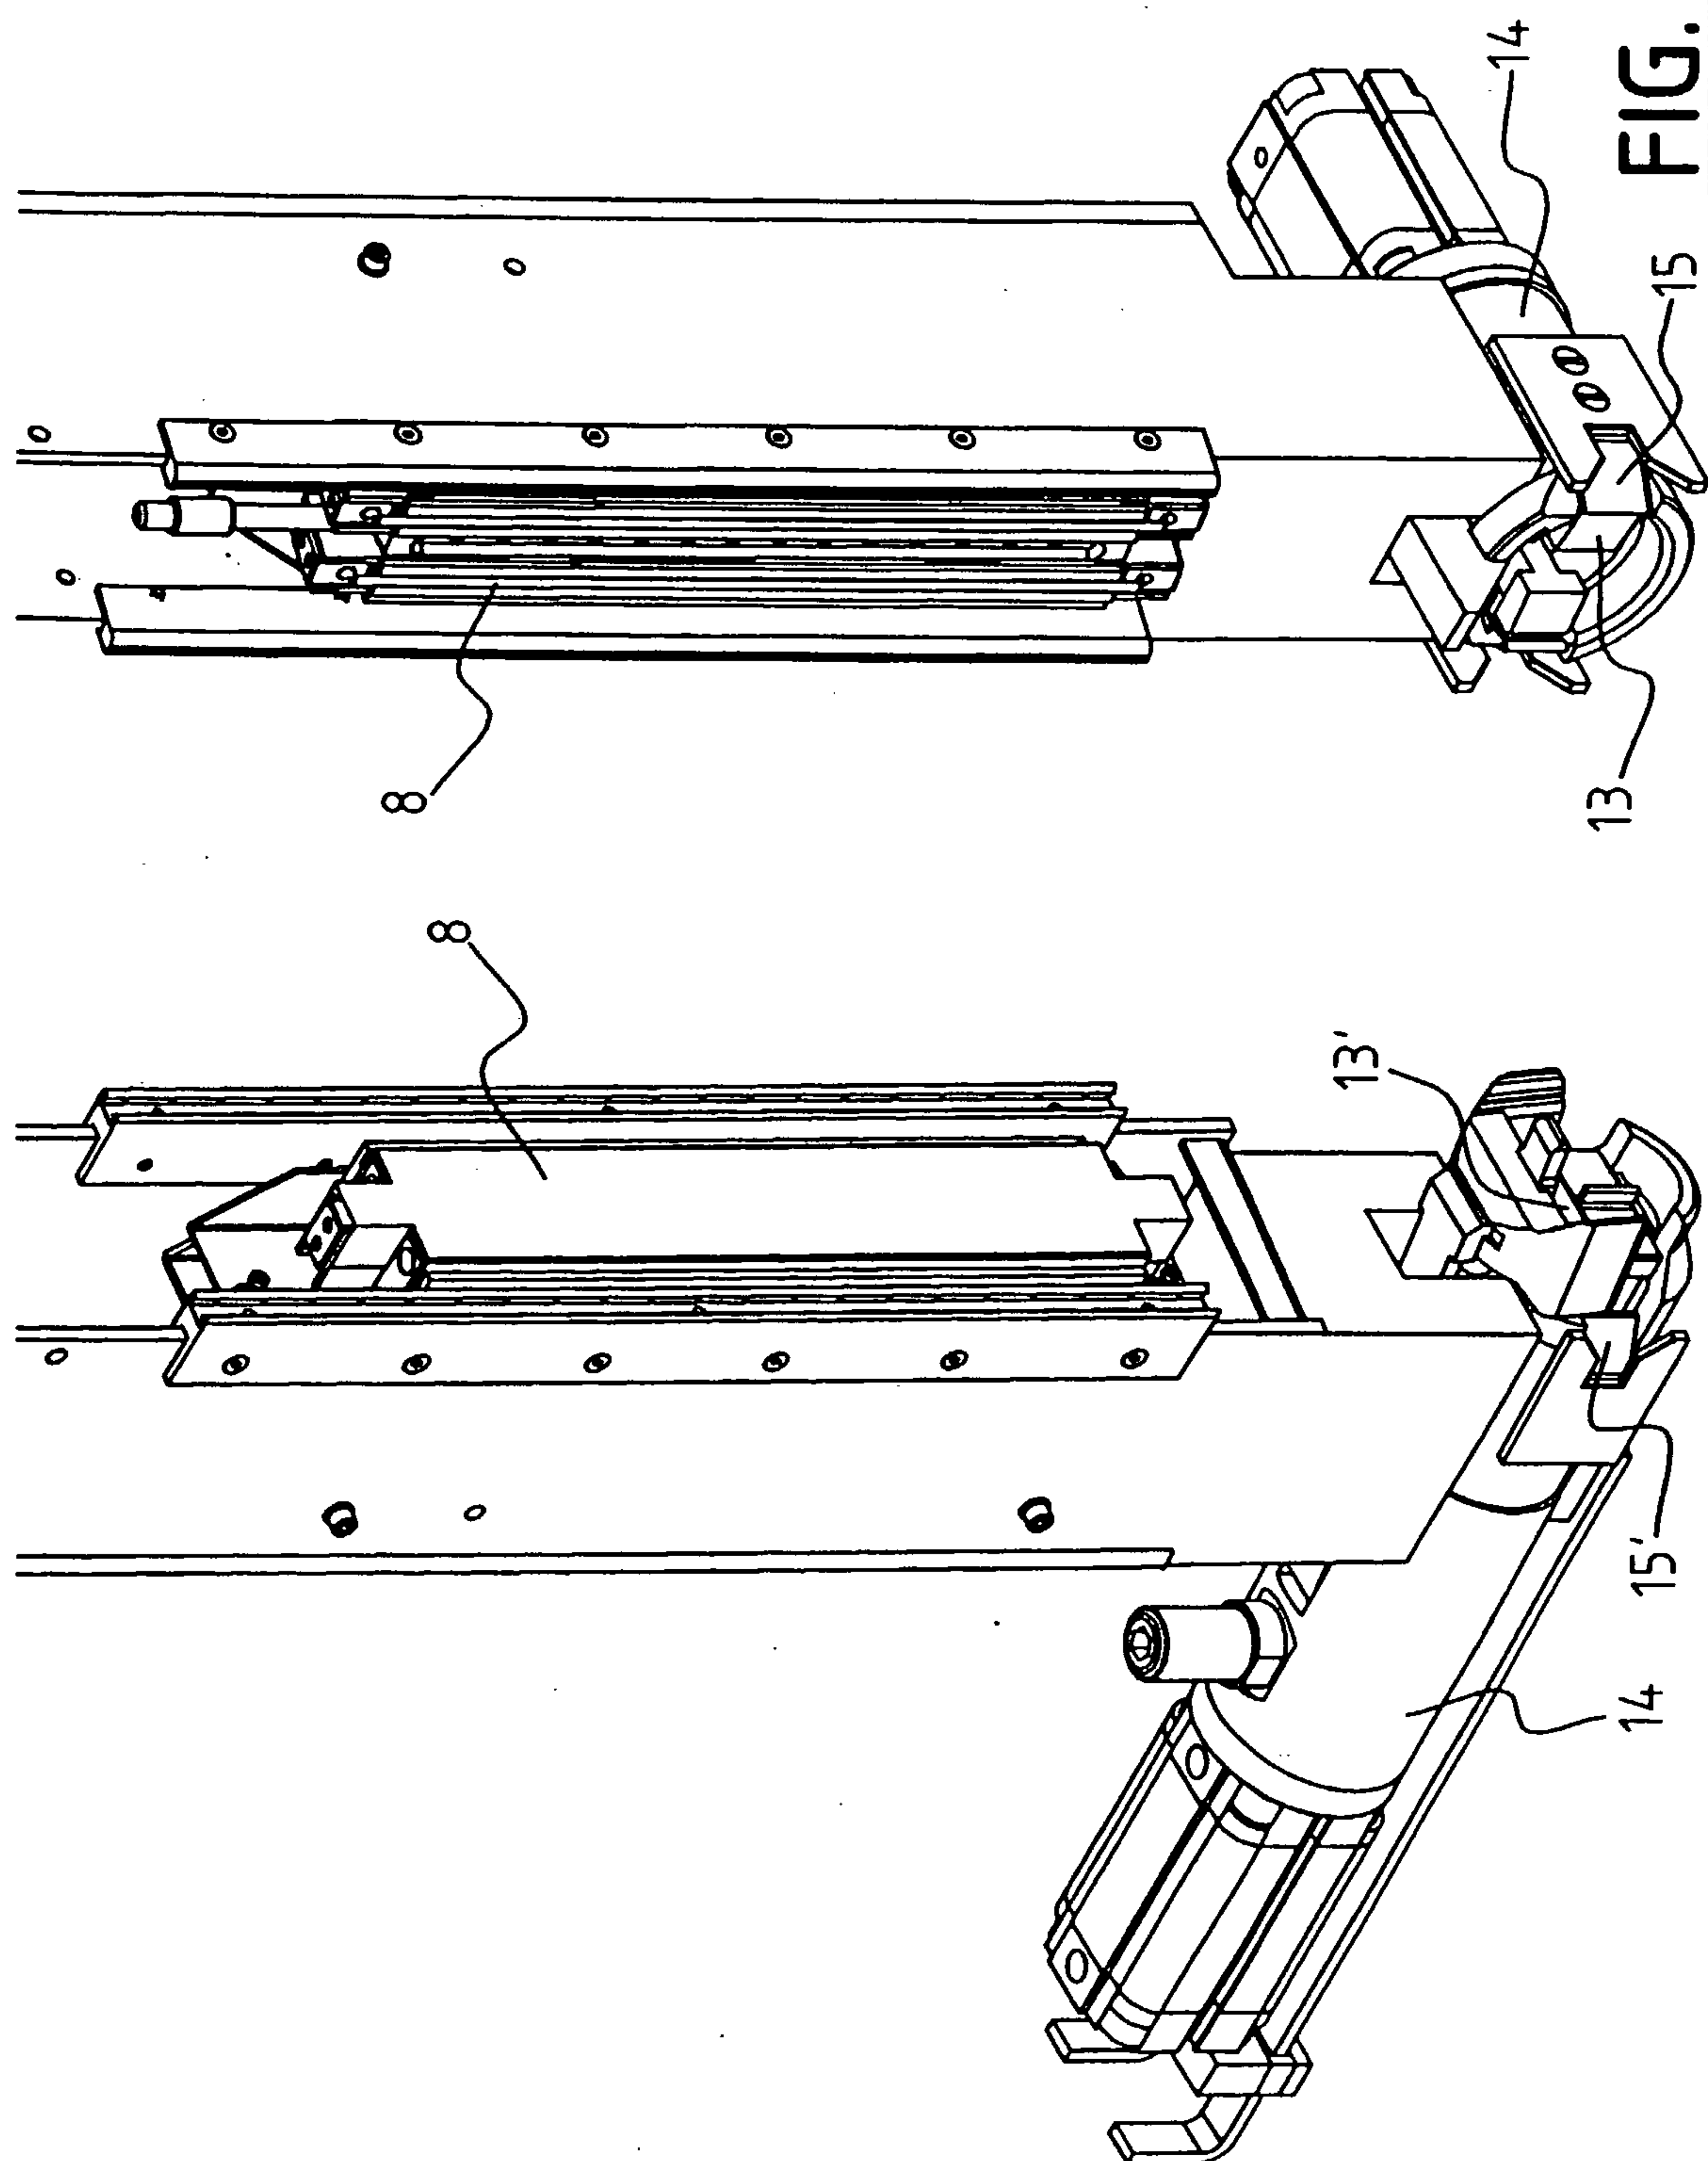

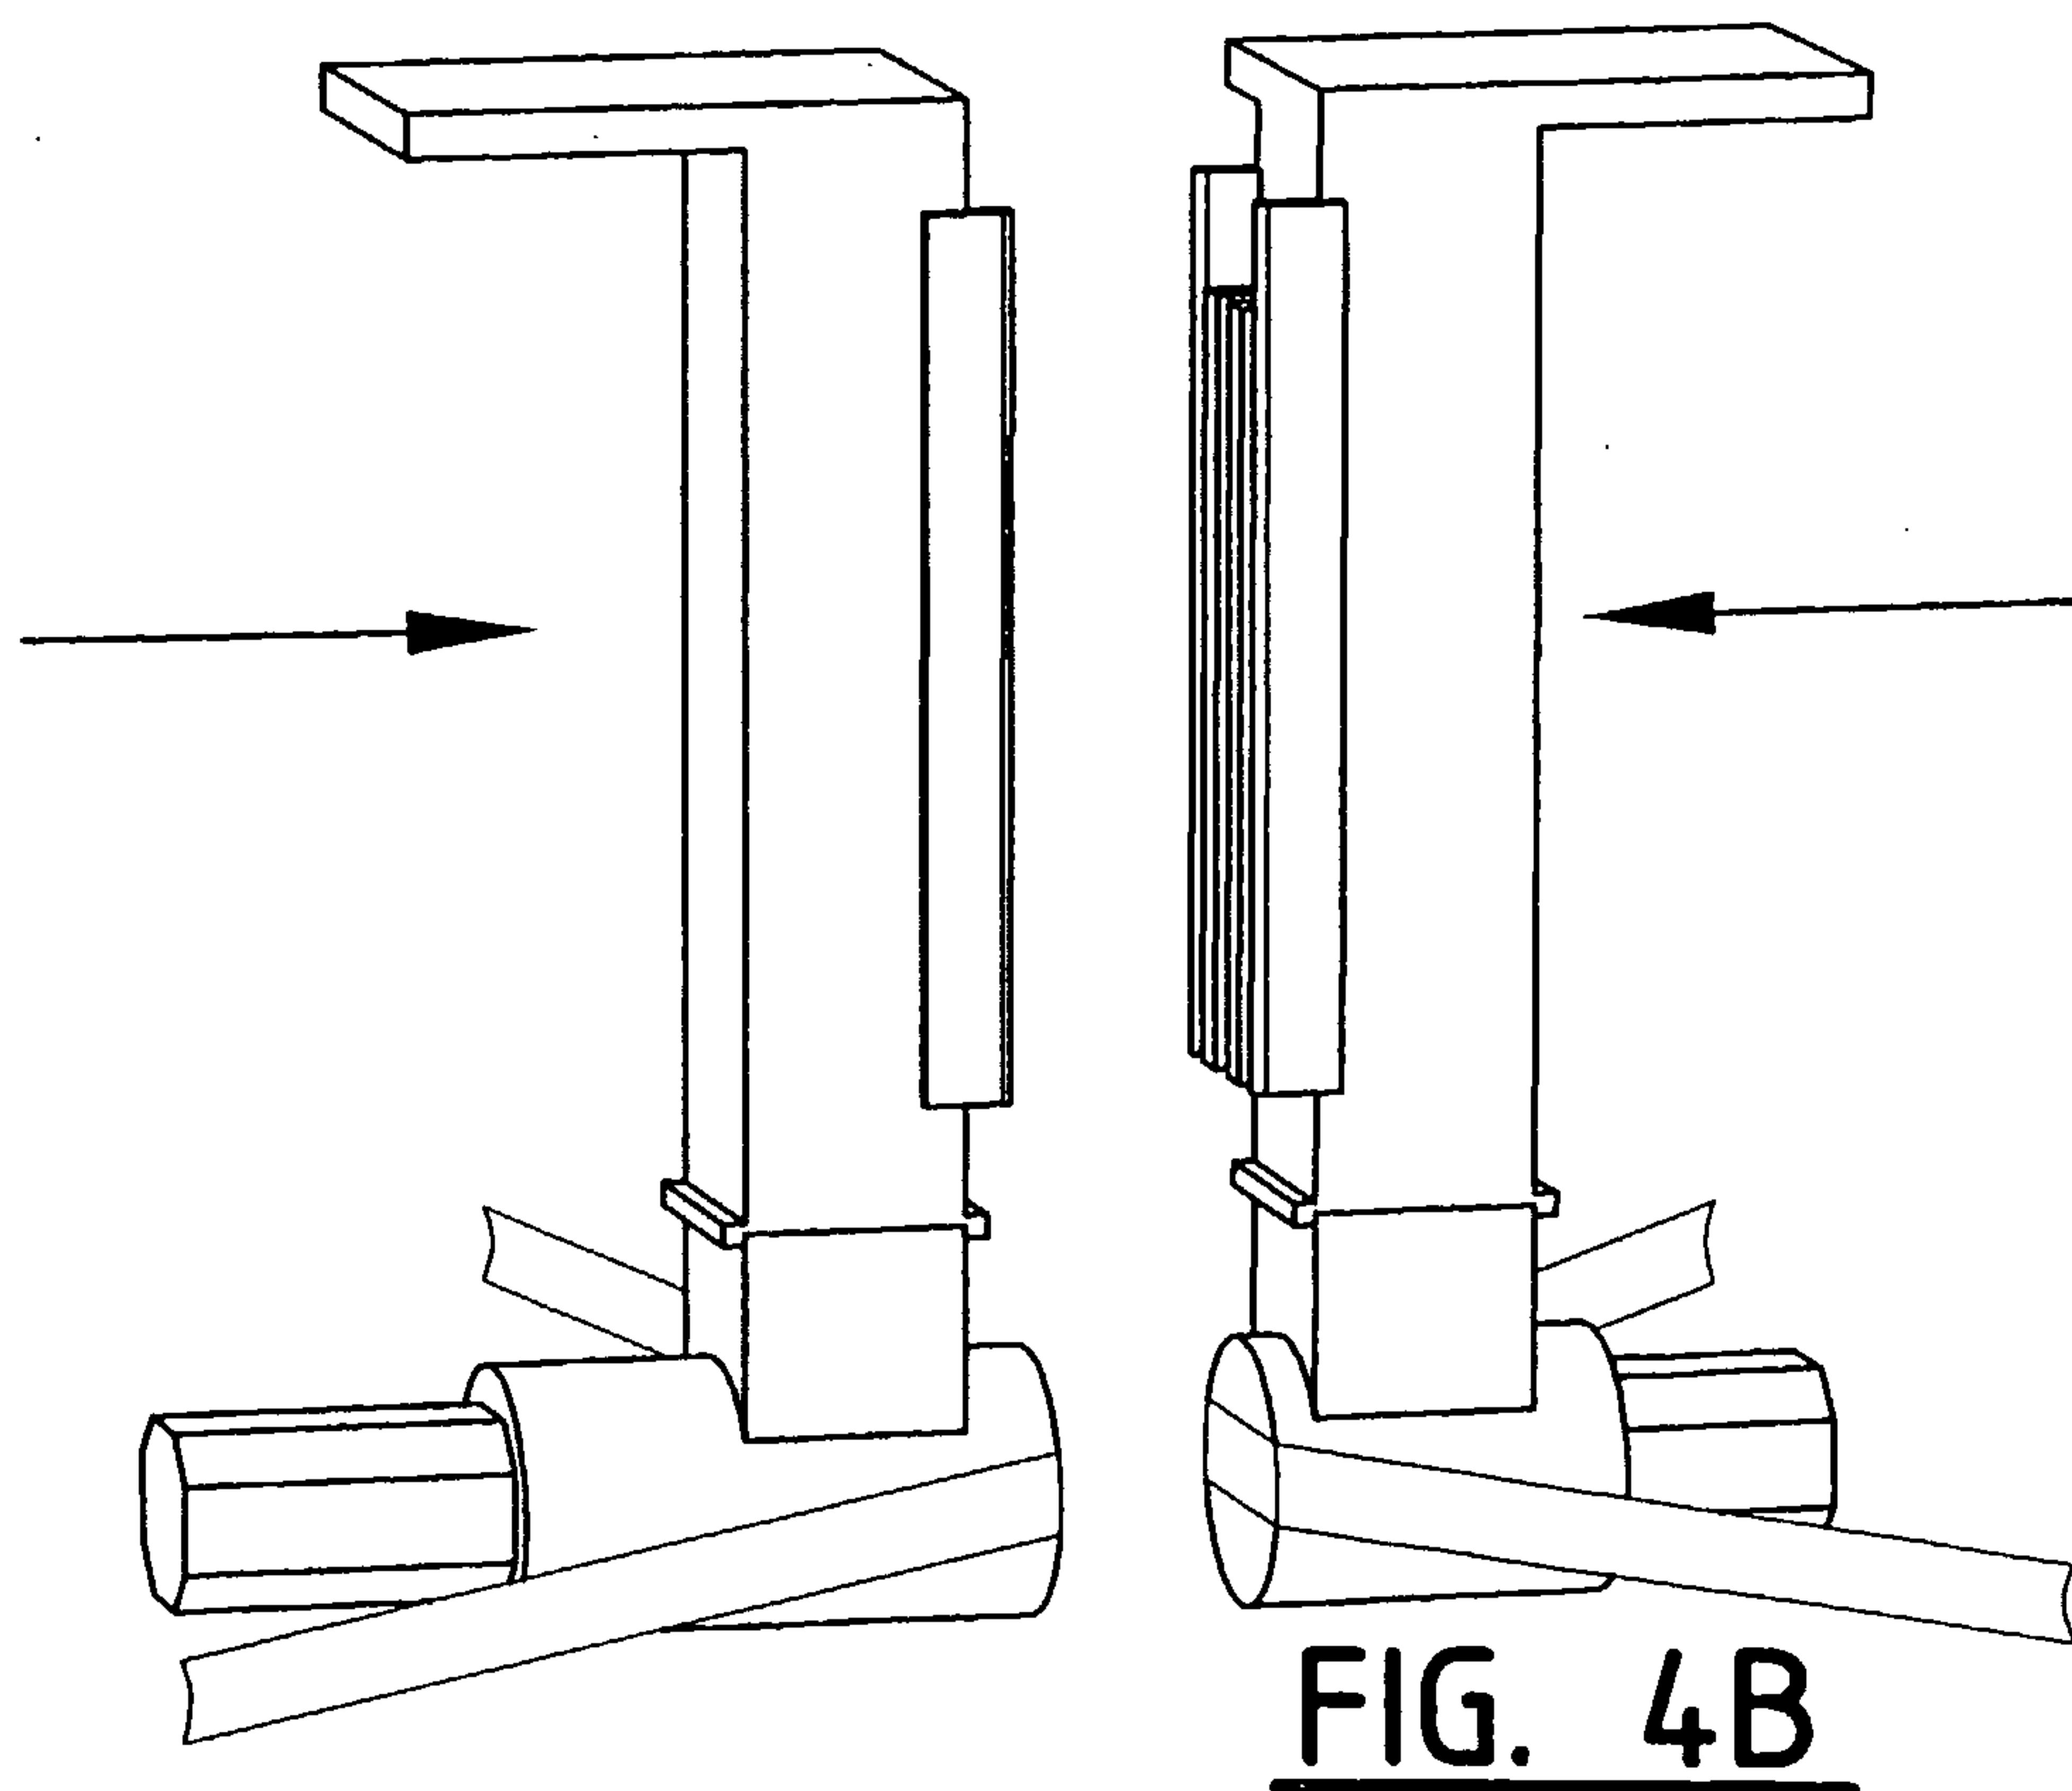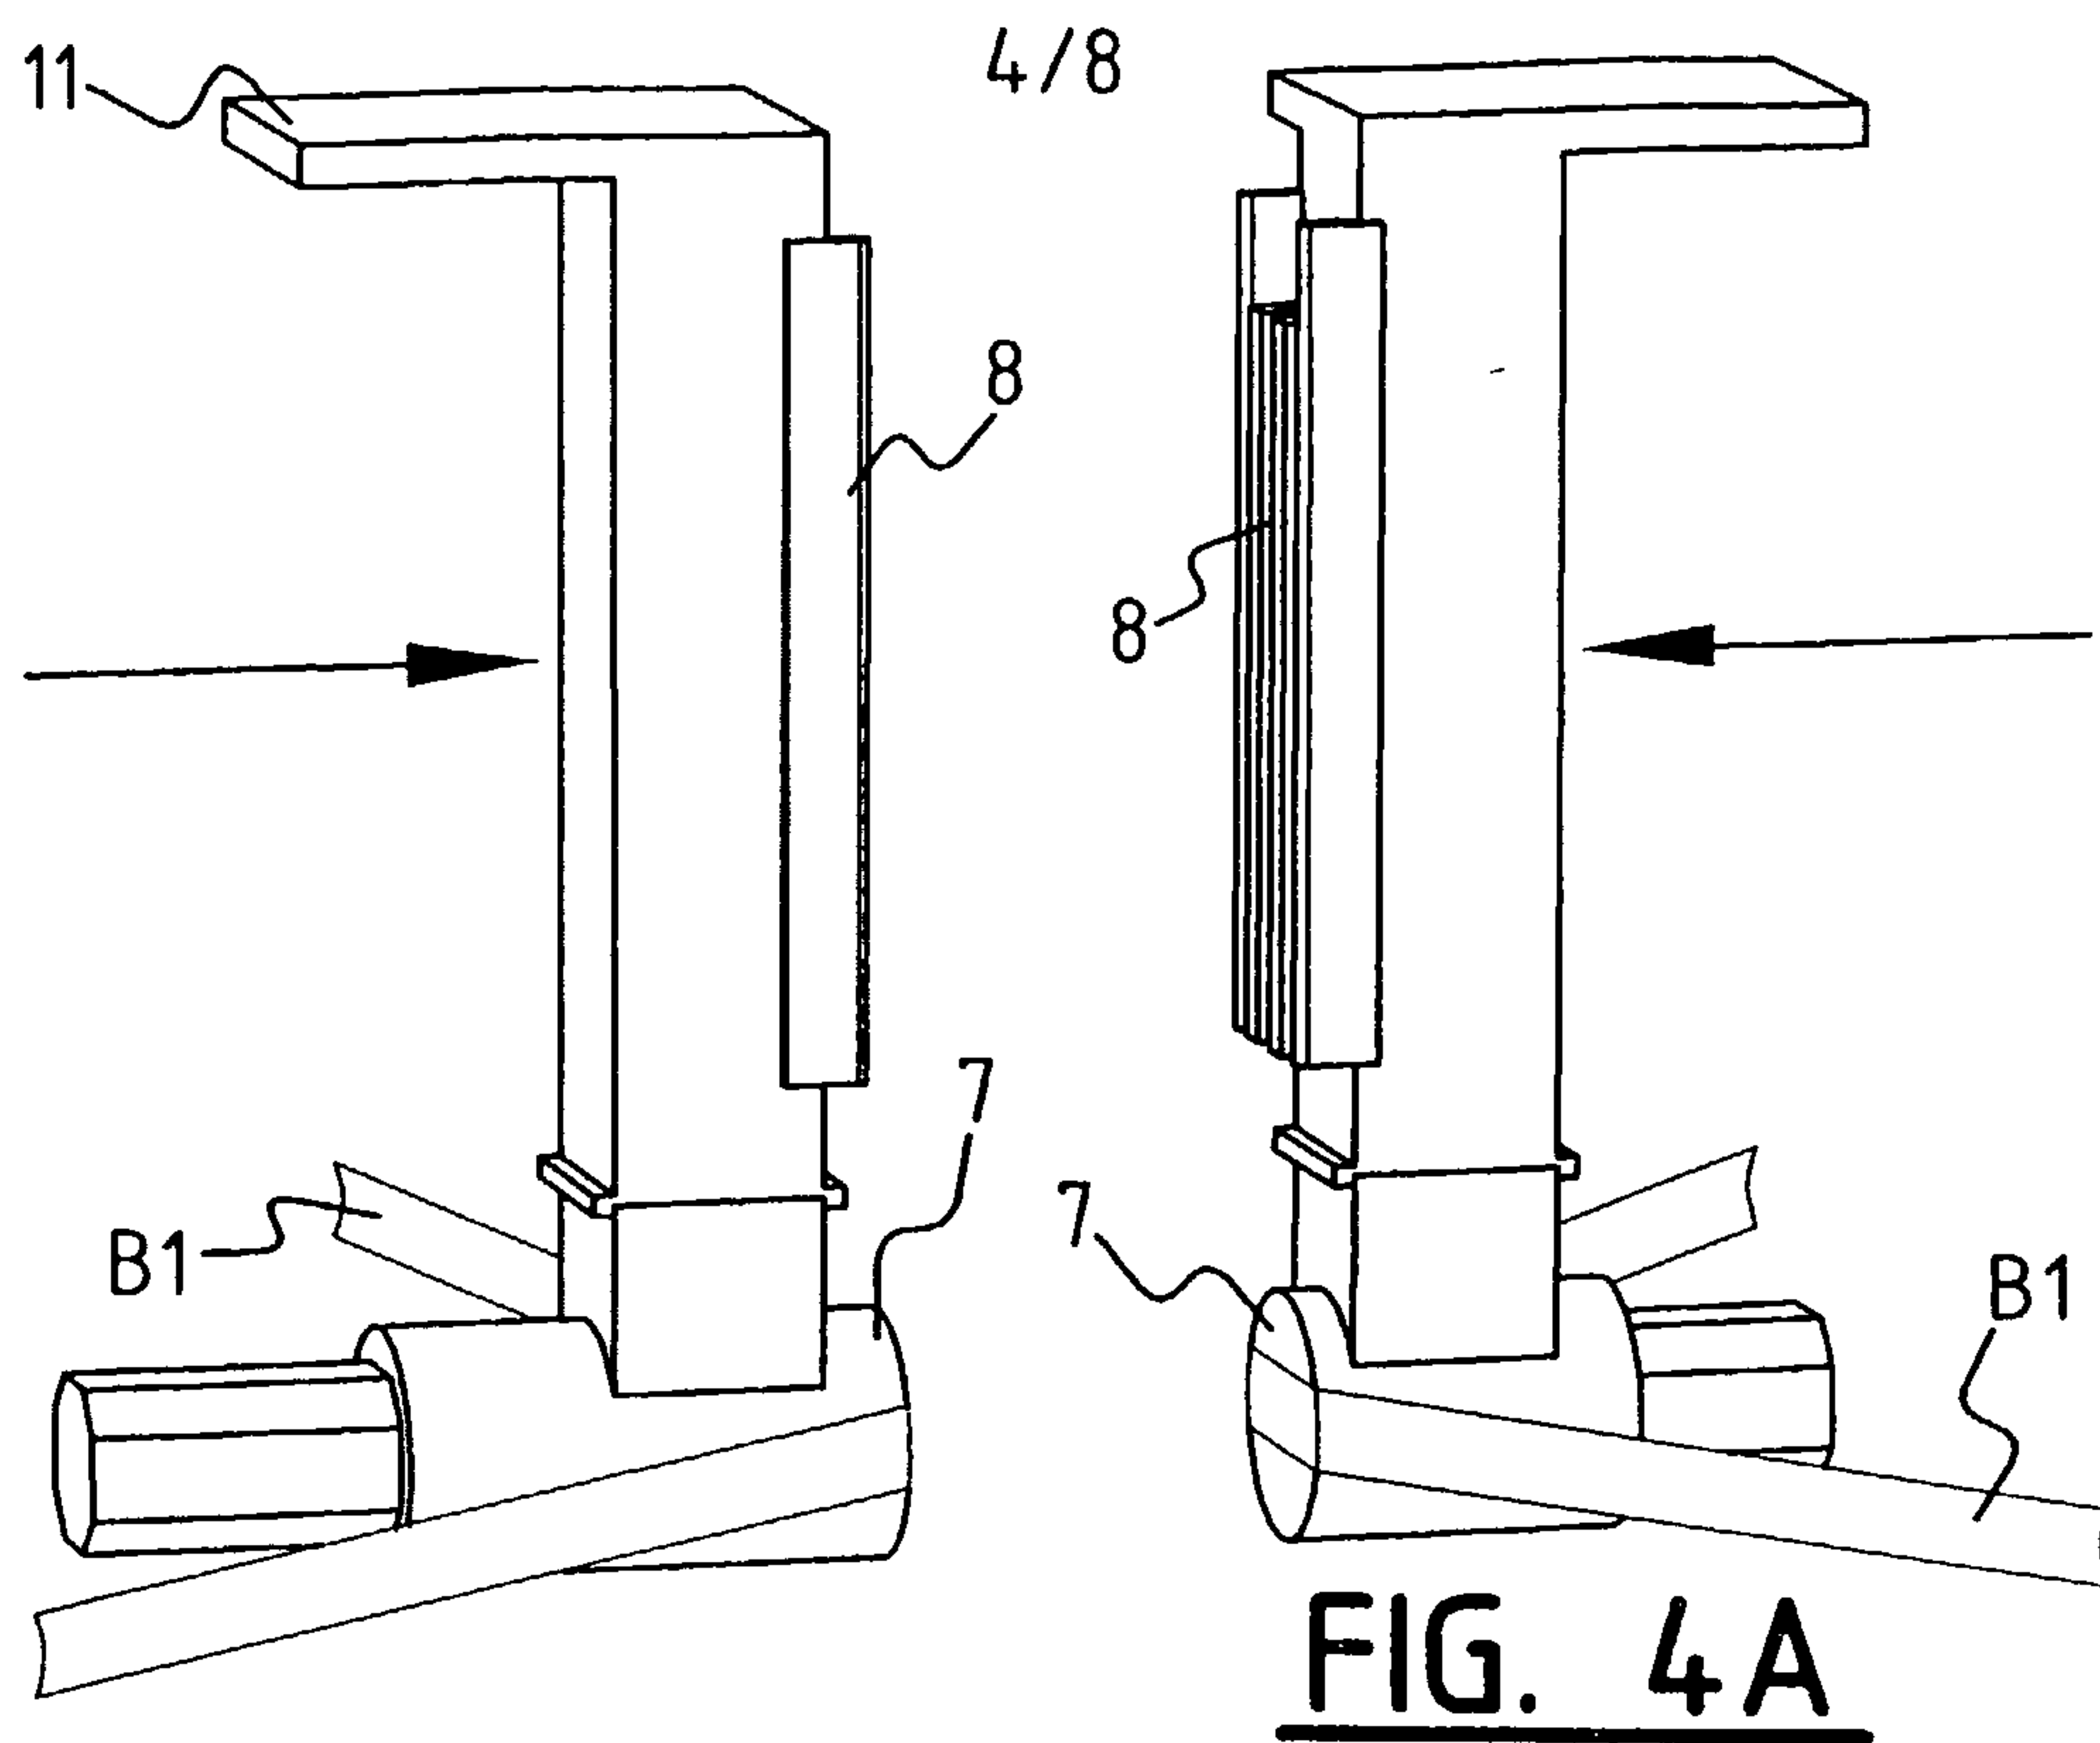

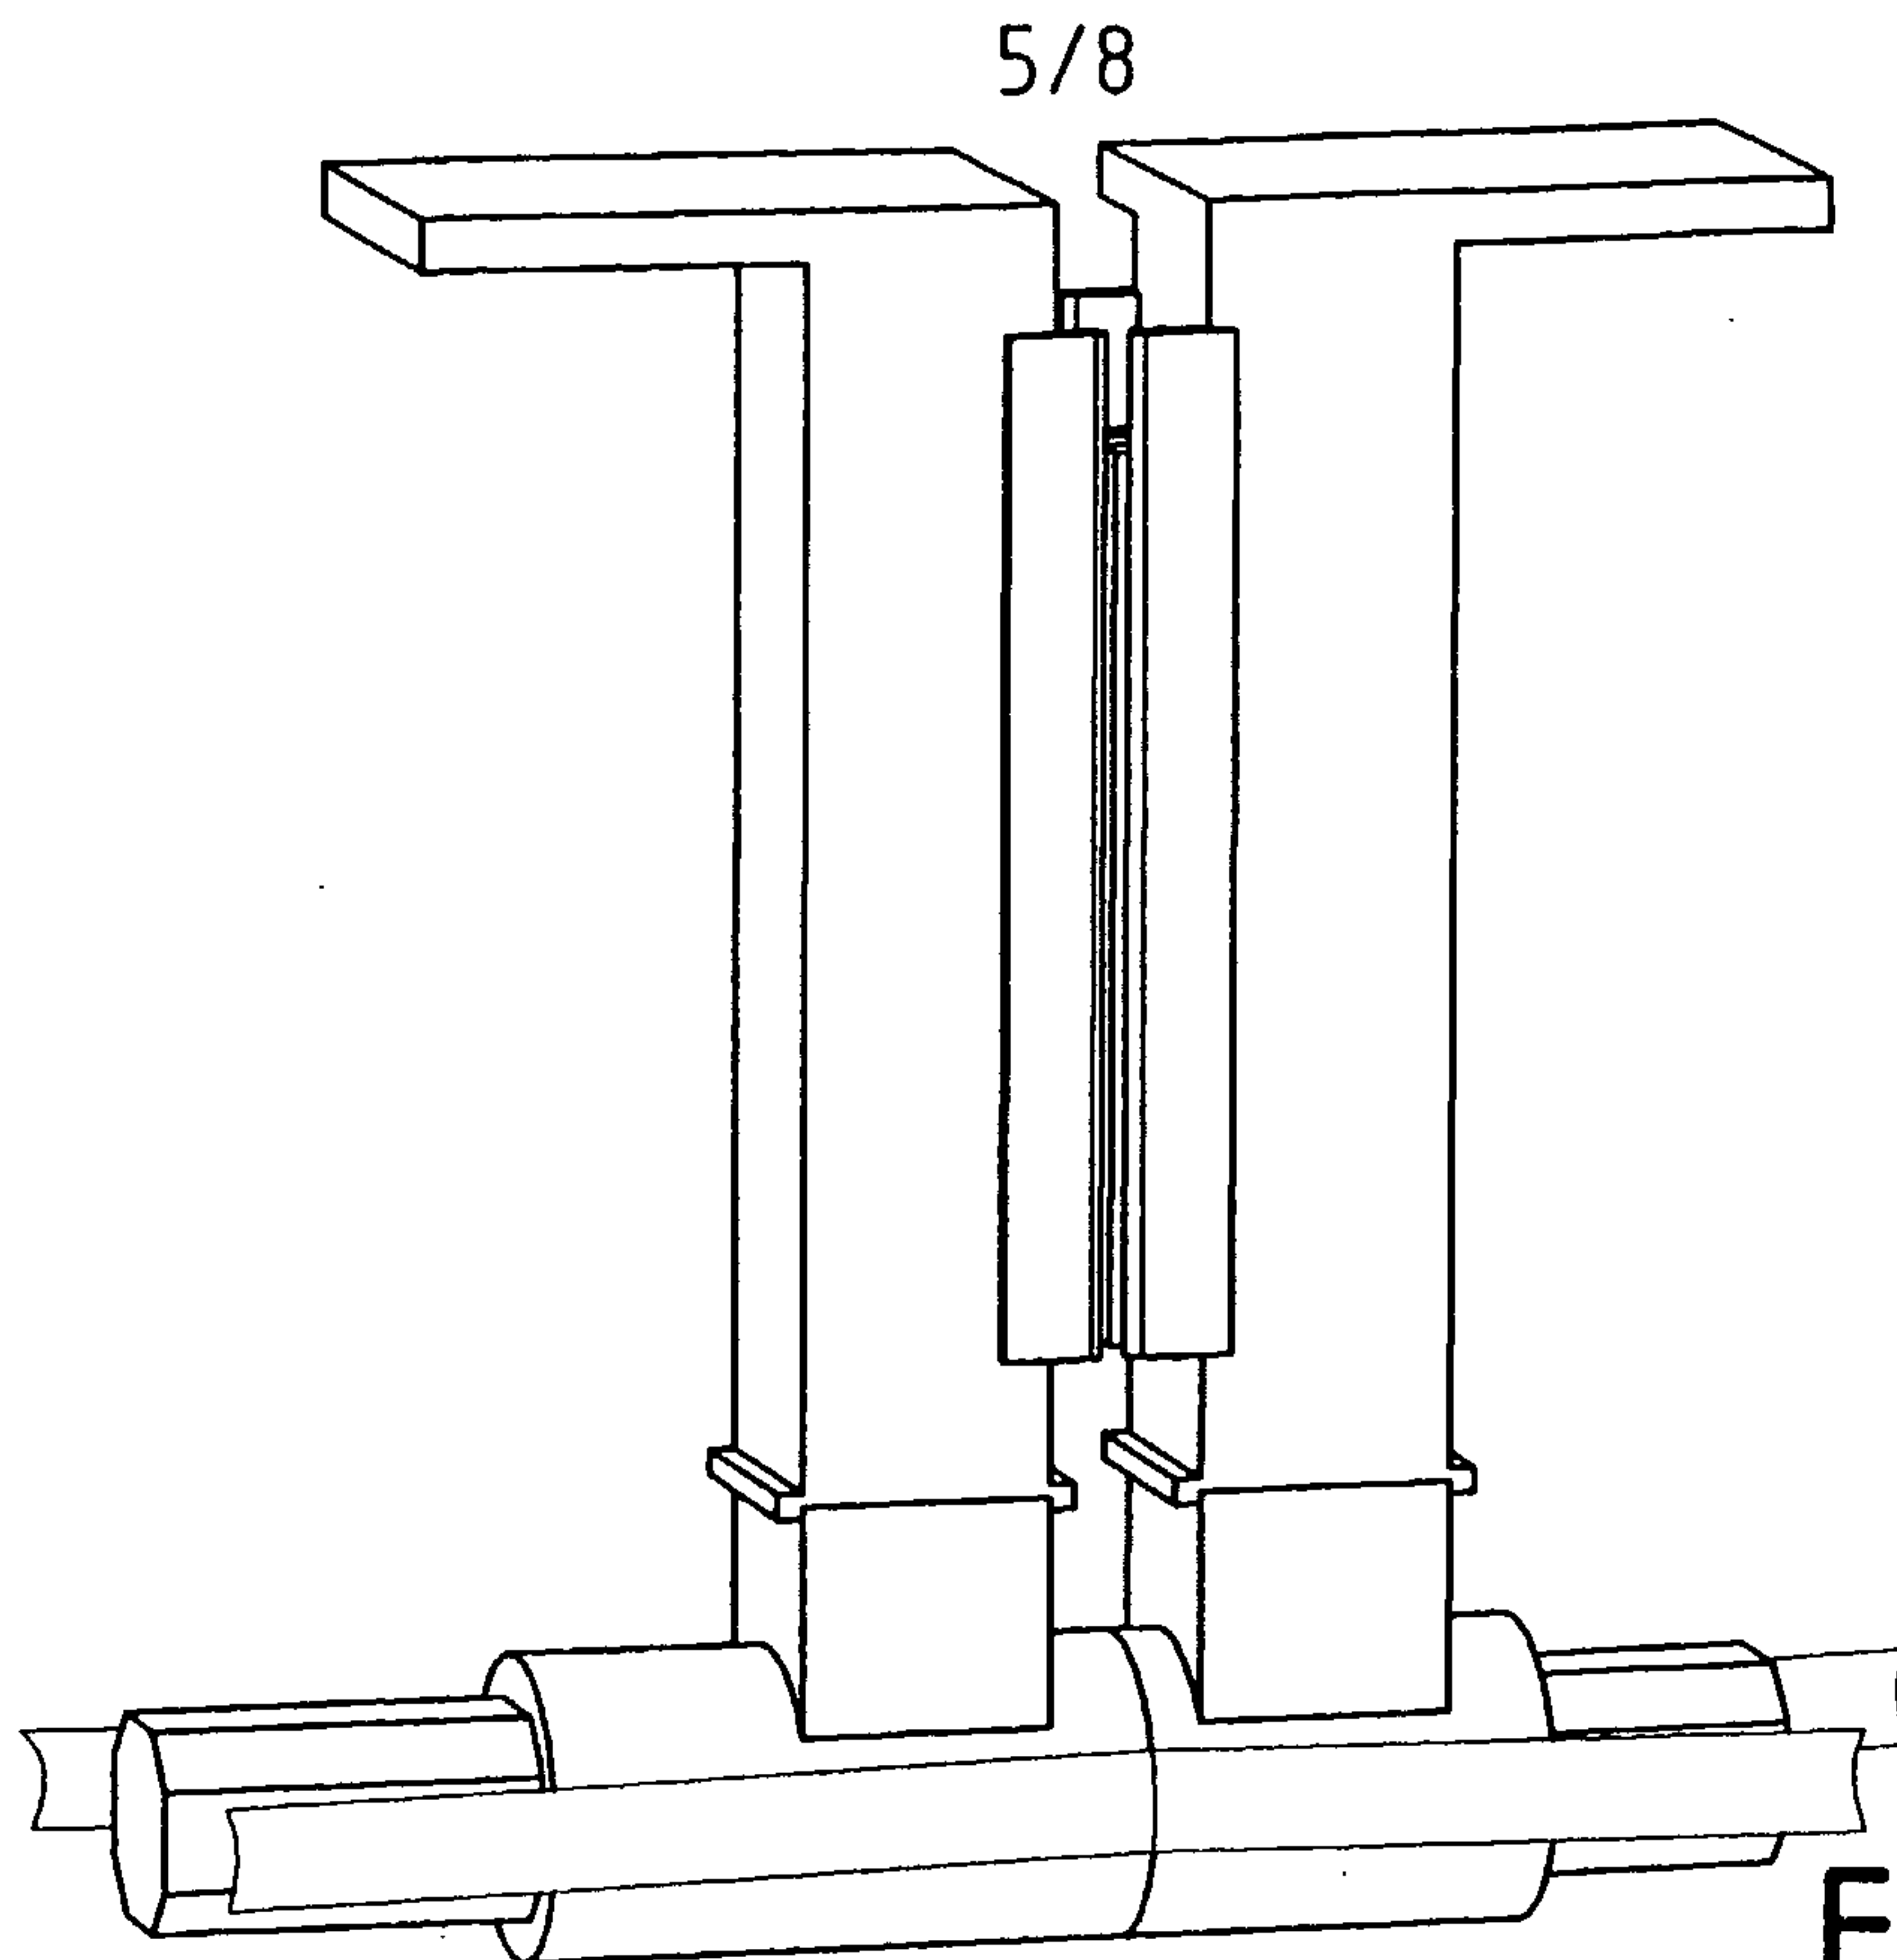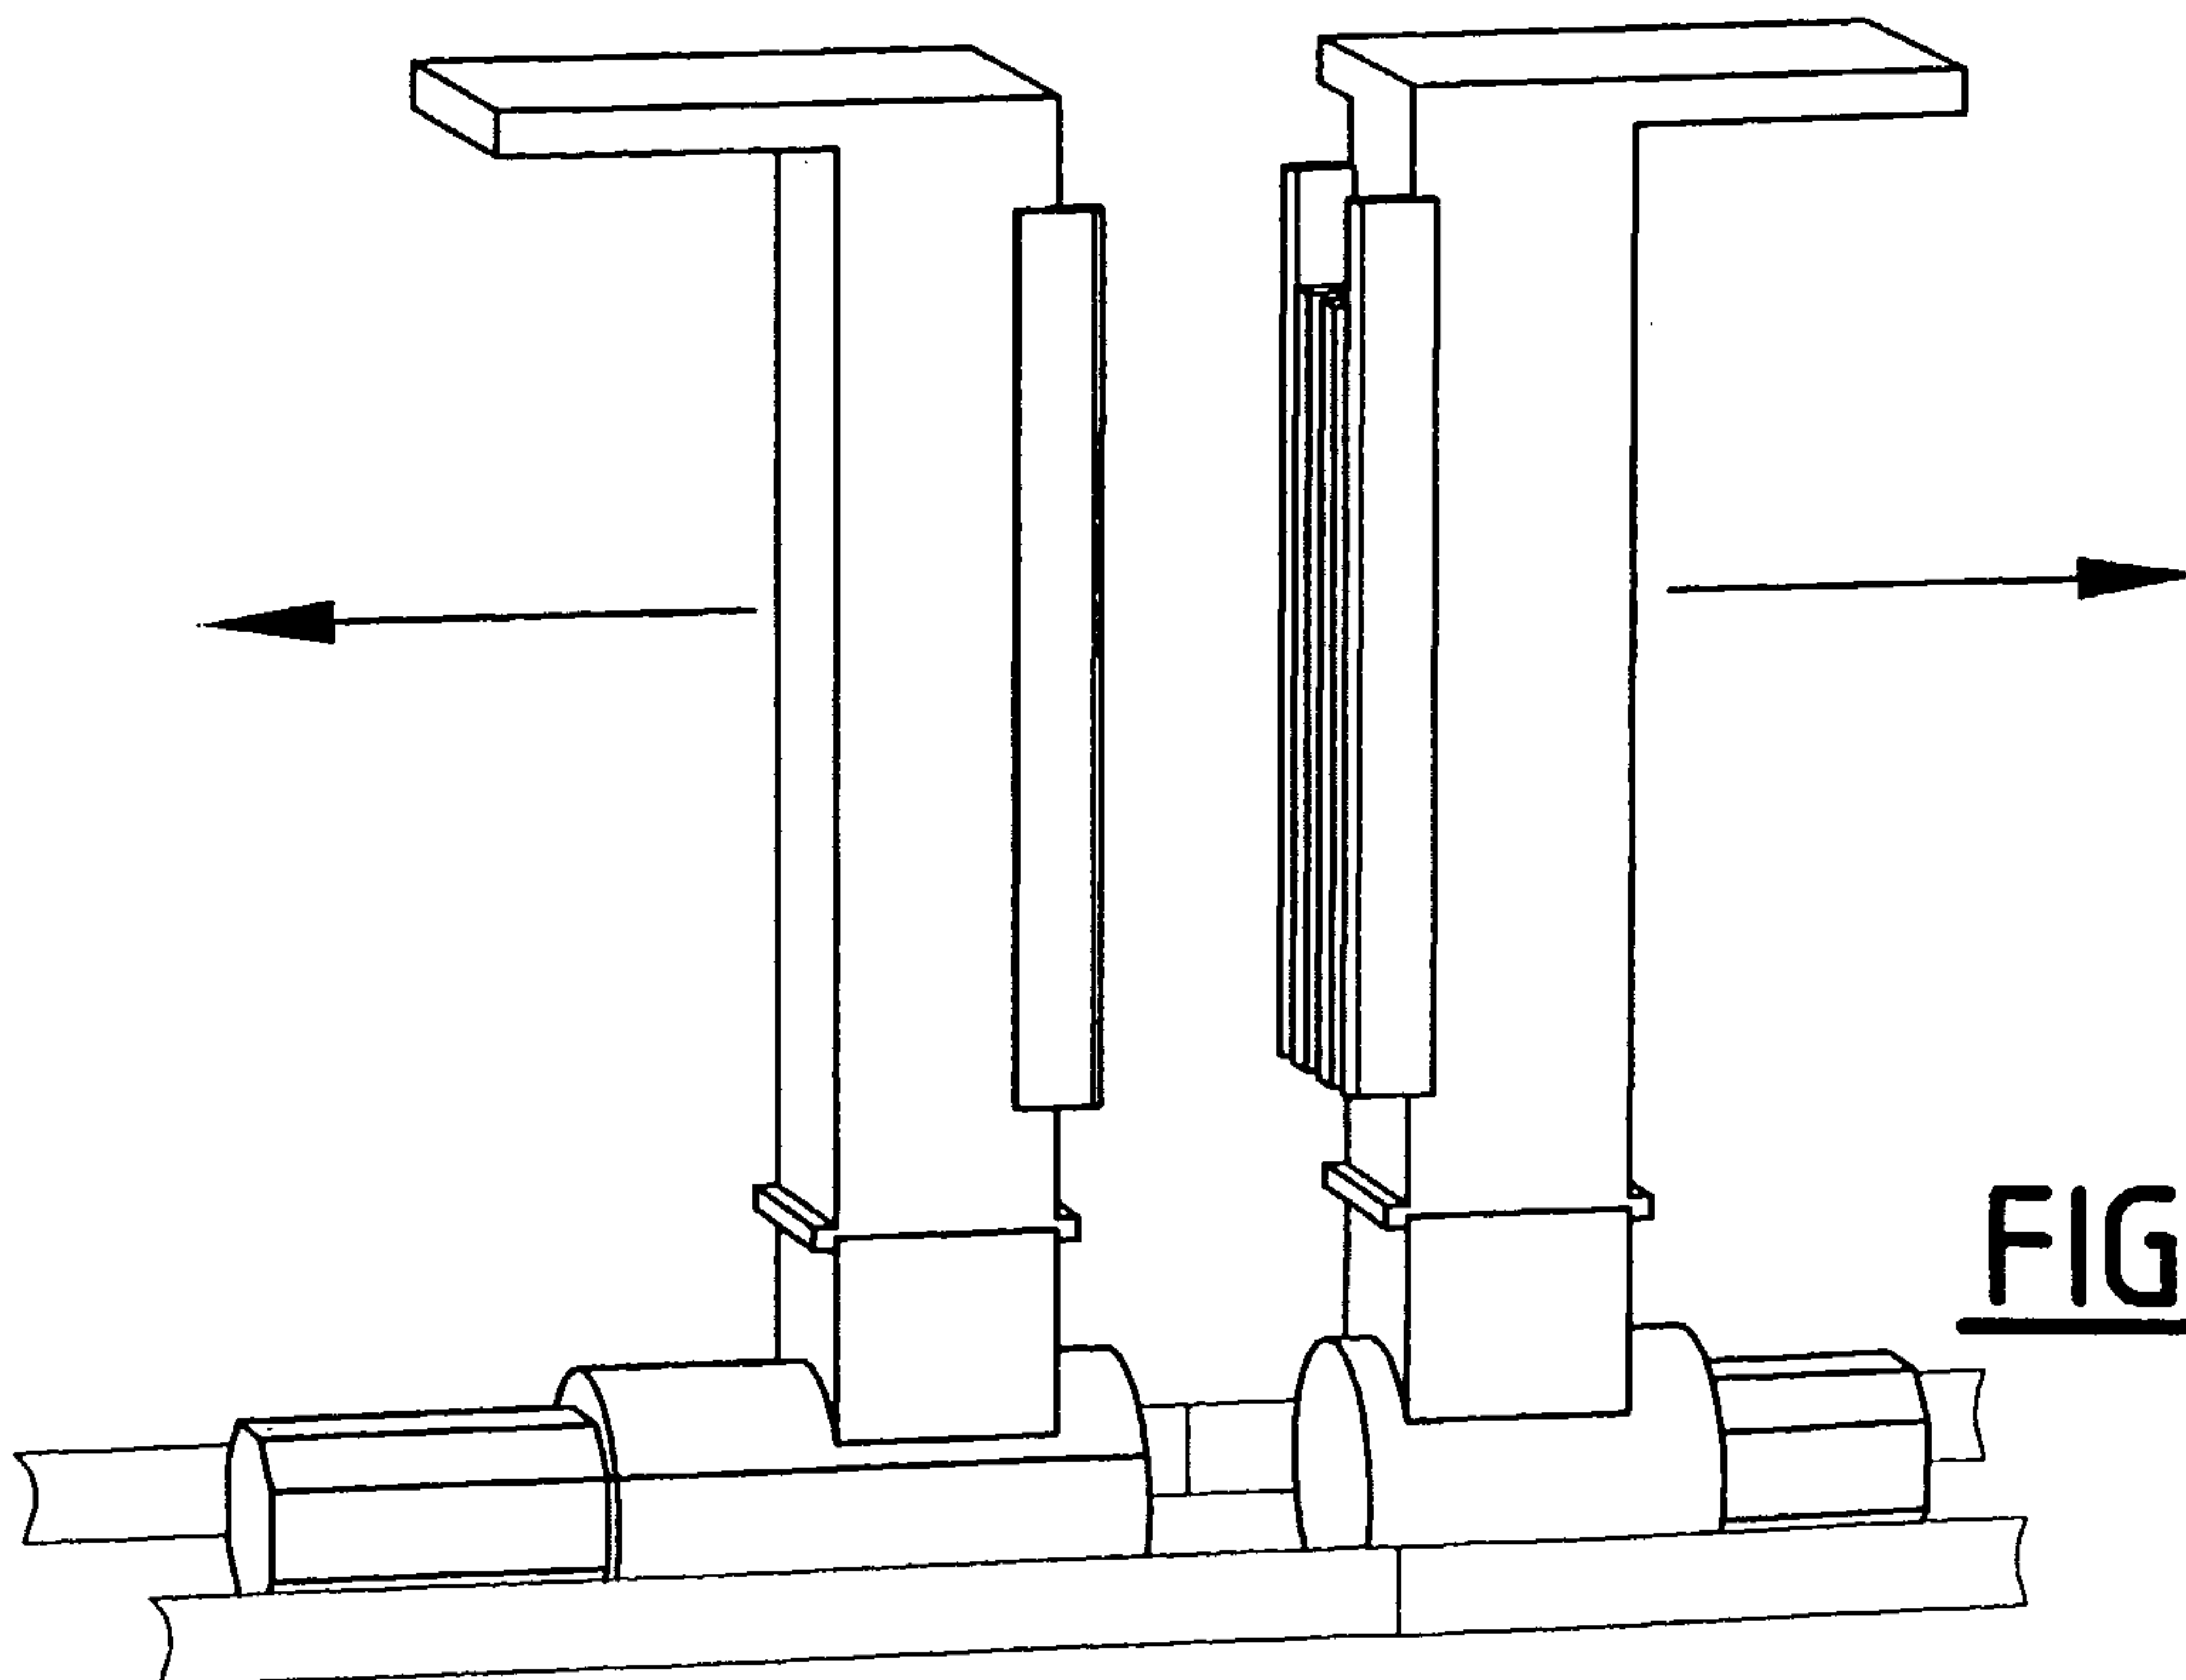FIG. 4CFIG. 4D

6/8

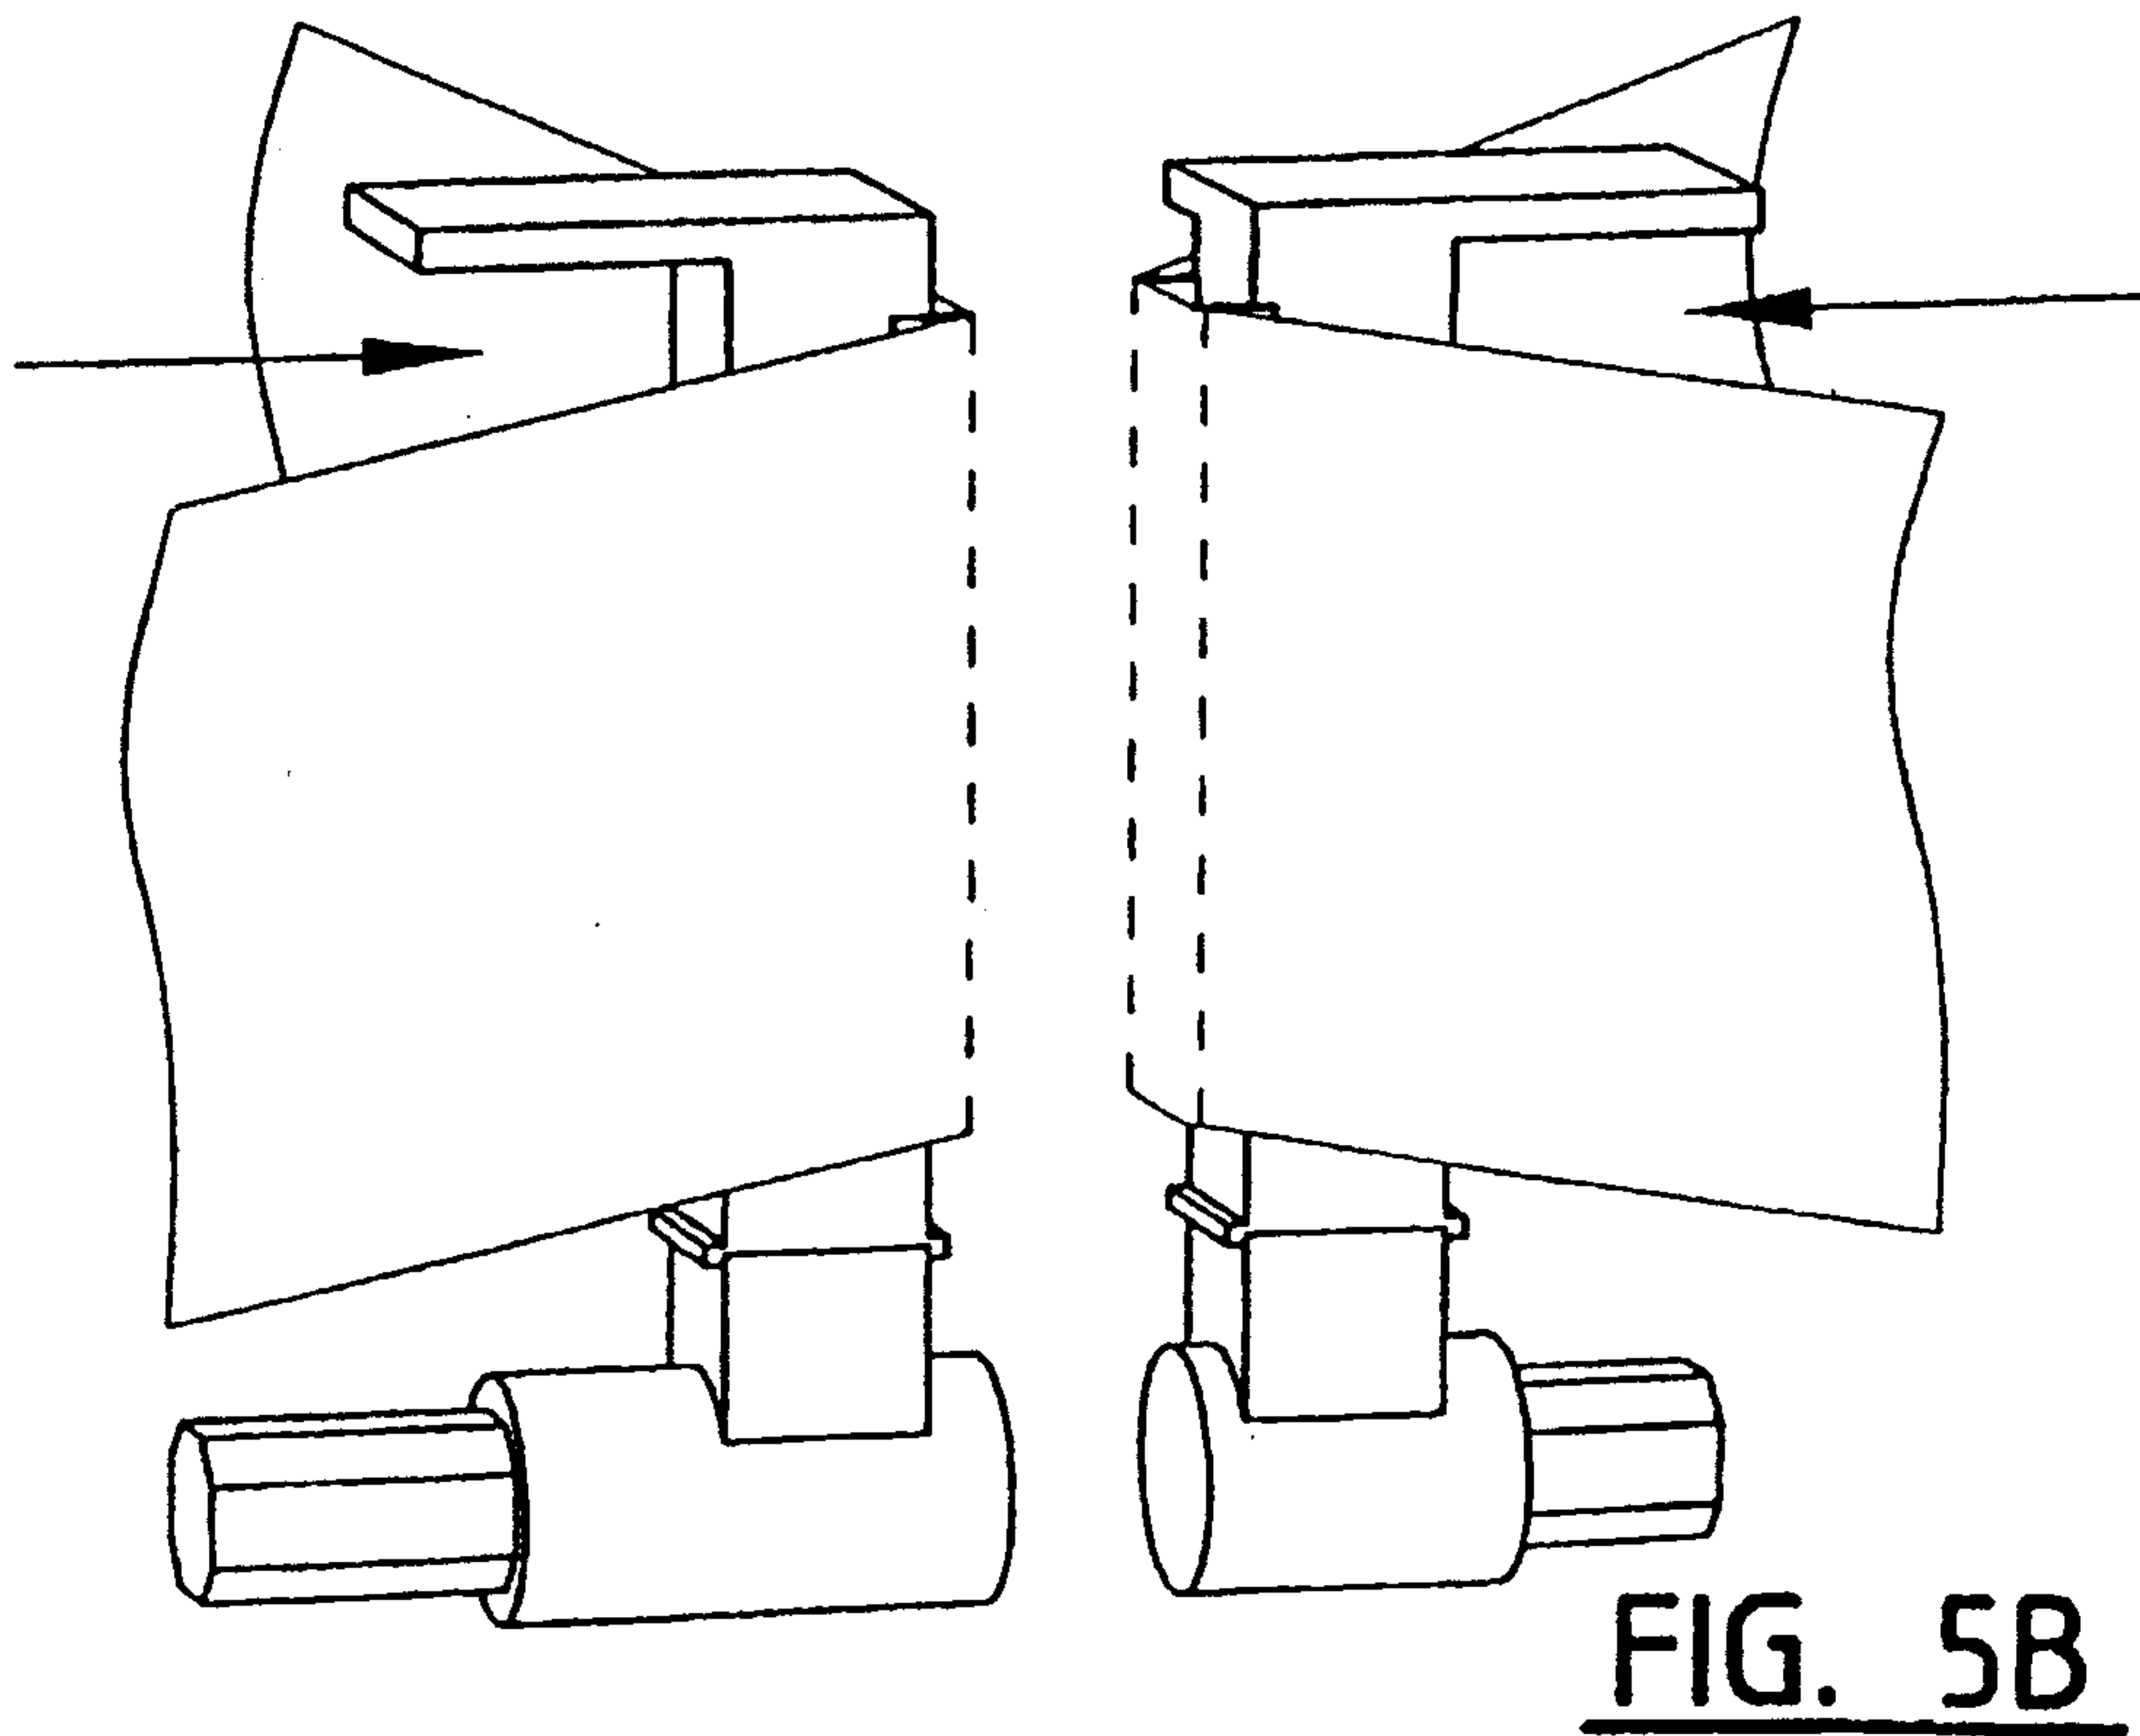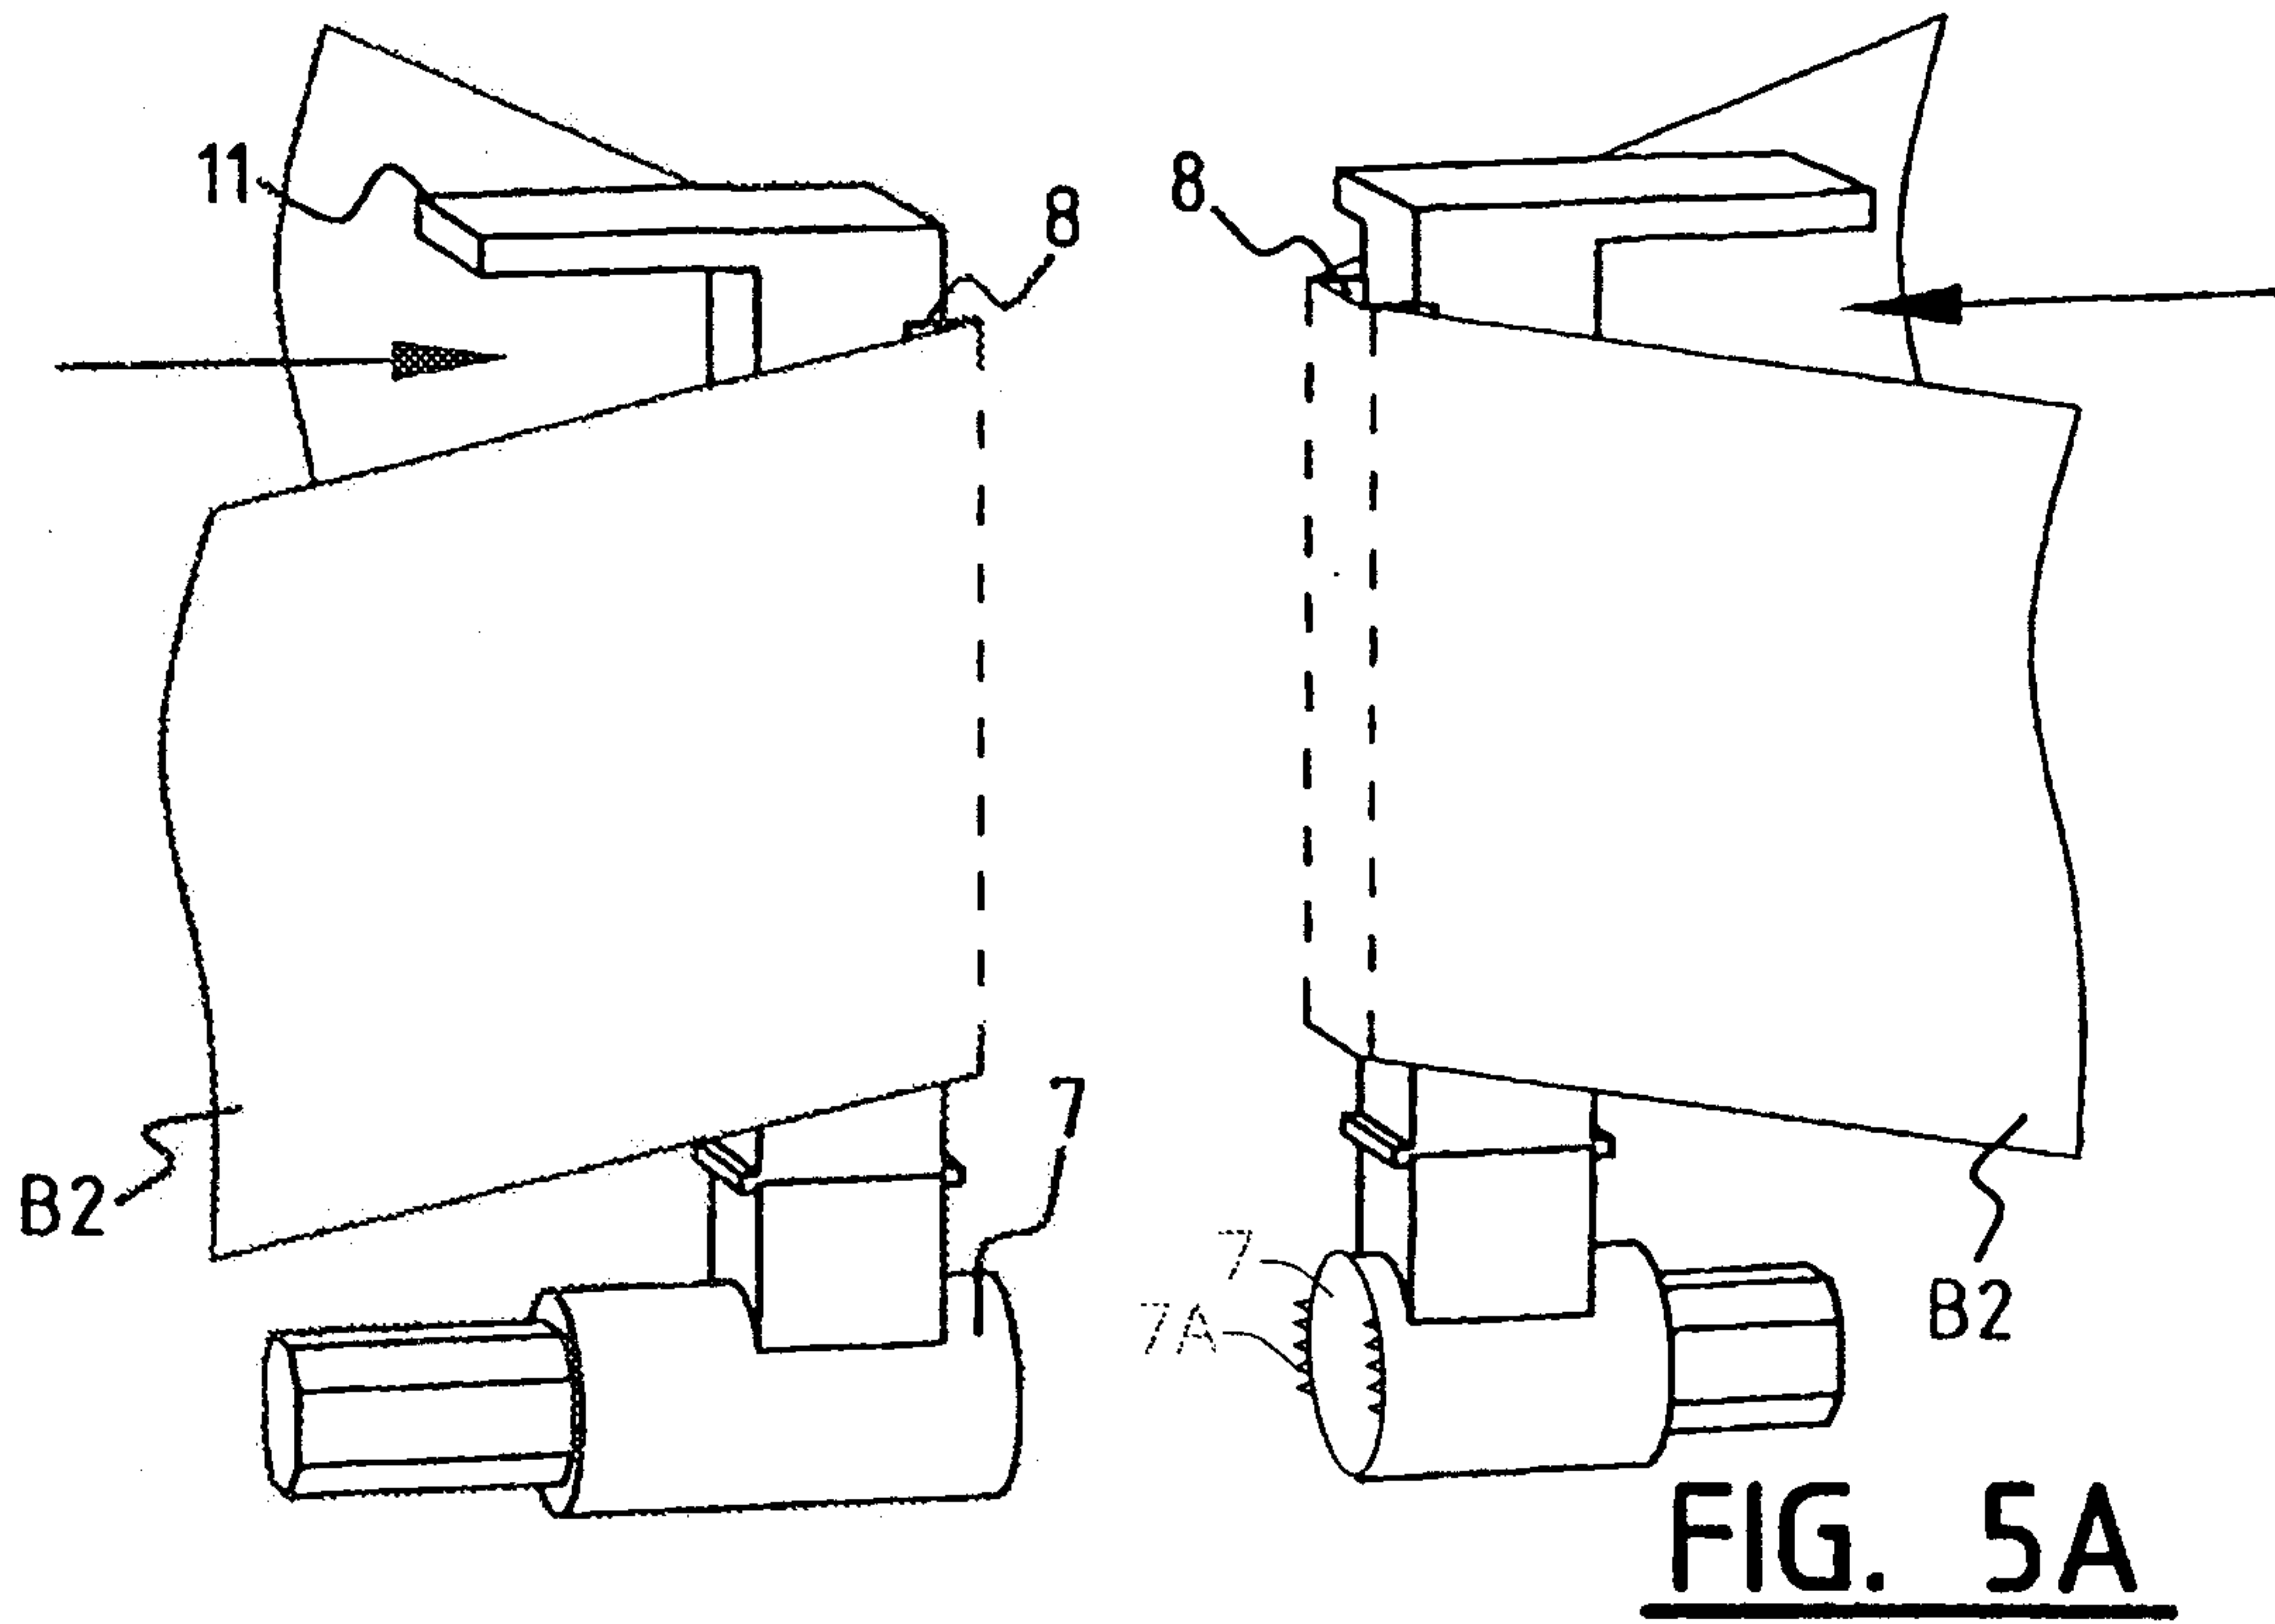

7/8

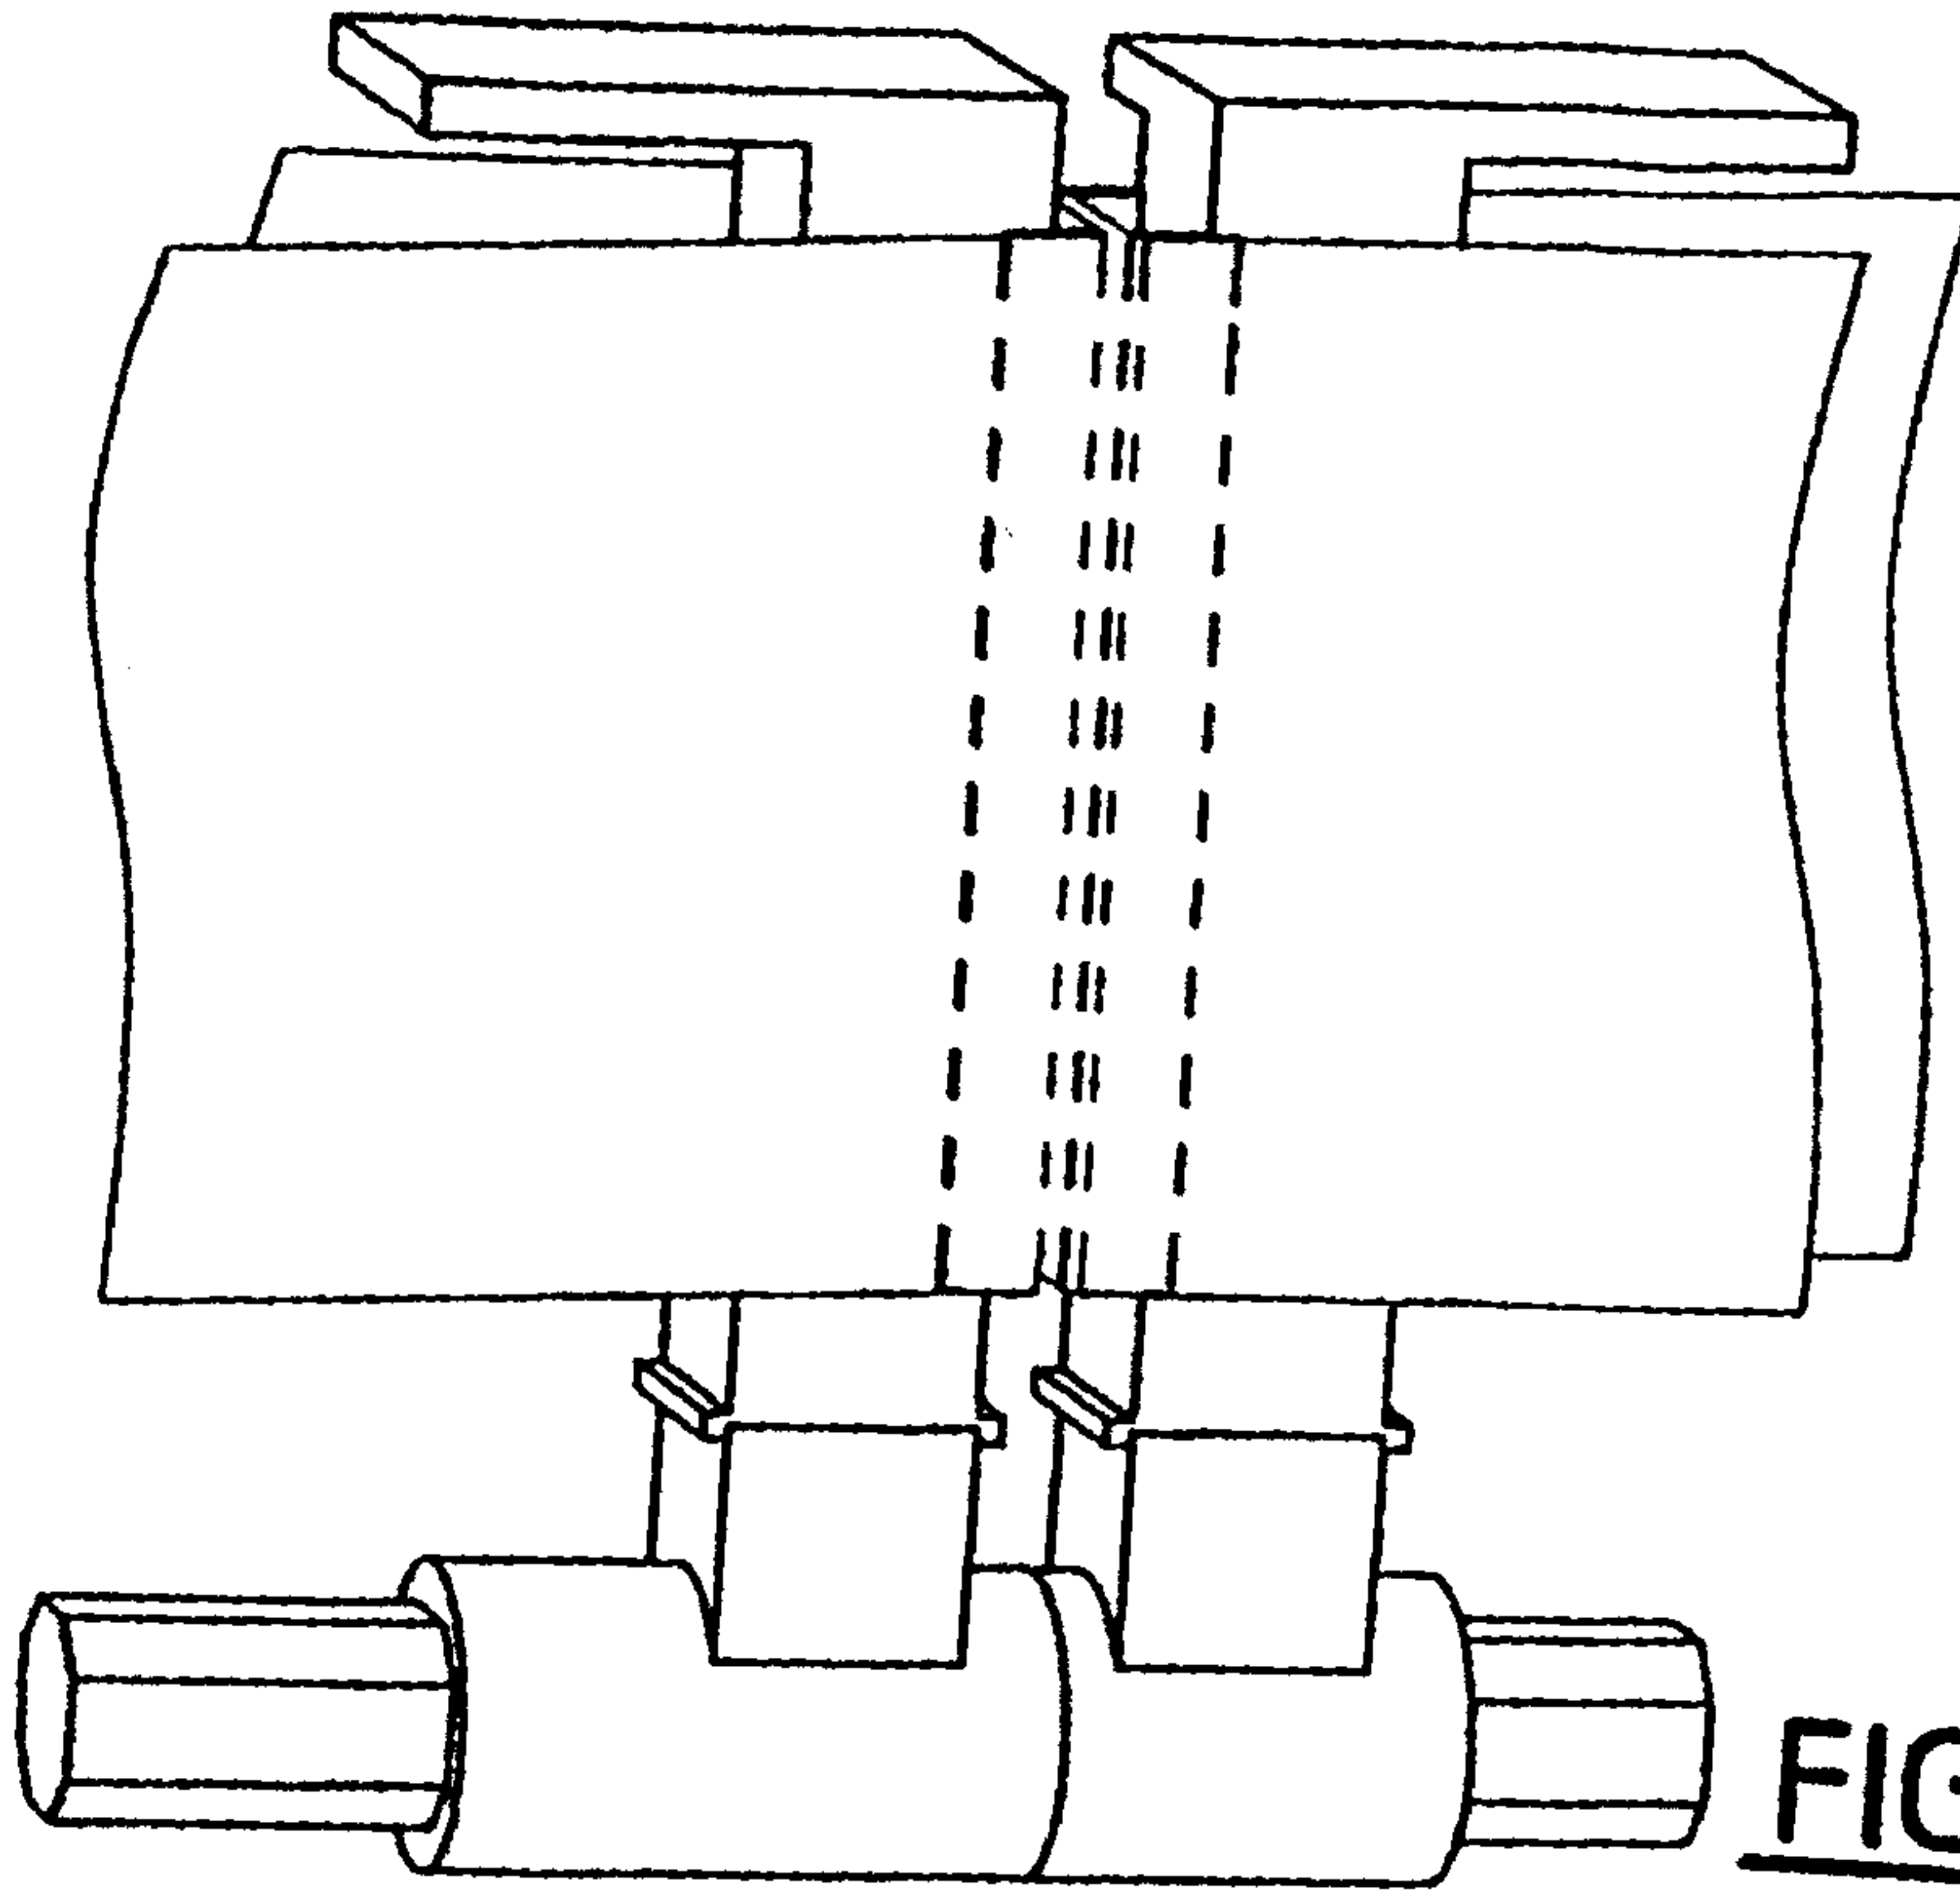


FIG. 5C

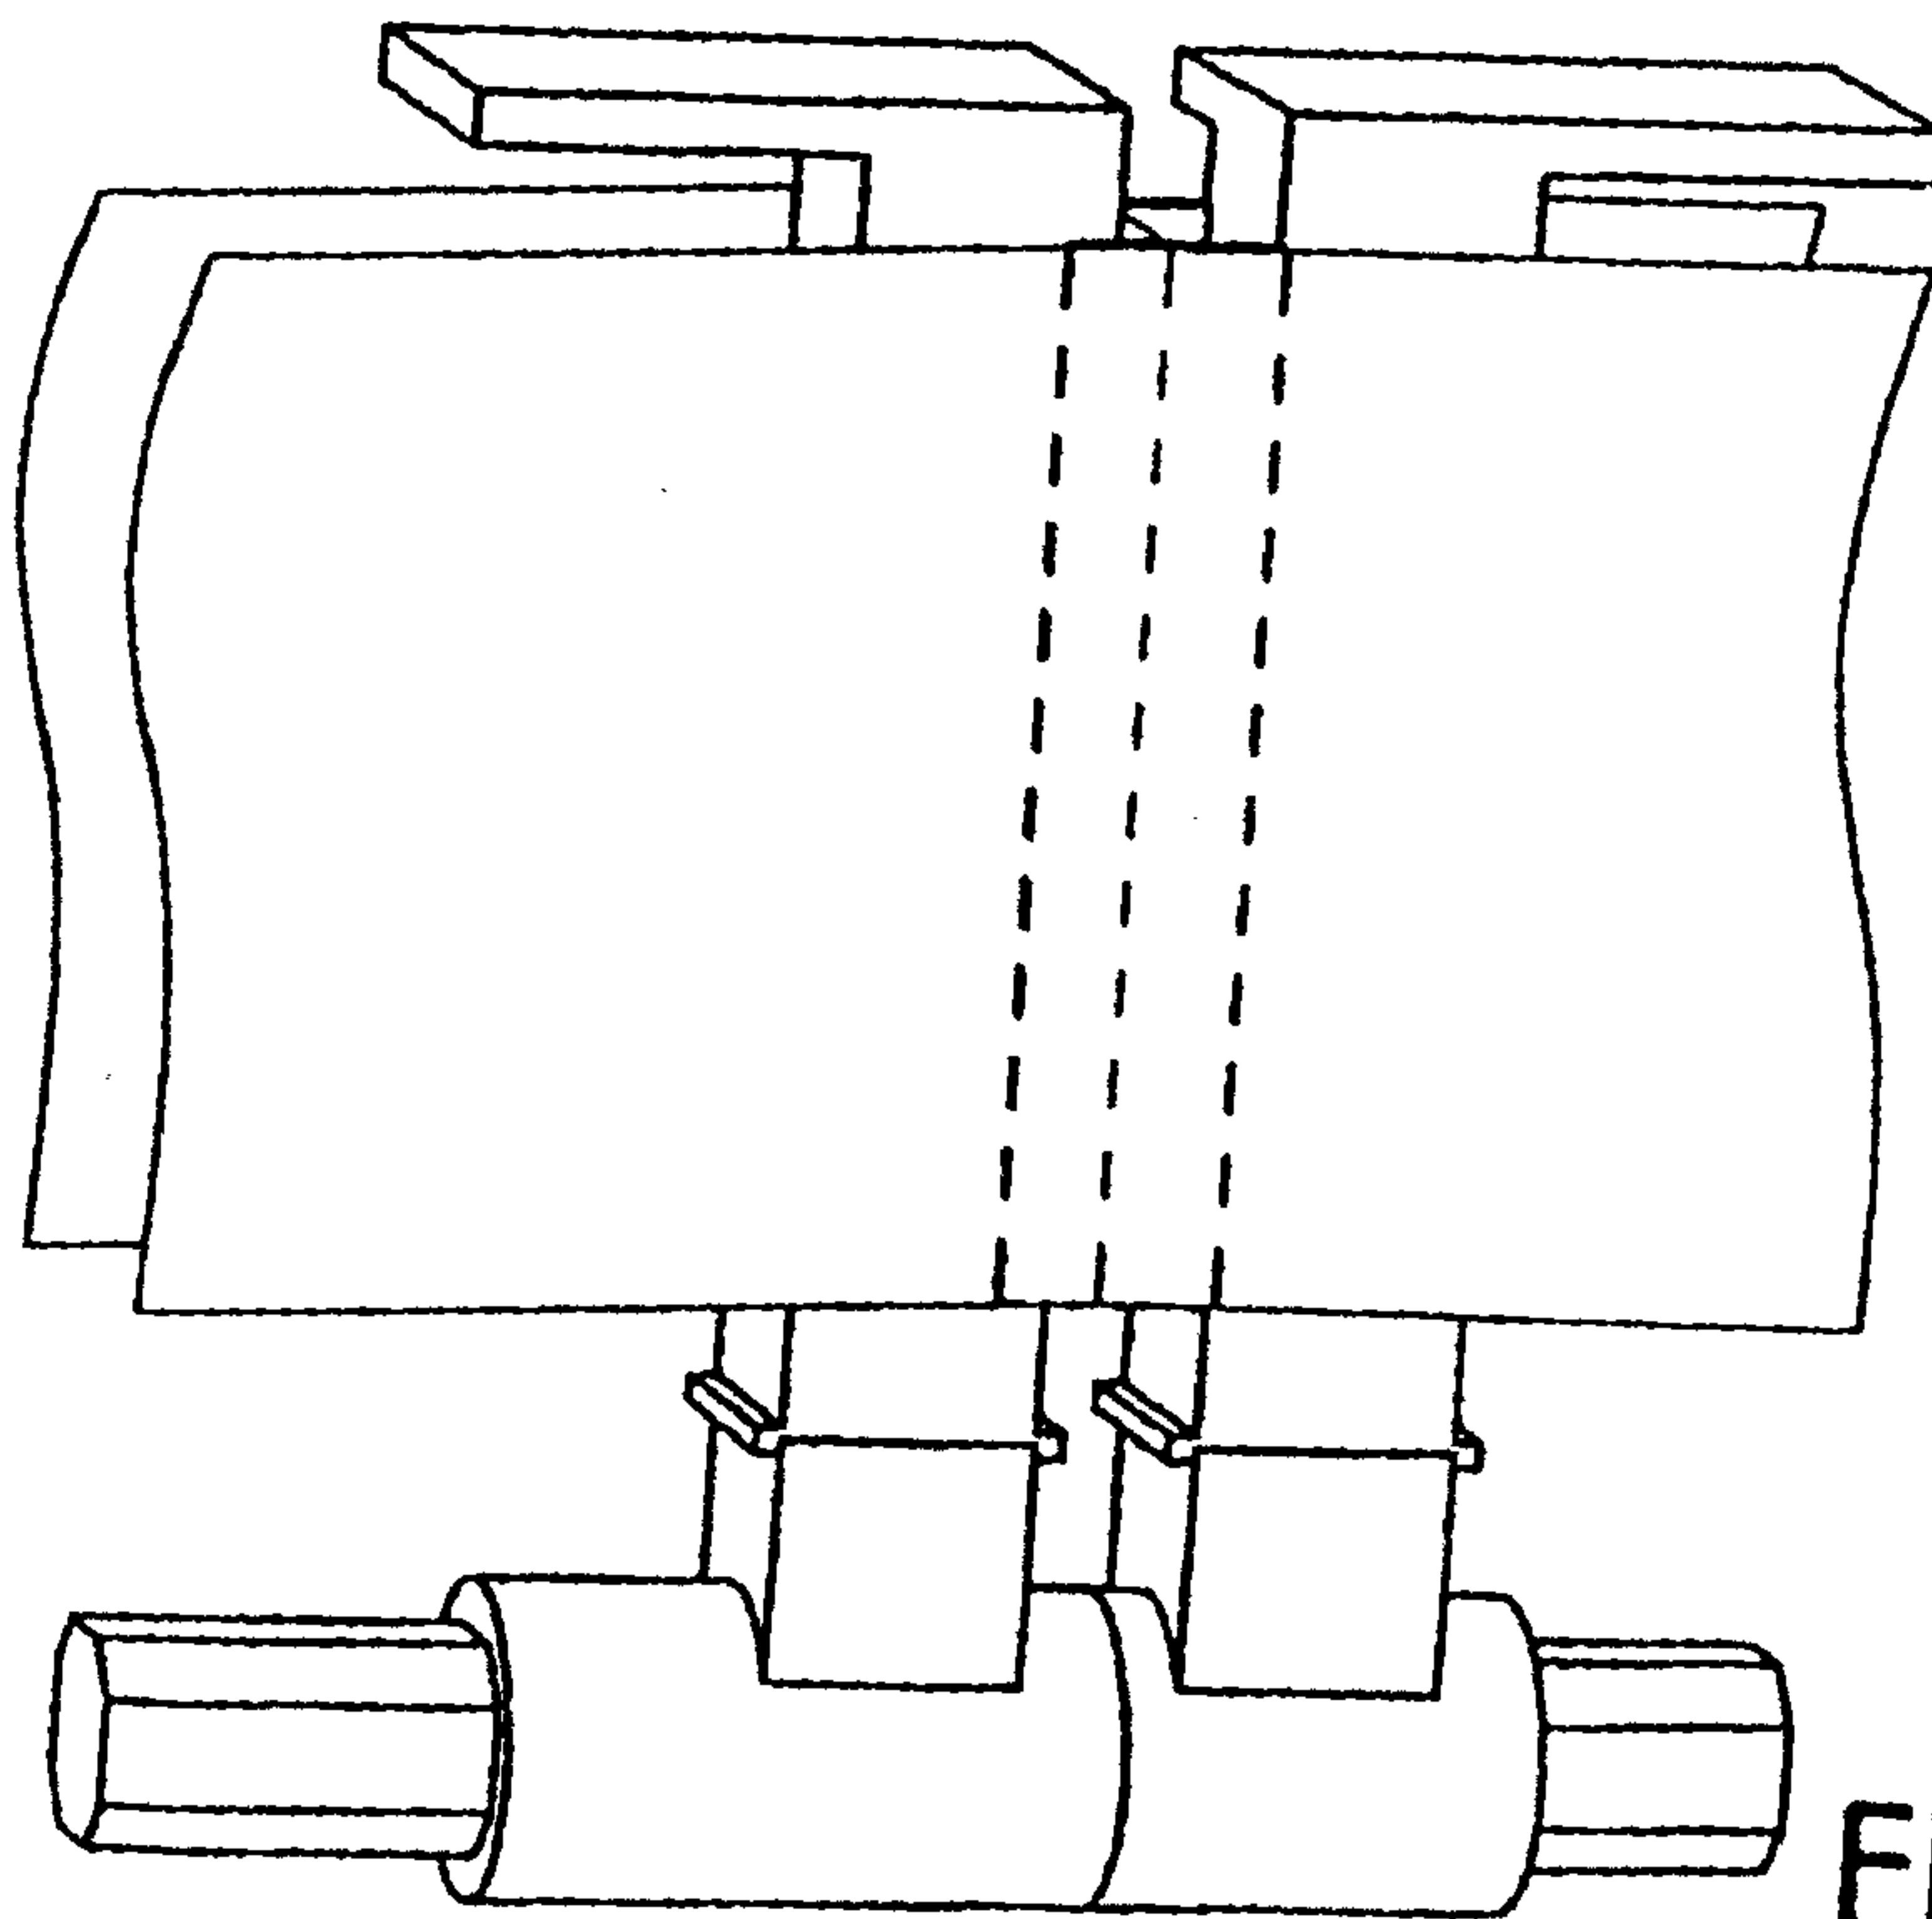


FIG. 5D

8/8

