



(11) EP 1 145 164 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
17.06.2009 Bulletin 2009/25

(51) Int Cl.:
B41J 17/36 (2006.01)

(21) Application number: **00911626.0**

(86) International application number:
PCT/US2000/001697

(22) Date of filing: **21.01.2000**

(87) International publication number:
WO 2000/043932 (27.07.2000 Gazette 2000/30)

(54) METHOD AND APPARATUS FOR COMMUNICATING BETWEEN PRINTER OR LAMINATOR AND SUPPLIES

VERFahren UND VORRICHTUNG ZUR KOMMUNIKATION ZWISCHEN DRUCKER ODER LAMINATOR UND ERSATZTEILEN

PROCEDE ET APPAREIL DE COMMUNICATION ENTRE UN DISPOSITIF D'IMPRESSION OU A LAMINER ET DES ACCESSOIRES

(84) Designated Contracting States:
DE ES FR GB IT

- **CAMPION, Kevin, R.**
Minnetonka, MN 55345 (US)
- **UPIN, Jeffrey, D.**
Edina, MN 55436 (US)
- **LENZ, Gary, A.**
Eden Prairie, MN 55346 (US)
- **DUMITRU, Aurelian**
Round Rock Texas 78664 (US)

(30) Priority: **25.01.1999 US 117123 P**

(74) Representative: **Hoarton, Lloyd Douglas Charles et al**
Forrester & Boehmert
Pettenkoferstrasse 20-22
80336 Munich (DE)

(43) Date of publication of application:
17.10.2001 Bulletin 2001/42

(60) Divisional application:
04028859.9 / 1 525 991

(56) References cited:

EP-A- 0 562 979	EP-A- 0 887 197
EP-A- 0 979 736	WO-A-99/49379
US-A- 5 755 519	

(73) Proprietor: **Fargo Electronics, Inc.**
Eden Prairie, MN 55344 (US)

Remarks:

WIPO A3 publication data is not currently available.

(72) Inventors:

- **KLINEFELTER, Gary, M.**
Eden Prairie, MN 55347 (US)
- **PAULSON, Bradley, A.**
Northfield, MN 55057 (US)
- **DUNHAM, Matthew, K.**
Eagan, MN 55123 (US)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionBACKGROUND OF THE INVENTION

[0001] The present invention relates to electronic printers and laminators of the type used to print or laminate a substrate. More specifically, the present invention relates to the transfer of data between the electronic printer or laminator and supplies which are used during operation of the printer.

[0002] Electronic printers are used for printing onto the substrate. Examples of such printers include bubble jet, dye sublimation, impact, and laser printers. In general, all such printers require some type of supply for their continued operation. Examples of such supplies include ribbon, ink, toner cartridge, print medium, overlaminate film, cleaning tape, cleaning roller, etc.

[0003] U.S. Patent No. 5,755,519, issued May 26, 1998 and entitled "PRINTER RIBBON IDENTIFICATION SENSOR" describes an identification system for a hub which carries a ribbon. This allows the printer to receive information from the ribbon core such as the type of ribbon or the particular section or panel of ribbon being printed. The information is encoded magnetically or through bar coding. However, the information carried on the ribbon is fixed and can not be changed during use. Another prior art arrangement is disclosed by EP-A-395.320.

SUMMARY OF THE INVENTION

[0004] According to one aspect of the present invention, there is provided an identification card printer comprising: a card supply containing individual cards; rollers driven by motors configured to drive one of the cards in forward and backward directions; a print supply including: a core supported for rotation; a print ribbon wound on the core; and an alterable ID tag circuit mounted to the core and having a memory containing information relating to parameters of the print ribbon including a private key used in a process of digital encryption to prevent unauthorized use of the supply; a thermal print head configured to engage the print ribbon and print on the card driven by the rollers; an encoder configured to detect rotation of the core and generate a count signal corresponding to the rotation of the core; and a printer controller adapted to communicate with the encoder and the memory of the alterable ID tag circuit, read the supply information from the memory and write supply information to the memory of the alterable ID tag circuit, wherein the supply information includes a number of prints remaining that is based on the count signal.

BRIEF DESCRIPTION OF THE DRAWINGS**[0005]**

Figure 1 is a schematic representation of a thermal printer head and ribbon shown in use with a ribbon

index code and code sensor and schematically showing an alterable core.

Figure 2 is a schematic representation of a printer ribbon core and control system using Radio Frequency circuit in a core schematically shown.

Figure 3 is a schematic representation of a Radio Frequency transmitter/receiver and ID tag for ribbon identification.

Figure 4 is a fragmentary schematic perspective view of an alternate embodiment of the invention.

Figure 5 is a fragmentary schematic perspective view of an embodiment that uses light signals for providing and receiving information.

Figure 6 is a simplified block diagram showing a printer in accordance with one embodiment of the present invention

Figure 7 is a simplified block diagram showing a printer supply including a radio frequency identification tag in accordance with one embodiment of the present invention.

Figure 8 is a more detailed block diagram of the printer of Figure 6 and also illustrates an embodiment with a laminator.

Figure 9 is an example memory map for use with embodiments of the present invention.

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENTS

[0006] In Figure 1, a schematic representation shows a printer ribbon 12 provided from a supply roll or core 14 that would include the alterable, embedded identification tag or circuit (ID tag) shown generally at 15. The ribbon 12, for purposes of illustration, extends to an optional take up roll 16, the core of which also could have an ID tag if desired. The ribbon 12 passes over a printing platen 18 that is rotatably driven by a motor 20, under central control from a printer controller 22. The take up roll 16 can be driven by a motor 17 if desired and that can be synchronized with a drive of the roller 14 by the printer controller 22. A card or substrate 24 to be printed on is driven forward and backward on suitable rollers 26 with driver motors 30 that synchronize it with the movement of the individual color panels or frames that repeat in a sequence or group on the ribbon 12.

[0007] A conventional thermal print head 34 can be supported on a printer frame 36, relative to platen 18. The printing operation is synchronized through controller 22 using a card sensor 32 so that the card 24 would be printed appropriately. The card 24 will come from a card supply and card feeder 23 in a conventional manner using the powered rollers 26 driven by stepper motors 30 as controlled by the printer controller 22. The controller 22 also controls motor 20 for platen 18.

[0008] In Figure 2, a schematic arrangement of a ribbon core, ID tag, transmitter/receiver (sensor) and the controls is shown. The supply roll 14 is illustrated schematically, and it shows the ribbon or web 12 coming off

the supply roll.

[0009] A Radio Frequency transmitter/receiver circuit head or antenna (or read/write circuit, head or antenna) 42 is positioned adjacent to one end of the ribbon supply roll 14, and the Radio Frequency ID tag 15 is illustrated schematically as being embedded in the core 14A of the ribbon supply roll. The antenna 42 is positioned closely adjacent to the core 14A of the ribbon supply roll 14, so that it can transmit to and receive from ID tag 15 low power Radio Frequency (RF) signals. However, with more powerful signals or more sensitive electronics, the spacing can be any suitable distance.

[0010] At the opposite end of the ribbon supply roll 14, an encoder system for encoding supply roll rotational information is illustrated at 50. This type of encoder for roll position can be used for cooperating with the ID tag information to provide records or information as to ribbon usage and the like back to the ID tag so that when the ribbon supply roll is removed from a printer, and subsequently placed in another printer, information such as the number of prints remaining, and the number of prints used can be provided, as well as ensuring that the position of the roll is proper when installed. The encoder 50 is well known and includes an encoder wheel 55 that has a plurality of apertures 57 that will transmit light. The apertures 57 are separated by opaque or light blocking segments. The wheel 55 is supported for rotation with the ribbon supply roll 14. A suitable bearing arrangement as shown at 59 can be used if desired. Wheel 55 is mounted on a shaft that has a drive coupler 60 thereon, which is provided with a suitable key that will interfit with an end slot 64 in the core 14A. The wheel 55 is driven by the ribbon supply roll 14 when the drive parts are engaged.

[0011] An optical sensor illustrated schematically at 51 has a light source 53 and a receiver 54. The receiver 54 as shown is a light sensitive diode, so that each time an opening 57 moves between the light source and the receiver there is a pulse that indicates the rotational position of the ribbon supply roll 14. The number of pulses received by circuitry 65 indicates the amount of rotation, and the circuit keeps a count of the number of pulses. These count signals are provided to a microprocessor 70 that forms part of the printer controller 22. Of course, more complex techniques can be used, for example, if the ribbon undergoes bidirectional movement.

[0012] The printer controller 22 can include an input circuit shown at 72 that can provide both manual inputs for printer control of the printer-head 34, and signal inputs from the ID tag, or a key card input directly to the microprocessor.

[0013] The printer controller 22 can have a key card input circuitry 74 in which a programmed key card or "smart" card key 76 can be inserted to ensure that the printer, and thus the printer ribbon, will not be operated unless the correct key card has been inserted and the correct algorithm interpreted for unlocking or enabling the printer controller 22. The use of a smartcard is set forth in U.S. application Serial No. 09/263,343, filed

March 5, 1999 and entitled "SECURITY PRINTING AND UNLOCKING MECHANISM FOR HIGH SECURITY PRINTERS". Key card inputs are known in the field, and can comprise a number of different signals that can be

5 used in an algorithm to ensure that the printer controller would be unlocked or enabled only when the appropriate card is inserted. The card also can include information that can be correlated to a checking of the signals from the ID tag or controller and from the key card by the Radio Frequency transmitter/receiver 42 to insure that the appropriate ribbon has been inserted into the printer before the printer controller is unlocked for use. This can be used to lock the printer and ribbon or laminate so that only the proper laminate, in the proper order can be used 10 in a high security implementation. This can also be used to match a person with a password to a ribbon.

[0014] Additionally, the ribbon information that is coded onto the ribbon by the bar codes or similar indicia 58 and read from the infrared sensors 56 can be fed directly

15 to the microprocessor 70 of the printer controller so that a wide range of information is available to the microprocessor 70 before enabling the printer. One such technique is described in U.S. patent application Serial No. 09/309,391, filed May 10, 1999 and entitled "ID CODE FOR COLOR THERMAL PRINT RIBBON.

[0015] The microprocessor can thus provide various information back to the Radio Frequency transmitter/receiver or read/write antenna 42. Additionally, the microprocessor can verify the ribbon against the various settings of the printer and prevent operator error.

[0016] Figure 3 is a schematic representation of a typical RF embedded circuit ID tag 15, which includes a small wire loop antenna 90, and a chip 92 on which circuit components are provided. The chip 92 can include memory such as that shown at 93, and a transmitter/receiver circuit 94 of very low power capacity. The memory can act as a counter and be decremented for each print made, for example so the prints remaining are known, and a binary code unique to the ribbon can be stored. Figure 3

35 shows the read/write circuit antenna 42 positioned adjacent to the ID tag 15. The antenna 42 has an antenna portion 97 that can transmit and receive RF signals to and from the antenna 90 on the circuit for the ID tag 15. The antenna or read/write head 42 includes circuitry 98

40 that provides signals to and from the microprocessor 70. The transmitter/ receiver or read/write antenna 42 can provide signals that will energize digital components on the ID tag for transmission of data from the counters or memory 93 back to the circuit 98 on the antenna 42, which indicates the status of the ribbon on core 14A, and some identification parameters, such as the serial number, lot code, date code, password or errors. The information can indicate the type of ribbon on the roll, or include a code which permits operating with only a specific printer or group of printers and similar information.

[0017] It should be noted that the transmitter/receiver 42 can be a fixed installation, as stated, that would transmit through the packaging used for the ribbon, when re-

ceived from a supplier, so that the ID tag 15, when using RF transmissions, could be preprogrammed with identification as to type of ribbon and the like, subsequent to packaging without breaking the package open, either by the printer manufacturer or by a distributor. The type of ribbon can be coded in, including information about the density of the dye in individual panels and when the ribbon is placed into a printer. This information can be read out by the transmitter/receiver 42 and provided to the printer controller microprocessor 70 to adjust the print head for the heat level needed for different densities of panels of ribbon to improve image quality. When ribbon information is correlated with the encoder circuitry 50 information through the microprocessor 70, the information about the number of prints that remain can be written to the ID tag 15 at the end of the printing cycle if the ribbon is to be removed from the printer, so that the next time that the ribbon is placed into a printer the exact number of prints that are left is known. The spool or roll size changes as the ribbon is used and the torque and tensioning of the ribbon roll drive motors can be changed to adjust for decreasing ribbon spool size and weight to improve image quality.

[0018] Further, the printer 34 and the controller 22 can provide date code information that can be encoded into the ID tag 15, using antenna 42 so that it will be known if the ribbon shelf life has expired. The ID tag 15 can be programmed by antenna 42 with password information so that particular key card 76 could have to have a password that must match with a password on the ID tag 15 for the ribbon before the printer would be enabled. Thus a particular key card would have to be inserted before the printer would work with a particular ribbon. This is especially useful if there are custom holograms used for laminating the card. This is advantageous because it provides an additional level of security when used in sensitive installations such as military installations or printing driver licenses. The ID tag will further permit determining whether or not a ribbon can be used with any particular printer. The card 76 further can be used in connection with the ID tag 15 so that only a set number of prints can be issued by a single card 76, which information is presently used on many cards, limiting the uses to such set number. Other features can include information from a printer programmed into the ID tag 15 which indicates the type of printer used last. This information could be erased and reentered when the print ribbon is again used. The ID tag 15 is preferably RF programmable and readable.

[0019] When coordinated with the information about the individual frames received from the infrared sensor 56, identification, positioning, and operations of the ribbon can be completely controlled by the printer.

[0020] A further modified form of the invention is illustrated in Figure 5, where a core 14A is provided with a light sensitive circuit ID tag 80 that has light sensitive circuit elements that are in line to receive light or radiant energy from a light signal source circuit or signal circuit

head 82, that transmits light with sufficient intensity to provide a signal to change a state in the tag 80 to record information. The light transmitted can be in the infrared range or in the visible light range. The light signal source

5 also can receive signals from the ID tag 80 if the tag 80 is powered to provide light. A controller 84 controls the source or head 82 and can provide phase shift inputs from source 86, control of frequency from source 88, pulsing codes from source 90 and it can control intensity.

10 **[0021]** Figure 6 is a simplified block diagram of an electronic printer 120 which illustrates more general aspects of the present invention. Printer 120 includes a controller or microprocessor 122 which is used to control print head 124 based upon data received through bus 126 which

15 couples to a PC or other remote unit (not shown). Microprocessor 122 can receive data through input device 128 and can store data in memory 130. Output information is provided through output display 132. Printer 120 also includes a transceiver 140 in accordance with an

20 embodiment of the present invention for use in coupling to a radio frequency identification (RFID) tag 142 carried on supply 144. Transceiver 140 is configured to transfer power through a non-physical link to a radio frequency circuit carried in RFID tag 142. This causes RFID tag to

25 responsively transmit data over a non-physical link to transceiver 140. Transceiver 140 includes an antenna 146 having a coil 148 and a capacitor 150. Antenna 146 couples to a radio frequency amplifier 152 which receives supply data from tag 142 and provides the supply data

30 to controller 122.

[0022] Supply 144 can be any type of supply which is used with electronic printer 120. For example, supply 144 can comprise ribbon, intermediate transfer film, hologram material, toner, cleaning tape or ink such as for use

35 with an ink jet or other type of printer. The RFID tag 142 can be any such RFID tag such as those which can be purchased commercially. One type-of RFID tag is available from TEMIC Semiconductors a division of ATMEL located in San Jose, California. For example, the TEMIC

40 Model No. TK5550 is one such RFID tag.

[0023] Figure 7 is a simplified block diagram showing RFID tag 142 coupled to printer supply 144. RFID tag 142 includes an antenna 160 formed by an electrical coil which couples to a power supply 162 and transceiver

45 circuitry 164. A controller 166 couples to memory 168 and to transceiver circuitry 164. A tuning capacitor 170 is also provided in series with the coil 172. In operation, coil 148 of transceiver 140 is powered by RF amplifier 142 such that an inductive coupling occurs with coil 172

50 of RFID tag 142 when the two are in close proximity. However, in another embodiment a sufficiently strong signal or sufficiently sensitive circuitry are used whereby the tag 142 can be spaced a distance from coil 172. In one embodiment a 125 KHz signal is used to drive coil 148 which then inductively couples to coil 172.

[0024] Power supply 162 generates a stable power output used to power all of the circuitry within RFID tag 142 received through this inductive coupling. By modu-

lating the signal, data can be transferred between transceiver 140 and RFID tag 142. Data from RFID tag transceiver 164 is provided to a controller 166. Controller 166 can record information or read information from memory 168. This configuration allows bi-directional communication between the RFID tag 142 and transceiver 140. In another embodiment, an internal power source such as a battery is used to power tag 142. In another embodiment, a physical connection to the printer or laminator is used to power tag 142.

[0025] Printer supply 144 can be any type of supply which is used by printer 120 in the printing process. For example, if printer supply 144 is a ribbon which could be carried on a spool or in a cartridge, various data can be stored in memory 168. This data includes the make and supplier of the ribbon such that operation of print head 124 can be optimized (i.e., the proper thermal printer head voltage can be optimized for a given dye carried on the ribbon). Further, a date code can be stored in memory to monitor the aging of the ribbon or other material. A lot code and material code can be stored in memory 168 for use in optimizing printing. Information regarding the ribbon panel or ink jet ink quantity can be stored in memory 168 and updated during use of the ribbon or ink such that the total quantity of remaining ribbons or ink can be read by printer 120 and stored in the supply tag. Additionally, information regarding ribbon quantity can be used when adjusting web tension of the ribbon as it moves between a supply spool and a take-up spool or in the case of ink jet, adjust the motor control for the amount of ink weight. Ribbon panel size information can be stored in memory 168 and used to provide diagnostics if the ribbon panel size does not match the size of the substrate. A part number stored in memory 168 can be used for diagnostics and for reordering additional supplies.

[0026] If supply 144 is an intermediate transfer film, supplier, date code information, lot code and material code information can be stored in memory 168 as can film panel quantity information, film panel size and part number. Film thickness information stored in memory 168 can be used to adjust the print head or laminator for the correct heat transfer level and use in controlling web tension.

[0027] If supply 144 is hologram or an OVD (Optical Variable Device) supplier, date code, lot code and material information, film quantity, film panel size, material thickness and/or part number information can be stored in memory 168 as described above. Additionally, a private key for digital encryption can be stored in memory 168 and used as a security key to prevent unauthorized use of the material. For example, printer 120 will not be able to print unless the correct security key is received from the PC through bus 126 which is used to unlock the material using the private key stored in memory 168.

[0028] If supply 144 is an ink jet ink supply or toner supply, supplier, date code, lot code and material information, ink/toner supply quantity and part number information can be stored in memory 168. Supply 144 can

also comprise a laminate material for a laminator and memory 168 can store information such as lot code and material information, date code, supplier, material thickness, size, quantity, lamination and characteristics in heating requirements or other information. Similarly, if supply 144 is a cleaning web for cleaning rollers in a printer or laminator, similar information can be stored in memory 168. Additionally, memory 168 can contain the number of times the cleaning supply has been used such that an indication can be provided that the supply should be replaced.

[0029] If supply 144 comprises a substrate or print media, such as an identification card, memory 168 can be used to store information relating to the card size, thickness and substrate materials so that printing or lamination can be optimized for these materials. Additionally, memory 168 can be used to store coded security information for an identification card. For example, a security code stored in memory 168 can read by other devices such as a security door and used to gain access to a secure location by using the identification card. This data can also be used to interlock with smart chip information carried on the identification card or other information printed onto the card.

[0030] Figure 8 is a block diagram of printer 120 in greater detail. Printer 120 is shown receiving card 180 which passes proximate ribbon 182 and print head 124. A motor 184 drives a platen 186 while ribbon 182 moves between supply reel 188 and take-up reel 190 under the control of motor 192 and 194, respectively. Microprocessor 122 receives RFID tag data over bus 200 and includes web tension control 202, print head control 204, comparator 206 and interlock 208. Microprocessor 122 controls motors 194, 184 and 192 using motor drive circuits 210, 212 and 214, respectively while controlling print head 122 using print head drive circuitry 216. In various embodiments of the invention, microprocessor controls web tension, print head heating and card movement based upon data received from an RFID tag 142 carried in supply spool 188. Comparator 206 is used to prevent printing through interlock 208 if date information carried in RFID tag 142 indicates that the ribbon has degrade due to age. Alternatively, this information can be displayed in display 132 and the operator can make a decision whether to use the material.

[0031] Figure 8 also illustrates an embodiment in which an RFID tag 142 is used in a laminator. In such an embodiment, element 124 comprises a heated roller or other heating device and is controlled by a laminator drive circuit. Temperature feedback can also be provided from the laminator. In such an embodiment, the memory 168 in the RFID tag 142 can contain information regarding parameters which effect lamination temperature. Such information includes, for example, lamination film type, lamination film supplier, thickness, width, age such as through a date code or other such information.

[0032] In yet another embodiment of the present invention, the information is transferred from the supply to

the printer (or from the printer to the supply) over a physical connection such as through electrical wiring. In such an embodiment, the supply include electrical contacts to which the printer makes electrical contact when the supply is coupled to the printer. In such an embodiment, the power for the tag can be provided over the electrical connection. In another embodiment, a single pair of electrical connections are provided which carry both power and data between the supply and the printer. Referring to Figures 6 and 7, in such an embodiment the output from controller 166 can be optionally sent through a transceiver 164 and through a direct connection to microprocessor 122 in the printer/laminator. The transmission can be in any suitable format, for example, a binary format or a modulated signal such as an RF signal. Another non-contact method is to use a magnetic field to transmit information. This can be accomplished by using a magnetic head instead of an RF antenna. In another example of a non-physical link, an optical connection is provided between the supply and the printer or laminator.

[0033] Figure 9 is an example memory map for memory 168 in the RFID TAG 142. In the example of Figure 9, the memory includes eight blocks (block 0 through Block 7) each having 32 bits (address of 0-31). The example of Figure 9 is for a ribbon and contains information such as the number of images printed, the material, the supplier, the panel size, the ribbon thickness, the lot code number, the expiration date month and the expiration date year, and identification number of the roll, an interlock used to lock the supply and prevent use of incorrect supplies with the printer or laminator, a second customizable locking feature which can be used, for example, for security, an error code, a customer name, an operator ID, user date or password information. Note that these are merely provided as one example and embodiment of the present invention can implement any appropriate memory configuration.

Claims

1. An identification card printer comprising:

a card supply containing individual cards (24);
rollers (26) driven by motors (30) configured to drive one of the cards in forward and backward directions;
a print supply including:

a core (14) supported for rotation;
a print ribbon (12) wound on the core (14);
and
an alterable ID tag circuit (15) mounted to the core (14) and having a memory (93) containing information relating to parameters of the print ribbon (12) including a private key used in a process of digital encryption to prevent unauthorized use of the supply;

5

10

15

20

25

30

35

40

45

50

55

a thermal print head (34) configured to engage the print ribbon (12) and print on the card (24) driven by the rollers;
an encoder (50) configured to detect rotation of the core (14) and generate a count signal corresponding to the rotation of the core (14); and

a printer controller (22) adapted to communicate with the encoder (50) and the memory (93) of the alterable ID tag circuit (15), read the supply information from the memory (93) and write supply information to the memory (93) of the alterable ID tag circuit (15), wherein the supply information includes a number of prints remaining that is based on the count signal.

2. The identification card printer of claim 1, wherein the alterable ID tag circuit (15) includes a radio frequency (RF) communication circuit (142).
3. The identification card printer of claim 2, wherein the printer controller (22) includes an RF communication circuit (140) for wireless communication of supply information to the alterable ID tag circuit (15).
4. The identification card printer of claim 1, wherein the supply information includes at least one parameter relating to the print ribbon (12) selected from a group consisting of: dye density; remaining ribbon length; a used panel count; and a used ribbon length.
5. The identification card printer of claim 1, wherein the printer controller (22) is configured to receive a security key from a personal computer through a bus (126), the security key is used to unlock the supply using the private key.
6. The identification card printer of claim 1, wherein the encoder (50) includes a sensor (54) for sensing rotation of the core (14).
7. The identification card printer of claim 1, including a communication link between the printer controller (22) and the alterable ID tag circuit (15) selected from a group consisting of a radio frequency (RF) link, a magnetic link, a physical link, and an optical link.
8. The identification card printer of claim 1, wherein the supply information relates to at least one parameter selected from a group consisting of a remainder amount of the ribbon, a used amount of the ribbon, a supplier of the supply, a shelf life of the supply, a print head voltage, and a printer setting for the supply.
9. The identification card printer of claim 1, wherein the memory (93) includes ribbon tension information and

the printer controller (22) adjusts a tension of the ribbon (12) in accordance with the ribbon tension information.

Patentansprüche

1. Identifikationskartendrucker, umfassend:

einen Kartenvorrat, der Einzelkarten (24) enthält;
von Motoren (30) angetriebene Walzen (26), die dafür ausgelegt sind, eine der Karten in Vorwärts- und Rückwärtsrichtung zu bewegen;
einen Druckvorrat, beinhaltend:

eine drehbar gelagerte Spule (14);
ein Farbband (12), das auf die Spule (14) aufgewickelt ist; und
eine veränderbare ID-Tag-Schaltung (15), die an der Spule (14) angebracht ist und einen Speicher (93) besitzt, der Informationen zu Parametern des Farbbands (12) enthält, darunter einen privaten Schlüssel, der in einem digitalen Verschlüsselungsprozess verwendet wird, um eine unberechtigte Nutzung des Vorrats zu verhindern;
einen Thermodruckkopf (34), der dafür ausgelegt ist, in das Farbband (12) einzugreifen und die Karte (24), die von den Walzen bewegt wird, zu bedrucken;
einen Codierer (50), der dafür ausgelegt ist, eine Drehung der Spule (14) zu erkennen und ein Zählsignal entsprechend der Drehung der Spule (14) zu erzeugen; und
eine Druckersteuerung (22), die dafür ausgelegt ist, mit dem Codierer (50) und dem Speicher (93) der veränderbaren ID-Tag-Schaltung (15) zu kommunizieren, die Vorratsinformationen aus dem Speicher (93) auszulesen und Vorratsinformationen in den Speicher (93) der veränderbaren ID-Tag-Schaltung zu schreiben, wobei die Vorratsinformationen eine Anzahl von verbleibenden Drucken beinhalten, die auf dem Zählsignal basiert.

2. Identifikationskartendrucker nach Anspruch 1, wobei die veränderbare ID-Tag-Schaltung (15) eine Hochfrequenz (HF) -Kommunikationsschaltung (142) beinhaltet.

3. Identifikationskartendrucker nach Anspruch 2, wobei die Druckersteuerung (22) eine HF-Kommunikationsschaltung (140) für die drahtlose Übermittlung von Vorratsinformationen an die veränderbare ID-Tag-Schaltung (15) beinhaltet.

5 4. Identifikationskartendrucker nach Anspruch 1, wobei die Vorratsinformationen mindestens einen Parameter beinhalten, der das Farbband (12) betrifft, ausgewählt aus einer Gruppe bestehend aus: Farbdichte, verbleibende Farbbandlänge, Verbrauchs- zähler und verbrauchte Farbbandlänge.

10 5. Identifikationskartendrucker nach Anspruch 1, wobei die Druckersteuerung (22) dafür ausgelegt ist, über einen Bus (126) einen Sicherheitsschlüssel von einem PersonalComputer zu empfangen, wobei der Sicherheitsschlüssel dazu dient, den Vorrat mithilfe des privaten Schlüssels freizugeben.

15 6. Identifikationskartendrucker nach Anspruch 1, wobei der Codierer (50) einen Sensor (54) beinhaltet, um die Drehung der Spule (14) zu erkennen.

20 7. Identifikationskartendrucker nach Anspruch 1, beinhaltend eine Kommunikationsverbindung zwischen der Druckersteuerung (22) und der veränderbaren ID-Tag-Schaltung (15), die aus einer Gruppe bestehend aus einer Hochfrequenz (HF) - Verbindung, einer magnetischen Verbindung, einer physischen Verbindung und einer optischen Verbindung gewählt ist.

25 8. Identifikationskartendrucker nach Anspruch 1, wobei die Vorratsinformationen auf mindestens einem Parameter basieren, der aus einer Gruppe bestehend aus einer verbleibenden Menge des Farbbands, einer verbrauchten Menge des Farbbands, einem Lieferanten des Vorrats, einer Lagerdauer des Vorrats, einer Druckkopfspannung und einer Druckereinstellung für den Vorrat gewählt ist.

30 9. Identifikationskartendrucker nach Anspruch 1, wobei der Speicher (93) Farbbandspannungs-Informationen enthält und die Druckersteuerung (22) eine Spannung des Farbbands (12) entsprechend der Farbbandspannungs-Information einstellt.

Revendications

1. Une imprimante de cartes d'identification comportant :

une alimentation en cartes contenant des cartes individuelles (24) ;
des rouleaux (26) entraînés par des moteurs (30) configurés pour entraîner une des cartes dans des directions avant et arrière ;
une alimentation en encre comprenant :

un mandrin (14) soutenu en vue d'une rotation ;
un ruban d'impression (12) enroulé sur le

mandrin (14) ; et
un circuit d'étiquette d'identification altérable (15) monté sur le mandrin (14) et ayant une mémoire (93) contenant des informations relatives aux paramètres du ruban d'impression (12) comprenant une clé privée utilisée dans un processus de chiffrement numérique pour empêcher une utilisation non autorisée de l'alimentation ;
une tête d'impression thermique (34) configurée pour enclencher le ruban d'impression (12) et imprimer sur la carte (24) entraînée par les rouleaux ;
un encodeur (50) configuré pour détecter la rotation du mandrin (14) et générer un signal de décompte correspondant à la rotation du mandrin (14) ; et
un contrôleur d'imprimante (22) adapté pour communiquer avec l'encodeur (50) et la mémoire (93) du circuit d'étiquette d'identification altérable (15), lire les informations d'alimentation de la mémoire (93) et écrire les informations d'alimentation sur la mémoire (93) du circuit d'étiquette d'identification altérable (15), où les informations d'alimentation comprennent un nombre d'impressions restant qui est basé sur le signal de décompte.

7. L'imprimante de cartes d'identification de la revendication 1, comprenant une liaison de communication entre le contrôleur d'imprimante (22) et le circuit d'étiquette d'identification altérable (15) sélectionnée parmi un groupe composé d'une liaison radiofréquence (RF), d'une liaison magnétique, d'une liaison physique, et d'une liaison optique.

8. L'imprimante de cartes d'identification de la revendication 1, où les informations d'alimentation portent sur au moins un paramètre sélectionné parmi un groupe composé d'une quantité restante du ruban, d'une quantité utilisée du ruban, d'un fournisseur de l'alimentation, d'une durée de vie de l'alimentation, d'un voltage de tête d'impression, et d'un réglage d'imprimante pour l'alimentation.

9. L'imprimante de cartes d'identification de la revendication 1, où la mémoire (93) comprend des informations de tension de ruban et le contrôleur d'imprimante (22) ajuste une tension du ruban (12) conformément aux informations de tension de ruban.

2. L'imprimante de cartes d'identification de la revendication 1, où le circuit d'étiquette d'identification altérable (15) comprend un circuit de communication radiofréquence (RF) (142).

3. L'imprimante de cartes d'identification de la revendication 2, où le contrôleur d'imprimante (22) comprend un circuit de communication RF (140) en vue d'une communication sans fil des informations d'alimentation au circuit d'étiquette d'identification altérable (15).

4. L'imprimante de cartes d'identification de la revendication 1, où les informations d'alimentation comprennent au moins un paramètre relatif au ruban d'impression (12) sélectionné parmi un groupe composé de : densité de couleur ; longueur de ruban restante ; un décompte de panneaux utilisés ; et une longueur de ruban utilisée.

5. L'imprimante de cartes d'identification de la revendication 1, où le contrôleur d'imprimante (22) est configuré pour recevoir une clé de sécurité d'un ordinateur personnel par le biais d'un bus (126), la clé de sécurité étant utilisée pour déverrouiller l'alimentation à l'aide de la clé privée.

6. L'imprimante de cartes d'identification de la revendication 1, où l'encodeur (50) comprend un détecteur (54) pour détecter la rotation du mandrin (14).

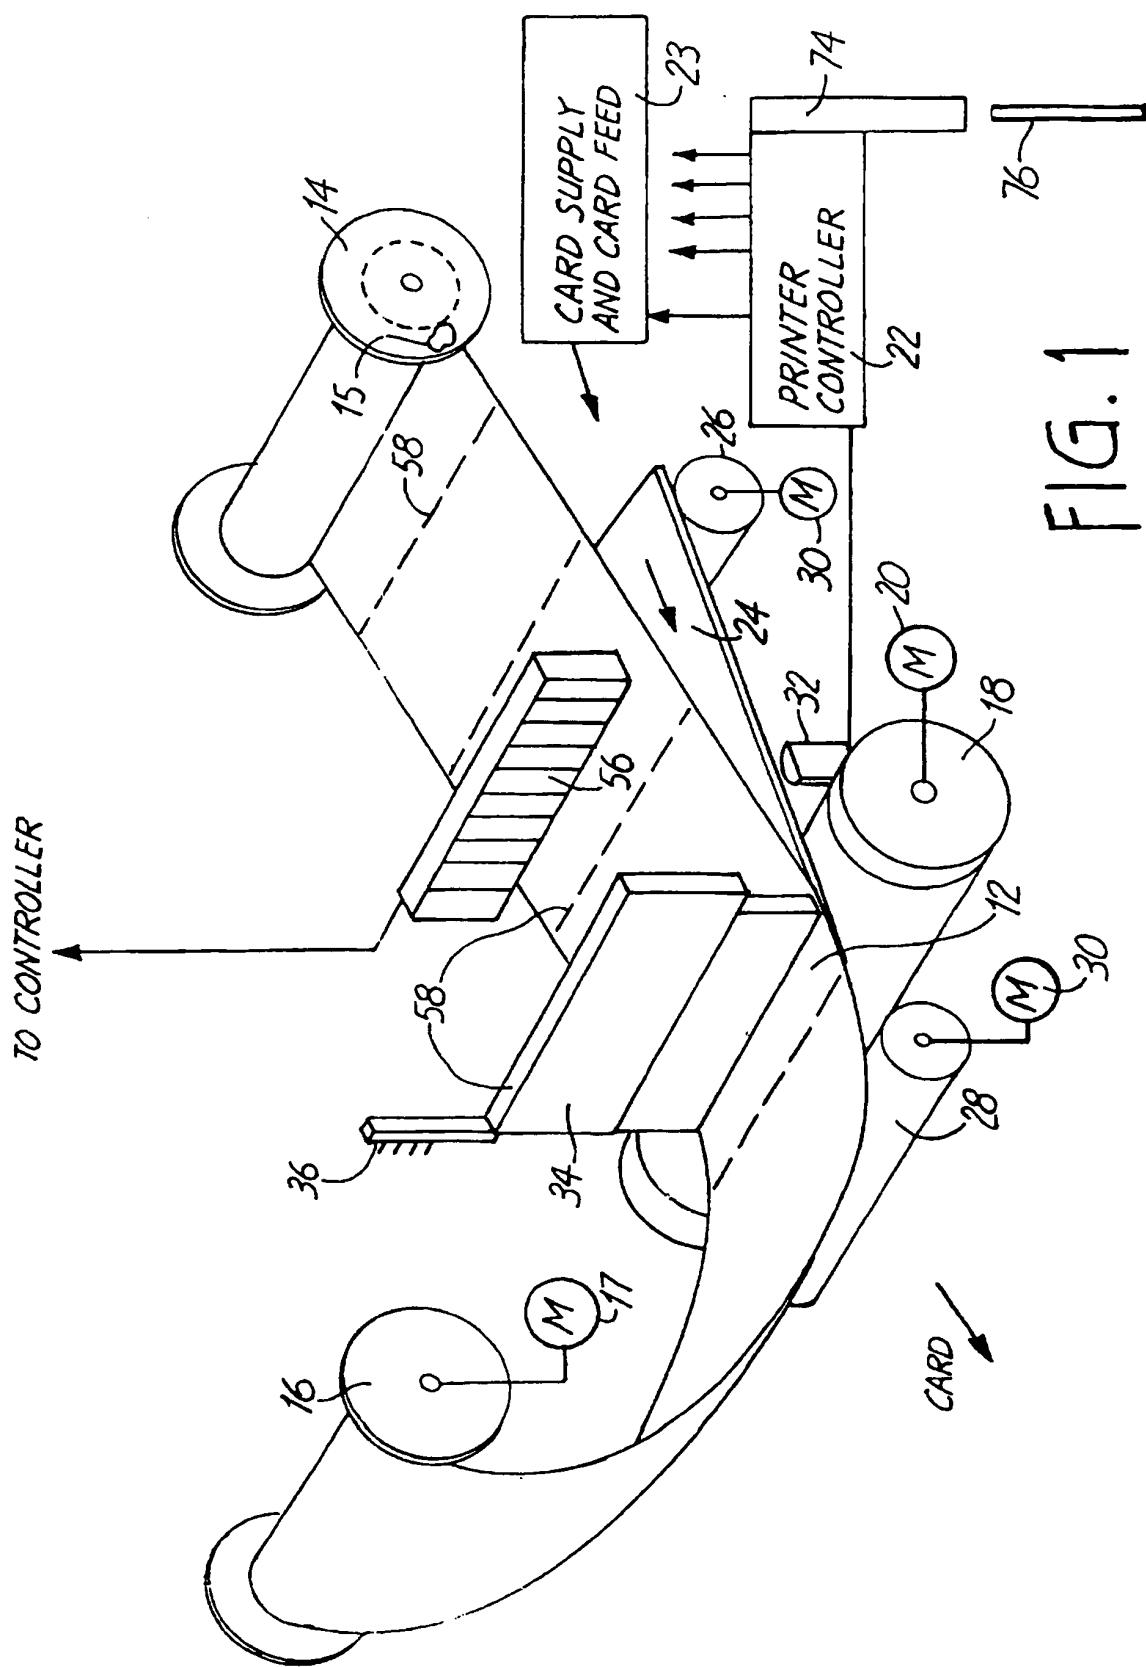


FIG. 1

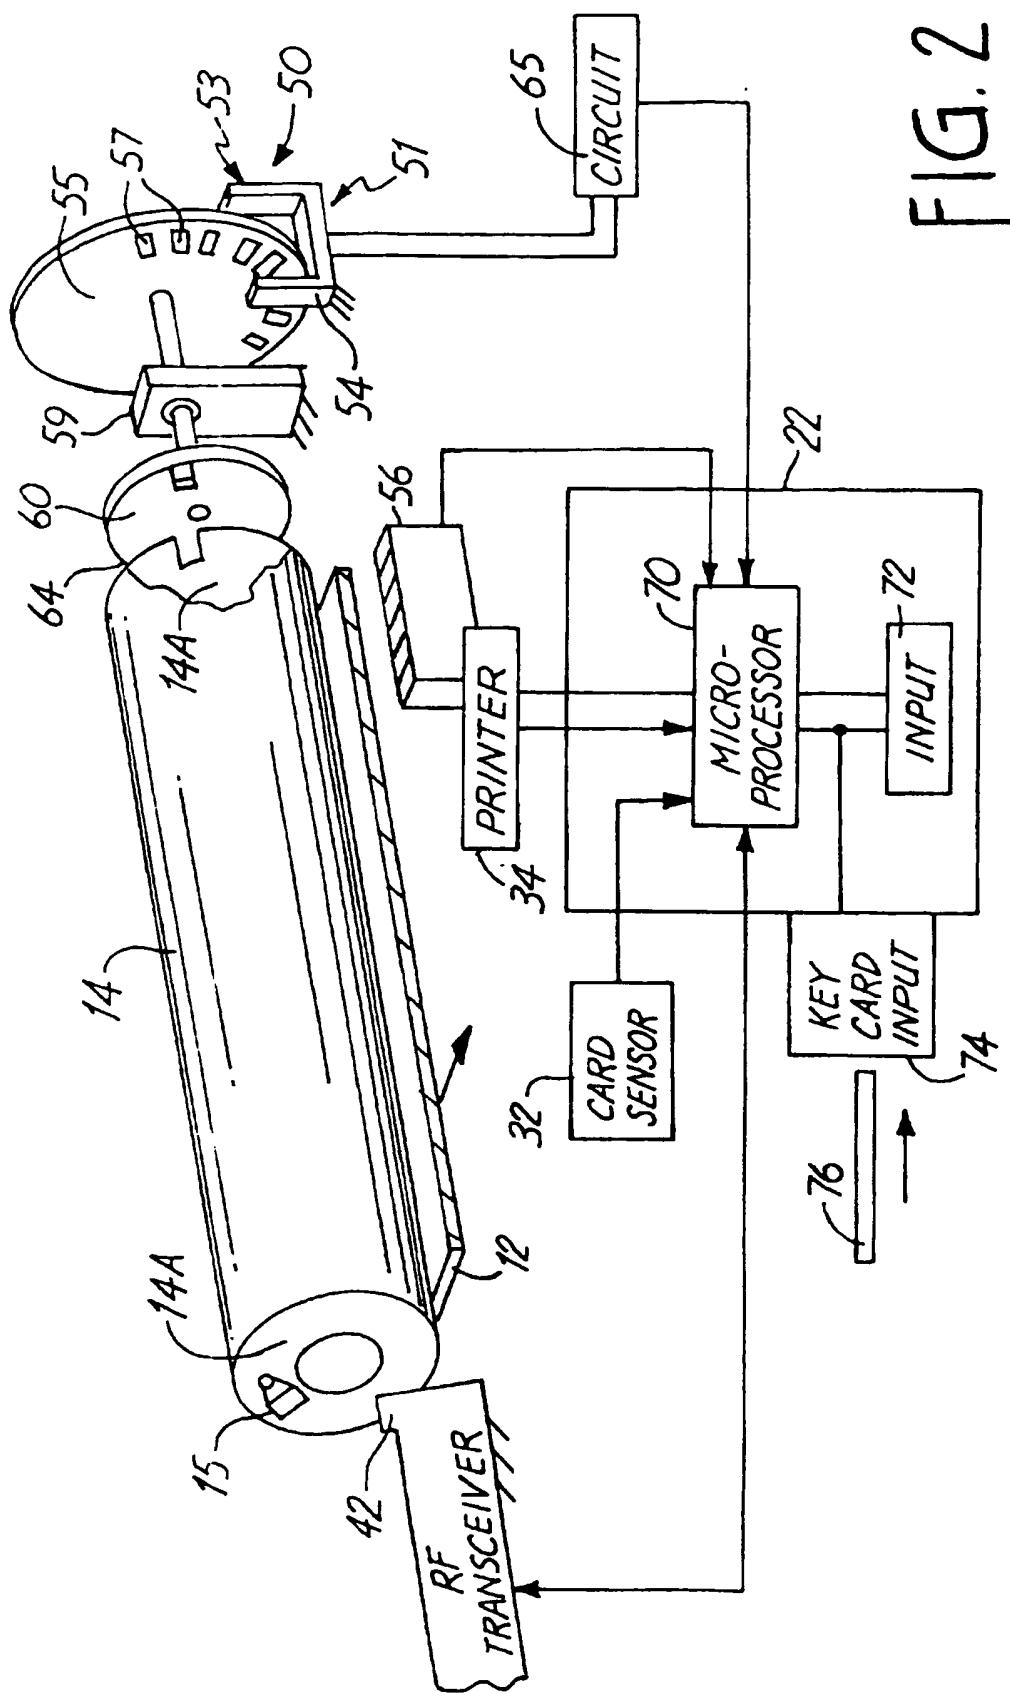
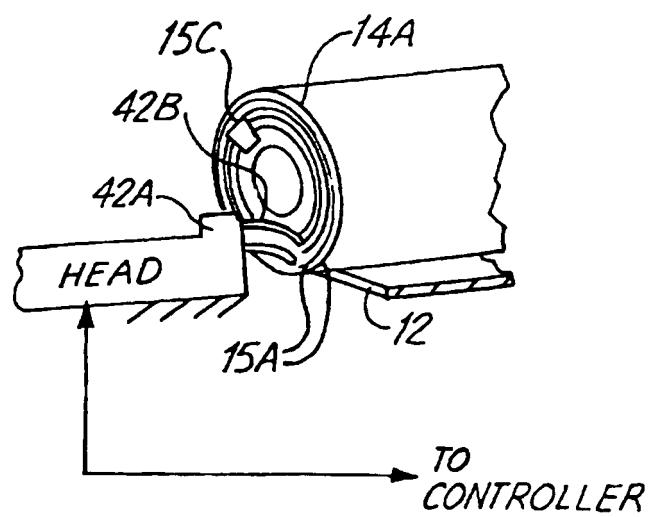
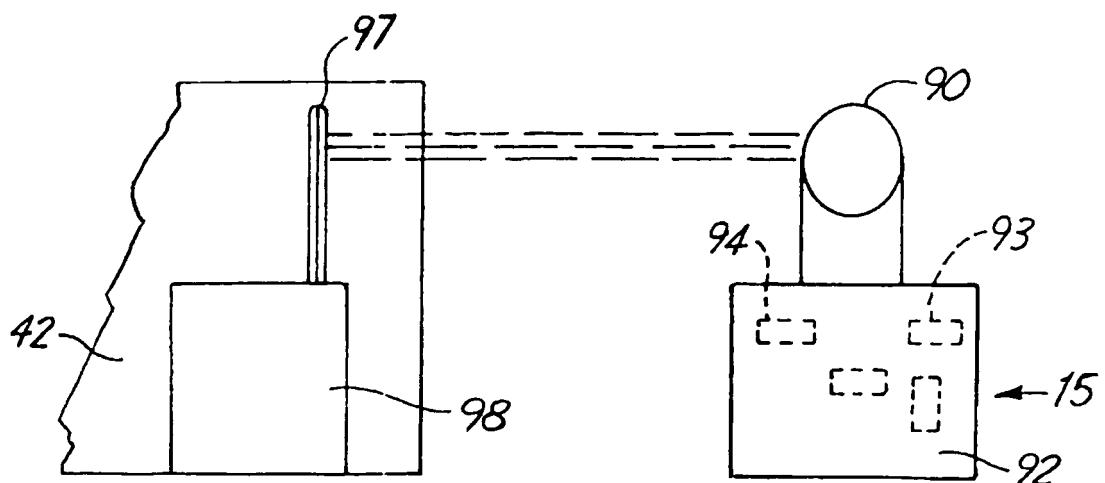


FIG. 2



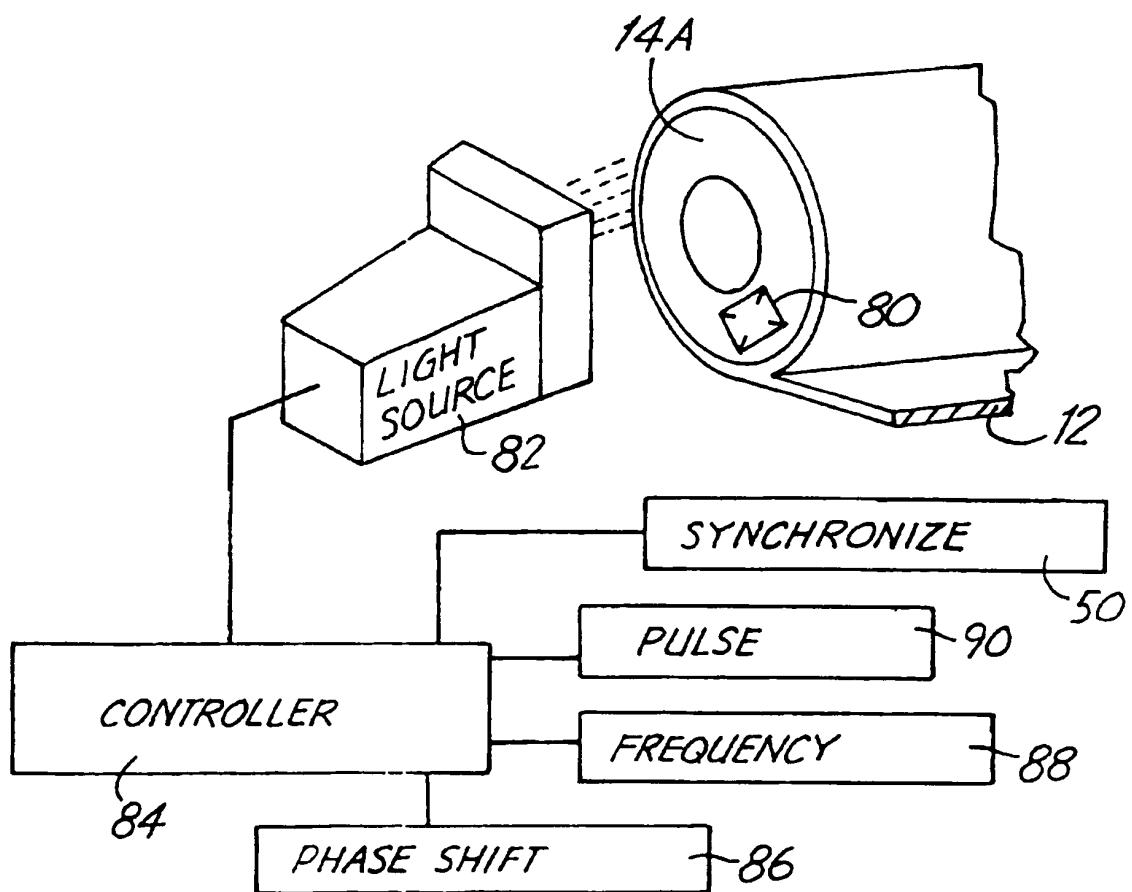
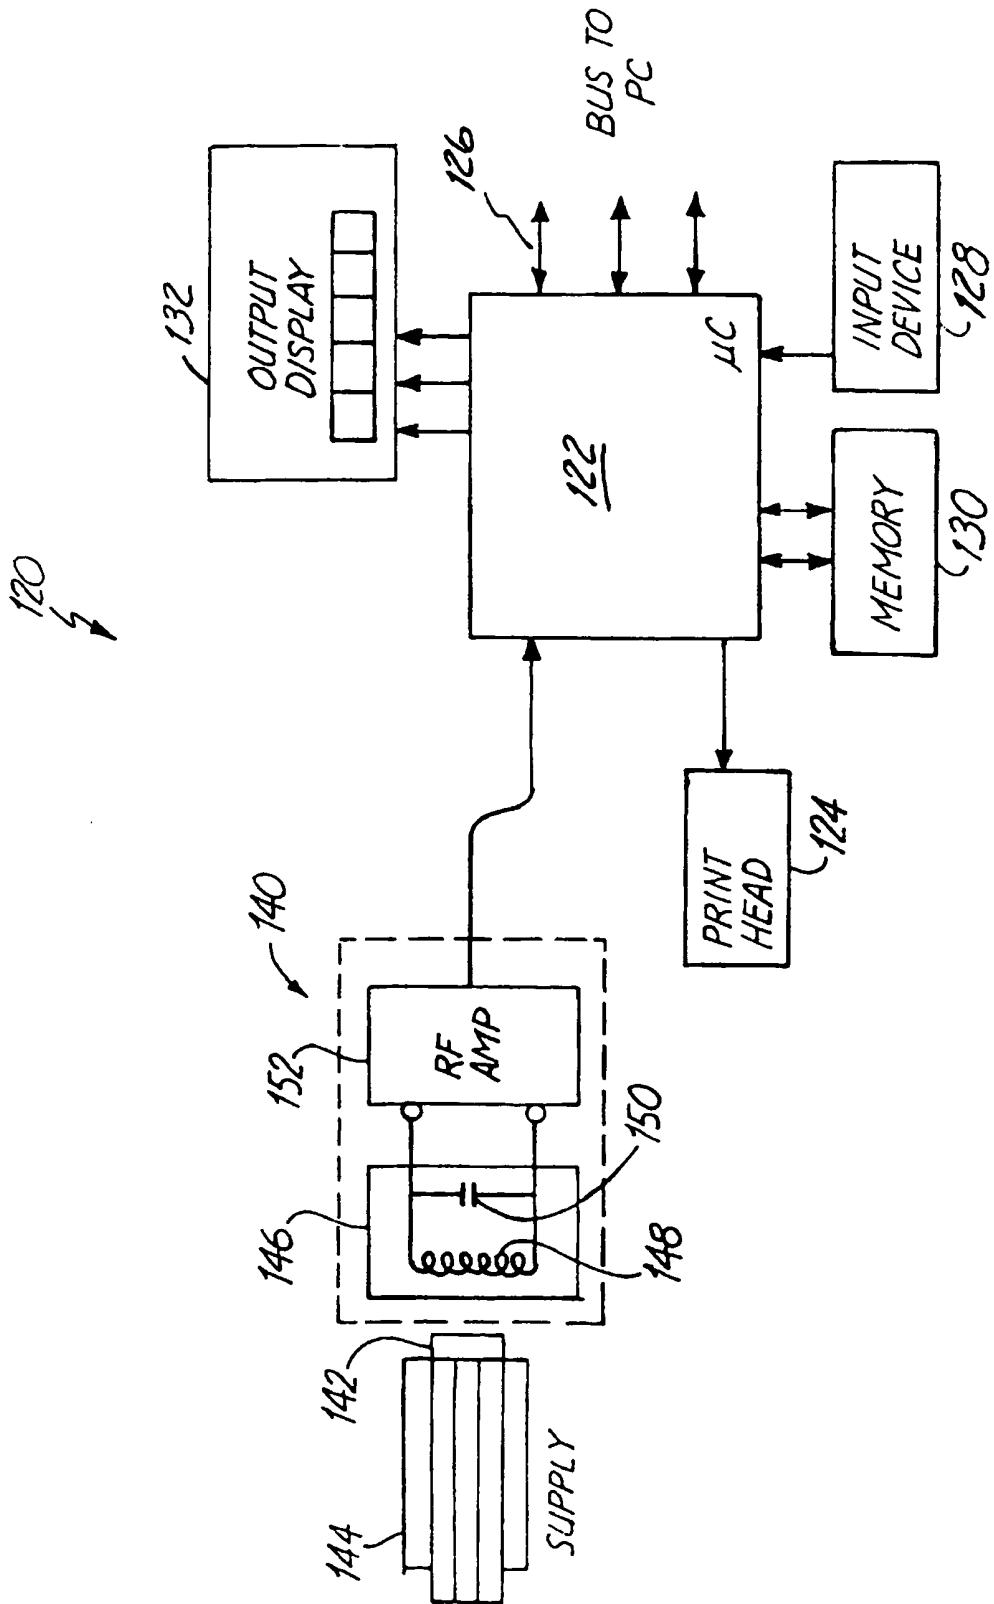


FIG. 5

FIG. 6



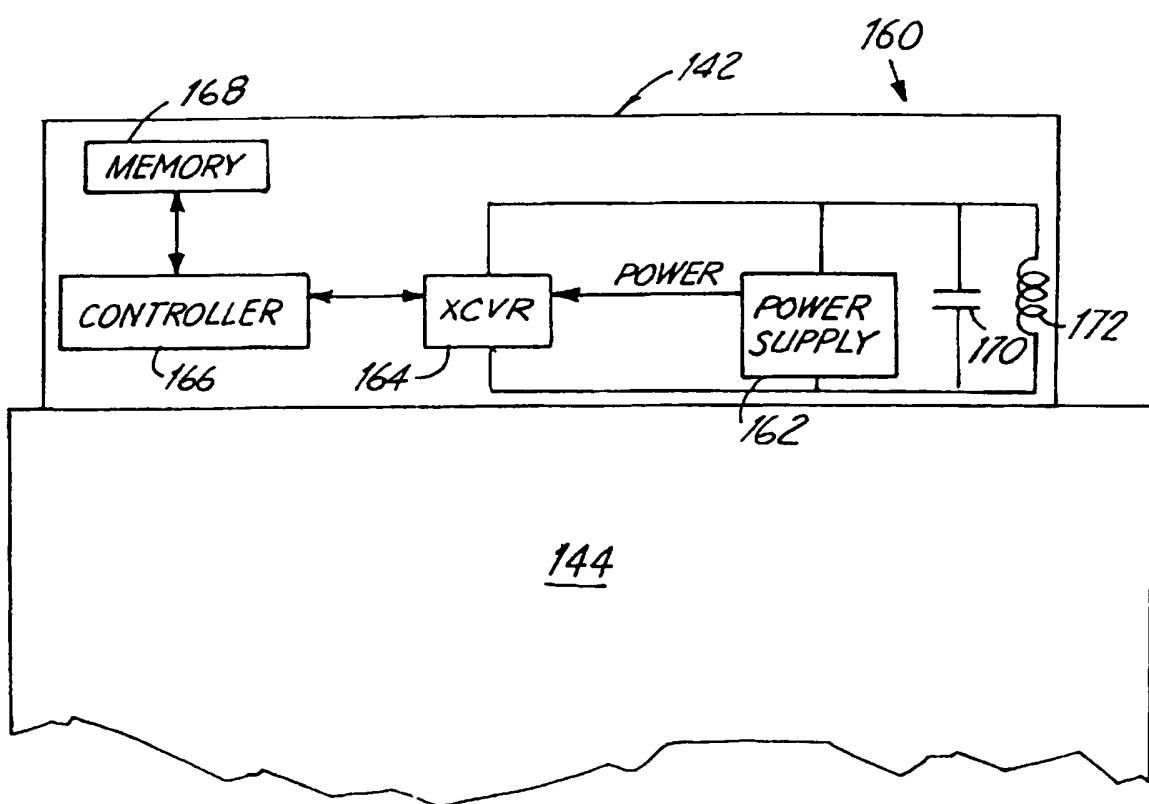


FIG. 7

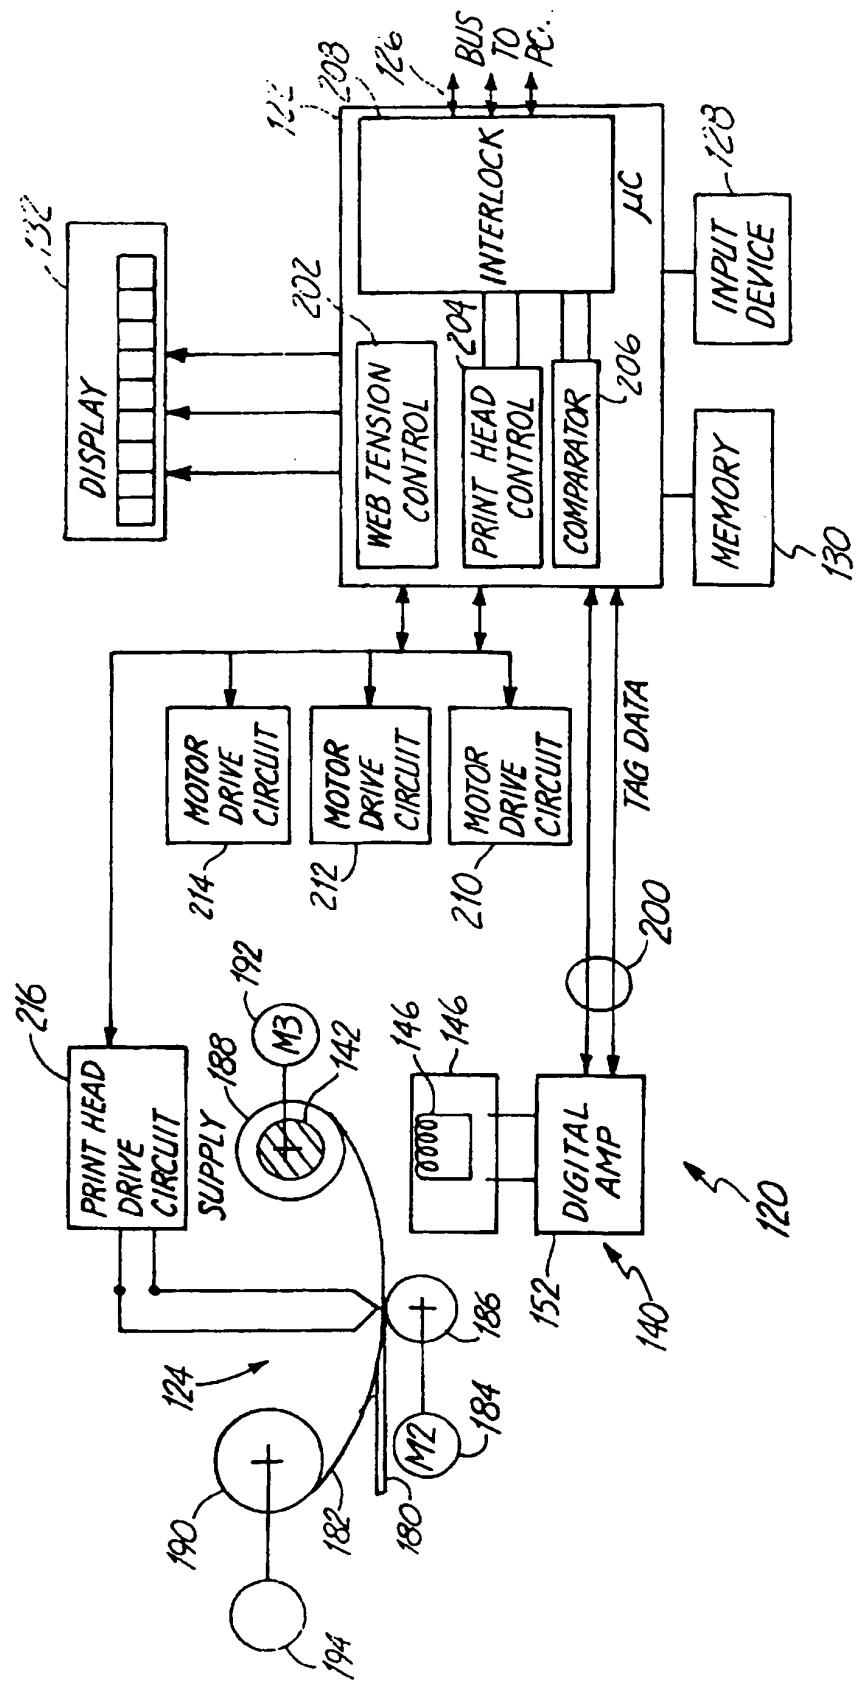


Fig.

RFID TAG MEMORY MAP

BIT	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
BLOCK 0	MODE DATA (NOT NORMALLY TRANSMITTED)																															
BLOCK 1	NUMBER OF IMAGES (UP TO 4,096)																															
BLOCK 2	LOT CODE (4,096)																															
BLOCK 3	ROLL ID (UP TO 655536)																															
BLOCK 4	INTERLOCK																															
BLOCK 5	CUSTOMIZABLE LOCKING FEATURE																															
BLOCK 6	ERROR CODE (256)																															
BLOCK 7	USER DATA OR PASSWORD																															

FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5755519 A [0003]
- EP 395320 A [0003]
- US 26334399 A [0013]
- US 30939199 A [0014]