

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 November 2011 (03.11.2011)

(10) International Publication Number
WO 2011/134482 A2

(51) International Patent Classification:

A61F 5/445 (2006.01) A61F 5/443 (2006.01)
A61F 5/448 (2006.01)

(21) International Application Number:

PCT/DK2011/050146

(22) International Filing Date:

29 April 2011 (29.04.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2010 70180 29 April 2010 (29.04.2010) DK

(71) Applicant (for all designated States except US): **COLO-PLAST A/S** [DK/DK]; Holtedam 1, DK-3050 Humlebaek (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STROEBECH, Esben** [DK/DK]; Selmersvej 11, DK-2970 Hoersholm (DK). **CIOK, Danuta** [DK/DK]; Violens Kvarter 8, DK-2990 Nivaa (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: CUSTOMIZABLE COLLECTION DEVICE

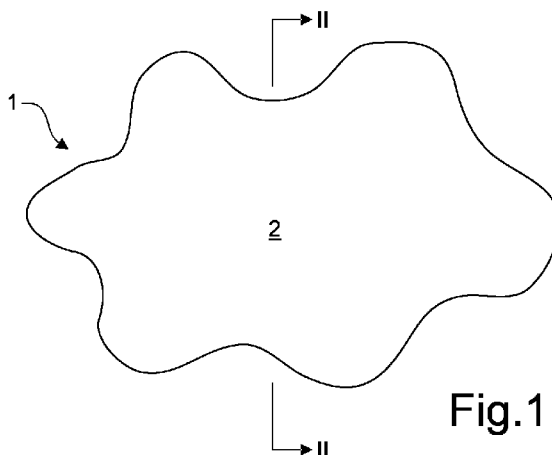


Fig.1

(57) Abstract: The present invention relates to a kit comprising at least one base plate for adhesive attachment to the skin around at least one body opening. The kit further comprises at least one separate peripheral device for attachment to the base plate. The base plate comprises a backing layer, having a proximal side facing the user during use, where a skin friendly adhesive is disposed on said proximal side of the backing layer and wherein the base plate is an intact base plate thereby allowing a hole to be cut at a desired position before use. The separate peripheral device comprises a continuous adhesive ring for permanent adhesive attachment between the continuous adhesive ring of the peripheral device and the distal side of the backing layer of the base plate. This allows the user to provide a custom fit for irregular body openings.



WO 2011/134482 A2

CUSTOMIZABLE COLLECTION DEVICE

TECHNICAL FIELD

The present invention relates to a kit comprising a base plate and at least one peripheral device, such as a collecting bag, for providing a customized collection device for a body opening. The kit may comprise further elements for even better customization.

BACKGROUND

Today there is a wide range of ostomy bags for ostomates, i.e. persons having a stoma, for collecting output from the stoma. However, a stoma is very individual from person to person. It may for example be the size of the stoma, whether it is a sunken stoma or protruding stoma or something in between. The peristomal area (the skin area surrounding the stoma) varies significantly, and additionally many ostomates also get fistulas, i.e. body generated openings around the stoma. All these factors and more make it difficult to make the perfect product for an ostomate, and although there already is a wide range of products many ostomates are not able to find a product suitable for their stoma.

This has led to what is referred to as 'plumbing', i.e. that ostomates acquire different products and subsequently modify them to fit their need. In many ways, this is inconvenient, as plumbing leads to solutions which leaks or fall apart. Furthermore, this is both expensive and time consuming for the ostomates as he has to buy different products and combine them in order to obtain a satisfactory solution while spending time on cutting and assembling the constructions.

Thus, there is a need for providing an alternative for those ostomates where standard ostomy appliances does not fit and where such an alternative may be modified with a minimum of work to suit that ostomate's stoma while still providing relatively high security against leakage compared to typical plumbing solutions.

Such an alternative could preferably also be used for other users than ostomates, e.g. people who have had removed excess skin and have a temporary wound area that needs to be covered and protected while healing.

BRIEF DESCRIPTION

The present invention relates to a kit comprising at least one base plate for adhesive attachment to the skin around at least one body opening and at least one separate peripheral device for attachment to the base plate, wherein

- the base plate comprises a backing layer, having a proximal side facing the user during use, where a skin friendly adhesive is disposed on said proximal side of the

backing layer and wherein the base plate is an intact base plate thereby allowing a hole to be cut at a desired position before use, and

- the separate peripheral device comprises a continuous adhesive ring for permanent adhesive attachment between the continuous adhesive ring of the peripheral device and the distal side of the backing layer of the base plate.

In most base plates for use with for example ostomy collecting bags, the base plate is provided with a pre-cut hole, thereby facilitating cutting of the through-going hole to fit the stoma. However, by providing a base plate having no pre-cut hole, it is possible to allow the user to cut or punch out one or more holes at any location on the base plate. Thus, the term 'intact' as used herein should be understood as being a base plate wherein no pre-cut holes are provided.

By attaching the peripheral device directly to the backing layer of the base plate, it is possible to cut one or more holes in the base plate that are in alignment with respective body openings, i.e. folds, scars, wound sites, stomas or fistulas. This allows the user to achieve a custom fit for irregular body openings while reducing the risk of leakage and reduce the time for application of the base plate and collecting bag.

Seeing that the peripheral device is attached directly to the base plate, the adhesive attachment has to be able to follow the curvature and movement of the body without detaching, as this would result in leakage or even spillage of stomal output. Thus, it is important that the adhesive attachment is permanent, or in other words that when the adhesive attachment has been established then the peripheral device cannot be removed without either tearing the base plate or the peripheral device or detaching the base plate from the skin.

In order to prevent the peripheral device to unintentionally adhere to its surroundings the continuous adhesive ring may advantageously be covered by a release layer which is removable before establishing the permanent adhesive attachment.

In one embodiment, at least the distal side of the backing layer is plane. This provides a large contact surface with the peripheral device whereby a high adhesive attachment can easily be obtained.

A kit as disclosed herein can be used with a number of different body openings, for example stomas such as colostomies, ileostomies, urostomies or tracheostomies. Other body openings could be fistulas, chronic wounds and/or ulcers.

In one embodiment, the at least one peripheral device is a collecting bag comprising an inlet opening for receiving output from said body opening, where a continuous adhesive ring is arranged surrounding said inlet opening for adhesive attachment between the adhesive ring and the backing layer of the base plate.

This provides a solution where the collecting bag can be easily attached to a base plate having at least one customized hole placed according to the user preference.

To further facilitate the application of the base plate and the collecting bag, the kit may further comprise at least one marker to be attached to the base plate for

indicating where a hole is to be cut. In one embodiment, such marker could be a transparent plastic sheet whereon cutting indications are arranged.

5 In some embodiments, the at least one peripheral device can be a drainage port having a continuous adhesive ring for adhesive attachment of the drainage port to the backing layer of the base plate. This is for example advantageous to users who besides for example a stoma also have a fistula or peristomal wound to which access is desirable for cleaning or draining fluid or other treatment.

10 In yet an alternative or additional embodiment, a hole may be cut in the ostomy bag whereon the drainage port is attached.

15 In some situations, the user may need to customize a two-piece ostomy solution, where the collecting bag or other peripheral devices need to be replaced without also changing the base plate.

20 Such embodiment, may for example comprise the at least one peripheral device being a flexible flange in the form of a flexible disc having a through-going disc hole wherein a continuous adhesive ring is arranged on the proximal side of the flexible flange and encircles said through-going disc hole. This would create the option of attaching an ostomy collecting bag having an adhesive attachment flange to the distal side of the flexible flange.

25 Alternatively, in another embodiment, the at least one peripheral device is a mechanical coupling having a distal side for coupling with a complementary coupling on an ostomy bag, said mechanical coupling having a continuous adhesive ring arranged on the proximal side. This allows the user to provide a mechanical two-piece ostomy device solution, wherein the ostomy collecting bag may be replaced via a mechanical coupling.

30 The invention also relates to a method of using a kit as described above, comprising the steps of
- cutting at least one through-going hole in the base plate, and
- attaching at least one peripheral device to the base plate around at least one of the
35 holes so that the respective continuous adhesive ring encircles said at least one hole so that the permanent adhesive attachment is established between the continuous adhesive ring of the peripheral device and the distal side of the backing layer of the base plate.

40 Typically, the number of holes corresponds to the number of body openings the base plate will cover. However, one hole can also encircle two or more body openings. Moreover, one peripheral device will typically cover one hole in the base plate. However, a peripheral device such as a collecting bag can be connected to two or
45 more holes.

50 Preferably, the method further comprises the step of subsequently attaching the base plate to the skin of a user after the peripheral devices has been attached to the base plate. This allows a more secure application, since the attachment can be performed on a plane surface, e.g. a table, than if the base plate is first applied to the skin of the user and subsequently the at least one peripheral device is attached

to the base plate, since in this case the attachment will be more difficult as care must be taken to follow the curves and folds of the skin in order to prevent leaks.

5 As can be understood, a plurality of peripheral devices may be envisioned to be used with the kit as claimed herein. Furthermore, the kit is not limited to one kind of peripheral device but different types of peripheral devices may be used in the kit in order to solve the need of the specific user.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 shows from the distal side an embodiment of a base plate as described herein,

Fig. 2 shows the above in section along lines II – II,

15 Fig. 3 shows in section a collection bag for use with a base plate as described in Fig. 1 and 2,

Fig. 4 shows in section a drainage port for use with a base plate as described in Fig. 1 and 2, and

20 Fig. 5 shows a marker for indicating a cutting site on the base plate.

DETAILED DESCRIPTION

25 Figs. 1 and 2 show one embodiment of a base plate 1. The base plate is formed of a backing layer 2 whereon a skin friendly adhesive 3 is disposed on the proximal side, which is the side that will face the user during wear. Along the edge, the base plate is formed with a curved or bevelled finish 4 so that no adhesive is exposed to the surroundings when the base plate is worn. This prevents the base plate from sticking to clothing and other articles which may unintentionally detach the base plate.

30 As shown in Fig. 1, the base plate has a curved, flower-like shape. However, the base plate may have any shape. Furthermore, the backing layer and the skin friendly adhesive extend completely across the area defined by the periphery of the base plate, thereby providing no pre-formed holes.

35 A collecting bag 10 for use with the base plate as described above is shown in Fig. 3. The collecting bag is formed of a bag foil 11 having an opening 12 through which output from a body opening can enter. The collecting bag may also be formed of two flexible plastic films which are welded together along their periphery. Surrounding the opening, there is a first adhesive ring 13 which is suited for adhesive connection with the backing layer of the base plate. The first adhesive ring is continuous,
40 thereby providing a tight seal that reduces the risk of leakage.

A drainage port 20 for use with the base plate is shown in Fig. 4. The drainage port has an access opening 21 allowing access to the body opening, for e.g. cleaning or treatment. A second adhesive ring 22 is provided around the access opening and

allows the drainage port to be adhesively attached to the backing layer of the base plate.

5 A marker 30 for indicating a cutting location is shown in Fig. 5, The marker is in the form of a transparent plastic disc. On one side, an adhesive is disposed which allows the marker to be adhesively attached to the backing layer of the base plate. A cutting guide 31 is printed on the surface. In the current embodiment, the cutting guide is in the form of three concentric circles, one being one centimetre in diameter, a second being two centimetres in diameter and a third being three centimetres in diameter.

10 By providing an ostomate with a kit having one or more of the above parts, he will be able to provide a solution for his personal need. Typically, this will be achieved by holding the base plate up in alignment with the stoma and marking the stoma by placing a marker on the backing layer. Other markers may also be placed to mark e.g. a fistula or other wound site. Then through-going holes are cut at the markers location. The first number of times this is done the user may have to cut carefully and often compare to see if the sizes and location of the markers match the area to be bandaged. However, after some time, practice will allow the user to know which size and shape of holes has to be cut at the markers.

20 After the holes are cut the appropriate number of the collecting bags and drainage ports are attached to the backing layer around each hole and the base plate is subsequently attached to the skin at the body opening.

25 In order to provide optimal attachment between the backing layer and the peripheral device, it has been found that the backing layer should preferably be formed of polyurethane. Most of the suitable adhesives will adhere so well to polyurethane that an attempt to separate the peripheral device from the base plate will be impossible without tearing the assembly.

30 Moreover, the skin friendly adhesive should be of a kind which is suitable for a lot of skin types and which is flexible, easy to cut and easy to mould. Such skin friendly adhesives are described in for example EP 0 938 349 B1 and WO 2007/076862 A1. In particular, a layered adhesive construction comprising a first and a second layer of hydrocolloid adhesive having different compositions, where the second layer of hydrocolloid adhesive is interposed between the first layer of hydrocolloid adhesive and a backing layer, wherein the first adhesive layer is a layer of mouldable adhesive comprising hydrocolloids having a Strain Recovery below 45% when measured as described in WO 2007/076862 A1 and the second adhesive layer is a layer of hydrocolloid adhesive having a Strain Recovery above 55% when measured as described in WO 2007/076862 A1, is suitable for use in the kit as described herein. Specifically Examples 1 – 3 in WO 2007/076862 A1 are examples well suited to be used in the kit.



CLAIMS

1. A kit comprising at least one base plate for adhesive attachment to the skin around at least one body opening and at least one separate peripheral device for attachment to the base plate, wherein
- 5 - the base plate comprises a backing layer, having a proximal side facing the user during use, where a skin friendly adhesive is disposed on said proximal side of the backing layer, and where the base plate is an intact base plate thereby allowing a hole to be cut at a desired position before use, and
- 10 - the separate peripheral device comprises a continuous adhesive ring for permanent adhesive attachment between the continuous adhesive ring of the peripheral device and the distal side of the backing layer of the base plate.
2. A kit according to claim 1, wherein at least the distal side of the backing layer is plane.
- 15
3. A kit according to claim 1 or 2, wherein the at least one peripheral device is a collecting bag comprising an inlet opening for receiving output from said body opening, where a continuous adhesive ring is arranged surrounding said inlet opening for adhesive attachment between the adhesive ring and the backing layer of
- 20 the base plate.
4. A kit according to claim 1, 2 or 3, wherein the kit further comprises at least one marker to be attached to the base plate for indicating where a hole is to be cut.
- 25
5. A kit according to claim 4, wherein said marker is a transparent plastic sheet whereon cutting indications are arranged.
6. A kit according to any one of the claims 1 - 5, wherein the at least one peripheral device is a drainage port having a continuous adhesive ring for adhesive attachment
- 30 of the drainage port to the backing layer of the base plate.
7. A kit according to any one of the claims 1 – 6, wherein the at least one peripheral device is a flexible flange in the form of a flexible disc having a through-going disc hole, wherein a continuous adhesive ring is arranged around said through-going disc
- 35 hole.
8. A kit according to any one of the claims 1 – 7, wherein the at least one peripheral device is a mechanical coupling having a distal side for coupling with a complementary coupling on an ostomy bag, said mechanical coupling having a
- 40 continuous adhesive ring arranged on the proximal side.
9. A method of using a kit according to any one of the claims 1 – 8, comprising the steps of,
- 45 - cutting at least one through-going hole in the base plate, and
- attaching at least one peripheral device to the base plate around at least one of the holes so that the respective continuous adhesive ring encircles said at least one hole so that the permanent adhesive attachment is established between the continuous adhesive ring of the peripheral device and the distal side of the backing layer of the base plate.

10. A method according to claim 9, wherein the method further comprises the step of subsequently attaching the base plate to the skin of a user.

5 11. A kit according to any one of the claims 1 – 8, for use in handling of output from a body opening, wherein the handling comprises the steps of
- cutting at least one through-going hole in the base plate, and
- attaching at least one peripheral device to the base plate around at least one of the
10 holes so that the respective continuous adhesive ring encircles said at least one hole so that the permanent adhesive attachment is established between the continuous adhesive ring of the peripheral device and the distal side of the backing layer of the base plate..

15 12. A kit according to claim 11, wherein the handling further comprises the step of subsequently attaching the base plate to the skin of a user.

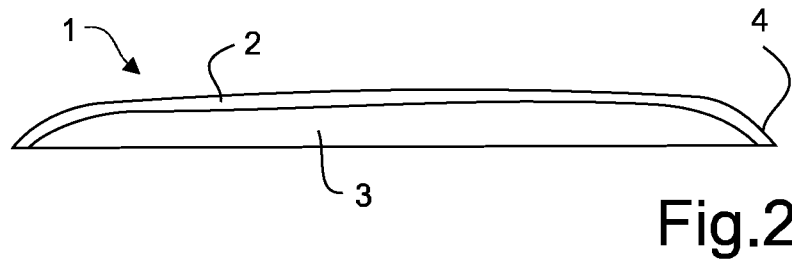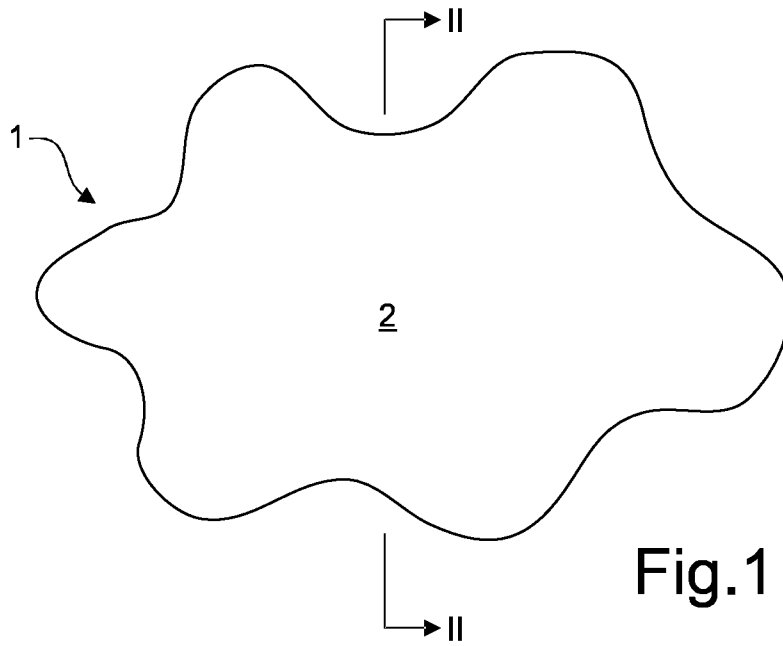

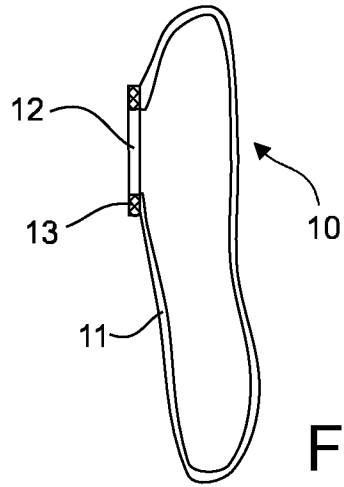


Fig.3




Fig.4




Fig.5