



(43) International Publication Date
14 July 2016 (14.07.2016)

(10) International Publication Number
WO 2016/112053 A1

- (51) International Patent Classification:
H04M 3/26 (2006.01) *H04M 7/06* (2006.01)
- (21) International Application Number:
PCT/US2016/012245
- (22) International Filing Date:
5 January 2016 (05.01.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/590,972 6 January 2015 (06.01.2015) US
- (71) Applicant: **CYARA SOLUTIONS CORP.** [US/US]; 1 Sansome Street, Suite 3500, San Francisco, CA 94104 (US).
- (72) Inventors: **KULKARNI, Alok**; 8 Hazeldine Road, Glen Iris, Victoria, 3146 (AU). **WILLSHIRE, Geoff**; 58 Dunellan Street, Greenslopes, 4120 (AU).
- (74) Agent: **GALVIN, Brian, R.**; Galvin Patent Law LLC, 2916 NW Bucklin Hill Road, Suite 485, Silverdale, WA 98383 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: INTERACTIVE VOICE RESPONSE SYSTEM CRAWLER

(57) Abstract: A system for interactive voice response system crawling, comprising an IVR crawler that may be VXML, design specification, DTMF or ASR/NLSR speech-based in nature and traverses an IVR menu to discover possible interaction paths and produces test cases based those paths, and a database that stores test cases produced by the IVR crawler during operation, and a method for interactive voice response system crawling utilizing the IVR crawler of the invention.



WO 2016/112053 A1

INTERACTIVE VOICE RESPONSE SYSTEM CRAWLER

CROSS-REFERENCE TO RELATED APPLICATIONS

[001] This application claims priority to United States patent application serial number
5 14/590,972, titled “INTERACTIVE VOICE RESPONSE SYSTEM CRAWLER”, filed on
January 6, 2015, the entire specification of which is incorporated hereby by reference.

BACKGROUND OF THE INVENTION

Field of the Art

10 [002] The disclosure relates to the field of contact center operations, and more particularly
to the field of interactive voice response systems and applications.

Discussion of the State of the Art

[003] In the field of interactive voice response (IVR) systems, documenting systems “as-is”,
or in their current state such as to document possible voice responses and interaction paths a
15 customer might take while navigating a system, can be very time consuming, sometimes
requiring as much as 3-9 months to completely document a single system. Consequently,
documentation is often out of sync with production systems due to the time and resources
required, decreasing the effectiveness of the documentation. Generating documentation
scripts manually can also be time consuming, making it difficult to economize the process.
20 The result of these factors is that agility is compromised, and time-to-value can be over a
year.

[004] What is needed, is a means to rapidly and reliably generate documentation of, and test
cases for, production IVR systems, that solves the technical problems of negative impact to
system performance and need for human interaction or resource dedication.

25

SUMMARY OF THE INVENTION

[005] Accordingly, the inventor has conceived and reduced to practice, in a preferred embodiment of the invention, various systems and methods for live IVR system crawling, such as to rapidly navigate and document a production IVR system.

5 [006] According to a preferred embodiment of the invention, a system for IVR crawling comprising a speech crawler that may be a VoiceXML (VXML)-based crawler stored and operating on a network-connected computing device (such as a server or a desktop workstation), a dual-tone multiple frequency (DTMF) or Automated Speech Recognition/Natural Language Speech Recognition (ASR/NLSR) crawler that may be a
10 touch-tone or speaker simulation based interaction program, a design crawler that may be a spreadsheet-based software crawler, a call flow database that may store and provide call flow documentation or records such as those generated by the crawlers of the invention, a test executive engine that may perform call flow testing according to known call flow records, and a test results analyzer that may perform analysis of the results of performed call flow
15 tests such as to determine the performance of an IVR or the accuracy of a call flow documentation record, is disclosed. According to the embodiment, a speech crawler (SC) may be an application that interrogates a target VXML browser, reverse engineers any discovered call flows by parsing each branch of the VXML application (such as by providing all possible inputs at all possible layers) and builds a complete test case library that may be
20 used by an automated testing solution to exhaustively test all possible paths through an interrogated IVR. The input may be the URL of the target VXML browser and the output may be a file containing the test cases in XML format, such as for storing in a database or adding to documentation files.

[007] A DTMF crawler (DC) may be an application that interrogates a target touch tone
25 IVR or IVRs that aren't VXML compliant or whose VXML interface is not directly accessible by placing actual telephone calls to an IVR from the crawler platform. The crawler may then, as described previously, reverse engineer any discovered call flows such as by parsing each and every branch of the application by providing all possible DTMF inputs at all possible layers, and may then build a complete test case library . This solution includes use of
30 transcription to convert audio to text for the test cases, for example by using automated voice recognition so that the software-based crawler may parse and respond to heard voice prompts from the IVR via the telephone call. The input may be a phone number, or multiple numbers

(internal or external, such as for testing internal IVR applications or remotely testing external IVRs from outside the internal telephone network), and the output may be a library of test cases suitable for adding to documentation or storing in a database.

[008] An Automated or natural language Speech recognition (ASR/NLSR) Crawler (ASC)

5 may be an application that interrogates a target speech recognition IVR or IVRs that aren't VXML compliant or whose VXML interface is not directly accessible by placing actual telephone calls to an IVR from the crawler platform. The crawler may then, as described previously, reverse engineer any discovered call flows such as by parsing each and every branch of the application by providing all possible speech inputs at all possible layers, and
10 may then build a complete test case library. This solution includes use of transcription to convert audio to text for the test cases, for example by using automated voice recognition so that the software-based crawler may parse and respond to heard voice prompts from the IVR via the telephone call. The input may be a phone number, or multiple numbers (internal or external, such as for testing internal IVR applications or remotely testing external IVRs from
15 outside the internal telephone network), and the output may be a library of test cases suitable for adding to documentation or storing in a database.

[009] A design crawler may be an application that interrogates any standard speech application design template used commonly in the art to build a complete library of test cases for the speech/DTMF application. In such an arrangement, the crawler may traverse a design
20 document such as a spreadsheet, and as described previously may reverse engineer any discovered flows from the document and output a test case library suitable for incorporation into either a database or IVR documentation, or both.

[0010] It should be appreciated that the system of the invention may incorporate multiple crawlers and crawler types such as those described above, interchangeably or simultaneously
25 as may be desirable for a particular arrangement or application.

[010] Two exemplary use cases for the crawlers described above are as follows.

[011] Use Case 1: Using the Speech Crawler. User launches the application using the command line interface.

- **Input:** User enters the URL of the VXML browser to be reverse engineered and the
30 parent folder name of the Test Case library and presses 'Enter' key.

- <application runs>
- **Output:** Xml file with the name of the parent folder with sub folders and test cases within each folder as necessary.

5 [012] Use Case 2: Importing the Test Cases XML. As per normal import procedure however the entire library of the Test Cases is imported with the directory structure intact.

[013] According to another preferred embodiment of the invention, a method for reverse engineering an IVR using a plurality of IVR crawling software applications such as those described previously, is disclosed. According to the embodiment, the method may utilize various IVR crawlers such as those described in the system of the invention above, for
10 example crawlers that may be VXML, DTMF, Speech or design-based in nature or operation. In an initial step, a crawler may access IVR information according to its specific nature, such as a VXML-based crawler loading a VXML script such as from a URL or stored file, or a DTMF/Speech-based crawler placing a telephone call directly to an IVR system. In a next step, the crawler may “crawl”, or reverse engineer the IVR information, such as by iteratively
15 or recursively traversing a conversation path, or by exploring every potential path in a data file (such as with VXML-based crawlers). In a next step, the crawler may then add new call test cases to a testing database, and in a next step stored test cases may be retrieved by a test case execution engine, which may then execute the test cases in a next step. In a next step, the results of test case execution may be analyzed, and these test results may then be stored in a
20 database for further reference in a next step. In an optional final step, test results may be presented for manual review, such as by a human analyst performing tests manually or reviewing the results of prior tests to review operation.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

[014] The accompanying drawings illustrate several embodiments of the invention and,
25 together with the description, serve to explain the principles of the invention according to the embodiments. It will be appreciated by one skilled in the art that the particular embodiments illustrated in the drawings are merely exemplary, and are not to be considered as limiting of the scope of the invention or the claims herein in any way.

[015] **Fig. 1** is a block diagram illustrating an exemplary hardware architecture of a
30 computing device used in an embodiment of the invention.

[016] Fig. 2 is a block diagram illustrating an exemplary logical architecture for a client device, according to an embodiment of the invention.

[017] Fig. 3 is a block diagram showing an exemplary architectural arrangement of clients, servers, and external services, according to an embodiment of the invention.

5 [018] Fig. 4 is another block diagram illustrating an exemplary hardware architecture of a computing device used in various embodiments of the invention.

[019] Fig. 5 is a block diagram illustrating an exemplary system architecture for IVR crawling, according to a preferred embodiment of the invention.

10 [020] Fig. 6 is a method flow diagram illustrating an overview of an exemplary overview method for IVR crawling, according to a preferred embodiment of the invention.

[021] Fig. 7 is a method flow diagram illustrating an exemplary detailed method for reverse engineering a VXML document using a VXML crawler according to the invention.

15 [022] Fig. 8 is a method flow diagram illustrating an exemplary detailed method for interacting with an IVR through DTMF or speech-based audio using a suitable crawler according to the invention.

DETAILED DESCRIPTION

[023] The inventor has conceived, and reduced to practice, in a preferred embodiment of the invention, various systems and methods for live IVR system crawling, such as to rapidly navigate and document a production IVR system.

20 [024] One or more different inventions may be described in the present application. Further, for one or more of the inventions described herein, numerous alternative embodiments may be described; it should be appreciated that these are presented for illustrative purposes only and are not limiting of the inventions contained herein or the claims presented herein in any way. One or more of the inventions may be widely applicable to numerous embodiments, as
25 may be readily apparent from the disclosure. In general, embodiments are described in sufficient detail to enable those skilled in the art to practice one or more of the inventions, and it should be appreciated that other embodiments may be utilized and that structural, logical, software, electrical and other changes may be made without departing from the scope of the particular inventions. Accordingly, one skilled in the art will recognize that one or

more of the inventions may be practiced with various modifications and alterations. Particular features of one or more of the inventions described herein may be described with reference to one or more particular embodiments or figures that form a part of the present disclosure, and in which are shown, by way of illustration, specific embodiments of one or more of the inventions. It should be appreciated, however, that such features are not limited to usage in the one or more particular embodiments or figures with reference to which they are described. The present disclosure is neither a literal description of all embodiments of one or more of the inventions nor a listing of features of one or more of the inventions that must be present in all embodiments.

10 [025] Headings of sections provided in this patent application and the title of this patent application are for convenience only, and are not to be taken as limiting the disclosure in any way.

[026] Devices that are in communication with each other need not be in continuous communication with each other, unless expressly specified otherwise. In addition, devices that are in communication with each other may communicate directly or indirectly through one or more communication means or intermediaries, logical or physical.

[027] A description of an embodiment with several components in communication with each other does not imply that all such components are required. To the contrary, a variety of optional components may be described to illustrate a wide variety of possible embodiments of one or more of the inventions and in order to more fully illustrate one or more aspects of the inventions. Similarly, although process steps, method steps, algorithms or the like may be described in a sequential order, such processes, methods and algorithms may generally be configured to work in alternate orders, unless specifically stated to the contrary. In other words, any sequence or order of steps that may be described in this patent application does not, in and of itself, indicate a requirement that the steps be performed in that order. The steps of described processes may be performed in any order practical. Further, some steps may be performed simultaneously despite being described or implied as occurring non-simultaneously (e.g., because one step is described after the other step). Moreover, the illustration of a process by its depiction in a drawing does not imply that the illustrated process is exclusive of other variations and modifications thereto, does not imply that the illustrated process or any of its steps are necessary to one or more of the invention(s), and does not imply that the illustrated process is preferred. Also, steps are generally described

once per embodiment, but this does not mean they must occur once, or that they may only occur once each time a process, method, or algorithm is carried out or executed. Some steps may be omitted in some embodiments or some occurrences, or some steps may be executed more than once in a given embodiment or occurrence.

5 [028] When a single device or article is described herein, it will be readily apparent that more than one device or article may be used in place of a single device or article. Similarly, where more than one device or article is described herein, it will be readily apparent that a single device or article may be used in place of the more than one device or article.

[029] The functionality or the features of a device may be alternatively embodied by one or
10 more other devices that are not explicitly described as having such functionality or features. Thus, other embodiments of one or more of the inventions need not include the device itself.

[030] Techniques and mechanisms described or referenced herein will sometimes be described in singular form for clarity. However, it should be appreciated that particular
15 embodiments may include multiple iterations of a technique or multiple instantiations of a mechanism unless noted otherwise. Process descriptions or blocks in figures should be understood as representing modules, segments, or portions of code which include one or more executable instructions for implementing specific logical functions or steps in the process. Alternate implementations are included within the scope of embodiments of the present invention in which, for example, functions may be executed out of order from that
20 shown or discussed, including substantially concurrently or in reverse order, depending on the functionality involved, as would be understood by those having ordinary skill in the art.

Hardware Architecture

[031] Generally, the techniques disclosed herein may be implemented on hardware or a combination of software and hardware. For example, they may be implemented in an
25 operating system kernel, in a separate user process, in a library package bound into network applications, on a specially constructed machine, on an application-specific integrated circuit (ASIC), or on a network interface card.

[032] Software/hardware hybrid implementations of at least some of the embodiments disclosed herein may be implemented on a programmable network-resident machine (which
30 should be understood to include intermittently connected network-aware machines) selectively activated or reconfigured by a computer program stored in memory. Such network

devices may have multiple network interfaces that may be configured or designed to utilize different types of network communication protocols. A general architecture for some of these machines may be described herein in order to illustrate one or more exemplary means by which a given unit of functionality may be implemented. According to specific embodiments, at least some of the features or functionalities of the various embodiments disclosed herein may be implemented on one or more general-purpose computers associated with one or more networks, such as for example an end-user computer system, a client computer, a network server or other server system, a mobile computing device (e.g., tablet computing device, mobile phone, smartphone, laptop, or other appropriate computing device), a consumer electronic device, a music player, or any other suitable electronic device, router, switch, or other suitable device, or any combination thereof. In at least some embodiments, at least some of the features or functionalities of the various embodiments disclosed herein may be implemented in one or more virtualized computing environments (e.g., network computing clouds, virtual machines hosted on one or more physical computing machines, or other appropriate virtual environments).

[033] Referring now to **Fig. 1**, there is shown a block diagram depicting an exemplary computing device **100** suitable for implementing at least a portion of the features or functionalities disclosed herein. Computing device **100** may be, for example, any one of the computing machines listed in the previous paragraph, or indeed any other electronic device capable of executing software- or hardware-based instructions according to one or more programs stored in memory. Computing device **100** may be adapted to communicate with a plurality of other computing devices, such as clients or servers, over communications networks such as a wide area network a metropolitan area network, a local area network, a wireless network, the Internet, or any other network, using known protocols for such communication, whether wireless or wired.

[034] In one embodiment, computing device **100** includes one or more central processing units (CPU) **102**, one or more interfaces **110**, and one or more busses **106** (such as a peripheral component interconnect (PCI) bus). When acting under the control of appropriate software or firmware, CPU **102** may be responsible for implementing specific functions associated with the functions of a specifically configured computing device or machine. For example, in at least one embodiment, a computing device **100** may be configured or designed to function as a server system utilizing CPU **102**, local memory **101** and/or remote memory **120**, and interface(s) **110**. In at least one embodiment, CPU **102** may be caused to perform

one or more of the different types of functions and/or operations under the control of software modules or components, which for example, may include an operating system and any appropriate applications software, drivers, and the like.

[035] CPU **102** may include one or more processors **103** such as, for example, a processor
5 from one of the Intel, ARM, Qualcomm, and AMD families of microprocessors. In some
embodiments, processors **103** may include specially designed hardware such as application-
specific integrated circuits (ASICs), electrically erasable programmable read-only memories
(EEPROMs), field-programmable gate arrays (FPGAs), and so forth, for controlling
10 operations of computing device **100**. In a specific embodiment, a local memory **101** (such as
non-volatile random access memory (RAM) and/or read-only memory (ROM), including for
example one or more levels of cached memory) may also form part of CPU **102**. However,
there are many different ways in which memory may be coupled to system **100**. Memory **101**
may be used for a variety of purposes such as, for example, caching and/or storing data,
programming instructions, and the like. It should be further appreciated that CPU **102** may be
15 one of a variety of system-on-a-chip (SOC) type hardware that may include additional
hardware such as memory or graphics processing chips, such as a Qualcomm
SNAPDRAGON™ or Samsung EXYNOS™ CPU as are becoming increasingly common in
the art, such as for use in mobile devices or integrated devices.

[036] As used herein, the term “processor” is not limited merely to those integrated circuits
20 referred to in the art as a processor, a mobile processor, or a microprocessor, but broadly
refers to a microcontroller, a microcomputer, a programmable logic controller, an
application-specific integrated circuit, and any other programmable circuit.

[037] In one embodiment, interfaces **110** are provided as network interface cards (NICs).
Generally, NICs control the sending and receiving of data packets over a computer network;
25 other types of interfaces **110** may for example support other peripherals used with computing
device **100**. Among the interfaces that may be provided are Ethernet interfaces, frame relay
interfaces, cable interfaces, DSL interfaces, token ring interfaces, graphics interfaces, and the
like. In addition, various types of interfaces may be provided such as, for example, universal
serial bus (USB), Serial, Ethernet, FIREWIRE™, THUNDERBOLT™, PCI, parallel, radio
30 frequency (RF), BLUETOOTH™, near-field communications (e.g., using near-field
magnetics), 802.11 (WiFi), frame relay, TCP/IP, ISDN, fast Ethernet interfaces, Gigabit
Ethernet interfaces, Serial ATA (SATA) or external SATA (ESATA) interfaces, high-

definition multimedia interface (HDMI), digital visual interface (DVI), analog or digital audio interfaces, asynchronous transfer mode (ATM) interfaces, high-speed serial interface (HSSI) interfaces, Point of Sale (POS) interfaces, fiber data distributed interfaces (FDDIs), and the like. Generally, such interfaces **110** may include physical ports appropriate for communication with appropriate media. In some cases, they may also include an independent processor (such as a dedicated audio or video processor, as is common in the art for high-fidelity A/V hardware interfaces) and, in some instances, volatile and/or non-volatile memory (e.g., RAM).

[038] Although the system shown in **Fig. 1** illustrates one specific architecture for a computing device **100** for implementing one or more of the inventions described herein, it is by no means the only device architecture on which at least a portion of the features and techniques described herein may be implemented. For example, architectures having one or any number of processors **103** may be used, and such processors **103** may be present in a single device or distributed among any number of devices. In one embodiment, a single processor **103** handles communications as well as routing computations, while in other embodiments a separate dedicated communications processor may be provided. In various embodiments, different types of features or functionalities may be implemented in a system according to the invention that includes a client device (such as a tablet device or smartphone running client software) and server systems (such as a server system described in more detail below).

[039] Regardless of network device configuration, the system of the present invention may employ one or more memories or memory modules (such as, for example, remote memory block **120** and local memory **101**) configured to store data, program instructions for the general-purpose network operations, or other information relating to the functionality of the embodiments described herein (or any combinations of the above). Program instructions may control execution of or comprise an operating system and/or one or more applications, for example. Memory **120** or memories **101, 120** may also be configured to store data structures, configuration data, encryption data, historical system operations information, or any other specific or generic non-program information described herein.

[040] Because such information and program instructions may be employed to implement one or more systems or methods described herein, at least some network device embodiments may include nontransitory machine-readable storage media, which, for example, may be

configured or designed to store program instructions, state information, and the like for performing various operations described herein. Examples of such nontransitory machine-readable storage media include, but are not limited to, magnetic media such as hard disks, floppy disks, and magnetic tape; optical media such as CD-ROM disks; magneto-optical media such as optical disks, and hardware devices that are specially configured to store and perform program instructions, such as read-only memory devices (ROM), flash memory (as is common in mobile devices and integrated systems), solid state drives (SSD) and “hybrid SSD” storage drives that may combine physical components of solid state and hard disk drives in a single hardware device (as are becoming increasingly common in the art with regard to personal computers), memristor memory, random access memory (RAM), and the like. It should be appreciated that such storage means may be integral and non-removable (such as RAM hardware modules that may be soldered onto a motherboard or otherwise integrated into an electronic device), or they may be removable such as swappable flash memory modules (such as “thumb drives” or other removable media designed for rapidly exchanging physical storage devices), “hot-swappable” hard disk drives or solid state drives, removable optical storage discs, or other such removable media, and that such integral and removable storage media may be utilized interchangeably. Examples of program instructions include both object code, such as may be produced by a compiler, machine code, such as may be produced by an assembler or a linker, byte code, such as may be generated by for example a Java™ compiler and may be executed using a Java virtual machine or equivalent, or files containing higher level code that may be executed by the computer using an interpreter (for example, scripts written in Python, Perl, Ruby, Groovy, or any other scripting language).

[041] In some embodiments, systems according to the present invention may be implemented on a standalone computing system. Referring now to **Fig. 2**, there is shown a block diagram depicting a typical exemplary architecture of one or more embodiments or components thereof on a standalone computing system. Computing device **200** includes processors **210** that may run software that carry out one or more functions or applications of embodiments of the invention, such as for example a client application **230**. Processors **210** may carry out computing instructions under control of an operating system **220** such as, for example, a version of Microsoft’s WINDOWS™ operating system, Apple’s Mac OS/X or iOS operating systems, some variety of the Linux operating system, Google’s ANDROID™ operating system, or the like. In many cases, one or more shared services **225** may be operable in system **200**, and may be useful for providing common services to client

applications **230**. Services **225** may for example be WINDOWS™ services, user-space common services in a Linux environment, or any other type of common service architecture used with operating system **210**. Input devices **270** may be of any type suitable for receiving user input, including for example a keyboard, touchscreen, microphone (for example, for voice input), mouse, touchpad, trackball, or any combination thereof. Output devices **260** may be of any type suitable for providing output to one or more users, whether remote or local to system **200**, and may include for example one or more screens for visual output, speakers, printers, or any combination thereof. Memory **240** may be random-access memory having any structure and architecture known in the art, for use by processors **210**, for example to run software. Storage devices **250** may be any magnetic, optical, mechanical, memristor, or electrical storage device for storage of data in digital form (such as those described above, referring to **Fig. 1**). Examples of storage devices **250** include flash memory, magnetic hard drive, CD-ROM, and/or the like.

[042] In some embodiments, systems of the present invention may be implemented on a distributed computing network, such as one having any number of clients and/or servers. Referring now to **Fig. 3**, there is shown a block diagram depicting an exemplary architecture **300** for implementing at least a portion of a system according to an embodiment of the invention on a distributed computing network. According to the embodiment, any number of clients **330** may be provided. Each client **330** may run software for implementing client-side portions of the present invention; clients may comprise a system **200** such as that illustrated in **Fig. 2**. In addition, any number of servers **320** may be provided for handling requests received from one or more clients **330**. Clients **330** and servers **320** may communicate with one another via one or more electronic networks **310**, which may be in various embodiments any of the Internet, a wide area network, a mobile telephony network (such as CDMA or GSM cellular networks), a wireless network (such as WiFi, Wimax, LTE, and so forth), or a local area network (or indeed any network topology known in the art; the invention does not prefer any one network topology over any other). Networks **310** may be implemented using any known network protocols, including for example wired and/or wireless protocols.

[043] In addition, in some embodiments, servers **320** may call external services **370** when needed to obtain additional information, or to refer to additional data concerning a particular call. Communications with external services **370** may take place, for example, via one or more networks **310**. In various embodiments, external services **370** may comprise web-enabled services or functionality related to or installed on the hardware device itself. For

example, in an embodiment where client applications **230** are implemented on a smartphone or other electronic device, client applications **230** may obtain information stored in a server system **320** in the cloud or on an external service **370** deployed on one or more of a particular enterprise's or user's premises.

5 **[044]** In some embodiments of the invention, clients **330** or servers **320** (or both) may make use of one or more specialized services or appliances that may be deployed locally or remotely across one or more networks **310**. For example, one or more databases **340** may be used or referred to by one or more embodiments of the invention. It should be understood by one having ordinary skill in the art that databases **340** may be arranged in a wide variety of
10 architectures and using a wide variety of data access and manipulation means. For example, in various embodiments one or more databases **340** may comprise a relational database system using a structured query language (SQL), while others may comprise an alternative data storage technology such as those referred to in the art as “NoSQL” (for example, Hadoop Cassandra, Google BigTable, and so forth). In some embodiments, variant database
15 architectures such as column-oriented databases, in-memory databases, clustered databases, distributed databases, or even flat file data repositories may be used according to the invention. It will be appreciated by one having ordinary skill in the art that any combination of known or future database technologies may be used as appropriate, unless a specific database technology or a specific arrangement of components is specified for a particular
20 embodiment herein. Moreover, it should be appreciated that the term “database” as used herein may refer to a physical database machine, a cluster of machines acting as a single database system, or a logical database within an overall database management system. Unless a specific meaning is specified for a given use of the term “database”, it should be construed to mean any of these senses of the word, all of which are understood as a plain meaning of
25 the term “database” by those having ordinary skill in the art.

[045] Similarly, most embodiments of the invention may make use of one or more security systems **360** and configuration systems **350**. Security and configuration management are common information technology (IT) and web functions, and some amount of each are generally associated with any IT or web systems. It should be understood by one having
30 ordinary skill in the art that any configuration or security subsystems known in the art now or in the future may be used in conjunction with embodiments of the invention without limitation, unless a specific security **360** or configuration system **350** or approach is specifically required by the description of any specific embodiment.

[046] Fig. 4 shows an exemplary overview of a computer system 400 as may be used in any of the various locations throughout the system. It is exemplary of any computer that may execute code to process data. Various modifications and changes may be made to computer system 400 without departing from the broader scope of the system and method disclosed herein. CPU 401 is connected to bus 402, to which bus is also connected memory 403, nonvolatile memory 404, display 407, I/O unit 408, and network interface card (NIC) 413. I/O unit 408 may, typically, be connected to keyboard 409, pointing device 410, hard disk 412, and real-time clock 411. NIC 413 connects to network 414, which may be the Internet or a local network, which local network may or may not have connections to the Internet. Also shown as part of system 400 is power supply unit 405 connected, in this example, to ac supply 406. Not shown are batteries that could be present, and many other devices and modifications that are well known but are not applicable to the specific novel functions of the current system and method disclosed herein. It should be appreciated that some or all components illustrated may be combined, such as in various integrated applications (for example, Qualcomm or Samsung SOC-based devices), or whenever it may be appropriate to combine multiple capabilities or functions into a single hardware device (for instance, in mobile devices such as smartphones, video game consoles, in-vehicle computer systems such as navigation or multimedia systems in automobiles, or other integrated hardware devices).

[047] In various embodiments, functionality for implementing systems or methods of the present invention may be distributed among any number of client and/or server components. For example, various software modules may be implemented for performing various functions in connection with the present invention, and such modules may be variously implemented to run on server and/or client components.

Conceptual Architecture

[048] Fig. 5 is a block diagram of an exemplary system 500 for IVR crawling comprising a speech crawler 521 that may be a VXML-based crawler stored and operating on a network-connected computing device (such as a server or a desktop workstation), a DTMF crawler (DC) 522 that may be a touch-tone (DTMF) based interaction program or an ASR Speech Crawler (ASC) 522 that may be a automatically generated utterance based interaction program (as may be utilized interchangeably or simultaneously, according to the nature of the audio input received or operation being performed), a design crawler 520 that may be a spreadsheet-based software crawler, a call flow database 530 that may store and provide call flow documentation or records such as those generated by the crawlers of the invention, a test

executive engine **540** that may perform call flow testing according to known call flow records, and a test results analyzer **545** that may perform analysis of the results of performed call flow tests such as to determine the performance of an IVR or the accuracy of a call flow documentation record, is disclosed. According to the embodiment, a speech crawler (SC) **521**
5 may be an application that interrogates a target VXML browser **572**, reverse engineers any discovered call flows by parsing each branch of the VXML application (such as by providing all possible inputs at all possible layers) and builds a complete test case library. The input may be the URL of the target VXML file **511** and the output may be a file containing the test cases in XML format, such as for storing in a database or adding to documentation files.

10 **[049]** A DTMF crawler (DC) **522** may be an application that interrogates a target touch tone IVR or IVRs **513** that aren't VXML compliant (or whose VXML interface is not accessible) by placing actual telephone calls to an IVR **513** from the crawler platform via a telephone network **501** such as a public switched telephone network (PSTN) or cellular network such as a GSM or CDMA radio communications network. The crawler may then, as described
15 previously, reverse engineer any discovered call flows such as by parsing each and every branch of the application by providing all possible DTMF inputs via a DTMF generator **524** (such as may be utilized to generate DTMF tones to signal a telephone input without requiring a physical key press, as is appropriate for software-based applications) at all possible layers, and may then build a complete test case library. This solution includes use of
20 transcription to convert audio to text for the test cases, for example by utilizing an automated speech recognition engine **523** so that the software-based crawler may parse and respond to heard voice prompts from the IVR via the telephone call. The input may be a phone number, or multiple numbers (internal or external, such as for testing internal IVR applications or remotely testing external IVRs from outside the internal telephone network), and the output
25 may be a library of test cases suitable for adding to documentation or storing in a database.

[050] An ASR/NLSR Speech crawler (ASC) **522** may be an application that interrogates a target ASR/NLSR speech based IVR or IVRs **513** that aren't VXML compliant (or whose VXML interface is not accessible) by placing actual telephone calls to an IVR **513** from the crawler platform via a telephone network **501** such as a public switched telephone network
30 (PSTN) or cellular network such as a GSM or CDMA radio communications network. The crawler may then, as described previously, reverse engineer any discovered call flows such as by parsing each and every branch of the application by providing all possible DTMF inputs via a speech utterance (Text to speech) generator **524** (such as may be utilized to generate

simulated customer spoken utterances without requiring a live human speaker, as is appropriate for software-based applications) at all possible layers, and may then build a complete test case library. This solution includes use of transcription to convert audio to text for the test cases, for example by utilizing an automated speech recognition engine **523** so that the software-based crawler may parse and respond to heard voice prompts from the IVR via the telephone call. The input may be a phone number, or multiple numbers (internal or external, such as for testing internal IVR applications or remotely testing external IVRs from outside the internal telephone network), and the output may be a library of test cases suitable for adding to documentation or storing in a database.

[051] A design crawler **520** may be an application that interrogates a standard speech application design template **510** used commonly in the art to build a complete library of test cases for the speech/DTMF application. In such an arrangement, the crawler may traverse a design document **510** such as a spreadsheet, and as described previously may reverse engineer any discovered flows from the document and output a test case library suitable for incorporation into either a database or IVR documentation, or both.

[052] As illustrated, a test executive engine **540** may execute test cases based at least in part on stored or received input from the various IVR crawlers of the invention, and may present the results of test execution to a test results analyzer **545** for analysis. The resulting analyzed test results **550** may then be presented for review such as by a human analyst, or for storage in a database for further review at a later time or for future incorporation into addition analysis operations.

[053] It should be appreciated that the system of the invention may incorporate multiple crawlers and crawler types such as those described above, interchangeably or simultaneously as may be desirable for a particular arrangement or application.

Detailed Description of Exemplary Embodiments

[054] Fig. 6 is a method flow diagram illustrating an exemplary overview method **600** for reverse engineering an IVR using a plurality of IVR crawling software applications such as those described previously, is disclosed. According to the embodiment, the method may utilize various IVR crawlers such as those described in the system of the invention above, for example crawlers that may be VXML, DTMF, or design-based in nature or operation. In an initial step, a crawler may access IVR information according to its specific nature, such as a VXML-based crawler loading a VXML script such as from a URL or stored file **601**, a

speech crawler loading a design specification **605**, or a DTMF or ASR/NLSR Speech-based crawler connecting to an IVR **610** and placing a telephone call directly to an IVR system **611**. In a next step, the crawler may “crawl”, or reverse engineer the IVR information according to its specific nature, such as by reverse engineering a VXML document **602**, a design
5 specification **606**, or by using DTMF or spoken utterance (such as actual live or recorded human speech or automatically-generated artificial speech such as from a text-to-speech generator utilizing a script) audio to traverse the conversation paths of an IVR **612**. In a next step **620**, the crawler may then add new call test cases to a testing database, and in a next step **621** stored test cases may be retrieved by a test case execution engine, which may then
10 execute the test cases in a next step **622**. In a next step **623**, the results of test case execution may be analyzed, and these test results may then be stored in a database for further reference in a next step **624**. In an optional final step **625**, test results may be presented for manual review, such as by a human analyst performing tests manually or reviewing the results of prior tests to review operation.

15 **[055]** Fig. 7 is a method flow diagram illustrating an exemplary detailed method **700** for reverse engineering a VXML document using a VXML crawler according to the invention. In an initial step **701**, a crawler may retrieve a URL linking to a VXML file from a VXML browser, and in a next step **702** may parse the linked VXML file after retrieval. In a next step **703**, the crawler may proceed to identify all possible branches of execution, such as by
20 parsing the VXML file to identify points at which the IVR would present a choice, wherein a variety of inputs may be received from a customer (or other caller to the IVR system) and each input corresponds to a different possible choice leading down a conversation path through the IVR menu. In a next step **704**, the crawler may identify what input strings may be required to traverse the branches found. In a next step **705**, the crawler may now create a test
25 case using the identified inputs, such that execution of the test case would effectively navigate a particular path through the IVR menu such as by waiting for an input prompt indicating a branch, then supplying the required input to traverse the branch down one path and so on until the end of execution when there are no more branches and the end of the IVR menu has been reached (such as would generally result in a caller being connected with a
30 contact center agent or given further instructions for assistance outside of the IVR, for example a specific number or web address to pursue further help). In a final step **706**, the resulting test cases may be stored in a database for future reference.

[056] **Fig. 8** is a method flow diagram illustrating an exemplary detailed method **800** for interacting with an IVR through DTMF or speech-based audio using a DTMF or ASR/NLSR Speech crawler according to the invention. In an initial step **801**, a crawler may place a telephone call to an IVR system, such as via a PSTN or Internet-based connection such as any of a number of voice over IP (VoIP) services supporting DTMF tone-based or spoken utterance input. In a next step **802**, the crawler may receive a prompt for input from the IVR, such as a caller would normally hear a voice prompt instructing them of a choice to continue navigating the IVR menu (such as “press 1 for technical support, or press 2 for account services”, or for a speech application “for technical support say support for account services say accounts” for example). In a next step **803**, the crawler may process this prompt using automated speech recognition (ASR), such as to identify what is being spoken by the IVR menu prompt in order to process it. In a next step **804**, the crawler may identify allowable DTMF or speech utterance inputs, such as (continuing the previous example) identifying that the key presses “1” and “2” (or for speech, “support” or “accounts”, for example) are possible input choices for this particular prompt. The crawler may then add these input choices to a processing “stack”, such that possible inputs may be stored along with their corresponding prompts in the order in which they were encountered, to facilitate orderly traversal of the IVR menu system during operation. In a next step **805**, the crawler may retrieve the next DTMF or speech utterance input on the stack (such as, in the case of this example, the tone corresponding to the key press “1” or say “support”), and supply the corresponding DTMF tone input to the IVR system such as to trigger the menu prompt and continue traversing the menu path. While additional prompts are encountered, operation may continue in a looping or iterative fashion from a previous step **802**, such that the crawlers continues to receive and process audio prompts from the IVR, identify appropriate DTMF or speech utterance inputs and place them on the stack, and supply the next input to proceed through the IVR menu prompts encountered. When no more prompts are encountered (such as when the crawler reaches the end of an IVR menu path), in a next step **806** the crawler may generate a test case for the path used based at least in part on the prompts encountered and inputs supplied, and may then proceed to the next DTMF or speech utterance input on the stack and continue down a new menu path through the IVR. In a final step **806**, the crawler may send resulting test cases to a database for storage and future reference. It should be appreciated that test cases may be sent individually as they are completed (such as while the crawler is still traversing additional IVR paths for new cases), or they may be sent all at once in a bulk operation once all possible IVR paths have been exhausted and operation is complete.

[057] The skilled person will be aware of a range of possible modifications of the various embodiments described above. Accordingly, the present invention is defined by the claims and their equivalents.

What is claimed is:

1. A system for interactive voice response system crawling, comprising:
 - an IVR crawler stored and operating on a network-connected computing device; and
 - a database stored and operating on a network-connected computing device.
- 5 wherein the IVR crawler traverses a menu path in an interactive voice response system;
 - wherein the IVR crawler generates test cases based at least in part on the menu paths traversed;
 - wherein the IVR crawler sends the test cases to the database; and
 - wherein the database stores the test cases received from the IVR crawler.
- 10 2. The system of claim 1, wherein the IVR crawler is a VXML-based crawler.
3. The system of claim 2, further comprising a VXML browser, wherein the VXML browser provides VXML files via a network.
4. The system of claim 3, wherein the VXML-based crawler receives a VXML file from the VXML browser.
- 15 5. The system of claim 1, wherein the IVR crawler is a design-based crawler.
6. The system of claim 5, wherein the design-based crawler processes a design specification for an IVR.
7. The system of claim 1, wherein the IVR crawler is a DTMF-based crawler.
8. The system of claim 7, wherein the DTMF-based crawler places a telephone call to an IVR
- 20 system.
9. The system of claim 8, wherein the DTMF-based crawler interacts with the IVR system via DTMF tone inputs.
10. The system of claim 1, wherein the IVR crawler is a ASR/NLSR speech-based crawler.
11. The system of claim 7, wherein the ASR/NLSR speech-based crawler places a telephone
- 25 call to an IVR system.
12. The system of claim 8, wherein the ASR/NLSR speech-based crawler interacts with the IVR system via automatically generated speech utterance inputs.

13. The system of claim 9, further comprising an automatic speech recognition engine stored and operating on a network-connected computing device, wherein the automated speech recognition engine interprets audio prompts from the IVR on behalf of the DTMF or ASR/NLSR speech-based crawler.
- 5 14. The system of claim 1, further comprising a test case execution engine, wherein the test case execution engine executes test cases produced by the IVR crawler.
15. The system of claim 11, wherein the test cases are retrieved directly from the IVR crawler as they are produced.
16. The system of claim 11, wherein stored test cases are retrieved from a database.
- 10 17. The system of claim 11, further comprising a test results analyzer stored and operating on a network-connected computing device, wherein the test results analyzer analyzes the results of test case execution from the test execution engine.
18. The system of claim 14, wherein the analysis results are stored for future reference.
19. The system of claim 14, wherein the results are provided for immediate review.
- 15 20. A method for interactive voice response system crawling, comprising the steps of:
accessing, via an IVR crawler, an IVR system;
reverse engineering the menu paths of the IVR system;
producing a test case based at least in part on the menu paths discovered; and
storing, in a database, the test case for future reference.
- 20 21. The method of claim 17, further comprising the steps of:
executing, via a test case execution engine, the test case;
analyzing, via a test results analyzer, the results of test case execution; and
providing the analysis results.
22. The method of claim 18, further comprising the step of storing, in a database, the analysis
25 results for future reference.

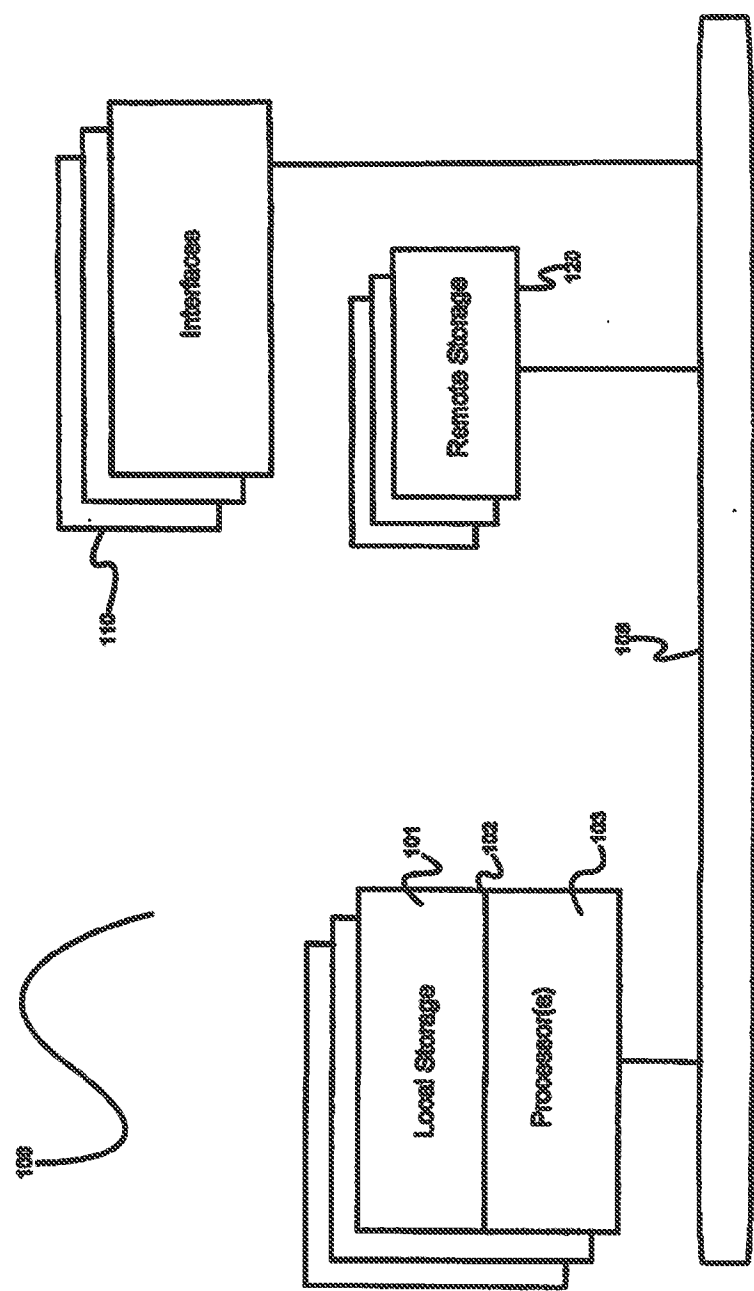


Fig. 1

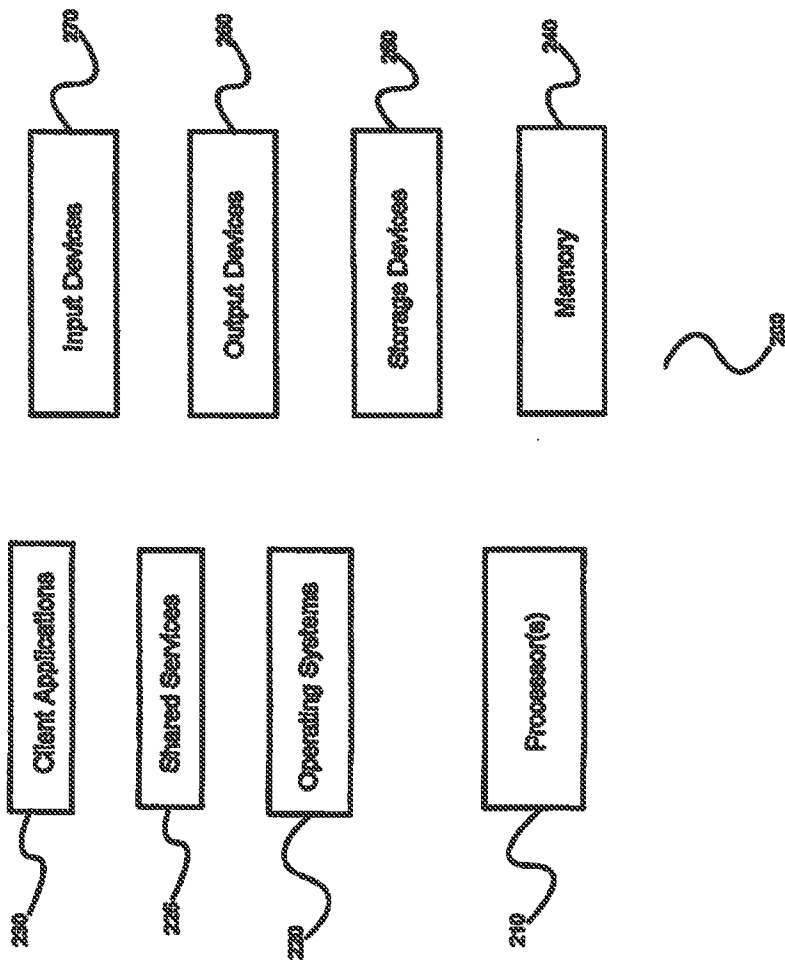


Fig. 2

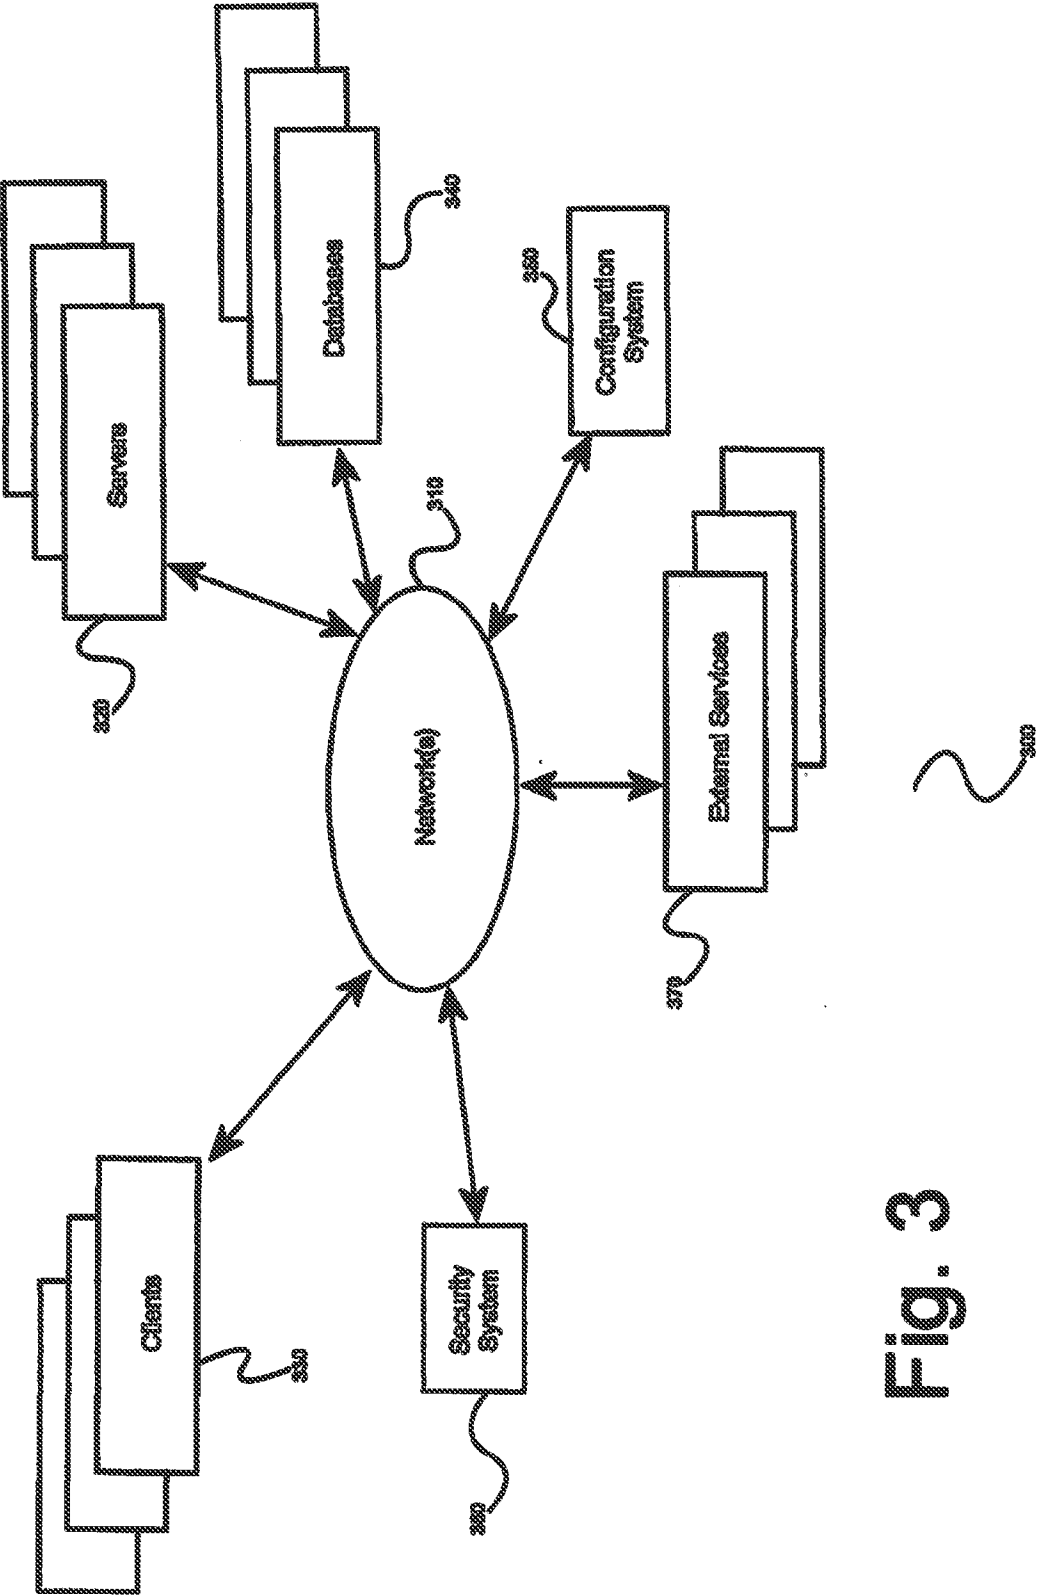


Fig. 3

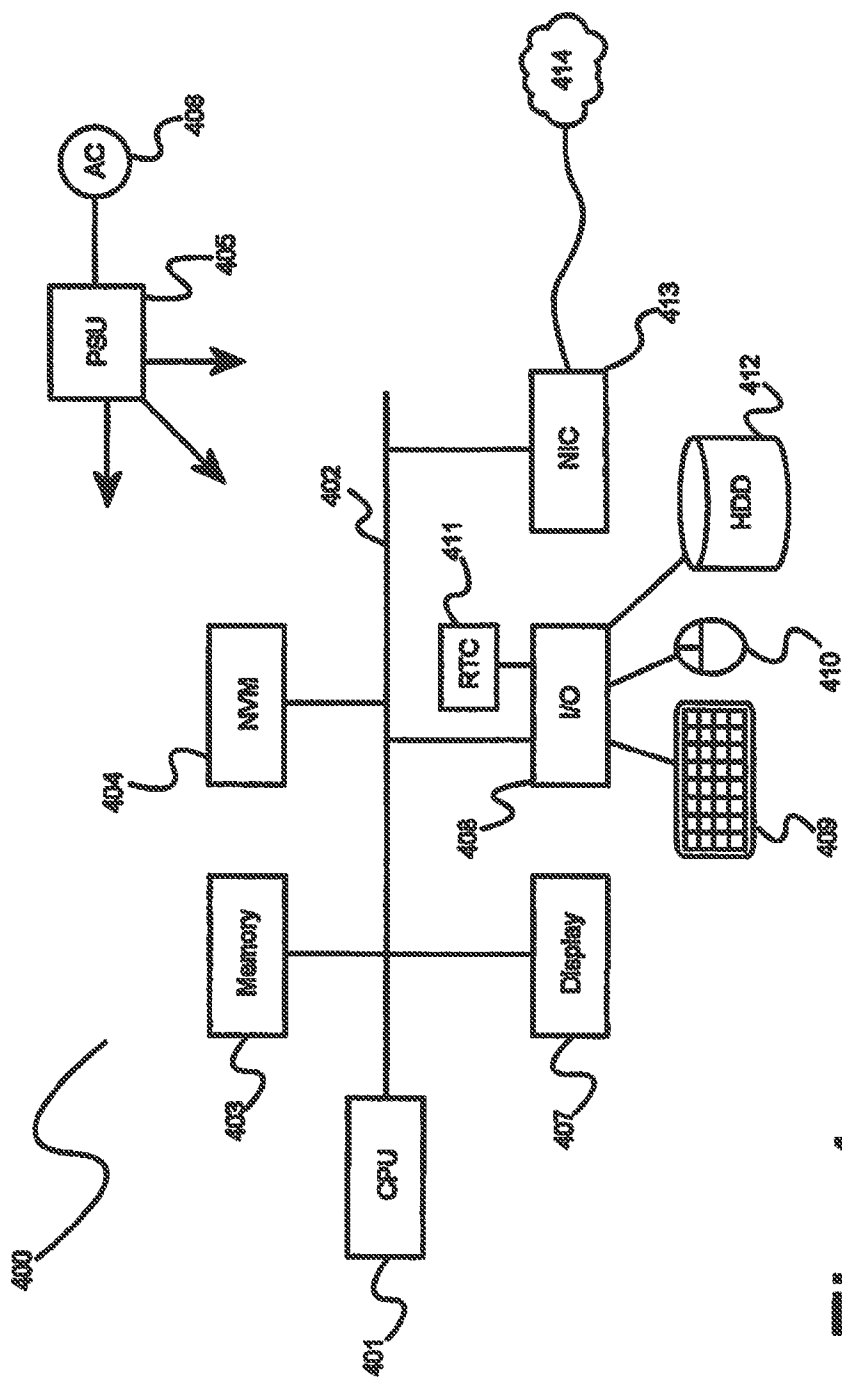


Fig. 4

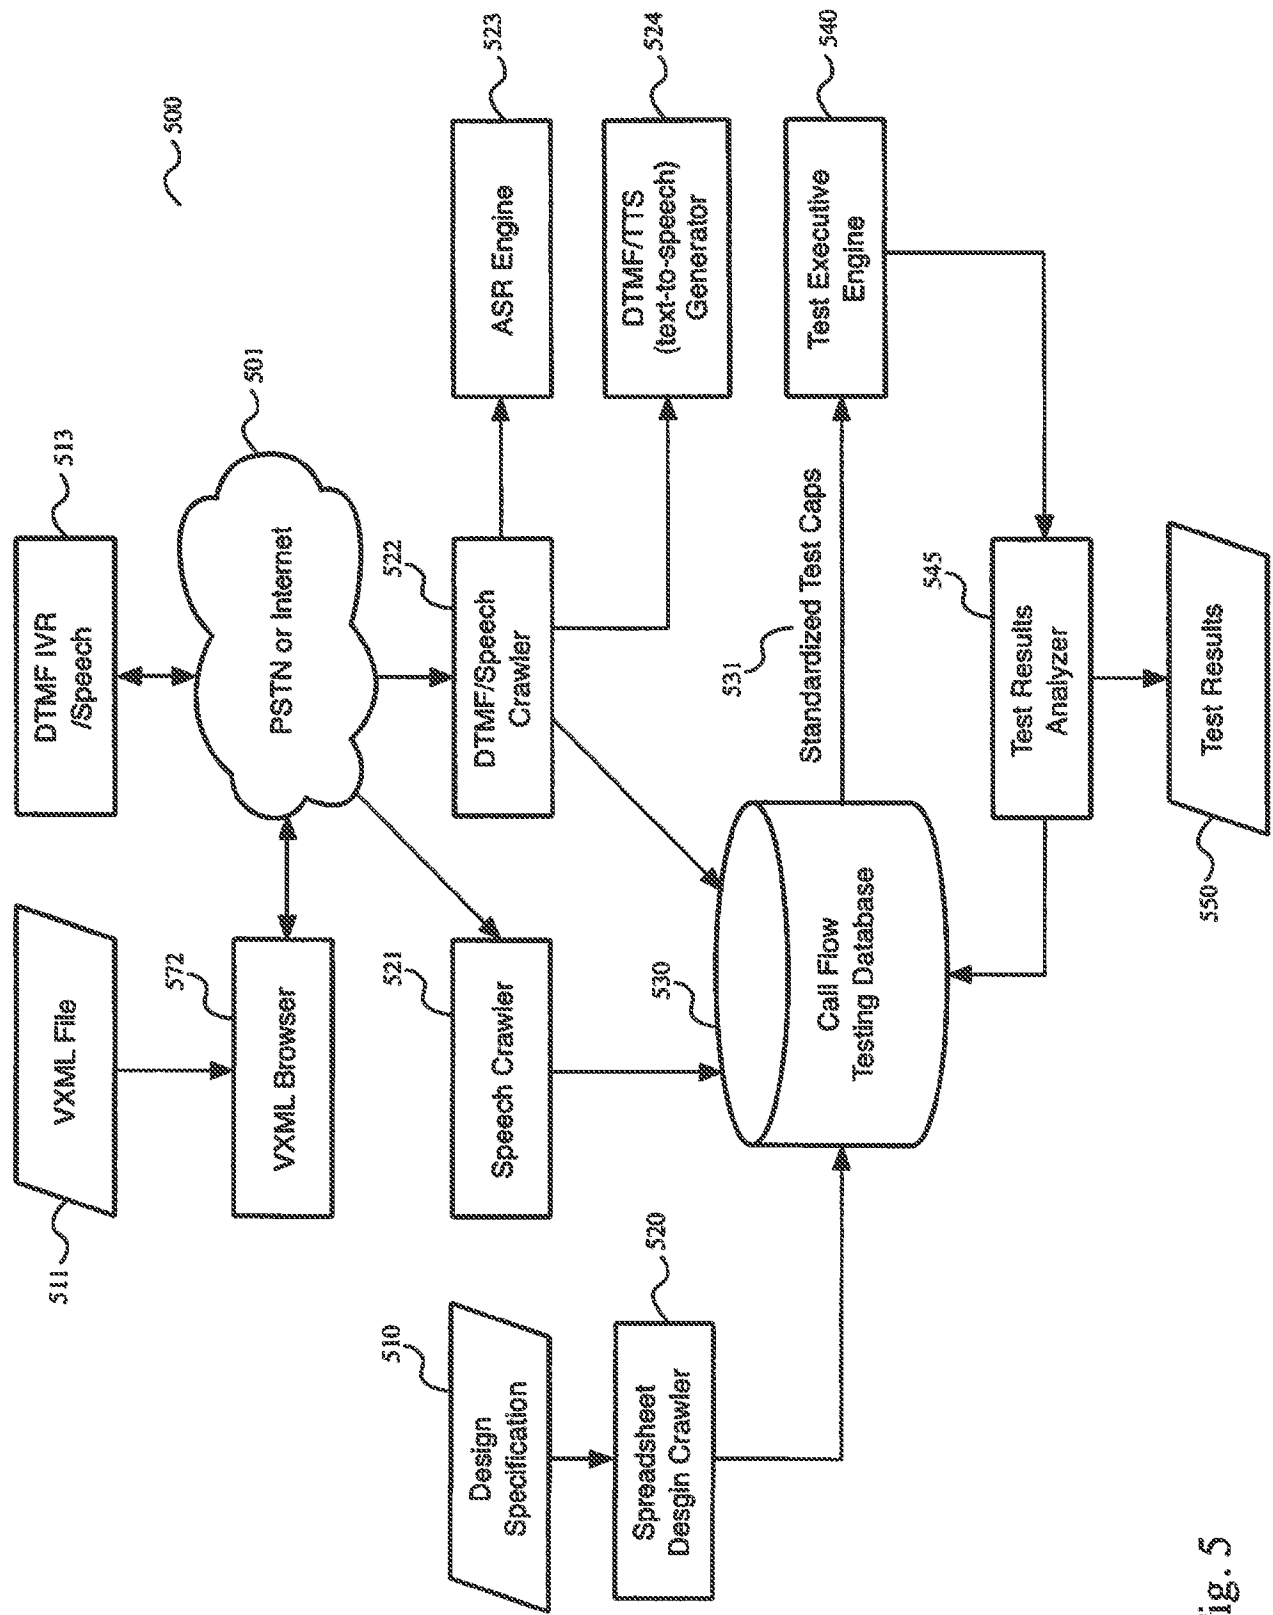


Fig. 5

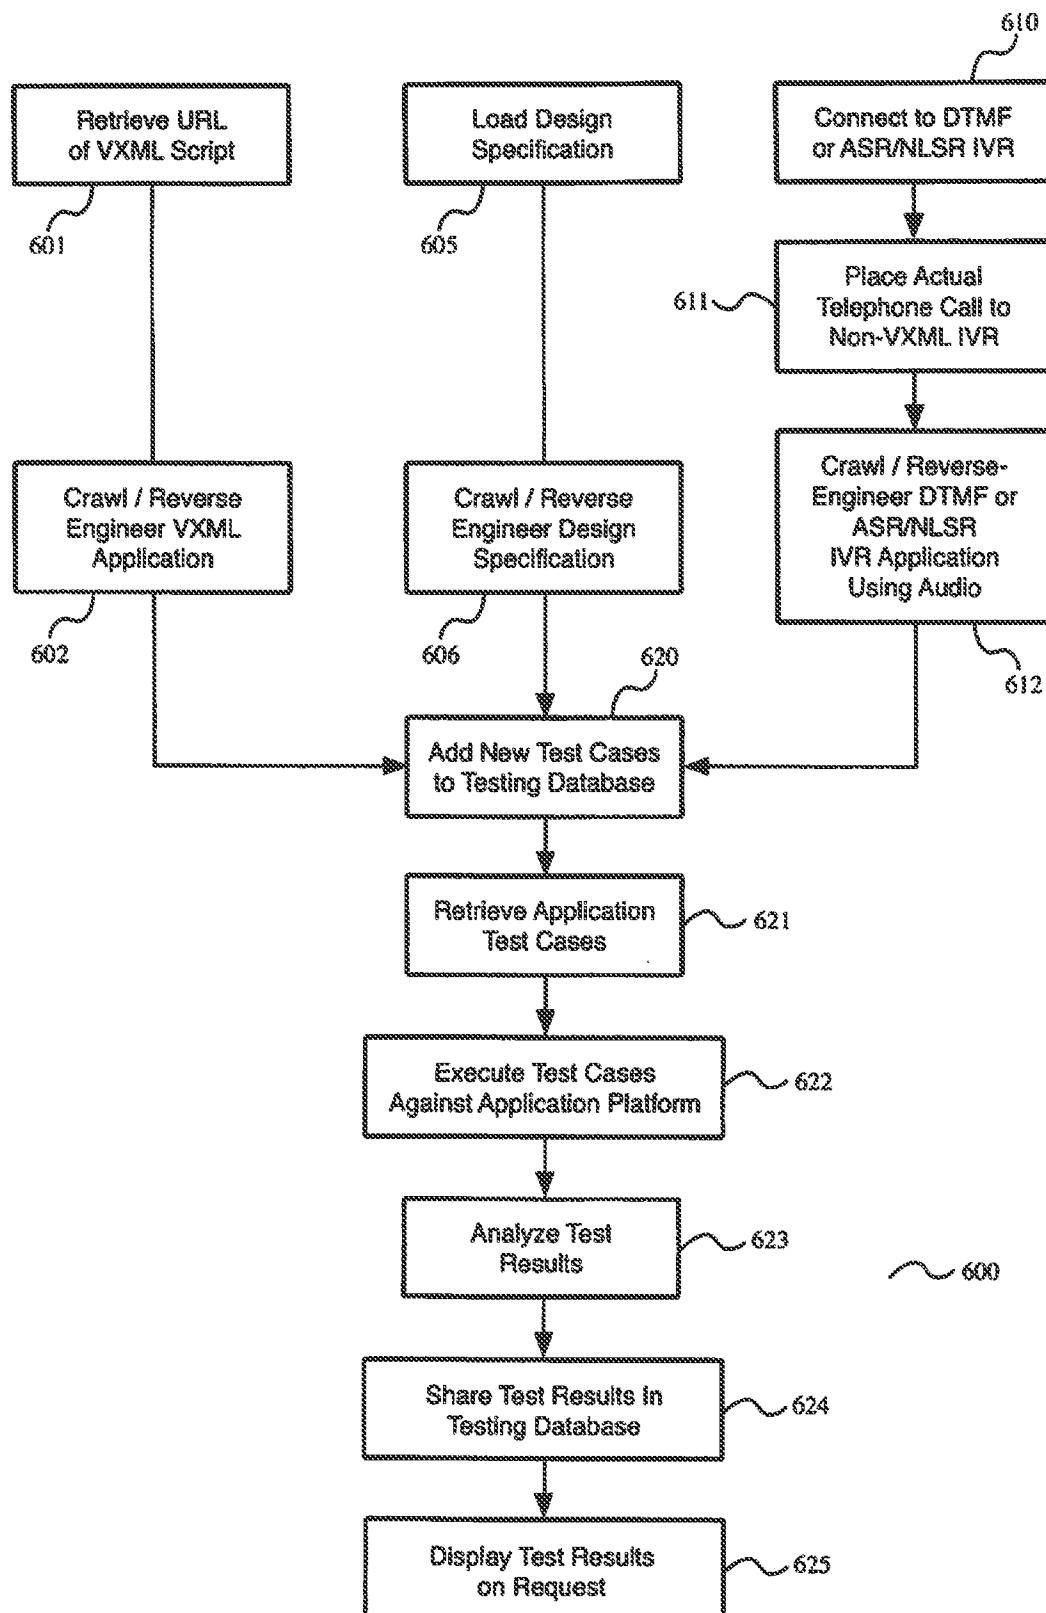


Fig. 6

7/8

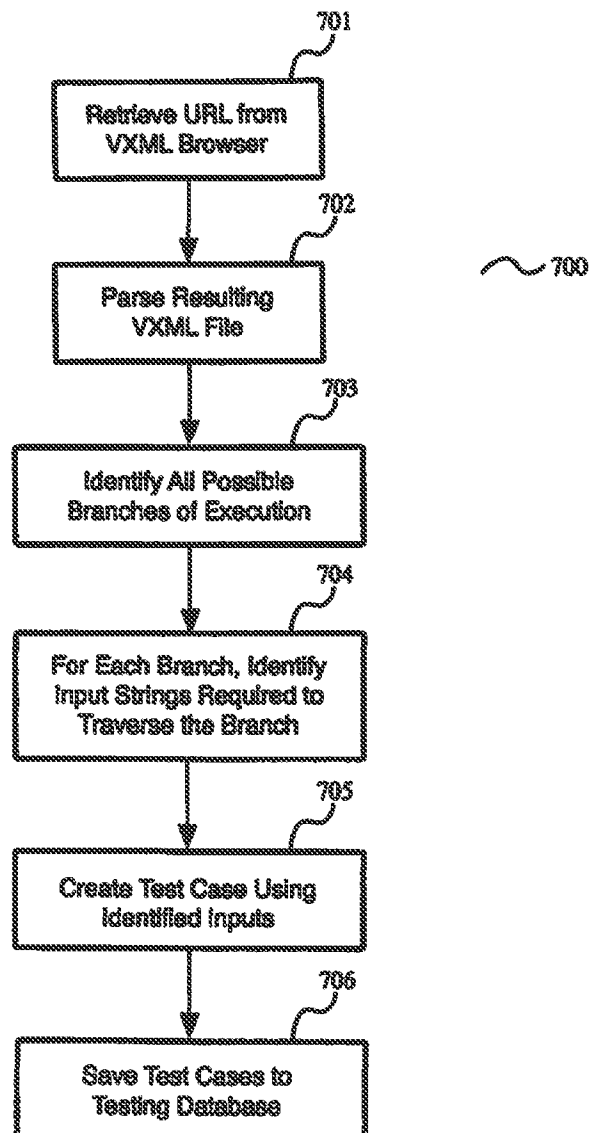


Fig. 7

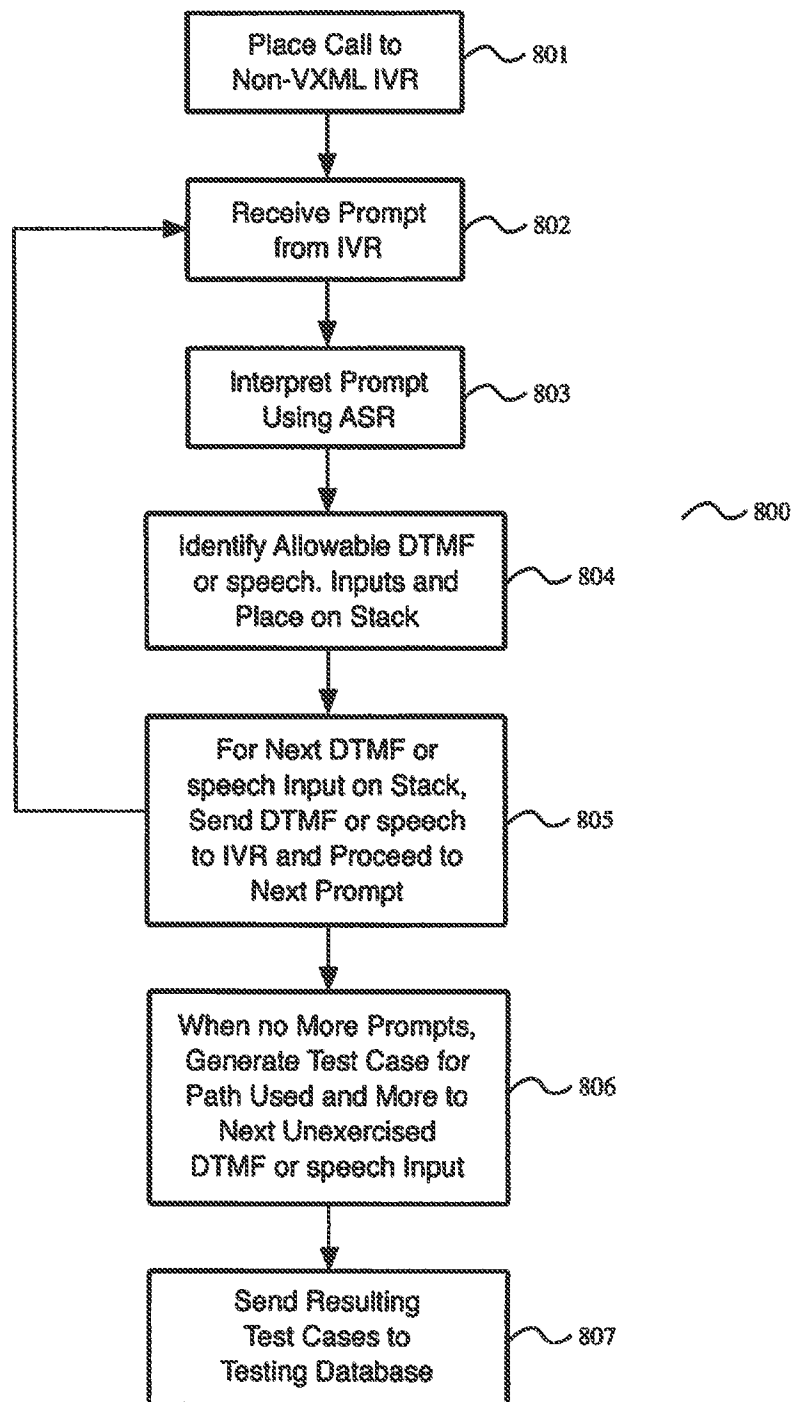


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2016/012245

A. CLASSIFICATION OF SUBJECT MATTER														
H04M 3/26 (2006.01) H04M 7/06 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED														
Minimum documentation searched (classification system followed by classification symbols)														
H04M 3/00, 3/22-3/32, 3/487-3/53, 7/00, 7/06, 1/24, 1/64, G10L 13/00, 17/00, 21/00, H04L12/26, 12/58, 12/66, G06F 11/36														
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched														
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)														
PatSearch (RUPTO internal), USPTO, PAJ, Esp@cenet, Information Retrieval System of FIPS														
C. DOCUMENTS CONSIDERED TO BE RELEVANT														
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
A	US 2007/0263834 A1 (MICROSOFT CORPORATION) 15.11.2007	1-22												
A	CN 103188407 A (CHINA MOBILE GROUP GUANGDONG COMPANY LIMITED) 03.07.2013	1-22												
A	US 2003/0212561 A1 (WILLIAMS DOUGLAS CARTER at al) 13.11.2003	1-22												
A	US 2008/0144786 A1 (INTERNATIONAL BUSINESS MACHINES CORPORATION) 19.06.2008	1-22												
A	US 2011/0293076 A1 (VERIZON PATENT AND LICENSING INC) 01.12.2011	1-22												
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.														
<table border="0"> <tr> <td>* Special categories of cited documents:</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"E" earlier document but published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"E" earlier document but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	"O" document referring to an oral disclosure, use, exhibition or other means		"P" document published prior to the international filing date but later than the priority date claimed	
* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention													
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone													
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art													
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family													
"O" document referring to an oral disclosure, use, exhibition or other means														
"P" document published prior to the international filing date but later than the priority date claimed														
Date of the actual completion of the international search		Date of mailing of the international search report												
19 April 2016 (19.04.2016)		05 May 2016 (05.05.2016)												
Name and mailing address of the ISA/RU: Federal Institute of Industrial Property, Berezhkovskaya nab., 30-1, Moscow, G-59, GSP-3, Russia, 125993 Facsimile No: (8-495) 531-63-18, (8-499) 243-33-37		Authorized officer N. Lavrentieva Telephone No. 8 (499) 240-25-91												