

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 August 2006 (31.08.2006)

PCT

(10) International Publication Number
WO 2006/089908 A1

(51) International Patent Classification:
F17C 11/00 (2006.01)

(21) International Application Number:
PCT/EP2006/060181

(22) International Filing Date:
22 February 2006 (22.02.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/062,861 23 February 2005 (23.02.2005) US

(71) Applicants (for all designated States except US):
BASF AKTIENGESELLSCHAFT [DE/DE]; 67056 Ludwigshafen (DE). **THE REGENTS OF THE UNIVERSITY OF MICHIGAN** [US/US]; 3003 South State Street, Ann Arbor, Michigan 48109 - 1280 (US).

(72) Inventors: **MÜLLER, Ulrich**; Am Stecken 14a, 67435 Neustadt (DE). **HESSE, Michael**; Weinbietstr. 10, 67549 Worms (DE). **PÜTTER, Hermann**; Haardter Str. 1a, 67433 Neustadt (DE). **YAGHI, Omar M.**; 2725 Craig Road, Ann Arbor, Michigan 48103 (US).

(74) Agent: **ISENBRUCK, Günter**; Isenbruck, Bösl, Hörschler, Wichmann, Huhn, Patentanwälte, Theodorheuss-anlage 12, 68165 Mannheim (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METAL-ORGANIC FRAMEWORK MATERIALS FOR GASEOUS HYDROCARBON STORAGE

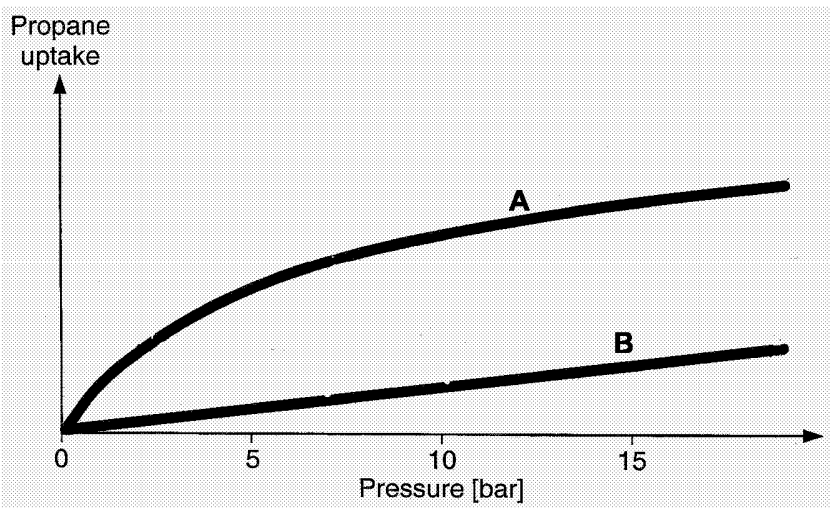

(57) Abstract: The present invention relates to a method of storing a liquefied gas in a container containing a metal-organic framework material, the container filled with such a gas, a process for filling container and the use of the container to release the gas.

WO 2006/089908 A1

Metal-organic framework materials for gaseous hydrocarbon storage

5 The present invention relates to a method of storing a liquefied gas in a container containing a metal-organic framework material, the container filled with such a gas, a process for filling container and the use of the container to release the gas.

10 Liquefied gas, especially propane or mixtures of propane and butane, is often used as portable fuel supply. Therefore, the gas is stored in a pressure resistant bottle or tank under a pressure which is high enough to store the gas in the bottle or tank in its liquid status. The liquefied gases are characterized by having a boiling point which is in the range of about -50°C to about 10°C. Therefore, normally a pressure of 20 bar or higher is necessary to convert the gases to their liquid state at room temperature.

15 However, there is a demand for the storage of gases which are normally considered as liquefied gases under a pressure which is less than the aforementioned minimum pressure to keep the gases in their liquid state. One of the most important reasons is caused by safety provisions for pressurized vessels.

20 Conventional bottles or the like do not provide sufficient space to efficiently store the gases in the low pressure range.

25 Other ways to store gases are given by absorbing the desired gas in a porous material. Such material may be of inorganic nature like zeolites or of organic nature like metal organic frameworks (MOF).

US 2003/0148165 A1 describes in general the storage of gases using MOFs.

30 There is a demanding need to provide methods to suitably store liquefied gases in their gaseous state at a low pressure range.

35 Thus, the object of the invention is to provide a method for storing gases known as liquefied gases in their gaseous state in a low pressure range in amounts which are sufficiently high.

The object is solved by a method of storing a liquefied gas in a container having an entrance opening and optionally a separate exit opening for allowing the liquefied gas to enter or exit the container and a gas-tight maintaining mechanism capable of maintaining the liquefied gas in its gaseous state in a predefined amount and under a predefined pressure inside the container and containing a metal-organic framework material (MOF) comprising at least one metal ion and at least one at least bidentate organic compound, which is coordinately bound to said metal ion, wherein the ratio of the pressure in the container to a pressure necessary for the storage of the same amount of liquefied gas at the same temperature in the container without comprising the MOF is at most 0.2.

Surprisingly, it was found that a container comprising a MOF can uptake an unexpected high amount of liquefied gas compared to the situation where no MOF is used. This affords the storage of an efficiently high amount of liquefied gas in a low pressure range using an at least 5-fold lower pressure.

Fig. 1 shows the general curve progression of the uptake of a liquefied gas (here: propane as an example) in a container with (curve A) and without (curve B) a MOF.

Within the meaning of the present invention the term "liquefied gas" preferably indicates a gas or mixture of different gases which can be converted in their liquid state under a pressure of up to 40 bar depending on the temperature, however, room temperature is preferred. Moreover, according to the present invention the term "liquefied gas" does not automatically indicate a gas in its liquefied status.

Properties of gases important in industrial applications, compressed gases, gas containers used and handling instructions can be referred to in 'Handbook of Compressed Gases', 3rd Edition, Van Nostrand Reinhold, New York, 1989 and are incorporated herein by reference.

Preferably, the liquefied gas is selected from the group consisting of halogenated C₁-C₁₀ hydrocarbon, propane, butane, isobutane and mixtures thereof. More preferred the liquefied gas is propane.

Due to the low pressure range used according to the present invention the shape and material of the container does not necessarily fulfil the requirements of pressurized vessels.

Preferably, the container according to the present invention is of a non-cylindrical shape. The container material does not necessarily consist of stainless steel.

The container comprises an entrance opening and optionally a separate exit opening for allowing the liquefied gas to enter or exit the container and a gas-tight maintaining mechanism capable of maintaining the liquefied gas. Preferably the entrance and exit opening are the same equipped with a conventional valve used as the gas-tight maintaining mechanism.

In a preferred embodiment the pressure is more than 0.1 bar and less than 20 bar. More preferably, the pressure is more than 1 bar and less than 20 bar, even more preferred more than 1 bar and less than 10 bar.

The amount of liquefied gas in the container is at least 2 g/l.

The ratio of the pressure in the container to a pressure necessary for the storage of the same amount of liquefied gas at the same temperature in the container without comprising the MOF is at most 0.2. Preferably, the ratio is at most 0.1 and more preferred at most 0.05.

Another aspect of the present invention is a container filled with liquefied gas in a predefined amount and under a predefined pressure having an entrance opening and optionally a separate exit opening for allowing the liquefied gas to enter or exit the container and a gas-tight maintaining mechanism capable of maintaining the liquefied gas in its gaseous state in a predefined amount and under a predefined pressure inside the container and containing a metal-organic framework material (MOF) comprising at least one metal ion and at least one at least bidentate organic compound, which is coordinately bound to said metal ion, wherein the ratio of the pressure in the container to a pressure necessary for the storage of the same amount of liquefied gas at the same temperature in the container without comprising the MOF is at most 0.2.

Yet another aspect of the present invention is a process for filling a container having an entrance opening and optionally a separate exit opening for allowing the liquefied gas to enter or exit the container and a gas-tight maintaining mechanism capable of maintaining the liquefied gas in its gaseous state inside the container and containing a metal-organic framework material (MOF) comprising at least one metal ion and at least one at least bidentate organic compound, which is coordinately bound to said metal ion, with a liquefied gas up to a predefined amount and a predefined pressure so that the ratio of the pressure in the container to a pressure necessary for the storage of the same amount of liquefied gas at

the same temperature in the container without comprising the MOF is at most 0.2, comprising the step

- contacting the entrance opening of the container with a bottle of the liquefied gas, wherein the gas is in its liquid state or compressed state, such that the pressure in the feed container exceeds the pressure in the container which is to be filled.

Yet another aspect of the present invention is the use of a container according to the present invention for the controlled release of liquefied gas.

Suitable MOFs are known in the art. They can be used as powder but preferably, the MOFs are used as shaped bodies, more preferred as extrudates or tablets.

The MOF containing powder has a fine powdery to powdery grain size and may contain or consist of crystallites (small crystals). According to the present invention the term "powder" is used for all forms described above as well as mixtures thereof. The maximum grain size of the powder is preferably less than 0,2 mm for each direction.

The shaped body can have any form suitable for the planned use. Preferably, it is pellet, tablet or bar shaped. In the context of the present invention, the term "shaped body" preferably refers to any solid body that extends to at least 0,2 mm in at least one direction in space. No other restrictions apply, i.e., the body may take any conceivable shape and may extend in any direction by any length so long as it preferably extends to at least 0.2 mm in one direction. In a more preferred embodiment, the shaped bodies do not extend to more than 50 mm and not to less than 0,2 mm in all directions. In a further preferred embodiment, this range is limited from 1 mm to 16 mm, preferably from 1,5 mm to 5 mm.

As far as the geometry of these shaped bodies is concerned, spherical or cylindrical bodies are also preferred, as well as disk-shaped pellets or any other suitable geometry such as honeycombs, meshes, hollow bodies, wire arrangements etc.

The MOF containing powder includes a metal-organic framework material which is built up from metal ions and at least bidentate organic compounds coordinately bound to said metal ion. The MOF as such comprises cavities which are accessible by pores. One cavity is defined by eight metal ions linked together by at least bidentate organic compounds.

5

As has been mentioned above, the MOF is described in, for example, US 5,648,508, EP-A-0 790 253, M. O'Keeffe et al., *J. Sol. State Chem.*, 152 (2000) p. 3-20, H. Li et al., *Nature* 402 (1999) p. 276 seq., M. Eddaoudi et al., *Topics in Catalysis* 9 (1999) p. 105-111, B. Chen et al., *Science* 291 (2001) p. 1021-23 and DE-A-101 11 230.

10

The MOFs, as used in the present invention, comprise pores, particularly micro- and/or mesopores. Micropores are defined as being pores having a diameter of 2 nm or below and mesopores as being pores having a diameter in the range of 2 nm to 50 nm, according to the definition given in *Pure Applied Chem.* 45, p. 71 seq., particularly on p. 79 (1976). The presence of the micro- and/or mesopores can be monitored by sorption measurements which determine the capacity of the metal-organic framework materials for nitrogen uptake at 77 K according to DIN 66131 and/or DIN 66134.

15

For example, a type-I-form of the isothermal curve indicates the presence of micropores [see, for example, paragraph 4 of M. Eddaoudi et al., *Topics in Catalysis* 9 (1999)]. In a preferred embodiment, the specific surface area, as calculated according to the Langmuir model (DIN 66131, 66134, 66135) preferably is above 5 m²/g, more preferred above 10 m²/g, even more preferred above 50 m²/g, even more preferred above 500 m²/g, even more preferred above 1000 m²/g, even more preferred above 1500 m²/g, even more preferred above 2500 m²/g and may increase into the region above 4500 m²/g.

20

25

Shaped bodies can have a lower specific surface area but preferably, is above 10 m²/g, more preferred above 50 m²/g and most preferred above 500 m²/g.

30

As to the metal component within the framework material that is to be used according to the present invention, particularly to be mentioned are the metal ions of the main group elements and of the subgroup elements of the periodic system of the elements, namely of the

groups Ia, IIa, IIIa, IVa to VIIIa and Ib to VIb. Among those metal components, particular reference is made to Mg, Ca, Sr, Ba, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, Mn, Re, Fe, Ru, Os, Co, Rh, Ir, Ni, Pd, Pt, Cu, Ag, Au, Zn, Cd, Hg, Al, Ga, In, Tl, Si, Ge, Sn, Pb, As, Sb, and Bi, more preferably to Zn, Cu, Ni, Pd, Pt, Ru, Rh and Co and most preferred Zn and Cu. As to the metal ions of these elements, particular reference is made to: Mg^{2+} , Ca^{2+} , Sr^{2+} , Ba^{2+} , Sc^{3+} , Y^{3+} , Ti^{4+} , Zr^{4+} , Hf^{4+} , V^{4+} , V^{3+} , V^{2+} , Nb^{3+} , Ta^{3+} , Cr^{3+} , Mo^{3+} , W^{3+} , Mn^{3+} , Mn^{2+} , Re^{3+} , Re^{2+} , Fe^{3+} , Fe^{2+} , Ru^{3+} , Ru^{2+} , Os^{3+} , Os^{2+} , Co^{3+} , Co^{2+} , Rh^{2+} , Rh^{+} , Ir^{2+} , Ir^{+} , Ni^{2+} , Ni^{+} , Pd^{2+} , Pd^{+} , Pt^{2+} , Pt^{+} , Cu^{2+} , Cu^{+} , Ag^{+} , Au^{+} , Zn^{2+} , Cd^{2+} , Hg^{2+} , Al^{3+} , Ga^{3+} , In^{3+} , Tl^{3+} , Si^{4+} , Si^{2+} , Ge^{4+} , Ge^{2+} , Sn^{4+} , Sn^{2+} , Pb^{4+} , Pb^{2+} , As^{5+} , As^{3+} , As^{+} , Sb^{5+} , Sb^{3+} , Sb^{+} , Bi^{5+} , Bi^{3+} and Bi^{+} .

10

With regard to the preferred metal ions and further details regarding the same, particular reference is made to: US 5 648 508, particularly to col. 11, line 11 to 51, section "The Metal Ions", which section is incorporated herein by reference.

15 In addition to the metal salts disclosed in EP-A 0 790 253 and US 5 648 508, other metallic compounds can be used, such as sulfates, phosphates and other complex counter-ion metal salts of the main- and subgroup metals of the periodic system of the elements. Metal oxides, mixed oxides and mixtures of metal oxides and/or mixed oxides with or without a defined stoichiometry are preferred. All of the above mentioned metal compounds can be soluble or
20 insoluble.

As to the at least bidentate organic compound, which is capable of coordination with the metal ion, in principle all compounds can be used which are suitable for this purpose and which fulfill the above requirements of being at least bidentate. Said organic compound
25 must have at least two centers, which are capable to coordinate the metal ions of a metal salt, particularly with the metals of the aforementioned groups. With regard to the at least bidentate organic compound, specific mention is to be made of compounds having

- i) an alkyl group substructure, having from 1 to 10 carbon atoms,
- ii) an aryl group substructure, having from 1 to 5 phenyl rings,
- 30 iii) an alkyl or aryl amine substructure, consisting of alkyl groups having from 1 to 10 carbon atoms or aryl groups having from 1 to 5 phenyl rings,

said substructures having bound thereto at least one at least bidentate functional group "X", which is covalently bound to the substructure of said compound, and wherein X is selected from the group consisting of

- CO₂H, CS₂H, NO₂, SO₃H, Si(OH)₃, Ge(OH)₃, Sn(OH)₃, Si(SH)₄, Ge(SH)₄, Sn(SH)₃, PO₃H,
5 AsO₃H, AsO₄H, P(SH)₃, As(SH)₃, CH(RSH)₂, C(RSH)₃, CH(RNH₂)₂, C(RNH₂)₃,
CH(ROH)₂, C(ROH)₃, CH(RCN)₂, C(RCN)₃, wherein R is an alkyl group having from 1 to
5 carbon atoms, or an aryl group consisting of 1 to 2 phenyl rings, and CH(SH)₂, C(SH)₃,
CH(NH₂)₂, C(NH₂)₂, CH(OH)₂, C(OH)₃, CH(CN)₂ and C(CN)₃.
- 10 Particularly to be mentioned are substituted or unsubstituted, mono- or polynuclear aromatic
di-, tri- and tetracarboxylic acids and substituted or unsubstituted, at least one hetero atom
comprising aromatic di-, tri- and tetracarboxylic acids, which have one or more nuclei.

Preferred ligands are ADC (acetylene dicarboxylate), NDC (naphtalene dicarboxylate),
15 BDC (benzene dicarboxylate), ATC (adamantane tetracarboxylate), BTC (benzene
tricarboxylate), BTB (benzene tribenzoate), MTB (methane tetrabenzoate) and ATB
(adamantane tribenzoate). More preferred bidentate ligands are 1, 2, 3, - and 1, 3, 5-benzene
tricarboxylic acid (BCT), isophthalic acid, terephthalic acid, 2,5-dihydroxy-terephthalic acid
and 2,2'-bipyridine-5,5'-dicarboxylic acid.

20

Besides the at least bidentate organic compound, the framework material as used in
accordance with the present invention may also comprise one or more mono-dentate
ligand(s), which is/are preferably selected from the following mono-dentate substances
and/or derivatives thereof:

25

- a. alkyl amines and their corresponding alkyl ammonium salts, containing linear,
branched, or cyclic aliphatic groups, having from 1 to 20 carbon atoms (and their
corresponding ammonium salts);
- b. aryl amines and their corresponding aryl ammonium salts having from 1 to 5 phenyl
30 rings;
- c. alkyl phosphonium salts, containing linear, branched, or cyclic aliphatic groups,
having from 1 to 20 carbon atoms;

- d. aryl phosphonium salts, having from 1 to 5 phenyl rings;
- e. alkyl organic acids and the corresponding alkyl organic anions (and salts) containing linear, branched, or cyclic aliphatic groups, having from 1 to 20 carbon atoms;
- f. aryl organic acids and their corresponding aryl organic anions and salts, having from
5 1 to 5 phenyl rings;
- g. aliphatic alcohols, containing linear, branched, or cyclic aliphatic groups, having from 1 to 20 carbon atoms;
- h. aryl alcohols having from 1 to 5 phenyl rings;
- i. inorganic anions from the group consisting of:
10 sulfate, nitrate, nitrite, sulfite, bisulfite, phosphate, hydrogen phosphate, dihydrogen phosphate, diphosphate, triphosphate, phosphite, chloride, chlorate, bromide, bromate, iodide, iodate, carbonate, bicarbonate, and the corresponding acids and salts of the aforementioned inorganic anions,
- j. ammonia, carbon dioxide, methane, oxygen, ethylene, hexane, benzene, toluene,
15 xylene, chlorobenzene, nitrobenzene, naphthalene, thiophene, pyridine, acetone, 1-2-dichloroethane, methylenechloride, tetrahydrofuran, ethanolamine, triethylamine and trifluoromethylsulfonic acid.

Further details regarding the at least bidentate organic compounds and the mono-dentate
20 substances, from which the ligands of the framework material as used in the present application are derived, can be taken from EP-A 0 790 253, whose respective content is incorporated into the present application by reference.

Within the present application, framework materials of the kind described herein, which
25 comprise Zn^{2+} as a metal ion and ligands derived from terephthalic acid as the bidentate compound, are particularly preferred. Said framework materials are known as MOF-5 in the literature.

Further metal ions, at least bidentate organic compounds and mono-dentate substances,
30 which are respectively useful for the preparation of the framework materials used in the present invention as well as processes for their preparation are particularly disclosed in EP-A 0 790 253, US 5,648,508 and DE-A-101 11 230.

As solvents, which are particularly useful for the preparation of MOF-5, in addition to the solvents disclosed in the above-referenced literature, dimethyl formamide, diethyl formamide and N-methylpyrrolidone, alone, in combination with each other or in combination with other solvents may be used. Within the preparation of the framework materials, particularly within the preparation of MOF-5, the solvents and mother liquors are recycled after crystallization in order to save costs and materials.

The pore sizes of the metal-organic framework can be adjusted by selecting suitable organic ligands and/or bidentate compounds (=linkers). Generally, the larger the linker the larger the pore size. Any pore size that is still supported by a MOF in the absence of a host and at temperatures of at least 200 °C is conceivable. Pore sizes ranging from 0,2 nm to 30 nm are preferred, with pore sizes ranging from 0,3 nm to 3 nm being particularly preferred.

With regard to the shaped bodies other pore sizes may occur. Preferably, more than 50% of the total pore volume, more preferred more than 75% of the total pore volume, is formed by pores having a pore diameter of up to 1000 nm.

Preferably, the bigger part of the pore volume is formed by pores coming from two distinct diameter ranges. Therefore, it is more preferred that more than 25%, even more preferred more than 50%, of the total pore volume is formed by pores having a diameter in the range of from 100 nm to 800 nm and that preferably more than 15%, even more preferred more than 25%, of the total pore volume is formed by pores having a diameter of up to 10 nm. The pore distribution can be determined by Hg-porosimetry (DIN 66133).

In the following, examples of metal-organic framework materials (MOFs) are given to illustrate the general concept given above. These specific examples, however, are not meant to limit the generality and scope of the present application.

By way of example, a list of metal-organic framework materials already synthesized and characterized is given below. This also includes novel isorecticular metal organic framework materials (IR-MOFs), which may be used in the framework of the present application. Such materials having the same framework topology while displaying different pore sizes and

crystal densities are described, for example in M. Eddouadi et al., *Science* **295** (2002) 469, which is incorporated into the present application by reference.

The solvents used are of particular importance for the synthesis of these materials and are therefore mentioned in the table. The values for the cell parameters (angles α , β and γ as well as the spacings a, b and c, given in Angstrom) have been obtained by x-ray diffraction and represent the space group given in the table as well.

MOF-n	Ingredients molar ratios M+L	Solvent s	α	β	γ	a	b	c	Space Group
MOF-0	Zn(NO ₃) ₂ ·6H ₂ O H ₃ (BTC)	ethanol	90	90	120	16.71 1	16.71 1	14.18 9	P6(3)/ Mcm
MOF-2	Zn(NO ₃) ₂ ·6H ₂ O (0.246 mmol) H ₂ (BDC) 0.241 mmol)	DMF toluene	90	102.8	90	6.718	15.49	12.43	P2(1)/n
MOF-3	Zn(NO ₃) ₂ ·6H ₂ O (1.89 mmol) H ₂ (BDC) (1.93mmol)	DMF MeOH	99.72	111.1 1	108.4	9.726	9.911	10.45	P-1
MOF-4	Zn(NO ₃) ₂ ·6H ₂ O (1.00 mmol) H ₃ (BTC) (0.5 mmol)	ethanol	90	90	90	14.72 8	14.72 8	14.72 8	P2(1)3
MOF-5	Zn(NO ₃) ₂ ·6H ₂ O (2.22 mmol) H ₂ (BDC) (2.17 mmol)	DMF chlorob enzene	90	90	90	25.66 9	25.66 9	25.66 9	Fm-3m
MOF-38	Zn(NO ₃) ₂ ·6H ₂ O (0.27 mmol) H ₃ (BTC) (0.15 mmol)	DMF chlorob enzene	90	90	90	20.65 7	20.65 7	17.84	I4cm
MOF-31 Zn(ADC) ₂	Zn(NO ₃) ₂ ·6H ₂ O 0.4 mmol H ₂ (ADC)	ethanol	90	90	90	10.82 1	10.82 1	10.82 1	Pn(- 3)m

	0.8 mmol								
MOF-12 Zn ₂ (ATC)	Zn(NO ₃) ₂ ·6H ₂ O 0.3 mmol H ₄ (ATC) 0.15 mmol	ethanol	90	90	90	15.74 5	16.90 7	18.16 7	Pbca
MOF-20 ZnNDC	Zn(NO ₃) ₂ ·6H ₂ O 0.37 mmol H ₂ NDC 0.36 mmol	DMF chlorob enzene	90	92.13	90	8.13	16.44 4	12.80 7	P2(1)/c
MOF-37	Zn(NO ₃) ₂ ·6H ₂ O 0.2 mmol H ₂ NDC 0.2 mmol	DEF chloro- benzene	72.38	83.16	84.33	9.952	11.57 6	15.55 6	P-1
MOF-8 Tb ₂ (ADC)	Tb(NO ₃) ₃ ·5H ₂ O 0.10 mmol H ₂ ADC 0.20 mmol	DMSO MeOH	90	115.7	90	19.83	9.822	19.18 3	C2/c
MOF-9 Tb ₂ (ADC)	Tb(NO ₃) ₃ ·5H ₂ O 0.08 mmol H ₂ ADB 0.12 mmol	DMSO	90	102.0 9	90	27.05 6	16.79 5	28.13 9	C2/c
MOF-6	Tb(NO ₃) ₃ ·5H ₂ O 0.30 mmol H ₂ (BDC) 0.30 mmol	DMF MeOH	90	91.28	90	17.59 9	19.99 6	10.54 5	P21/c
MOF-7	Tb(NO ₃) ₃ ·5H ₂ O 0.15 mmol H ₂ (BDC) 0.15 mmol	H ₂ O	102.3	91.12	101.5	6.142	10.06 9	10.09 6	P-1
MOF-69A	Zn(NO ₃) ₂ ·6H ₂ O 0.083 mmol 4,4'-BPDC 0.041 mmol	DEF H ₂ O ₂ MeNH ₂	90	111.6	90	23.12	20.92	12	C2/c
MOF-69B	Zn(NO ₃) ₂ ·6H ₂ O 0.083 mmol	DEF H ₂ O ₂	90	95.3	90	20.17	18.55	12.16	C2/c

	2,6-NCD 0.041 mmol	MeNH ₂							
MOF-11 Cu ₂ (ATC)	Cu(NO ₃) ₂ ·2.5H ₂ O 0.47 mmol H ₂ ATC 0.22 mmol	H ₂ O	90	93.86	90	12.98 7	11.22	11.33 6	C2/c
MOF-11 Cu ₂ (ATC) dehydr.			90	90	90	8.467 1	8.467 1	14.44	P42/ mmc
MOF-14 Cu ₃ (BTB)	Cu(NO ₃) ₂ ·2.5H ₂ O 0.28 mmol H ₃ BTB 0.052 mmol	H ₂ O DMF EtOH	90	90	90	26.94 6	26.94 6	26.94 6	Im-3
MOF-32 Cd(ATC)	Cd(NO ₃) ₂ ·4H ₂ O 0.24 mmol H ₄ ATC 0.10 mmol	H ₂ O NaOH	90	90	90	13.46 8	13.46 8	13.46 8	P(- 4)3m
MOF-33 Zn ₂ (ATB)	ZnCl ₂ 0.15 mmol H ₄ ATB 0.02 mmol	H ₂ O DMF EtOH	90	90	90	19.56 1	15.25 5	23.40 4	Imma
MOF-34 Ni(ATC)	Ni(NO ₃) ₂ ·6H ₂ O 0.24 mmol H ₄ ATC 0.10 mmol	H ₂ O NaOH	90	90	90	10.06 6	11.16 3	19.20 1	P2 ₁ 2 ₁ 2 ₁
MOF-36 Zn ₂ (MTB)	Zn(NO ₃) ₂ ·4H ₂ O 0.20 mmol H ₄ MTB 0.04 mmol	H ₂ O DMF	90	90	90	15.74 5	16.90 7	18.16 7	Pbca
MOF-39 Zn ₃ O(HBT B)	Zn(NO ₃) ₂ ·4H ₂ O 0.27 mmol H ₃ BTB 0.07 mmol	H ₂ O DMF EtOH	90	90	90	17.15 8	21.59 1	25.30 8	Pnma

NO305	FeCl ₂ ·4H ₂ O 5.03 mmol formic acid 86.90 mmol	DMF	90	90	120	8.269 2	8.269 2	63.56 6	R-3c
NO306A	FeCl ₂ ·4H ₂ O 5.03 mmol formic acid 86.90 mmol	DEF	90	90	90	9.936 4	18.37 4	18.37 4	Pbcn

NO29 MOF-0 like	Mn(Ac) ₂ ·4H ₂ O 0.46 mmol H ₃ BTC 0.69 mmol	DMF	120	90	90	14.16	33.52 1	33.52 1	P-1
BPR48 A2	Zn(NO ₃) ₂ ·6H ₂ O 0.012 mmol H ₂ BDC 0.012 mmol	DMS O toluene	90	90	90	14.5	17.04	18.02	Pbca
BPR69 B1	Cd(NO ₃) ₂ ·4H ₂ O 0.0212 mmol H ₂ BDC 0.0428 mmol	DMS O	90	98.76	90	14.16	15.72	17.66	Cc
BPR92 A2	Co(NO ₃) ₂ ·6H ₂ O 0.018 mmol H ₂ BDC 0.018 mmol	NMP	106.3	107.63	107.2	7.530 8	10.94 2	11.02 5	P1
BPR95 C5	Cd(NO ₃) ₂ ·4H ₂ O 0.012 mmol H ₂ BDC 0.36 mmol	NMP	90	112.8	90	14.46 0	11.08 5	15.82 9	P2(1)/n
Cu C ₆ H ₄ O ₆	Cu(NO ₃) ₂ ·2.5H ₂ O 0.370 mmol H ₂ BDC(OH) ₂ 0.37 mmol	DMF chloro benzene	90	105.29	90	15.25 9	14.81 6	14.13	P2(1)/c

M(BTC) MOF- 0like	Co(SO ₄) H ₂ O 0.055 mmol H ₃ BTC 0.037 mmol	DMF	Same as MOF-0						
Tb(C ₆ H ₄ O ₆)	Tb(NO ₃) ₃ ·5H ₂ O 0.370 mmol H ₂ (C ₆ H ₄ O ₆) 0.56 mmol	DMF chloro benze ne	104.6	107.9	97.14 7	10.49 1	10.98 1	12.54 1	P-1
Zn (C ₂ O ₄)	ZnCl ₂ 0.370 mmol oxalic acid 0.37 mmol	DMF chloro benze ne	90	120	90	9.416 8	9.416 8	8.464	P(-3)1m
Co(CHO)	Co(NO ₃) ₂ ·5H ₂ O 0.043 mmol formic acid 1.60 mmol	DMF	90	91.32	90	11.32 8	10.04 9	14.85 4	P2(1)/n
Cd(CHO)	Cd(NO ₃) ₂ ·4H ₂ O 0.185 mmol formic acid 0.185 mmol	DMF	90	120	90	8.516 8	8.516 8	22.67 4	R-3c
Cu(C ₃ H ₂ O ₄)	Cu(NO ₃) ₂ ·2.5H ₂ O 0.043 mmol malonic acid 0.192 mmol	DMF	90	90	90	8.366	8.366	11.91 9	P43
Zn ₆ (NDC) ₅ MOF-48	Zn(NO ₃) ₂ ·6H ₂ O 0.097 mmol 14 NDC 0.069 mmol	DMF chloro benze ne H ₂ O ₂	90	95.902	90	19.50 4	16.48 2	14.64	C2/m
MOF-47	Zn(NO ₃) ₂ ·6H ₂ O 0.185 mmol H ₂ (BDC[CH ₃] ₄)	DMF chloro benze	90	92.55	90	11.30 3	16.02 9	17.53 5	P2(1)/c

	) 0.185 mmol	ne H ₂ O ₂							
MO25	Cu(NO ₃) ₂ ·2.5H ₂ O 0.084 mmol BPhDC 0.085 mmol	DMF	90	112.0	90	23.88 0	16.83 4	18.38 9	P2(1)/c
Cu-Thio	Cu(NO ₃) ₂ ·2.5H ₂ O 0.084 mmol thiophene dicarboxylic 0.085 mmol	DEF	90	113.6	90	15.47 47	14.51 4	14.03 2	P2(1)/c
CIBDC1	Cu(NO ₃) ₂ ·2.5H ₂ O 0.084 mmol H ₂ (BDCCl ₂) 0.085 mmol	DMF	90	105.6	90	14.91 1	15.62 2	18.41 3	C2/c
MOF-101	Cu(NO ₃) ₂ ·2.5H ₂ O 0.084 mmol BrBDC 0.085 mmol	DMF	90	90	90	21.60 7	20.60 7	20.07 3	Fm3m
Zn ₃ (BTC)) ₂	ZnCl ₂ 0.033 mmol H ₃ BTC 0.033 mmol	DMF EtOH base added	90	90	90	26.57 2	26.57 2	26.57 2	Fm-3m
MOF-j	Co(CH ₃ CO ₂) ₂ ·4H ₂ O (1.65 mmol) H ₃ (BZC) (0.95 mmol)	H ₂ O	90	112.0	90	17.48 2	12.96 3	6.559	C2
MOF-n	Zn(NO ₃) ₂ ·6H ₂ O H ₃ (BTC)	ethano l	90	90	120	16.71 1	16.71 1	14.18 9	P6(3)/mc m
PbBDC	Pb(NO ₃) ₂ (0.181 mmol) H ₂ (BDC)	DMF ethano l	90	102.7	90	8.363 9	17.99 1	9.961 7	P2(1)/n

	(0.181 mmol)								
Znhex	Zn(NO ₃) ₂ ·6H ₂ O (0.171 mmol) H ₃ BTB (0.114 mmol)	DMF p- xylene ethano l	90	90	120	37.11 65	37.11 7	30.01 9	P3(1)c
AS16	FeBr ₂ 0.927 mmol H ₂ (BDC) 0.927 mmol	DMF anhyd r.	90	90.13	90	7.259 5	8.789 4	19.48 4	P2(1)c
AS27-2	FeBr ₂ 0.927 mmol H ₃ (BDC) 0.464 mmol	DMF anhyd r.	90	90	90	26.73 5	26.73 5	26.73 5	Fm3m
AS32	FeCl ₃ 1.23 mmol H ₂ (BDC) 1.23 mmol	DMF anhyd r. ethano l	90	90	120	12.53 5	12.53 5	18.47 9	P6(2)c

AS54-3	FeBr ₂ 0.927 BPDC 0.927 mmol	DMF anhyd r. n- propa nol	90	109.98	90	12.01 9	15.28 6	14.39 9	C2
AS61-4	FeBr ₂ 0.927 mmol m-BDC 0.927 mmol	pyridi ne anhyd r.	90	90	120	13.01 7	13.01 7	14.89 6	P6(2)c
AS68-7	FeBr ₂ 0.927 mmol m-BDC 1.204 mmol	DMF anhyd r. Pyridi ne	90	90	90	18.34 07	10.03 6	18.03 9	Pca2 ₁
Zn(ADC)	Zn(NO ₃) ₂ ·6H ₂	DMF	90	99.85	90	16.76	9.349	9.635	C2/c

	O 0.37 mmol H ₂ (ADC) 0.36 mmol	chloro benze ne				4			
MOF-12 Zn ₂ (ATC)	Zn(NO ₃) ₂ ·6H ₂ O 0.30 mmol H ₄ (ATC) 0.15 mmol	ethano l	90	90	90	15.74 5	16.90 7	18.16 7	Pbca
MOF-20 ZnNDC	Zn(NO ₃) ₂ ·6H ₂ O 0.37 mmol H ₂ NDC 0.36 mmol	DMF chloro benze ne	90	92.13	90	8.13	16.44 4	12.80 7	P2(1)/c
MOF-37	Zn(NO ₃) ₂ ·6H ₂ O 0.20 mmol H ₂ NDC 0.20 mmol	DEF chloro benze ne	72.38	83.16	84.33	9.952	11.57 6	15.55 6	P-1
Zn(NDC) (DMSO)	Zn(NO ₃) ₂ ·6H ₂ O H ₂ NDC	DMS O	68.08	75.33	88.31	8.631	10.20 7	13.11 4	P-1
Zn(NDC)	Zn(NO ₃) ₂ ·6H ₂ O H ₂ NDC		90	99.2	90	19.28 9	17.62 8	15.05 2	C2/c
Zn(HPDC)	Zn(NO ₃) ₂ ·4H ₂ O 0.23 mmol H ₂ (HPDC) 0.05 mmol	DMF H ₂ O	107.9	105.06	94.4	8.326	12.08 5	13.76 7	P-1
Co(HPDC)	Co(NO ₃) ₂ ·6H ₂ O 0.21 mmol H ₂ (HPDC) 0.06 mmol	DMF H ₂ O/ ethano l	90	97.69	90	29.67 7	9.63	7.981	C2/c
Zn ₃ (PDC)2	Zn(NO ₃) ₂ ·4H ₂ O	DMF/	79.34	80.8	85.83	8.564	14.04	26.42	P-1

.5	O 0.17 mmol H ₂ (HPDC) 0.05 mmol	CIBz H ₂ O/ TEA					6	8	
Cd ₂ (TPDC)2	Cd(NO ₃) ₂ ·4H ₂ O 0.06 mmol H ₂ (HPDC) 0.06 mmol	methanol/ CHP H ₂ O	70.59	72.75	87.14	10.10 2	14.41 2	14.96 4	P-1
Tb(PDC)1. 5	Tb(NO ₃) ₃ ·5H ₂ O 0.21 mmol H ₂ (PDC) 0.034 mmol	DMF H ₂ O/ ethanol 1	109.8	103.61	100.1 4	9.829	12.11	14.62 8	P-1

ZnDBP	Zn(NO ₃) ₂ ·6H ₂ O 0.05 mmol dibenzylphosphate 0.10 mmol	MeOH H	90	93.67	90	9.254	10.76 2	27.93	P2/n
Zn ₃ (BPD C)	ZnBr ₂ 0.021 mmol 4,4'-BPDC 0.005 mmol	DMF	90	102.76	90	11.49	14.79	19.18	P21/n
CdBDC	Cd(NO ₃) ₂ ·4H ₂ O 0.100 mmol H ₂ (BDC) 0.401 mmol	DMF Na ₂ SiO ₃ (aq)	90	95.85	90	11.2	11.11	16.71	P21/n
Cd- mBDC	Cd(NO ₃) ₂ ·4H ₂ O 0.009 mmol H ₂ (mBDC) 0.018 mmol	DMF MeN H ₂	90	101.1	90	13.69	18.25	14.91	C2/c
Zn ₄ OBN DC	Zn(NO ₃) ₂ ·6H ₂ O 0.041 mmol BNDC	DEF MeN H ₂ H ₂ O ₂	90	90	90	22.35	26.05	59.56	Fmmm

Eu(TCA)	Eu(NO ₃) ₃ ·6H ₂ O 0.14 mmol TCA 0.026 mmol	DMF chloro benze ne	90	90	90	23.32 5	23.32 5	23.32 5	Pm-3n
Tb(TCA)	Tb(NO ₃) ₃ ·6H ₂ O 0.069 mmol TCA 0.026 mmol	DMF chloro benze ne	90	90	90	23.27 2	23.27 2	23.37 2	Pm-3n
Formate	Ce(NO ₃) ₃ ·6H ₂ O 0.138 mmol Formic acid 0.43 mmol	H ₂ O ethano l	90	90	120	10.66 8	10.66 7	4.107	R-3m
	FeCl ₂ ·4H ₂ O 5.03 mmol Formic acid 86.90 mmol	DMF	90	90	120	8.269 2	8.269 2	63.56 6	R-3c
	FeCl ₂ ·4H ₂ O 5.03 mmol Formic acid 86.90 mmol	DEF	90	90	90	9.936 4	18.37 4	18.37 4	Pbcn
	FeCl ₂ ·4H ₂ O 5.03 mmol Formic acid 86.90 mmol	DEF	90	90	90	8.335	8.335	13.34	P-31c
NO330	FeCl ₂ ·4H ₂ O 0.50 mmol Formic acid 8.69 mmol	form- amide	90	90	90	8.774 9	11.65 5	8.329 7	Pnna
NO332	FeCl ₂ ·4H ₂ O 0.50 mmol Formic acid 8.69 mmol	DIP	90	90	90	10.03 13	18.80 8	18.35 5	Pbcn
NO333	FeCl ₂ ·4H ₂ O 0.50 mmol	DBF	90	90	90	45.27 54	23.86 1	12.44 1	Cmcm

	Formic acid 8.69 mmol								
NO335	FeCl ₂ ·4H ₂ O 0.50 mmol Formic acid 8.69 mmol	CHF	90	91.372	90	11.59 64	10.18 7	14.94 5	P21/n
NO336	FeCl ₂ ·4H ₂ O 0.50 mmol Formic acid 8.69 mmol	MFA	90	90	90	11.79 45	48.84 3	8.413 6	Pbcm
NO13	Mn(Ac) ₂ ·4H ₂ O 0.46 mmol Bezoic acid 0.92 mmol Bipyridine 0.46 mmol	ethano 1	90	90	90	18.66	11.76 2	9.418	Pbcn
NO29 MOF-0 Like	Mn(Ac) ₂ ·4H ₂ O 0.46 mmol H ₃ BTC 0.69 mmol	DMF	120	90	90	14.16	33.52 1	33.52 1	P-1
Mn(hfac)) ₂ (O ₂ CC ₆ H ₅)	Mn(Ac) ₂ ·4H ₂ O 0.46 mmol Hfac 0.92 mmol Bipyridine 0.46 mmol	ether	90	95.32	90	9.572	17.16 2	14.04 1	C2/c
BPR43G 2	Zn(NO ₃) ₂ ·6H ₂ O 0.0288 mmol H ₂ BDC 0.0072 mmol	DMF CH ₃ C N	90	91.37	90	17.96	6.38	7.19	C2/c
BPR48A 2	Zn(NO ₃) ₂ 6H ₂ O 0.012 mmol H ₂ BDC 0.012 mmol	DMS O toluen e	90	90	90	14.5	17.04	18.02	Pbca
BPR49B	Zn(NO ₃) ₂ 6H ₂ O	DMS	90	91.172	90	33.18	9.824	17.88	C2/c

1	0.024 mmol H ₂ BDC 0.048 mmol	O metha nol				1		4	
BPR56E 1	Zn(NO ₃) ₂ 6H ₂ O 0.012 mmol H ₂ BDC 0.024 mmol	DMS O n- propa nol	90	90.096	90	14.58 73	14.15 3	17.18 3	P2(1)/n
BPR68D 10	Zn(NO ₃) ₂ 6H ₂ O 0.0016 mmol H ₃ BTC 0.0064 mmol	DMS O benze ne	90	95.316	90	10.06 27	10.17	16.41 3	P2(1)/c
BPR69B 1	Cd(NO ₃) ₂ 4H ₂ O 0.0212 mmol H ₂ BDC 0.0428 mmol	DMS O	90	98.76	90	14.16	15.72	17.66	Cc

BPR73E4	Cd(NO ₃) ₂ 4H ₂ O 0.006 mmol H ₂ BDC 0.003 mmol	DMSO toluene	90	92.324	90	8.723 1	7.056 8	18.43 8	P2(1)/n
BPR76D5	Zn(NO ₃) ₂ 6H ₂ O 0.0009 mmol H ₂ BzPDC 0.0036 mmol	DMSO	90	104.17	90	14.41 91	6.259 9	7.061 1	Pc
BPR80B5	Cd(NO ₃) ₂ ·4H ₂ O 0.018 mmol H ₂ BDC 0.036 mmol	DMF	90	115.11	90	28.04 9	9.184	17.83 7	C2/c
BPR80H5	Cd(NO ₃) ₂ 4H ₂ O 0.027 mmol H ₂ BDC	DMF	90	119.06	90	11.47 46	6.215 1	17.26 8	P2/c

	0.027 mmol								
BPR82C6	Cd(NO ₃) ₂ 4H ₂ O 0.0068 mmol H ₂ BDC 0.202 mmol	DMF	90	90	90	9.772 1	21.14 2	27.77	Fdd2
BPR86C3	Co(NO ₃) ₂ 6H ₂ O 0.0025 mmol H ₂ BDC 0.075 mmol	DMF	90	90	90	18.34 49	10.03 1	17.98 3	Pca2(1)
BPR86H6	Cd(NO ₃) ₂ ·6H ₂ O 0.010 mmol H ₂ BDC 0.010 mmol	DMF	80.98	89.69	83.4 12	9.875 2	10.26 3	15.36 2	P-1
	Co(NO ₃) ₂ 6H ₂ O	NMP	106.3	107.63	107. 2	7.530 8	10.94 2	11.02 5	P1
BPR95A2	Zn(NO ₃) ₂ 6H ₂ O 0.012 mmol H ₂ BDC 0.012 mmol	NMP	90	102.9	90	7.450 2	13.76 7	12.71 3	P2(1)/c
CuC ₆ F ₄ O ₄	Cu(NO ₃) ₂ ·2.5H ₂ O 0.370 mmol H ₂ BDC(OH) ₂ 0.37 mmol	DMF chloro- benzene	90	98.834	90	10.96 75	24.43	22.55 3	P2(1)/n
Fe Formic	FeCl ₂ ·4H ₂ O 0.370 mmol Formic acid 0.37 mmol	DMF	90	91.543	90	11.49 5	9.963	14.48	P2(1)/n
Mg Formic	Mg(NO ₃) ₂ ·6H ₂ O 0.370 mmol Formic acid	DMF	90	91.359	90	11.38 3	9.932	14.65 6	P2(1)/n

	0.37 mmol								
MgC ₆ H ₄ O ₆	Mg(NO ₃) ₂ ·6H ₂ O 0.370 mmol H ₂ BDC(OH) ₂ 0.37 mmol	DMF	90	96.624	90	17.24 5	9.943	9.273	C2/c
Zn C ₂ H ₄ BDC MOF-38	ZnCl ₂ 0.44 mmol CBBDC 0.261 mmol	DMF	90	94.714	90	7.338 6	16.83 4	12.52	P2(1)/n
MOF-49	ZnCl ₂ 0.44 mmol m-BDC 0.261 mmol	DMF CH ₃ CN	90	93.459	90	13.50 9	11.98 4	27.03 9	P2/c
MOF-26	Cu(NO ₃) ₂ ·5H ₂ O 0.084 mmol DCPE 0.085 mmol	DMF	90	95.607	90	20.87 97	16.01 7	26.17 6	P2(1)/n
MOF-112	Cu(NO ₃) ₂ ·2.5H ₂ O 0.084 mmol o-Br-m-BDC 0.085 mmol	DMF ethanol	90	107.49	90	29.32 41	21.29 7	18.06 9	C2/c
MOF-109	Cu(NO ₃) ₂ ·2.5H ₂ O 0.084 mmol KDB 0.085 mmol	DMF	90	111.98	90	23.88 01	16.83 4	18.38 9	P2(1)/c
MOF-111	Cu(NO ₃) ₂ ·2.5H ₂ O 0.084 mmol o-BrBDC 0.085 mmol	DMF ethanol	90	102.16	90	10.67 67	18.78 1	21.05 2	C2/c
MOF-110	Cu(NO ₃) ₂ ·2.5H ₂ O	DMF	90	90	120	20.06 52	20.06 5	20.74 7	R-3/m

	0.084 mmol thiophene dicarboxylic 0.085 mmol								
MOF-107	$\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ 0.084 mmol thiophene dicarboxylic 0.085 mmol	DEF	104.8	97.075	95.2 06	11.03 2	18.06 7	18.45 2	P-1
MOF-108	$\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ 0.084 mmol thiophene dicarboxylic 0.085 mmol	DBF/ methanol	90	113.63	90	15.47 47	14.51 4	14.03 2	C2/c
MOF-102	$\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ 0.084 mmol $\text{H}_2(\text{BDCCl}_2)$ 0.085 mmol	DMF	91.63	106.24	112. 01	9.384 5	10.79 4	10.83 1	P-1
Clbdc1	$\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ 0.084 mmol $\text{H}_2(\text{BDCCl}_2)$ 0.085 mmol	DEF	90	105.56	90	14.91 1	15.62 2	18.41 3	P-1
Cu(NMOP)	$\text{Cu}(\text{NO}_3)_2 \cdot 2.5\text{H}_2\text{O}$ 0.084 mmol NBDC 0.085 mmol	DMF	90	102.37	90	14.92 38	18.72 7	15.52 9	P2(1)/m
Tb(BTC)	$\text{Tb}(\text{NO}_3)_3 \cdot 5\text{H}_2\text{O}$ 0.033 mmol H_3BTC 0.033 mmol	DMF	90	106.02	90	18.69 86	11.36 8	19.72 1	

Zn ₃ (BTC) ₂ Honk	ZnCl ₂ 0.033 mmol H ₃ BTC 0.033 mmol	DMF ethanol	90	90	90	26.57 2	26.57 2	26.57 2	Fm-3m
Zn ₄ O(NDC)	Zn(NO ₃) ₂ ·4H ₂ O 0.066 mmol 14NDC 0.066 mmol	DMF ethanol	90	90	90	41.55 94	18.81 8	17.57 4	aba2
CdTDC	Cd(NO ₃) ₂ ·4H ₂ O 0.014 mmol thiophene 0.040 mmol DABCO 0.020 mmol	DMF H ₂ O	90	90	90	12.17 3	10.48 5	7.33	Pmma
IRMOF-2	Zn(NO ₃) ₂ ·4H ₂ O 0.160 mmol o-Br-BDC 0.60 mmol	DEF	90	90	90	25.77 2	25.77 2	25.77 2	Fm-3m
IRMOF-3	Zn(NO ₃) ₂ ·4H ₂ O 0.20 mmol H ₂ N-BDC 0.60 mmol	DEF ethanol	90	90	90	25.74 7	25.74 7	25.74 7	Fm-3m
IRMOF-4	Zn(NO ₃) ₂ ·4H ₂ O 0.11 mmol [C ₃ H ₇ O] ₂ -BDC 0.48 mmol	DEF	90	90	90	25.84 9	25.84 9	25.84 9	Fm-3m
IRMOF-5	Zn(NO ₃) ₂ ·4H ₂ O 0.13 mmol [C ₅ H ₁₁ O] ₂ -BDC	DEF	90	90	90	12.88 2	12.88 2	12.88 2	Pm-3m

	0.50 mmol								
IRMOF-6	Zn(NO ₃) ₂ ·4H ₂ O 0.20 mmol [C ₂ H ₄]-BDC 0.60 mmol	DEF	90	90	90	25.84 2	25.84 2	25.84 2	Fm-3m
IRMOF-7	Zn(NO ₃) ₂ ·4H ₂ O 0.07 mmol 1,4NDC 0.20 mmol	DEF	90	90	90	12.91 4	12.91 4	12.91 4	Pm-3m
IRMOF-8	Zn(NO ₃) ₂ ·4H ₂ O 0.55 mmol 2,6NDC 0.42 mmol	DEF	90	90	90	30.09 2	30.09 2	30.09 2	Fm-3m
IRMOF-9	Zn(NO ₃) ₂ ·4H ₂ O 0.05 mmol BPDC 0.42 mmol	DEF	90	90	90	17.14 7	23.32 2	25.25 5	Pnnm
IRMOF-10	Zn(NO ₃) ₂ ·4H ₂ O 0.02 mmol BPDC 0.012 mmol	DEF	90	90	90	34.28 1	34.28 1	34.28 1	Fm-3m
IRMOF-11	Zn(NO ₃) ₂ ·4H ₂ O 0.05 mmol HPDC 0.20 mmol	DEF	90	90	90	24.82 2	24.82 2	56.73 4	R-3m
IRMOF-12	Zn(NO ₃) ₂ ·4H ₂ O 0.017 mmol HPDC 0.12 mmol	DEF	90	90	90	34.28 1	34.28 1	34.28 1	Fm-3m

IRMOF-13	Zn(NO ₃) ₂ ·4H ₂ O 0.048 mmol PDC 0.31 mmol	DEF	90	90	90	24.82 2	24.82 2	56.73 4	R-3m
IRMOF-14	Zn(NO ₃) ₂ ·4H ₂ O 0.17 mmol PDC 0.12 mmol	DEF	90	90	90	34.38 1	34.38 1	34.38 1	Fm-3m
IRMOF-15	Zn(NO ₃) ₂ ·4H ₂ O 0.063 mmol TPDC 0.025 mmol	DEF	90	90	90	21.45 9	21.45 9	21.45 9	Im-3m
IRMOF-16	Zn(NO ₃) ₂ ·4H ₂ O 0.0126 mmol TPDC 0.05 mmol	DEF NMP	90	90	90	21.49	21.49	21.49	Pm-3m

ADC Acetylene dicarboxylic acid

NDC Naphtalene dicarboxylic acid

5

BDC Benzene dicarboxylic acid

ATC Adamantane tetracarboxylic acid

10 BTC Benzene tricarboxylic acid

BTB Benzene tribenzoate

MTB Methane tetrabenzoate

15 ATB Adamantane tetrabenzoate

ADB Adamantane dibenzoate

Other MOFs known in the art are MOF-177 and MOF-178.

Examples for the synthesis of these materials in form of a powder can, for example, be found in: US 5,648,508, J. Am. Chem. Soc. **123** (2001) pages 8241 seq. or in Acc. Chem. Res. **31** (1998) pages 474 seq., which are fully encompassed within the content of the present application with respect to their respective content.

5

The separation of the framework materials, particularly of MOF-5, from the mother liquor of the crystallization may be achieved by procedures known in the art such as solid-liquid separations, centrifugation, extraction, filtration, membrane filtration, cross-flow filtration, flocculation using flocculation adjuvants (non-ionic, cationic and anionic adjuvants) or by
10 the addition of pH shifting additives such as salts, acids or bases, by flotation, as well as by evaporation of the mother liquor at elevated temperature and/or in vacuo and concentrating of the solid.

Besides conventional methods for the preparation of MOFs a new electrochemical way is disclosed in DE 103 55 087 as well as in WO-A 2005/049892. The new MOFs show
15 excellent properties in relation to the storage of liquefied gases. Therefore, the use of these MOFs according to the present invention is preferred.

The term "electrochemical preparation" as employed within the scope of the present invention relates to a preparation method in which the formation of at least one reaction
20 product is attendant on the migration of electrical charges or the occurrence of electrical potentials.

The term "at least one metal ion" as used within the scope of the present invention and subject to the electrochemical formation of MOFs relates to embodiments according to
25 which at least one ion of a metal or at least one ion of a first metal and at least one ion of at least one second metal differing from the first metal are provided by anodic oxidation.

Accordingly, the present invention comprises embodiments in which at least one ion of at least one metal is provided via anodic oxidation and at least one ion of at least one metal is
30 provided via a metal salt, where the at least one metal in the metal salt and the at least one metal provided via anodic oxidation as a metal ion can be identical or different from one another. The present invention therefore comprises, for example, an embodiment according to which the reaction medium comprises one or more different salts of a metal and the metal ion present in this salt or these salts is additionally provided via anodic oxidation of at least
35 one anode containing said metal. Likewise, the present invention comprises an embodiment

according to which the reaction medium comprises one or more different salts of at least one metal and at least one metal different from these metals is provided via anodic oxidation as a metal ion in the reaction medium.

5 According to a preferred embodiment of the present invention and in relation to the electrochemical preparation of MOFs, the at least one metal ion is provided via anodic oxidation of at least one anode containing said at least one metal, no further metal being provided via a metal salt.

10 The term "metal" as used within the scope of the present invention in relation to the electrochemical preparation of MOFs comprises all those elements of the Periodic Table of the Elements which can be provided in a reaction medium via anodic oxidation via an electrochemical route and are able to form at least one metal-organic, porous framework material with at least one at least bidentate organic compound.

15

As mentioned above, irrespective of being derived by conventional or electrochemical methods the use of MOFs as shaped bodies is preferred according to the present invention.

Appropriate processes of molding a powder are known to the person skilled in the art, referring, in the broadest sense, to a process, wherein i.e. any powder, powdery substance, array of crystallites etc., can be formed into a shaped body that is stable under the conditions of its intended use.

20 In addition to the optional molding step of a MOF containing powder into a shaped body the following steps may also occur according to the present invention:

- 25 (I) the molding may be preceded by a step of mixing,
- (II) the molding may be preceded by a step of preparing a paste-like mass or a fluid containing the MOF containing powder, for example by adding solvents, binders or other additional substances,
- 30 (III) the molding may be followed by a step of finishing, in particular a step of drying.

The conversion step of molding, shaping or forming and the like may be achieved by any method known to an expert to achieve agglomeration of a powder, a suspension or a paste-

like mass. Such methods are described, for example, in Ullmann's Enzyklopädie der Technischen Chemie, 4th Edition, Vol. 2, p. 313 et seq., 1972, whose respective content is incorporated into the present application by reference.

- 5 In general, the following main pathways can be discerned: (i) briquetting, i.e. mechanical pressing of the powdery material, with or without binders and/or other additives, (ii) granulating (pelletizing), i.e. compacting of moistened powdery materials by subjecting it to rotating movements, and (iii) sintering, i.e. subjecting the material to be compacted to a thermal treatment. The latter is somewhat limited for the material according to the invention
10 due to the limited temperature stability of the organic materials (see below).

Specifically, the molding step according to the invention is preferably performed by using at least one method selected from the following group: briquetting by piston presses, briquetting by roller pressing, binderless briquetting, briquetting with binders, pelletizing,
15 compounding, melting, extruding, co-extruding, spinning, deposition, foaming, spray drying, coating, granulating, in particular spray granulating or granulating according to any process known within the processing of plastics or any combination of at least two of the aforementioned methods.

- 20 The molding may be affected by extrusion in conventional extruders, for example such that result in extrudates having a diameter of, usually, from about 1 to about 10 mm, in particular from about 1,5 to about 5 mm. Such extrusion apparatuses are described, for example, in Ullmann's Enzyklopädie der Technischen Chemie, 4th Edition, Vol. 2, p. 295 et seq., 1972. In addition to the use of an extruder, an extrusion press is preferably also used for molding.

25 The preferred process of molding is performed at elevated pressure, i.e. by pressing of the MOF containing powder. The pressure may range from atmospheric pressure to several 100 bar. Also elevated temperatures (ranging from room temperature to 300 °C) or in a protective atmosphere (noble gases, nitrogen or mixtures thereof) are suitable. Any
30 combination of these conditions is possible as well.

The conditions under which the pressing may be accomplished depend on, e.g. the press, the filling height, the press capacity, and the form of the shaped body.

The step of molding can be performed in the presence of binders and/or other additional substances that stabilize the materials to be agglomerated. As to the at least one optional binder, any material known to an expert to promote adhesion between the particles to be
5 molded together can be employed. A binder, an organic viscosity-enhancing compound and/or a liquid for converting the material into a paste can be added to the metal-organic framework material, with the mixture being subsequently compacted in a mixing or kneading apparatus or an extruder. The resulting plastic material can then be molded, in particular using an extrusion press or an extruder, and the resulting moldings can then be subjected to the
10 optional step (III) of finishing, for example drying.

A number of inorganic compounds can be used as binders. Non-limiting examples include titanium dioxide, hydrated titanium dioxide, hydrated alumina or other aluminum-containing binders, mixtures of silicon and aluminum compounds, silicon compounds, clay minerals,
15 alkoxysilanes, and amphiphilic substances.

Other conceivable binders are in principle all compounds used to date for the purpose of achieving adhesion in powdery materials. Compounds, in particular oxides, of silicon, of aluminum, of boron, of phosphorus, of zirconium and/or of titanium are preferably used. Of
20 particular interest as a binder is silica, where the SiO_2 may be introduced into the shaping step as a silica sol or in the form of tetraalkoxysilanes. Oxides of magnesium and of beryllium and clays, for example montmorillonites, kaolins, bentonites, halloysites, dickites, nacrites and anauxites, may furthermore be used as binders. Tetraalkoxysilanes are particularly used as binders in the present invention. Specific examples are tetramethoxysilane, tetraethoxysilane,
25 tetrapropoxysilane and tetrabutoxysilane, the analogous tetraalkoxytitanium and tetraalkoxyzirconium compounds and trimethoxy-, triethoxy-, tripropoxy- and tributoxy-aluminum, tetramethoxysilane and tetraethoxysilane being particularly preferred.

The binder may have a concentration of from 0,1 to 20 % by weight. Alternatively, no binder is
30 used.

One or more mold release agent may be present as additives. Suitable agents are graphite or MOF materials, where the MOF has a layer composition.

In addition, organic viscosity-enhancing substances and/or hydrophilic polymers, e.g. cellulose or polyacrylates may be used. The organic viscosity-enhancing substance used may likewise be any substance suitable for this purpose. Those preferred are organic, in particular hydrophilic
5 polymers, e.g., cellulose, starch, polyacrylates, polymethacrylates, polyvinyl alcohol, polyvinylpyrrolidone, polyisobutene and polytetrahydrofuran. These substances primarily promote the formation of a plastic material during the kneading, molding and drying step by bridging the primary particles and moreover ensuring the mechanical stability of the molding during the molding and the optional drying process.

10 There are no restrictions at all with regard to the optional liquid which may be used to create a paste-like substance, either for the optional step (I) of mixing or for the step of molding. In addition to water, alcohols may be used, provided that they are water-miscible. Accordingly, both monoalcohols of 1 to 4 carbon atoms and water-miscible polyhydric alcohols may be
15 used. In particular, methanol, ethanol, propanol, n-butanol, isobutanol, tert-butanol and mixtures of two or more thereof are used.

Amines or amine-like compounds, for example tetraalkylammonium compounds or aminoalcohols, and carbonate-containing substances, such as calcium carbonate, may be used
20 as further additives. Such further additives are described in EP-A 0 389 041, EP-A 0 200 260 and WO 95/19222, which are incorporated fully by reference in the context of the present application.

Most, if not all, of the additive substances mentioned above may be removed from the shaped
25 bodies by drying or heating, optionally in a protective atmosphere or under vacuum. In order to keep the metal-organic framework intact, the shaped bodies are preferably not exposed to temperatures exceeding 300 °C. However, studies show that heating/drying under the aforementioned mild conditions, in particular drying in vacuo, preferably well below 300 °C is sufficient to at least remove organic compounds out of the pores of the metal-organic
30 framework. Generally, the conditions are adapted and chosen depending upon the additive substances used.

The order of addition of the components (optional solvent, binder, additives, metal-organic framework material) is not critical. It is possible either to add first the binder, then, for example, the metal-organic framework material and, if required, the additive and finally the mixture containing at least one alcohol and/or water or to interchange the order with respect to any of the aforementioned components.

As far as the optional step (I) of mixing is concerned, for example, of the powder containing a metal-organic framework and a binder and optionally further process materials (= additional materials), all methods known to the expert in the fields of materials processing and unit operations can be used. If the mixing occurs in the liquid phase, stirring is preferred, if the mass to be mixed is paste-like, kneading and/or extruding are preferred and if the components to be mixed are all in a solid, powdery state, mixing is preferred. The use of atomizers, sprayers, diffusers or nebulizers is conceivable as well if the state of the components to be used allows the use thereof. For paste-like (originating from MOF containing powder) and powder-like materials the use of static mixers, planetary mixers, mixers with rotating containers, pan mixers, pug mills, shearing-disk mixers, centrifugal mixers, sand mills, trough kneaders, internal mixers, internal mixers and continuous kneaders are preferred. It is explicitly included that a process of mixing may be sufficient to achieve the molding, i.e., that the steps of mixing and molding coincide.

Examples

Example 1

Fig. 2 shows the curves for the uptake of propane in a bottle (volume 0.5 l) at room temperature with and without MOF. The MOF used in this example is Zn-MOF-5. The preparation of that MOF is described in US 2003/0148165 A1.

The ratios of the pressures with/without MOF at certain uptake values are shown in table 1.

Uptake propane (g/l container without MOF)	6.32	10.16	30.5
Pressure of container without MOF (= p_{empty}) in bar	3.244	5.036	9.808
Necessary pressure of container with MOF for the same uptake (= p_{MOF}) in bar	0.107	0.161	0.324
$\frac{p_{MOF}}{p_{empty}}$	0.03	0.03	0.03

Table 1

5 Example 2

Fig. 3 shows the curves for the uptake of propane in a bottle (volume 0.477 l) at room temperature with and without MOF. The MOF used in this example is IRMOF-8. The preparation of that MOF is described in WO-A 02/088148.

10

The ratios of the pressures with/without MOF at certain uptake values are shown in table 2.

Uptake propane (g/l container without MOF)	3.5	9.77	16.29	20.57
Pressure of container without MOF (= p_{empty}) in bar	2.023	5.121	8.012	9.681
Necessary pressure of container with MOF for the same uptake (= p_{MOF}) in bar	0.090	0.203	0.315	0.408
$\frac{p_{MOF}}{p_{empty}}$	0.04	0.04	0.04	0.04

Table 2

Claims

1. A method of storing a liquefied gas in a container having an entrance opening and optionally a separate exit opening for allowing the liquefied gas to enter or exit the container and a gas-tight maintaining mechanism capable of maintaining the liquefied gas in its gaseous state in a predefined amount and under a predefined pressure inside the container and containing a metal-organic framework material (MOF) comprising at least one metal ion and at least one at least bidentate organic compound, which is coordinately bound to said metal ion, wherein the ratio of the pressure in the container to a pressure necessary for the storage of the same amount of liquefied gas at the same temperature in the container without comprising the MOF is at most 0.2.
2. The method of claim 1, wherein the liquefied gas is selected from the group consisting of halogenated C₁-C₁₀ hydrocarbon, propane, butane, isobutane and mixtures thereof.
3. The method of claim 2, wherein the liquefied gas is propane.
4. The method of claim 1, wherein the container is of a non-cylindrical shape.
5. The method of claim 1, wherein the pressure is more than 0.1 bar and less than 20 bar.
6. The method of claim 1, wherein the amount of liquefied gas is at least 2 g/l.
7. The method of claim 1, wherein the ratio is at most 0.1.
8. A container filled with liquefied gas in a predefined amount and under a predefined pressure having an entrance opening and optionally a separate exit opening for allowing the liquefied gas to enter or exit the container and a gas-tight maintaining mechanism capable of maintaining the liquefied gas in its gaseous state in a predefined amount and under a predefined pressure inside the container and containing a metal-organic framework material (MOF) comprising at least one metal ion and at least one at least bidentate organic compound, which is coordinately bound to said metal ion, wherein the ratio of the pressure in the container to a pressure

- 36 -

necessary for the storage of the same amount of liquefied gas at the same temperature in the container without comprising the MOF is at most 0.2.

9. A process for filling a container having an entrance opening and optionally a separate exit opening for allowing the liquefied gas to enter or exit the container and a gas-tight maintaining mechanism capable of maintaining the liquefied gas in its gaseous state inside the container and containing a metal-organic framework material (MOF) comprising at least one metal ion and at least one at least bidentate organic compound, which is coordinately bound to said metal ion, with a liquefied gas up to a predefined amount and a predefined pressure so that the ratio of the pressure in the container to a pressure necessary for the storage of the same amount of liquefied gas at the same temperature in the container without comprising the MOF is at most 0.2, comprising the step
- 15 - contacting the entrance opening of the container with a bottle of the liquefied gas, wherein the gas is in its liquid state or compressed state, such that the pressure in the feed container exceeds the pressure in the container which is to be filled.
- 20 10. Use of a container according to claim 8 for the controlled release of liquefied gas.

1/3

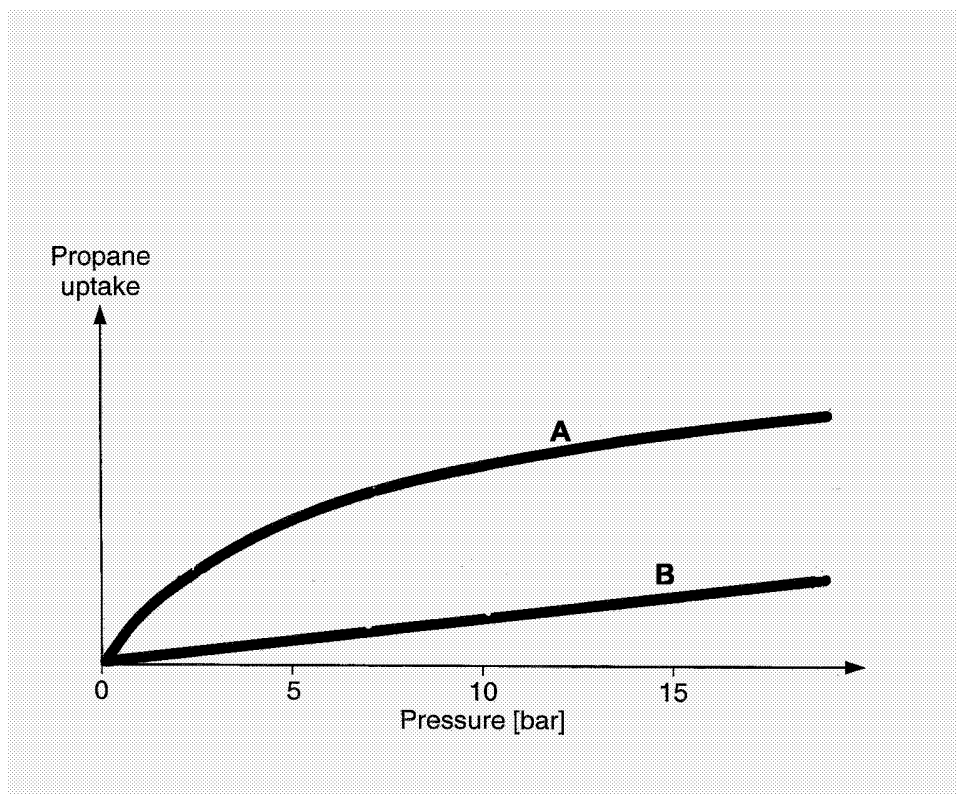


Fig. 1

2/3

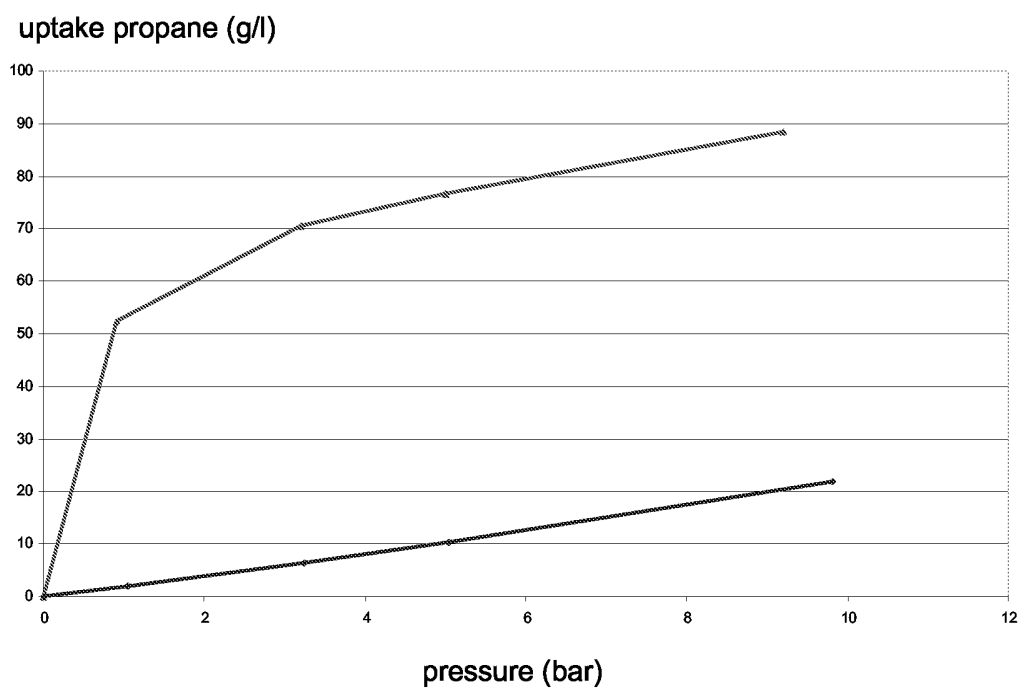


Fig. 2

3/3

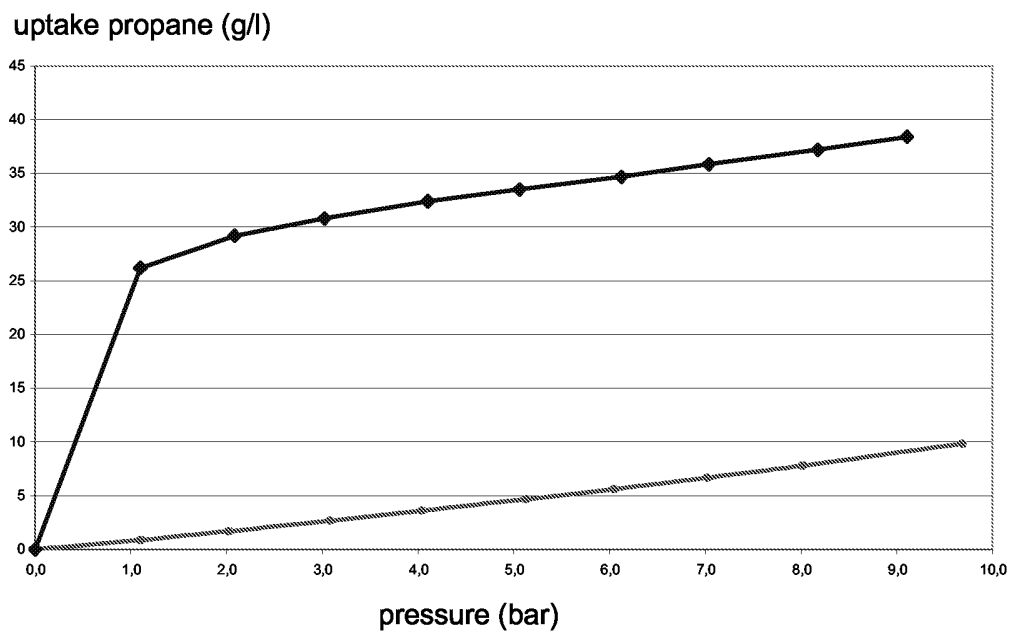


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/060181

A. CLASSIFICATION OF SUBJECT MATTER
INV. F17C11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F17C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 523 548 A (ENGEL ET AL) 18 June 1985 (1985-06-18) abstract; figures column 5, line 66 - line 68 page 8, line 36 - line 63 page 10, line 57 - line 66	1-10
Y	US 2003/148165 A1 (MULLER ULRICH ET AL) 7 August 2003 (2003-08-07) cited in the application abstract page 3, paragraph 38 page 3, paragraph 46	1-10
A	US 4 531 558 A (ENGEL ET AL) 30 July 1985 (1985-07-30) abstract column 2, line 1 - line 7	1-10
-/--		

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

9 June 2006

Date of mailing of the international search report

19/06/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lapeyrere, J

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2006/060181

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 094 736 A (GREENBANK ET AL) 10 March 1992 (1992-03-10) abstract column 1, line 50 - line 53 column 2, line 19 - line 24 column 2, line 40 - line 46 column 3, line 46 - line 50 column 4, line 53 - line 64 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2006/060181

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4523548	A	18-06-1985	AU 560000 B2	26-03-1987
			CA 1233712 A1	08-03-1988
			DE 3515220 A1	30-10-1986
			FR 2580726 A1	24-10-1986
			NL 8501078 A	03-11-1986
			SE 458466 B	03-04-1989
			SE 8502024 A	27-10-1986
US 2003148165	A1	07-08-2003	CA 2391755 A1	01-08-2003
			CN 1617761 A	18-05-2005
			DE 20210139 U1	12-06-2003
			WO 03064030 A1	07-08-2003
			EP 1471997 A1	03-11-2004
			JP 2005525218 T	25-08-2005
			MX PA04007326 A	26-11-2004
US 4531558	A	30-07-1985	DE 3515221 A1	30-10-1986
			FR 2580779 A1	24-10-1986
			GB 2172983 A	01-10-1986
			NL 8501073 A	03-11-1986
US 5094736	A	10-03-1992	NONE	