



Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2362880 C 2009/09/29

(11)(21) **2 362 880**

(12) **BREVET CANADIEN  
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2000/02/17  
(87) Date publication PCT/PCT Publication Date: 2000/08/24  
(45) Date de délivrance/Issue Date: 2009/09/29  
(85) Entrée phase nationale/National Entry: 2001/08/15  
(86) N° demande PCT/PCT Application No.: US 2000/004126  
(87) N° publication PCT/PCT Publication No.: 2000/049108  
(30) Priorité/Priority: 1999/02/19 (US09/252,546)

(51) Cl.Int./Int.Cl. *C10L 1/14* (2006.01),  
*C10L 10/00* (2006.01)  
(72) Inventeur/Inventor:  
MATHUR, RAJIV, US  
(73) Propriétaire/Owner:  
IGEN, INC., US  
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : ADDITIFS DE CARBURANT A BASE DE VESICULES LIPIDIQUES ET SOURCES D'ENERGIE LIQUIDES  
RENFERMANT CES ADDITIFS  
(54) Title: LIPID VESICLE-BASED FUEL ADDITIVES AND LIQUID ENERGY SOURCES CONTAINING SAME

(57) **Abrégé/Abstract:**

Liquid energy sources, e.g., liquid fuels comprising lipid vesicles having fuel additives such as water are disclosed herein. The liquid energy sources, methods for preparation, and methods of enhancing engine performance disclosed herein employing the lipid vesicles result in enhanced fuel efficiency and/or lowered engine emissions. The invention further relates to liquid energy sources containing such additives which further comprise a polymeric dispersion assistant, which reduces the interfacial tension and coalescence of vesicles during dispersion process and storage, and thereby provide transparent looks to the liquid energy source.



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>(51) International Patent Classification <sup>7</sup> :</b><br><b>C10L 1/10, 10/02, 10/00, 1/32, 1/02, B01J 13/02</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>A1</b> | <b>(11) International Publication Number:</b> <b>WO 00/49108</b><br><b>(43) International Publication Date:</b> 24 August 2000 (24.08.00)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>(21) International Application Number:</b> PCT/US00/04126<br><b>(22) International Filing Date:</b> 17 February 2000 (17.02.00)<br><b>(30) Priority Data:</b><br>09/252,546                      19 February 1999 (19.02.99)                      US<br><b>(71) Applicant:</b> IGEN, INC. [US/US]; 103 Springer Building, 3411<br>Silverside Road, Wilmington, DE 19810 (US).<br><b>(72) Inventor:</b> MATHUR, Rajiv; 1 Prince Edward Drive, Sewell,<br>NJ 08080 (US).<br><b>(74) Agents:</b> LOREN, Ralph, A. et al.; Lahive & Cockfield, LLP,<br>28 State Street, Boston, MA 02109 (US).                                                                                                                                                                                                            |           | <b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).<br><br><b>Published</b><br><i>With international search report.</i><br><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> |
| <b>(54) Title:</b> LIPID VESICLE-BASED FUEL ADDITIVES AND LIQUID ENERGY SOURCES CONTAINING SAME<br><br><b>(57) Abstract</b><br><br>Liquid energy sources, e.g., liquid fuels comprising lipid vesicles having fuel additives such as water are disclosed herein. The liquid energy sources, methods for preparation, and methods of enhancing engine performance disclosed herein employing the lipid vesicles result in enhanced fuel efficiency and/or lowered engine emissions. The invention further relates to liquid energy sources containing such additives which further comprise a polymeric dispersion assistant, which reduces the interfacial tension and coalescence of vesicles during dispersion process and storage, and thereby provide transparent looks to the liquid energy source. |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

*LIPID VESICLE-BASED FUEL ADDITIVES AND LIQUID ENERGY SOURCES  
CONTAINING SAME*

**BACKGROUND OF THE INVENTION**

5

The present invention relates to liquid energy sources and in particular liquid energy sources comprising a liquid fuel and lipid vesicles containing a fuel additive such as water, which have enhanced performance characteristics compared to conventional gasoline and diesel fuels.

10

One recurring problem with existing commercial fuel is incomplete combustion, which results in higher emissions of nitrous oxide, carbon monoxide, hydrocarbons, and sulfur dioxide. It has previously been demonstrated that inclusion of up to 3% water in the fuel system reduces emissions of these gases and increases the octane rating.

15

One major problem with adding water and other aqueous components directly to liquid energy source, however, is that while the liquid energy source is capable of dispersing a limited amount of water, if too much water is present the water will separate out, along with other water soluble components of the liquid energy source. The separated water may cause damage to the engine and fuel systems by rusting and

20

corroding metal parts.

In view of the problems of the current art, improved methods for incorporating water and other fuel additives in liquid energy source have been desired, as well as new liquid energy source compositions having the desired properties.

25

**SUMMARY OF THE INVENTION**

30

The present invention relates to liquid energy sources comprising a liquid fuel and lipid vesicles containing a fuel additive such as water, which have enhanced performance characteristics compared to conventional gasoline and diesel fuels. The present invention may be used to enhance the performance characteristics of conventional gasoline and diesel fuels, by reducing emissions of pollutants and increasing the octane rating.

35

The present invention features a liquid energy source containing a liquid fuel and lipid vesicles having at least one lipid bilayer formed from at least one wall former material, and which have at least one cavity containing a fuel additive. The fuel additive-containing lipid vesicles allow incorporation of fuel additives such as water or


hydrazine in liquid energy sources more effectively and precisely than previously attainable. In an advantageous embodiment, the liquid energy source may also contain a polymeric dispersion assistant, which reduces the interfacial tension and coalescence of vesicles during dispersion process and storage, and thereby provide transparent looks to the liquid energy source. As such, in a preferred version of this embodiment, the addition of the polymer results in a transparent fuel. The polymer may be a polyoxyethylene glycol diester of polyhydroxy fatty acids represented generally by the following formula:



wherein RCO is a moiety derived from a polyhydroxy fatty acid and the value of n generally ranges between approximately 15 to approximately 40. In another embodiment the polymer is a polyoxyethylene glycol diester of fatty acids represented by the following general formula:



wherein RCO is a moiety derived from fatty acids such as, for example, stearic, palmitic, oleic, and lauric acids and n generally ranges between approximately 15 to approximately 40. In yet another embodiment, the polymer is a polyoxyethylene-polyoxypropylene block polymer represented by the following formula:

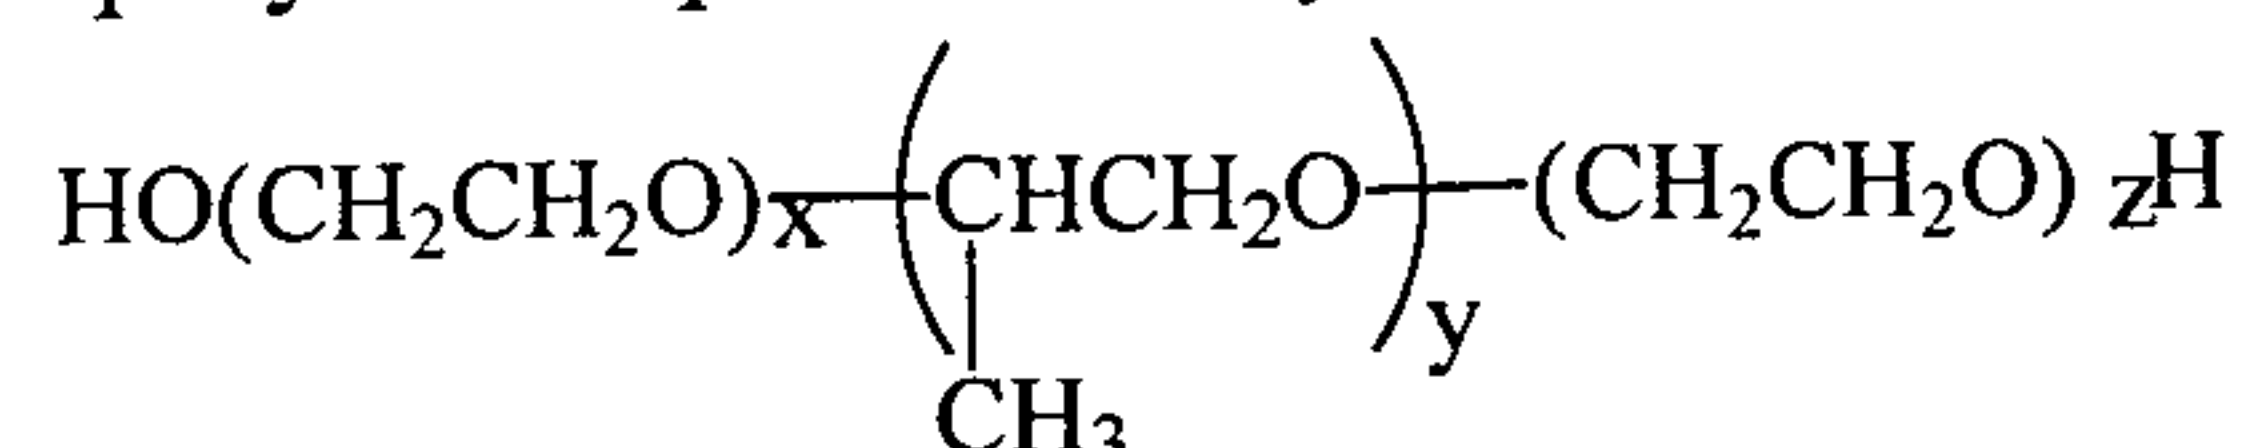

where the average value of x and the average value of z are each independently between about 2 and about 21 and the average value of y is between about 16 and about 67.

In another embodiment, the lipid vesicles have a cavity containing a fuel additive. The lipid vesicles may be paucilamellar, e.g., having 2-10 lipid bilayers surrounding an amorphous central cavity.

In yet another embodiment, the lipid vesicles are present in the liquid fuel in an amount sufficient to provide a concentration of the fuel additive (e.g., water) from about 0.01% to about 10%.

In a preferred embodiment, the liquid fuel is suitable for use in an internal combustion engine, e.g. gasoline or diesel fuel.

The invention also features a method for improving the efficiency of an internal combustion engine, by fueling the internal combustion engine with a liquid energy source containing a liquid fuel and lipid vesicles having at least one lipid bilayer

-3-

formed from at least one wall former material and a at least one cavity containing a fuel additive. The liquid energy source may also desirably contain a polymeric dispersion assistant.

In another aspect, the invention features a method of reducing emissions from an internal combustion engine, by fueling said internal combustion engine with a liquid energy source comprising a liquid fuel and lipid vesicles comprising at least one lipid bilayer formed from at least one wall former material and a central cavity containing a fuel additive. The liquid energy source preferably also contains a polymeric dispersion assistant.

In another aspect, the present invention provides a liquid energy source comprising a liquid fuel and lipid vesicles comprising at least one lipid bilayer formed from at least one wall former material, said lipid vesicles further comprising at least one cavity containing a fuel additive

In another aspect, the present invention provides a method of improving the efficiency of an internal combustion engine, comprising fueling said internal combustion engine with a liquid energy source comprising a liquid fuel and lipid vesicles comprising at least one lipid bilayer formed from at least one wall former material, said lipid vesicles further comprising at least one cavity containing a fuel additive.

### **DETAILED DESCRIPTION OF TIC INVENTION**

The present invention relates to liquid energy sources comprising a liquid fuel and lipid vesicles containing a fuel additive such as water, which have enhanced performance characteristics compared to conventional gasoline and diesel fuels. The present invention may be used to enhance the performance characteristics of conventional gasoline and diesel fuels, e.g., by reducing emissions of pollutants and increasing the octane rating.

The present invention features a liquid energy source containing a liquid fuel and lipid vesicles which are comprised of at least one lipid bilayer formed from at least one wall former material.

The term "liquid fuel" includes fuels such as gasoline, diesel fuels, residual fuels, alternative fuels, bio-diesel, engineered fuels, kerosene, jet aviation fuels or mixtures thereof. "Gasoline" includes conventional gasoline, reformulated gasoline, and oxygenated gasoline. "Diesel fuels" includes, e.g., those according to ASTM D975. "Residual fuels" includes low sulfur (i.e., 0-1.0%) fuel oils, medium sulfur (i.e., 2.0-2.4%) fuel oils, and low sulfur (i.e., >2.4%) fuel oils. "Jet aviation fuels" includes Jet A, Jet A1 (e.g., as in ASTM D1655), JP-8, JP-5, and JP-4. In a preferred embodiment, the liquid energy source is suitable for an internal combustion engine.

The term "wall former material" includes lipids and sterols. Preferred wall

-3a-

former materials include non-ionic amphiphiles. In a preferred embodiment, the lipid bilayer is formed from at least a primary wall former. In an embodiment, the primary wall former is a non-ionic amphiphile. However, vesicles can be formed by blending these amphiphile with other amphiphile, which may or may not form vesicles or a lamellar phase on its own. Preferred other amphiphiles have like chain length and unsaturation but some variations are acceptable. The term "like chain length and

- 4 -

unsaturation", as used herein, means and implies that both materials would have identical fatty acid chains.


The wall former material present in the lipid bilayer(s), is desirably a non-ionic amphiphile, e.g., C<sub>12</sub>-C<sub>18</sub> fatty alcohols, polyoxyethylene acyl alcohols, block copolymers, polyglycerols, sorbitan fatty acid esters, ethoxylated C<sub>12</sub>-C<sub>18</sub> glyceryl mono- and diesters, propylene glycol stearate, sucrose distearate, glyceryl dilaurate, glucosides, and mixtures thereof.

Inclusion of sterols in the construction of the vesicles of the present invention is believed to help buffer the thermotropic phase transition of the membrane layer, i.e., it enables the lipid membrane structure to be less susceptible to temperature changes in the region of the transition temperature. The sterols also insure optimal vesicle size and increase bilayer stability. Sterols include any sterol known in the art to be useful as modulators of lipid membranes. Suitable sterols include but are not limited to cholesterol, cholesterol derivatives, hydrocortisone, phytosterol, or mixtures thereof. In one embodiment, the sterol is phytosterol supplied from avocado oil unsaponifiables. The use of this sterol, in particular, to form lipid vesicles is described in U.S. Patent No. 5,643,600, entitled *Lipid Vesicles Containing Avocado Oil Unsaponifiables*.

In further embodiment, the lipid bilayers may also contain a secondary wall former. The secondary wall former is preferably selected from the group consisting of quaternary dimethyl diacyl amines, polyoxyethylene acyl alcohols, sorbitan fatty acid esters and ethoxy sorbitan fatty acid esters.

In a further embodiment, the lipid bilayers may also contain a charge producing agent, e.g., dimethylstearyl amine, dicetyl phosphate, cetyl sulfate, phosphatidic acid, phosphatidyl serine, oleic acid, palmitic acid, stearyl amines, oleylamines, and mixtures thereof.

In a particularly advantageous embodiment, the fuel additive and/or liquid energy source may contain a polymeric dispersion assistant. Often when a fuel additive is combined with the fuel, a cloudy mixture results, which is aesthetically undesirable and may lead the vendor or customer to conclude that the fuel is adulterated or spoiled. The liquid energy source containing the polymeric dispersion assistant is transparent. In one embodiment, the polymeric dispersion assistant may be a polyoxyethylene-polyoxypropylene glycol block polymer of the following formula:

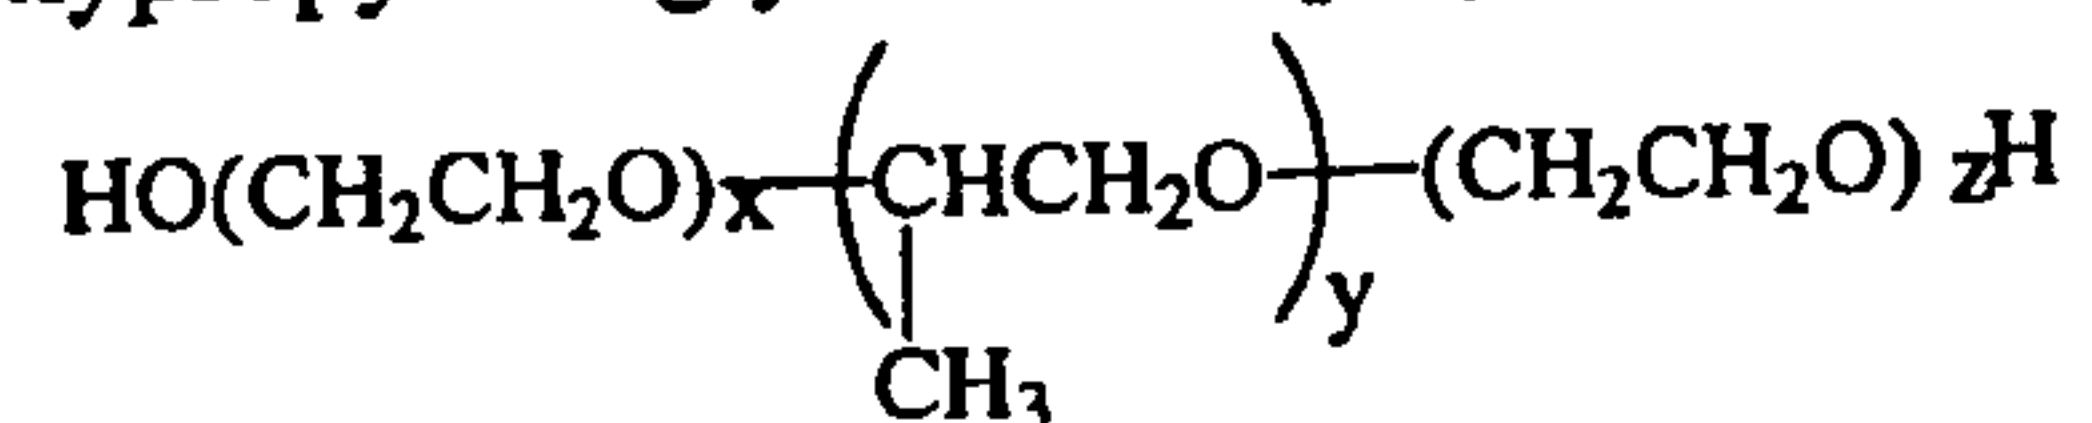


where the values of x, y, and z are each independently integers between about 1 and about 100. Preferably, the average value of x and the average value of z are each independently between about 2 and about 21 and the average value of y is between about 16 and about 67. In one advantageous embodiment, the average value of x and  
 5 the average value of z are each independently about 3, and the average value of y is about 30. In another advantageous embodiment, the average value of x and the average value of z are each independently about 6, and the average value of y is about 39. In yet another advantageous embodiment, the average value of x and the average value of z are each independently about 7, and the average value of y is about 54.

10 In another embodiment, the polymeric dispersion assistant is a polyoxyethylene glycol diester of polyhydroxy fatty acids which can be represented generally by the following formula:



where RCO is a moiety derived from a polyhydroxy fatty acid and the value of n  
 15 generally ranges between approximately 15 to approximately 40. Preferred examples of such moieties include, for example, PEG30 dipolyhydroxystearate.

In another embodiment the polymeric dispersion assistant is a polyoxyethylene glycol diester of fatty acids represented by the following general formula:

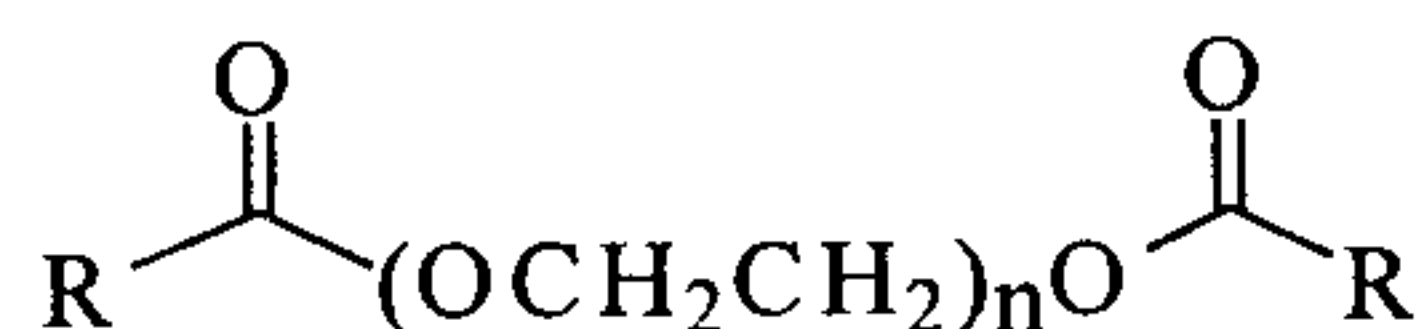

20 where RCO is a moiety derived from fatty acids such as, for example, stearic, palmitic, oleic, and lauric acids and n generally ranges between approximately 15 to approximately 40.

In a preferred embodiment, the lipid vesicles are paucilamellar lipid  
 25 vesicles which are generally characterized as having two to ten lipid bilayers or shells with small aqueous volumes separating each substantially spherical lipid shell. Generally, the innermost lipid bilayer surrounds a large, substantially amorphous central cavity which may be filled with either an aqueous solution or other fuel additive such as noted herein. Alternatively, when the lipid vesicles are paucilamellar, multiple additives  
 30 may be enclosed in each lipid bilayer shell so as to provide a blend of additives in the vesicle, e.g., a vesicle could comprise both water and kerosene, thus providing a more versatile fuel additive.

In one embodiment, the lipid vesicles are present in the liquid fuel in an amount sufficient to provide a concentration of the fuel additive in the range of from

0.01% to 10% of the fuel. In one particularly advantageous embodiment, the lipid vesicles are present in the liquid fuel (e.g., gasoline or diesel fuel) in an amount sufficient to provide a concentration of water in the liquid fuel of 5% or less, preferably 1.7%, and more preferably 3%.

5           The term "fuel additive" is art recognized and is intended to include compounds such as water, MTBE, ethanol, hydrazine, hydrogen peroxide, and methyl isobutane ketone, soya methyl ester and mixtures thereof. In a particularly preferred embodiment, the fuel additive is water.

10           The invention also features a method of improving the efficiency of an internal combustion engine, by fueling the internal combustion engine with a liquid energy source containing a liquid fuel and lipid vesicles which have at least one lipid bilayer formed from at least one wall former material and a cavity containing a fuel additive.

15           In addition, the invention features a method of reducing emissions from an internal combustion engine, by fueling the internal combustion engine with a liquid energy source containing a liquid fuel and lipid vesicles which have at least one lipid bilayer formed from at least one wall former material and a cavity containing a fuel additive.

20           The invention features additional embodiments for incorporating desired fuel additive in suitable fuels. Reduction of nitrogen oxides and particulates from the exhaust of diesel engines may be accomplished by means of encapsulating water or alcohol in diesel fuel using the lipid vesicles described herein. Alternatively, the lipid vesicles can be used to encapsulate aggressive additives in fuels to permit pipeline shipment of fungible distillate fuels.

25           The lipid vesicles of the invention may be used in gasolines to eliminate pipeline transportation and vapor pressure problems by encapsulating ethanol in gasoline, encapsulate MTBE to reduce or eliminate MTBE migration into the soil and ground water, eliminate excess evaporative emissions and vehicle operability problems by encapsulation of light and components, and suppress knock and NOX emissions by  
30   encapsulating water.

          For aviation fuels, the lipid vesicles of the invention may be used to to prevent ice formation in aviation fuels, e.g., by encapsulating existing and anti-icing chemicals such as (Diethylene glycol monomethyl ether (Di-EGME) to minimize deleterious effects and/or encapsulation of alternatives to Di-EGME; increase the  
35   flowability of jet fuel at low temperatures by encapsulating wax crystal modifiers, and increase the thermal stability of jet fuels by encapsulation of anti-oxidants, dispersants, or oxygen sinks.

- 7 -

The invention may also be used in reduction and control of nitrogen oxides emitting from electric utilities using petroleum fuels by the addition of encapsulated water to heavy fuel oils.

Other uses of the invention include enhancing Hydraulic Oil performance, improving electrical properties of materials, e.g., creating improved dielectric materials especially for use in Capacitors, as an additive to dissipate static electrical charging generated by the movement of liquid hydrocarbons which can be removed after use, and for encapsulating hemoglobin to provide an extended period of enhance oxygen carrying capacity for blood.

10 Aqueous filled vesicles, e.g., vesicles having their amorphous central cavities filled with a water-miscible solution, may be formed using either the "hot loading" technique disclosed in U. S. Patent No. 4,911,928 or the "cold loading" technique described in U.S. Patent No. 5,160,669. In either case, a lipid phase is formed by blending a primary wall former and compatible amphiphile(s),  
15 with or without sterols or lipophilic materials to be incorporated into the lipid bilayers, to form a homogenous lipid phase. In the "hot loading" technique, a lipophilic phase is made and heated, and is blended with a heated aqueous phase (e.g., water, saline, or any other aqueous solution which will be used to hydrate the lipids) under shear mixing conditions to form the vehicles. "Shear mixing conditions", as used herein, means a shear equivalent to a relative flow of 5-50 m/s through a 1mm orifice. The paucilamellar lipid vesicles of the disclosure can be made by a variety of devices which provides sufficiently high shear for shear mixing. A device which is particularly useful for making the  
20 lipid vesicles to the present invention is described in U.S. Patent No. 4,985,452, assigned to Micro Vesicular Systems, Inc.

25 In the "cold loading" technique, the lipid phase and the aqueous phase are blended under shear mixing conditions to form vesicles. Once the substantially aqueous filled lipid vesicles are formed, they are combined with the "cargo" material to be encapsulated, e.g., the water immiscible material. Droplets of the water immiscible  
30 material enter the vesicles, presumably by a process resembling endocytosis. The cold loading method has been described in more detail in the aforementioned U. S. Patent No. 5,160,669. These vesicles are then blended under low shear conditions, as described in U. S. Patent No. 5,160,669.

Once the vesicles are formed, they are diluted with additional liquid  
35 energy source. If a polymer additive is also used, the polymer is added at this time. It is occasionally necessary to melt the polymer before incorporating it into the liquid energy source mixture.

- 8 -

The invention is further illustrated by the following Examples, which should not be construed as further limiting the subject of the invention.

5

### EXAMPLE 1

In this Example, aqueous-filled vesicles were made using the methods disclosed in U.S. 5,160,669 and U.S. 4,911,928 from STEARETH-10<sup>TM</sup>, a polyoxyethylene-10 stearyl alcohol (ICI), glycerol distearate, cholesterol, mineral oil, oleic acid, methyl paraben, and propyl paraben. Briefly, the patent describes a technique whereby all of the lipid soluble materials are blended together at elevated temperatures of 60° - 80° C, but in some cases as high as 90° C. The aqueous phase, which includes all the water soluble materials is also heated. The lipid phase is then injected into an excess of the aqueous phase through a moderate shear device and the mixture is sheared until vesicles form. While a device such as the mixing machine shown in U. S. Patent No. 4,895,452 may be used, a pair of syringes connected by a three way stopcock can provide shear sufficient for formation of the vesicles. The shear required is about 5-50 m/s through a 1 mm orifice. Further details of this process are described in U.S. Pat. No. 4,911,928. Table 1 lists the formula used to make the vesicles (A1).

20

Table 1

| Chemical Components       | Mass (g) |
|---------------------------|----------|
| STEARETH-10 <sup>TM</sup> | 2.0      |
| Glycerol Distearate       | 3.6      |
| Cholesterol               | 1.0      |
| Mineral Oil               | 1.0      |
| Oleic Acid                | 0.5      |
| Water                     | 41.55    |
| Methyl paraben            | 0.1      |
| Propyl paraben            | 0.015    |

For these A1 vesicles, the aqueous solution was heated to 65° C, and the lipid soluble materials were heated to 72° C, before being mixed together in the method described above. The A1 vesicles that were formed were very small and spherical. The A1 vesicles were then mixed with gasoline in a ratio of 20 parts vesicles : 30 parts gasoline. Subsequently, the A1 vesicles were diluted to a concentration of about 50 ml of vesicles/liter of gasoline (0.5%).

25

IMH-390PC

- 9 -

The gasoline containing the A1 vesicles was tested in a small engine. A decrease in fuel consumption was noted when the gasoline containing the A1 vesicles was used.

When the mixture of gasoline and A1 vesicles were placed in a 45° C oven for two weeks, the vesicles remained intact.

### EXAMPLE 2

Using a similar procedure to that above, vesicles were made as follows.

10

**Table 2**

| Chemical            | Mass of Vesicle Components (g) |       |       |       |       |
|---------------------|--------------------------------|-------|-------|-------|-------|
|                     | A2                             | B2    | C2    | D2    | E2    |
| STEARETH-10™        | 2.0                            | 1.5   | 1.5   | 1.0   | 1.0   |
| Glycerol Distearate | 3.6                            | 2.7   | 2.7   | 1.8   | 1.8   |
| Mineral Oil         | 1.0                            | 0.75  | 0.75  | 0.5   | 0.5   |
| Phytosterol         | 1.0                            | 0.75  | 0     | 0.5   | 0     |
| Cholesterol         | 0                              | 0     | 0.75  | 0     | 0.5   |
| Oleic Acid          | 0.5                            | 0.375 | 0.375 | 0.25  | 0.25  |
| Water               | 41.55                          | 43.81 | 43.81 | 45.84 | 45.84 |
| Methyl paraben      | 0.1                            | 0.1   | 0.1   | 0.1   | 0.10  |
| Propyl paraben      | 0.03                           | 0.015 | 0.015 | 0.015 | 0.015 |

The lipids were at a temperature of 75° C when mixed with the aqueous components, which were at a temperature of 65° C. The vesicles were cold loaded in a ratio of 20 parts vesicles to 30 parts gasoline, as before.

15

The "A2" vesicles were stable at 45° C for a week in gasoline, although two layers were formed. However, after mixing, the layers dispersed.

The "B2" and "D2" vesicles had rod like structures, which contrasted to the spherical shape of the "C2" and "E2" vesicles.

IMH-390PC

- 10 -

**EXAMPLE 3**

Vesicles were made using a similar procedure as above, but incorporating soybean oil as a lipid component. The following table summarizes the chemical composition of the vesicles.

**Table 3**

| Chemical                  | Mass of Vesicle Components(g) |       |       |
|---------------------------|-------------------------------|-------|-------|
|                           | A3                            | B3    | C3    |
| STEARETH-10 <sup>TM</sup> | 2.0                           | 2.0   | 2.0   |
| Glycerol Distearate       | 3.6                           | 2.6   | 3.6   |
| Oleic Acid                | 0.25                          | 0.25  | 0.25  |
| Soybean Oil               | 5.0                           | 25.0  | 25.0  |
| Cholesterol               | 1.0                           | 1.0   | 0     |
| Water                     | 37.78                         | 20.0  | 20.0  |
| Methyl paraben            | 0.1                           | 0.1   | 0.1   |
| propyl paraben            | 0.015                         | 0.015 | 0.015 |

The lipid components were at temperature of 72° C and the aqueous components were at a temperature of 70° C when mixed. All of the vesicles were small and spherical. They were each "cold loaded" with 20 parts vesicles : 30 parts gasoline.

Initially, the "A3" vesicles were white and separated into two layers within a half hour of being loaded. After three days, the "B3" vesicles had also separated into two layers. The "C3" vesicles, however, only had a small layer of gasoline separated out from the vesicles. After three days, all of the vesicles retained small spherical shapes.

**EXAMPLE 4**

In this trial, the amount of soybean oil was lowered from the amount in Example 3. The vesicles were made by the same procedure as outlined above. The following table summarizes the chemical composition of the vesicles.

**Table 4**

| Chemical                  | Mass of Vesicle Components (g) |      |      |       |       |
|---------------------------|--------------------------------|------|------|-------|-------|
|                           | A4                             | B4   | C4   | D4    | E4    |
| STEARETH-10 <sup>TM</sup> | 2.0                            | 2.0  | 2.0  | 2.0   | 2.0   |
| Glycerol Distearate       | 3.6                            | 2.6  | 3.6  | 3.6   | 3.6   |
| Oleic Acid                | 0.25                           | 0.25 | 0.25 | 0.25  | 0.25  |
| Soybean Oil               | 20                             | 15   | 10   | 0     | 5.0   |
| Water                     | 25.0                           | 30.0 | 35.0 | 44.15 | 39.15 |

**SUBSTITUTE SHEET**  
**AMENDED SHEET**

IMH-390PC

- 11 -

The aqueous components were at a temperature of 65° C, when mixed with the lipids, which were at a temperature of 72° C. The A4, B4, and C4 vesicles were all small and spherical. However, the "A4" batch had more irregular vesicles. After being mixed (20 parts vesicles : 30 parts gasoline) with gasoline, all the samples were stable, although some gasoline separated to the top in the C4, D4, and E4 batches. After one week, no degradation of the vesicles was noted.

### EXAMPLE 5

A similar procedure was followed for making these vesicles. In these trials different levels of soya methyl ester was used to make the vesicles. The following table summarizes the composition of these vesicles.

Table 5

| Chemical            | Mass of Vesicle Components (g) |      |      |      |
|---------------------|--------------------------------|------|------|------|
|                     | A5                             | B5   | C5   | D5   |
| STEARETH-10™        | 2.0                            | 2.0  | 2.0  | 2.0  |
| Glycerol Distearate | 3.6                            | 3.6  | 3.6  | 3.6  |
| Oleic Acid          | 0.5                            | 0.5  | 0.5  | 0.5  |
| Soya methyl ester   | 2.5                            | 25   | 12.5 | 15.0 |
| Water               | 41.4                           | 18.9 | 31.4 | 20.0 |

The aqueous components were at 65° C, when mixed with the 72° C lipids to create the vesicles. All the vesicles were small and homogenous, although the A5 vesicles were very fluid while the B5 vesicles were very thick.

The A5 and C5 vesicles were cold loaded in gasoline at 40° C. The final concentration of vesicles in the fuel was 10%. For the A5 vesicles, no separation between the gasoline and the vesicles was noticed at room temperature, although at 45° C, there was a slight separation of a gasoline layer.

After the D5 vesicles were cold loaded at 45° C (in a ratio of 50% gasoline, 50% vesicles), they were placed in an oven. After five days 25% of the gasoline had separated from the vesicle mixture.

IMH-390PC

- 12 -

**EXAMPLE 6**

In this trial, the amount of water incorporated into the vesicles was increased. The vesicles also comprised about 40% soya methyl ester. The vesicles were made following the procedure outlined above and the composition of each population of vesicles is outlined in Table 6 below.

**Table 6**

| Chemical                  | Mass of Vesicle Components (g) |      |      |      |
|---------------------------|--------------------------------|------|------|------|
|                           | A6                             | B6   | C6   | D6   |
| Glyceryl Stearate         | 0                              | 20.0 | 0    | 20.0 |
| STEARETH-10™              | 3.2                            | 0    | 3.2  | 0    |
| Glycerol Distearate       | 5.76                           | 0    | 5.76 | 0    |
| Oleic Acid                | 0.80                           | 0    | 0.80 | 0    |
| Soya methyl ester         | 20.0                           | 40.0 | 20.0 | 40.0 |
| POE20 Sorbitan Monooleate | 0                              | 0    | 0.5  | 0.5  |
| Water                     | 20.0                           | 40.0 | 19.5 | 39.5 |

The vesicles were created by shear mixing the lipid components (at a temperature of 70° C) and aqueous components (at a temperature of 65° C) together. The resulting vesicles were spherical. When 0.5g of vesicles were mixed with 10g of gasoline, the vesicles initially dispersed but then started to settle at the bottom.

**EXAMPLE 7**

In this trial, the vesicles were loaded into both diesel and gasoline. The formulation of the vesicles is outlined in Table 7 below.

**Table 7**

| Chemical              | Mass of Vesicles Components (g) |      |      |      |
|-----------------------|---------------------------------|------|------|------|
|                       | A7                              | B7   | C7   | D7   |
| STEARETH-10™          | 4.0                             | 4.0  | 3.6  | 3.6  |
| Glycerol Distearate   | 7.2                             | 7.2  | 6.5  | 6.5  |
| Sorbitan Sesquioleate | 30                              | 25   | 25   | 25   |
| Soya methyl ester     | 5.0                             | 5.0  | 25   | 45   |
| Water                 | 53.8                            | 58.8 | 39.9 | 39.9 |

The vesicles were formed under shear mixing conditions with the aqueous components at a temperature of 65° C and the lipid components at a temperature of 72° C.

The A7 and B7 vesicles were small, spherical and heterogeneous. When loaded into gasoline in a ratio of 20 parts vesicles : 80 parts gasoline, the A7 vesicles went into suspension easily and did not separate out.

The C7 and D7 vesicles were small, thick and homogenous. When loaded in gasoline (20 parts vesicles: 80 parts gasoline), the vesicles dispersed easily.

10

### EXAMPLE 8

The gasoline containing the vesicles was tested using a 1995 Ford Explorer. The mileage was calculated from the first sputter of the engine to when the engine stopped completely. The tests were carried out during a range of outdoor temperatures. Table 8 below outlines the changes in gas mileage for the Explorer with the addition of various vesicles.

**Table 8**

| Type of Vesicle | % Water in Final Blend | Regular Gas Mileage (mpg) | Gas Mileage with Vesicles (mpg) | Difference in mileage per gallon | Percent Improvement |
|-----------------|------------------------|---------------------------|---------------------------------|----------------------------------|---------------------|
| A1              | 1.70                   | 19.2                      | 19.7                            | 0.5                              | 2.6                 |
| A1              | 1.70                   | 19.2                      | 19.8                            | 0.6                              | 3.1                 |
| A1              | 1.70                   | 19.2                      | 22.3                            | 3.1                              | 16.1                |
| A2              | 2.20                   | 16.1                      | 15.6                            | -0.5                             | -3.1                |
| B2              | 1.70                   | 16.1                      | 17.3                            | 1.2                              | 7.4                 |
| C2              | 1.70                   | 16.1                      | 17.9                            | 1.8                              | 11.2                |
| C3              | 0.80                   | 16.1                      | 16.7                            | 0.6                              | 3.7                 |
| C3              | 1.57                   | 16.1                      | 16.7                            | 0.6                              | 3.7                 |
| C7              | 1.70                   | 16.1                      | 17.3                            | 1.2                              | 7.4                 |
| A7              | 1.70                   | 16.1                      | 16.4                            | 0.3                              | 1.9                 |

20

In most cases, the addition of the lipid vesicles and the encapsulated additives to the gasoline resulted in increased mileage per gallon for the vehicle. The amount of water incorporated into the fuel does not uniformly affect the gasoline mileage. Although gas mileage was generally improved upon addition of the vesicles and the encapsulated additives, the emitted pollutants were significantly reduced as shown in Table 9 below.

25

IMH-390PC

- 14 -

Table 9

| Type of Vesicles | % H <sub>2</sub> O in gas | % CO | % Change | Hydrocarbons (ppm) | % Change | % CO <sub>2</sub> | % Change | % Oxygen |
|------------------|---------------------------|------|----------|--------------------|----------|-------------------|----------|----------|
| None             | 0                         | 0.25 | 0        | 85                 | 0        | 16.9              | 0        | 0.0      |
| A1               | 1.70                      | 0.02 | 92.0     | 7                  | 93.0     | 19.8              | 17.2     | 0.0      |
| A1               | 2.20                      | 0.0  | 100.0    | 2                  | 98.0     | 15.27             | 9.6      | 0.0      |
| B2               | 1.70                      | 0.0  | 100.0    | 11                 | 87.0     | 14.49             | 14.3     | 0.0      |
| C3               | 0.80                      | 0.01 | 96.0     | 10                 | 88.0     | 15.1              | 10.7     | 5.4      |
| C3               | 1.57                      | 0.03 | 88.0     | 8                  | 91.0     | 14.62             | 13.5     | 0.0      |
| C7               | 1.70                      | 0.0  | 100.0    | 3                  | 96.0     | 15.22             | 9.9      | 0.0      |
| A7               | 1.70                      | 0.04 | 84.0     | 50.0               | 41.0     | 14.73             | 12.8     | 0.0      |

This table shows that there was a significant reduction in emitted CO, when the vesicles were added to the gasoline. In the case of hydrocarbons, the A1, A7 and C3 vesicles and the additives encapsulated within significantly reduced the amount of hydrocarbons released in to the atmosphere. The reduction in the amount of hydrocarbons is an indication that the fuel was burning more efficiently. The amount of CO<sub>2</sub> was also reduced in all cases.

### EXAMPLE 9

The mixtures of vesicles and gasoline in the above examples were cloudy. In an effort to ameliorate this condition in the gasoline, a polymeric dispersion assistant was added. The composition of the vesicles (A8) is shown in the table below.

Table 10

| Chemical Components       | Mass (g) |
|---------------------------|----------|
| STEARETH-10 <sup>TM</sup> | 4.0      |
| Glycerol Distearate       | 7.2      |
| Soya Methyl Ester         | 5.0      |
| Sorbitan Sesquioleate     | 5.0      |
| Water                     | 78.8     |

The A8 vesicles were formed under shear mixing conditions, as outlined in the procedure above.

The A8 vesicles were mixed with gasoline and polymer PEG-30 Dipolyhydroxystearate (1% A8 vesicles, 3% polymer). In order to disperse the polymer through out the mixture, it was necessary to melt the polymer first. In a second trial, 1% A8 vesicles and 2% polymer was used. After the polymer was melted, it dispersed easily, which resulted in a clear solution of the gasoline. When no polymer was used, the resulting mixture of gasoline and vesicles was a hazy suspension.

SUBSTITUTE SHEET  
AMENDED SHEET

The A8 vesicles were also mixed with diesel fuel. In the first trial, 0.5% of the A8 vesicles were mixed with 3.0% PEG-30 dipolyhydroxystearate polymer. The mixture became clear yellow after extensive mixing. In the second trial, the melted polymer (2% by weight) was added directly to the diesel fuel (97% by weight). The polymer dispersed easily. Then, the A8 vesicles (2% by weight) were added, resulting in a cloudy mixture. When the mixture was shaken, it became clear. When no polymer was used, the resulting mixture of diesel fuel and vesicles resulted in a hazy yellow suspension.

### EXAMPLE 10

In another demonstration of the benefits of admixing vesicles of the invention in liquid energy source to reduce emissions, A8 vesicles were prepared as in Example 9, mixed with gasoline and tested as follows.

The A8 vesicles were gently mixed with gasoline (Indolene), followed by gentle mixing in of PEG-30 Dipolyhydroxystearate (2.2% A8 vesicles, 4.4% PEG-30) to form a Blend 1. A Blend 2 was similarly formed, using 6.6% polyoxyethylene-polyoxypropylene glycol block polymer in place of the PEG-30.

A 1997 Chevrolet Lumina was subjected to Hot 505 Emissions testing, using a control fuel (Indolene), and Blends 1 and 2. The results are shown in Table 11, below. The data show the dramatic reduction in emissions, e.g., CO and NO<sub>x</sub>, provided by addition of the vesicles of the invention.

**Table 11**

| Fuel                                     | THC                    | NMHC                   | CO                      | NO <sub>x</sub>         | CO <sub>2</sub>          | MPG               |
|------------------------------------------|------------------------|------------------------|-------------------------|-------------------------|--------------------------|-------------------|
| Indolene<br>(Control)                    | 0.08 g/mi              | 0.062 g/mi             | 1.056 g/mi              | 0.192 g/mi              | 335.477 g/mi             | 26.22             |
| Blend 1<br>(% change<br>from<br>control) | 0.117 g/mi<br>(34.50%) | 0.090 g/mi<br>(45.00%) | 0.752 g/mi<br>(-28.80%) | 0.082 g/mi<br>(-57.30%) | 336.562 g/mi<br>(0.323%) | 26.16<br>(-0.23%) |
| Blend 2<br>(% change<br>from<br>control) | 0.094 g/mi<br>(8.00%)  | 0.066 g/mi<br>(6.40%)  | 0.322 g/mi<br>(-69.50%) | 0.069 g/mi<br>(-64.00%) | 336.432 g/mi<br>(0.285%) | 26.23<br>(0.04%)  |

### EQUIVALENTS

Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, numerous equivalents to the specific procedures described herein. Such equivalents are considered to be within the scope of this

WO 00/49108

PCT/US00/04126

- 16 -

invention and are covered by the following claims. The contents of all references, issued patents, and published patent applications cited throughout this application are hereby incorporated by reference.

CLAIMS:


1. A liquid energy source comprising a liquid fuel and lipid vesicles comprising at least one lipid bilayer formed from at least one wall former material, said lipid vesicles further comprising at least one cavity containing a fuel additive selected from the group consisting of water, alcohols, hydrazine, hydrogen peroxide, soya methyl ester, methyl isobutane ketone, MTBE, anti-icing chemicals, wax crystal modifiers, anti-oxidants, dispersants, oxygen sinks, and mixtures thereof.
2. The liquid energy source of claim 1, wherein said liquid energy source further comprises a polymeric dispersion assistant.
3. The liquid energy source of claim 2, wherein said liquid energy source is transparent.
4. The liquid energy source of claim 1, wherein said lipid vesicles are paucilamellar.
5. The liquid energy source of claim 4, wherein said paucilamellar lipid vesicles have 2 to 10 lipid bilayers surrounding an amorphous central cavity.
6. The liquid energy source of claim 1, wherein said lipid bilayer comprises a primary wall former material and a secondary wall former material.
7. The liquid energy source of claim 6, wherein said primary wall former material is a non-ionic amphiphile.
8. The liquid energy source of claim 6 wherein said primary wall former material is selected from the group consisting of C<sub>12</sub>-C<sub>18</sub> fatty alcohols, polyoxyethylene acyl alcohols, polyglycerols, sorbitan fatty acid esters, ethoxylated sorbitan fatty acid esters, C<sub>12</sub>-C<sub>18</sub> glycol monoesters, C<sub>12</sub>-C<sub>18</sub> glyceryl mono- and diesters, propylene glycol stearate, sucrose distearate, glyceryl dilaurate, glucosides, and their salts, and mixtures thereof.
9. The liquid energy source of claim 6 wherein said lipid vesicles further comprise a sterol, selected from the group consisting of cholesterol, cholesterol derivatives, ethoxylated cholesterol, hydrocortisone, phytosterol, and mixtures thereof.

-18-

10. The liquid energy source of claim 1, wherein said at least one of said lipid bilayers further comprises a charge producing agent selected from the group consisting of dimethylstearyl amine, dicetyl phosphate, cetyl sulfate, phosphatidic acid, phosphatidyl serine, oleic acid, palmitic acid, stearyl amines, oleyl amines, and mixtures thereof.
11. The liquid energy source of claim 1 wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of said fuel additive in the range of from 0.01% to 10%.
12. The liquid energy source of claim 1 wherein said fuel additive is selected from the group consisting of water, ethanol, hydrazine, hydrogen peroxide, soya methyl ester and methyl isobutane ketone, and mixtures thereof.
13. The liquid energy source of claim 12 wherein said fuel additive is water.
14. The liquid energy source of claim 13 wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of water in said liquid fuel of 5% or less.
15. The liquid energy source of claim 8 wherein said secondary wall former material is selected from the group consisting of quaternary dimethyldiacylamines, polyethylene acyl alcohols, sorbitan fatty acid esters and ethoxylated sorbitan fatty acid esters and mixtures thereof.
16. The liquid energy source of claim 1, wherein said liquid fuel is suitable for use in an internal combustion engine.
17. The liquid energy source of claim 1, wherein said liquid fuel is selected from the group consisting of gasoline, diesel fuels, alternative fuels, bio-diesel, engineered fuels, kerosene, jet aviation fuels and mixtures thereof.
18. The liquid energy source of claim 2, wherein said polymeric dispersion assistant is selected from the group comprised of polyoxyethylene/polyoxypropylene block polymers, PEG diesters of polyhydroxy fatty acids and PEG diesters of fatty acids.

-19-

19. The liquid energy source of claim 18, wherein said polymeric dispersion assistant has the formula:

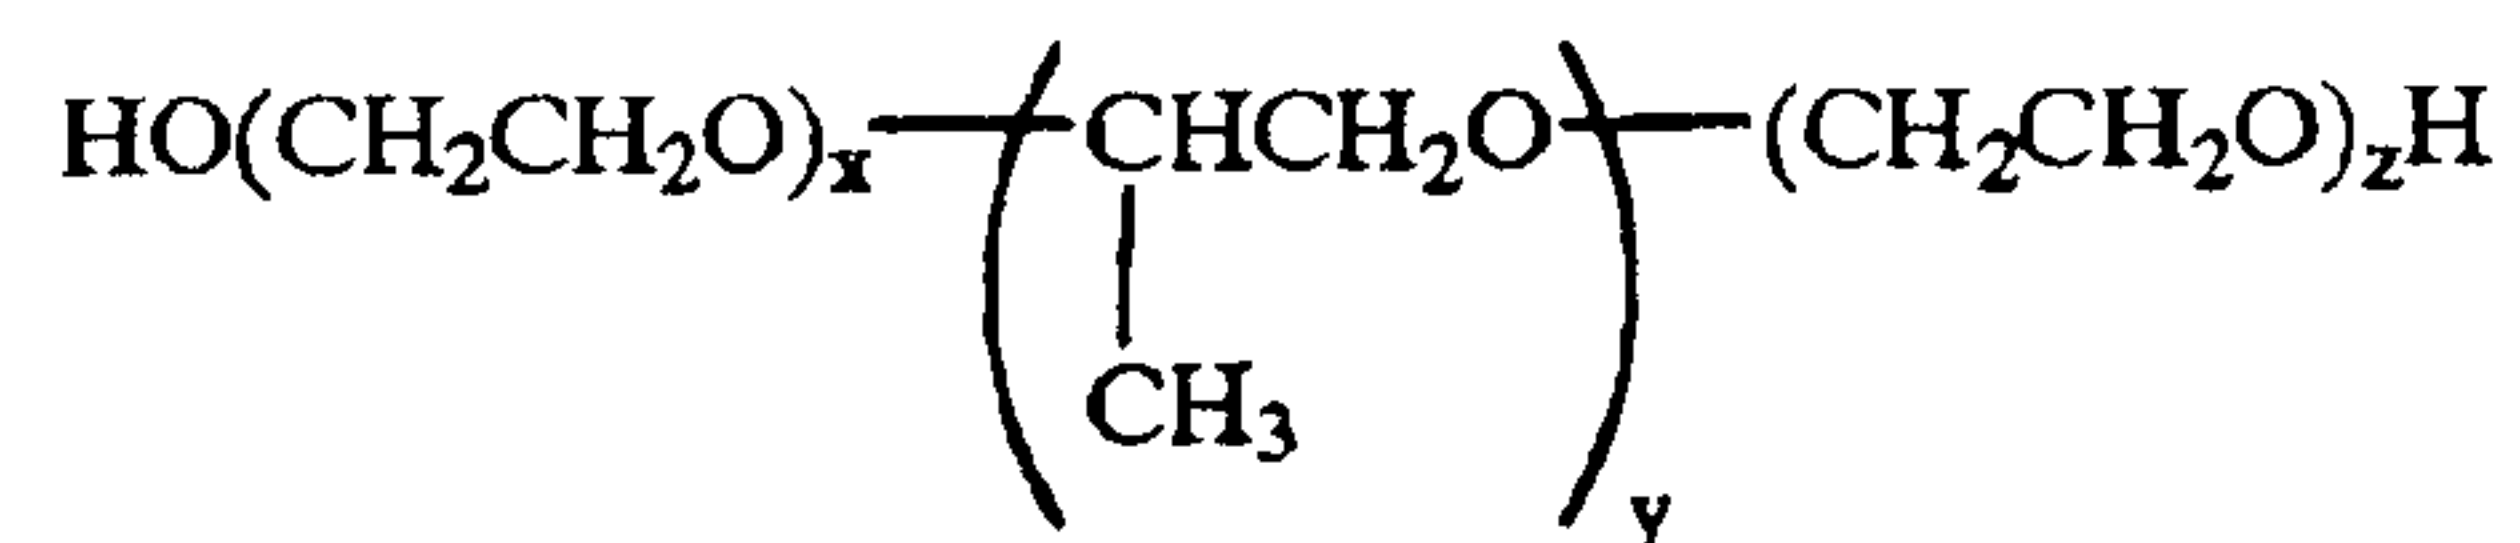

wherein the values of x, y, and z are each independently integers between 1 and 100.


20. The liquid energy source of claim 19, wherein the average value of x and the average value of z are each independently between 2 and 21 and the average value of y is between 16 and 67.

21. The liquid energy source of claim 20, wherein the average value of x and the average value of z are each independently 3, and the average value of y is 30.

22. The liquid energy source of claim 20, wherein the average value of x and the average value of z are each independently 6, and the average value of y is 39.


23. The liquid energy source of claim 20, wherein the average value of x and the average value of z are each independently 7, and the average value of y is 54.

24. The liquid energy source of claim 18, wherein said polymer has the formula:

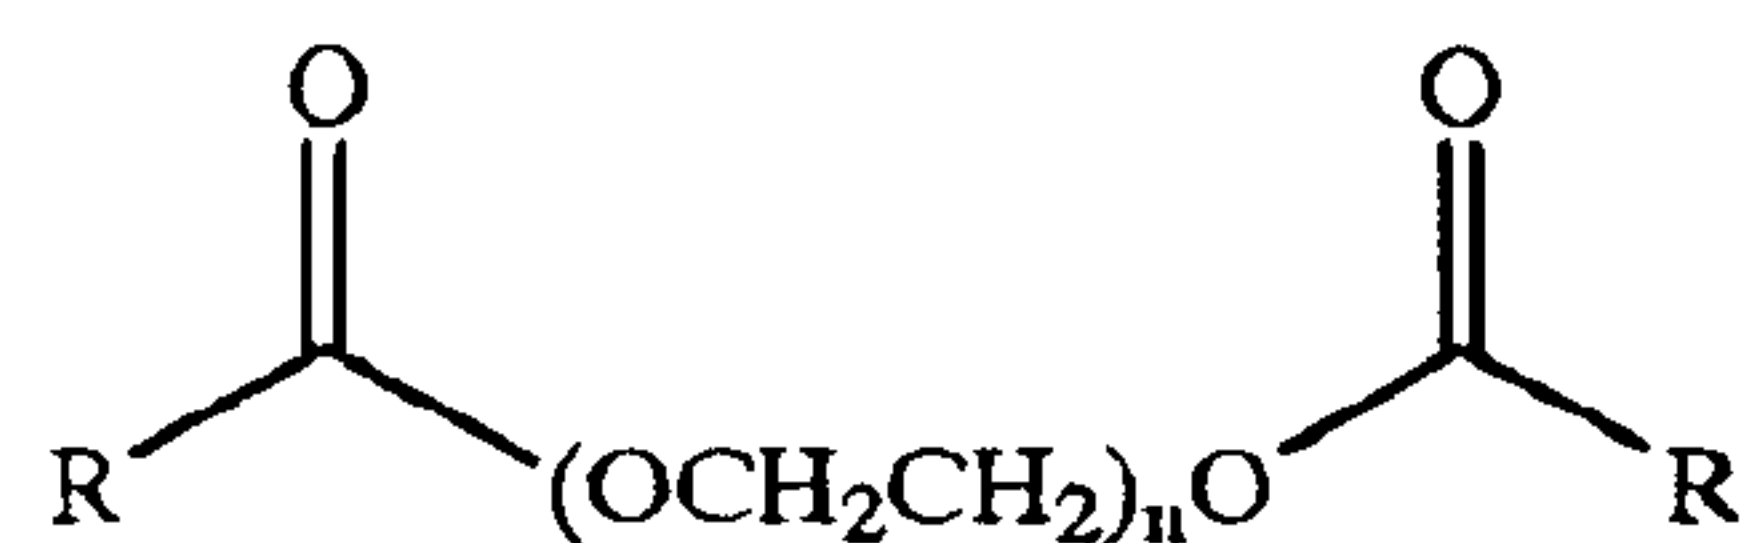

wherein each RCO group is independently derived from a polyhydroxy fatty acid; and the value of n is from about 15 to 40.

25. The liquid energy source of claim 18, wherein said polymeric dispersion assistant is represented by the following formula:

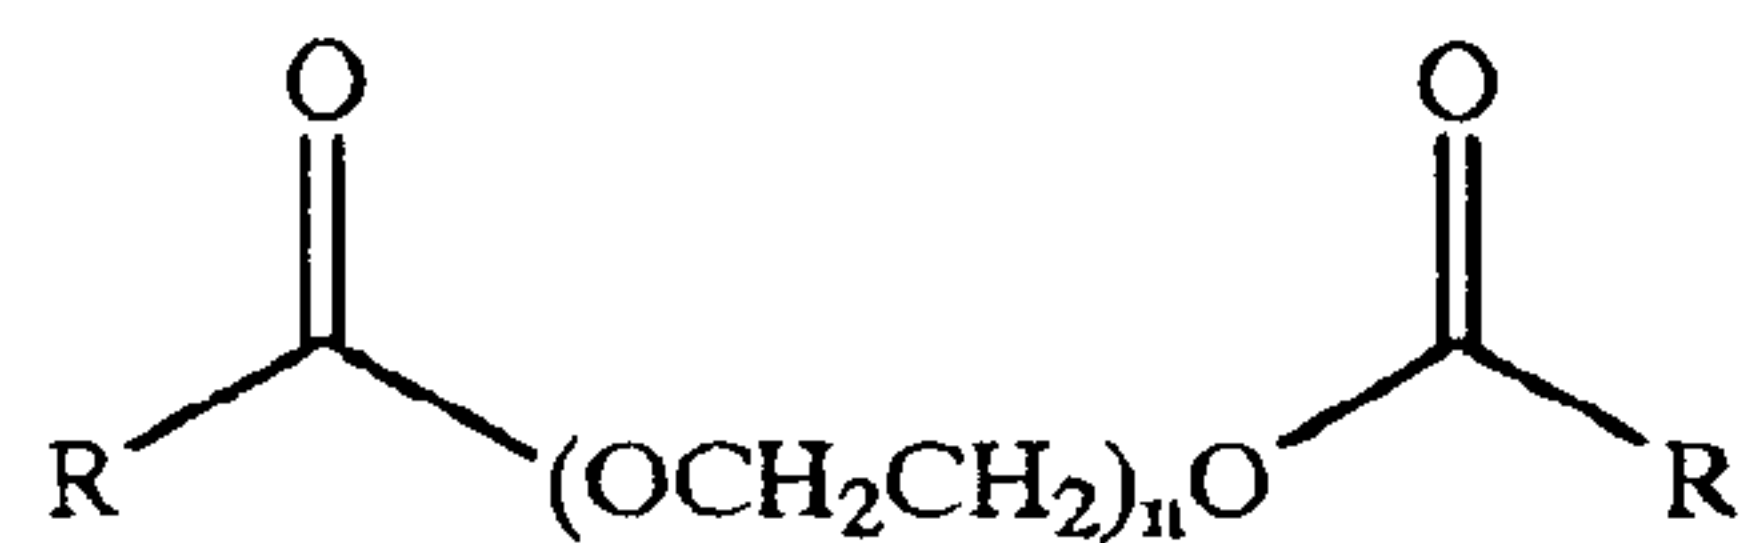


wherein each RCO is independently derived from fatty acids; and the value of n is from 15 to 40.

26. The liquid energy source of claim 25, wherein said fatty acids are selected from the group consisting of stearic, palmitic, oleic, and lauric acid.
27. A method of improving the efficiency of an internal combustion engine, comprising fueling said internal combustion engine with a liquid energy source comprising a liquid fuel and lipid vesicles comprising at least one lipid bilayer formed from at least one wall former material, said lipid vesicles further comprising at least one cavity containing a fuel additive selected from the group consisting of water, alcohols, hydrazine, hydrogen peroxide, soya methyl ester, methyl isobutane ketone, MTBE, anti-icing chemicals, wax crystal modifiers, anti-oxidants, dispersants, oxygen sinks, and mixtures thereof.
28. The method of claim 27, wherein said liquid energy source further comprises a polymeric dispersion assistant.
29. The method of claim 27, wherein said lipid vesicles are paucilamellar lipid vesicles having 2 to 10 lipid bilayers surrounding an amorphous central cavity.
30. The method of claim 27, wherein said lipid bilayer comprises a primary wall former material and a secondary wall former material.
31. The method of claim 30, wherein said primary wall former material is a non-ionic amphiphile.
32. The method of claim 30 wherein said primary wall former material is selected from the group consisting of C<sub>12</sub>-C<sub>18</sub> fatty alcohols, polyoxyethylene aryl alcohols, polyglycerols, sorbitan fatty acid esters, ethoxylated sorbitan fatty acid esters, C<sub>12</sub>-C<sub>18</sub> glycol monoesters, C<sub>12</sub>-C<sub>18</sub> glyceryl mono- and diesters, propylene glycol stearate, sucrose distearate, glyceryl dilaurate, and glucosides, and mixtures thereof.
33. The method of claim 30 wherein said lipid vesicles further comprise a sterol, selected from the group consisting of cholesterol, cholesterol derivatives, ethoxylated cholesterol, hydrocortisone, phytosterol, and mixtures thereof.

-21-

34. The liquid energy source of claim 27, wherein said at least one lipid bilayer further comprises a charge producing agent selected from the group consisting of dimethylstearyl amine, dicetyl phosphate, cetyl sulfate, phosphatidic acid, phosphatidyl serine, oleic acid, palmitic acid, stearyl amines, oleyl amines, and mixtures thereof.
35. The method of claim 27 wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of said fuel additive in the range of from 0.01% to 10%.
36. The method of claim 27 wherein said fuel additive is selected from the group consisting of water, ethanol, hydrazine, hydrogen peroxide, soya methyl ester and methyl isobutane ketone, and mixtures thereof.
37. The method of claim 36 wherein said fuel additive is water.
38. The method of claim 37 wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of water in said liquid fuel of about 5% or less.
39. The method of claim 27, wherein said liquid fuel is selected from the group consisting of gasoline, diesel fuels, alternative fuels, bio-diesel, engineered fuels, kerosene, jet aviation fuels and mixtures thereof.
40. The method of claim 28, wherein said polymeric dispersion assistant is selected from the group comprised of polyoxyethylene/polyoxypropylene block polymers, PEG diesters of polyhydroxy fatty acids and PEG diesters of fatty acids.
41. The method of claim 40, wherein said polymeric dispersion assistant has the formula:

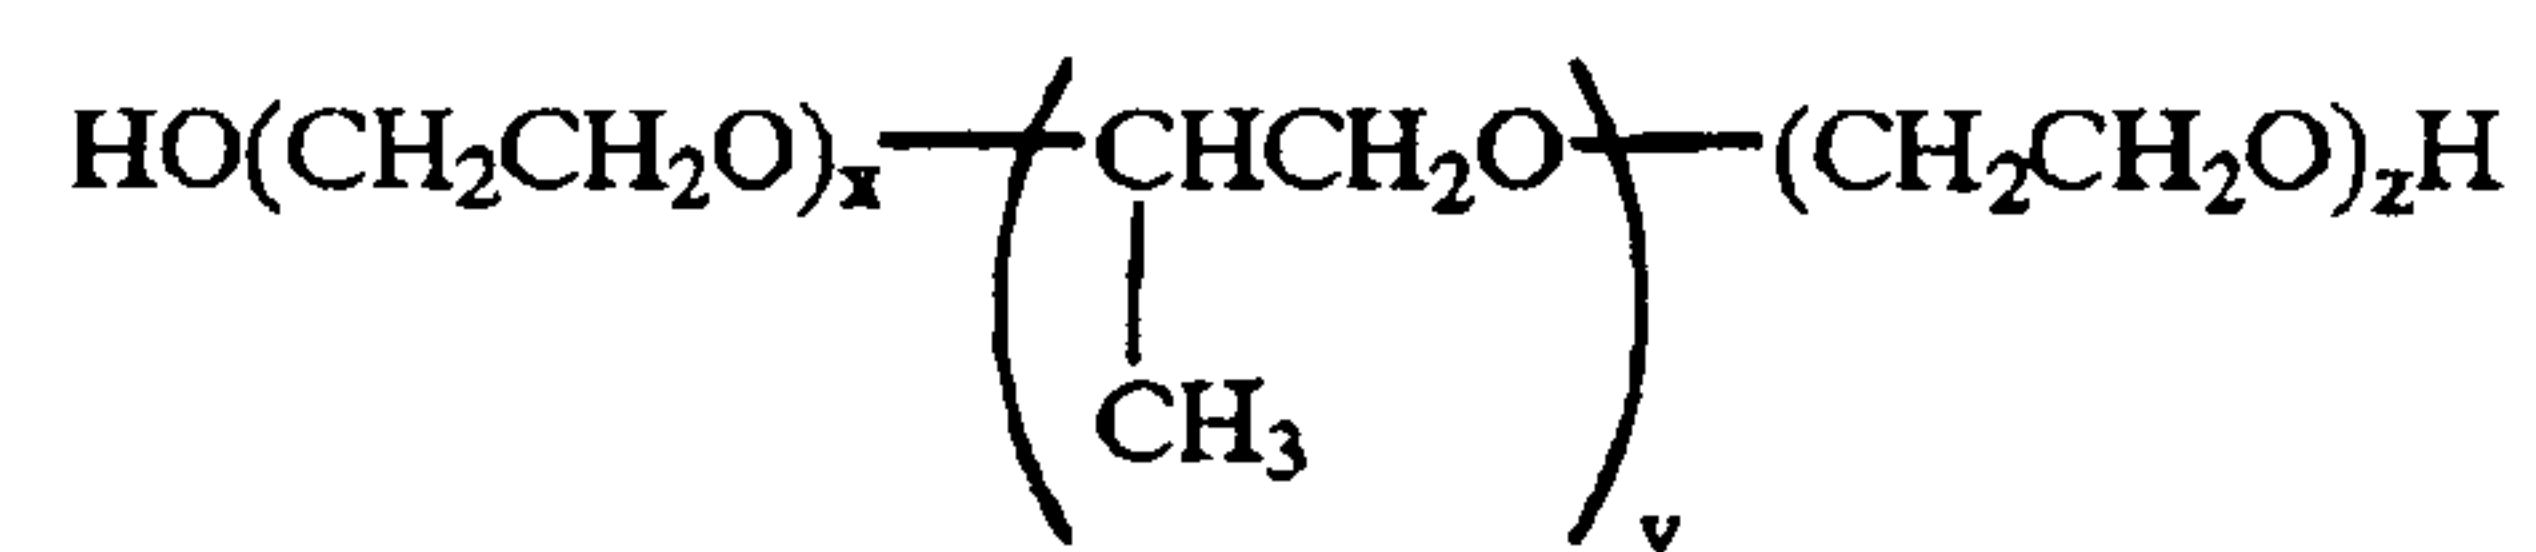

wherein the values of x, y, and z are each independently integers between 1 and 100.

-22-


42. The method of claim 41, wherein the average value of x and the average value of z are each independently between 2 and 21 and the average value of y is between 16 and 67.

43. The method of claim 42, wherein the average value of x and the average value of z are each independently 3, and the average value of y is 30.

44. The method of claim 43, wherein the average value of x and the average value of z are each independently 6, and the average value of y is 39.


45. The method of claim 42, wherein the average value of x and the average value of z are each independently 7, and the average value of y is 54.

46. The method of claim 40, wherein said polymer has the formula:

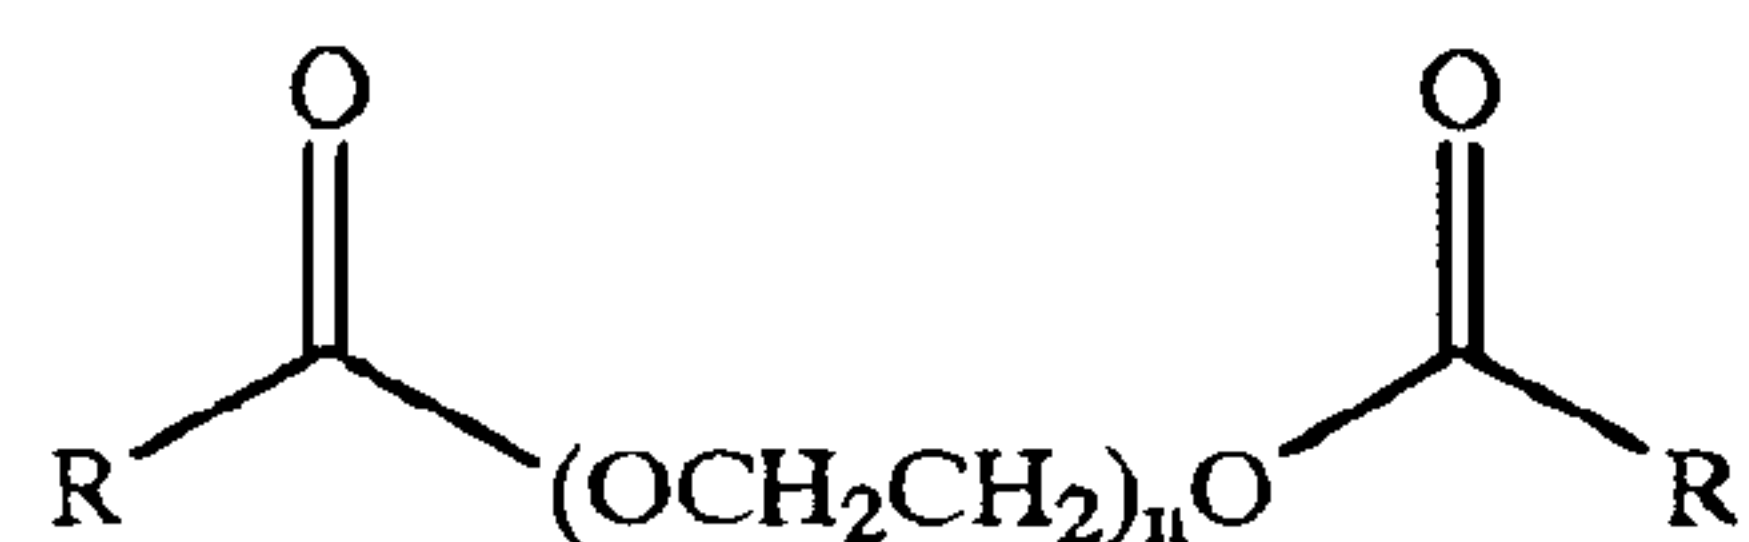

wherein each RCO group is independently derived from a polyhydroxy fatty acid; and the value of n is from 15 to 40.

47. The method of claim 40, wherein said polymeric dispersion assistant is represented by the following formula:

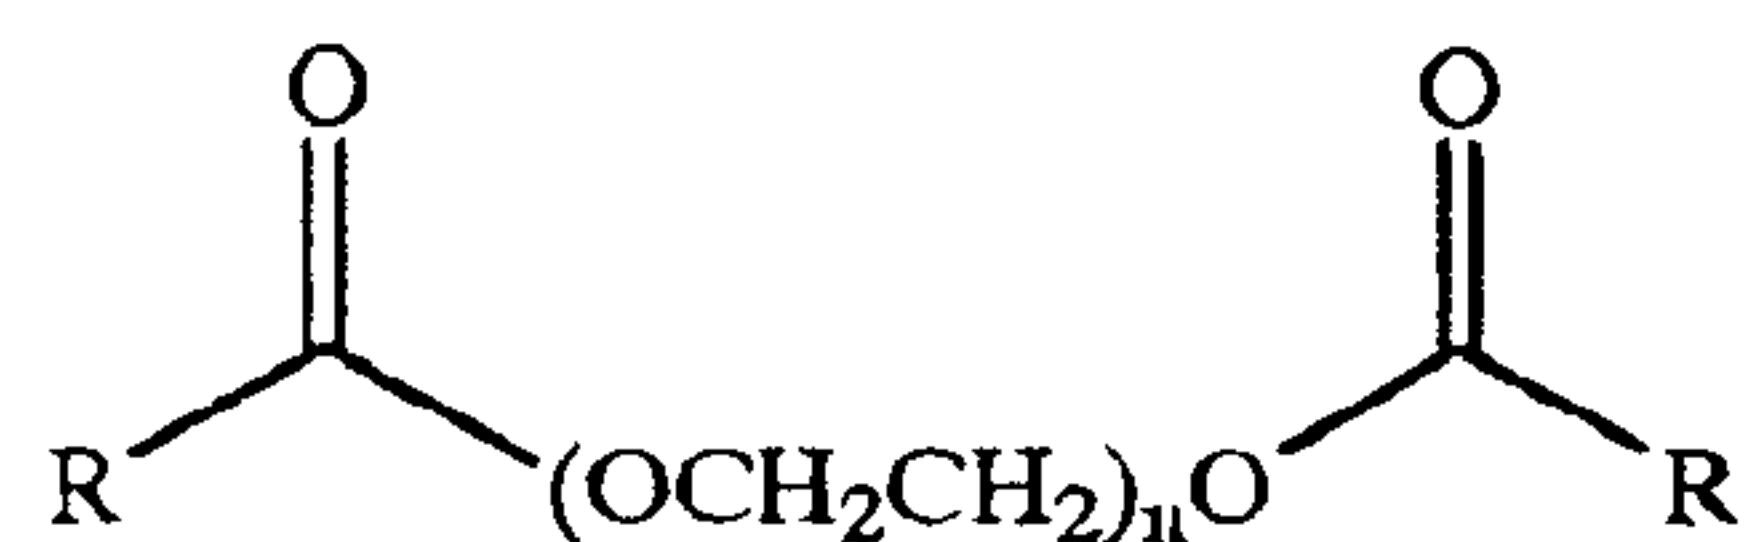

wherein each RCO is independently derived from fatty acids; and the value of n is from 15 to 40.

48. The method of claim 47, wherein said fatty acids are selected from the group consisting of stearic, palmitic, oleic, and lauric acid.


49. The method of claim 27, where said anti-icing is Di-EGME.

50. The liquid energy source of claim 1, wherein said anti-icing chemical is Di-EGME.

51. A liquid energy source comprising a liquid fuel and lipid vesicles comprising at least one lipid bilayer formed from at least one wall former material, said lipid vesicles further comprising at least one cavity containing a fuel additive.
52. The liquid energy source of claim 51, wherein said liquid energy source further comprises a polymeric dispersion assistant.
53. The liquid energy source of claim 52, wherein said liquid energy source is transparent.
54. The liquid energy source of claim 51, wherein said lipid vesicles are paucilamellar.
55. The liquid energy source of claim 54, wherein said paucilamellar lipid vesicles have 2 to 10 lipid bilayers surrounding an amorphous central cavity.
56. The liquid energy source of claim 51, wherein said lipid bilayer comprises a primary wall former material and a secondary wall former material.
57. The liquid energy source of claim 56, wherein said primary wall former material is a non-ionic amphiphile.
58. The liquid energy source of claim 56, wherein said primary wall former material is selected from the group consisting of C<sub>12</sub>-C<sub>18</sub> fatty alcohols, polyoxyethylene acyl alcohols, polyglycerols, sorbitan fatty acid esters, ethoxylated sorbitan fatty acid esters, C<sub>12</sub>-C<sub>18</sub> glycol monoesters, C<sub>12</sub>-C<sub>18</sub> glyceryl mono- and diesters, propylene glycol stearate, sucrose distearate, glyceryl dilaurate, glucosides, and their salts, and mixtures thereof.
59. The liquid energy source of claim 56 wherein said lipid vesicles further comprise a sterol, selected from the group consisting of cholesterol, cholesterol derivatives, ethoxylated cholesterol, hydrocortisone, phytosterol, and mixtures thereof.
60. The liquid energy source of claim 51, wherein said at least one of said lipid bilayers further comprises a charge producing agent selected from the group consisting of dimethylstearyl amine, dicetyl phosphate, cetyl sulfate, phosphatidic acid, phosphatidyl serine, oleic acid, palmitic acid, stearyl amines, oleyl amines, and mixtures thereof.

61. The liquid energy source of claim 51, wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of said fuel additive in the range of from 0.01% to 10%.
62. The liquid energy source of claim 51, wherein said fuel additive is selected from the group consisting of water, ethanol, hydrazine, hydrogen peroxide, soya methyl ester and methyl isobutane ketone, and mixtures thereof.
63. The liquid energy source of claim 62, wherein said fuel additive is water.
64. The liquid energy source of claim 63, wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of water in said liquid fuel of 5% or less.
65. The liquid energy source of claim 58, wherein said secondary wall former material is selected from the group consisting of quaternary dimethyldiacylamines, polyoxyethylene acyl alcohols, sorbitan fatty acid esters and ethoxylated sorbitan fatty acid esters and mixtures thereof.
66. The liquid energy source of claim 51, wherein said liquid fuel is suitable for use in an internal combustion engine.
67. The liquid energy source of claim 51, wherein said liquid fuel is selected from the group consisting of gasoline, diesel fuels, alternative fuels, bio-diesel, engineered fuels, kerosene, jet aviation fuels and mixtures thereof.
68. The liquid energy source of claim 52, wherein said polymeric dispersion assistant is selected from the group comprised of polyoxyethylene/polyoxypropylene block polymers, PEG diesters of polyhydroxy fatty acids and PEG diesters of fatty acids.
69. The liquid energy source of claim 68, wherein said polymeric dispersion assistant has the formula:

-25-

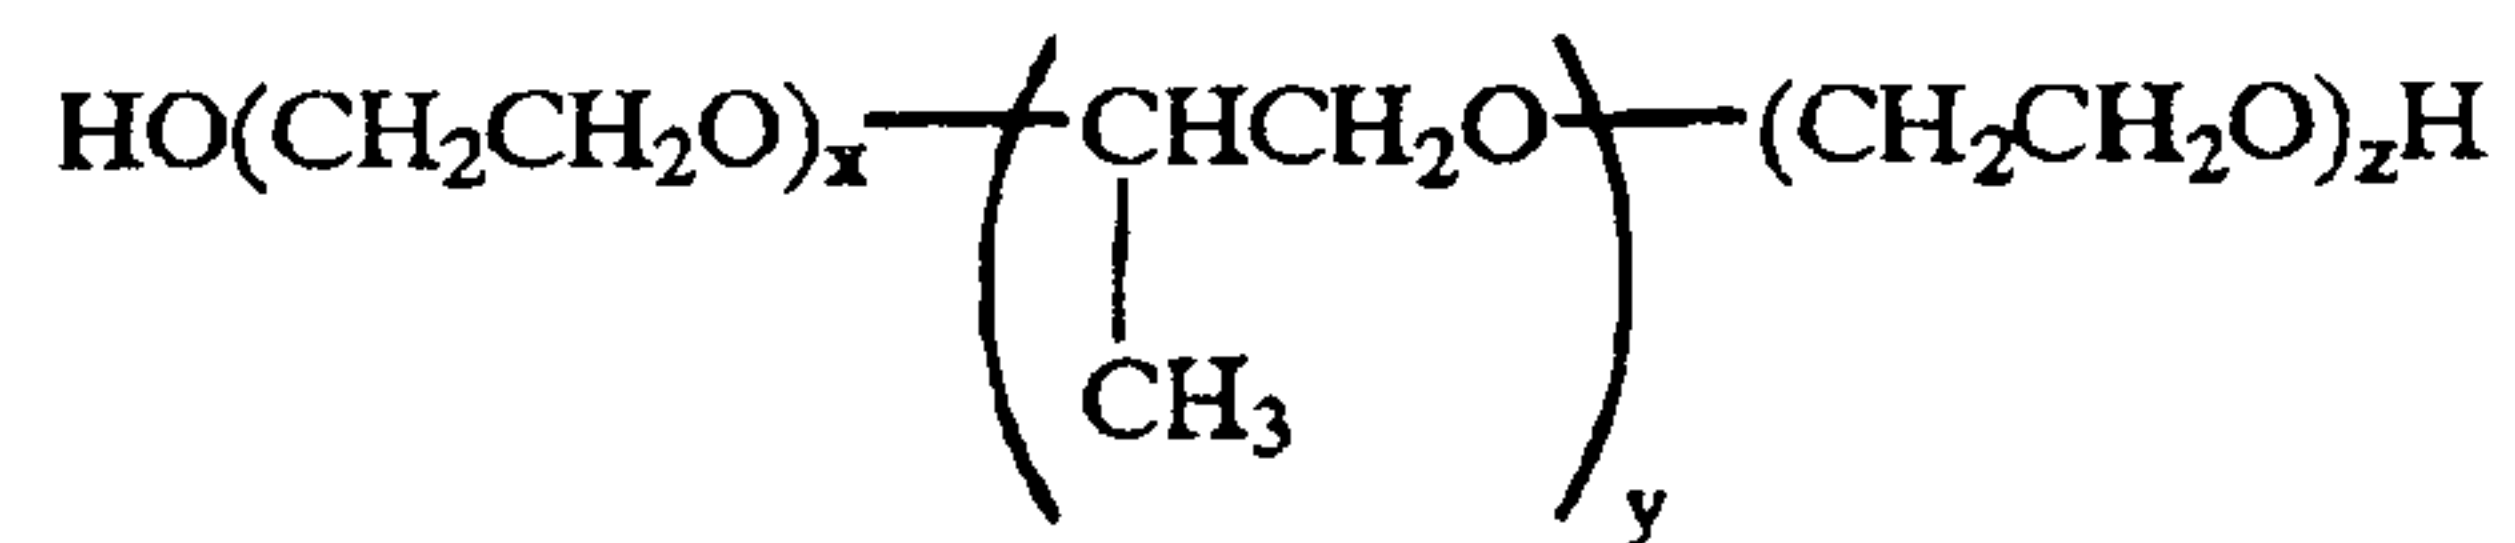

wherein the values of x, y, and z are each independently integers between 1 and 100.


70. The liquid energy source of claim 69, wherein the average value of x and the average value of z are each independently between 2 and 21 and the average value of y is between 16 and 67.

71. The liquid energy source of claim 70, wherein the average value of x and the average value of z are each independently 3, and the average value of y is 30.

72. The liquid energy source of claim 70, wherein the average value of x and the average value of z are each independently 6, and the average value of y is 39.


73. The liquid energy source of claim 70, wherein the average value of x and the average value of z are each independently 7, and the average value of y is 54.

74. The liquid energy source of claim 68, wherein said polymer has the formula:

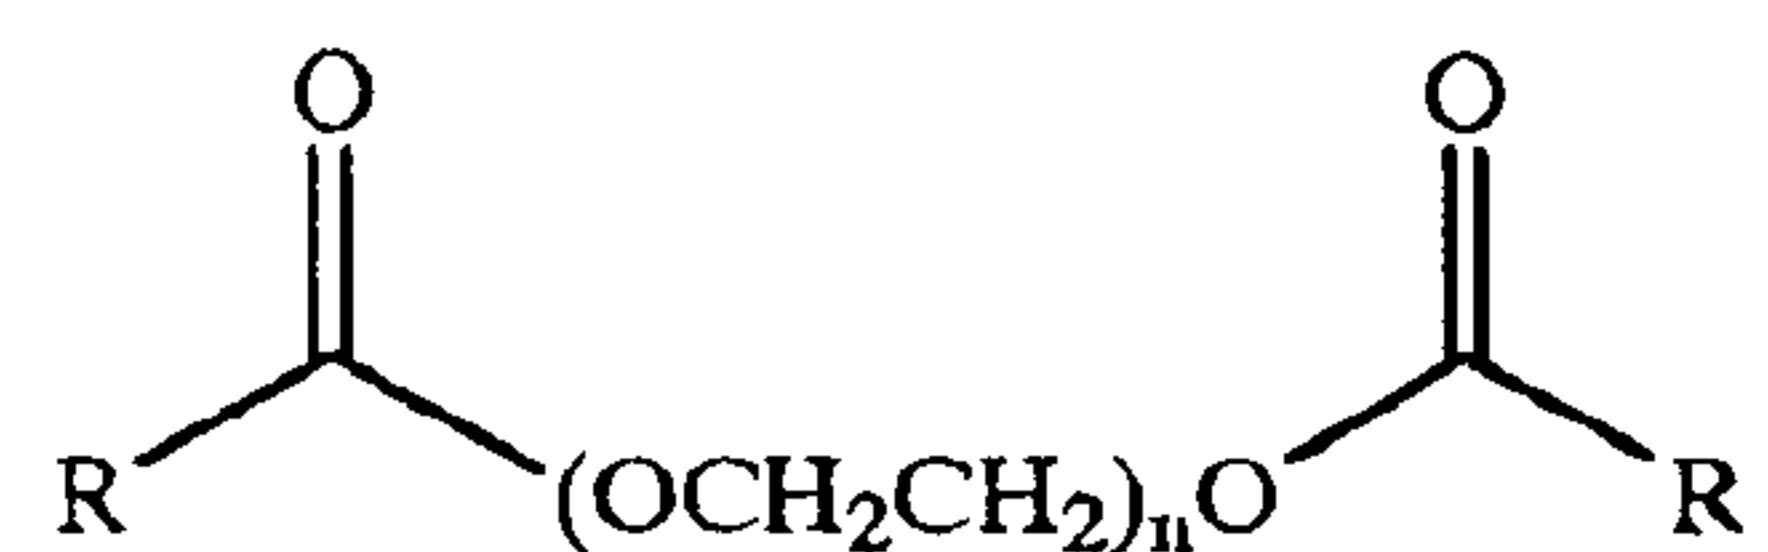

wherein each RCO group is independently derived from a polyhydroxy fatty acid; and the value of n is from 15 to 40.

75. The liquid energy source of claim 68, wherein said polymeric dispersion assistant is represented by the following formula:

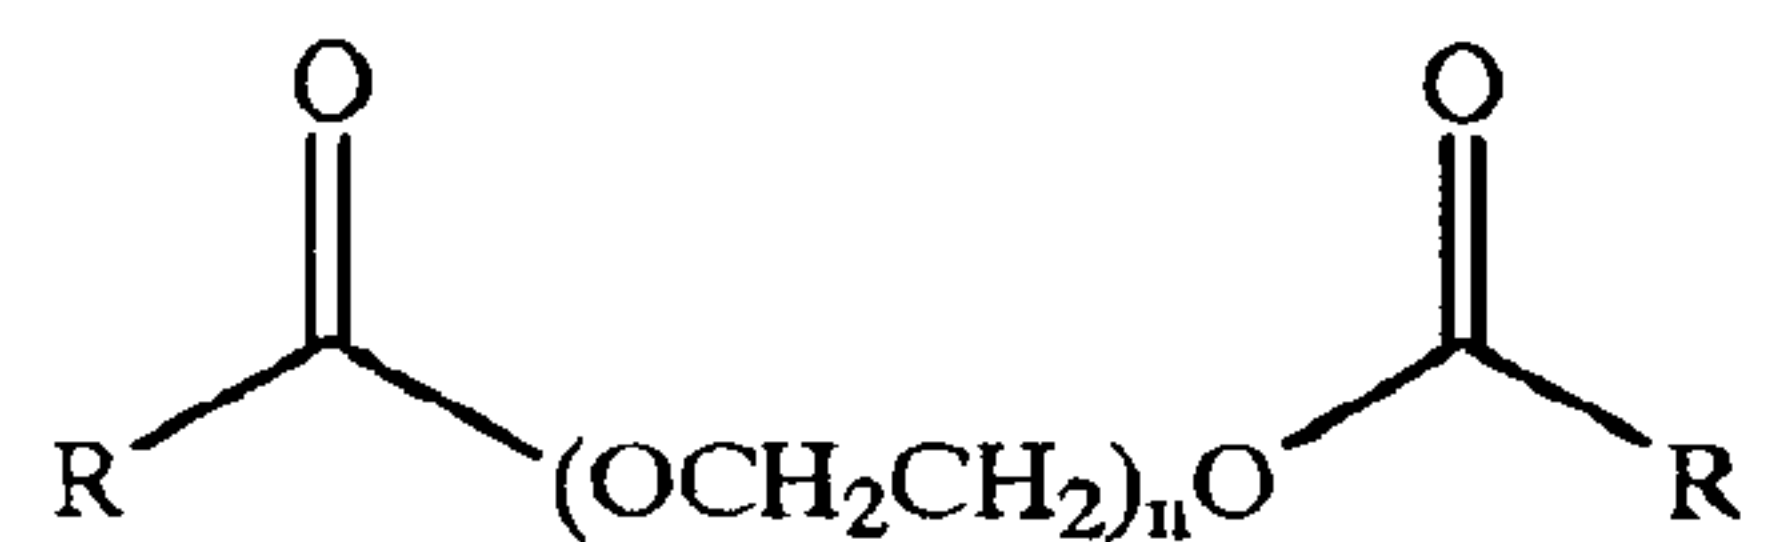

wherein each RCO is independently derived from fatty acids; and the value of n is from 15 to 40.

76. The liquid energy source of claim 75, wherein said fatty acids are selected from the group consisting of stearic, palmitic, oleic, and lauric acid.
77. A method of improving the efficiency of an internal combustion engine, comprising fueling said internal combustion engine with a liquid energy source comprising a liquid fuel and lipid vesicles comprising at least one lipid bilayer formed from at least one wall former material, said lipid vesicles further comprising at least one cavity containing a fuel additive.
78. The method of claim 77, wherein said liquid energy source further comprises a polymeric dispersion assistant.
79. The method of claim 77, wherein said lipid vesicles are paucilamellar lipid vesicles having 2 to 10 lipid bilayers surrounding an amorphous central cavity.
80. The method of claim 77, wherein said lipid bilayer comprises a primary wall former material and a secondary wall former material.
81. The method of claim 80, wherein said primary wall former material is a non-ionic amphiphile.
82. The method of claim 80, wherein said primary wall former material is selected from the group consisting of C<sub>12</sub>-C<sub>18</sub> fatty alcohols, polyoxyethylene acyl alcohols, polyglycerols, sorbitan fatty acid esters, ethoxylated sorbitan fatty acid esters, C<sub>12</sub>-C<sub>18</sub> glycol monoesters, C<sub>12</sub>-C<sub>18</sub> glyceryl mono- and diesters, propylene glycol stearate, sucrose distearate, glyceryl dilaurate, and glucosides, and mixtures thereof.
83. The method of claim 80, wherein said lipid vesicles further comprise a sterol, selected from the group consisting of cholesterol, cholesterol derivatives, ethoxylated cholesterol, hydrocortisone, phytosterol, and mixtures thereof.
84. The liquid energy source of claim 77, wherein said at least one lipid bilayer further comprises a charge producing agent selected from the group consisting of dimethylstearyl amine, dicetyl phosphate, cetyl sulfate, phosphatidic acid, phosphatidyl serine, oleic acid, palmitic acid, stearyl amines, oleyl amines, and mixtures thereof.

-27-

85. The method of claim 77, wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of said fuel additive in the range of from 0.01% to 10%.

86. The method of claim 77, wherein said fuel additive is selected from the group consisting of water, ethanol, hydrazine, hydrogen peroxide, soya methyl ester and methyl isobutane ketone, and mixtures thereof.


87. The method of claim 86, wherein said fuel additive is water.

88. The method of claim 87, wherein said lipid vesicles are present in said liquid fuel in an amount sufficient to provide a concentration of water in said liquid fuel of 5% or less.

89. The method of claim 87, wherein said liquid fuel is selected from the group consisting of gasoline, diesel fuels, alternative fuels, bio-diesel, engineered fuels, kerosene, jet aviation fuels and mixtures thereof.

90. The method of claim 88, wherein said polymeric dispersion assistant is selected from the group comprised of polyoxyethylene/polyoxypropylene block polymers, PEG diesters of polyhydroxy fatty acids and PEG diesters of fatty acids.

91. The method of claim 90, wherein said polymeric dispersion assistant has the formula:

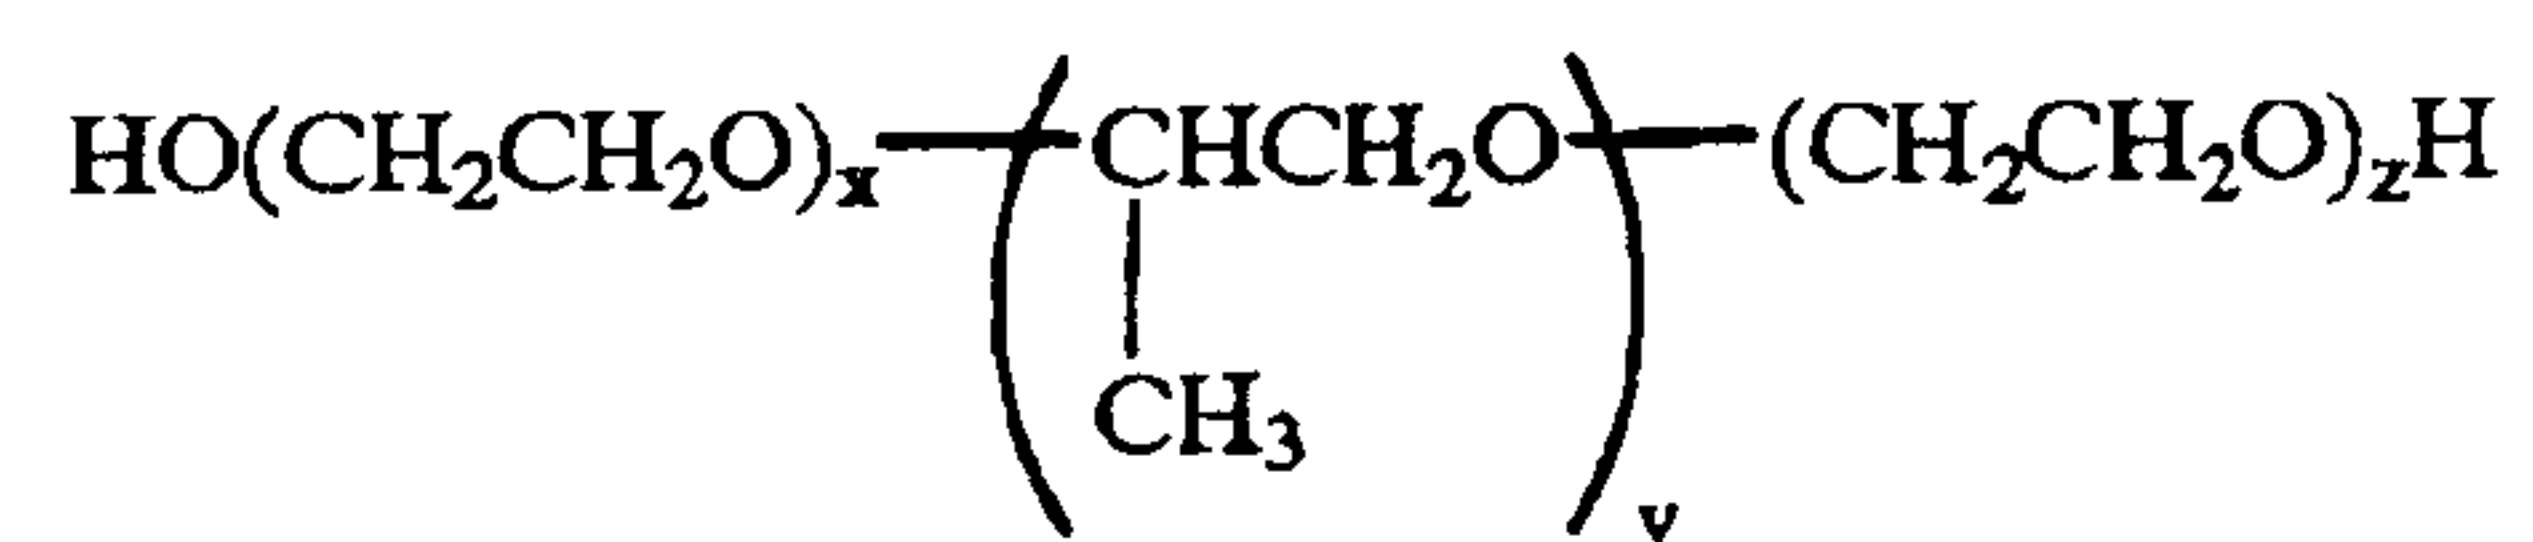

wherein the values of x, y, and z are each independently integers between 1 and 100.

92. The method of claim 91, wherein the average value of x and the average value of z are each independently between 2 and 21 and the average value of y is between 16 and 67.


93. The method of claim 92, wherein the average value of x and the average value of z are each independently 3, and the average value of y is 30.

-28-

94. The method of claim 93, wherein the average value of x and the average value of z are each independently 6, and the average value of y is 39.


95. The method of claim 92, wherein the average value of x and the average value of z are each independently 7, and the average value of y is 54.

96. The method of claim 90, wherein said polymer has the formula:

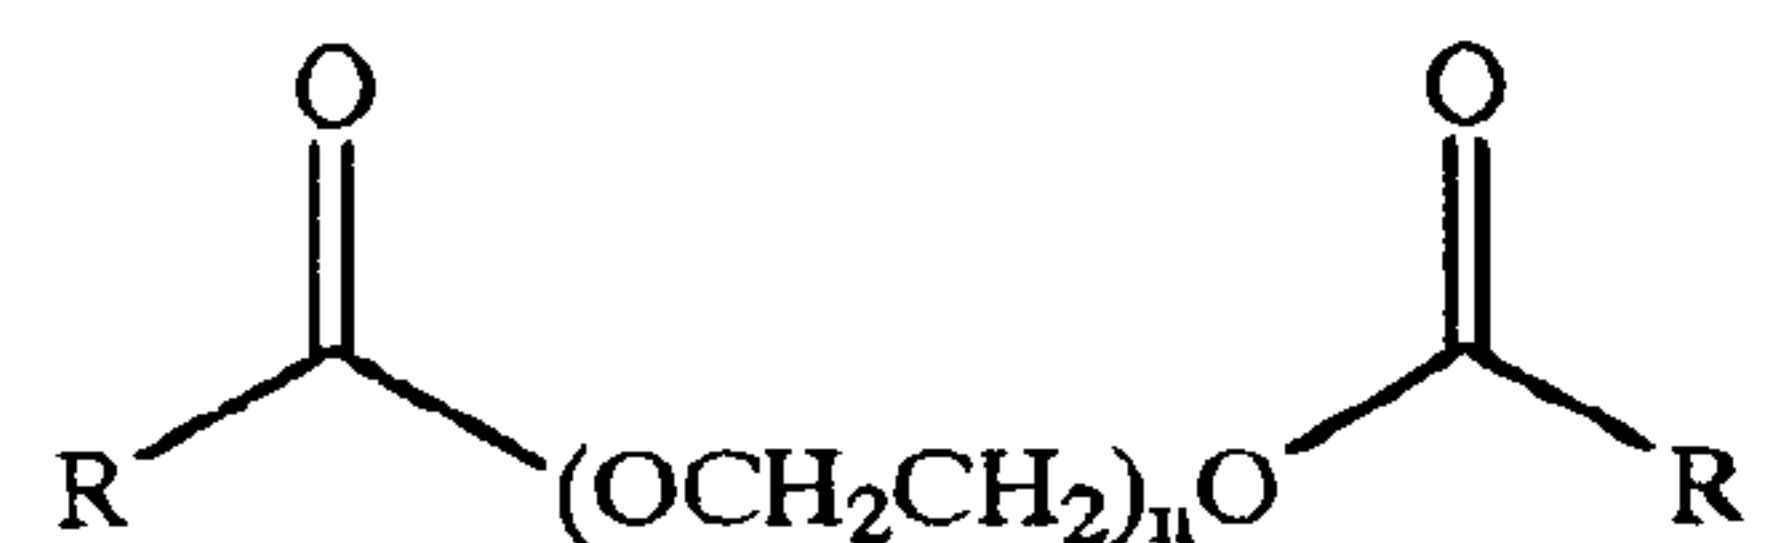

wherein each RCO group is independently derived from a polyhydroxy fatty acid; and the value of n is from 15 to 40.

97. The method of claim 90, wherein said polymeric dispersion assistant is represented by the following formula:

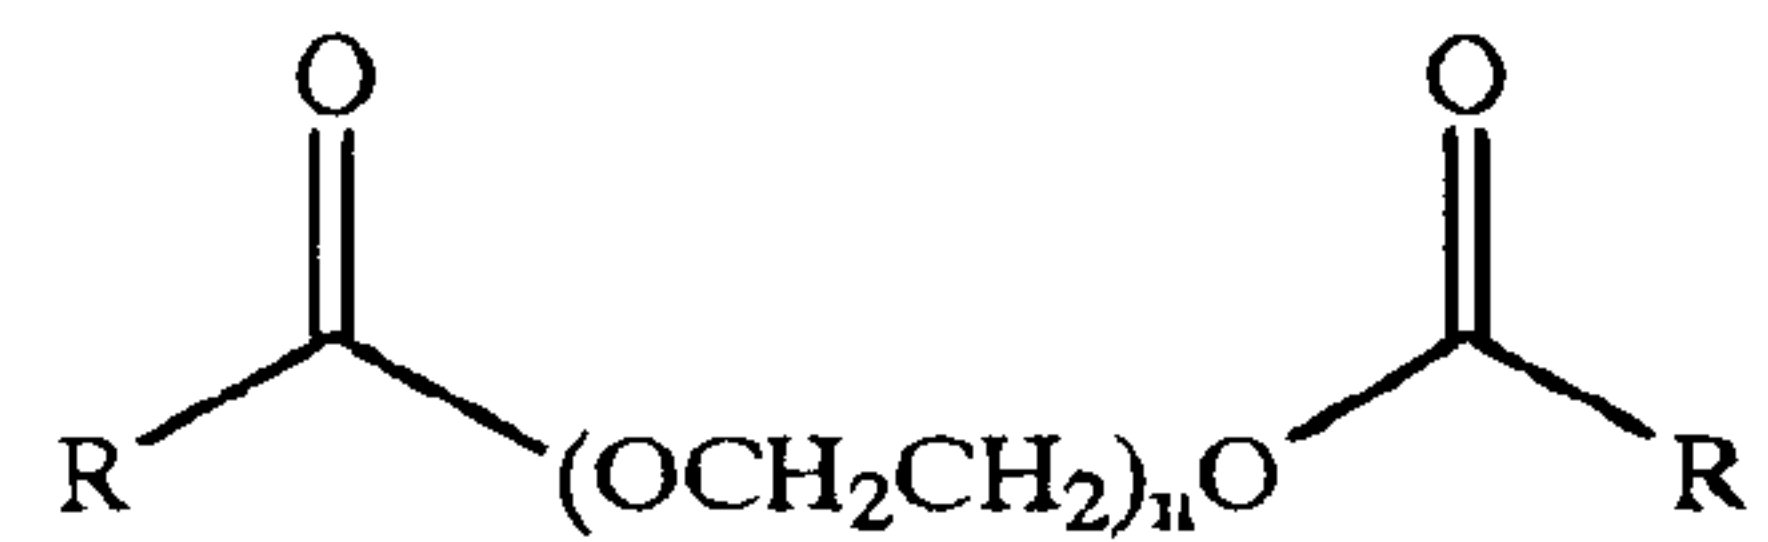

wherein each RCO is independently derived from fatty acids; and the value of n is from 15 to 40.

98. The method of claim 97, wherein said fatty acids are selected from the group consisting of stearic, palmitic, oleic, and lauric acid.