



- (51) **International Patent Classification:**
B22F 3/105 (2006.01) *B33Y 70/00* (2015.01)
- (21) **International Application Number:**
PCT/US2015/011061
- (22) **International Filing Date:**
12 January 2015 (12.01.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/931,325 24 January 2014 (24.01.2014) US
- (71) **Applicant:** UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).
- (72) **Inventors:** ZHANG, Yan; 200 Regan Road, Apt. 26C, Vernon, Connecticut 06066 (US). SCHMIDT, Wayde, R.; 7 Amberg Drive, Pomfret Center, Connecticut 06259 (US).
- (74) **Agents:** CRAGGS, Brian, T. et al.; 312 South Third Street, Minneapolis, Minnesota 55415 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) **Title:** NANOPARTICLE ENHANCEMENT FOR ADDITIVE MANUFACTURING

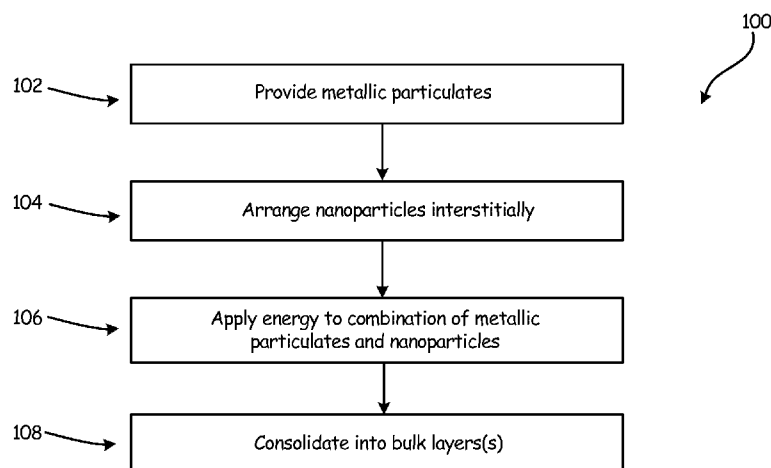


Fig. 2

(57) **Abstract:** A method for manufacturing a component includes providing a metallic first powder having a plurality of first particles with a first mean particle diameter. A second powder added to the first powder has a plurality of second particles with a second mean particle diameter less than the first mean particle diameter. Energy is applied to at least the second powder so as to selectively heat the second particles. The first powder is combined with the heated second powder to form a modified powder including modified powder particles. Modified powder particles have an interior portion containing an interior composition, and an outer surface portion with an outer composition different from the interior composition.

NANOPARTICLE ENHANCEMENT FOR ADDITIVE MANUFACTURING

BACKGROUND

The described subject matter relates generally to powder metallurgy, and more specifically to additive manufacturing employing metal powders.

Current approaches for additive manufacturing (AM) processes employing metal powders use the powder either as received, degassed (typically under vacuum or inert gas), or passivated (usually by surface oxidation). These parts produced by AM often suffer from distortion, porosity, and quality inconsistency, resulting in limited adoption and high process waste.

Iron nanoparticles have been used in a liquid binder to facilitate improved part quality in certain three-dimensional printing mechanisms, but this approach has not been demonstrated in other materials. The liquid phase binder is also counterproductive in creating metallic components using powder bed and direct spray apparatus utilizing laser or electron beams to consolidate materials. Thus the use of nanoparticles in powder bed and direct spray apparatus have been limited to the addition of metal or carbon nanoparticles to thermoplastics. These nanoparticle-containing thermoplastics would need to operate as models for wax molds in which metallic parts are only formed indirectly (e.g., via casting).

SUMMARY

A method for making a bulk material includes providing a plurality of metallic particulates and arranging a plurality of nanoparticles interstitially between adjacent ones of the plurality of metallic particulates. An energy beam is applied to the combination of metallic particulates and nanoparticles. The metallic particulates and the nanoparticles are consolidated into a first bulk layer.

A method for operating an additive manufacturing apparatus includes providing a plurality of first metallic particulates having a mean particle diameter of more than about 300 nm. A plurality of first nanoparticles are arranged interstitially between adjacent ones of the plurality of metallic particulates, the nanoparticles having a characteristic dimension of less than about 100 nm. The first metallic particulates and first nanoparticles are placed onto or proximate to a working surface of the additive manufacturing apparatus. An energy beam is directed selectively over the first metallic particulates and the first nanoparticles to form a first molten powder pool. At least a

portion of the first molten powder pool is solidified to form a build layer on a first deposition surface.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A schematically shows an example metallic powder being provided with an
5 interstitial alloy.

FIG. 1B schematically shows an example metallic powder being provided with an interstitial nanocomposite.

FIG. 2 is an example flow chart for forming layers of a bulk material.

FIG. 3 is an example additive manufacturing apparatus for making a bulk
10 material.

DETAILED DESCRIPTION

FIG. 1A shows provided metallic first particulates 12 of powder material 10. First particulates 12 have first mean diameter d_1 . Nanoparticles 16 of a supplemental nanomaterial 18 have a second mean diameter d_2 , in which d_2 is generally less than first
15 mean diameter d_1 . Nanoparticles 16 of supplemental nanomaterial 18 can have a different composition than first particulates 12 to provide enhanced heat transfer and bonding during consolidation of metallic powder material 10. This results in a higher quality part by forming one or more interstitial compositions.

First particulates 12 of powder material 10 are generally metallic and are intended
20 for use, for example, in an additive manufacturing process to form one or more layers of a bulk metallic, composite, or hybrid material. Due to the relatively large size and nonuniform shape of metallic first particulates 12, it may be difficult to consolidate them about irregular and spaced apart particulate outer portions 14.

To facilitate use of metallic particulates in additive manufacturing processes
25 utilizing a powder bed or direct spray, a plurality of metallic first particulates 12 can have a mean particle diameter of more than about 300 nm. In this way, the entirety of the particulates need not be heated and reheated with each pass of the energy beam(s) as described below. However, large metallic particulates can be irregularly shaped and sized, leaving large interstices 20 between particulates 12 and making it difficult to ensure
30 even heat flow between them. This is generally due to relatively low thermal conductivity of the inert interstitial atmosphere, and results in unpredictable shrinkage and porosity of the finished parts. Even when sufficient energy is provided and transmitted between particulates 12, interstices 20 are normally filled by molten material

from consolidation of particulates 12, contributing to substantial part shrinkage and/or porosity.

In response, at least a plurality of first nanoparticles 16 can be arranged interstitially between adjacent ones of the plurality of metallic particulates 12. To facilitate this, a mean characteristic or primary dimension of nanoparticles can be less than about 100 nm, depending on their configuration as described below. Then when an energy beam is applied to the combination of metallic first particulates 12 and nanoparticles 16 (see, e.g., FIGS. 2 and 3), they are consolidated into a first bulk layer with one or more interstitial compositions. Depending on the compositions of the particulates and nanoparticles, the interstitial composition will either be an interstitial alloy 24 (FIG. 1A) or an interstitial nanocomposite 36 (FIG. 1B)

Energy can be applied in various forms such as one or more laser beams or electron beams as discussed with respect to illustrative examples of FIGS. 2 and 3. Energy can be applied to at least some of metallic first particulates 12 and nanoparticles 16 so as to selectively heat these areas in and around nanomaterial 18, while leaving at least internal portions 22 of first particles 12 effectively unmelted. At least some of nanoparticles 16 can form interstitial alloy 24 with at least outer portions 14 of metallic first particulates 12. When alloyed with outer portion 14 of metallic particulates 12, nanoparticles 16 can thus generally introduce or beneficially modify a particular property to interstitial alloy 24 around first particulates 12. For example, nanoparticles 16 and/or interstitial alloy 24 can have a thermal conductivity value greater than a thermal conductivity value of first particulates 12.

In addition to first particulates 12 and first nanoparticles 16, optional second and subsequent particulates 26 of a second metallic material and/or optional second and subsequent nanoparticles 30 of a second nanomaterial can additionally and/or alternatively be employed as shown in FIG. 1A. This can provide, for example, a graded composition of either the metallic composition and/or the interstitial alloy.

FIG. 1B shows an alternative embodiment in which insoluble nanoparticles 32 of supplemental nanomaterial 34 are combined with metallic particulates 12. This combination can form interstitial nanocomposite 36 around remaining portions of metallic particulates 12. Instead of forming interstitial alloy(s) 24 as shown in FIG. 1A, insoluble nanoparticles 32 can instead be suspended interstitially in interstitial matrix 38 after one or more bulk manufacturing or consolidation processes.

A process for forming such an arrangement can be similar to that which is described with respect to FIG. 1A. In lieu of soluble nanoparticles 16, second supplemental nanomaterial 34 can include insoluble nanoparticles 32 disposed interstitially between first particulates 12 prior to application of the energy beam(s) (see, e.g., FIGS. 2 and 3). In certain embodiments, insoluble nanoparticles 32 can include various types of carbon nanoparticles and/or ceramic nanoparticles (or precursors thereof). The composition of a precursor will depend on the bulk material being formed and the selected process, as some additive processes require a solid binder and/or an alternative chemical form which will be converted by the additive process into the desired particulate or nanoparticle composition.

In certain alternative embodiments, nanoparticles 32 can additionally or alternatively include a metal which is partially or completely insoluble in interstitial matrix 38. It will be recognized that interstitial matrix 38 can have a similar or identical composition as compared to metallic particulates 12, depending on the presence of alloying nanoparticles 16 (shown in FIG. 1).

Similar to FIG. 1A, optional second or subsequent metallic particulates 26 and/or optional second or subsequent nanoparticles 42 can additionally and/or alternatively be employed as shown in FIG. 1B. As in the previous example, this can result in a graded composition of either the bulk metallic composition and/or interstitial composite 36.

Referring to both FIGS. 1A and 1B, there are multiple possible compositions of metallic particulates 12, 26, and/or nanoparticles 16, 32, 42. In certain embodiments, one or more of metallic particulates 12, 26 can include a respective first and/or second metallic material selected from a group consisting of: nickel, titanium, aluminum, and alloys thereof. Similarly, the composition of one or more of nanoparticles 16, 32, 42 can optionally include a metallic, ceramic, and/or carbon material.

FIG. 2 shows steps of method for making a bulk material from a metallic powder. Method 100 includes step 102 in which particulates of one or more metallic powders are provided, followed by step 104, where nanoparticles of one or more nanomaterials are added to the metallic powder(s) and arranged interstitially with the metallic particulates.

Generally speaking, a mean particle diameter of the first particles is greater than a mean particle diameter of the second particles to facilitate the combination of materials and to ensure that the bulk properties are not unduly compromised by the interstitial composition formed subsequently. In certain embodiments, the metallic particulates can have a mean diameter of more than about 300 nm, while the nanoparticles, additionally

and/or alternatively, can have a characteristic or primary dimension of less than about 100 nm. Since nanoparticles come in a variety of configurations other than generally spherical powder particles, the primary or characteristic dimension can be one such as the cross-sectional diameter of the nanotube or nanowire.

5 In step 106, energy is added to at least the second powder so as to selectively heat the second particles. As a result of this step, at least some of the second particles are converted into a partial or complete molten state so that they can help form one or more interstitial compositions (examples shown in FIGS. 1A and 1B). In certain embodiments, the second particles are actually precursor compositions, and break down into an alloying
10 element or a protective composition upon the application of sufficient energy.

 Nanoparticles can be selected to provide effective mixing and even coverage of the larger metallic particulates to form one or more interstitial composition(s) therebetween. For example, nanoparticles and/or interstitial composition(s) can have a thermal conductivity value greater than a thermal conductivity value of the metallic
15 particulates. Nanoparticle size, composition, and distribution can thus be selected with relative thermal conductivity so as to aid heat dissipation in laser- or electron-beam treated metal particle streams or powder beds (example apparatus shown in FIG. 3). Better heat flow control allows defect and distortion reduction, reaction and microstructure control, and denser parts.

20 In one example, the first powder can be a metallic material (or precursor) selected from a group consisting of: nickel, titanium, aluminum, and alloys thereof. Compositions of the nanoparticles can include a metallic nanomaterial with varying degrees of solubility in the composition(s) formed by molten portions of the metallic particulates. As noted above, in certain embodiments, a composition of a metallic nanomaterial can include an
25 alloying element (or precursor) which is compatible with and at least partially soluble in the first metallic material. This combination provides an interstitial alloy which can help facilitate deposition and/or bonding of the first powder as a bulk material, while ensuring that many of the resulting bulk material properties are maintained based on the substantially identical interior portion of the modified particles. To further minimize
30 effects on the bulk material, the alloying element can be selected to be inert to one or more properties of the bulk material in small concentrations.

 Additionally and/or alternatively, metallic nanoparticles can have limited or minimal solubility in the composition formed by the metallic particulates. At least some of the nanoparticles can include a carbon or ceramic nanomaterial which is selected from:

nanowire, nanotubes, graphene, and combinations thereof. A composition of the plurality of carbon or ceramic nanoparticles can have varying degrees of solubility in different metallic compositions such that a combination of molten portions of metallic particulates and the nanomaterial forms an interstitial nanocomposite with a reinforcement
5 nanostructure supported by a metallic matrix. Nonlimiting examples of ceramic nanomaterials include boron nitride, silicon carbide, and combinations thereof.

In one instance, step 108 includes consolidating the modified particles into one or more bulk layers. Generally, the modified particles can be disposed onto a working surface of an additive manufacturing apparatus or other platform. An illustrative example
10 of this process is shown with respect to FIG. 3.

FIG. 3 schematically illustrates operation of additive manufacturing apparatus 200 to form at least part of a bulk material, and in which metallic particulates are combined with nanoparticles to make a bulk material with at least one interstitial composition. FIG. 3 shows only one non-limiting example of a powder bed type additive manufacturing
15 process and apparatus, and is not meant to limit the described subject matter to a single process or machine. Embodiments of apparatus 200 can include various additive manufacturing processes utilizing a laser or electron beam, such as but not limited to, direct laser sintering (DLS) manufacturing, direct laser melting (DLM) manufacturing, selective laser sintering (SLS) manufacturing, selective laser melting (SLM)
20 manufacturing, laser engineering net shaping (LENS) manufacturing, electron beam melting (EBM) manufacturing, direct metal deposition (DMD) manufacturing, and others known in the art.

Build table 210 includes movable build platform 216, which can be any object which is capable of being mounted to additive manufacturing apparatus 200 for building
25 one or more near-net shape components. Powder delivery system 218 is capable of supplying successive quantities of metallic particulates or other powders to build platform 216. In this example, powder delivery system 218 includes powder compartment 220 with powder elevator platform 222 disposed proximate to, and movable opposite build platform 216. Build arrows 224 indicate that powder elevator platform 222 is movable in
30 a first vertical direction, and build platform 216 is movable in a second vertical direction opposite the first vertical direction. However, it will be appreciated that other powder supply arrangements can be used such as those where the metal powder is injected into an energy beam before it reaches the intended working surface (e.g., build platform 216).

FIG. 3 also shows a non-limiting example of energy beam apparatus 226 with beam generator 228 and outlet lens 230 adapted to steer energy beam 232 generally along beam path 234 toward build platform 216. This example is simplified for brevity, and it will therefore be understood that other more complex electron or laser beam configurations (e.g., steering mirrors, prisms, and/or multi-axis CNC systems) can be incorporated to operate other embodiments of energy beam apparatus 226.

FIG. 3 also shows powder bed build plate 236 disposed on build platform 216 to serve as a substantial portion of an initial working surface for build assembly 240. After applying energy to combined first powder and second powder materials 10, 18 with energy beam 232 solidifying at least a portion of the first molten powder pool to form a build layer on a first deposition surface. A plurality of successively deposited powder build layers are provided from powder supply 242 by recoater 244 to build assembly 240.

In the example shown in FIG. 3, operation of apparatus 200 can begin with providing metallic particulates 12 to a working surface (e.g., movable build platform 216) of additive manufacturing apparatus 200. Nanoparticles 16 can be added to the working surface as well via powder injector 223 or other suitable device for arranging nanoparticles 16 interstitially between metallic particulates 12 (best seen in FIGS. 1A and 1B).

During or after the arranging of nanoparticles (e.g., via agitation or simultaneous spraying), the first metallic particulates and first nanoparticles are placed onto or proximate a working surface of the additive manufacturing apparatus. In the example of FIG. 3, this can be done using recoater 244 or other suitable apparatus. However, it will be recognized that some of the above processes utilize direct powder spray in or around energy beam 232.

The combined powder is then energized by directing one or more energy beams selectively over the first metallic particulates and the first nanoparticles to form a first molten powder pool. Upon solidification of the pool, the particulates and nanoparticles are consolidated into one or more bulk layers having a metallic portion and an interstitial composition (alloy and/or nanocomposite) therebetween.

As noted with respect to FIGS. 1A and 2, at least some of the nanoparticles can form an alloy with at least an outer portion of the metallic particulates. Similarly, some or all of the nanoparticles can be supported by a metallic matrix in a nanocomposite formed with at least an outer portion of the metallic particulates. Thus a composition of the plurality of first metallic particulates can include a first metallic material selected

from a group consisting of: iron, nickel, titanium, aluminum, and alloys thereof. A composition of the nanoparticles can include a metallic nanomaterial, a carbon nanomaterial, and/or a ceramic nanomaterial. The carbon nanomaterial can be selected from: nanowire, nanotubes, graphene, and combinations thereof.

5 In certain embodiments, multiple types of metallic particulates and/or nanomaterials can be provided. The composition of each may be different, for example, to produce a graded metallic or nanocomposition in the bulk material.

Each build layer can be converted into successively formed component build layers according to a computer model, which can be stored in an STL memory file or
10 other electronic data file accessible by a controller (not shown) of additive manufacturing apparatus 200. Selective areas of each successive deposited layer can be sintered or otherwise adhered to the preceding layer by energy beam 232. After each successive layer, recoater 244 is returned to a starting position near elevator platform 222, while supply piston 246 advances upward to expose another layer from powder supply 242,
15 while build platform 216 indexes down by approximately one layer thickness. Generally, each successive iteration of first and second deposition surface(s) includes at least a portion of a preceding build layer 250. There may be some overhang and discontinuities, depending on the final build requirements and the capabilities of the build apparatus. The process is repeated until build assembly 240 is complete with one or more near-net shape
20 components built in a layerwise manner. Thus by iteratively performing the above described steps, a plurality of build layers can be formed. As a result, a deposition surface can be a subsequent deposition surface including at least one previously solidified build layer.

Discussion of Possible Embodiments

25 The following are non-exclusive descriptions of possible embodiments of the present invention.

A method for making a bulk material includes providing a plurality of metallic particulates and arranging a plurality of nanoparticles interstitially between adjacent ones of the plurality of metallic particulates. An energy beam is applied to the combination of
30 metallic particulates and nanoparticles. The metallic particulates and the nanoparticles are consolidated into a first bulk layer.

The method of the preceding paragraph can optionally include, additionally and/or alternatively, any one or more of the following features, configurations and/or additional components:

A method for making a bulk material according to an exemplary embodiment of this disclosure, among other possible things includes providing a plurality of metallic particulates; arranging a plurality of nanoparticles interstitially between adjacent ones of the plurality of metallic particulates; applying an energy beam to the combination of
5 metallic particulates and nanoparticles; and consolidating the metallic particulates and the nanoparticles into a first bulk layer.

A further embodiment of the foregoing method, wherein at least some of the nanoparticles form an alloy with at least an outer portion of the metallic particulates.

A further embodiment of any of the foregoing methods, wherein a composition of
10 the plurality of metallic particulates comprises a first metallic material selected from a group consisting of: iron, nickel, titanium, aluminum, and alloys thereof.

A further embodiment of any of the foregoing methods, wherein the composition of the plurality of metallic particulates comprises a second metallic material different from a first metallic material.

15 A further embodiment of any of the foregoing methods, wherein a composition of the plurality of nanoparticles comprises a metallic nanomaterial.

A further embodiment of any of the foregoing methods, wherein the composition of the metallic nanomaterial includes an alloying element which is at least partially soluble in the first metallic material.

20 A further embodiment of any of the foregoing methods, wherein a composition of the plurality of nanoparticles comprises a carbon nanomaterial.

A further embodiment of any of the foregoing methods, wherein the carbon nanomaterial is selected from: nanowire, nanotubes, graphene, and combinations thereof.

A further embodiment of any of the foregoing methods, wherein a composition of
25 the plurality of nanoparticles comprises a ceramic nanomaterial.

A further embodiment of any of the foregoing methods, wherein the combination of the metallic particulates and the ceramic nanomaterial forms a nanocomposite with a ceramic reinforcement nanostructure supported by a metallic matrix.

A further embodiment of any of the foregoing methods, wherein the metallic
30 particulate material has a first thermal conductivity and the nanoparticles have a second thermal conductivity different from the first thermal conductivity.

A further embodiment of any of the foregoing methods, wherein the metallic particulates have a mean particle diameter of more than about 300 nm, and the nanoparticles have a characteristic dimension of less than about 100 nm.

A method for operating an additive manufacturing apparatus includes providing a plurality of first metallic particulates having a mean particle diameter of more than about 300 nm. A plurality of first nanoparticles are arranged interstitially between adjacent ones of the plurality of metallic particulates, the nanoparticles having a characteristic dimension of less than about 100 nm. The first metallic particulates and first nanoparticles are placed onto or proximate to a working surface of the additive manufacturing apparatus. An energy beam is directed selectively over the first metallic particulates and the first nanoparticles to form a first molten powder pool. At least a portion of the first molten powder pool is solidified to form a build layer on a first deposition surface.

The method of the preceding paragraph can optionally include, additionally and/or alternatively, any one or more of the following features, configurations and/or additional components:

A method for operating an additive manufacturing apparatus manufacturing a component according to an exemplary embodiment of this disclosure, among other possible things includes (a) providing a plurality of first metallic particulates having a mean particle diameter of more than about 300 nm; (b) arranging a plurality of first nanoparticles interstitially between adjacent ones of the plurality of metallic particulates, the nanoparticles having a characteristic dimension of less than about 100 nm; (c) placing the first metallic particulates and first nanoparticles onto or proximate to a deposition surface of the additive manufacturing apparatus; (d) directing an energy beam selectively over the first metallic particulates and the first nanoparticles to form a first molten powder pool; (e) solidifying at least a portion of the first molten powder pool to form a build layer on the deposition surface.

A further embodiment of the foregoing method, wherein the deposition surface is a subsequent deposition surface comprising at least one previously solidified build layer.

A further embodiment of any of the foregoing methods, further comprising: iteratively performing steps (a)–(e) to form a plurality of build layers.

A further embodiment of any of the foregoing methods, wherein at least some of the first nanoparticles form an alloy with at least an outer portion of the first metallic particulates.

A further embodiment of any of the foregoing methods, wherein a composition of the plurality of first metallic particulates comprises a first metallic material selected from a group consisting of: iron, nickel, titanium, aluminum, and alloys thereof.

A further embodiment of any of the foregoing methods, further comprising: providing a plurality of second metallic particulates having a mean particle diameter of more than about 300 nm; wherein a composition of the plurality of second metallic particulates comprises a second metallic material different from the first metallic material.

5 A further embodiment of any of the foregoing methods, wherein a composition of the first nanoparticles comprises at least one of: a metallic nanomaterial, a carbon nanomaterial, and a ceramic nanomaterial.

A further embodiment of any of the foregoing methods, wherein the carbon nanomaterial is selected from: nanowire, nanotubes, graphene, and combinations thereof.

10 A further embodiment of any of the foregoing methods, wherein the combination of the metallic particulates and the first nanoparticles forms a nanocomposite with a reinforcement nanostructure supported by a metallic matrix.

A further embodiment of any of the foregoing methods, further comprising: providing a plurality of second nanoparticles having a characteristic dimension of less
15 than about 100 nm; wherein a composition of the plurality of second nanoparticles comprises a second nanomaterial different from the first nanomaterial.

Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

20

CLAIMS:

1. A method for making a bulk material, the method comprising:
providing a plurality of metallic particulates;
arranging a plurality of nanoparticles interstitially between adjacent ones of the
5 plurality of metallic particulates;
applying an energy beam to the combination of metallic particulates and
nanoparticles; and
consolidating the metallic particulates and the nanoparticles into a first bulk layer.
2. The method of claim 1, wherein at least some of the nanoparticles form an alloy
10 with at least an outer portion of the metallic particulates.
3. The method of claim 1, wherein a composition of the plurality of metallic
particulates comprises a first metallic material selected from a group consisting of: iron,
nickel, titanium, aluminum, and alloys thereof.
4. The method of claim 1, wherein the composition of the plurality of metallic
15 particulates comprises a second metallic material different from a first metallic material.
5. The method of claim 1, wherein a composition of the plurality of nanoparticles
comprises a metallic nanomaterial.
6. The method of claim 5, wherein the composition of the metallic nanomaterial
includes an alloying element which is at least partially soluble in the first metallic
20 material.
7. The method of claim 1, wherein a composition of the plurality of nanoparticles
comprises a carbon nanomaterial.
8. The method of claim 7, wherein the carbon nanomaterial is selected from:
nanowire, nanotubes, graphene, and combinations thereof.
- 25 9. The method of claim 1, wherein a composition of the plurality of nanoparticles
comprises a ceramic nanomaterial.
10. The method of claim 9, wherein the combination of the metallic particulates and
the ceramic nanomaterial forms a nanocomposite with a ceramic reinforcement
nanostructure supported by a metallic matrix.
- 30 11. The method of claim 1, wherein the metallic particulate material has a first
thermal conductivity and the nanoparticles have a second thermal conductivity different
from the first thermal conductivity.

12. The method of claim 1, wherein the metallic particulates have a mean particle diameter of more than about 300 nm, and the nanoparticles have a characteristic dimension of less than about 100 nm.

13. A method for operating an additive manufacturing apparatus, the method
5 comprising:

- (a) providing a plurality of first metallic particulates having a mean particle diameter of more than about 300 nm;
- (b) arranging a plurality of first nanoparticles interstitially between adjacent
10 ones of the plurality of metallic particulates, the nanoparticles having a characteristic dimension of less than about 100 nm;
- (c) placing the first metallic particulates and first nanoparticles onto or proximate to a deposition surface of the additive manufacturing apparatus;
- (d) directing an energy beam selectively over the first metallic particulates and the first nanoparticles to form a first molten powder pool;
- 15 (e) solidifying at least a portion of the first molten powder pool to form a build layer on the deposition surface.

14. The method of claim 13, wherein the deposition surface is a subsequent deposition surface comprising at least one previously solidified build layer.

15. The method of claim 13, further comprising:
20 iteratively performing steps (a)–(e) to form a plurality of build layers.

16. The method of claim 13, wherein at least some of the first nanoparticles form an alloy with at least an outer portion of the first metallic particulates.

17. The method of claim 13, wherein a composition of the plurality of first metallic particulates comprises a first metallic material selected from a group consisting of: iron,
25 nickel, titanium, aluminum, and alloys thereof.

18. The method of claim 13, further comprising:
providing a plurality of second metallic particulates having a mean particle diameter of more than about 300 nm;
wherein a composition of the plurality of second metallic particulates comprises a
30 second metallic material different from the first metallic material.

19. The method of claim 13, wherein a composition of the first nanoparticles comprises at least one of: a metallic nanomaterial, a carbon nanomaterial, and a ceramic nanomaterial.

20. The method of claim 20, wherein the carbon nanomaterial is selected from: nanowire, nanotubes, graphene, and combinations thereof.

21. The method of claim 19, wherein the combination of the metallic particulates and the first nanoparticles forms a nanocomposite with a reinforcement nanostructure supported by a metallic matrix.

22. The method of claim 13, further comprising:
providing a plurality of second nanoparticles having a characteristic dimension of less than about 100 nm;
wherein a composition of the plurality of second nanoparticles comprises a second nanomaterial different from the first nanomaterial.

1/4

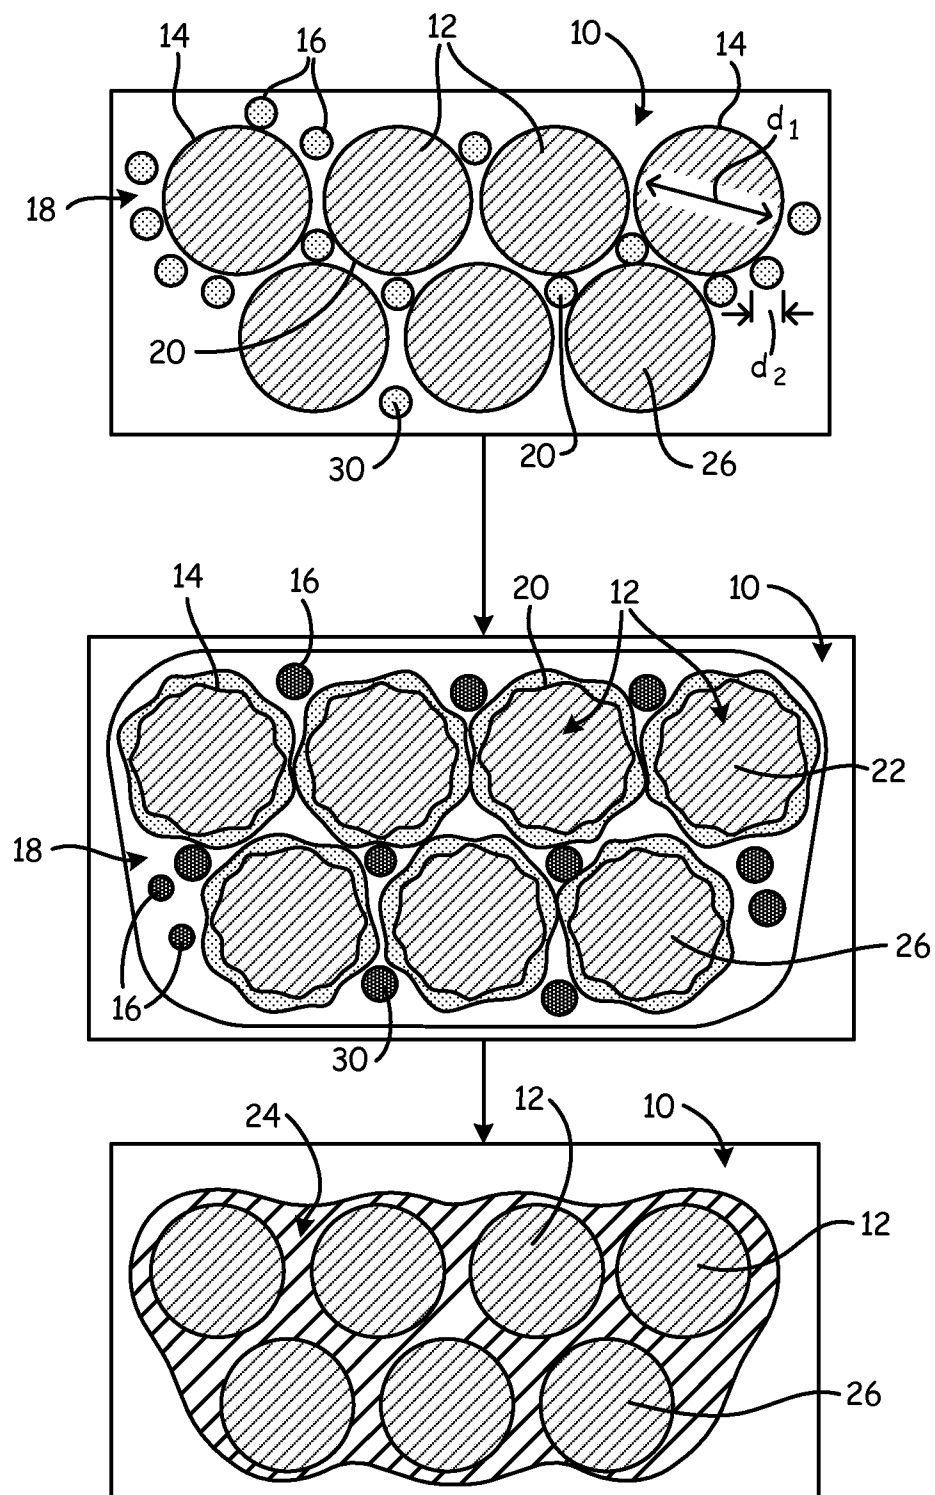


Fig. 1A

2/4

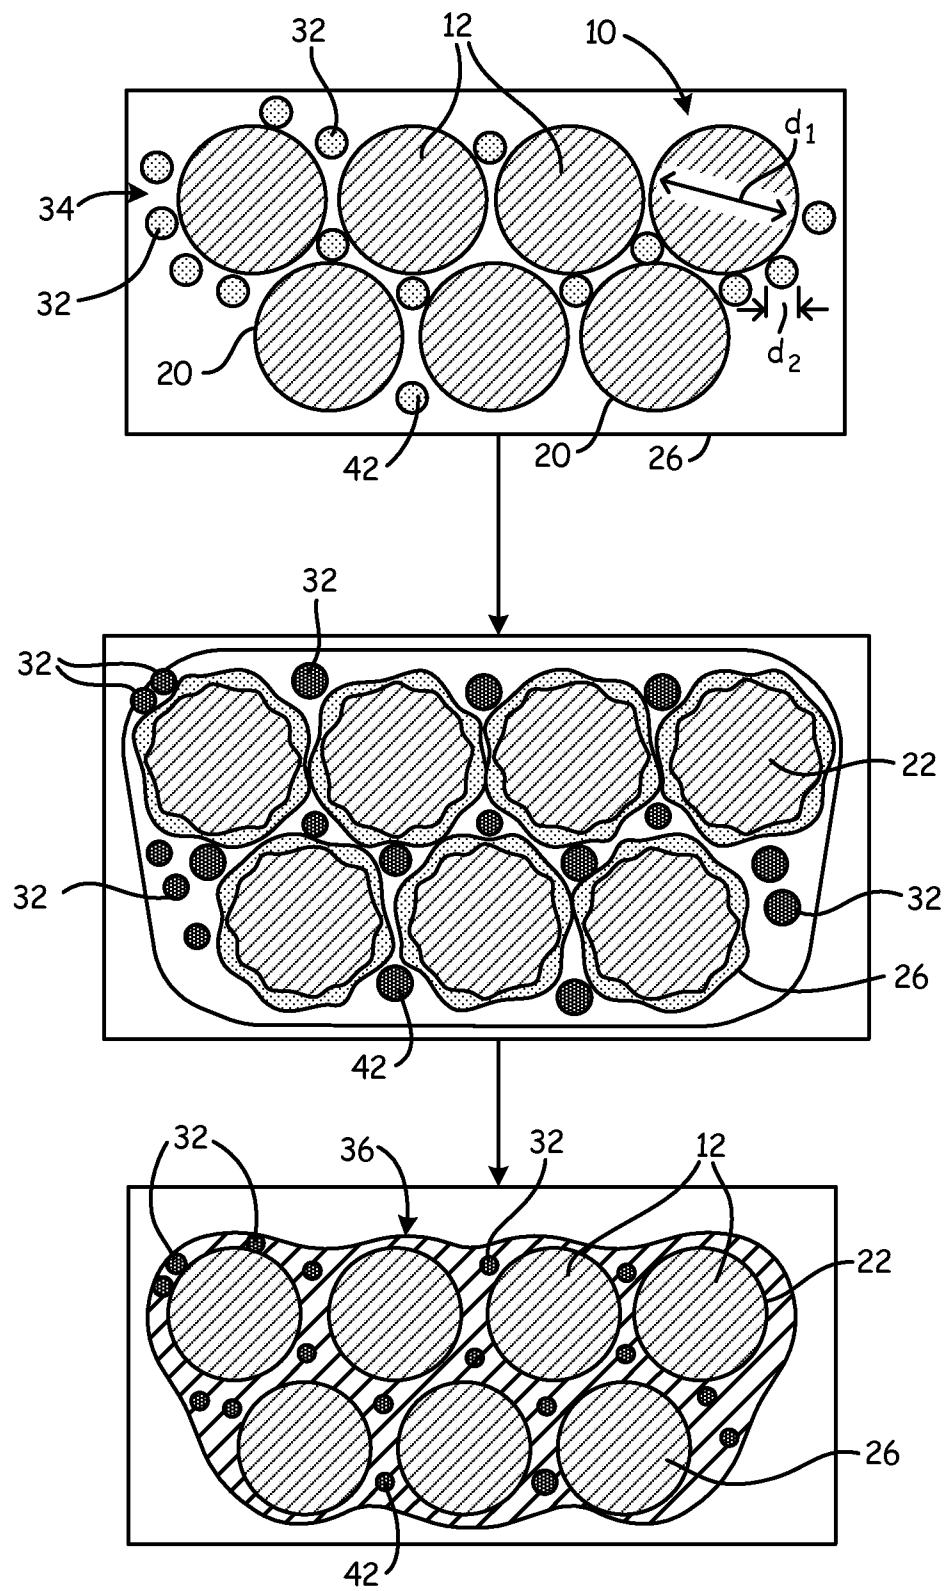


Fig. 1B

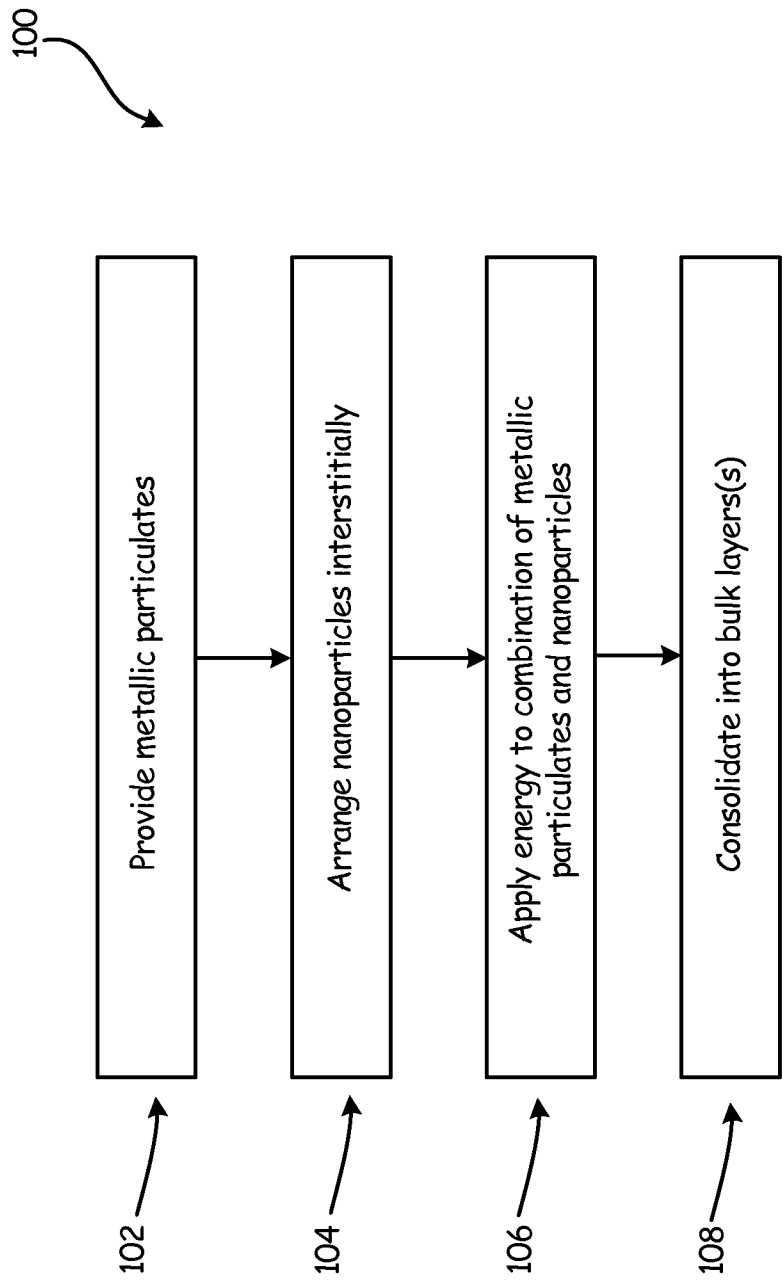


Fig. 2

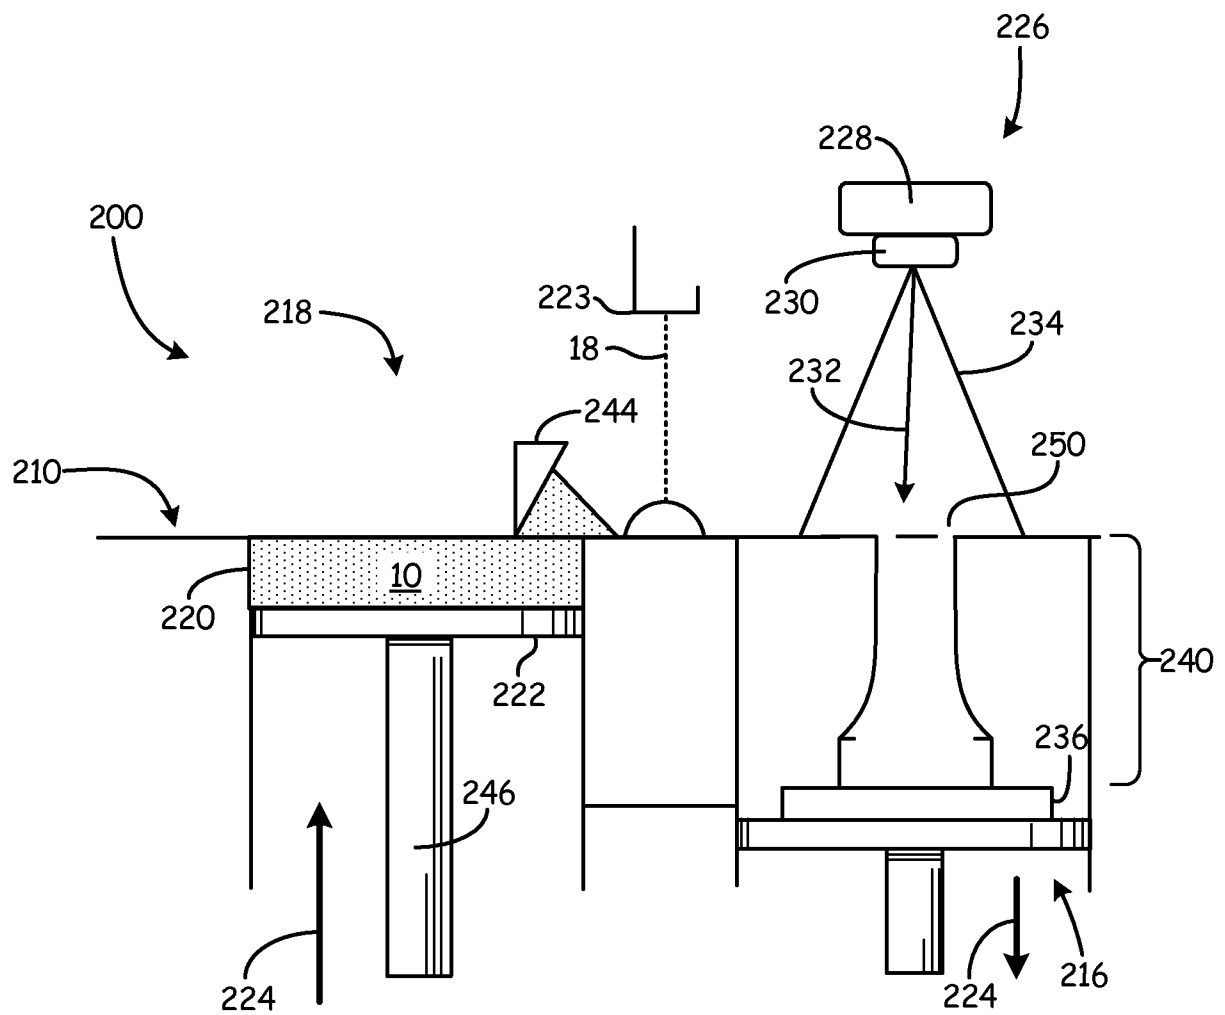


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/011061**A. CLASSIFICATION OF SUBJECT MATTER****B22F 3/105(2006.01)i, B33Y 70/00(2015.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B22F 3/105; B22F 7/02; E21B 10/36; B22F 3/12; B22D 19/14; B29C 35/04; B29C 67/04; B33Y 70/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: interstitial alloy, interstitial composite, nanoparticle, enhancement, powder, nanotube, carbon, and ceramic

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007-0290409 A1 (BRICE et al.) 20 December 2007 See paragraphs [0034]-[0039], [0058]-[0082]; claims 16-17, 22, 35, 40, and figures 5-6.	1,3-4,7-15,17-22
Y		2,5-6,16
Y	US 2005-0276715 A1 (VOICE, WAYNE E.) 15 December 2005 See paragraphs [0039]-[0044]; and claims 1, 10.	2,5-6,16
A	CN 103521768 A (BEIHANG UNIVERSITY) 22 January 2014 See abstract; and claims 1-3.	1-22
A	US 2008-0069716 A1 (CHELLURI et al.) 20 March 2008 See abstract; paragraphs [0015]-[0022]; and claims 1-4, 20, 23.	1-22
A	US 2012-0085585 A1 (SCOTT et al.) 12 April 2012 See paragraphs [0020]-[0029]; and claims 1-4.	1-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 April 2015 (16.04.2015)

Date of mailing of the international search report

17 April 2015 (17.04.2015)

Name and mailing address of the ISA/KR


International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 7140

Authorized officer

HAN, Joong Sub

Telephone No. +82-42-481-5606



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/011061

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0290409 A1	20/12/2007	AU 2002-41783 A1 AU 4178302 A CA 2424141 A1 EP 1332109 A2 KR 10-2003-0072351 A US 2002-0053257 A1 US 6949216 B2 US 7758776 B2 WO 02-042204 A3 WO 02-42204 A2	03/06/2002 03/06/2002 30/05/2002 06/08/2003 13/09/2003 09/05/2002 27/09/2005 20/07/2010 16/01/2003 30/05/2002
US 2005-0276715 A1	15/12/2005	DE 602005000580 D1 DE 602005000580 T2 EP 1604760 A1 EP 1604760 B1 GB 0413135 D0	05/04/2007 21/06/2007 14/12/2005 21/02/2007 14/07/2004
CN 103521768 A	22/01/2014	None	
US 2008-0069716 A1	20/03/2008	US 8889065 B2 WO 2008-034042 A2 WO 2008-034042 A3	18/11/2014 20/03/2008 22/05/2008
US 2012-0085585 A1	12/04/2012	CA 2813943 A1 CN 103210171 A EP 2625368 A2 MX 2013003900 A SG 189306 A1 WO 2012-048025 A2 WO 2012-048025 A3	12/04/2012 17/07/2013 14/08/2013 02/12/2013 31/05/2013 12/04/2012 02/08/2012