



(86) Date de dépôt PCT/PCT Filing Date: 2004/11/14
(87) Date publication PCT/PCT Publication Date: 2005/06/09
(45) Date de délivrance/Issue Date: 2007/11/13
(85) Entrée phase nationale/National Entry: 2006/02/28
(86) N° demande PCT/PCT Application No.: EP 2004/012911
(87) N° publication PCT/PCT Publication No.: 2005/051840
(30) Priorité/Priority: 2003/11/14 (DE103 53 266.8)


(51) Cl.Int./Int.Cl. *C01B 25/45* (2006.01),
C01D 15/00 (2006.01), *C01G 49/00* (2006.01),
H01M 4/02 (2006.01), *H01M 4/58* (2006.01)

(72) Inventeurs/Inventors:
NUSPL, GERHARD, DE;
WIMMER, LUCIA, DE;
EISGRUBER, MAX, DE

(73) Propriétaire/Owner:
SUED-CHEMIE AG, DE

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : LITHIUM-METAL-PHOSPHATE, PROCEDES DE REALISATION ASSOCIES ET UTILISATION COMME
MATIERE D'ELECTRODE
(54) Title: LITHIUM METAL PHOSPHATES, METHOD FOR PRODUCING THE SAME AND USE THEREOF AS
ELECTRODE MATERIAL

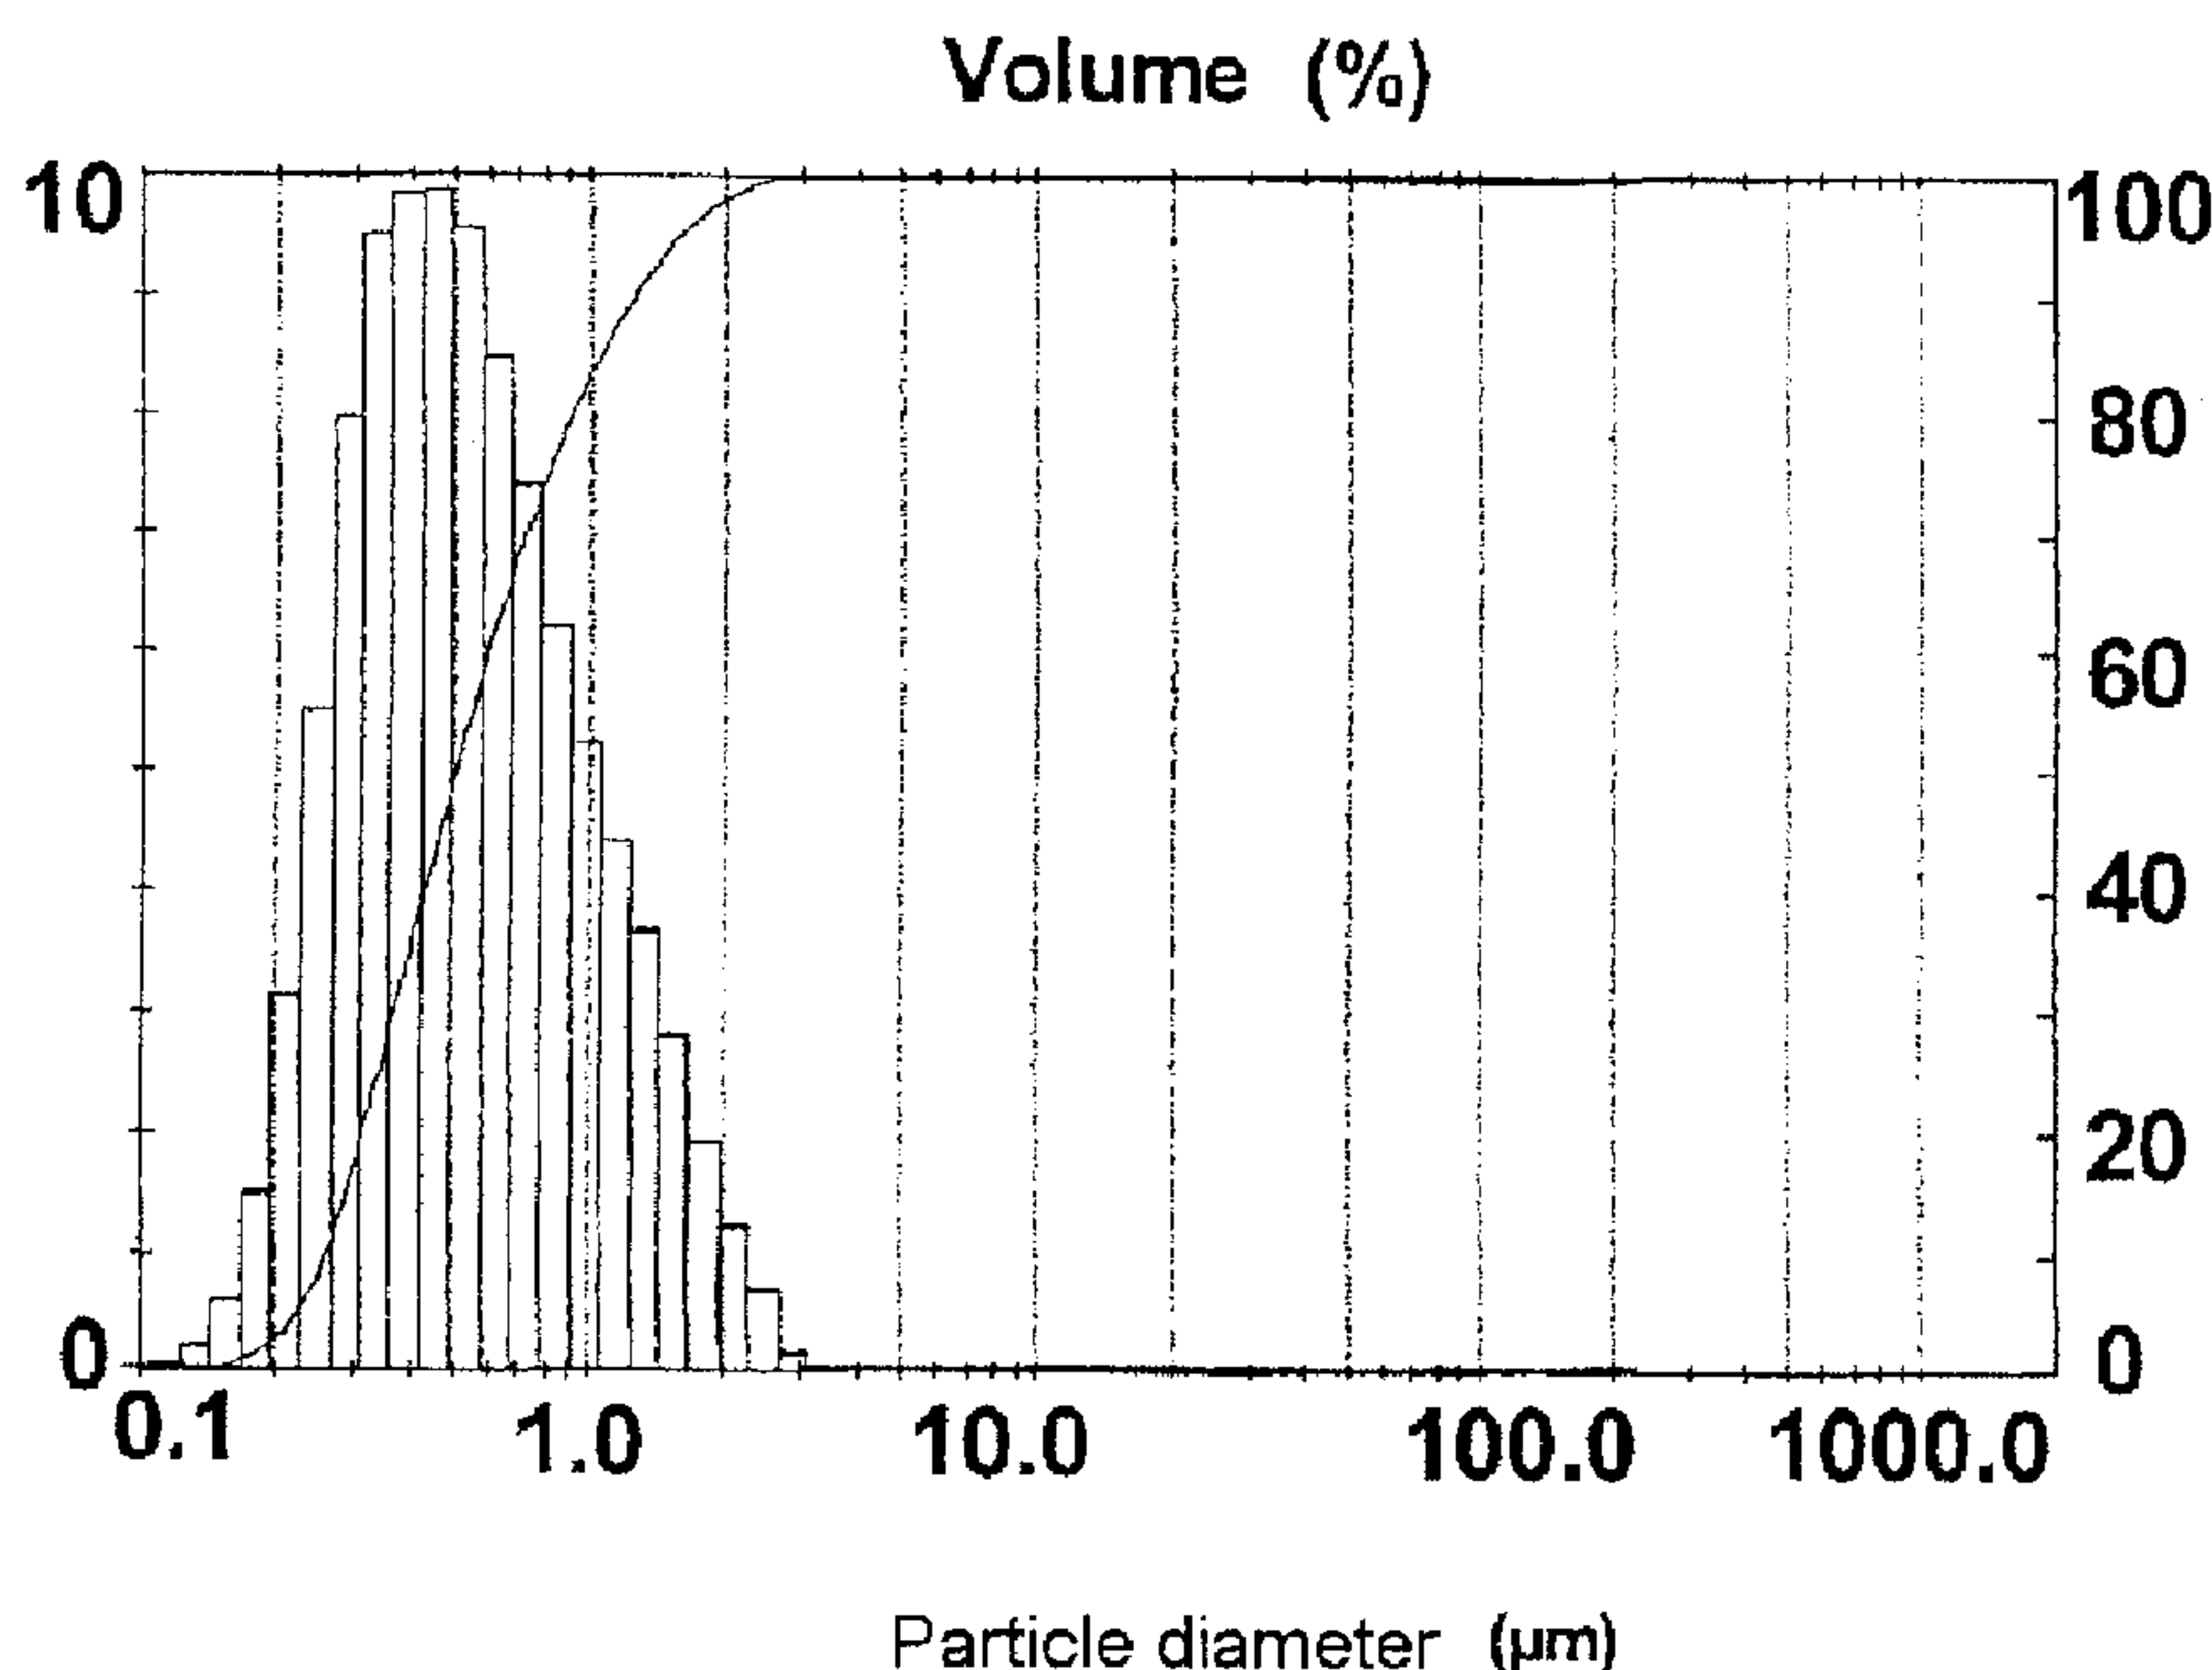

(57) **Abrégé/Abstract:**

The invention describes a process for producing a compound of the formula LiMPO_4 , in which M represents at least one metal from the first transition series, comprising the following steps: a) production of a precursor mixture, containing at least one Li^+ source, at least one M^{2+} source and at least one PO_4^{3-} source, in order to form a precipitate and thereby to produce a precursor suspension; b) dispersing or milling treatment of the precursor mixture and/or the precursor suspension until the D90 value of the particles in the precursor suspension is less than 50 µm; and c) the obtaining of LiMPO_4 from the precursor suspension obtained in accordance with b), preferably by reaction under hydrothermal conditions. The material obtainable by this process has particularly advantageous particle size distributions and electrochemical properties when used in electrodes.

Abstract

The invention describes a process for producing a compound of the formula LiMPO_4 , in which M represents at least one metal from the first transition series, comprising the following steps: a) production of a precursor mixture, containing at least one Li^+ source, at least one M^{2+} source and at least one PO_4^{3-} source, in order to form a precipitate and thereby to produce a precursor suspension; b) dispersing or milling treatment of the precursor mixture and/or the precursor suspension until the D90 value of the particles in the precursor suspension is less than $50\text{ }\mu\text{m}$; and c) the obtaining of LiMPO_4 from the precursor suspension obtained in accordance with b), preferably by reaction under hydrothermal conditions. The material obtainable by this process has particularly advantageous particle size distributions and electrochemical properties when used in electrodes.

PATENT APPLICATION

5 LITHIUM METAL PHOSPHATES, METHOD FOR PRODUCING THE SAME AND
USE THEREOF AS ELECTRODE MATERIAL

Description

10 The present invention relates to a process for producing lithium iron phosphate, to the material obtainable by this process having a very small particle size and a narrow particle size distribution, and to its use in particular in a secondary battery.

15 The use of synthetic lithium iron phosphate (LiFePO_4) as an alternative cathode material in lithium ion batteries is known from the prior art. This was described for the first time in A.K. Padhi,
20 K.S. Nanjundaswamy, J.B. Goodenough, J. Electrochem. Soc. Vol. 144 (1977) and is also disclosed, for example, in US 5,910,382.

The use of phosphates, such as lithium iron phosphate,
25 as positive electrode for secondary lithium batteries is also described in WO 02/099913 A1, in which, to produce from an equimolar aqueous solution of Li^+ , Fe^{3+} and PO_4^{3-} , the water is evaporated so as to produce a solids mixture, after which the solids mixture is
30 decomposed at a temperature below 500°C in order to produce a pure Li and Fe phosphate precursor, and an LiFePO_4 powder is then obtained by reacting the precursor at a temperature of below 800°C in a reducing atmosphere.

35 Other sintering processes, as they are known, are known from the prior art. Drawbacks include firstly the high materials costs of the starting chemicals (e.g. iron oxalate). The consumption of protective gas during the

- 2 -

sintering process is also considerable, and toxic by-products, such as CO, are formed during sintering. It has also been discovered that the particle size distribution of the product is often very wide and bimodal. Further production processes are known, for example, from WO 02/083555, EP 1 094 523 A1, US 2003/0124423 and Franger et al., Journal of Power Sources 119-121 (2003), pp. 252 - 257.

JP 2002-151082 A also describes lithium iron phosphate, processes for producing it and a secondary battery which uses it. The process for producing lithium iron phosphate is characterized in that a lithium compound, a divalent iron compound and a phosphoric acid compound are mixed with one another in such a way that at least the molar ratio of the divalent iron ions and the phosphoric acid ions is approximately 1:1, and the mixture is made to react in a temperature range from at least 100°C up to at most 200°C in a tightly closed vessel with the addition of a polar solvent and an inactive gas. The lithium iron phosphate obtained in this way can then be physically comminuted.

Although usable lithium iron phosphate can already be obtained using the processes according to the prior art, the conventional production processes nevertheless have the drawback that it is not possible to obtain pulverulent lithium iron phosphate with a very small particle size and a very narrow particle size distribution.

Therefore, there is a considerable demand for suitable processes for producing a lithium iron phosphate with a very small particle size and a very narrow particle size distribution which can be successfully incorporated into the electrode material of a secondary battery, where it has very good electrochemical properties.

The present invention provides a process for producing lithium iron phosphate which avoids or at least mitigates the drawbacks of the prior art and in particular provides material which is especially suitable for electrodes of rechargeable batteries.

In a process aspect, the invention provides a process for producing a compound of the formula LiMPO_4 , in which M^{2+} represents at least one metal from the first transition series, comprising the following steps: (a) production of a precursor mixture, containing at least one Li^+ source, at least one M^{2+} source and at least one PO_4^{3-} source, in order to form a precipitate and thereby to produce a precursor suspension; (b) dispersing or milling treatment of the precursor mixture and/or the precursor suspension until the D90 value of the particles in the precursor suspension is less than $50\text{ }\mu\text{m}$; (c) obtaining the LiMPO_4 from the precursor suspension obtained in step (b). Suitably, step (c) is carried out under hydrothermal conditions. Preferably the D90 value of the particles in the suspension is at most $25\text{ }\mu\text{m}$. Preferably, M^{2+} at least comprises Fe^{2+} or consists of Fe^{2+} , e.g., M^{2+} comprises one or more of Fe^{2+} , Mn^{2+} , Co^{2+} and Ni^{2+} . Suitably, the LiMPO_4 is obtained in pure-phase form. Suitably, the dispersing or milling treatment is used before or during the precipitation of the precursor mixture and is continued until the precipitation has concluded. The dispersing treatment may be used before the precipitation of the precursor mixture, in order to ensure a high level of crystal nucleation and to prevent the formation of large crystals and crystal agglomerates. Suitably, no evaporation occurs prior to the reaction of the precursor mixture or suspension under the hydrothermal conditions and no sintering takes place prior to the reaction of the precursor mixture or suspension under

the hydrothermal conditions. Suitably, the LiMPO_4 is dried following the reaction under the hydrothermal conditions. Suitably, the production of the precursor mixture or suspension or the conversion under the hydrothermal conditions takes place in the presence of at least one further component comprising a carbon-containing or electron-conducting substance or a precursor of an electron-conducting substance. The electron-conducting substance may be carbon, or the precursor of the electron-conducting substance may be the carbon-containing substance. Suitably: the at least one of Li^+ source used may be LiOH or Li_2CO_3 , the Fe^{2+} source used may be a Fe^{2+} salt or an organyl salt of iron, and the at least one of PO_4^{3-} source used may be phosphoric acid, a metal phosphate, hydrogen phosphate or dihydrogen phosphate. Water may be used as a solvent in the precursor mixture. Suitably, the at least one of Li^+ source and the at least one of M^{2+} source may be used in the form of aqueous solutions, and the at least one of PO_4^{3-} source may be used in the form of a liquid or an aqueous solution. Suitably, the precipitate formed in the precursor suspension comprises at least one precursor of LiMPO_4 , and the reaction to form LiMPO_4 then takes place under the hydrothermal conditions. A temperature of between 100 and 250°C , and a pressure of from 1 bar to 40 bar may be used under the hydrothermal conditions. The components of the precursor mixture may be present in the following stoichiometric ratio:

(i) $1 \text{ mole } \text{M}^{2+} : 1 \text{ mole } \text{PO}_4^{3-} : 1 \text{ mole } \text{Li}^+ (1:1:1)$

(ii) $1 \text{ mole } \text{M}^{2+} : 1 \text{ mole } \text{PO}_4^{3-} : 3 \text{ mole } \text{Li}^+ (1:1:3)$

(iii) any mixing ratio between (i) and (ii).

Suitably, the combining or reaction of the precursor mixture or suspension under the hydrothermal conditions takes place

under an inert gas atmosphere. Suitably, first, in an aqueous solvent, the at least one of M^{2+} source and the at least one of PO_4^{3-} source may be mixed then the at least one of Li^+ source may be added, and then the reaction under the hydrothermal conditions may be carried out. The dispersing or milling treatment may be a treatment with a dispersing means selected from the group consisting of Ultraturrax™, a mill, a colloid mill, a Manton-Gaulin mill, an intensive mixer, a centrifugal pump, an in-line mixture, mixing nozzles, injector nozzles and an ultrasound appliance. A stirring mechanism may be used for a high-shearing treatment in accordance with step (b) with the introduction of power, P , calculated according to the formula $P = 2\pi nM$, wherein M represents the torque and n represents the rotational speed, being at least 5 kW/m³. Suitably, the at least one further component may be used as a crystallization nucleus in the precipitation or reaction of the precursor mixture. The $LiMPO_4$, after the hydrothermal treatment, may be separated off, dried and optionally deagglomerated. Suitably, at least one carbon precursor material may be mixed with the $LiMPO_4$ obtained from the hydrothermal treatment and may be subjected to a pyrolysis process, and wherein water is optionally added. The at least one of the carbon precursor material may be added to a moist $LiMPO_4$ filter cake obtained by separation after the hydrothermal treatment, the mixture of $LiMPO_4$ and carbon precursor material may be dried and heated to a temperature between 500°C and 1000°C, during which operation the carbon precursor material is pyrolyzed to form carbon. The pyrolysis may be followed by a milling or deagglomeration treatment. The drying may be carried out under a protective gas, in air or in vacuo at a temperature of from 50°C to 200°C, and the pyrolysis may be carried out under the protective gas.

In a product aspect, the invention provides LiMPO_4 having a mean particle size, D50 value, which may be less than $0.8\ \mu\text{m}$, wherein M is as defined above. Preferably, the D50 value may be less than $0.5\ \mu\text{m}$. The D10 value of the
5 particles may be less than $0.4\ \mu\text{m}$, and the D90 value may be less than $3.0\ \mu\text{m}$. Preferably, the D10 value may be less than $0.35\ \mu\text{m}$, and the D90 value may be less than $2.0\ \mu\text{m}$. The difference between the D90 value and the D10 value of the particles may be less than $2\ \mu\text{m}$ and preferably less than
10 $0.5\ \mu\text{m}$. The BET surface area may be more than $3.5\ \text{m}^2/\text{g}$ and preferably more than $15\ \text{m}^2/\text{g}$.

In a use aspect, the invention provides use of the above LiMPO_4 as an electrode material.

15 The process according to the invention can be used not only to produce LiFePO_4 but also to produce other compounds of the general empirical formula LiMPO_4 , in which M represents at least one metal from the first transition series. In general, M is selected from at least one metal belonging to the group consisting of
20 Fe, Sc, Ti, V, Cr, Mn, Co, Ni, Cu, Zn, Be, Mg, Ca, Sr, Ba, Al, Zr and La. M is particularly preferably selected from Fe, Mn, Co and/or Ni. Preferably,
25 however, M comprises at least Fe.

It is also possible for M to stand for two or more transition metals in the compound LiMPO_4 ; by way of example, the iron in LiFePO_4 may be partially replaced
30 by one or more other metals selected from the above group, e.g. by Zn. LiFePO_4 is particularly preferred. The process according to the invention preferably gives LiMPO_4 in pure-phase form.

35 Therefore, according to the invention it has surprisingly been discovered that a very narrow particle size distribution and a very small particle size of the end product, LiMPO_4 , can be achieved in a process for producing LiMPO_4 by an intensive dispersing or milling treatment of a precursor mixture or suspension containing at least one Li^+ source, at least one M^{2+} source and at least one PO_4^{3-} source.

The use according to the invention of the dispersing or milling treatment of the precursor mixture results in intensive mixing and, at the same time, deagglomeration or a reduction in the size of the particle aggregates in the suspension. This is not achieved by conventional stirring at a low speed.

Any apparatus which appears suitable to the person skilled in the art and allows sufficient shearing forces or turbulence to be generated to achieve intensive mixing and, at the same time, deagglomeration or a reduction in the size of the particle aggregates in the suspension, resulting in a D90 value of less than 50 μm , can be used to carry out the dispersing or milling treatment according to the invention. Preferred apparatuses comprise dispersing means (with or without pump rotors), UltraturraxTM, mills such as colloid mills or Manton-Gaulin mills, intensive mixers, centrifugal pumps, in-line mixers, mixing nozzles, such as injector nozzles, or ultrasound appliances. Apparatuses of this type are known per se to the person skilled in the art. The settings required to obtain the desired effect on the mean particle size in the precursor suspension (cf. above) can be determined using routine tests according to the particular type of apparatus.

In many cases, as part of the dispersing or milling treatment according to the invention, power is introduced into the precursor suspension at a level of at least 5 kW/m^3 of the mixture or suspension to be treated, in particular at least 7 kW/m^3 . This introduction of power can be determined in a known way for the particular apparatus, for example using the formula $P = 2 \cdot \pi \cdot n \cdot M$, where M represents the torque and n represents the rotational speed, when using an Ultraturrax stirrer.

According to a further preferred embodiment of the invention, the energy introduced into the precursor

suspension within the dispersing or milling treatment according to the invention will be at least 5 kWh/m³ of the mixture or suspension to be treated, in particular at least 7 kWh/m³. In this case, it is preferable, although not imperative, also to comply with the values indicated above for the introduction of power.

Surprisingly, it has also been discovered that comminution of the finished LiMPO₄ instead of the dispersing or milling treatment during the production according to the invention does not lead to corresponding advantageous properties of the LiFePO₄ powder, even if it is attempted to obtain comparable particle size distributions.

It is assumed, without the invention being restricted to this theoretical mechanism, that with the dispersing or milling treatment according to the invention in particular the large crystal agglomerates which initially form during production of the mixed suspension are prevented, or at least the extent to which they are formed is reduced. These crystal agglomerates may also (in part) be attributable to phosphates of Li⁺ and M²⁺ as intermediate products which, depending on their concentration, may lead to an increase in the viscosity on account of the formation of larger crystal platelets and/or agglomerates. According to a particularly preferred embodiment of the invention, therefore, it is also possible for apparatuses whose high mixing action (or shearing action) is sufficient to prevent the formation of large crystallites or crystallite agglomerates in the mixture or suspension and, at the same time, to produce a high nucleation rate to be used for the dispersing treatment of the precursor mixture or suspension. Non-limiting examples of suitable apparatuses have already been mentioned above.

The said crystal aggregates or crystal platelets can also be formed through precipitation of a defined precursor product from a soluble Li^+ source, a soluble M^{2+} source and the (soluble) PO_4^{3-} source. In the example
5 of the invention below, for example, an aqueous solution of an Fe^{2+} source, in particular an aqueous solution of iron(II) sulphate heptahydrate, $\text{FeSO}_4 \cdot 7 \text{H}_2\text{O}$, and a liquid PO_4^{3-} source, in particular 85% strength phosphoric acid, is taken as initial charge,
10 and a fresh precipitate of aqueous LiOH solution, a fresh precipitate of vivianite ($\text{Fe}_3(\text{PO}_4)_2$ hydrate) is formed by the slow addition of an aqueous Li^+ source, in particular an aqueous LiOH solution. In this context, it is preferable for the dispersing or milling
15 treatment to prevent or reduce the extent of formation of large crystal platelets or crystal agglomerates even before the start of initial crystal formation all the way through to the end of the precipitation. Prior to a subsequent preferred hydrothermal treatment, a
20 homogenous precursor mixture or suspension, preferably with a solids content containing Vivianite (if appropriate impregnated with Li^+ ions), lithium phosphate and/or iron hydroxides, is then present using the dispersing or milling unit. This (these)
25 intermediate product(s) need not be isolated. It is preferable for the precursor mixture or suspension to be combined and/or precipitated while it is in the hydrothermal vessel (1-pot process).

30 The dispersing or milling treatment according to the invention therefore ensures that the precipitation takes place very homogeneously and a homogenous mixture comprising a large number of small crystal nuclei of approximately the same size is formed. These crystal
35 nuclei can then, in particular during a subsequent hydrothermal treatment, be reacted to form uniformly grown crystals of the end product LiMPO_4 with a very narrow particle size distribution. In principle, in the context of the invention as an alternative to the

- 7 -

hydrothermal treatment it is also possible, if appropriate after the mother liquor has been separated off, for example by filtration and/or centrifuging, to dry and if appropriate sinter the precipitate formed from the precursor mixture following the dispersing or milling treatment according to the invention. However, the hydrothermal treatment is preferred and gives optimum results.

10 To obtain the desired effect, the dispersing or milling treatment according to the invention may therefore preferably start before or during the formation of a precipitate from the precursor mixture, in order to prevent the formation of large crystal nuclei or agglomerates and/or to comminute and homogenize such nuclei or agglomerates. The intention is to achieve a D90 value of the particles in the suspension of less than 50 μm . A D90 value of the particles in the precursor suspension of at most 25 μm is preferred, in particular at most 20 μm , particularly preferably at most 15 μm , since these values have revealed to provide the best properties in the finished product.

According to one embodiment of the invention, the dispersing or milling treatment according to the invention can also take place after the formation of a precipitate from the precursor mixture, provided that the abovementioned D90 value is achieved.

30 Surprisingly, it has also been discovered that the dispersing or milling treatment according to the invention should preferably take place before the final reaction to form the lithium iron phosphate, in particular before the end of a hydrothermal treatment which follows the precipitation of the precursor mixture, in order to achieve optimum results. However, a treatment of a precursor mixture both before and during a hydrothermal treatment is regarded as being a dispersing or milling treatment according to the

invention.

One significant advantage of the process according to the invention is that the particle size distribution of the LiMPO_4 produced can be controlled in a particularly
5 reproducible way, and consequently the good electrochemical properties can also be stably maintained without extensive fluctuations.

10 In the present invention, there are fundamentally no restrictions on the choice of the Li^+ source, the M^{2+} source and the PO_4^{3-} source. It is possible to use all starting materials which are familiar or appear suitable to the person skilled in the art. It is
15 possible to suitably combine a very wide range of lithium compounds, divalent compounds of M and phosphoric acid compounds as synthesis raw materials. Soluble salts or compounds of Li and M and liquid or soluble PO_4 sources are preferred. Lithium fluoride,
20 lithium chloride, lithium bromide, lithium iodide, lithium carbonate, lithium hydroxide or lithium phosphate, inter alia, can be cited as non-limiting examples of suitable lithium compounds. LiOH is particularly preferred.

25 Iron fluoride, iron chloride, iron bromide, iron iodide, iron sulphate, iron phosphate, iron nitrate, organyl salts of iron, such as iron oxalate or iron acetate, inter alia, can be cited as non-limiting
30 examples of divalent compounds of M, in this case, for example with $\text{M}=\text{Fe}$. Iron sulphate is particularly preferred. If M represents a metal other than Fe, it is possible to use the corresponding compounds.

35 Orthophosphoric acid, metaphosphoric acid, pyrophosphoric acid, triphosphoric acid, tetraphosphoric acid, hydrogen phosphates or dihydrogen phosphates, such as ammonium phosphate or ammonium dihydrogen phosphate, lithium phosphate or iron

phosphate or any desired mixtures thereof, inter alia, can be mentioned as non-limiting examples of phosphoric acid compounds. Phosphoric acid is particularly preferred.

5

Moreover, if LiOH is used as Li^+ source and phosphoric acid is used as PO_4^{3-} source, it is possible to neutralize the phosphoric acid by the addition of LiOH and thereby to initiate the precipitation in the precursor mixture.

10

According to the invention, any liquid or fluid mixture containing at least one Li^+ source, at least one M^{2+} source and at least one PO_4^{3-} source are regarded as a precursor mixture.

15

According to the invention, any liquid or fluid precursor mixture after at least partial formation of a precipitate is regarded as a precursor suspension. The precipitate may contain LiMPO_4 or intermediate products.

20

In general, the precursor mixture will contain a solvent, in particular a polar solvent. Examples of polar solvents which may be mentioned include water, methanol, ethanol, 2-propanol, ethylene glycol, propylene glycol, acetone, cyclohexanone, 2-methyl pyrrolidone, ethyl methyl ketone, 2-ethoxyethanol, propylene carbonate, ethylene carbonate, dimethyl carbonate, dimethyl formamide or dimethyl sulphoxide or mixtures thereof. Water is the preferred solvent. The wet precipitation of the LiMPO_4 from aqueous solution, which is preferred according to the invention, can then take place. According to the invention, therefore, it is then possible to start from the known starting materials or solutions or suspensions which are familiar to the person skilled in the art for the production of the LiMPO_4 . In particular, it is possible to use the formulations and processes which are known

35

for wet precipitation from solutions, with the dispersing or milling treatment being provided in addition according to the invention. The temperature used during the production of the precursor mixture or
5 during the combining of the at least one Li^+ source, the at least one M^{2+} source and/or the at least one PO_4^{3-} source is preferably selected to lie in the range between approximately 20 and 80°C , in particular between 25 and 60°C .

10

According to a preferred embodiment of the process according to the invention, there is no direct evaporation or drying of the precursor mixture or precursor suspension. Also, according to a preferred
15 embodiment there is no sintering of the precursor mixture or precursor suspension, since this can have an adverse effect on the properties of the end product obtained. Rather, it has surprisingly been found that the best results are obtained by a hydrothermal
20 treatment of the precursor mixture or precursor suspension, followed by drying and if appropriate sintering of the fully reacted LiFePO_4 .

In the context of the present invention, the term
25 conversion of the precursor mixture under hydrothermal conditions is to be understood as meaning any treatment at a temperature above room temperature and a steam pressure of above 1 bar. The hydrothermal treatment per se can be carried out in a manner known and familiar to
30 the person skilled in the art. It is preferable for temperatures of between 100 to 250°C , in particular from 100 to 180°C and a pressure of from 1 bar to 40 bar, in particular from 1 bar to 10 bar steam pressure, to be used for the hydrothermal conditions. One example
35 of a possible hydrothermal process is described in JP 2002-151082. In this case, according to one embodiment, the precursor mixture is reacted in a tightly closed or

- 11 -

pressure-resistant vessel. The reaction preferably takes place in an inert or protective gas atmosphere. Examples of suitable inert gases include nitrogen, argon, carbon dioxide, carbon monoxide or mixtures thereof. The hydrothermal treatment may, for example, be carried out for 0.5 to 15 hours, in particular for 3 to 11 hours. Purely as a non-limiting example, the following specific conditions may be selected: 1.5 h heat-up time from 50°C (temperature of the precursor mixture) to 160°C, 10 h hydrothermal treatment at 160°C, 3 h cooling from 160°C to 30°C.

According to a preferred embodiment of the invention, first of all the M^{2+} source and the PO_4^{3-} source are mixed in an aqueous medium, in particular under an inert gas atmosphere, and then, preferably once again under an inert gas atmosphere, the Li^+ source is added. At the latest when the precipitation commences with increasing neutralization of the precursor mixture, the dispersing or milling treatment is then commenced, followed by the reaction under hydrothermal conditions. The hydrothermal treatment may, according to one embodiment of the invention, be followed by separation of the $LiMPO_4$ from the suspension, e.g. by filtration and/or centrifuging. Furthermore, according to one embodiment of the invention, the $LiMPO_4$ which has been separated off can be washed, in particular with water, in order to reduce or remove the salt load. Drying and/or sintering of the $LiMPO_4$, in particular under a protective gas or inert atmosphere, may likewise follow the hydrothermal treatment. Careful drying/redrying is generally required for the electrochemical quality of the end product, since even slight traces of moisture may cause problems, such as decomposition of the conductive salt $LiPF_6$, during electrochemical use of the material in Li (storage) batteries. Sintering may optionally be carried out.

The drying of the $LiMPO_4$ can be carried out over a wide

- 12 -

temperature range from approximately 50 to 750°C, the drying temperature also being dependent on economic considerations. If the LiMPO_4 is produced in the absence of a carbon-containing or electron-conducting substance or a precursor thereof (cf. below), in most cases drying at between approximately 50 and 350°C, for example for 3 h at 250°C using nitrogen 5.0, vacuum or forming gas, will be sufficient.

10 If the production of the LiMPO_4 is carried out in the presence of a carbon-containing or electron-conducting substance or a precursor thereof (cf. below), in order to effect precoating with carbon, a higher drying temperature, generally above 500 or 700°C, will
15 generally be selected. In particular, sintering may be carried out, in which case, for example, heating is carried out for 3 h at approximately 750°C using nitrogen 5.0. The desired conductive covering of the carbon-containing or electron-conducting substance is
20 only obtained at sufficiently high temperatures. According to a preferred embodiment of the invention, the components of the precursor mixture are present in the following stoichiometric ratio:

- 25 a. 1 mole Fe^{2+} : 1 mole PO_4^{3-} : 1 mole Li^* (1:1:1)
 b. 1 mole Fe^{2+} : 1 mole PO_4^{3-} : 3 mol Li^* (1:1:3)
 c. any mixing ratio between a and b.

It is preferable for at least the molar ratio of M^{2+} iron ions to PO_4^{3-} to be approximately 1:1. Also, the stoichiometric ratios given above are preferred for economic ratios are also for economic reasons, but are not imperative. In particular in the hydrothermal process, LiMPO_4 preferentially forms as the most
35 thermodynamically stable phase, and moreover deviations from the abovementioned ratios may in some cases even be intentional in order to influence the precipitation or morphological properties. In general, it is even possible to tolerate deviations of 20%, or at least of

- 13 -

approximately 10%, from the stoichiometric ratios given above.

The hydrothermal process also offers advantages with regard to a greatly reduced demand for protective gas compared to an alternatively possible sintering process from a dry powder premix or precursor mixture. Moreover, it has surprisingly been discovered that the particle morphology and particle size distribution can be controlled a great deal more accurately than with a pure sintering process.

Excessively large LiFePO_4 particles lead, at high charge/discharge rates (high charge/discharge currents), to a kinetically controlled limiting of the capacity which can be taken from a storage battery, i.e. during discharge the lithium ions can no longer migrate sufficiently quickly through the $\text{LiFePO}_4/\text{FePO}_4$ boundary layer, so that the specific capacity of the electrode drops considerably at high charge/discharge rates. However, a sufficient specific capacity even at high charge/discharge currents is important for commercial use of the lithium iron phosphate.

The tests carried out by the inventors have also shown that it is not possible to achieve either the same small particle size and narrow particle size distribution or the excellent electrochemical properties by simply remilling and/or screening the finished LiMPO_4 produced without the dispersing or milling treatment according to the invention. This also applies with regard to LiMPO_4 which has been produced simply by direct sintering of a powder precursor mixture. It is assumed that this is attributable to the uniform and small crystallization of nuclei which are produced by the dispersing or milling treatment according to the invention and form the basis of the reaction to give the finished LiMPO_4 product. The fine and uniform particle size obtained has a positive

- 14 -

influence even in the event of drying or sintering of the LiMPO_4 produced using the process according to the invention.

5 Therefore, a further aspect of the present invention relates to LiMPO_4 obtainable by the process described above. This material preferably has a D_{90} value of the particles of at most 25 μm , in particular at most 20 μm , particularly preferably at most 15 μm . The mean
10 (average) particle size (D_{50} value) is less than 0.8 μm , preferably less than 0.7 μm , in particular less than 0.6 μm , particularly preferably less than 0.5 μm . The particle size distribution is preferably at least substantially a normal distribution (monomodal).
15 According to one embodiment, the D_{10} value is less than 0.35 μm , preferably less than 0.40 μm , but may also be higher with narrow particle size distributions, depending on the D_{90} value. The D_{90} value is preferably less than 3.0 μm , preferably less than 2.5 μm , in
20 particular less than 2.0 μm .

The particle size distribution of the LiMPO_4 according to the invention is, as has already been mentioned above, preferably very narrow; according to a
25 particularly preferred embodiment, the difference between the D_{90} value and the D_{10} value is no more than 2 μm , preferably no more than 1.5 μm , in particular no more than 1 μm , particularly preferably no more than 0.5 μm .

30

Surprisingly, it has emerged that the above-described advantages of the LiMPO_4 according to the invention also offer particular advantages during the subsequent processing with further components, e.g.
35 carbon-containing materials during the production of electrode materials. For example, the LiMPO_4 according to the invention evidently, on account of its particular particle size distribution as defined herein, allows better and easier processing to form

electrode materials and particularly intimate combining with, for example, the carbon-containing conductive materials. Consequently, yet another aspect of the present invention relates to a composition, in particular an electrode material, containing LiMPO_4 as defined herein.

A further aspect of the present invention relates to the use of an LiMPO_4 material as defined above in a lithium storage battery or a secondary (rechargeable) Li battery as electrode material. It is preferable for the primary particles (= crystallites) of the finished LiMPO_4 product to be substantially uniform in terms of size and morphology in SEM images. By contrast, LiMPO_4 which is not produced using the process according to the invention has primary particles of non-uniform sizes or non-uniform crystal morphologies.

According to a preferred embodiment of the invention, the production or precipitation of the precursor mixture and/or the reaction under hydrothermal conditions take place in the presence of further components, in particular an electron-conducting substance. This may preferably be a carbon-containing solid, such as carbon, in particular conductive carbon or carbon fibres. It is also possible to use a precursor of an electron-conducting substance or of the carbon-containing solid, which precursor is converted into carbon particles during drying or sintering of the LiMPO_4 , an example being a sugar compound. Further examples of suitable organic compounds are mentioned in WO 02/083555. It is preferable for the carbon particles contained in the finished LiMPO_4 product to be homogeneously distributed. According to a particularly preferred embodiment according to the invention, the carbon-containing solid used is employed as a crystallization nucleus in the

reaction of the precursor mixture.

In principle, however, any process with which the person skilled in the art is familiar is suitable for
5 introducing carbon or carbon-containing, electrically conductive material and/or for mixing with further components. Intensive mixing or milling of the finished LiMPO_4 with at least one carbon-containing solid, such as conductive carbon, is also possible. Further
10 possible processes include the drawing of carbon particles onto the surface of the LiMPO_4 particle in an aqueous or non-aqueous suspension or the pyrolosis of a mixture of LiMPO_4 powder and a carbon precursor material. The carbon-containing LiMPO_4 obtained in this
15 way, for example, generally contains up to 10% by weight, preferably up to 5% by weight, particularly preferably up to 2.5% by weight, of carbon, based on the LiMPO_4 .

20 A pyrolysis process in which at least one carbon precursor material, preferably a carbohydrate, such as sugar or cellulose, and particularly preferably lactose, is mixed with the LiMPO_4 powder according to the invention, for example by kneading, it being
25 possible to add water as an auxiliary substance, is preferred in technical terms. According to one embodiment which is particularly preferred in technical terms, the carbon precursor material is added to the as yet undried, moist LiMPO_4 filter cake. Then, the
30 mixture of LiMPO_4 powder according to the invention and carbon precursor material is dried under protective gas, in air or in vacuo at temperatures of preferably from 50°C to 200°C and heated under protective gas, such as for example nitrogen 5.0 or argon, to a
35 temperature between, for example, 500°C and 1000°C, preferably between 700°C and 800°C, during which operation the carbon precursor material is pyrolysed to form carbon. This is preferably then followed by a milling or deagglomeration treatment.

According to a further preferred embodiment of the invention, the BET surface area of the LiMPO_4 used is more than approximately $3.5 \text{ m}^2/\text{g}$, in particular more
5 than approximately $4 \text{ m}^2/\text{g}$, particularly preferably more than $5 \text{ m}^2/\text{g}$, more than $10 \text{ m}^2/\text{g}$ or even more than $15 \text{ m}^2/\text{g}$, determined in accordance with DIN 66131 (multipoint determination).

10 An improvement to the properties of the LiFePO_4 by precoating with carbon is also described in: Ravet et al., Abstract No. 127, 196th ECS-Meeting, Honolulu, HI, Oct. 17-22 (1999).

15 The carbon content also improves the processing properties of the LiMPO_4 powder to form battery electrodes by changing the surface properties and/or improves the electrical connection in the battery electrode.

20 Alternatively, a significant improvement to the electron conductivity should be possible by targeted doping with Mg^{2+} , Al^{3+} , Ti^{4+} , Zr^{4+} , Nb^{5+} , W^{6+} (S.Y. Chung, J.T. Bloking, Y.M. Chiang, Nature, Vol. 1, October
25 2002, 123).

A further aspect according to the invention relates to an Li storage battery or an Li secondary battery containing the (optionally carbon-containing) LiMPO_4
30 according to the invention. The secondary battery (lithium ion secondary battery) per se can in this case be produced in a manner known per se, for example as listed below and described in JP 2002-151082. In this case, the lithium iron phosphate of the present
35 invention as obtained above is used at least as part of the material for the positive terminal of the secondary battery. In this case, first of all the lithium iron phosphate of the present invention is mixed with, if necessary, electrically conductive additives and a

binder in accordance with a standard process for producing the positive electrode of a secondary battery. The secondary battery is then produced from this positive electrode and a material customarily used for the negative electrode, such as for example metallic lithium or a laminar carbon compound, such as for example graphite, and also from a non-aqueous electrolyte solution as is customarily used, for example propylene carbonate or ethylene carbonate or the like, in which a lithium salt, such as LiBF_4 or LiPF_6 is dissolved, is produced as the main constituents.

Determination of the particle size distribution:

The particle size distributions for the precursor suspensions and the LiMPO_4 produced is determined on the basis of the light-scattering method using commercially available equipment. The person skilled in the art will be familiar with this method, and in this context reference is also made to the disclosure given in JP 2002-151082 and WO 02/083555. In the present case, the particle size distributions were determined with the aid of a laser diffraction measuring appliance (on Mastersizer S, Malvern Instruments GmbH, Herrenberg, DE) and the manufacturer's software (Version 2.19) with a Malvern Small Volume Sample Dispersion Unit, DIF 2002 as measurement unit. The following measurement conditions were selected: Compressed range; active beam length 2.4 mm; measurement range: 300 RF; 0.05 to 900 μm . The specimen preparation and measurement were carried out in accordance with the manufacturer's instructions.

The D90 value indicates the value at which 90% of the particles in the measured sample have a particle diameter which is smaller than or equal to this value. Accordingly, the D50 value and the D10 value indicate

- 19 -

the values at which 50% and 10% of the particles in the measured sample have a particle diameter smaller than or equal to these values.

5 According to one particularly preferred embodiment of the invention, the values cited in the present description for the D10 values, the D50 values, the D90 values and the difference between the D90 and D10 values are based on the proportion by volume of the
10 respective particles within the total volume. According to this embodiment of the invention, the D10, D50 and D90 values disclosed herein then indicate the values at which 10% by volume, 50% by volume and 90% by volume, respectively, of the particles in the measured sample
15 have a particle diameter smaller than or equal to the value indicated. According to the invention, if these values are maintained, particularly advantageous materials are provided and negative influences of relatively coarse particles (in a relatively large
20 proportion by volume) on the processing properties and the electrochemical product properties are avoided. It is particularly preferable for the values given in the present description for the D10 values, the D50 values, the D90 values and the difference between the D90 and
25 D10 values to be based both on percent and percent by volume of the particles.

In the case of compositions (e.g. electrode materials) which, in addition to the LiMPO_4 contain further
30 components, in particular in the case of carbon-containing compositions, the above light-scattering method can lead to misleading results, since the LiMPO_4 particles may be joined by the additional (e.g. carbon-containing) material to form
35 larger agglomerates. However, the particle size distribution of the LiMPO_4 in compositions of this type can be determined on the basis of SEM images in the following way:

- 20 -

A small quantity of the powder sample is suspended in acetone and dispersed using ultrasound for 10 mins. Immediately thereafter, a few drops of the suspension are applied to a specimen slide of a scanning electron
5 microscope (SEM). The solids concentration of the suspension and the number of drops are such that a substantially single layer of powder particles is formed on the slide in order to prevent the powder particles from covering one another. The drops have to
10 be applied quickly before the particles can separate according to size through sedimentation. After drying in air, the specimen is transferred into the measurement chamber of the SEM. In the present example, the SEM is an LEO 1530 appliance which is operated with
15 a field emission electrode at 1.5 kV excitation voltage and a specimen spacing of 4 mm. At least 20 random excerpt magnifications with a magnification factor of 20 000 are taken of the specimen. These are each printed on a DIN A4 sheet together with the
20 incorporated magnification scale. If possible, at least 10 freely visible LiMPO_4 particles from which the powder particles are formed together with the carbon-containing material are selected randomly on each of the at least 20 sheets, with the boundary of
25 the LiMPO_4 particles being defined by the absence of solid, direct grown bridges. Bridges formed by carbon material, however, are counted as belonging to the particle boundary. For each of these selected LiMPO_4 particles, in each case the longest and shortest axes
30 in projection are measured using a ruler and converted to the true particle dimensions on the basis of the scale ratio. For each measured LiMPO_4 particle, the arithmetic mean of the longest and shortest axes is defined as the particle diameter. Then, the LiMPO_4
35 particles are divided into size classes analogously to when using light-scattering measurement. If the number of associated LiMPO_4 particles is plotted against the size class, the result is the differential particle size distribution based on the number of

- 21 -

particles. If the particle numbers are added cumulatively starting from the small particle classes up to the large particle classes, the cumulative particle size distribution is obtained, from which the
5 D10, D50 and D90 values can be read directly on the size axis.

The method described is also applied to LiMPO₄-containing battery electrodes. In this case,
10 however, a freshly cut or broken surface of the electrode is secured to the specimen slide and examined under an SEM rather than a powder sample.

The invention will now be explained in more detail on
15 the basis of the non-limiting examples given below. In the appended figures:

Fig. 1 shows the particle size distribution (volume-based) of an LiMPO₄ produced in accordance with
20 the invention in accordance with Example 1;

Fig. 2 shows the particle size distribution (volume-based) of an LiMPO₄ which was not produced in accordance with the invention, in accordance with
25 Example 2;

Fig. 3 shows the particle size distribution (volume-based) of an LiMPO₄ produced in accordance with the invention, in accordance with Example 3.
30

Examples:

Example 1: Production of LiFePO₄ using a process according to the invention, including hydrothermal treatment
35

Reaction equation



11 H₂O

LiFePO₄ as finished product can be stored at room temperature in air without oxidation.

5

When producing LiFePO₄ in accordance with the reaction equation indicated, it should be noted that the LiFe^{II}PO₄ is precipitated from an aqueous Fe^{II} precursor solution. Therefore, the reaction and drying/sintering
10 are to be carried out under protective gas or vacuum in order to avoid partial oxidation of Fe^{II} to form Fe^{III}, with the further formation of by-products, such as Fe₂O₃ or FePO₄.

15 **Production and precipitation of a precursor mixture**

417.04 g of FeSO₄ · 7 H₂O are dissolved in approx. 1 l of distilled water and 172.74 g of 85% strength phosphoric acid are slowly added with stirring. The
20 batch is then topped up to 1.5 l with distilled water. The acidic solution is placed in a laboratory autoclave (volume: 1 gallon) at a stirrer speed of 400 rpm, approx. 6-7 bar of nitrogen is applied to the autoclave via the immersion pipe and then this pressure is
25 relieved again via the relief valve. The procedure is repeated twice.

188.82 g of lithium hydroxide LiOH · H₂O are dissolved in 1 l of distilled water.

30

A dispersing means (IKA, ULTRATURRAX® UTL 25 Basic Inline with dispersion chamber DK 25.11) is connected, between relief valve and bottom outlet valve, to the autoclave in order to carry out the dispersing or
35 milling treatment in accordance with the present invention. The pumping direction of the dispersing means is bottom outlet valve - dispersing means - relief valve. The dispersing means is started at a medium dispersing means is at a medium power level

- 23 -

(13 500 rpm) in accordance with the manufacturer's instructions.

Then, the prepared LiOH solution is pumped into the
5 autoclave via the immersion pipe using a prominent
membrane pump (displacement 100%, 180 strokes/minute;
corresponds to the highest power of the pump), followed
by rinsing with approx. 500 to 600 ml of distilled
water. The operation lasts approximately 20 minutes,
10 during which the temperature of the suspension formed
rises to approx. 35°C. After this pumping and rinsing,
the suspension in the autoclave is heated to 50°C. A
greenish-brown precipitate is formed after the addition
of the lithium hydroxide.

15 The dispersing means, which is started before the
addition of LiOH commences, is used in total for
approximately 1 hour for intensive mixing or milling of
the highly viscous suspension formed (after the LiOH
20 solution has been pumped in at 50°C). The particle size
was then $D_{90} = 13.2 \mu\text{m}$. The volume-based D_{90} value was
similar.

The following procedure can be used to measure the
25 particle sizes in the precursor suspension: with
reference to the method given before the examples for
determining the particle size (distribution), 20 to
40 mg of the suspension are suspended in 15 ml of water
and dispersed for 5 min using an ultrasound finger
30 (rated power 25 Watts, 60% power). This is followed by
immediate measurement in the measurement unit. The
correct setting of the specimen quantity can be checked
on an individual basis using the indication on the
measurement unit (green measurement range).

35 The use of a dispersing means effects intensive mixing
and deagglomeration of the precipitated viscous
preliminary mixture. During the precipitation and
crystallization of the precursor suspension which takes

- 24 -

place, the pre-milling or intensive mixing in the dispersing means produces a homogenous mixture of a large number of small crystal nuclei of approximately equal size. These crystal nuclei crystallize during the subsequent hydrothermal treatment (cf. below) to form very uniformly grown crystals of the end product LiFePO_4 with a very narrow particle size distribution. The introducing of power or energy by means of the dispersing treatment amounted to more than 7 kW/m^3 or more than 7 kWh/m^3 respectively, in the treated precursor mixture/suspension.

Hydrothermal treatment:

In each case the freshly prepared suspension is hydrothermally treated in a laboratory autoclave. Prior to heating of the suspension, the autoclave is purged with nitrogen in order to displace air which is present before the hydrothermal process from the autoclave. LiFePO_4 is formed above hydrothermal temperatures of approximately 100 to 120°C . After the hydrothermal process, the material is filtered off using the Seitz filter and washed. In detail:

After the dispersing means has been switched off and disconnected, the batch is heated to 160°C over the course of 1.5 hours, and a hydrothermal treatment is carried out for 10 hours at 160°C . This is followed by cooling to 30°C over the course of 3 hours.

Then the LiFePO_4 can be dried in air on in a drying cabinet, e.g. at mild temperatures (40°C), without visible oxidation.

However, it is also possible for the material obtained as described above to be processed further as follows:

Filtration of the lithium iron phosphate LiFePO_4

- 25 -

After the hydrothermal treatment, the cooled suspension (max. 30°C) is pumped under a nitrogen atmosphere through the bottom outlet valve of the autoclave into a pressure filter (what is known as a Seitz filter). In the process, the prominent membrane pump is set in such a way that a pressure of 5 bar is not exceeded. The filter cake is subsequently washed with distilled water until the conductivity of the washing water drops below 200 µS/cm.

10

Drying and deagglomeration of the lithium iron phosphate LiFePO_4

The filter cake is pre-dried overnight in a vacuum drying cabinet at 70°C to a residual moisture content of below 5% and is then dried further in a protective gas oven (Linn KS 80-S) under a stream of forming gas (90% N_2 /10% H_2) of 200 l/h at 250°C to a residual moisture content of <0.5%. Then, the LiFePO_4 is deagglomerated in a laboratory rotor mill (Fritsch Pulverisette 14) with a 0.08 mm screen.

The resulting typical particle size distribution of the finished LiFePO_4 (with dispersing means treatment, after hydrothermal treatment, drying and deagglomeration as described above) can be seen in Fig. 1. To clarify the advantageous particle size distribution and the absence of the disruptive larger particles in the products according to the invention, the volume-based data are illustrated. The values based on the particle fraction (%) were as follows: D50 value less than 0.5 µm; D10 value less than 0.35 µm; D90 value less than 2.0 µm; difference between the D90 value and the D10 value less than 1.5 µm.

35

The following procedure can be used to measure the particle sizes in a pulverulent specimen: with reference to the method described before the examples for determining the particle size (distribution), 20 to

- 26 -

40 mg of the powder specimen are suspended in 15 ml of water and dispersed for 5 min using an ultrasound finger (rate of power 25 Watts, 60% power). This is followed by immediate measurement in the measurement unit. The correct setting of the specimen quantity can be checked on an individual basis using the indication on the measurement unit (green measurement range).

10 Example 2: Production of LiFePO_4 without dispersing means treatment (comparison)

For comparison purposes, LiFePO_4 was produced using the same synthesis process as that described in Example 1, but without use of the dispersing means in accordance with the invention. Under otherwise identical reaction conditions, a much wider particle size distribution with a higher proportion of grown agglomerate structures was obtained. Without the use of a dispersing means, the D_{90} value (based on proportion by volume or on number of particles) after the addition of the LiOH solution was more than 200 μm . The considerably coarser particle size distribution of the finished LiFePO_4 (after hydrothermal treatment, drying and deagglomeration despite the LiFePO_4 likewise being in pure-phase form) is illustrated in Fig. 2. The volume-based data are shown in order to clarify the presence of disruptive larger particles. The shown on the proportion of particles. The D_{50} value, based on the proportion of particles (%), was over 0.8 μm .

30

An LiFePO_4 produced in accordance with US2003/0124423, page 10, paragraph [0015] was likewise unable, despite intensive milling using a pestle, to achieve the particle size distribution of the products according to the invention; it was not possible to attain a D_{50} value of less than 0.8 μm or a difference between the D_{90} and D_{10} values of 2 μm or below.

- 27 -

Example 3: Production of LiFePO_4 using a process according to the invention including hydrothermal treatment

5 LiFePO_4 was produced using the same synthesis process as that described in Example 1, except that the dispersing means (IKA, ULTRATURRAX® UTL 25 Basic Inline with dispersing chamber DK 25.11) was operated at the highest power level. The introduction of power or
10 energy by means of the dispersing treatment was more than 10 kW/m^3 or more than 10 kWh/m^3 respectively, in the treated precursor mixture/suspension. The particle size of the suspension following the dispersing means treatment was $D_{90} = 10.8 \text{ }\mu\text{m}$. The volume-based D90 value
15 was slightly below this.

The hydrothermal treatment, filtration, drying and deagglomeration were carried out as described in Example 1. The typical particle size distribution which
20 in this case results for the finished LiFePO_4 can be seen from Fig. 3. The volume-based data are illustrated with a view to clarifying the advantageous particle size distribution and the absence of the disruptive larger particles in the products according to the
25 invention. The values based on the proportion of particles (%) were as follows: D50 value less than $0.5 \text{ }\mu\text{m}$; D10 value less than $0.35 \text{ }\mu\text{m}$; D90 value less than $2.0 \text{ }\mu\text{m}$; difference between the D90 value and the D10 value less than $1.0 \text{ }\mu\text{m}$.

30

In electrochemical tests, the LiFePO_4 according to the invention produced using the dispersing means had the best properties, in particular at high charging/discharging rates, compared to the comparative
35 material produced without the use of a dispersing means and also compared to a material produced by a pure sintering process in accordance with the prior art.

Example 4: Production of LiFePO_4 using a process according to the invention including hydrothermal treatment

5 21.894 kg of $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ are dissolved in 42 l of deionized water, and 9.080 kg of 85% strength phosphoric acid are slowly added with stirring. The acidic solution is placed as initial charge in an enamelled 200l autoclave with anchor agitator and is
10 stirred at 45 rpm. The head space of the autoclave is purged with nitrogen before the autoclave is closed. The acidic solution is circulated using a centrifugal pump with an approx. 5kW power consumption and a measured flow capacity of on average 7000 l/h. The
15 solution is removed via the bottom outlet valve of the autoclave and fed back via a top flange. 10.289 kg of $\text{LiOH} \cdot \text{H}_2\text{O}$ are dissolved in 62 l of deionized water. This alkaline solution is fed via a monopump and an injector nozzle to the circulated acidic solution on the
20 delivery side of the centrifugal pump. This operation lasts 15 min, during which the temperature of the circulated solution rises from 18.3°C to 42.1°C . The suspension formed is circulated for a further 45 min using the centrifugal pump and stirred using the anchor
25 agitator at 45 rpm, during which process the temperature rises further to 51.1°C . According to the invention, throughout the entire operation the centrifugal pump with its high level of turbulence ensures that a fine-particle suspension is formed, and
30 it was possible to achieve comparable particle size distributions to those achieved in Example 1. The introduction of power or energy via the dispersing treatment was more than 7 kW/m^3 or more than 7 kWh/m^3 respectively, in the treated precursor mixture/
35 suspension.

After the external appliances had been switched off and disconnected, the autoclave is closed in a pressure-tight manner and heated, with continuous

- 29 -

stirring at 90 rpm, to 160°C over the course of 1.5 h and then held at this temperature for 10 h. It is then cooled to 20°C over the course of 3 h, and the finished LiFePO₄ suspension is filtered in a Seitz filter analogously to Example 1. The pH of the filtrate is 7.5. It is then washed with deionized water until the filtrate has a conductivity of less than 480 µS. The whiteish-grey, solid filter cake, which has a tendency to flow, is dried overnight at 70°C in a vacuum drying cabinet at <100 mbar and deagglomerated in a laboratory rotor mill (Fritsch Pulverisette 14) with a 0.08 mm screen. The particle size distributions then obtained where in the same range as that given in Example 1.

15 Example 5: Carburization of a material produced using the process according to the invention

1 kg of dry LiFePO₄ powder from Examples 1 to 4 is intimately mixed with 112 g of lactose monohydrate and 330 g of deionized water and dried overnight in a vacuum drying cabinet at 70°C and <100mbar to give a residual moisture content of <5%. The hard, brittle dried product is broken by hand and coarse-milled in a disc mill (Fritsch Pulverisette 13) with a disc spacing of 1 mm and then transferred in stainless steel crucibles into a protective gas chamber oven (Linn KS 80-S). The latter is heated to 750°C over 3 h under a stream of nitrogen of 200 l/h, held at this temperature for 5 h and then cooled to room temperature over the course of approx. 36 h. The carbon-containing product is deagglomerated in a laboratory rotor mill (Fritsch Pulverisette 14) with a 0.08 mm screen.

The SEM analysis of the particle size distribution as described before the examples for carbon-containing materials gave the following values: D50 value less than 0.6 µm, difference between D90 value and D10 value less than 1.5 µm.

- 30 -

In electrochemical tests on a thin-film electrode as disclosed, for example, in Anderson et al., Electrochem. And Solid State Letters 3 (2) (2000), pages 66-68, the carbon-containing material according to the invention, (starting from the product of Examples 1, 3 and 4) had the best properties, in particular at high charging/discharging rates, compared to the comparison material produced without the use of a dispersing means and a material produced by a pure sintering process in accordance with the prior art.

CLAIMS:

1. A process for producing a compound of the formula LiMPO_4 , in which M^{2+} represents at least one metal from the first transition series, comprising the following steps:
 - 5 (a) production of a precursor mixture, containing at least one Li^+ source, at least one M^{2+} source and at least one PO_4^{3-} source, in order to form a precipitate and thereby to produce a precursor suspension;
 - (b) dispersing or milling treatment of the
10 precursor mixture and/or the precursor suspension until the D90 value of the particles in the precursor suspension is less than 50 μm ;
 - (c) obtaining the LiMPO_4 from the precursor suspension obtained in step (b).
- 15 2. The process according to claim 1, wherein step (c) is carried out under hydrothermal conditions.
3. The process according to claim 1 or 2, wherein the D90 value of the particles in the suspension is at most 25 μm .
- 20 4. The process according to any one of claims 1 to 3, wherein M^{2+} at least comprises Fe^{2+} or consists of Fe^{2+} .
5. The process according to any one of claims 1 to 3, wherein M^{2+} comprises one or more of Fe^{2+} , Mn^{2+} , Co^{2+} and Ni^{2+} .
6. The process according to any one of claims 1 to 5,
25 wherein the LiMPO_4 is obtained in pure-phase form.
7. The process according to any one of claims 1 to 6, wherein the dispersing or milling treatment is used before

or during the precipitation of the precursor mixture and is continued until the precipitation has concluded.

8. The process according to any one of claims 1 to 7, wherein the dispersing treatment is used before the precipitation of the precursor mixture, in order to ensure a high level of crystal nucleation and to prevent the formation of large crystals and crystal agglomerates.

9. The process according to any one of claims 2 to 8, wherein no evaporation occurs prior to the reaction of the precursor mixture or suspension under the hydrothermal conditions.

10. The process according to any one of claims 2 to 9, wherein no sintering takes place prior to the reaction of the precursor mixture or suspension under the hydrothermal conditions.

11. The process according to any one of claims 2 to 10, wherein the LiMPO_4 is dried following the reaction under the hydrothermal conditions.

12. The process according to any one of claims 2 to 10, wherein the production of the precursor mixture or suspension or the conversion under the hydrothermal conditions takes place in the presence of at least one further component comprising a carbon-containing or electron-conducting substance or a precursor of an electron-conducting substance.

13. The process according to claim 12, wherein the electron-conducting substance is carbon.

14. The process according to claim 12, wherein the precursor of the electron-conducting substance is the carbon-containing substance.

31238-1(S)

- 33 -

15. The process according to any one of claims 1 to 14, wherein the at least one Li^+ source used is LiOH or Li_2CO_3 .

16. The process according to any one of claims 4 to 15, wherein the Fe^{2+} source used is a Fe^{2+} salt or an organyl salt of iron.

17. The process according to any one of claims 1 to 16, wherein the at least one PO_4^{3-} source used is phosphoric acid, a metal phosphate, hydrogen phosphate or dihydrogen phosphate.

18. The process according to any one of claims 1 to 17, wherein water is used as a solvent in the precursor mixture.

19. The process according to any one of claims 1 to 18, wherein the at least one Li^+ source and the at least one M^{2+} source are used in the form of aqueous solutions, and the at least one PO_4^{3-} source is used in the form of a liquid or an aqueous solution.

20. The process according to any one of claims 2 to 19, wherein the precipitate formed in the precursor suspension comprises at least one precursor of LiMPO_4 , and the reaction to form LiMPO_4 then takes place under the hydrothermal conditions.

21. The process according to any one of claims 2 to 20, wherein a temperature of between 100 and 250°C, and a pressure of from 1 bar to 40 bar are used under the hydrothermal conditions.

22. The process according to any one of claims 1 to 21, wherein the components of the precursor mixture are present in the following stoichiometric ratio:

31238-1(S)

- 34 -

(i) 1 mole M^{2+} : 1 mole PO_4^{3-} : 1 mole Li^+ (1:1:1)

(ii) 1 mole M^{2+} : 1 mole PO_4^{3-} : 3 mole Li^+ (1:1:3)

(iii) any mixing ratio between (i) and (ii).

23. The process according to any one of claims 2
5 to 22, wherein the combining or reaction of the precursor
mixture or suspension under the hydrothermal conditions
takes place under an inert gas atmosphere.

24. The process according to any one of claims 2
to 23, wherein first, in an aqueous solvent, the at least
10 one of M^{2+} source and the at least one of PO_4^{3-} source are
mixed then the at least one of Li^+ source is added, and then
the reaction under the hydrothermal conditions is carried
out.

25. The process according to any one of claims 1
15 to 24, wherein the dispersing or milling treatment is a
treatment with a dispersing means selected from the group
consisting of Ultraturrax™, a mill, a colloid mill, a
Manton-Gaulin mill, an intensive mixer, a centrifugal pump,
an in-line mixture, mixing nozzles, injector nozzles and an
20 ultrasound appliance.

26. The process according to any one of claims 1
to 25, wherein a stirring mechanism is used for a high-
shearing treatment in accordance with step (b) of claim 1,
with the introduction of power, P , calculated according to
25 the formula $P = 2\pi nM$, wherein M represents the torque and n
represents the rotational speed, being at least 5 kW/m³.

27. The process according to any one of claims 12
to 26, wherein the at least one further component is used as
a crystallization nucleus in the precipitation or reaction
30 of the precursor mixture.

31238-1(S)

- 35 -

28. LiMPO_4 having a mean particle size, D50 value, which is less than $0.8\ \mu\text{m}$, wherein M is as defined in claim 1,3 or 4.

29. LiMPO_4 according to claim 28, wherein the D50 value
5 is less than $0.5\ \mu\text{m}$.

30. LiMPO_4 according to claim 28 or 29, wherein the D10 value of the particles is less than $0.4\ \mu\text{m}$, and the D90 value is less than $3.0\ \mu\text{m}$.

31. LiMPO_4 according to claim 30, wherein the D10 value
10 is less than $0.35\ \mu\text{m}$, and the D90 value is less than $2.0\ \mu\text{m}$.

32. LiMPO_4 according to any one of claims 28 to 31, wherein the difference between the D90 value and the D10 value of the particles is less than $2\ \mu\text{m}$.

33. LiMPO_4 according to claim 32, wherein the
15 difference between the D90 value and the D10 value of the particles is less than $0.5\ \mu\text{m}$.

34. LiMPO_4 according to any one of claims 28 to 33, wherein the BET surface area is more than $3.5\ \text{m}^2/\text{g}$.

35. LiMPO_4 according to claim 34, wherein the BET
20 surface area is more than $15\ \text{m}^2/\text{g}$.

36. Use of LiMPO_4 according to any one of claims 28 to 35, as an electrode material.

37. The process according to any one of claims 2 to 27, wherein the LiMPO_4 , after the hydrothermal treatment,
25 is separated off, dried and optionally deagglomerated.

38. The process according to any one of claims 2 to 27 and 37, wherein at least one carbon precursor material is mixed with the LiMPO_4 obtained from the hydrothermal

31238-1(S)

- 36 -

treatment and is subjected to a pyrolysis process, and wherein water is optionally added.

39. The process according to claim 38, wherein the at least one carbon precursor material is added to a moist
5 LiMPO_4 filter cake obtained by separation after the hydrothermal treatment, the mixture of LiMPO_4 and carbon precursor material is dried and heated to a temperature between 500°C and 1000°C , during which operation the carbon precursor material is pyrolyzed to form carbon.

10 40. The process according to claim 39, wherein the pyrolysis is followed by a milling or deagglomeration treatment.

41. The process according to claim 39 or 40, wherein the drying is carried out under a protective gas, in air or
15 in vacuo at a temperature of from 50°C to 200°C , and the pyrolysis is carried out under the protective gas.


FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS


1/3

Fig. 1:

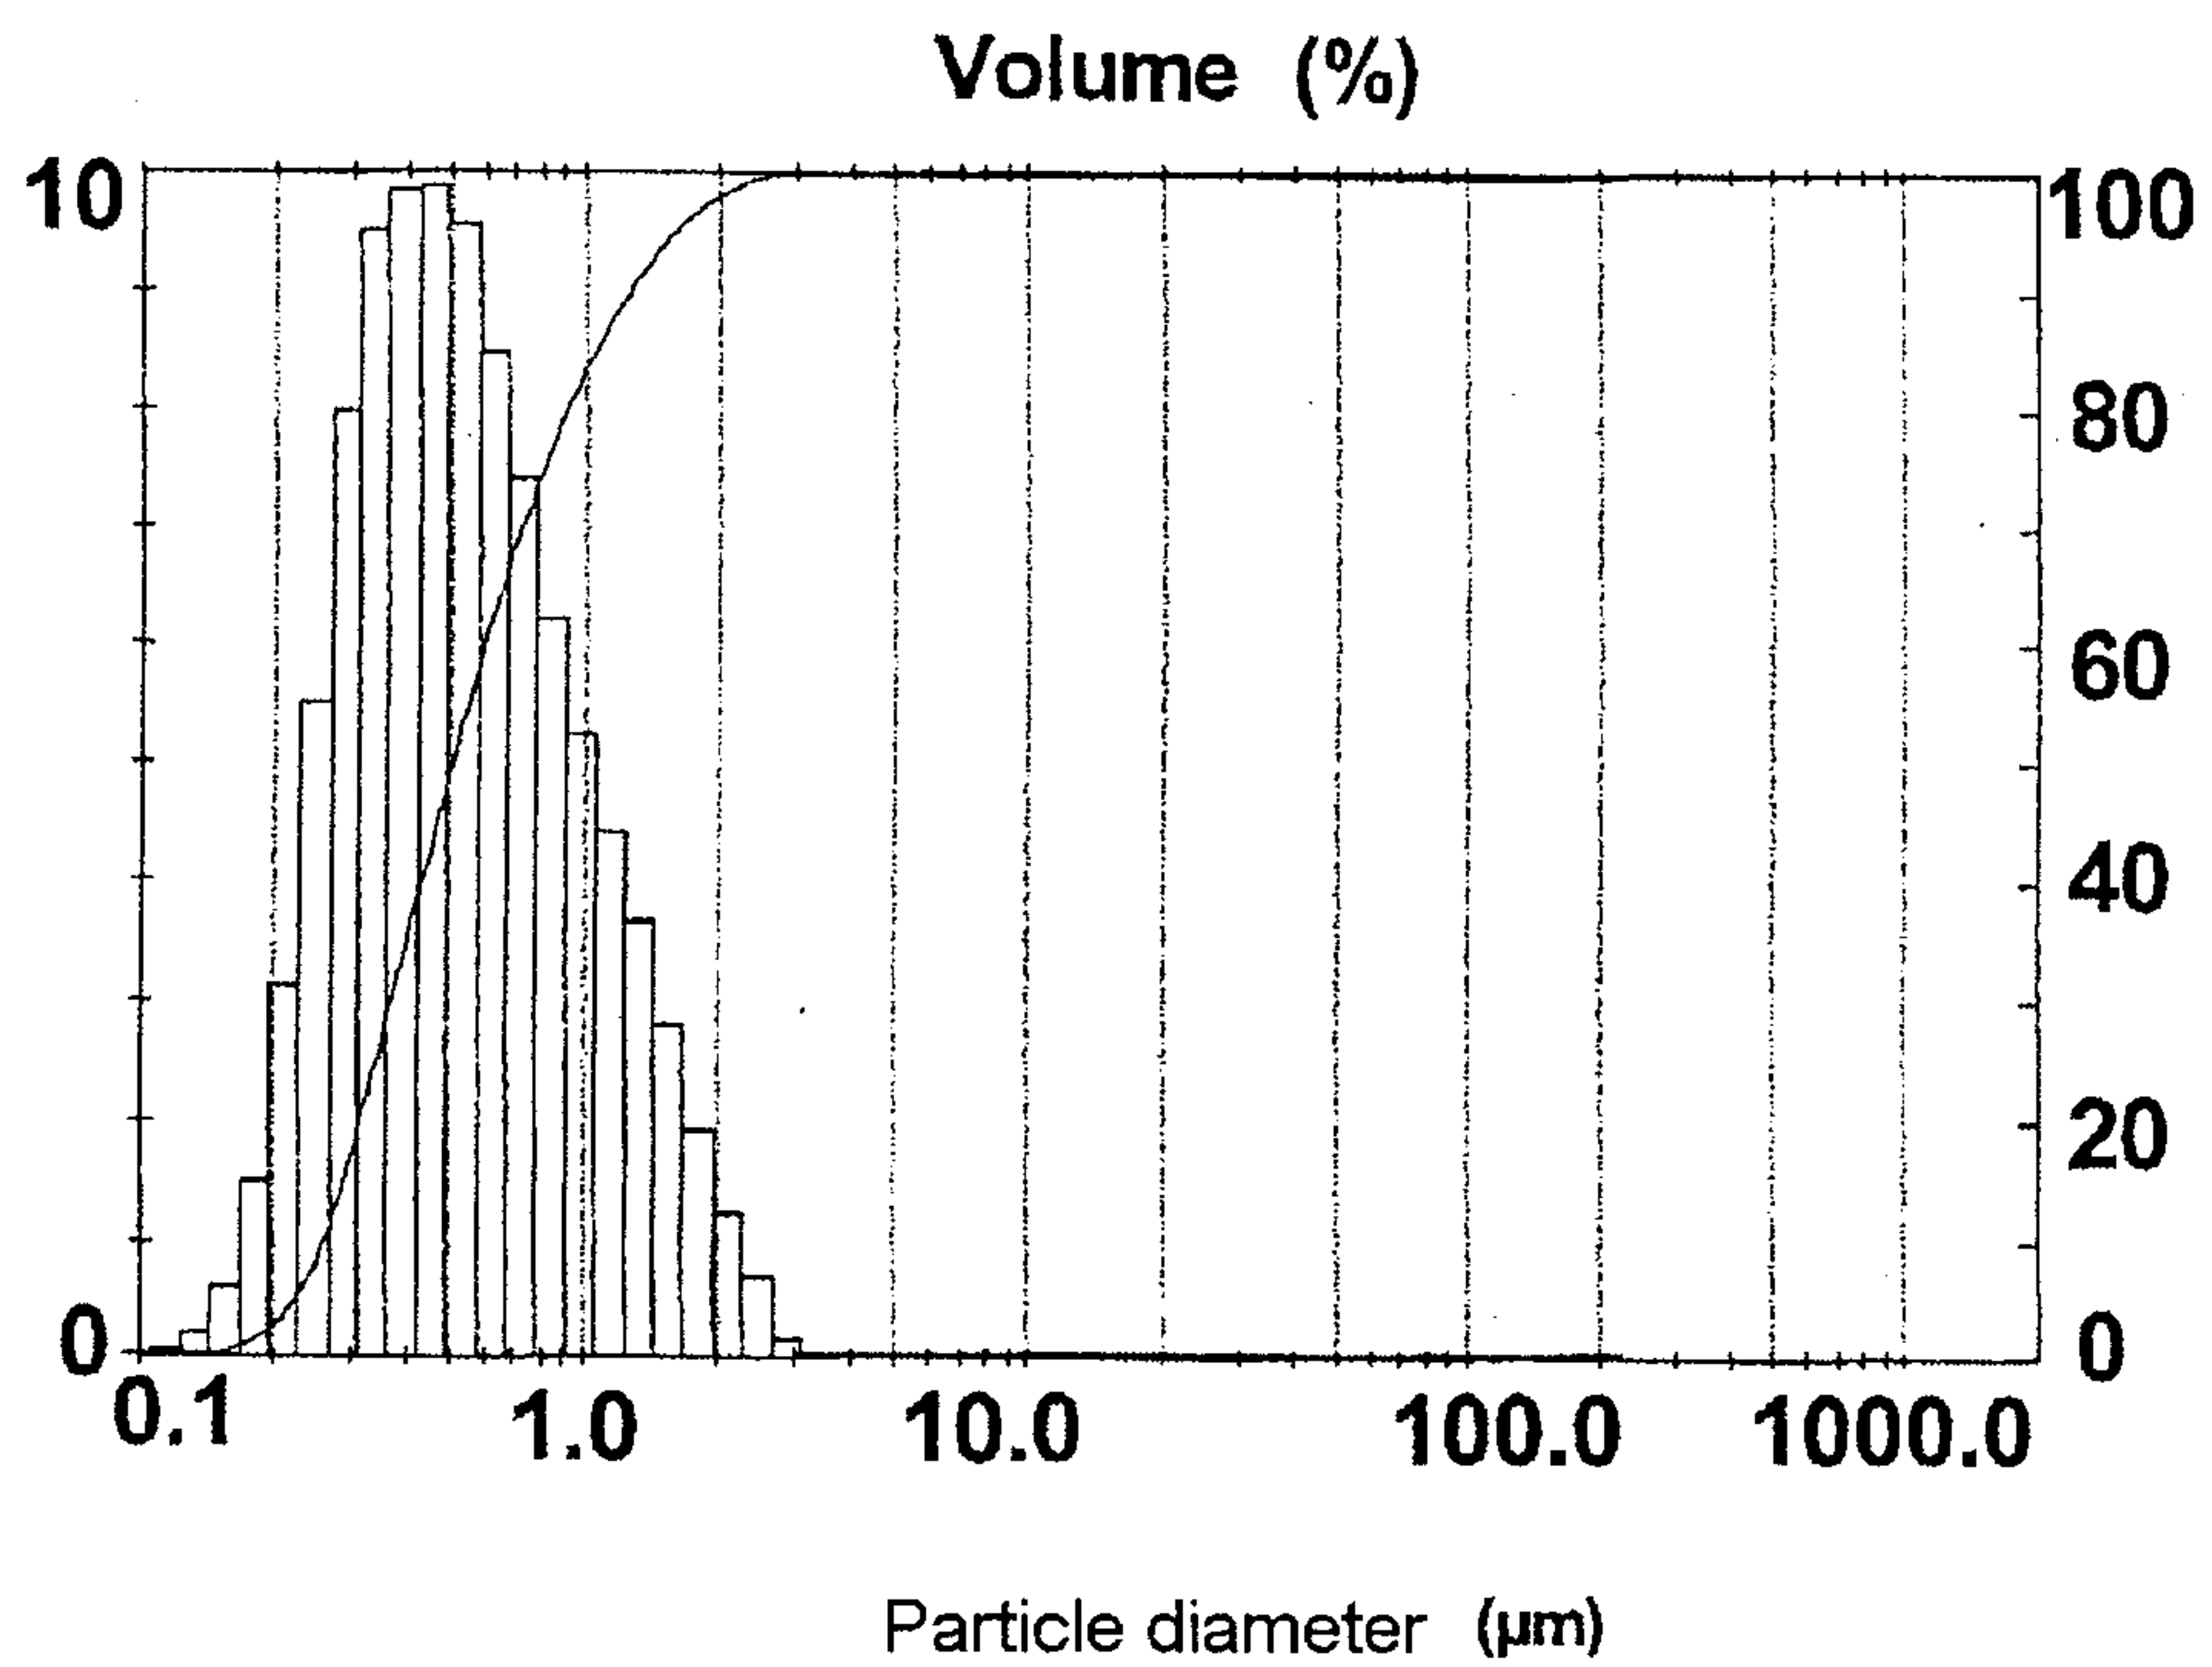

2/3

Fig. 2:

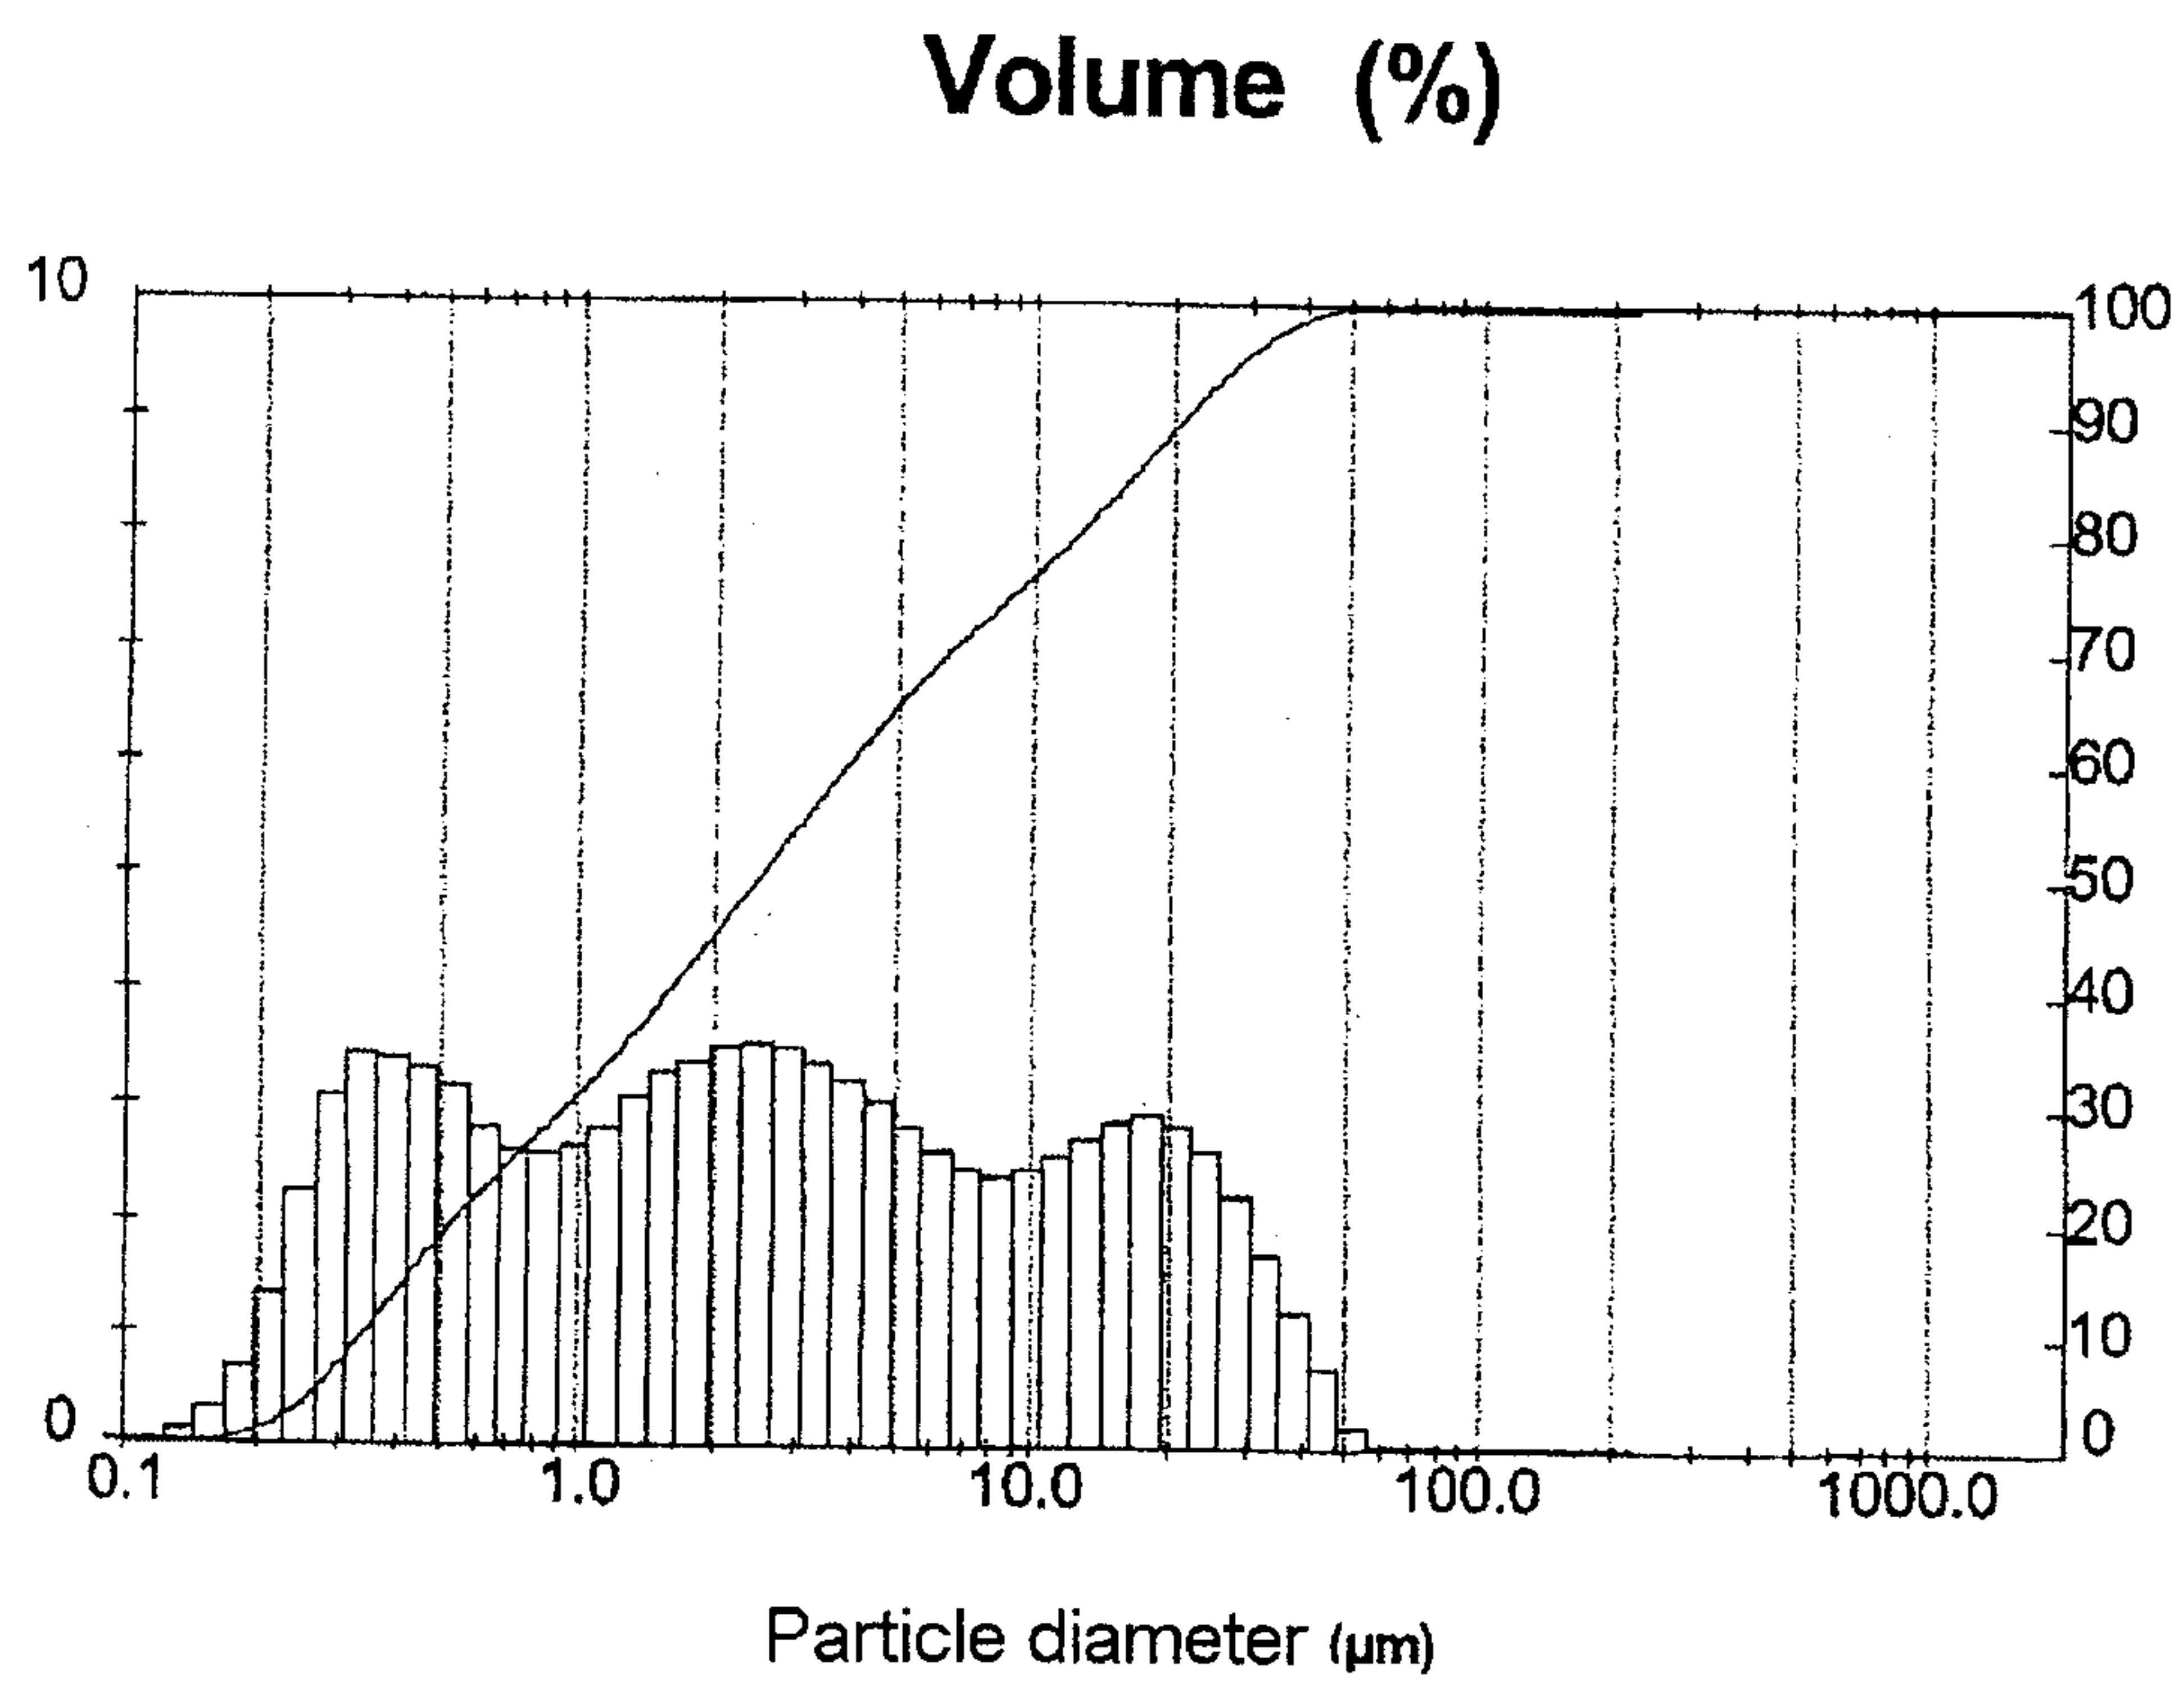

3/3

Fig. 3:

