



- (51) **International Patent Classification:**  
*B27C 5/10* (2006.01)      *B25H 1/00* (2006.01)
- (21) **International Application Number:**  
PCT/GB2017/051563
- (22) **International Filing Date:**  
01 June 2017 (01.06.2017)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
1609598.6      01 June 2016 (01.06.2016)      GB
- (71) **Applicant:** WOODRAT LTD [GB/GB]; The Old School, Godney, Wells Somerset BA5 1RY (GB).
- (72) **Inventor:** GODFREY, Martin; The Old School, Godney, Wells Somerset BA5 1RY (GB).
- (74) **Agent:** DYKES, Gregory; HASELTINE LAKE LLP, Redcliff Quay, 120 Redcliff Street, Bristol BS1 6HU (GB).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,

MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) **Title:** GUIDE APPARATUS FOR A WOODWORKING ROUTER

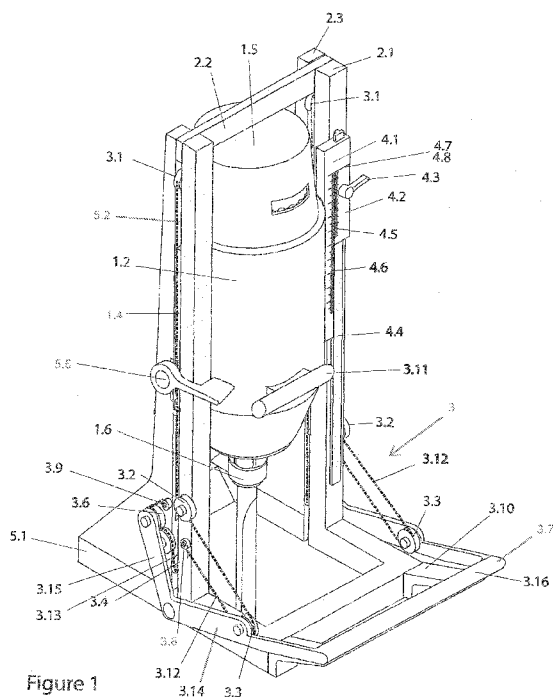


Figure 1

(57) **Abstract:** There is disclosed guide apparatus for guiding a wood-working router relative a workpiece, the guide apparatus comprising: a base (5.1) for engaging with a workpiece or worktable carrying the workpiece; a guide frame (2.1, 2.3) coupled to the base (5.1) and having at least one guide (5.2) defining a linear guide path; a router housing (1.2) slidably engaged with the guide (5.2) for movement along the guide path relative the guide frame in an engaging direction towards the base (5.1) and a disengaging direction away from the base, the router housing (1.2) being configured to receive a woodworking router so that, in use, a router bit of the router extends from the router housing (1.2) towards the base (5.1); and an actuation mechanism 3 having a pivotable handle (3.7) for receiving an input force from an operator to move housing (1.2) along the guide path. The actuation mechanism (3) is configured so that, in use with the guide apparatus in an upright configuration in which the router housing (1.2) is above the base (5.1), an input force is required to raise the housing and the router received therein against gravity.

**GUIDE APPARATUS FOR A WOODWORKING ROUTER**

The invention relates to guide apparatus for a woodworking router.

5 Known plunge routers comprise a base in the form of a metal ring from which rise two columns with internal springs. The router motor is housed in a body mounted on these columns. The motor can be forced downward against the force of the springs by the operator pushing on handles on either side of the motor. The bit in the collet of the motor is thus brought down below the base of the router so that it can cut the  
10 workpiece and the motor can be locked onto the columns at any point.

The depth of the bit in a routing operation is invariably controlled by an adjustable depthing foot attached to the motor that is brought down onto a rotating "turret" of stops, set at different heights. The depth of cut is gauged between the foot and one of  
15 the stops on the turret.

If the bit is first 'zeroed' onto the work surface and the router locked, the depthing foot can be raised a gauged amount and locked off. This allows the bit to be lowered below the work surface the gauged amount and locked so that it can cut the work and make  
20 joints.

From the zero position the height of the depthing foot can be gauged using various means, which may be a drill bit shank or special gauges of engineered dimensions, or (commonly) the piece of wood that the joint will go through, or a dimension obtained  
25 from vernier or digital callipers. Often it can be difficult to introduce calipers between a stop and a depthing foot.

It invariably takes two hands pushing equally on the handles each side of the router to lower the motor. When the router is used upside down in a router table the weight of  
30 the router pushes downward and the springs also push downward doubling the weight. When the operator wishes to bring the bit above the table top to cut the workpiece, he pushes up with two hands against this force, thereby lifting the whole router table off the floor. Since both hands are pushing the router upward there is no third hand to push down on the table top to keep it on the floor. Users are reluctant to bolt tables to  
35 the floor, since it is often desirable to move them.

In order to function correctly, the sprung columns accommodate the axially extending springs with a degree of radial tolerance. This tolerance is transmitted as runout (i.e. undesirable movement of the blade that results in an oversized hole or pathway) at the cutter tip so there is a practical limit to the length of the columns before they become  
5 inaccurate, and therefore a limit to the depth of plunge of the bit. Runout can be considered as an eccentricity of a cut, or an amount by which the cut is off-centre, and can also be caused by poor sharpening of a bit, worn bearings of a router.

As the user unlocks the router from a locked vertical position, there is a tendency for  
10 the springs to cause the router to suddenly jump upward.

It is therefore desirable to provide a router apparatus (or guide apparatus for a router) that may mitigate some of the above mentioned problems.

15 According to a first aspect of the invention there is provided guide apparatus for guiding a woodworking router relative a workpiece, the guide apparatus comprising: a base for engaging with a workpiece or worktable carrying the workpiece; a guide frame coupled to the base and having at least one guide defining a linear guide path; a router housing slidably engaged with the guide for movement along the guide path relative the  
20 guide frame in an engaging direction towards the base and a disengaging direction away from the base, the router housing being configured to receive a woodworking router so that, in use, a router bit of the router extends from the router housing towards the base; and an actuation mechanism for moving the router housing along the guide path, the actuation mechanism comprising a pivotable handle for receiving an input  
25 force from an operator.

The actuation mechanism may be configured so that, in use with the guide apparatus in an upright configuration in which the router housing is above the base, an input force (e.g. an input force to the pivotable handle) is required to raise the housing and the  
30 router received therein against gravity. In the upright configuration the router housing may be suspended above the base.

Alternatively, the upright configuration may be defined as a position in which the router housing is movable downwards so that a router received therein engages with a  
35 workpiece, more particularly, so that a cutter received in the router engages the workpiece.

The actuation mechanism may be unbiased so that, in use, an input force must be applied to raise the housing and the router received therein against gravity.

- 5 The apparatus may be configured so that the router housing is not biased to move along the guide path by any force other than a gravity force acting on the housing and any router received therein.

10 The apparatus may be configured so that the router housing is biased to move along the guide path only by a gravity force acting on the housing and any router received therein.

The apparatus may be configured so that the router housing is not mechanically biased to move along the guide path, for example, by a spring.

15

The actuation mechanism may comprise a disengaging pulley mechanism for moving the router housing along the guide path in the disengaging direction. A pulley cable of the disengaging pulley mechanism may be coupled to the router housing so that the pulley cable is operable to pull the router housing away from the base.

20

The actuation mechanism may comprise an engaging pulley mechanism for moving the router housing along the guide path in the engaging direction. A pulley cable of the engaging pulley mechanism may be coupled to the router housing so that, in use, the pulley cable pulls the router housing towards the base. The disengaging pulley  
25 mechanism and the engaging pulley mechanism may be coupled to the pivotable handle and configured so that, in use, each pulley mechanism is in tension (i.e. each pulley mechanism prevents a pulley cable of the other pulley mechanism from becoming slack).

30 The or each pulley mechanism may comprise a handle pulley coupled to the pivotable handle at a location spaced from the pivot axis of the handle so that, in use, the displacement of the router housing along the guide path due to the displacement of the handle pulley is greater than the arc length displacement of the handle pulley.

35 The or each pulley mechanism may comprise a cable extending between, in order, a first pulley or fixing point on the guide frame, the handle pulley, and a second pulley or

fixing point on the guide frame and the first and second pulleys or fixing points on the guide frame may be adjacent one another so that, in use, two lengths of the cable extending between the handle pulley and the first and second pulleys or fixing points respectively are substantially parallel.

5

The pivotable handle may comprise first and second handle arms to which the respective handle pulleys are mounted, and the handle arms may extend substantially perpendicular to one another, and may extend from the pivot of the pivotable handle.

10 In other embodiments, the first and second pulleys or fixing points on the guide frame may be spaced apart so that, in use, the angle between the two lengths of the cable extending around the handle pulley is at least  $135^\circ$ , at least  $150^\circ$ , at least  $165^\circ$  or substantially  $180^\circ$ .

15 The actuation mechanism may comprise a rack and pinion mechanism, wherein a rack gear is coupled to the router housing, and wherein a pinion is coupled to the guide frame and driven by rotation of the pivotable handle.

The guide may be a guide rail. The guide rail may comprise a groove for receiving a  
20 guide portion of the router housing (e.g. a projection from the router housing). The guide rail or groove may be defined between two opposing parts of the guide frame. The guide frame may be a two-part structure. The guide portion of the router housing may comprise a fin configured to be received in the groove. Alternatively, the guide rail may be a projection for engaging with a recess or groove in the router housing. The  
25 guide may be any formation suitable for engaging with a complementary formation of the router housing or coupled to the housing.

The guide frame may comprise at least two guide rails, and the router housing comprises at least two corresponding guide portions. The guide rails may be provided  
30 on opposite sides of the housing.

The guide frame may be pivotable with respect to the base to alter the incline of the guide path with respect to a workpiece.

35 A router-receiving portion of the housing may be pivotable with respect to a guide portion of the router housing engageable with the guide, and the router-receiving

portion may be pivotable with respect to the guide portion, so that in use the incline of a router bit of a router received in the housing with respect to the guide path is adjustable.

- 5 The guide apparatus may further comprise a depth gauge for setting a maximum depth for a routing operation. The depth gauge may comprise a first gauge part constrained to move with the router housing and a second gauge part slidably coupled to the guide frame, the first and second parts may be configured to engage with one another so that the second part limits the range of movement of the router housing along the guide  
10 path in the engagement direction.

The guide apparatus may further comprise a main scale carried by or fixed with respect to the first gauge part, and a vernier scale carried by the second gauge part. Accordingly, in use a desired maximum depth can be set by offsetting the second  
15 gauge part from the first gauge part when the first gauge part is in a zero-depth position (or other known position) until the vernier scale indicates the desired maximum depth (or other value corresponding to the desired maximum depth). The main scale may be integral with the first gauge part. The vernier scale may be integral with the second gauge part.

20 The first gauge part may comprise a shoulder or stop arranged to abut the second gauge part, and the shoulder or stop may be disposed at least 70% along the length of the guide towards the end of the guide opposite the base. The depth gauge may be arranged so that the zero offset point of the main scale and vernier scale is separated  
25 from the workpiece along a direction parallel with the guide path by a distance of at least 25 cms, or by a distance of at least twice the maximum depth that can be set using the depth gauge. The distance may be at least 15cms, or at least 10cms. The distance may be at least three times or at least four times the maximum depth that can be set using the depth gauge. The depth gauge may be configured so that a depth can  
30 be set for a routing operation of at least 15 cms.

The second gauge part may comprise a lock for locking its position with respect to the guide frame. The lock may be a rotatable screw lock engageable with a guide frame, such as a T-bar coupled to the guide frame and engageable with the second gauge  
35 part.

The guide frame may define a guide path having a range of movement for the router housing at least 15 cms, for example at least 20cms.

5 The actuation mechanism may be configured so that the router housing moves along the guide path in the disengaging direction when a grab-portion of the handle for receiving an input force from the operator moves in a direction substantially opposite the disengaging direction.

10 According to a second aspect of the invention there is provided router apparatus comprising a guide apparatus in accordance with the first aspect of the invention and a woodworking router received in the housing.

15 According to a third aspect of the invention there is provided router apparatus comprising a router table, a guide apparatus in accordance with the first aspect of the invention coupled to the router table so that the engaging direction is generally upward, and a woodworking router received in the router housing.

20 According to a fourth aspect of the invention there is provided a method of operating a router apparatus according to the second or third aspects of the invention, the method comprising coupling an actuator to the actuation mechanism, and coupling the actuator to a controller for carrying out a predetermined router operation.

25 For example, the actuator may be a stepper motor, and the controller may be a pre-programmed controller, such as a computer provided with control software including router operation instructions. Alternatively the controller may be a processor or computer configured to receive instructions for a router operation, for example from an operator of the same or a different computer, and to control the actuator accordingly.

30 The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 schematically shows an isometric view of the guide apparatus in the upright configuration with the handle down and the router raised.

35 Figure 2 schematically shows an isometric view of the guide apparatus in the upright configuration with the handle up and the router lowered

Figure 3 schematically shows a side elevation of the guide apparatus in the upright configuration with the handle up and the router lowered (handle shown down for reference only);

5

Figure 4 schematically shows a plan view of the guide apparatus as shown in Figure 3;

Figure 5 schematically shows a side view of the guide apparatus with the router in a disengaged configuration;

10

Figure 6 schematically shows a front view of the guide apparatus;

Figure 7 schematically shows an isometric view of the guide apparatus in the inverted configuration with the handle raised and the router lowered; and

15

Figures 8.1-8.4 show the depthing mechanism of the guide apparatus.

As shown in Figures 1-8, the guide apparatus comprises a base 5.1 for engaging with a workpiece, a guide frame 2.1, 2.3 coupled to the base 5.1 and having at least one guide rail in the form of a groove defined between front and back parts 2.1, 2.3 of the guide frame, a router housing 1.2 slidably engaged with the guide rail for housing a router motor 1.5, and an actuation mechanism 3 having a pivotable handle 3.7 pivotably coupled to the base 5.1.

20

The router motor 1.5, its collet and bits, switching and electronics are as standard.

The guide frame (or gantry) comprises two spaced apart posts, each defined by a front part 2.1 and a back part 2.3 with a space between them which defines a guide rail or groove 5.2. As best shown in Figure 4, the front part 2.1 and back part 2.3 define a cavity therebetween in which respective inserts 2.4, 2.5 are received to define the guide rail 5.2. In this example, the inserts have opposing projections arranged to define a groove therebetween with a necked profile. In this embodiment, the guide frame is squarely attached to the base 5.1. The router motor 1.5 is an interchangeable motor which fits into the housing 1.2 that slides up and down in the guide frame (or gantry) 2.3, 2.1. The motor housing 1.2 is furnished with a vertical fin 1.4 on either side of it that slides in the guide rail 5.2 between the front and back part of the guide frame.

30

35

In this example the fin has a vertical recess configured to cooperate with the necked profile of the guide rail 5.2. It can be stopped at any point with a brake 5.5 (such as a handle-operated friction brake installed on one of the guide posts and operable to clamp the posts together to stop the fin 1.4), but it can also be stopped by the stopping part 4.2 of a depth gauge, as will be described in detail below. In this particular example, the brake 5.5 is provided in the form of a friction-clamp mounted partway up one of the posts of the guide frame on one side (the back part) of the guide frame on a cammed rotational mechanism, and having a C-shaped handle configured to extend around the side of the post and engage the opposing front side. In use, the handle can be rotated to clamp the front part and back part of the post together against the fin 1.4, thereby braking movement of the housing 1.2.

The guide frame can be any reasonable height as it is not limited by the tolerances of a sprung column arrangement, as is found in previously considered plunger routers. Therefore, it can take longer bits, and thereby can cut deeper holes and deeper mortises than conventional plunger routers. In this embodiment, the guide frame is approximately 35cms tall and defines a guide path having a travel of approximately 20cms for the housing 1.2.

The router can be taken up to the top of the guide frame leaving a clear space below for changing the bits in the collet 1.6. This is particularly useful in a router table where there is restricted access up under the table.

A top rail 2.2 of the guide frame extending between the guide posts of the guide frame acts as a carrying handle, so that an operator's hands are clear of the cutting area when carrying it.

The housing 1.2 and motor 1.5 can be raised and lowered by an actuation mechanism of cables (such as wires or cords) 3.12, 3.13 and pulleys 3.1, 3.2, 3.3, 3.4, 3.5, 3.6 operated by the pivotable handle 3.7. The pivotable handle comprises a pair of first handle arms 3.14 and a pair of second first handle arms 3.15, although in other embodiments there may be only a single first handle arm 3.14 and a single second handle arm 3.15. In the upright configuration, in which the housing is suspended above the base, a handle pulley 3.3 mounted on a first handle arm 3.14 of the pivotable handle 3.7 is operable to draw the cable out from the router body by pulling the first handle arm 3.14 down toward the base 5.1 (i.e. a disengaged configuration of the

handle 3.7), thereby pulling the motor up in the guide frame along a disengaging direction (i.e. away from the base 5.1 and workpiece). When the pull is relaxed, the router descends by gravity, resisted by the first handle arm 3.14 and the inherent tension in the pulley system. If the router is switched on, the weight of it will push the bit down to cut the work-piece. If off, the descent is arrested by the bit landing on the workpiece thereby zeroing the bit, or, the drop will be stopped by the stopping part 4.2 of the depth gauge locked onto a vertical tee rod 4.4 mounted on a guide post of the guide frame 2.1, 2.3.

10 In a first embodiment, a first pulley system is configured to pull the router motor up (in the upright configuration) in a disengaging direction as the operator pulls the first handle arm 3.14 down, and gravity makes it fall down in an engaging direction when he/she releases the pull.

15 The first pulley system is arranged as follows. One end of the cable 3.12 is attached to the top of the fin 1.4 on one side of the housing 1.2. The cable 3.12 goes up and over a pulley 3.1 at the top of the guide frame post (mounted in the groove or guide rail defined between the guide frame parts), out and down to a pulley 3.2 on the front part of the guide post towards the base 5.1, then round a handle pulley 3.3 on the first handle arm 3.14 of the handle 3.7, and back to an adjustable fixture 3.8 adjacent to the pulley 3.2 on the first part 2.1 of the guide post. Pull down on a grab portion 3.16 of the handle 3.7 extending between the first handle arms 3.14 and the handle pulley 3.3 draws out the wire 3.12, thereby raising the motor. Raise the first handle arm 3.14 or release the pressure and gravity takes the motor down again. There is a fixed handle 25 3.10 below the first handle arm 3.14 and fixed to the router base. Abutment of the first handle arm 3.14 and the fixed handle 3.10 limit further pressure from being exerted on the router or the workpiece. In examples, a locking mechanism may be provided between the fixed handle 3.10 and the grab portion of the first handle to selectively lock the handle 3.7 in the disengaged configuration (i.e. when the grab portion 3.16 abuts 30 the fixed handle 3.10), for example so that the router can be locked in a disengaged position in which the bit is clear of the workpiece.

In a further embodiment, and as shown in Figures 1-8, there is a second cable and pulley system configured to work counter to the first pulley system. In particular, when 35 using the first pulley system alone, the cable may go slack when the bit stops against the work, or a stop of the depth gauge 4.2. The second counteracting pulley system is

arranged so that the cords 3.12, 3.13 are in tension on the cable at all parts of the travel of the motor, irrespective of orientation (i.e. in the upright or inverted configurations). In particular, the second counter system comprises a cable 3.13 that is attached to the underside of the fin 1.4 on one side of the housing 1.2, and which  
5 extends down and around a pulley 3.4 towards the base of the guide frame post and mounted in the groove or guide rail 5.2, out and up to a pulley 3.4 on the back part of the guide post towards the base 5.1, then round a handle pulley 3.6 mounted on the second handle arm 3.15 of the pivotable handle 3.7, and back to an adjustable fixture 3.9 adjacent the pulley 3.5 mounted on the back part 2.3 of the guide post. The first  
10 and second handle arms 3.14, 3.15 are integrally formed and extend perpendicularly with respect to each other from the pivot of the handle 3.7.

The first and second pulley systems are configured so that, in the upright configuration, as the first handle arm 3.14 goes down towards the fixed handle 3.10 (i.e. the  
15 disengaged configuration of the handle) so that the first pulley system pulls the cable 3.12 outward to raise the housing 1.2, the pulley 3.6 attached to the second handle arm 3.15 of the second pulley system moves towards the guide rail 5.2 so that the cable 3.13 is taken in, thereby allowing the housing 1.2 to rise.

20 Conversely, when the first handle arm 3.14 of the first pulley system is raised away from the base 5.1 and towards the router housing 1.2 (i.e. the engaged configuration of the handle), the second system pulls the cable 3.13 outward to draw the housing 1.2 down by a second set of pulleys 3.4, 3.5, 3.6 to engage a workpiece. In the upright configuration, gravity assists the downward movement of the motor to engage a  
25 workpiece. All slack is taken out of the system by tightening the two cables 3.12, 3.13 of the first and second (front and back) pulley systems against each other.

Handle pulleys 3.3, 3.6 are placed equidistant from the pivot point of the handle 3.7 on the respective handle arms 3.14, 3.15. Accordingly, as the handle pulley 3.3 on the first  
30 handle arm 3.14 moves away from the guide frame to draw the cable 3.12 outward (i.e. as the grab portion 3.16 coupled to the first handle arm 3.14 descends to draw the housing 1.2 upwardly), the handle pulley 3.6 on the second handle arm 3.15 moves towards the guide frame to allow the cable 3.13 to be drawn inwardly, therefore allowing the housing 1.2 to move upwardly. The integrally formed compound handle  
35 3.7 operates the two systems together at the same time.

The distance the respective handle pulleys 3.3, 3.6 travel away from the guide frame results in double the travel distance of the housing 1.2, owing to the placement of the pulleys 3.2, 3.5 on the front and back guide posts 2.1, 2.3 respectively and the respective adjacent fixing points 3.8, 3.9. In particular, this arrangement means that  
5 the respective cables 3.12, 3.13 double back around the pulleys 3.3, 3.6 mounted on the handle arms 3.14, 3.15, so that the length of cable pulled and therefore the travel of the housing 1.2 is approximately twice the distance travelled by the respective handle pulleys 3.3, 3.6.

10 In addition, the first handle arm 3.14 provides a mechanical advantage as the length from the lateral grab portion 3.16 to the pivot is greater than the length from the handle pulley 3.3 mounted on the first handle arm 3.14 to the pivot. In practice the first handle arm 3.14 and grab portion 3.16 are squeezed together with the static handle 3.10 attached to the router base 5.1, to draw the router away from the workpiece in a  
15 disengaging direction. Conversely, the grab portion 3.16 may be urged against the router motor housing 1.2 when it is desired to move the rotor in the engaging direction, for example, to force the bit into the workpiece. In the particular embodiment shown in Figures 1-8, a laterally extending engaging handle 3.11 is provided on the router housing 1.2 and is positioned so that, as the grab portion 3.16 of the handle 3.7 is  
20 brought upwardly (in the upright configuration of the router) towards the engaged configuration of the handle, so that the router moves down in the engaging direction towards a workpiece, the grab portion 3.16 abuts the engaging handle 3.11, thereby limiting the travel of the router in the engaging direction. A user can grasp the engaging handle 3.11 and push the grab portion 3.16 of the handle 3.7 towards it in  
25 order to urge the router bit into a workpiece.

In contrast to previously considered plunge routers, there are no springs acting between the housing or motor and the guide frame or base.

30 As shown in Figures 1-8, in this embodiment first and second pulley systems are installed on both guide posts of the guide frame 2.1, 2.3, which may ensure that in use there is no eccentric loading on the housing and router. However, in other embodiments, the first and second pulley systems may be installed on a single guide post on one side of the router housing only. In particular, the guide frame is configured  
35 so that there is a minimal tolerance (e.g. a running fit) between the guide rail (i.e. the groove between the front and back guide frame parts 2.1, 2.3) and the fins 1.4 of the

housing received in the guide rail. Accordingly, even when the first and second pulley systems are installed on a single guide post 2.1, 2.3, there should be no appreciable eccentricity in the movement of the housing 1.2.

5 As best shown in Figures 8.1-8.4, the guide apparatus comprises a two-part depth gauge. A first part 4.1 of the depth gauge is fixed with respect to the housing 1.2 and incorporates a main scale 4.6 and a shoulder 4.7 or stop projecting laterally from it at the zero point of the scale 4.6. A second part 4.2 comprises a stop block with a vernier scale 4.5 (or vernier stop) that is configured to slide vertically up and down on a tee rod  
10 4.4 mounted on a guide post of the guide frame 2.1, 2.3. The second part 4.2 can be locked with a locking key 4.3 to the tee-rod 4.4 at any point below the main scale where it blocks the downward travel of the router.

The scale 4.6 is mounted on the housing 1.2 towards an end of the housing away from  
15 the base 5.1 so that it can be easily seen and operated. In use, the router bit is zeroed by lowering the housing, router or bit so that the bit touches the work to register the zero point, and the vernier stop block 4.2 (the second part) is subsequently brought up to the underside of the projecting part 4.7 of the first part 4.1 corresponding to the zero point of the main scale 4.6. The main scale 4.6 of the first part 4.1, the vernier scale of  
20 the second part 4.2 and the bit are thus registered at zero (Figure 8.2). The vernier stop 4.2 can then be taken downwards a gauged distance between opposing faces 4.7, 4.8 of the first part 4.1 and the second part 4.2 respectively, and locked off (Figure 8.3). This therefore allows the router to drop that same gauged distance. The vernier stop  
25 4.2 therefore stops the router as it moves along the engaging direction, as required (Figure 8.4).

In contrast, previously considered plunge routers invariably have a depth mechanism that is set towards the base of the router, and can therefore be difficult to see,  
particular when use in an inverted configuration underneath a router table.

30

The router itself may be locked off at depth by a separate locking mechanism 5.5, but the weight of the router held on the vernier stop is sufficient to keep the depth of cut constant and exact.

35 When the router is zeroed onto the workpiece, the gap between the underside 4.7 of the projecting part of the first gauge part 4.1 and the top 4.8 of the second gauge part

4.2 determines the depth of cut. Gauging might be done from a vernier or digital calliper, or a gauging piece of some known depth such as a drill bit shank, or the thickness of a workpiece. As will be appreciated, the arrangement of the depth gauge away from the base 5.1 means that the gap between the projecting part 4.7 corresponding to the main scale 4.1 and the vernier stop 4.2 is easily accessible and can be gauged by such means or, the exact measured distance can be read off the vernier gauge between scale and vernier block with precision.

As shown in Figure 7, the guide apparatus can also be used in an inverted position in which the housing is suspended below the base. In particular, the guide apparatus may be used in a router table where it is positioned upside down. In the inverted configuration, the action of the guide apparatus is then reversed so that the second (or back) pulley system raises the router towards the bore 5.1 and table in an engaging direction when pulling down on the grab portion 3.16 of the handle 3.7 (i.e. so that the grab portion is moved away from the fixed handle 3.10 towards the disengaged configuration of the handle), and conversely relaxing the handle causes the router to fall away from the base 5.1 and table, and the grab portion 3.16 to close against the fixed handle (i.e. in the disengaged configuration of the handle). The depth gauge is well clear of the underside of the router table, where it could otherwise be obscured by the table and fixings.

The applicant has found that the handle 3.7 can be operated with little force input, so that it can be easily operated with accurate control. In particular, the applicant has found that the "finger tip action" of the handle 3.7 means that mortising can be done with one hand, leaving the other hand free to operate a mortising or dovetailing jig. The added height and stability given by the guide frame means that longer bits can be used, cutting deeper mortises than are possible with known sprung column routers.

CLAIMS:

1. Guide apparatus for guiding a woodworking router relative a workpiece, the guide apparatus comprising:
- 5 a base for engaging with a workpiece or worktable carrying the workpiece;  
a guide frame coupled to the base and having at least one guide defining a linear guide path;  
a router housing slidably engaged with the guide for movement along the guide path relative the guide frame in an engaging direction towards the base and a  
10 disengaging direction away from the base, the router housing being configured to receive a woodworking router so that, in use, a router bit of the router extends from the router housing towards the base; and  
an actuation mechanism having a pivotable handle for receiving an input force from an operator to move housing along the guide path;
- 15 wherein the actuation mechanism is configured so that, in use with the guide apparatus in an upright configuration in which the router housing is above the base, an input force is required to raise the housing and the router received therein against gravity.
- 20 2. Guide apparatus according to claim 1, wherein the apparatus is configured so that the router housing is biased to move along the guide path only by a gravity force acting on the housing and any router received therein.
3. Guide apparatus according to claim 1 or 2, wherein the actuation mechanism  
25 comprises a disengaging pulley mechanism for moving the router housing along the guide path in the disengaging direction.
4. Guide apparatus according to any preceding claim, wherein the actuation mechanism comprises an engaging pulley mechanism for moving the router housing  
30 along the guide path in the engaging direction.
5. Guide apparatus according to both claims 3 and 4, wherein the disengaging pulley mechanism and the engaging pulley mechanism are coupled to the pivotable handle and configured so that, in use, each pulley mechanism is in tension.

6. Guide apparatus according to any of claims 3 to 5, wherein the or each pulley mechanism comprises a handle pulley coupled to the pivotable handle at a location spaced from the pivot axis of the handle so that, in use, the displacement of the router housing along the guide path due to the displacement of the handle pulley is greater  
5 than the arc length displacement of the handle pulley.
7. Guide apparatus according to claim 6, wherein the or each pulley mechanism comprises a cable extending between, in order, a first pulley or fixing point on the guide frame, the handle pulley, and a second pulley or fixing point on the guide frame; and  
10 wherein the first and second pulleys or fixing points on the guide frame are adjacent one another so that, in use, two lengths of the cable extending between the handle pulley and the first and second pulleys or fixing points respectively are substantially parallel.
- 15 8. Guide apparatus according to claim 1 or 2, wherein the actuation mechanism comprises a rack and pinion mechanism, wherein a rack gear is coupled to the router housing, and wherein a pinion is coupled to the guide frame and driven by rotation of the pivotable handle.
- 20 9. Guide apparatus according to any preceding claim, wherein the guide is a guide rail comprising a groove for receiving a guide portion of the router housing.
10. Guide apparatus according to claim 9, wherein the guide portion of the router housing comprises a fin configured to be received in the groove.  
25
11. Guide apparatus according to claim 9 or 10, wherein the guide frame comprises at least two guide rails, and wherein the router housing comprises at least two corresponding guide portions.
- 30 12. Guide apparatus according to any preceding claim, wherein the guide frame is pivotable with respect to the base to alter the incline of the guide path with respect to a workpiece.
13. Guide apparatus according to any preceding claim, wherein a router-receiving  
35 portion of the router housing is pivotable with respect to a guide portion of the housing engageable with the guide, and wherein the router-receiving portion is pivotable with

respect to the guide portion, so that in use the incline of a router bit of a router received in the housing with respect to the guide path is adjustable.

14. Guide apparatus according to any preceding claim, further comprising a depth  
5 gauge for setting a maximum depth for a routing operation, the depth gauge comprising  
a first gauge part constrained to move with the router housing and a second gauge part  
slidably coupled to the guide frame, wherein the first and second parts are configured  
to engage with one another so that the second part limits the range of movement of the  
router housing along the guide path in the engagement direction.
- 10
15. Guide apparatus according to claim 14, further comprising a main scale carried  
by or fixed with respect to the first gauge part, and a vernier scale carried by the  
second gauge part.
- 15
16. Guide apparatus according to claim 14 or 15, wherein the first gauge part  
comprises a shoulder or stop arranged to abut the second gauge part, and wherein the  
shoulder or stop is disposed at least 70% along the length of the guide towards the end  
of the guide opposite the base.
- 20
17. Guide apparatus according to any of claims 14 to 16, wherein the depth gauge is  
arranged so that the zero offset point of the main scale and vernier scale is separated  
from the workpiece along a direction parallel with the guide path by a distance of at  
least 10 cms, or by a distance of at least twice the maximum depth that can be set  
using the depth gauge.
- 25
18. Guide apparatus according to any of claims 14 to 17, wherein the depth gauge is  
configured so that a depth can be set for a routing operation of at least 15 cms.
19. Guide apparatus according to any of claims 14 to 18, wherein the second gauge  
30 part comprises a lock for locking its position with respect to the guide frame.
20. Guide apparatus according to any preceding claim, wherein the guide frame  
defines a guide path having a range of movement for the router housing at least 15  
cms.

21. Guide apparatus according to any preceding claim, wherein the actuation mechanism is configured so that the router housing moves along the guide path in the disengaging direction when a grab-portion of the handle for receiving an input force from the operator moves in a direction substantially opposite the disengaging direction.
- 5
22. Router apparatus comprising a guide apparatus in accordance with any of the preceding claims and a woodworking router received in the housing.
23. Router apparatus comprising a router table, a guide apparatus in accordance with any of claims 1 to 21 coupled to the router table so that the engaging direction is generally upward, and a woodworking router received in the housing.
- 10
24. A method of operating a router apparatus according to any preceding claim, the method comprising coupling an actuator to the actuation mechanism, and coupling the actuator to a controller for carrying out a predetermined router operation.
- 15
25. Guide apparatus or router apparatus substantially as described herein with reference to the drawings.



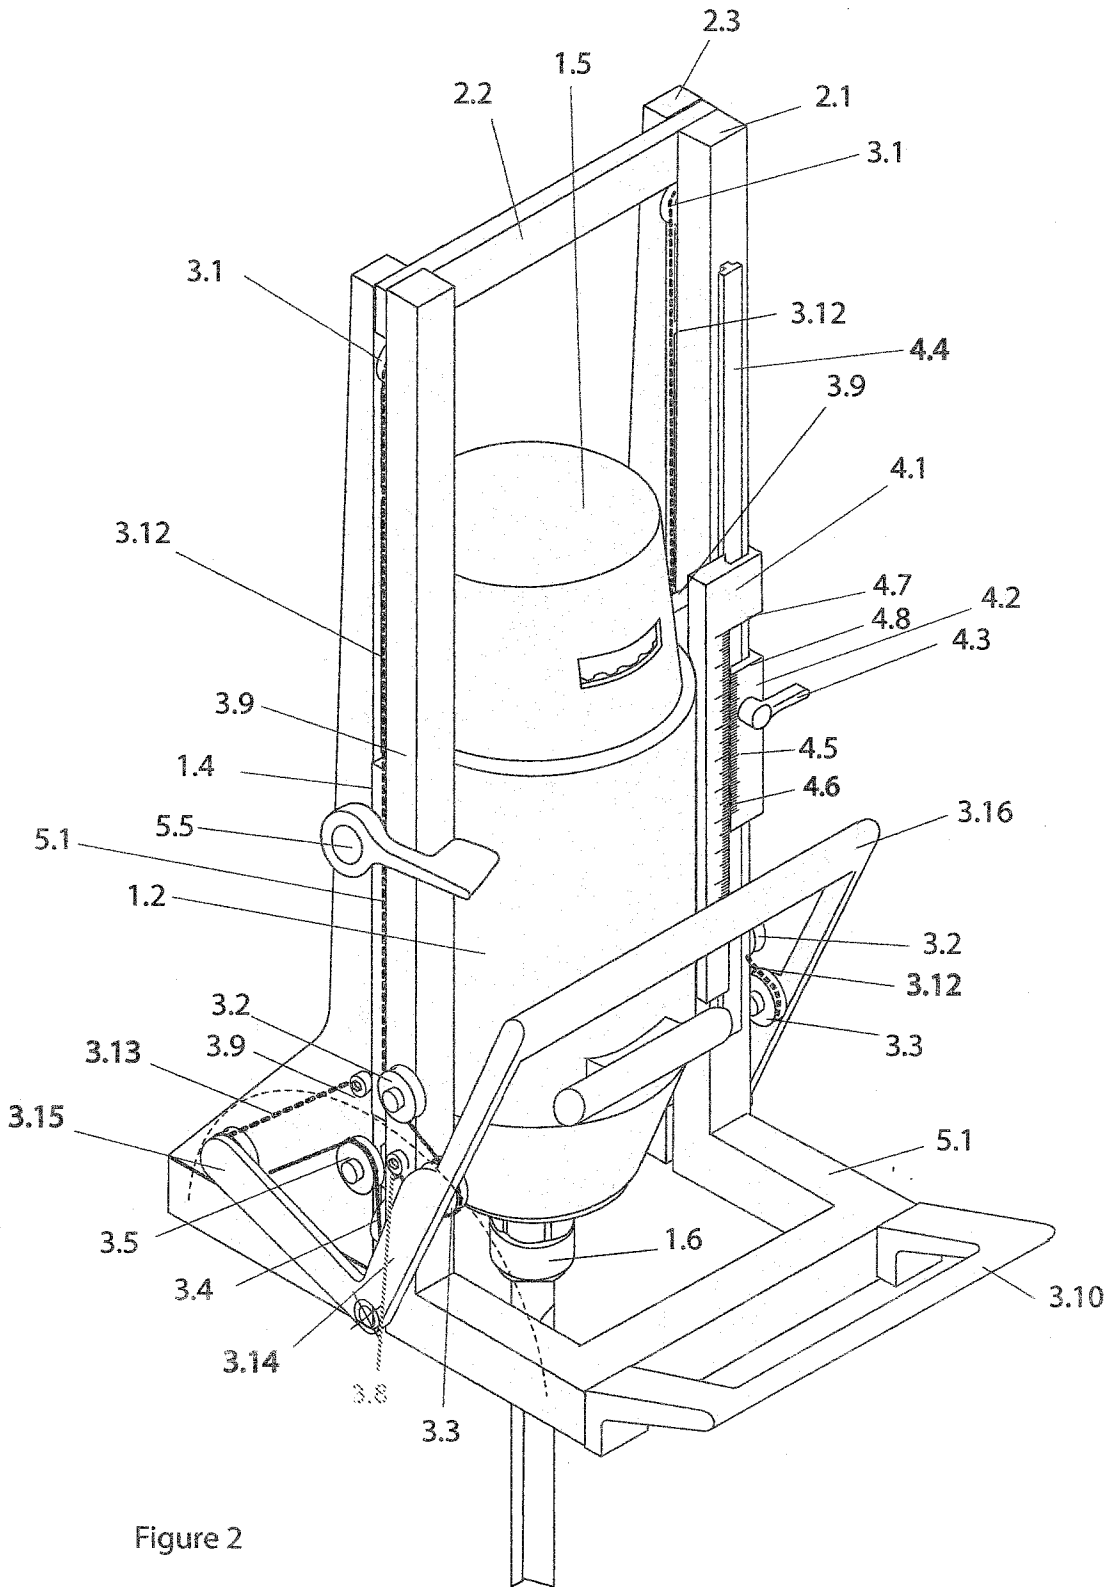


Figure 2

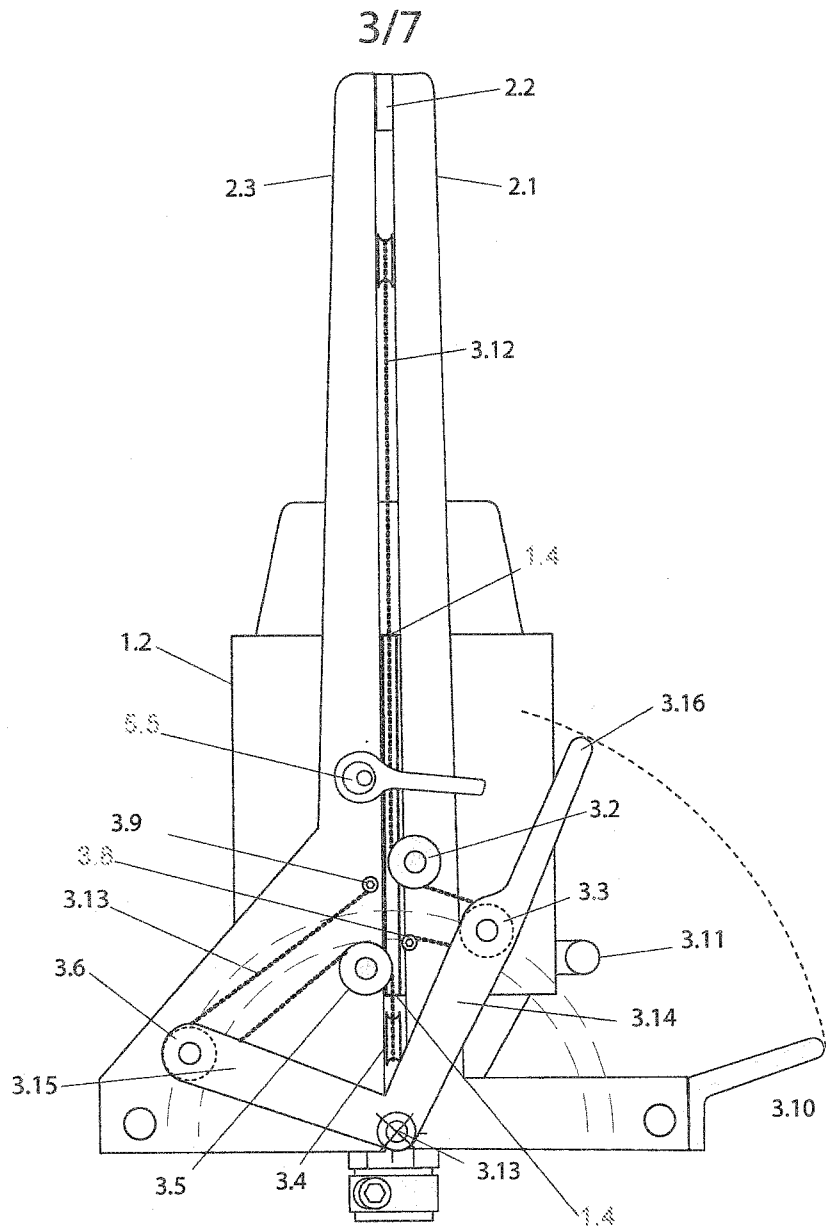


Figure 3

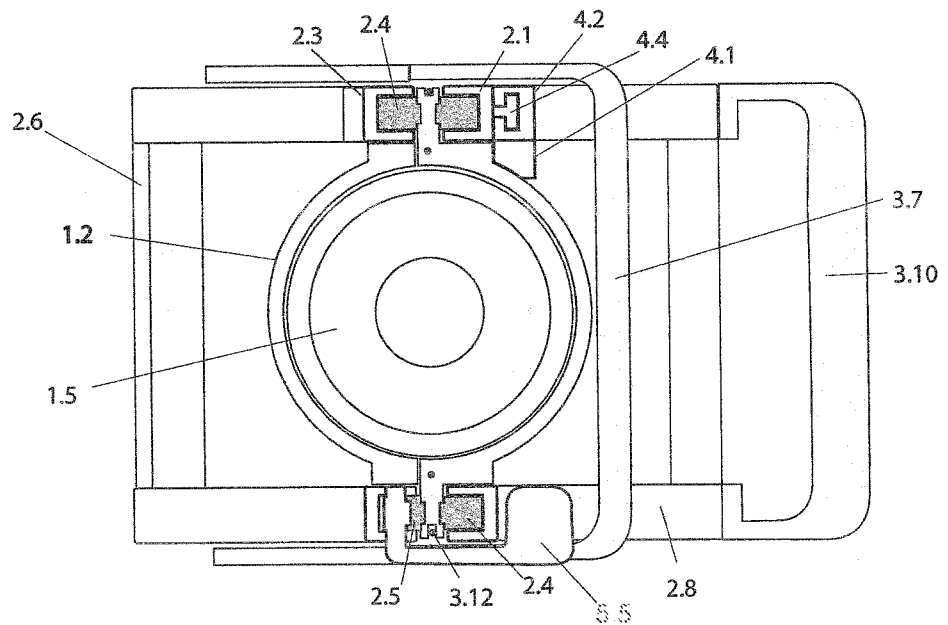


Figure 4

4/7

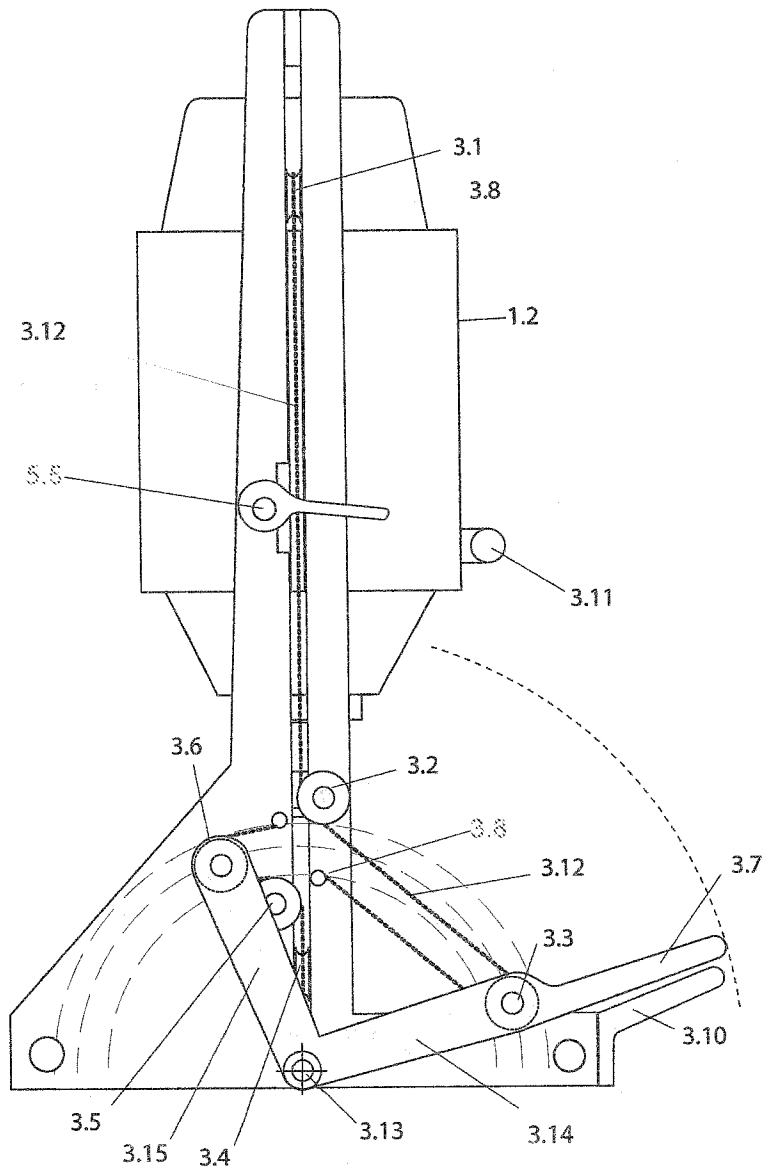


Figure 5

5/7

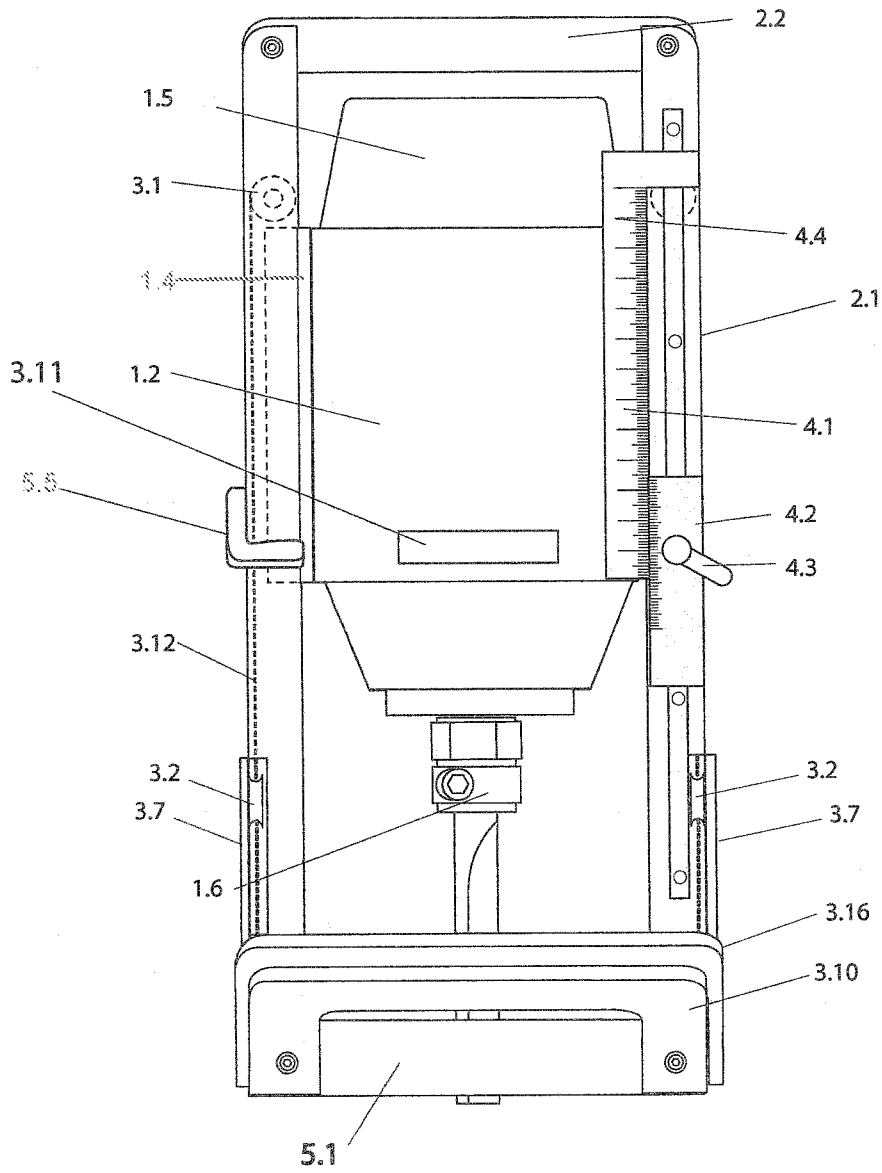


Figure 6

6/7

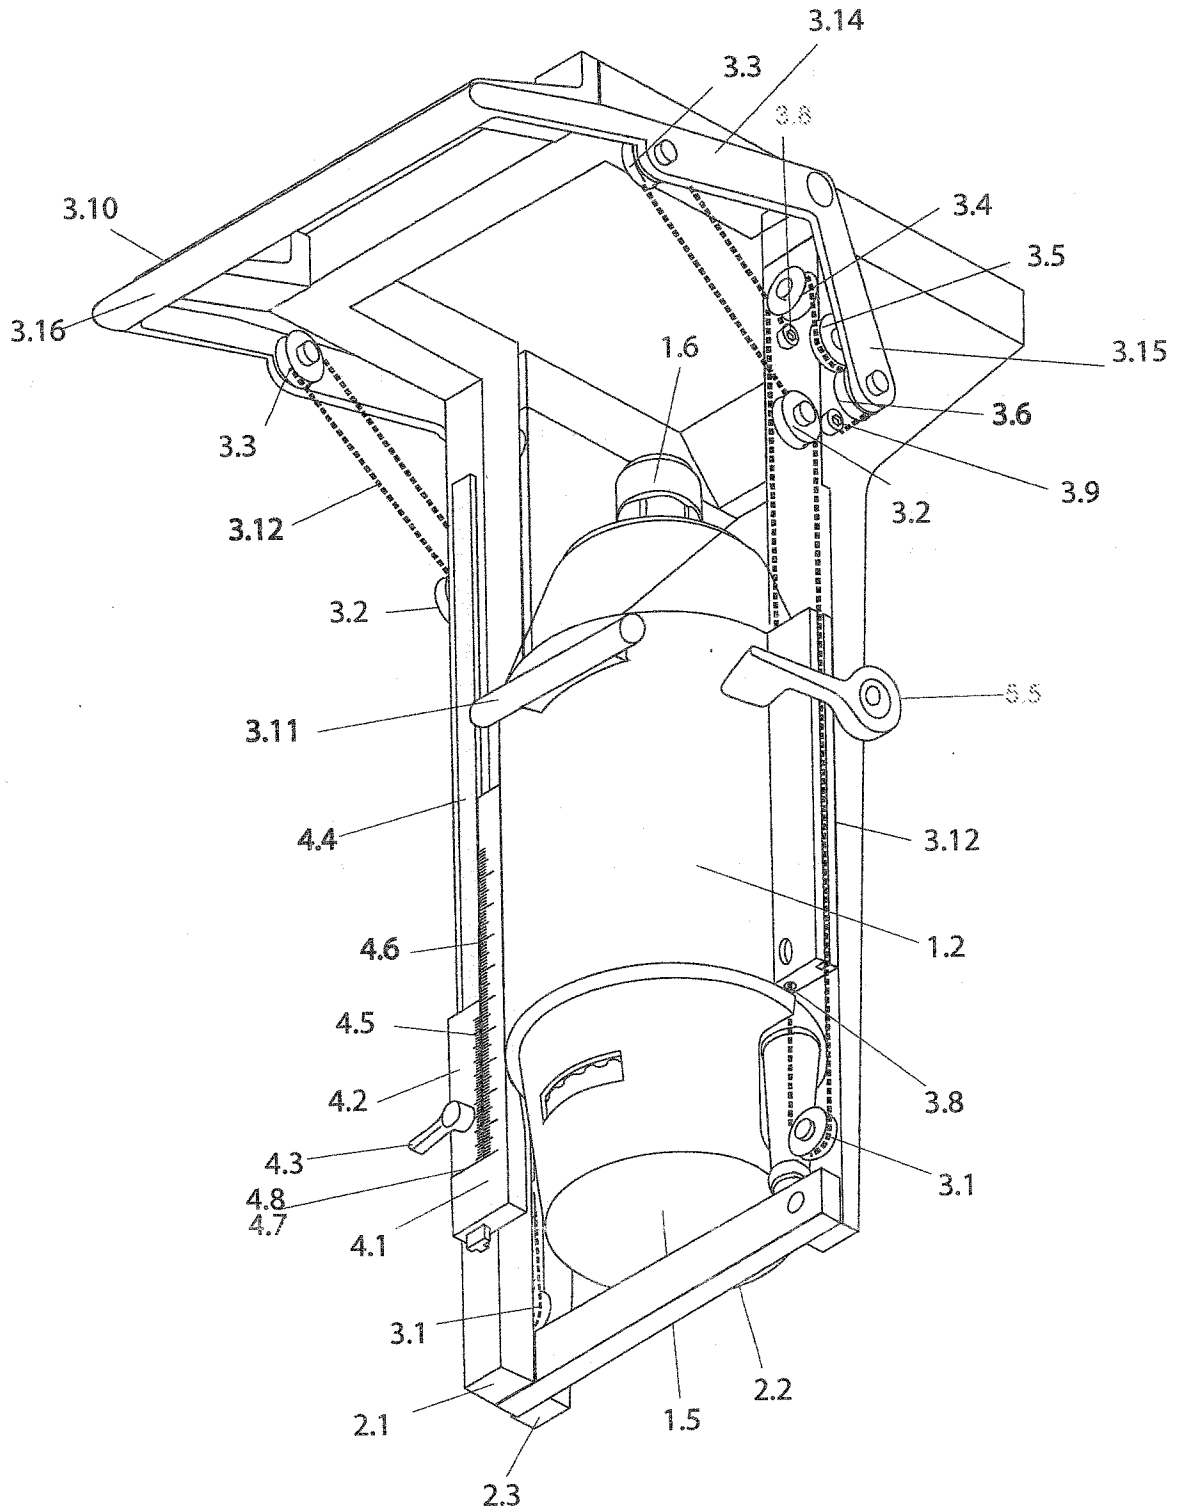


Figure 7

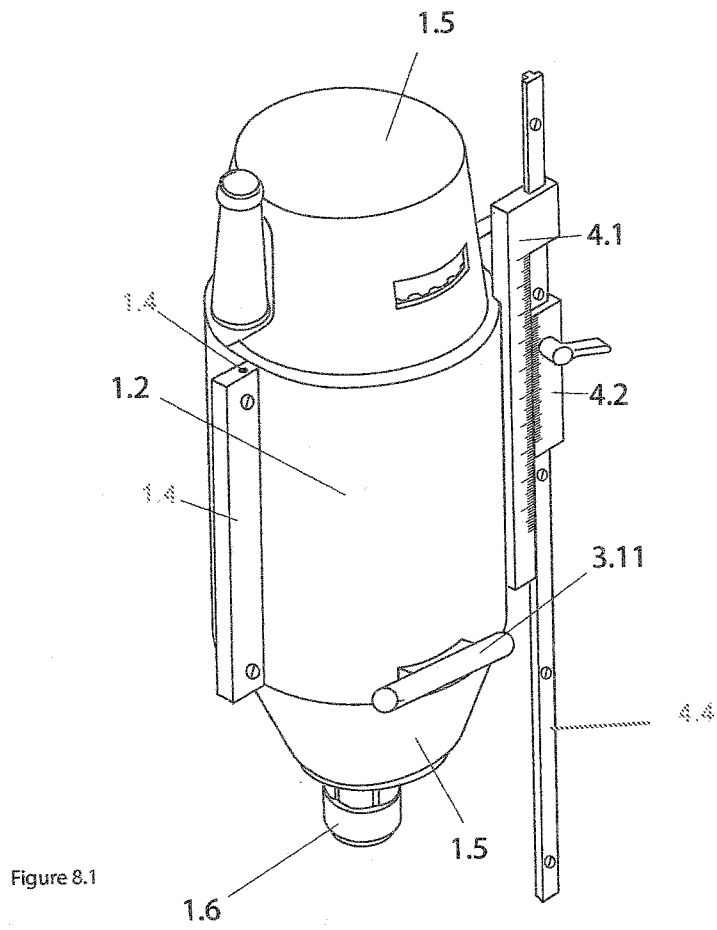


Figure 8.1

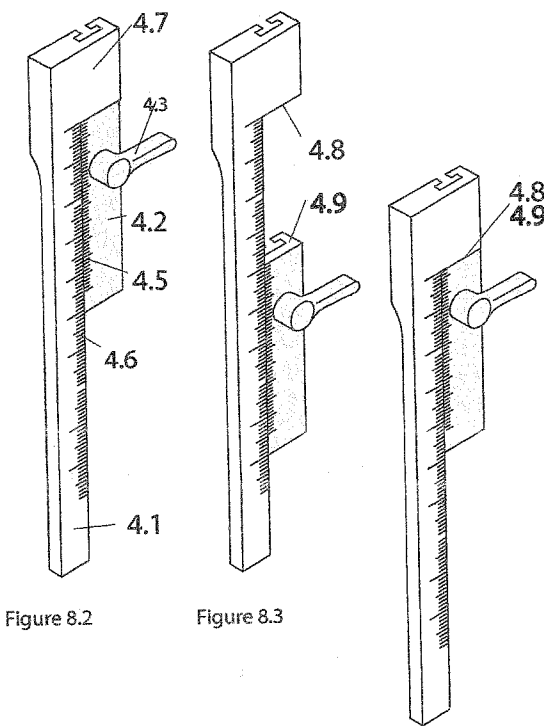


Figure 8.2

Figure 8.3

Figure 8.4

Figure 8

INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2017/051563

A. CLASSIFICATION OF SUBJECT MATTER  
INV. B27C5/10 B25H1/00  
ADD.  
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
Minimum documentation searched (classification system followed by classification symbols)  
B27C B25H B27F  
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ES 1 038 985 U (VIRUTEX SA [ES]) 1 September 1998 (1998-09-01)	1,2,8, 14, 16-20, 22,25 15
Y	figures 1-3 -& Virutex: "Lock Mortiser Model FC161 operating instructions", 13 March 2005 (2005-03-13), XP055393573, Retrieved from the Internet: URL:http://virutex.com/manuals/fc161-manua l-english.pdf [retrieved on 2017-07-25] second page (numbered 6 bottom left), right hand column, fourth line, "max trimming depth 12.5 cm"; figures ----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search  27 July 2017	Date of mailing of the international search report  03/08/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Huggins, Jonathan

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2017/051563

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 918 652 A (TUCKER EDWIN C [CA]) 6 July 1999 (1999-07-06)	1,2,8, 22,23,25
Y	column 1, line 19 - line 22 column 1, line 43 - line 47 column 1, line 59 - line 61 column 2, line 1 - line 24 column 3, line 10 - line 18 column 3, line 29 - line 41 column 5, line 54 - line 63 column 6, line 20 - line 23 figures 1,2	12
X	----- US 4 740 119 A (LIERZ LAWRENCE R [US]) 26 April 1988 (1988-04-26) figures 1,2	1,2, 9-11,21
X	----- WO 2008/098080 A2 (BLACK & DECKER INC [US]; SOMMERVILLE THOMAS [CA]; HILL SEAN [US]; SMIT) 14 August 2008 (2008-08-14) figure 7	1,2,22, 23
X	----- US 3 351 047 A (BARKER CHARLES E) 7 November 1967 (1967-11-07) figure 1	1,3
X	----- US 2002/164223 A1 (RYAN WILLIAM J [US] ET AL) 7 November 2002 (2002-11-07) paragraph [0024]; figures 7,8	24
Y	----- US 4 082 474 A (STIGER DARREL E) 4 April 1978 (1978-04-04) figure 1	12
Y	----- US 6 374 878 B1 (MASTLEY PATRICK J [US] ET AL) 23 April 2002 (2002-04-23) figure 5	13
Y	----- EP 2 191 946 A2 (VIRUTEX SA [ES]) 2 June 2010 (2010-06-02) figures 2,9	13
Y	----- GB 2 453 532 A (GMCA PTY LTD [AU]; GMC WORLDWIDE PTY LTD [AU]) 15 April 2009 (2009-04-15) claim 12	15
A	----- US 4 537 234 A (ONSRUD CHARLES R [US]) 27 August 1985 (1985-08-27) figures	1
A	----- WO 2013/104321 A1 (POSITEC POWER TOOLS SUZHOU CO [CN]) 18 July 2013 (2013-07-18) figures 1-4,7,8	1
	----- -/--	

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2017/051563

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96/33847 A1 (ATKINS RONALD F [GB]) 31 October 1996 (1996-10-31) claims 1,2; figure 1 -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/GB2017/051563
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
ES 1038985	U	01-09-1998	NONE
-----			
US 5918652	A	06-07-1999	NONE
-----			
US 4740119	A	26-04-1988	NONE
-----			
WO 2008098080	A2	14-08-2008	CA 2677040 A1 14-08-2008
			CA 2899807 A1 14-08-2008
			CA 2925777 A1 14-08-2008
			EP 2170563 A2 07-04-2010
			US 2008210337 A1 04-09-2008
			US 2009050235 A1 26-02-2009
			US 2011162757 A1 07-07-2011
			US 2011186179 A1 04-08-2011
			WO 2008098080 A2 14-08-2008
-----			
US 3351047	A	07-11-1967	NONE
-----			
US 2002164223	A1	07-11-2002	DE 10215736 A1 31-07-2003
			GB 2375320 A 13-11-2002
			US 2002164223 A1 07-11-2002
-----			
US 4082474	A	04-04-1978	NONE
-----			
US 6374878	B1	23-04-2002	NONE
-----			
EP 2191946	A2	02-06-2010	EP 2191946 A2 02-06-2010
			ES 2320966 A1 29-05-2009
			US 2010132840 A1 03-06-2010
-----			
GB 2453532	A	15-04-2009	NONE
-----			
US 4537234	A	27-08-1985	NONE
-----			
WO 2013104321	A1	18-07-2013	CN 103192431 A 10-07-2013
			WO 2013104321 A1 18-07-2013
-----			
WO 9633847	A1	31-10-1996	AU 5505996 A 18-11-1996
			WO 9633847 A1 31-10-1996
-----			